



# FCC Radio Test Report


## FCC ID: 2AIBC-GOLIGHT3

This report concerns: Original Grant

**Project No.** : 2410C020  
**Equipment** : Light Phone III  
**Brand Name** : Light  
**Test Model** : TLP301  
**Series Model** : N/A  
**Applicant** : The Light Phone Inc.  
**Address** : 19 Morris Avenue Brooklyn, NY 11205 United States  
**Manufacturer** : The Light Phone Inc.  
**Address** : 19 Morris Avenue Brooklyn, NY 11205 United States  
**Factory** : SHENZHEN FUTAIHONG PRECISION INDUSTRY CO.,LTD.  
**Address** : ROOM 101, FOXCONN F7 FACTORY, NO.2, DONGHUAN 2ND ROAD, FUKANG COMMUNITY, LONGHUA STREET, LONGHUA DISTRICT, SHENZHEN, P.R.CHINA  
**Date of Receipt** : Oct. 09, 2024  
**Date of Test** : Oct. 12, 2024 ~ Jan. 23, 2025  
**Issued Date** : Mar. 03, 2025  
**Report Version** : R01  
**Test Sample** : Engineering Sample No.: SSL20241009192 for output power, SSL20241009185 for radiated-30 MHz to 18 GHz, SSL20241009186 for ac power line conducted Emissions and other radiated, SSL20241009190 for others.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by :   
Antony Liang

Approved by :   
Chay Cai

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . APPLICABLE STANDARDS</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>2.1 TEST FACILITY</b>	<b>8</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>8</b>
<b>2.3 TEST ENVIRONMENT CONDITIONS</b>	<b>9</b>
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>10</b>
<b>3.2 TEST MODES</b>	<b>13</b>
<b>3.3 PARAMETERS OF TEST SOFTWARE</b>	<b>16</b>
<b>3.4 DUTY CYCLE</b>	<b>17</b>
<b>3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>19</b>
<b>3.6 SUPPORT UNITS</b>	<b>19</b>
<b>3.7 CUSTOMER INFORMATION DESCRIPTION</b>	<b>19</b>
<b>4 . AC POWER LINE CONDUCTED EMISSIONS</b>	<b>20</b>
<b>4.1 LIMIT</b>	<b>20</b>
<b>4.2 TEST PROCEDURE</b>	<b>20</b>
<b>4.3 DEVIATION FROM TEST STANDARD</b>	<b>20</b>
<b>4.4 TEST SETUP</b>	<b>21</b>
<b>4.5 EUT OPERATION CONDITIONS</b>	<b>21</b>
<b>4.6 TEST RESULTS</b>	<b>21</b>
<b>5 . RADIATED EMISSIONS</b>	<b>22</b>
<b>5.1 LIMIT</b>	<b>22</b>
<b>5.2 TEST PROCEDURE</b>	<b>23</b>
<b>5.3 DEVIATION FROM TEST STANDARD</b>	<b>24</b>
<b>5.4 TEST SETUP</b>	<b>24</b>
<b>5.5 EUT OPERATION CONDITIONS</b>	<b>26</b>
<b>5.6 TEST RESULTS - 9 KHZ TO 30 MHZ</b>	<b>26</b>
<b>5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ</b>	<b>26</b>
<b>5.8 TEST RESULTS - ABOVE 1000 MHZ</b>	<b>26</b>
<b>6 . BANDWIDTH</b>	<b>27</b>
<b>6.1 LIMIT</b>	<b>27</b>
<b>6.2 TEST PROCEDURE</b>	<b>27</b>

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	28
6.5 EUT OPERATION CONDITIONS	28
6.6 TEST RESULTS	28
7 . MAXIMUM OUTPUT POWER	29
7.1 LIMIT	29
7.2 TEST PROCEDURE	29
7.3 DEVIATION FROM STANDARD	29
7.4 TEST SETUP	29
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULTS	29
8 . POWER SPECTRAL DENSITY	30
8.1 LIMIT	30
8.2 TEST PROCEDURE	30
8.3 DEVIATION FROM STANDARD	30
8.4 TEST SETUP	31
8.5 EUT OPERATION CONDITIONS	31
8.6 TEST RESULTS	31
9 . FREQUENCY STABILITY	32
9.1 LIMIT	32
9.2 TEST PROCEDURE	32
9.3 DEVIATION FROM STANDARD	32
9.4 TEST SETUP	32
9.5 EUT OPERATION CONDITIONS	32
9.6 TEST RESULTS	32
10 . MEASUREMENT INSTRUMENTS LIST	33
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	36
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	39
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	44
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	47
APPENDIX E - BANDWIDTH	117
APPENDIX F - MAXIMUM OUTPUT POWER	134
APPENDIX G - POWER SPECTRAL DENSITY	139

**Table of Contents****Page**

<b>APPENDIX H - FREQUENCY STABILITY</b>	<b>148</b>
---	------------

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2410C020	R00	Original Report.	Feb. 20, 2025	Invalid
BTL-FCCP-4-2410C020	R01	Update the address of applicant.	Mar. 03, 2025	Valid

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:  
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
  - Outdoor access point device
  - Indoor access point device
  - Fixed point-to-point access points device
  - Client device

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated Emissions-1GHz to 18GHz items: Room 102 & Room 702, Building 3, No.9, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

For other items: 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{(dB)}}$
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

## C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	50%	AC 120V/60Hz	Hayden Chen	Oct. 28, 2024
Radiated Emissions-9kHz to 30MHz	26°C	48%	DC 3.85V	Hayden Chen	Nov. 08, 2024
Radiated Emissions-30MHz to 1000MHz	22°C	50%	DC 3.85V	Calvin Wen	Nov. 05, 2024
Radiated Emissions-Above 1000 MHz	23°C	47%	DC 3.85V	Jensen Zhou	Oct. 31, 2024-Nov. 01, 2024
	22°C	50%	DC 3.85V	Calvin Wen	Nov. 15, 2024
Bandwidth	26°C	52%	DC 3.85V	Parker Yang	Oct. 30, 2024
Maximum Output Power	25-26°C	60%	DC 3.85V	Alex Yin	Oct. 28, 2024-Nov. 12, 2024
Power Spectral Density	26°C	52%	DC 3.85V	Parker Yang	Oct. 30, 2024
Frequency Stability	Normal & Extreme	52%	Normal & Extreme	Parker Yang	Oct. 30, 2024

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Light Phone III
Brand Name	Light
Test Model	TLP301
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.330.00.0_B01_00WW
Hardware Version	DVT
Power Source	1# Supplied from USB-C port. 2# Battery supplied. Model: HE414
Power Rating	1# DC 5V/900Ma 2# Rated Capacity: 1730mAh/6.67Wh 1800mAh/6.93Wh Rated Voltage: 3.85V
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 150 Mbps IEEE 802.11ac: up to 433.3 Mbps
Maximum Output Power UNII-1	IEEE 802.11a: 17.24 dBm (0.0530 W)
Maximum Output Power UNII-2A	IEEE 802.11a: 17.23 dBm (0.0528 W)
Maximum Output Power UNII-2C	IEEE 802.11a: 16.90 dBm (0.0490 W)
Maximum Output Power UNII-3	IEEE 802.11a: 16.75 dBm (0.0473 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

## 3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	Dongguan Huayu precision technology Co., Ltd.	ANT3	IFA	N/A	-0.69

### 3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 17	TX A Mode Channel 48 (UNII-1)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 17	TX A Mode Channel 48 (UNII-1)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 17	TX A Mode Channel 48 (UNII-1)

<b>Radiated Emissions Test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

<b>Conducted Test</b>	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

**Note:**

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX A Mode Channel 48 (UNII-1) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and HT40.
- (6) For radiated emission: The test data of vertical and horizontal have been re-evaluated, the worst case and recorded in the test report.

### 3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	QRCT		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	17.5	17.5	17.5
IEEE 802.11ac(VHT20)	13	13	13
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	10	12.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	10		

UNII-2A			
Test Software Version	QRCT		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	17.5	17	17
IEEE 802.11ac(VHT20)	13	13	13
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	12.5	12.5	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	13		

UNII-2C			
Test Software Version	QRCT		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	17	17	18
IEEE 802.11ac(VHT20)	13	13	14
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	12.5	12.5	13
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	13	13	

UNII-3			
Test Software Version	QRCT		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	18	18	18
IEEE 802.11ac(VHT20)	14	14	14
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	13.5	13.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	14		

### 3.4 DUTY CYCLE


If duty cycle is  $\geq 98\%$ , duty factor is not required.

If duty cycle is  $< 98\%$ , duty factor shall be considered.


The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

**IEEE 802.11a**

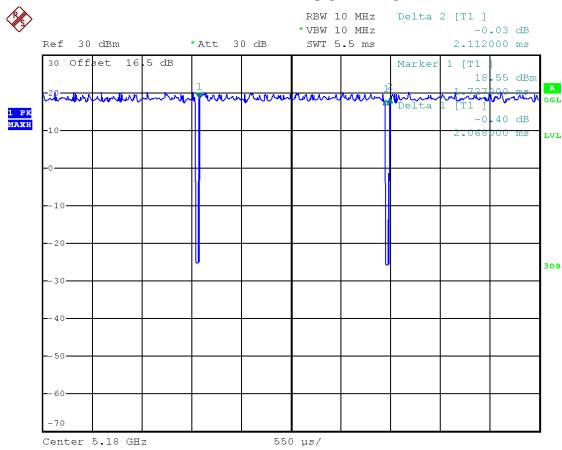


**IEEE 802.11ac(VHT20)**

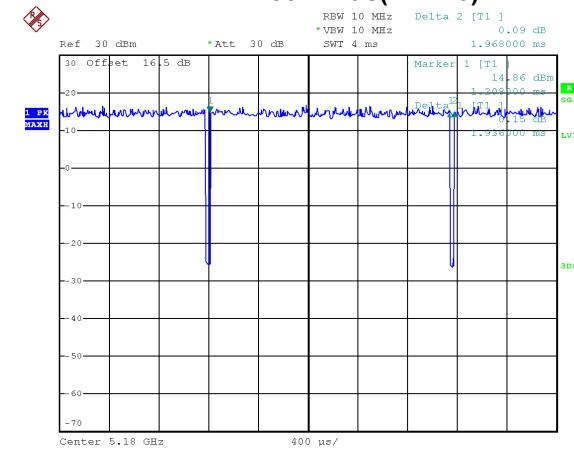


Date: 30.OCT.2024 15:38:40

Duty cycle =  $2.068 \text{ ms} / 2.112 \text{ ms} = 97.92\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.09$

**IEEE 802.11ac(VHT40)**

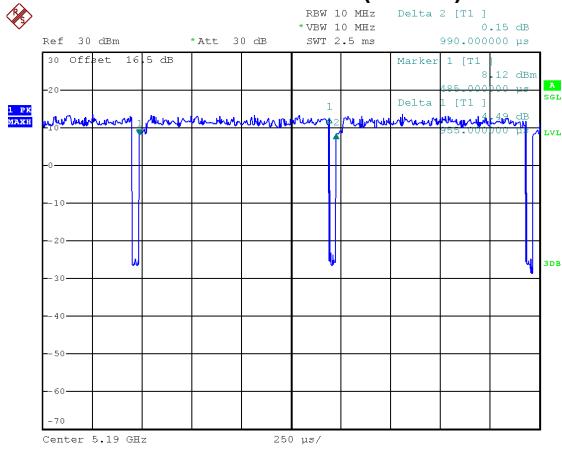

**IEEE 802.11ac(VHT80)**

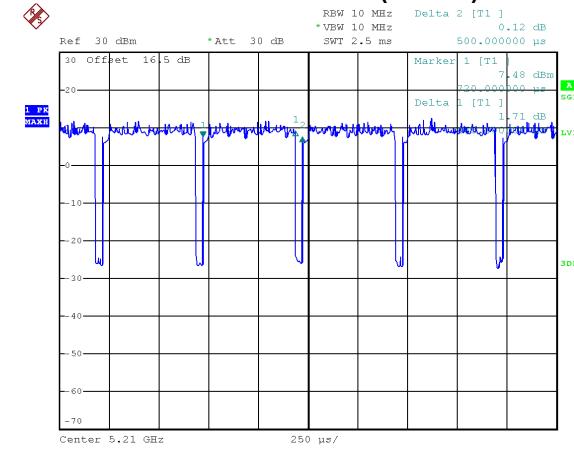

Date: 30.OCT.2024 15:43:01

Duty cycle =  $0.955 \text{ ms} / 0.990 \text{ ms} = 96.46\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.16$

Date: 30.OCT.2024 15:45:39

Duty cycle =  $0.465 \text{ ms} / 0.500 \text{ ms} = 93.00\%$   
Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.32$

**NOTE:**

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 484 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle  $\geq$  98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1047 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2151 Hz (Duty cycle < 98%).

**3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED****3.6 SUPPORT UNITS**

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-

**3.7 CUSTOMER INFORMATION DESCRIPTION**

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

## 4. AC POWER LINE CONDUCTED EMISSIONS

### 4.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 4.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4 TEST SETUP

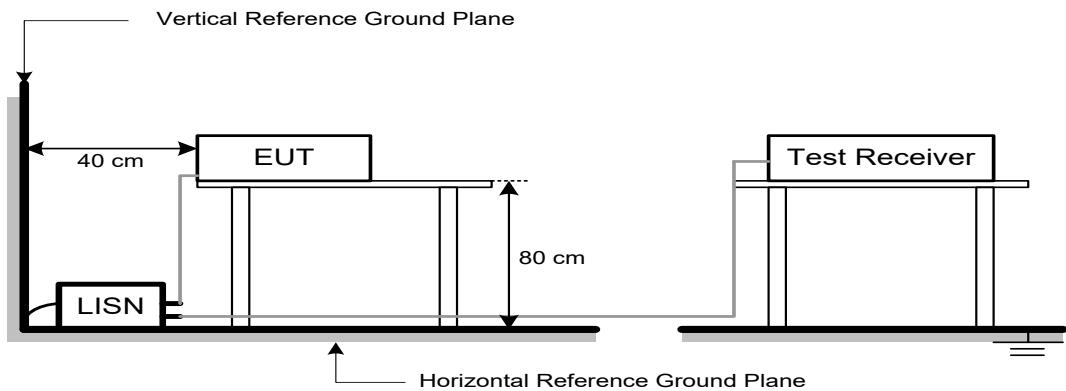

#### 4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

#### 4.6 TEST RESULTS

Please refer to the APPENDIX A.

## 5. RADIATED EMISSIONS

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dB $\mu$ V/m)	Harmonic at 1m (dB $\mu$ V/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
	-27	68.2	77.7 (Note 3)
5725-5850	10	105.2	114.7 (Note 3)
<b>NOTE (2)</b>	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

#### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$ .

$FS_{\text{limit}}$ : Harmonic at 3m Peak and Average limit.

$FS_{\text{max}}$ : Harmonic at 1m Peak and Average Maximum value.

$d_{\text{limit}}$ : Harmonic at 3m test distance.

$d_{\text{measure}}$ : Harmonic Actual test distance.

## 5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

### 5.3 DEVIATION FROM TEST STANDARD


No deviation.

### 5.4 TEST SETUP


9 kHz to 30 MHz

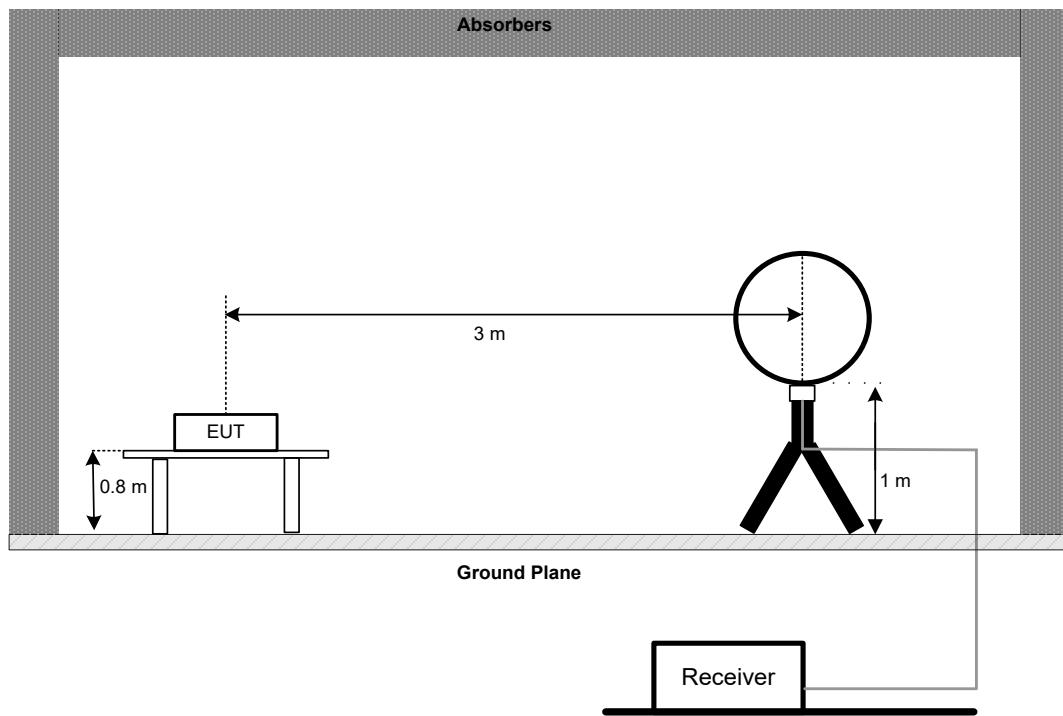


30 MHz to 1 GHz

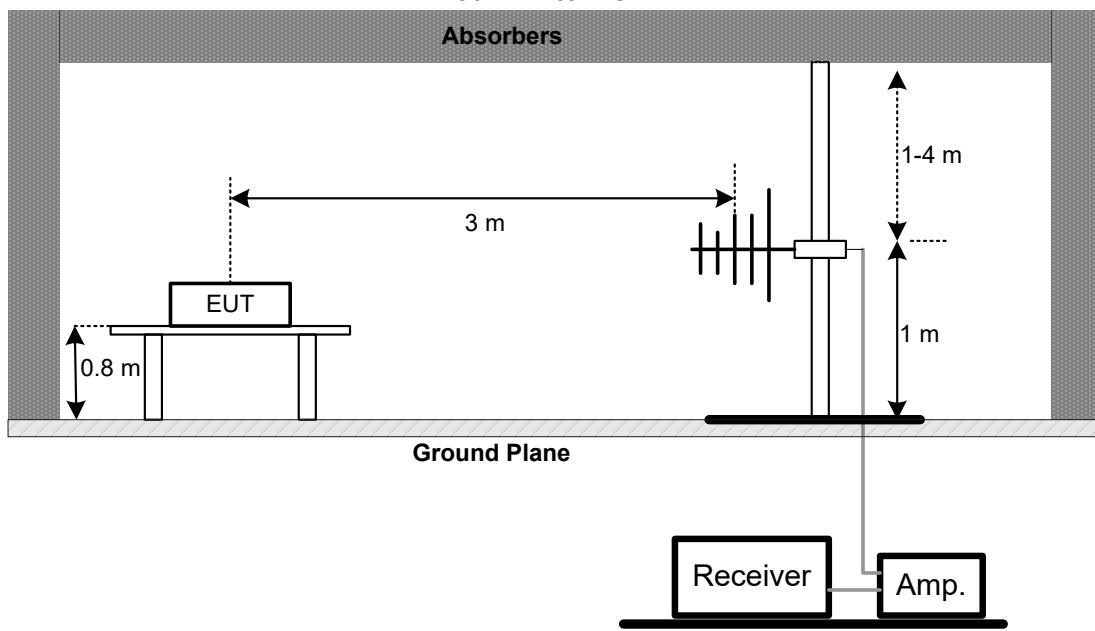


**Above 1 GHz**  
Band edge

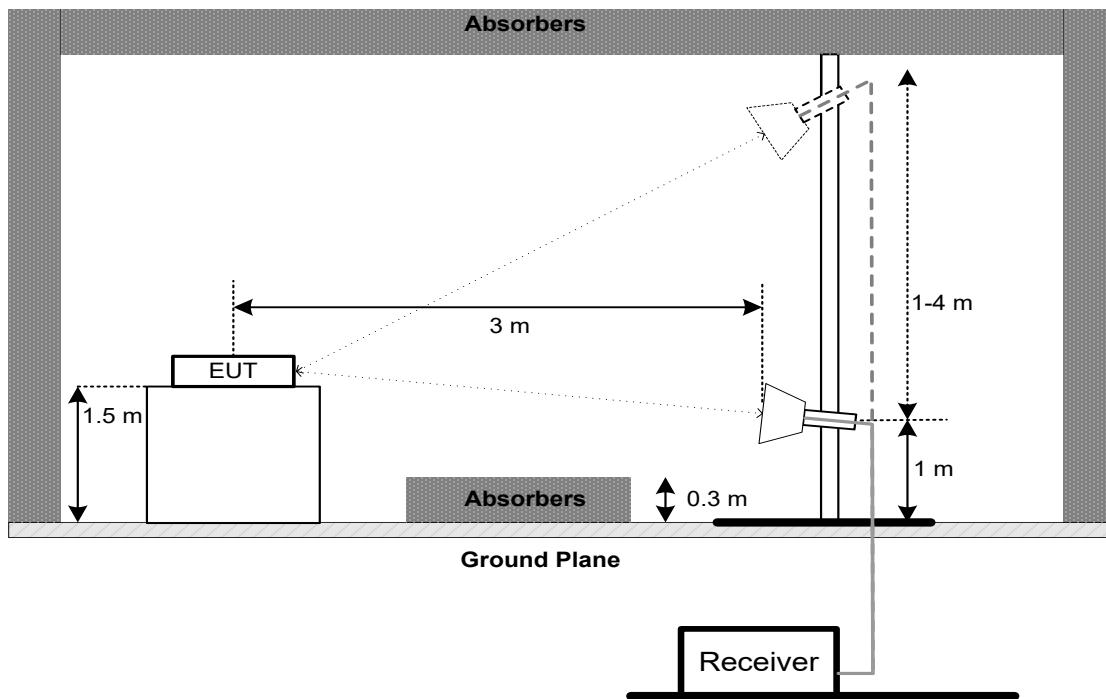

**Harmonic (1 GHz to 18 GHz)**

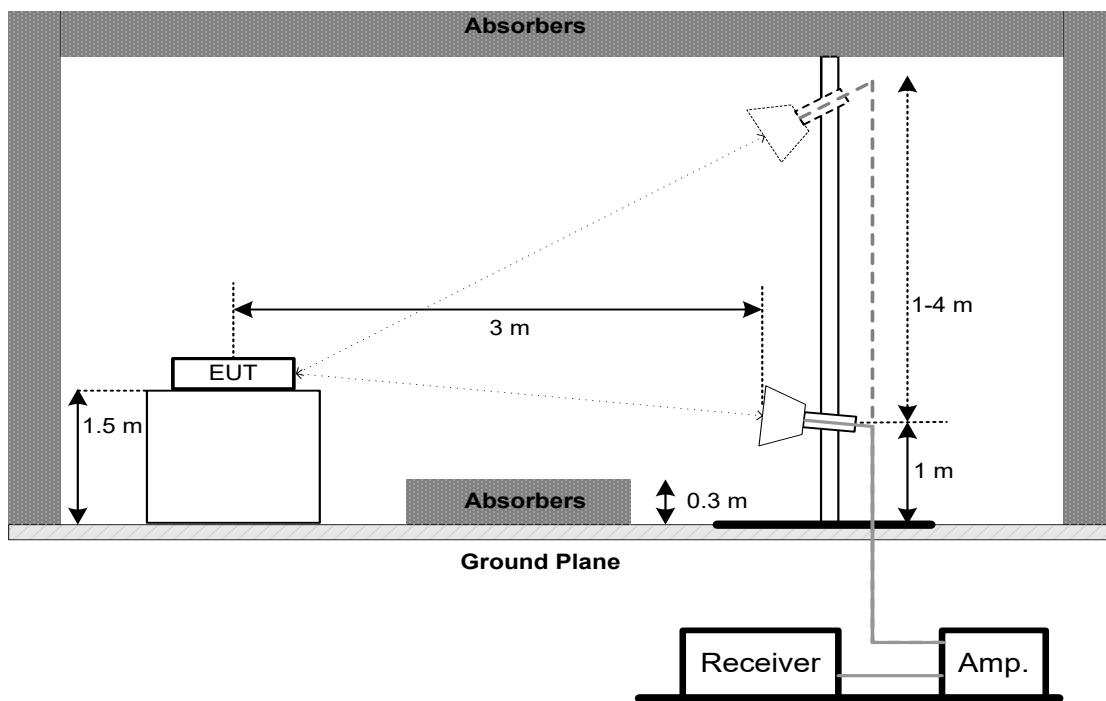

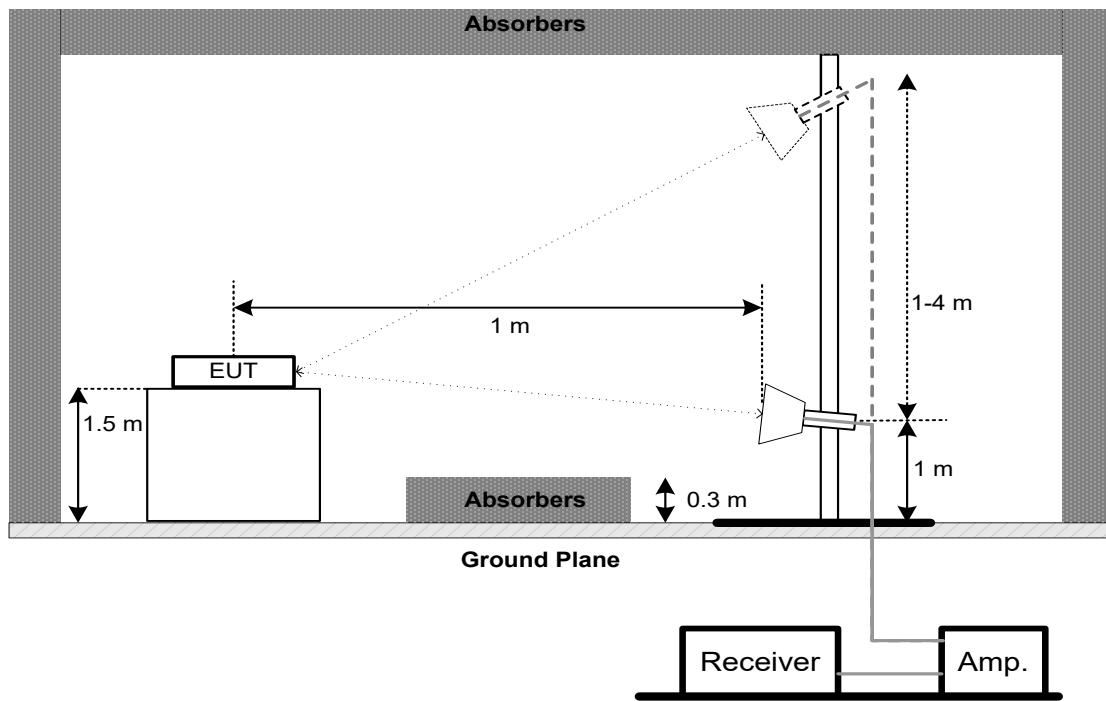**Harmonic (18 GHz to 40 GHz)****5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS - 9 KHZ TO 30 MHZ**

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ**

Please refer to the APPENDIX C.

**5.8 TEST RESULTS - ABOVE 1000 MHZ**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. BANDWIDTH

### 6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

### 6.3 DEVIATION FROM STANDARD

No deviation.

#### 6.4 TEST SETUP



#### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. MAXIMUM OUTPUT POWER

### 7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm)	5150-5250
		Client device: 250 mW (23.98 dBm)	
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.


### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

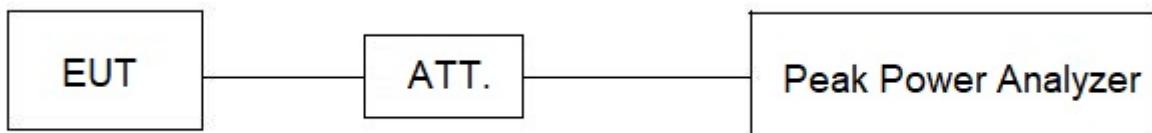

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. POWER SPECTRAL DENSITY

### 8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz	5150-5250
		Client device: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add  $10 \log (500 \text{ kHz}/100 \text{ kHz})$  to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 16.5 dB, and the final offset is  $16.5 + 7 = 23.5$  dB when RBW=100kHz is used.

### 8.3 DEVIATION FROM STANDARD

No deviation.

#### 8.4 TEST SETUP



#### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

## 9. FREQUENCY STABILITY

### 9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

### 9.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~35°C.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

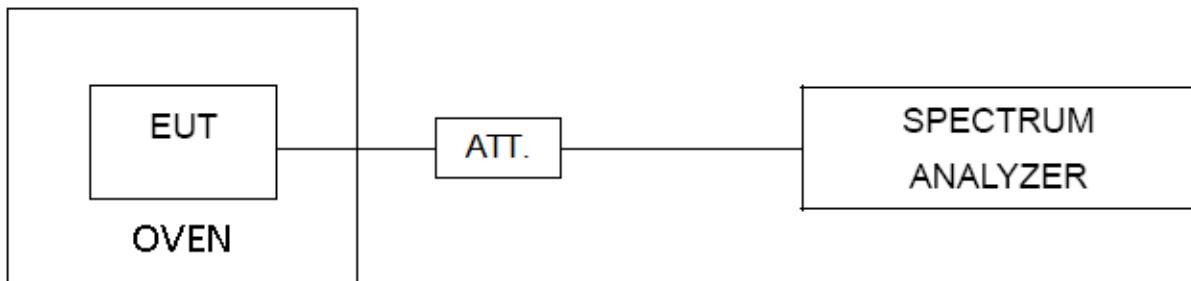

### 9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H.

## 10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 09, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Sep. 09, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Nov. 17, 2024
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 17, 2024
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Jan. 09, 2025
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 09, 2025
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 09, 2025
7	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 09, 2025
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPF6-M8000 18000-1331	N/A	Nov. 17, 2024

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330 -K	619413	Jul. 17, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun. 16, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


<b>Frequency Stability</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	AC power source	Preen	AFC-S-1250	F123080107	May 06, 2025
5	Cable	RegalWay	S02-181212-308	RWP50-402-SMSM-1M	N/A
6	Cable	Woke	S02-181212-064	N/A	N/A
7	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Dec. 22, 2024

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode	TX A Mode Channel 48 (UNII-1)	Phase	Line
-----------	-------------------------------	-------	------

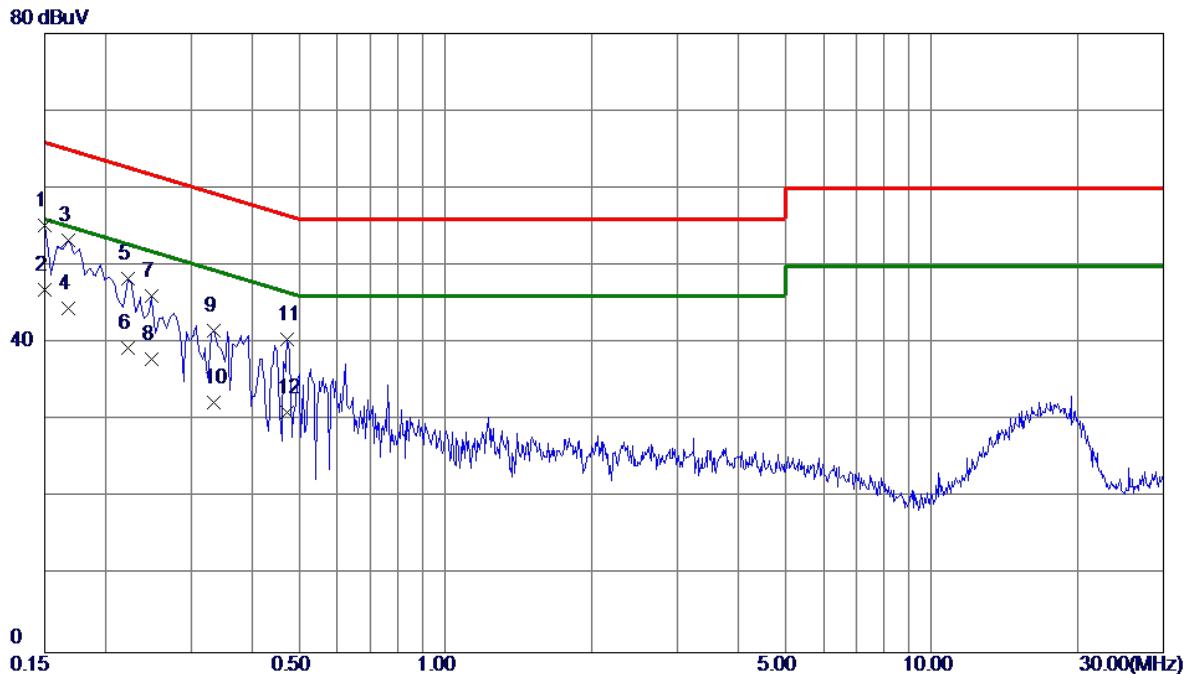


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	45.24	9.96	55.20	66.00	-10.80	QP	
2 *	0.1500	36.90	9.96	46.86	56.00	-9.14	AVG	
3	0.1680	43.36	9.97	53.33	65.06	-11.73	QP	
4	0.1680	34.50	9.97	44.47	55.06	-10.59	AVG	
5	0.2220	38.29	10.02	48.31	62.74	-14.43	QP	
6	0.2220	29.30	10.02	39.32	52.74	-13.42	AVG	
7	0.2490	36.05	10.06	46.11	61.79	-15.68	QP	
8	0.2490	27.80	10.06	37.86	51.79	-13.93	AVG	
9	0.3345	31.31	10.25	41.56	59.34	-17.78	QP	
10	0.3345	22.10	10.25	32.35	49.34	-16.99	AVG	
11	0.4740	29.91	10.57	40.48	56.44	-15.96	QP	
12	0.4740	20.40	10.57	30.97	46.44	-15.47	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Phase	Neutral
-----------	-------------------------------	-------	---------

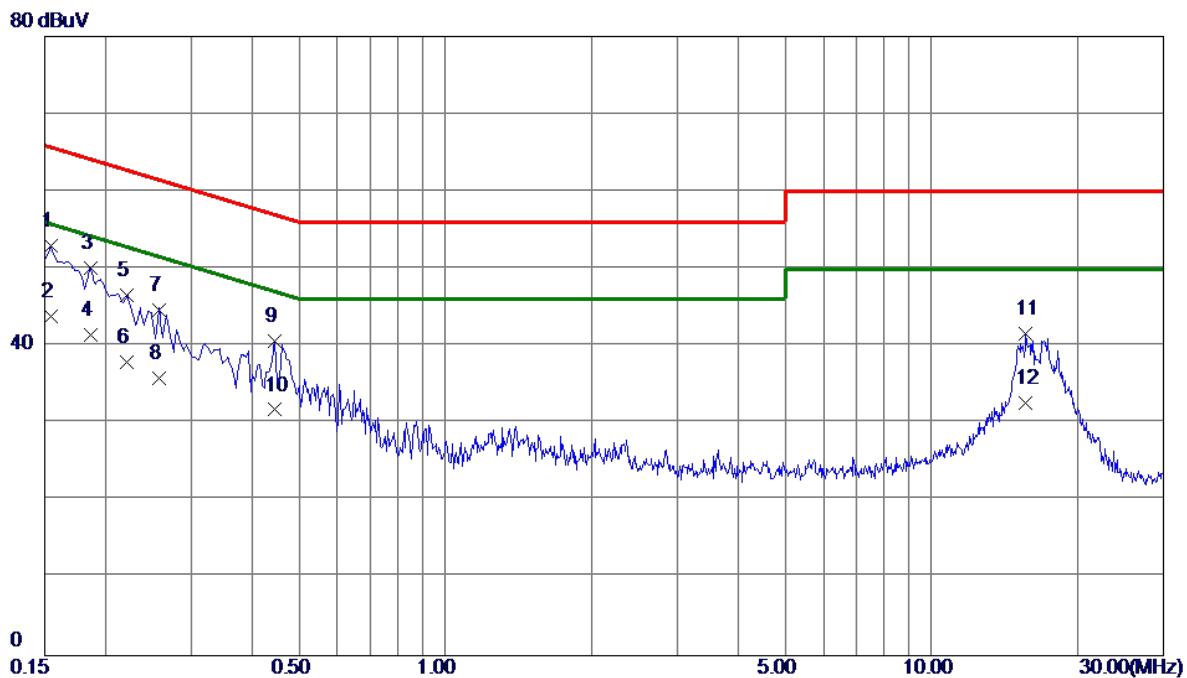


No.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure ment dBuV	Limit dBuV	Margin dB	Detector		Comment
							Detector	Comment	
1	0.1545	42.96	9.93	52.89	65.75	-12.86	QP		
2 *	0.1545	33.91	9.93	43.84	55.75	-11.91	AVG		
3	0.1860	40.17	9.93	50.10	64.21	-14.11	QP		
4	0.1860	31.51	9.93	41.44	54.21	-12.77	AVG		
5	0.2212	36.57	9.98	46.55	62.77	-16.22	QP		
6	0.2212	27.89	9.98	37.87	52.77	-14.90	AVG		
7	0.2584	34.58	10.04	44.62	61.48	-16.86	QP		
8	0.2584	25.81	10.04	35.85	51.48	-15.63	AVG		
9	0.4470	30.19	10.47	40.66	56.93	-16.27	QP		
10	0.4470	21.29	10.47	31.76	46.93	-15.17	AVG		
11	15.6480	28.60	13.02	41.62	60.00	-18.38	QP		
12	15.6480	19.60	13.02	32.62	50.00	-17.38	AVG		

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

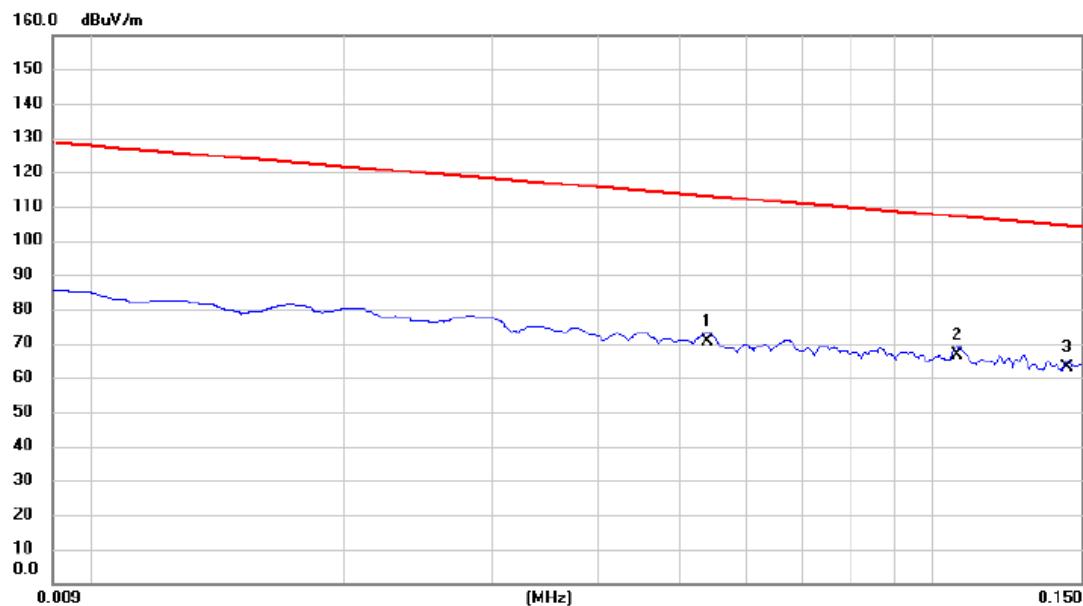

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.0540	49.39	21.21	70.60	112.96	-42.36	AVG	
2	*	0.1070	45.25	21.32	66.57	107.02	-40.45	QP	
3		0.1443	41.73	21.27	63.00	104.42	-41.42	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.7470	33.43	21.15	54.58	70.14	-15.56	QP	
2	*	1.6724	35.63	21.13	56.76	63.14	-6.38	QP	
3		2.2096	28.56	21.11	49.67	69.54	-19.87	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

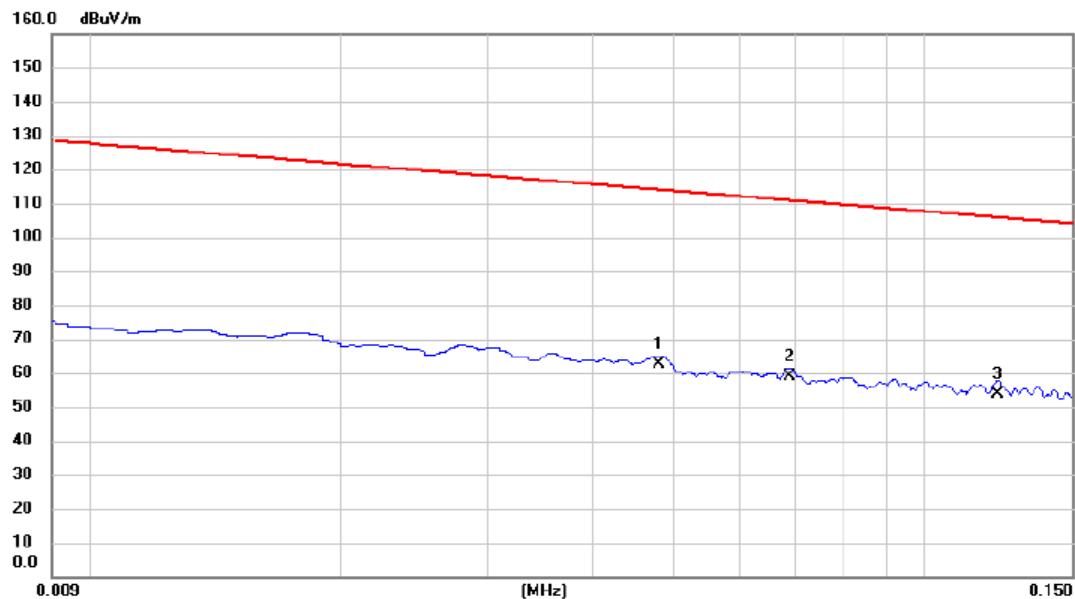

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0481	41.52	21.19	62.71	113.96	-51.25	AVG	
2		0.0690	37.74	21.26	59.00	110.83	-51.83	AVG	
3		0.1224	32.43	21.30	53.73	105.85	-52.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.7768	32.12	21.16	53.28	69.80	-16.52	QP	
2	*	1.6126	37.54	21.14	58.68	63.45	-4.77	QP	
3		1.9708	30.43	21.11	51.54	69.54	-18.00	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

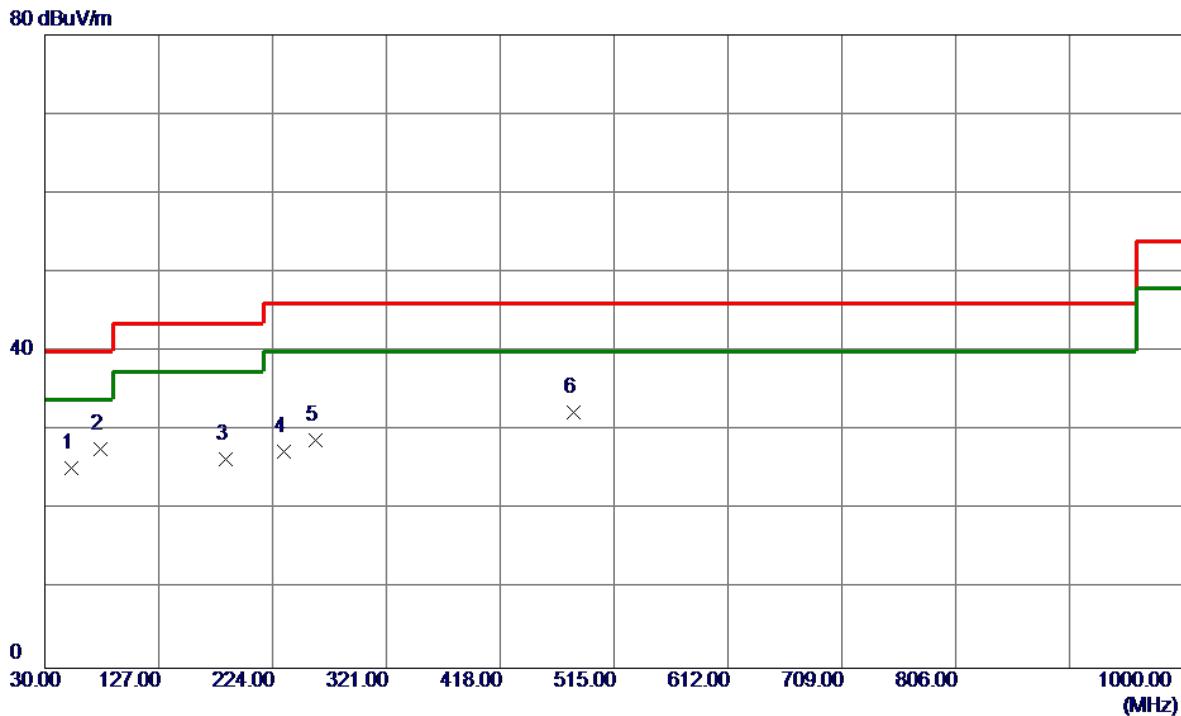


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	52.3100	36.64	-11.33	25.31	40.00	-14.69	Peak	
2 *	77.0450	42.52	-14.81	27.71	40.00	-12.29	Peak	
3	184.2300	39.31	-12.95	26.36	43.52	-17.16	Peak	
4	233.7000	40.57	-13.27	27.30	46.02	-18.72	Peak	
5	260.8599	40.76	-12.02	28.74	46.02	-17.28	Peak	
6	480.5650	38.61	-6.31	32.30	46.02	-13.72	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

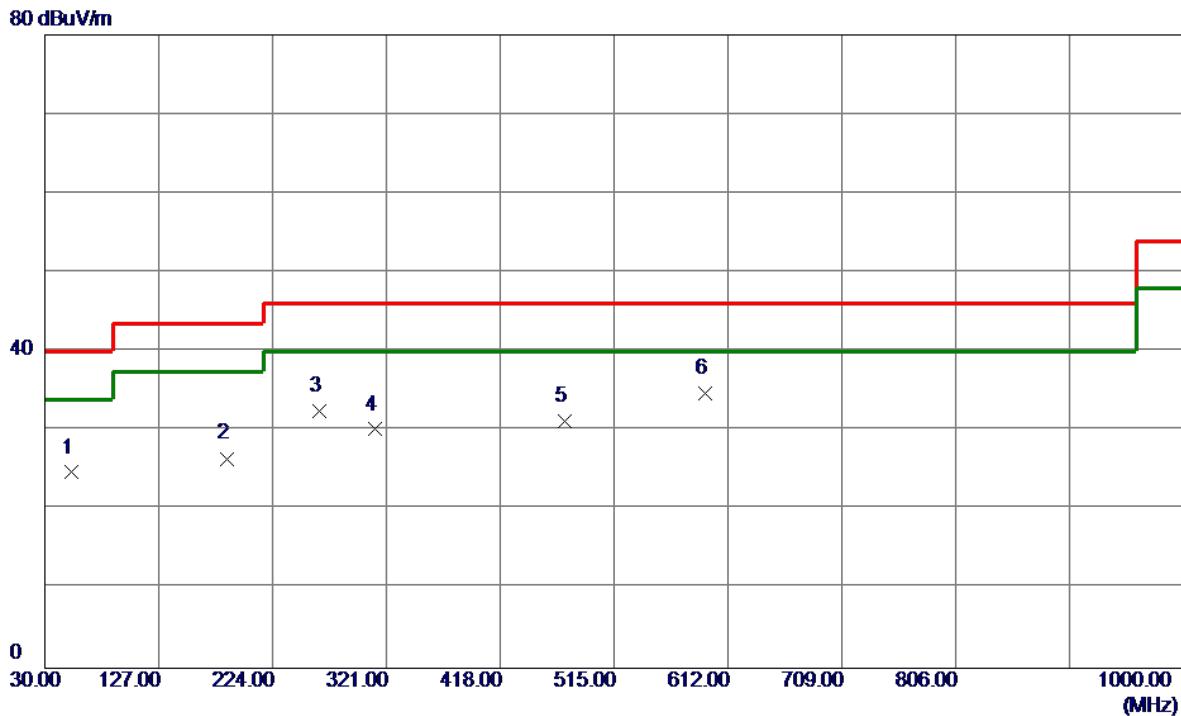

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin Detector	Comment
1	52.7950	36.07	-11.35	24.72	40.00	-15.28	Peak
2	185.2000	39.58	-13.10	26.48	43.52	-17.04	Peak
3	263.7700	44.30	-11.86	32.44	46.02	-13.58	Peak
4	310.8150	40.46	-10.30	30.16	46.02	-15.86	Peak
5	472.8050	37.68	-6.43	31.25	46.02	-14.77	Peak
6 *	592.6000	38.49	-3.80	34.69	46.02	-11.33	Peak


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

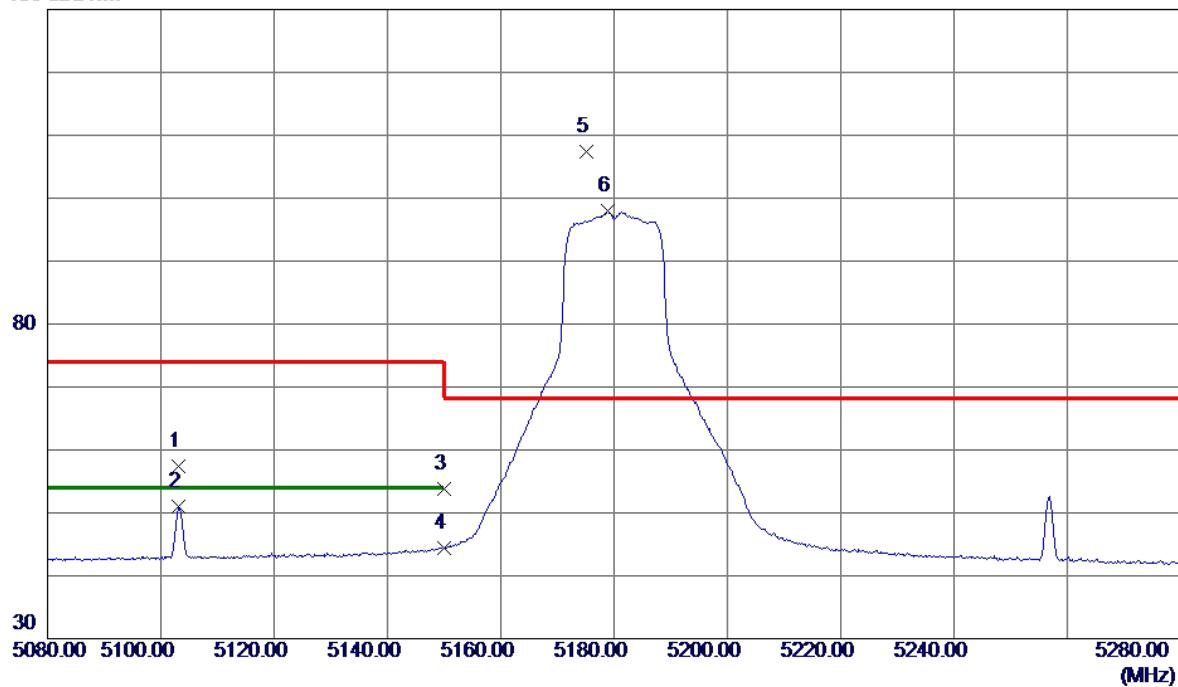


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5103.2000	43.59	13.77	57.36	74.00	-16.64	Peak	
2	5103.2000	37.29	13.77	51.06	54.00	-2.94	AVG	
3	5150.0000	40.04	13.78	53.82	74.00	-20.18	Peak	
4	5150.0000	30.65	13.78	44.43	54.00	-9.57	AVG	
5 *	5175.2000	93.55	13.79	107.34	68.20	39.14	Peak	No Limit
6	5178.8000	84.12	13.79	97.91	999.00	-901.09	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

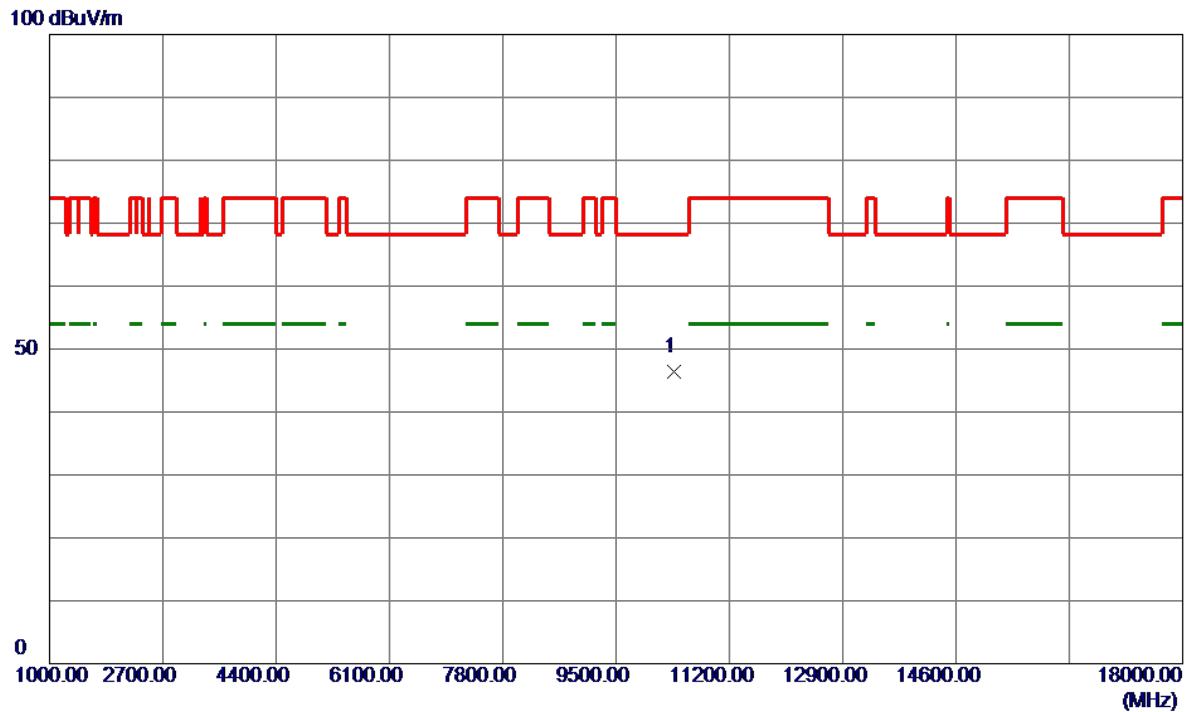


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10361.8500	36.31	10.02	46.33	68.20	-21.87	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

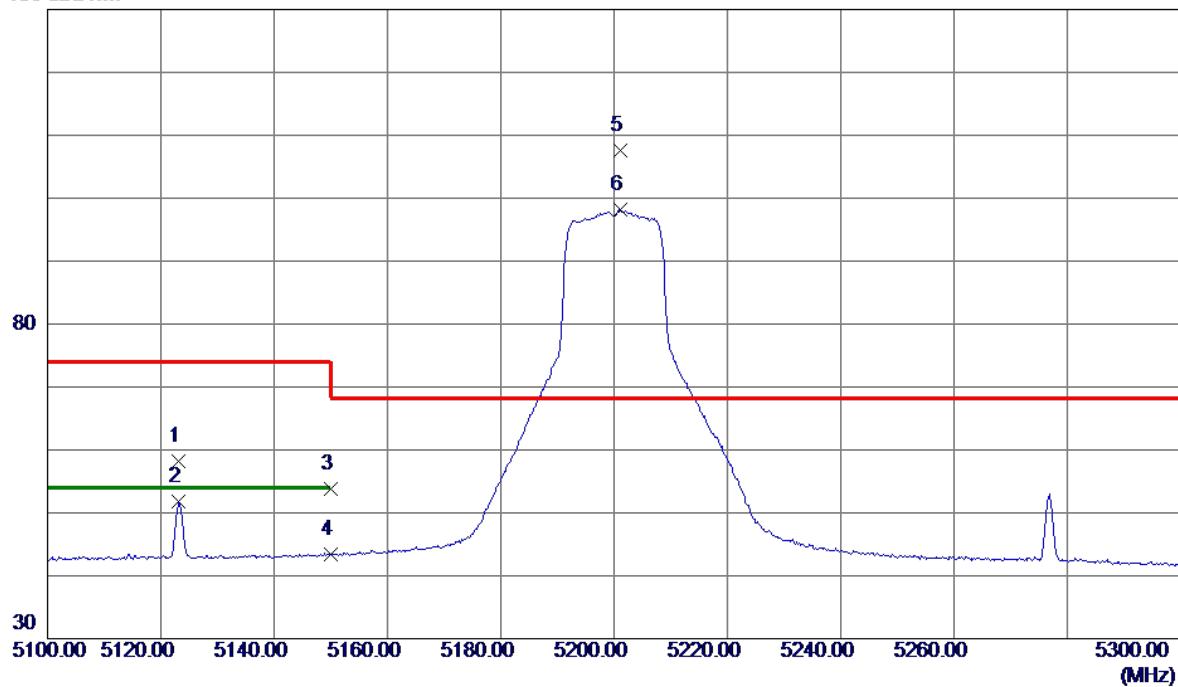


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5123.2000	44.39	13.77	58.16	74.00	-15.84	Peak	
2	5123.2000	37.94	13.77	51.71	54.00	-2.29	AVG	
3	5150.0000	40.02	13.78	53.80	74.00	-20.20	Peak	
4	5150.0000	29.65	13.78	43.43	54.00	-10.57	AVG	
5 *	5201.2000	93.84	13.80	107.64	68.20	39.44	Peak	No Limit
6	5201.2000	84.41	13.80	98.21	999.00	-900.79	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

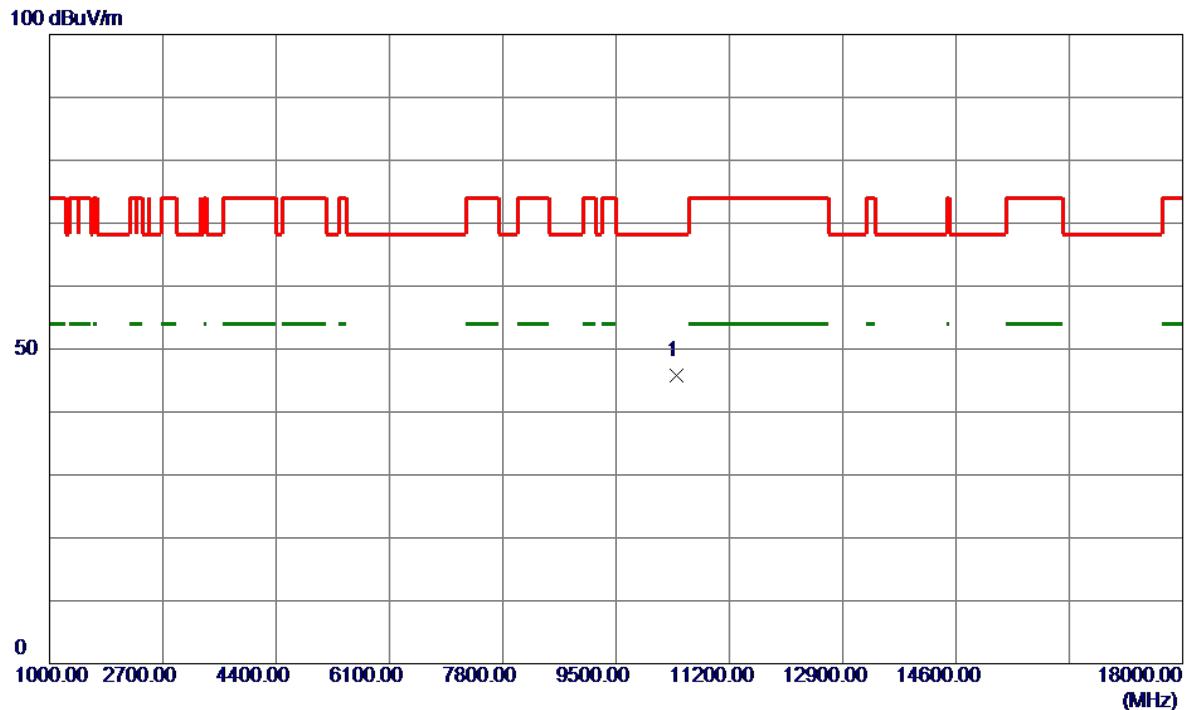


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10398.2000	35.78	10.00	45.78	68.20	-22.42	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

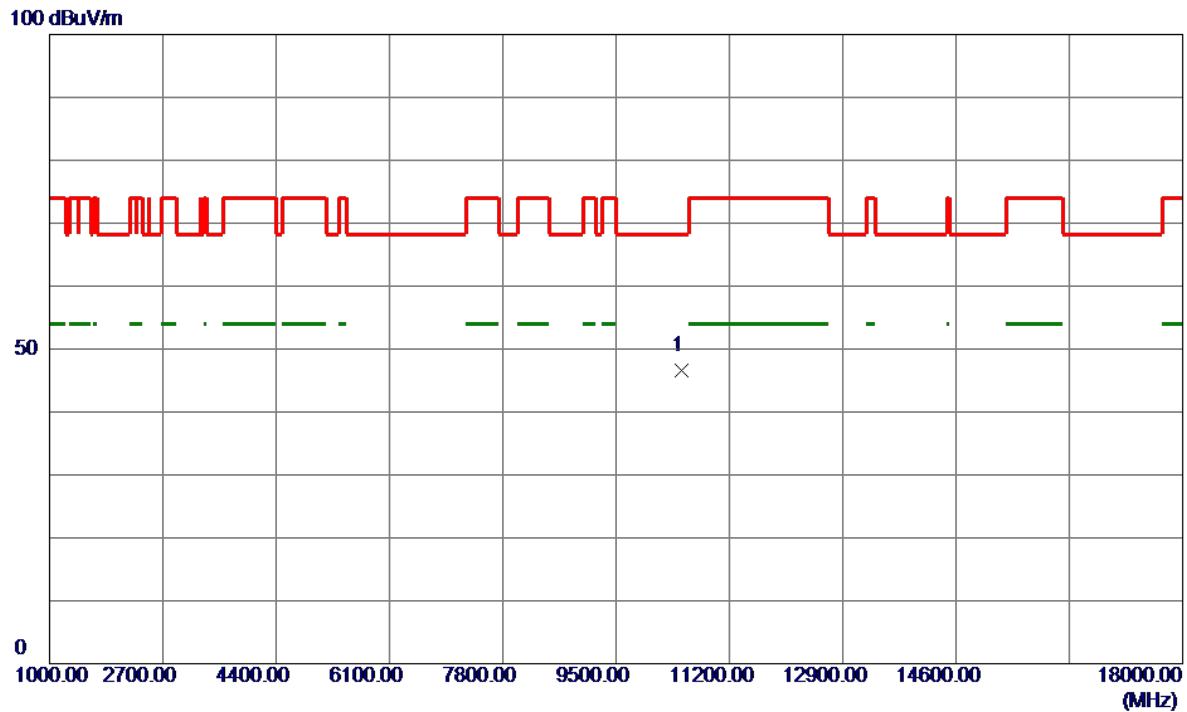


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10475.5000	36.57	9.97	46.54	68.20	-21.66	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

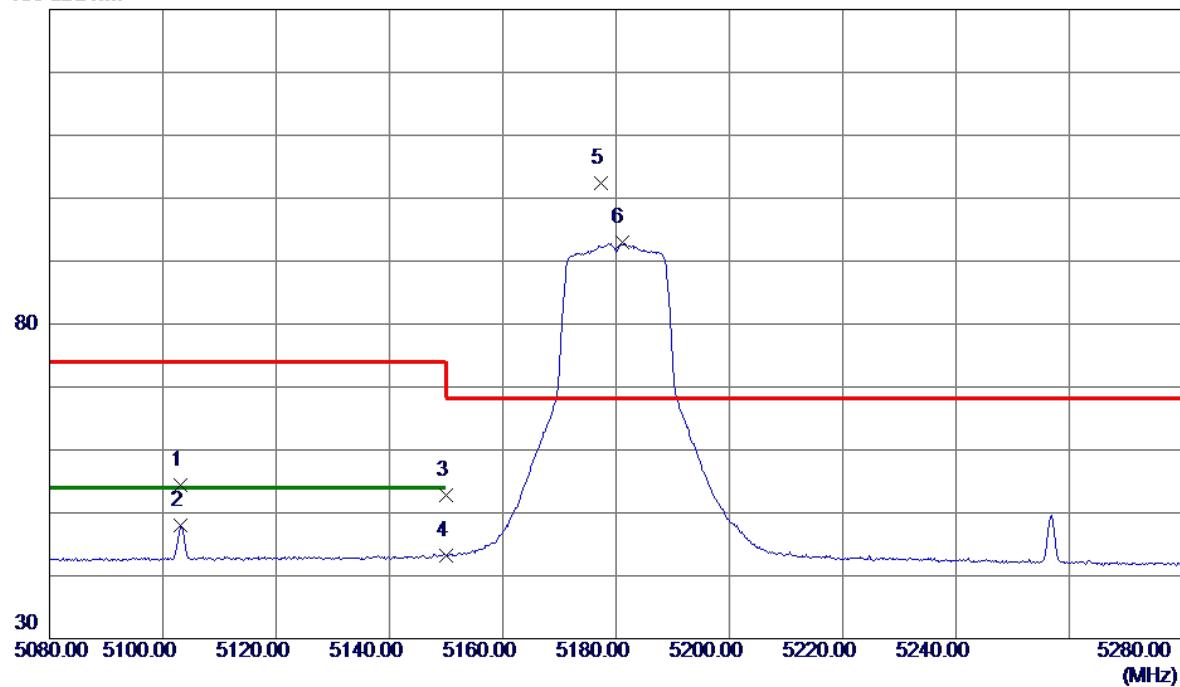


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5103.2000	40.67	13.77	54.44	74.00	-19.56	Peak	
2	5103.2000	34.25	13.77	48.02	54.00	-5.98	AVG	
3	5150.0000	38.93	13.78	52.71	74.00	-21.29	Peak	
4	5150.0000	29.45	13.78	43.23	54.00	-10.77	AVG	
5 *	5177.4000	88.69	13.79	102.48	68.20	34.28	Peak	No Limit
6	5181.0000	79.11	13.79	92.90	999.00	-906.10	AVG	No Limit

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

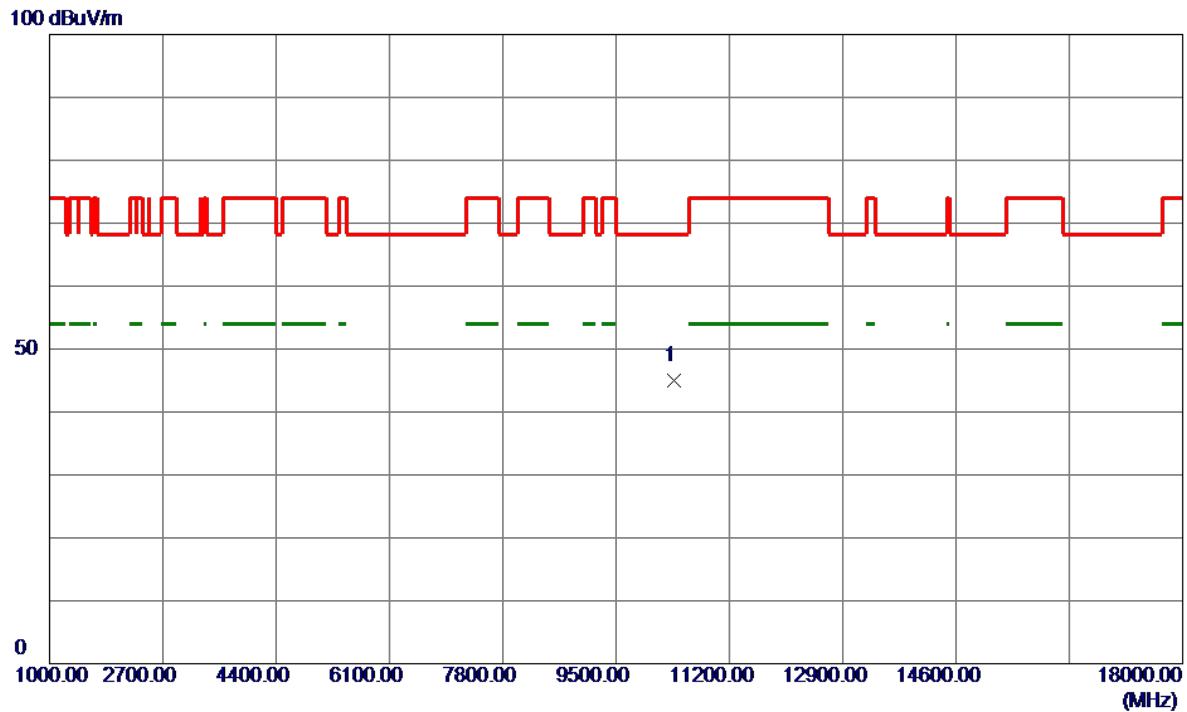


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10364.5500	34.90	10.02	44.92	68.20	-23.28	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

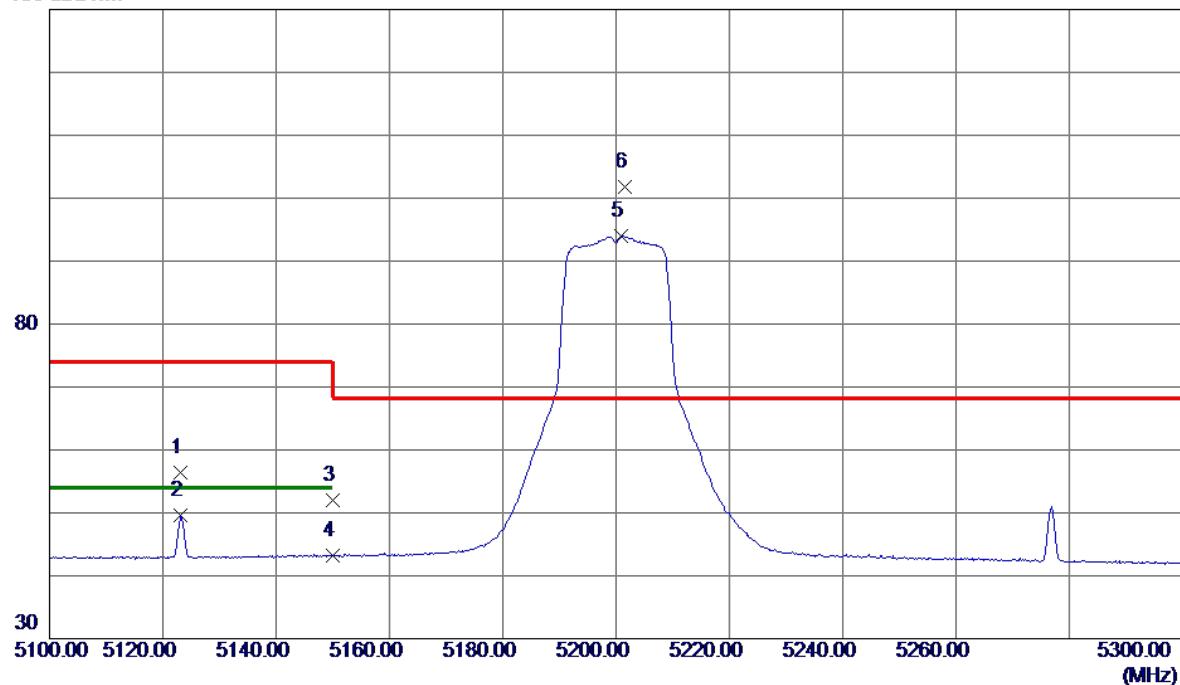


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5123.2000	42.56	13.77	56.33	74.00	-17.67	Peak	
2	5123.2000	35.77	13.77	49.54	54.00	-4.46	AVG	
3	5150.0000	38.27	13.78	52.05	74.00	-21.95	Peak	
4	5150.0000	29.44	13.78	43.22	54.00	-10.78	AVG	
5	5200.8000	80.18	13.80	93.98	999.00	-905.02	AVG	No Limit
6 *	5201.6000	87.93	13.80	101.73	68.20	33.53	Peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

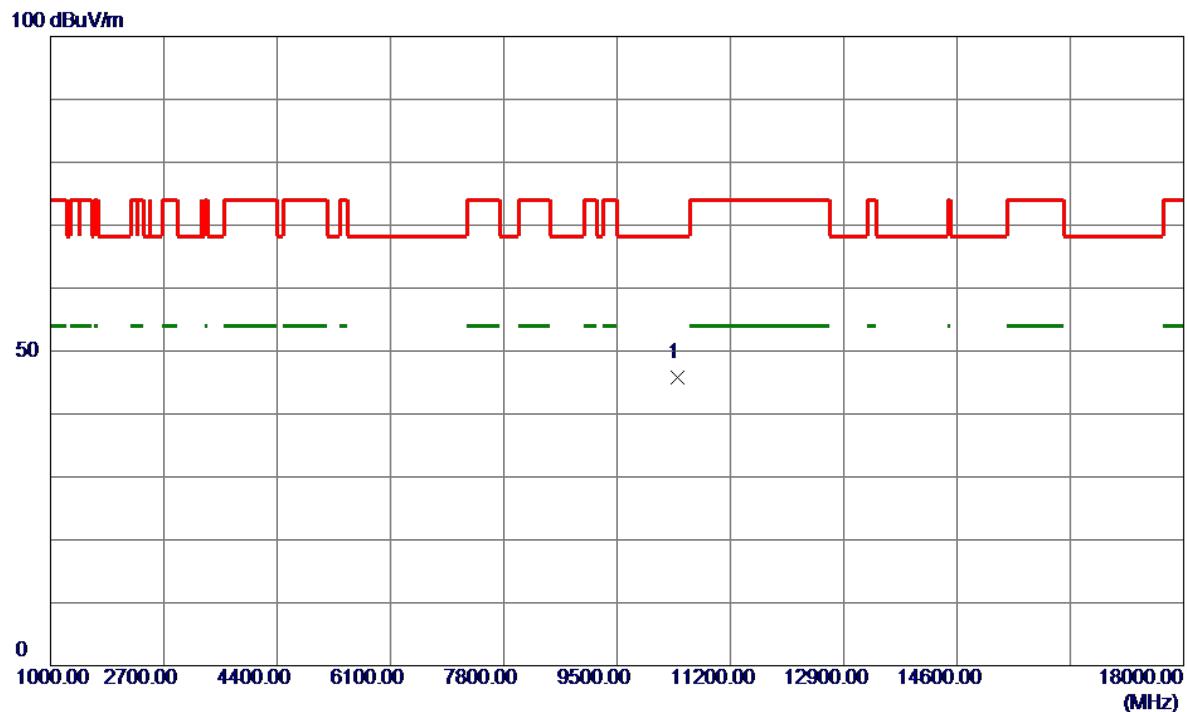


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	10399.8000	35.73	10.00	45.73	68.20	-22.47	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

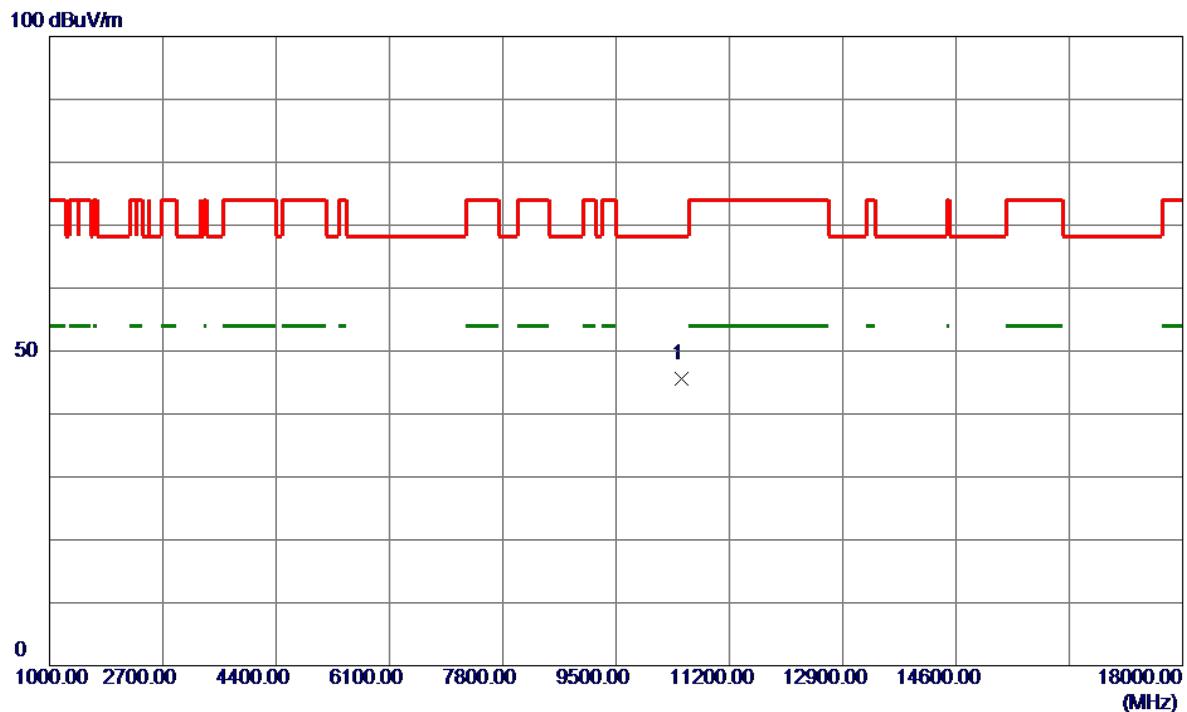


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10474.2000	35.55	9.97	45.52	68.20	-22.68	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

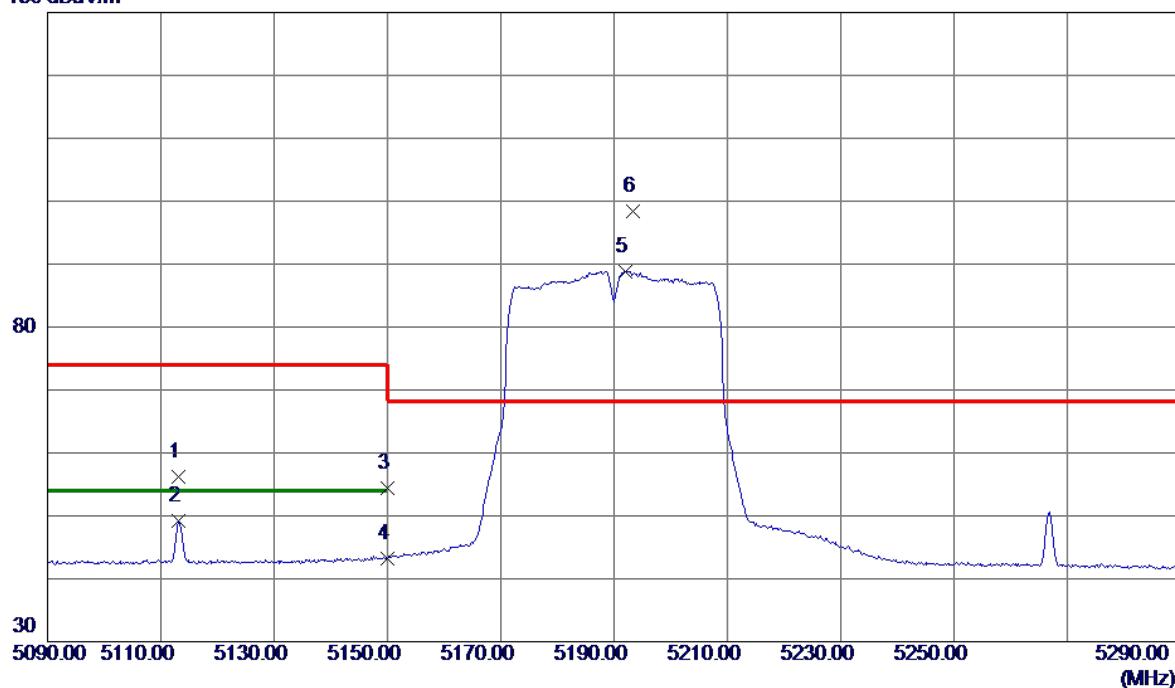


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5113.2000	42.48	13.77	56.25	74.00	-17.75	Peak	
2	5113.2000	35.48	13.77	49.25	54.00	-4.75	AVG	
3	5150.0000	40.58	13.78	54.36	74.00	-19.64	Peak	
4	5150.0000	29.43	13.78	43.21	54.00	-10.79	AVG	
5	5192.0000	75.09	13.79	88.88	999.00	-910.12	AVG	No Limit
6 *	5193.4000	84.65	13.79	98.44	68.20	30.24	Peak	No Limit

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

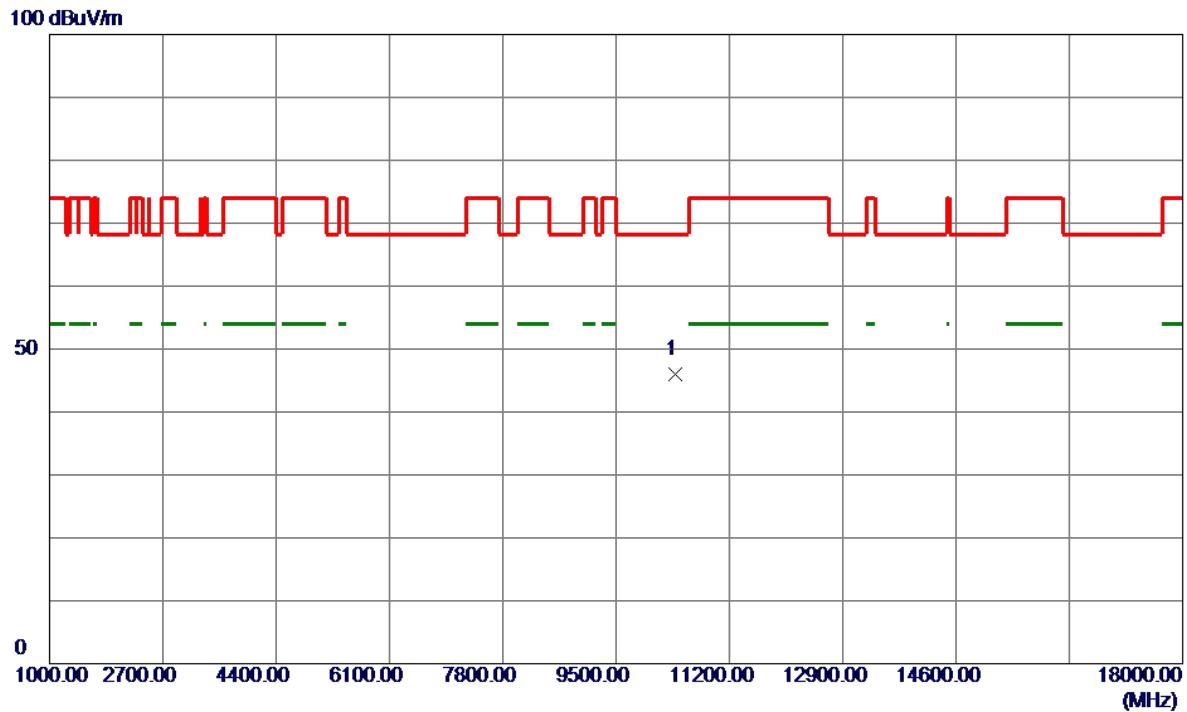


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10379.9000	35.92	10.01	45.93	68.20	-22.27	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

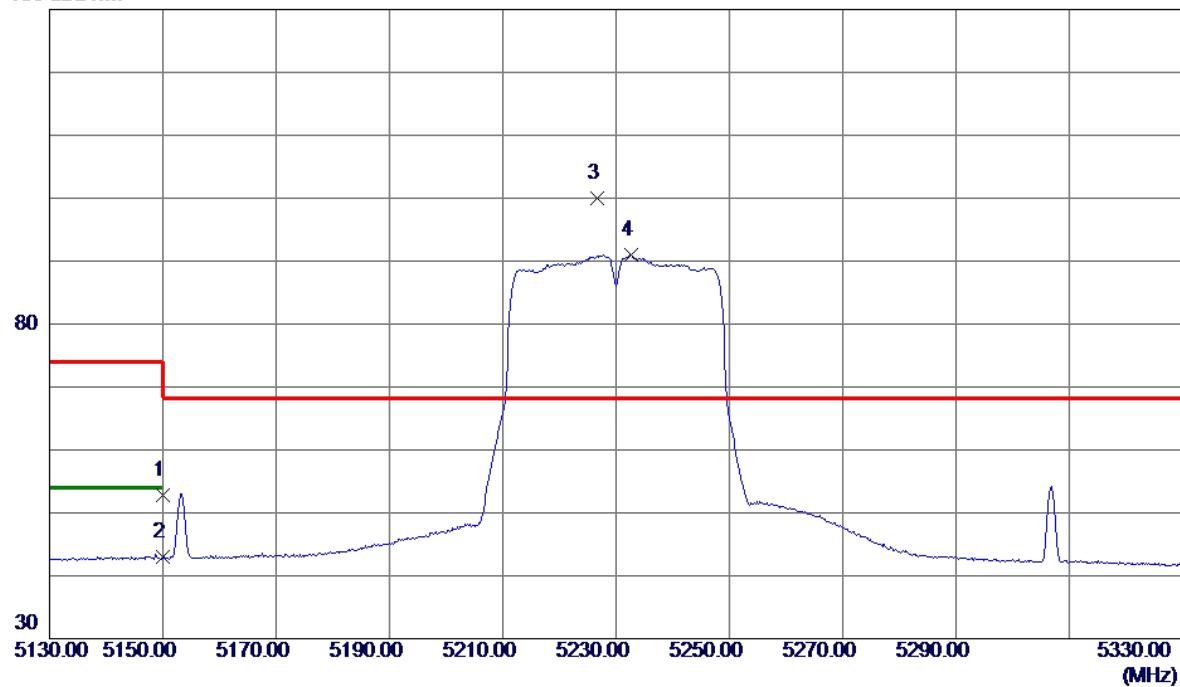


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1	5150.0000	39.01	13.78	52.79	74.00	-21.21	Peak
2	5150.0000	29.16	13.78	42.94	54.00	-11.06	AVG
3 *	5226.6000	86.27	13.80	100.07	68.20	31.87	Peak
4	5232.6000	77.24	13.81	91.05	999.00	-907.95	AVG
							No Limit
							No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

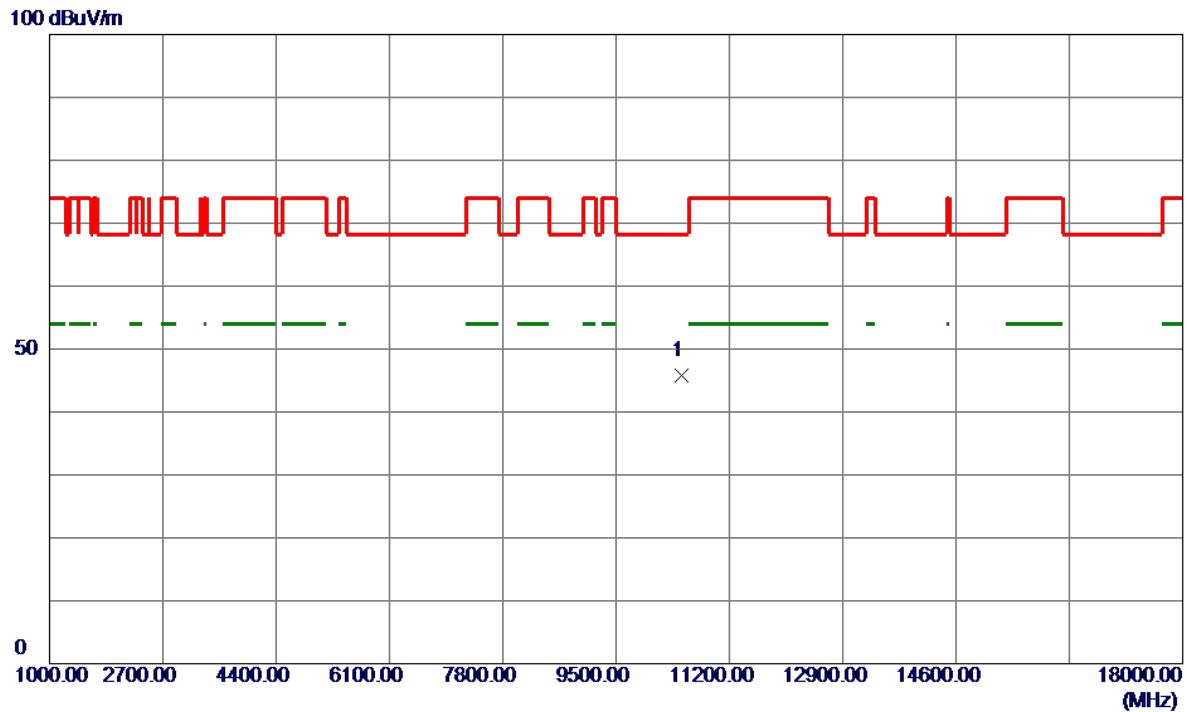


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10475.8500	35.83	9.97	45.80	68.20	-22.40	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

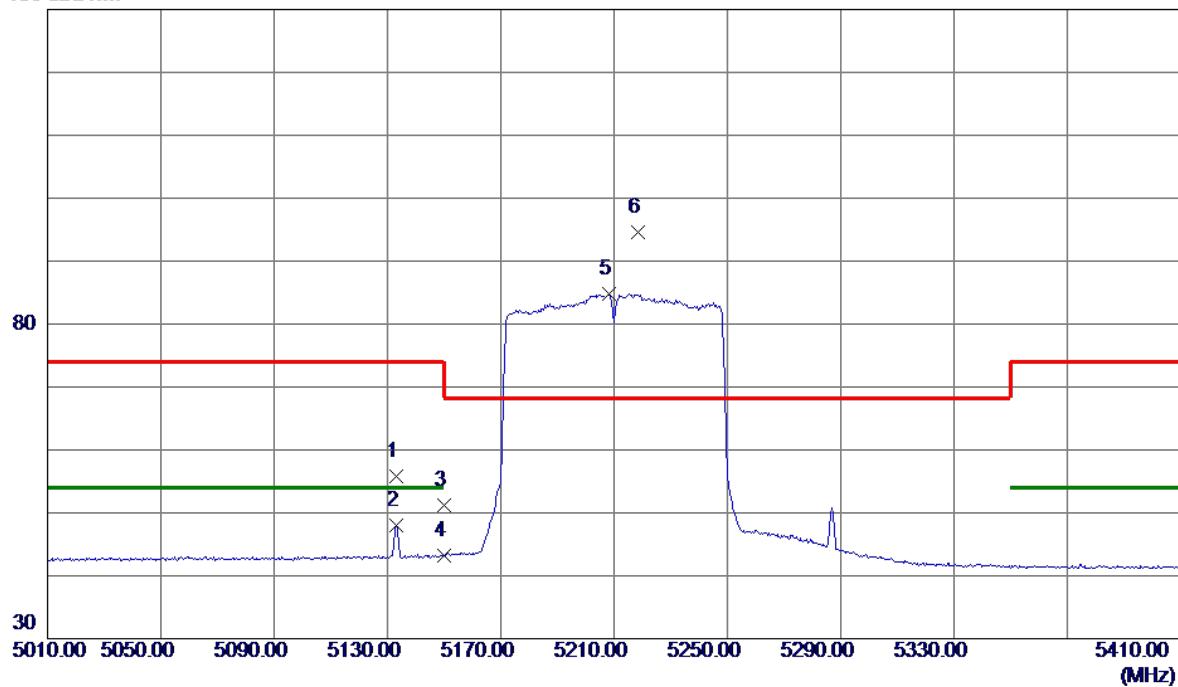


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5133.2000	42.03	13.78	55.81	74.00	-18.19	Peak	
2	5133.2000	34.26	13.78	48.04	54.00	-5.96	AVG	
3	5150.0000	37.45	13.78	51.23	74.00	-22.77	Peak	
4	5150.0000	29.38	13.78	43.16	54.00	-10.84	AVG	
5	5208.4000	70.95	13.80	84.75	999.00	-914.25	AVG	No Limit
6 *	5218.4000	80.74	13.80	94.54	68.20	26.34	Peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

100 dBuV/m

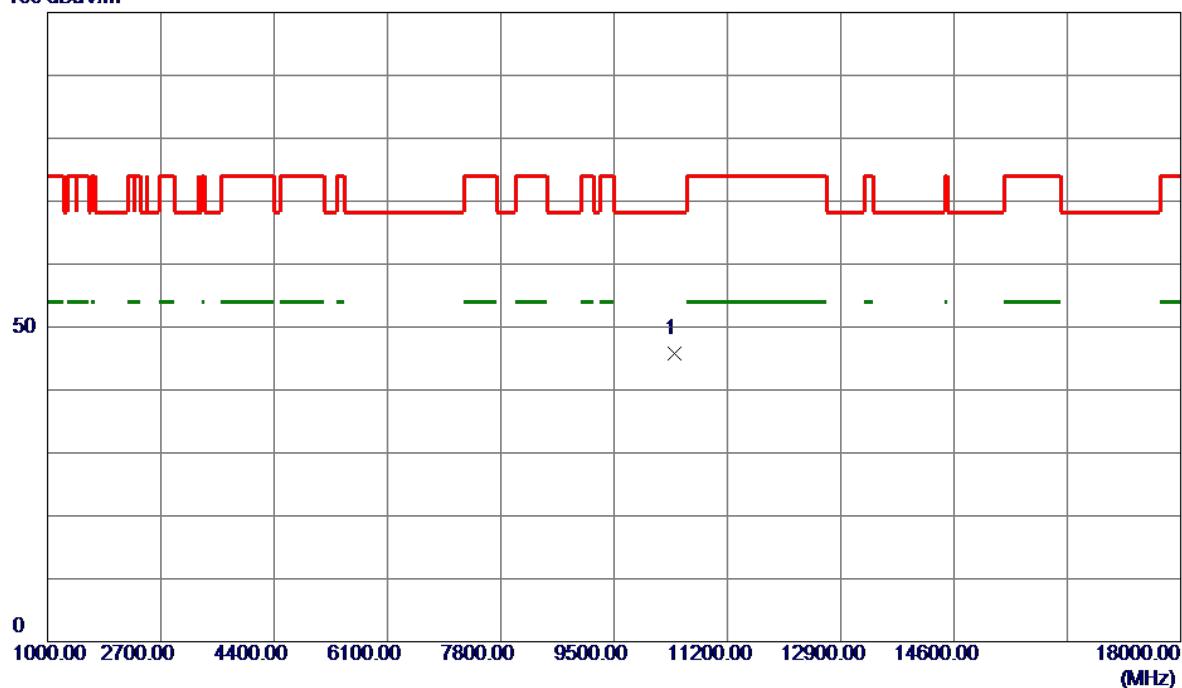


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10407.5000	35.88	10.00	45.88	68.20	-22.32	Peak

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

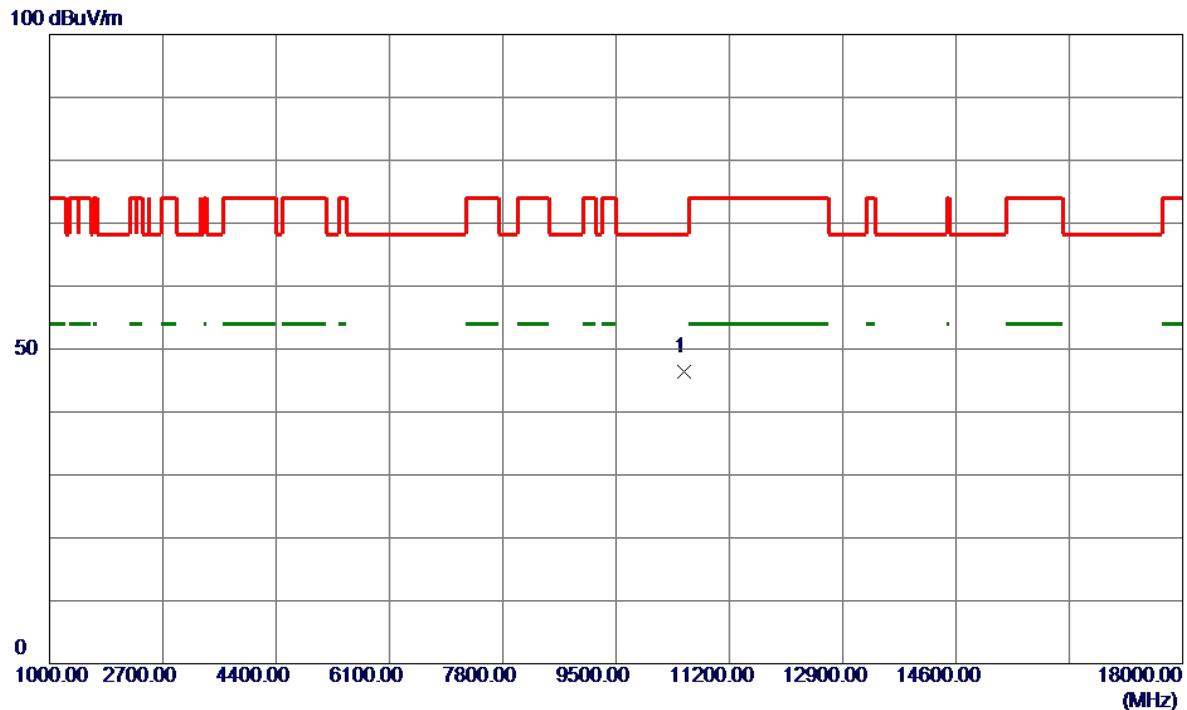


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10521.6000	36.52	9.97	46.49	68.20	-21.71	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

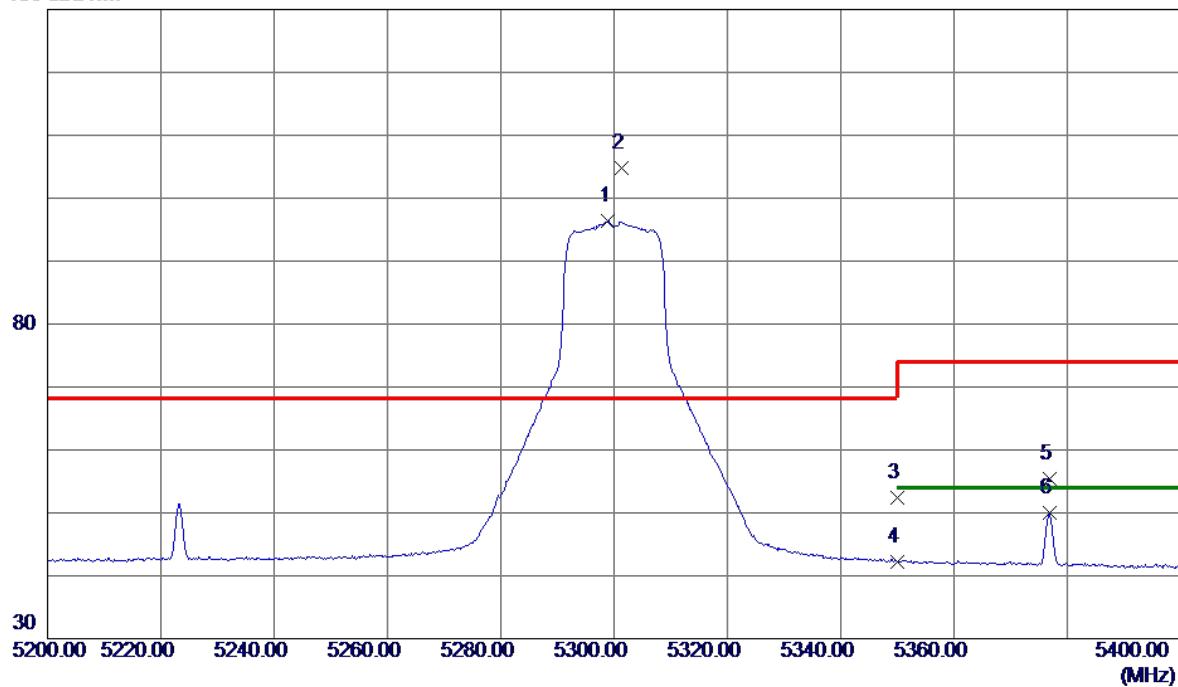


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5299.0000	82.50	13.82	96.32	999.00	-902.68	AVG	No Limit
2 *	5301.4000	91.04	13.82	104.86	68.20	36.66	Peak	No Limit
3	5350.0000	38.53	13.84	52.37	74.00	-21.63	Peak	
4	5350.0000	28.34	13.84	42.18	54.00	-11.82	AVG	
5	5376.8000	41.52	13.85	55.37	74.00	-18.63	Peak	
6	5376.8000	36.14	13.85	49.99	54.00	-4.01	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

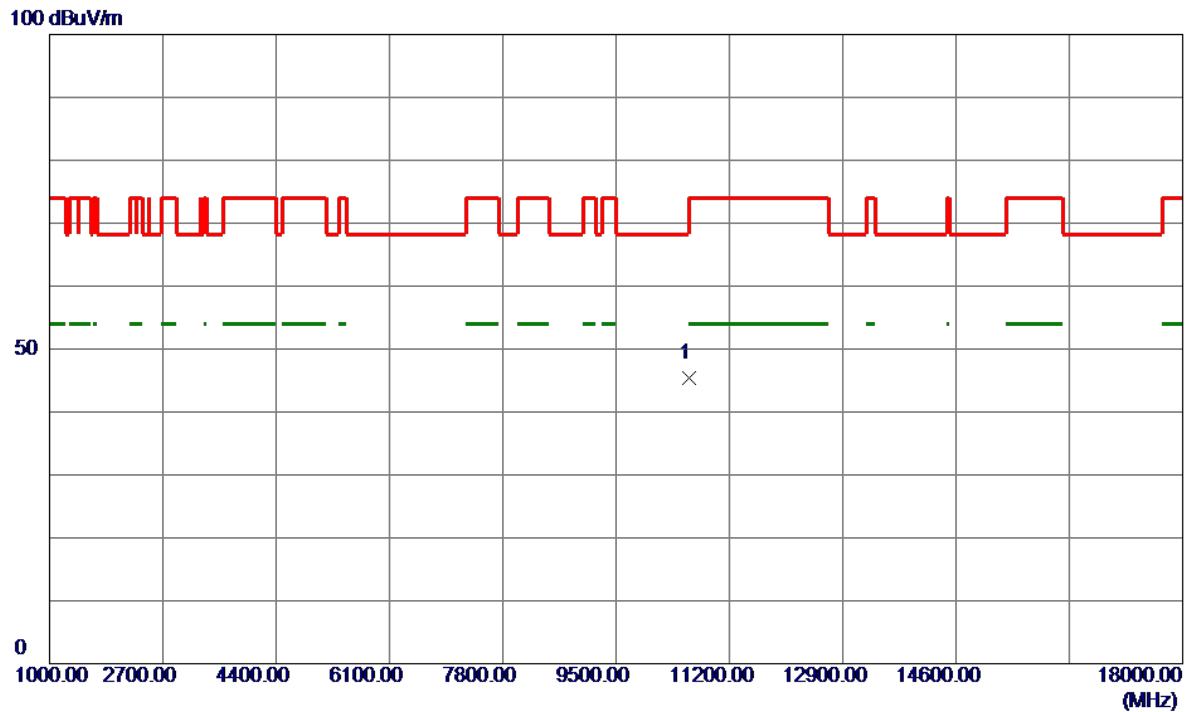


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10593.2000	35.47	9.99	45.46	68.20	-22.74	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

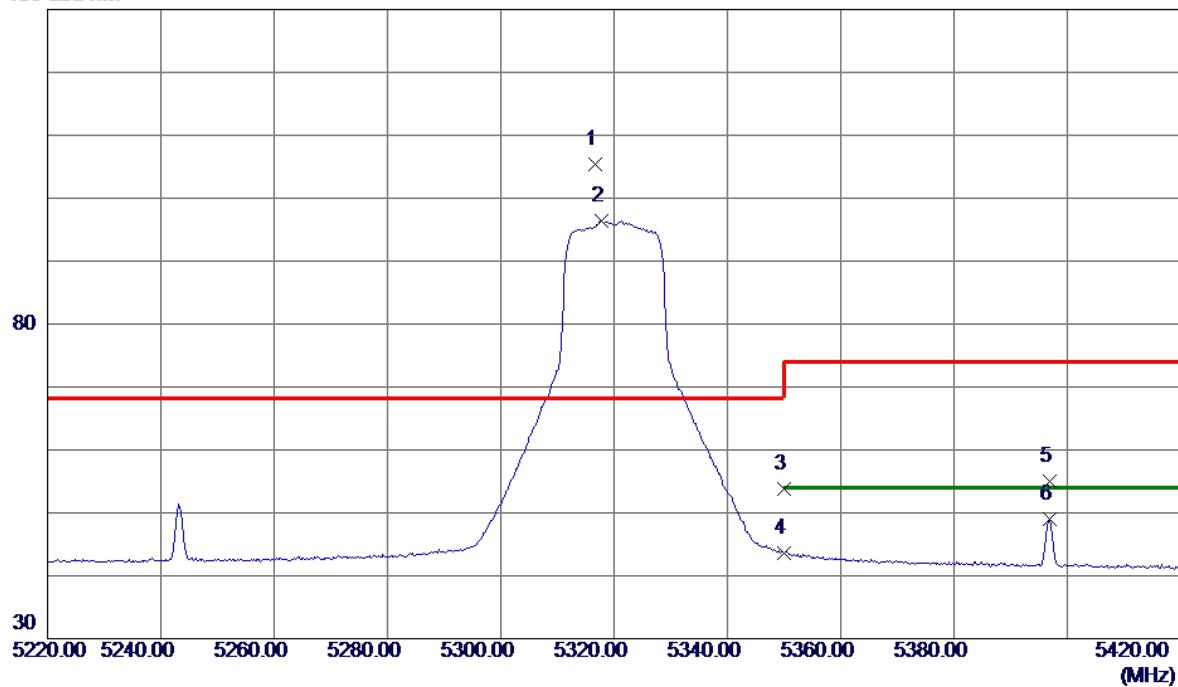


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5316.6000	91.62	13.83	105.45	68.20	37.25	Peak	No Limit
2	5317.8000	82.55	13.83	96.38	999.00	-902.62	AVG	No Limit
3	5350.0000	39.91	13.84	53.75	74.00	-20.25	Peak	
4	5350.0000	29.85	13.84	43.69	54.00	-10.31	AVG	
5	5396.8000	41.22	13.85	55.07	74.00	-18.93	Peak	
6	5396.8000	35.22	13.85	49.07	54.00	-4.93	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

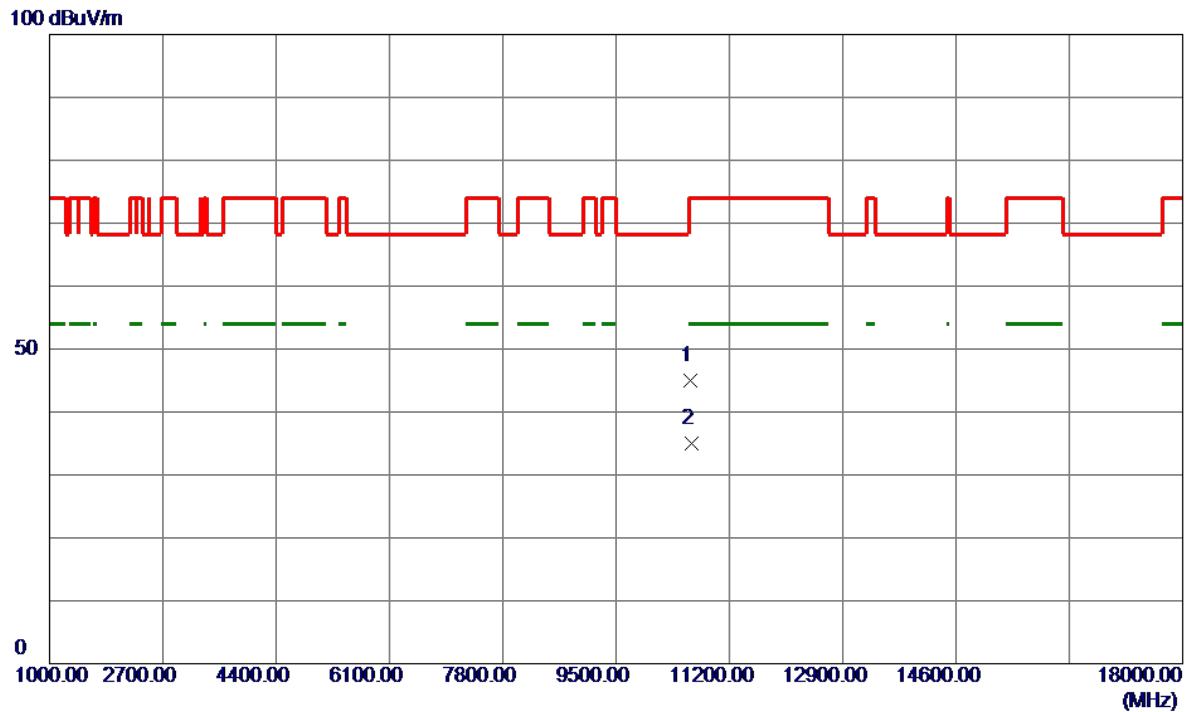


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	10623.5500	35.04	10.00	45.04	74.00	-28.96	Peak	
2 *	10634.7000	24.97	10.01	34.98	54.00	-19.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

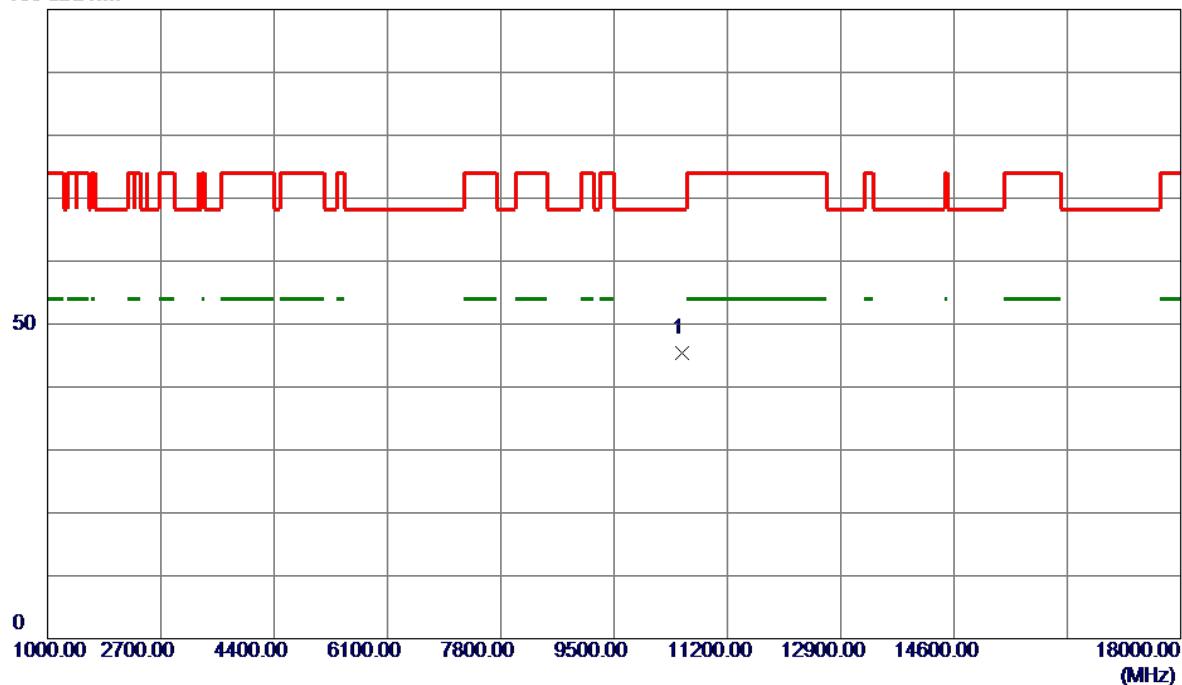


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10524.1000	35.39	9.97	45.36	68.20	-22.84	Peak

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

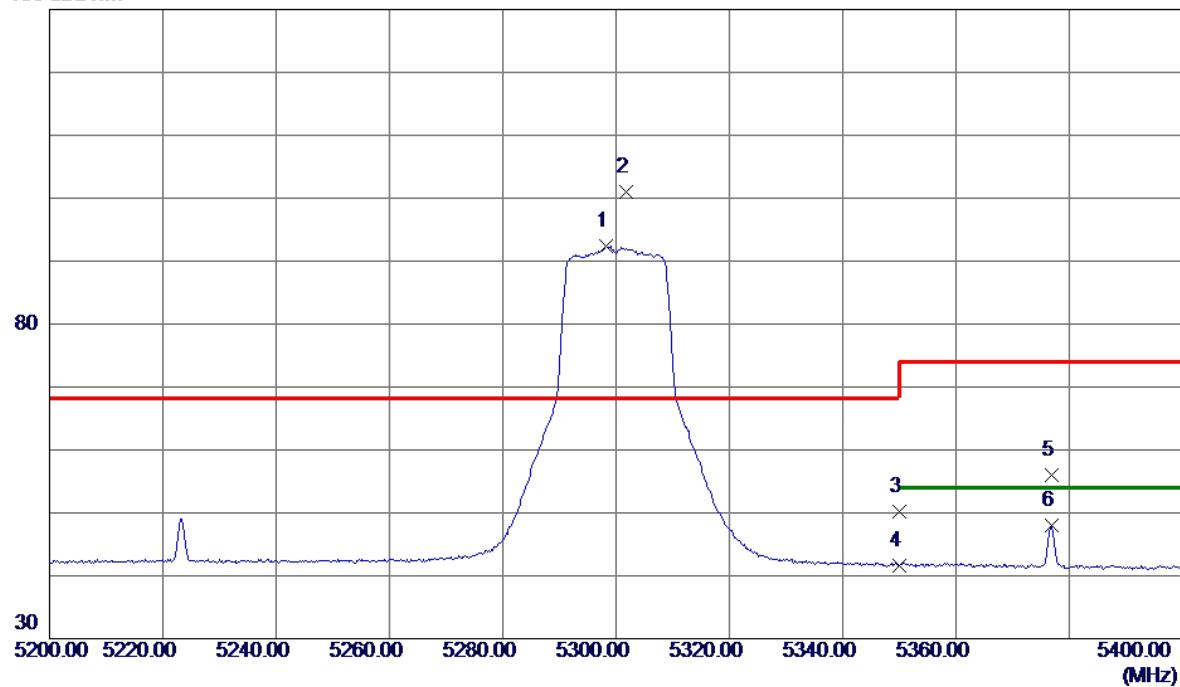


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5298.2000	78.61	13.82	92.43	999.00	-906.57	AVG	No Limit
2 *	5301.8000	87.08	13.82	100.90	68.20	32.70	Peak	No Limit
3	5350.0000	36.31	13.84	50.15	74.00	-23.85	Peak	
4	5350.0000	27.85	13.84	41.69	54.00	-12.31	AVG	
5	5376.8000	42.20	13.85	56.05	74.00	-17.95	Peak	
6	5376.8000	34.12	13.85	47.97	54.00	-6.03	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

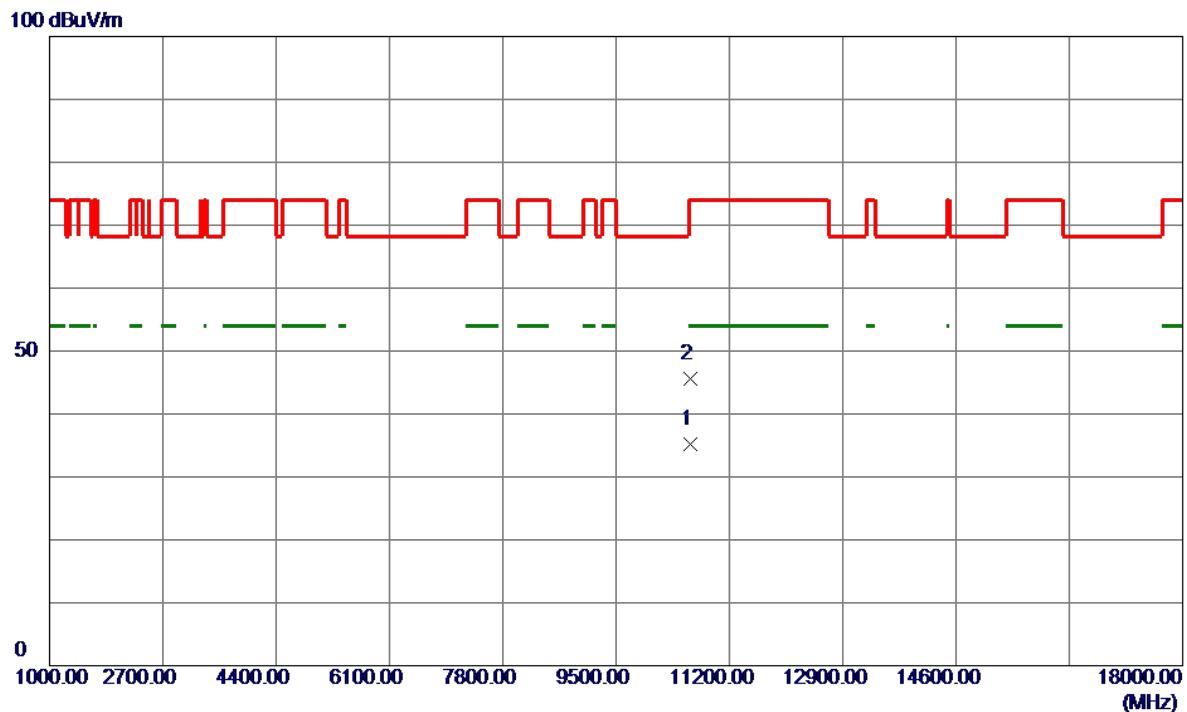


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10612.6000	25.16	10.00	35.16	54.00	-18.84	AVG	
2	10615.5000	35.52	10.00	45.52	74.00	-28.48	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

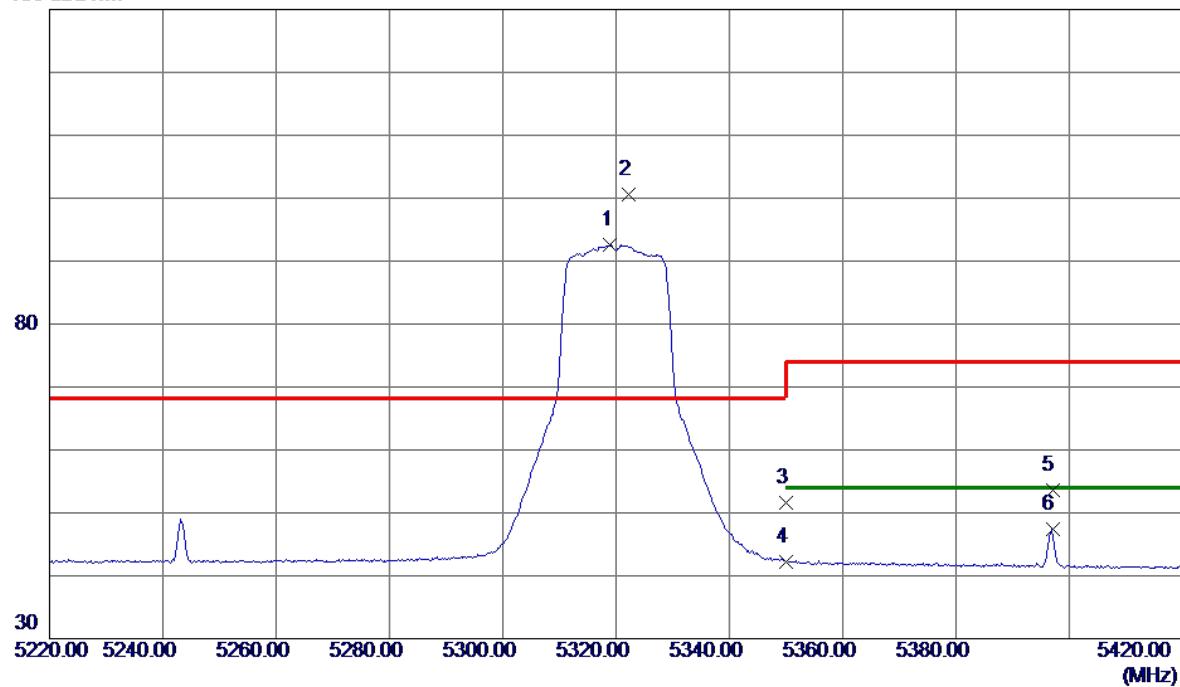


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5319.0000	78.77	13.83	92.60	999.00	-906.40	AVG	No Limit
2 *	5322.2000	86.81	13.83	100.64	68.20	32.44	Peak	No Limit
3	5350.0000	37.84	13.84	51.68	74.00	-22.32	Peak	
4	5350.0000	28.35	13.84	42.19	54.00	-11.81	AVG	
5	5397.0000	39.84	13.85	53.69	74.00	-20.31	Peak	
6	5397.0000	33.49	13.85	47.34	54.00	-6.66	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

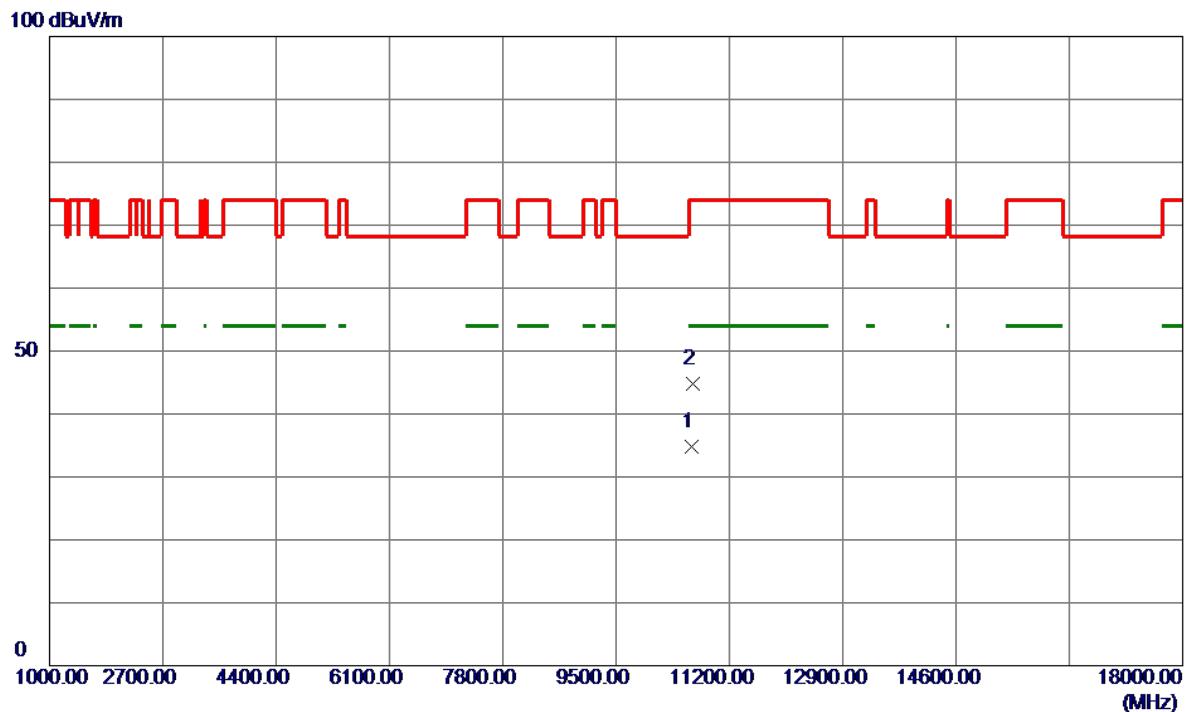


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10636.5000	24.73	10.01	34.74	54.00	-19.26	AVG	
2	10660.0000	34.85	10.01	44.86	74.00	-29.14	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

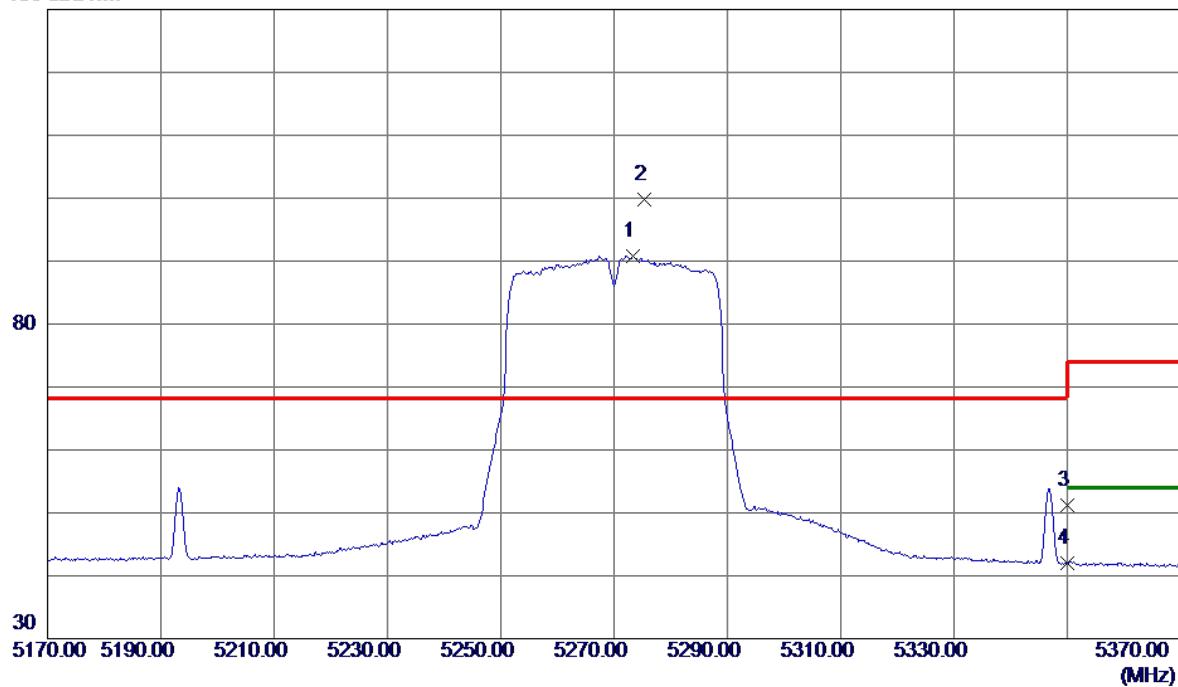


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5273.4000	77.00	13.82	90.82	999.00	-908.18	AVG	No Limit
2 *	5275.4000	85.95	13.82	99.77	68.20	31.57	Peak	No Limit
3	5350.0000	37.28	13.84	51.12	74.00	-22.88	Peak	
4	5350.0000	28.18	13.84	42.02	54.00	-11.98	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

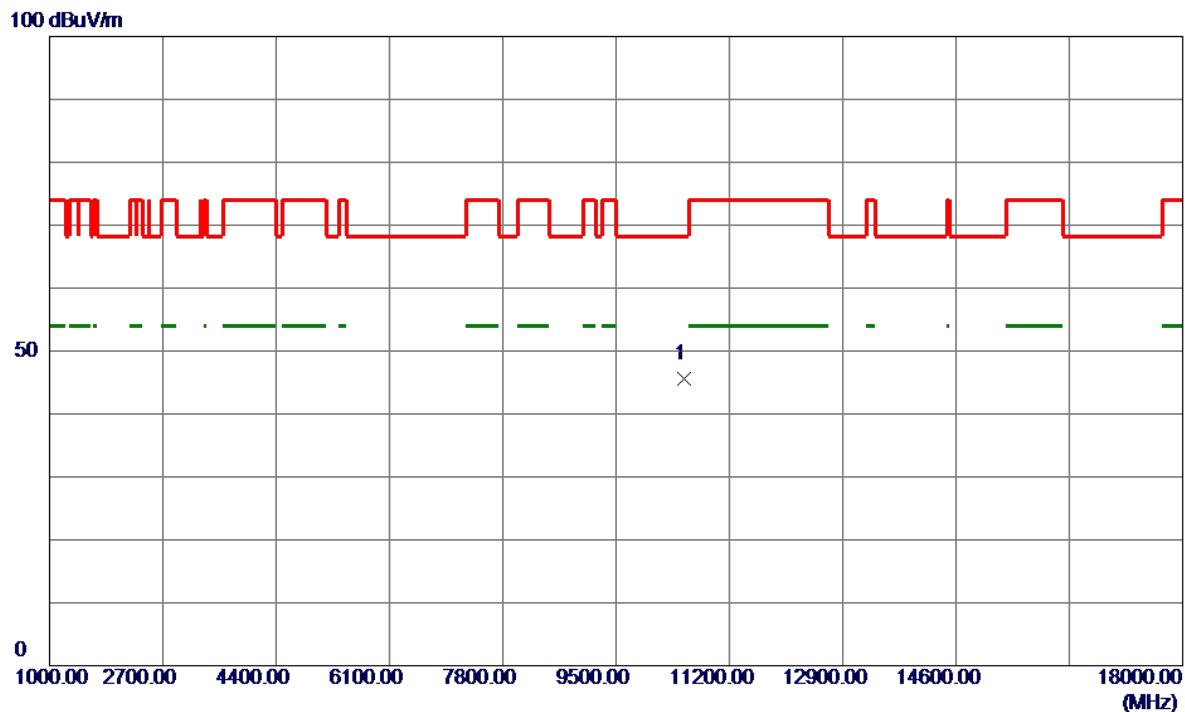


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	10516.1500	35.72	9.97	45.69	68.20	-22.51	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

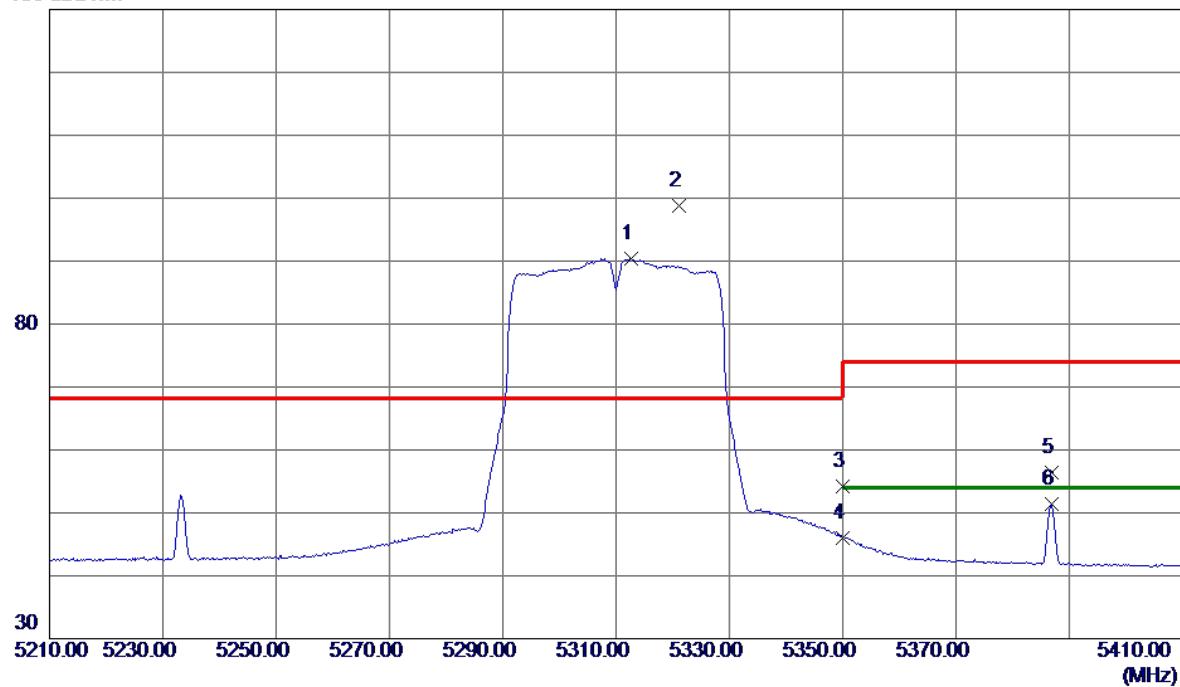


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.6000	76.59	13.83	90.42	999.00	-908.58	AVG	No Limit
2 *	5321.2000	85.00	13.83	98.83	68.20	30.63	Peak	No Limit
3	5350.0000	40.45	13.84	54.29	74.00	-19.71	Peak	
4	5350.0000	32.25	13.84	46.09	54.00	-7.91	AVG	
5	5386.8000	42.49	13.85	56.34	74.00	-17.66	Peak	
6	5386.8000	37.57	13.85	51.42	54.00	-2.58	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

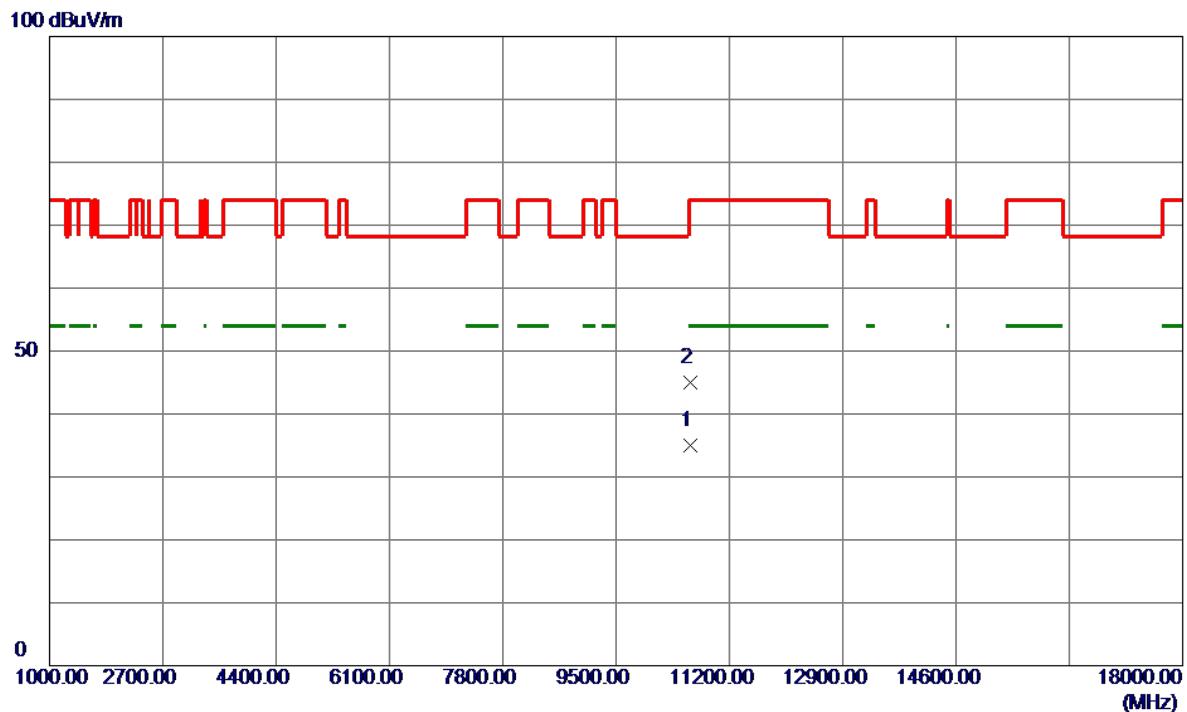


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10615.4900	24.97	10.00	34.97	54.00	-19.03	AVG	
2	10616.4000	35.04	10.00	45.04	74.00	-28.96	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

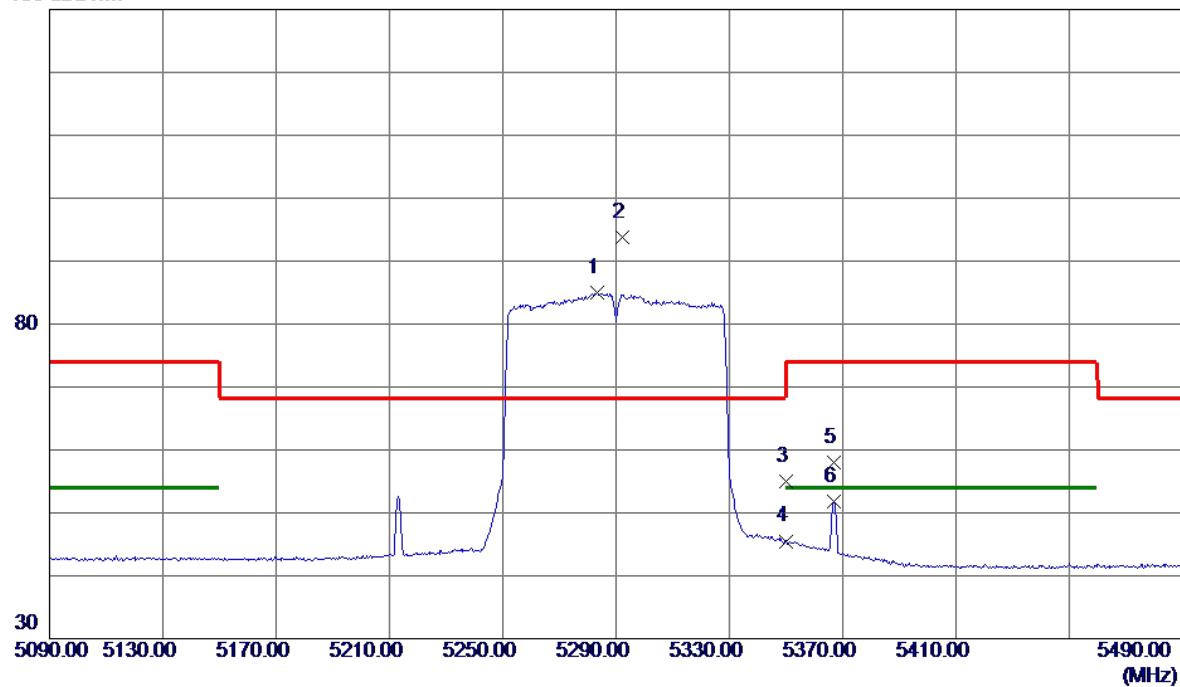


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5283.2000	71.20	13.82	85.02	999.00	-913.98	AVG	No Limit
2 *	5292.4000	80.04	13.82	93.86	68.20	25.66	Peak	No Limit
3	5350.0000	41.24	13.84	55.08	74.00	-18.92	Peak	
4	5350.0000	31.66	13.84	45.50	54.00	-8.50	AVG	
5	5366.8000	44.20	13.84	58.04	74.00	-15.96	Peak	
6	5366.8000	38.04	13.84	51.88	54.00	-2.12	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

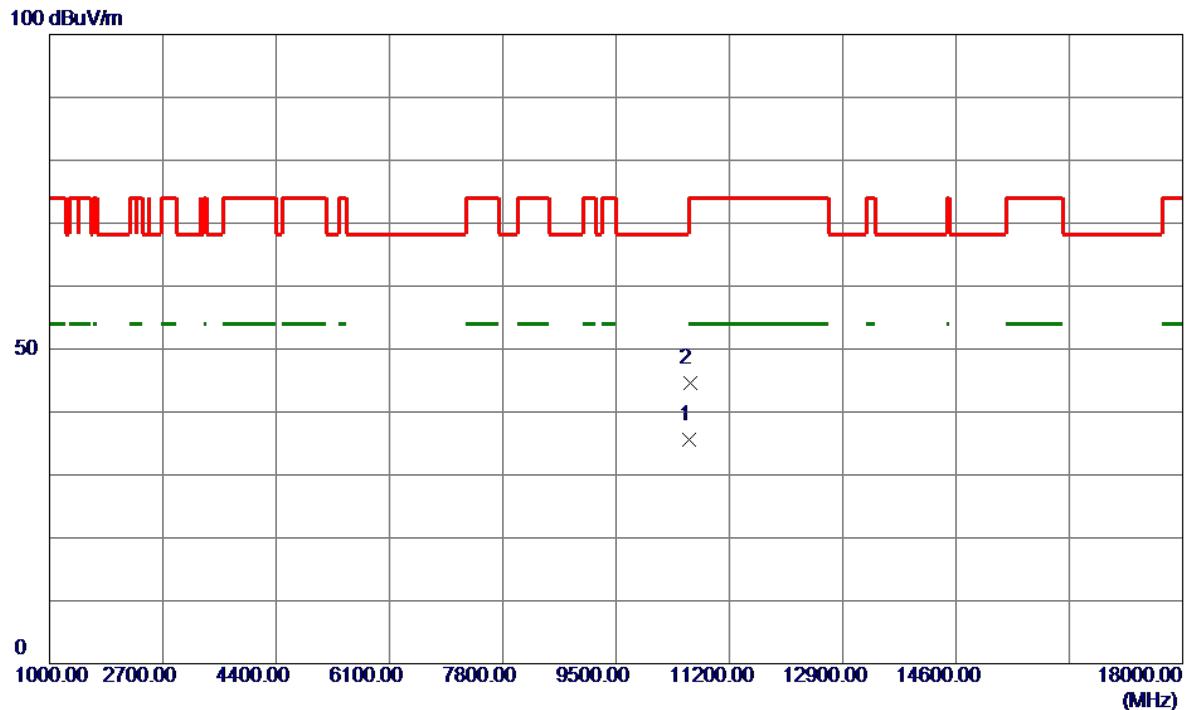


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10603.5000	25.67	10.00	35.67	54.00	-18.33	AVG	
2	10605.0000	34.60	10.00	44.60	74.00	-29.40	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

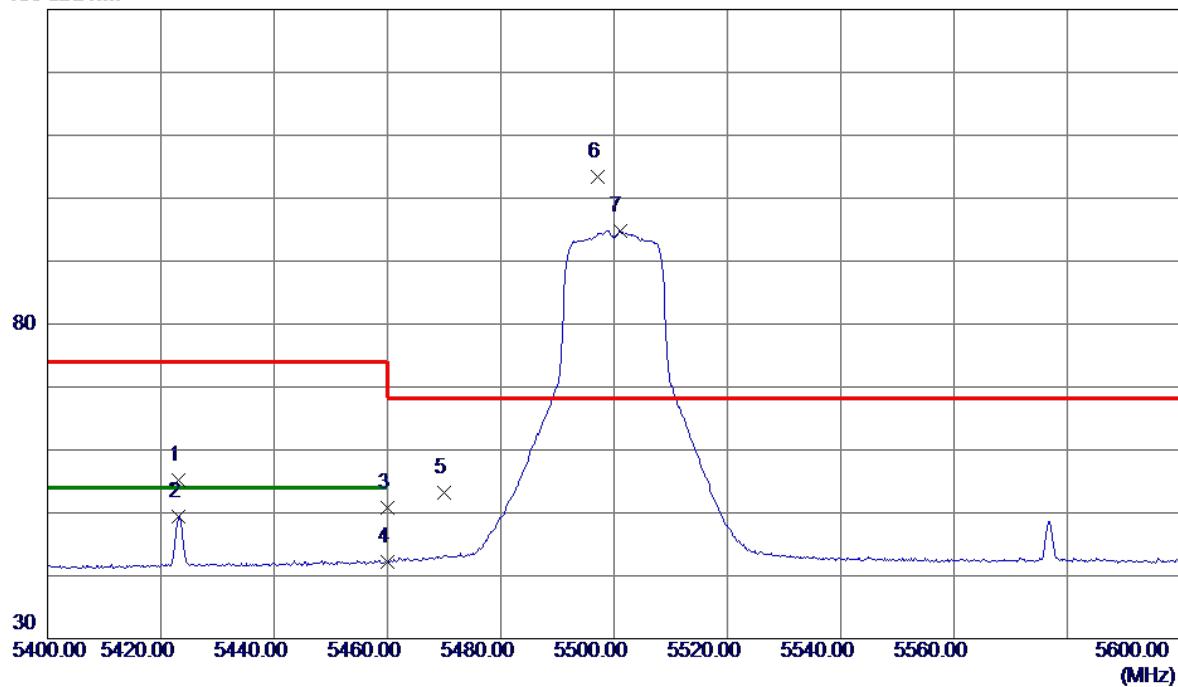


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	5423.2000	41.30	13.86	55.16	74.00	-18.84	Peak	
2	5423.2000	35.63	13.86	49.49	54.00	-4.51	AVG	
3	5460.0000	36.87	13.87	50.74	74.00	-23.26	Peak	
4	5460.0000	28.36	13.87	42.23	54.00	-11.77	AVG	
5	5470.0000	39.33	13.87	53.20	68.20	-15.00	Peak	
6 *	5497.2000	89.61	13.88	103.49	68.20	35.29	Peak	No Limit
7	5501.0000	80.90	13.88	94.78	999.00	-904.22	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

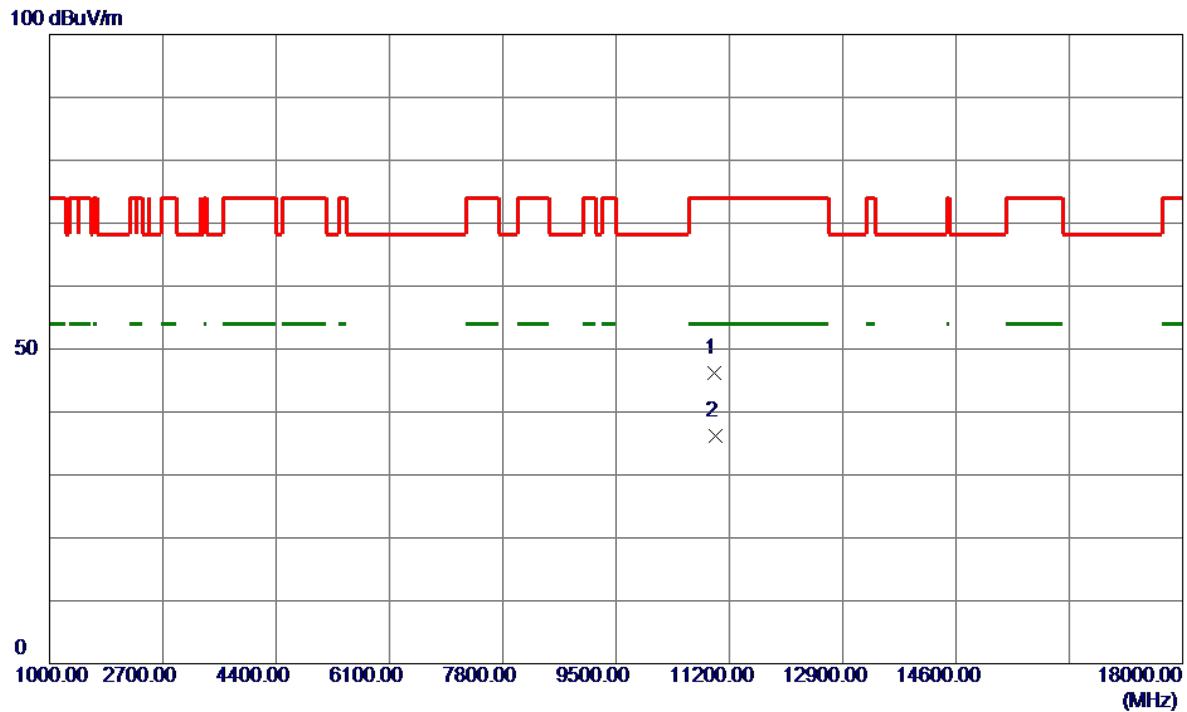


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	10982.5000	36.12	10.12	46.24	74.00	-27.76	Peak
2 *	10999.2000	26.11	10.13	36.24	54.00	-17.76	AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

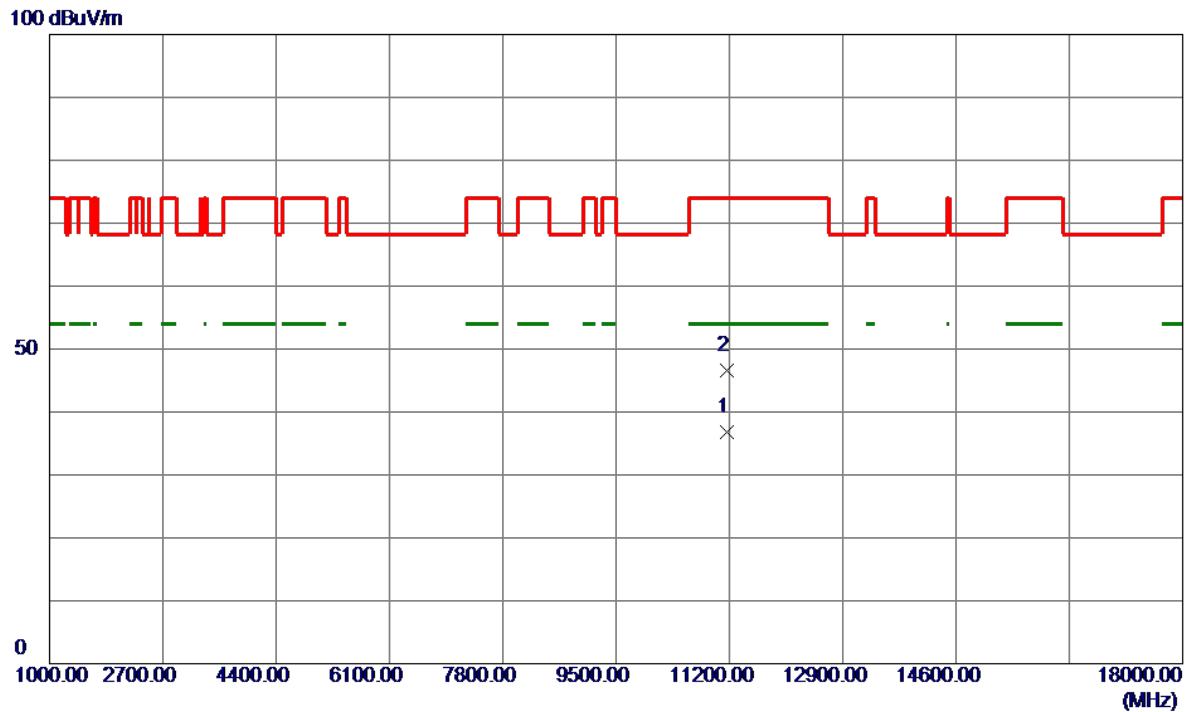


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11157.2000	26.49	10.33	36.82	54.00	-17.18	AVG	
2	11158.6500	36.23	10.34	46.57	74.00	-27.43	Peak	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

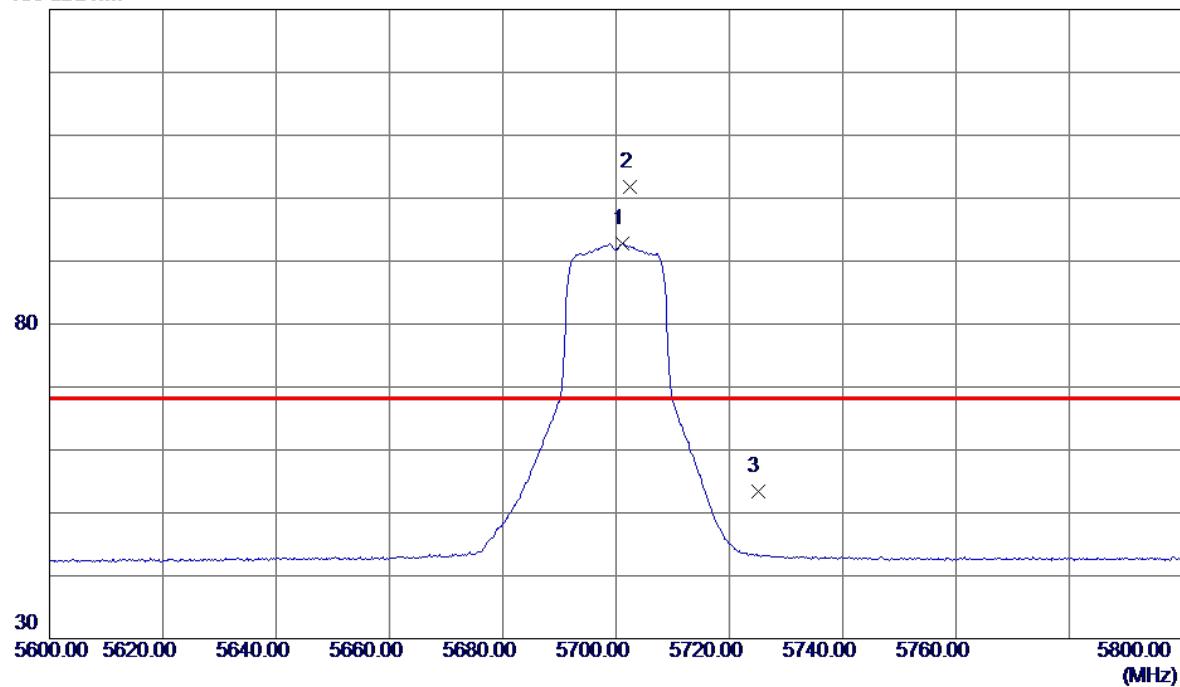


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5701.2000	78.49	14.28	92.77	999.00	-906.23	AVG	No Limit
2 *	5702.4000	87.53	14.28	101.81	68.20	33.61	Peak	No Limit
3	5725.0000	39.09	14.33	53.42	68.20	-14.78	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

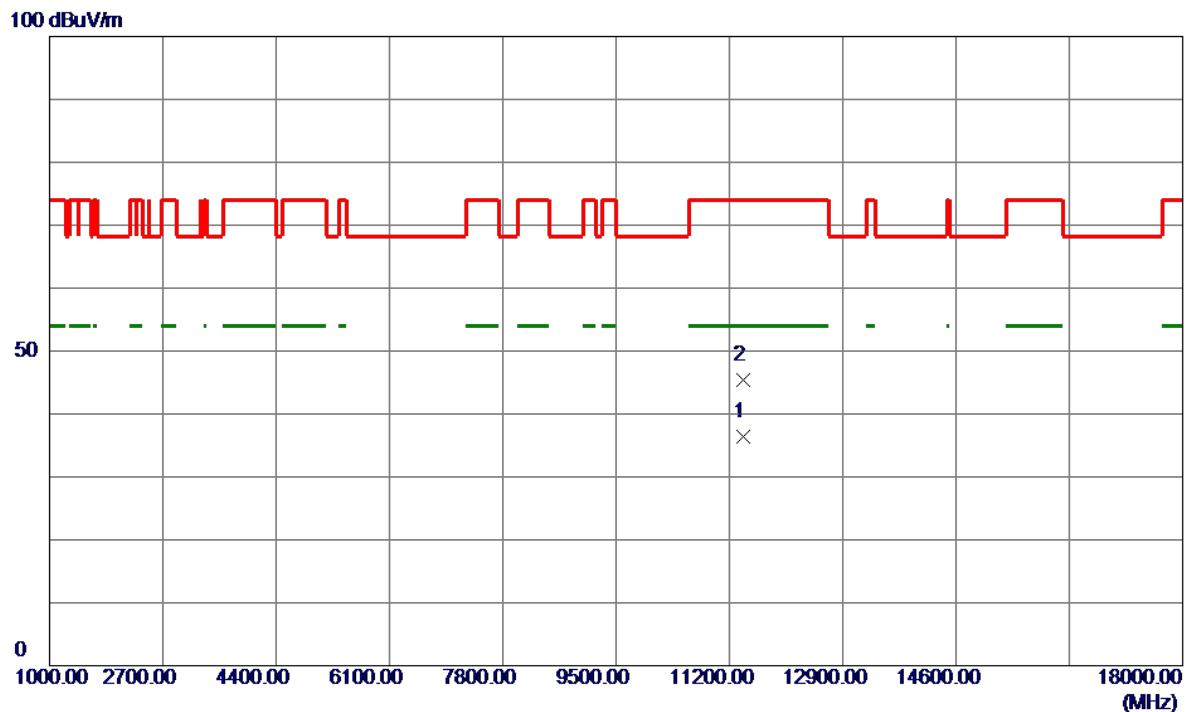


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11400.0000	25.66	10.65	36.31	54.00	-17.69	AVG	
2	11406.1000	34.83	10.66	45.49	74.00	-28.51	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

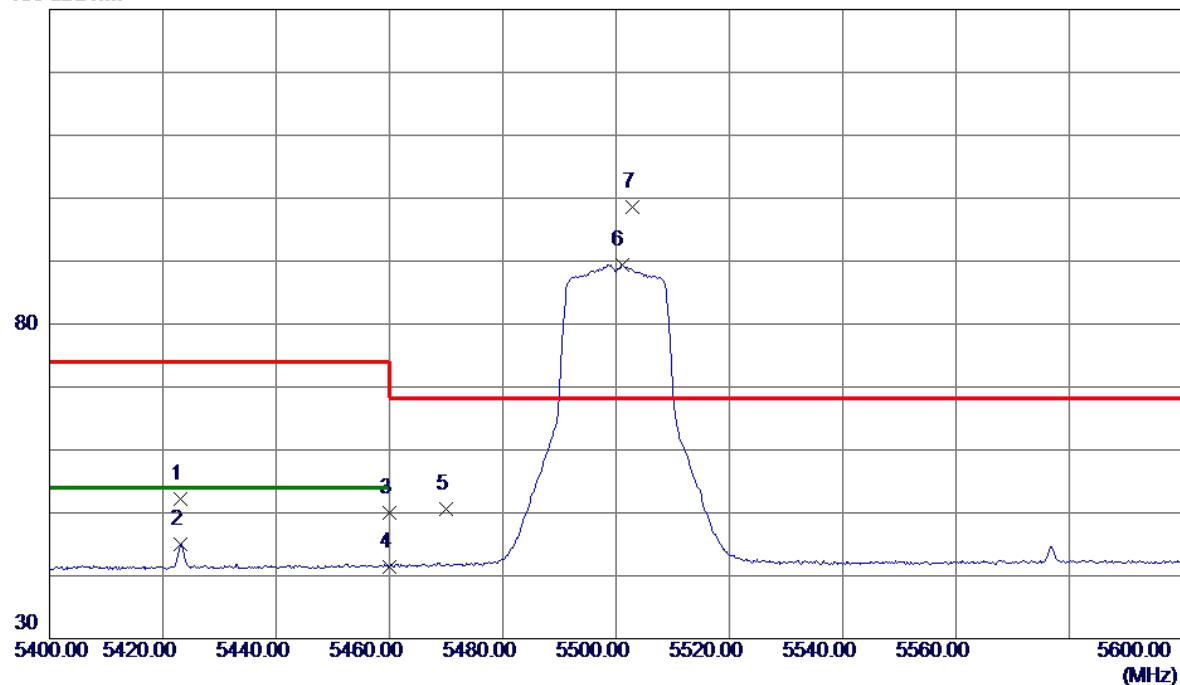


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5423.2000	38.38	13.86	52.24	74.00	-21.76	Peak	
2	5423.2000	31.20	13.86	45.06	54.00	-8.94	AVG	
3	5460.0000	36.05	13.87	49.92	74.00	-24.08	Peak	
4	5460.0000	27.55	13.87	41.42	54.00	-12.58	AVG	
5	5470.0000	36.64	13.87	50.51	68.20	-17.69	Peak	
6	5501.0000	75.56	13.88	89.44	999.00	-909.56	AVG	No Limit
7 *	5502.8000	84.72	13.89	98.61	68.20	30.41	Peak	No Limit

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

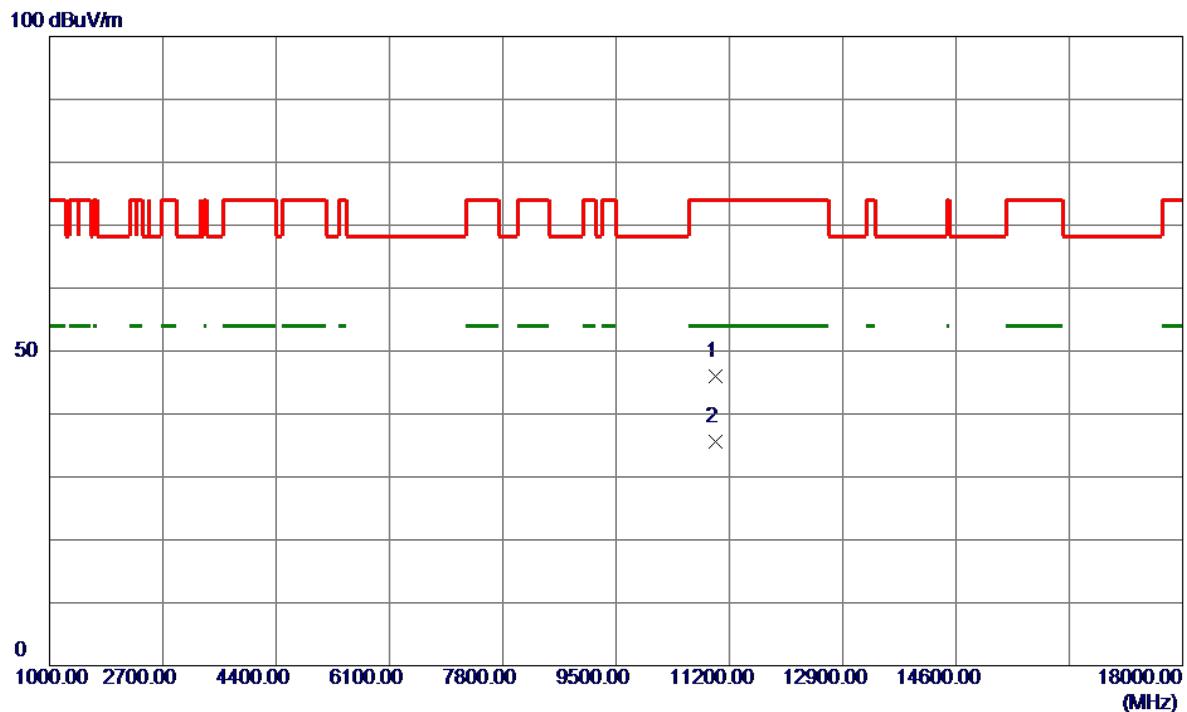


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	10987.0500	35.87	10.13	46.00	74.00	-28.00	Peak	
2 *	10991.4000	25.39	10.13	35.52	54.00	-18.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

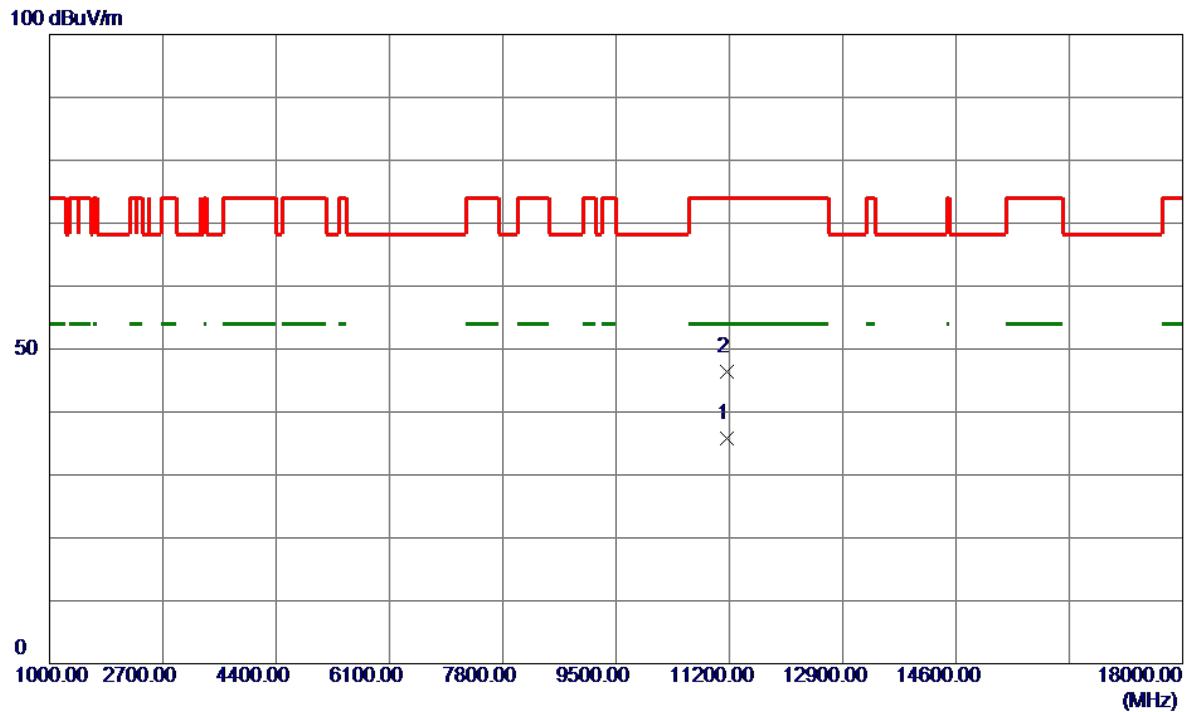


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11163.5500	25.55	10.34	35.89	54.00	-18.11	AVG	
2	11167.9000	36.12	10.35	46.47	74.00	-27.53	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

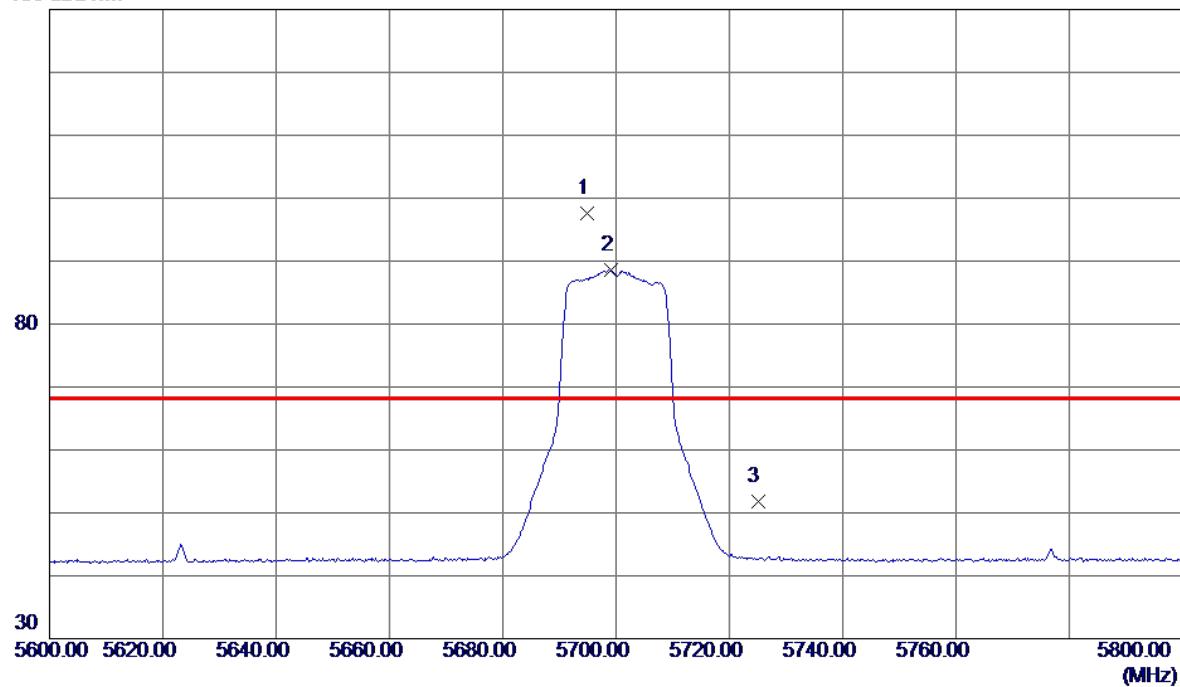


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5694.8000	83.38	14.27	97.65	68.20	29.45	Peak	No Limit
2	5699.2000	74.28	14.28	88.56	999.00	-910.44	AVG	No Limit
3	5725.0000	37.39	14.33	51.72	68.20	-16.48	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

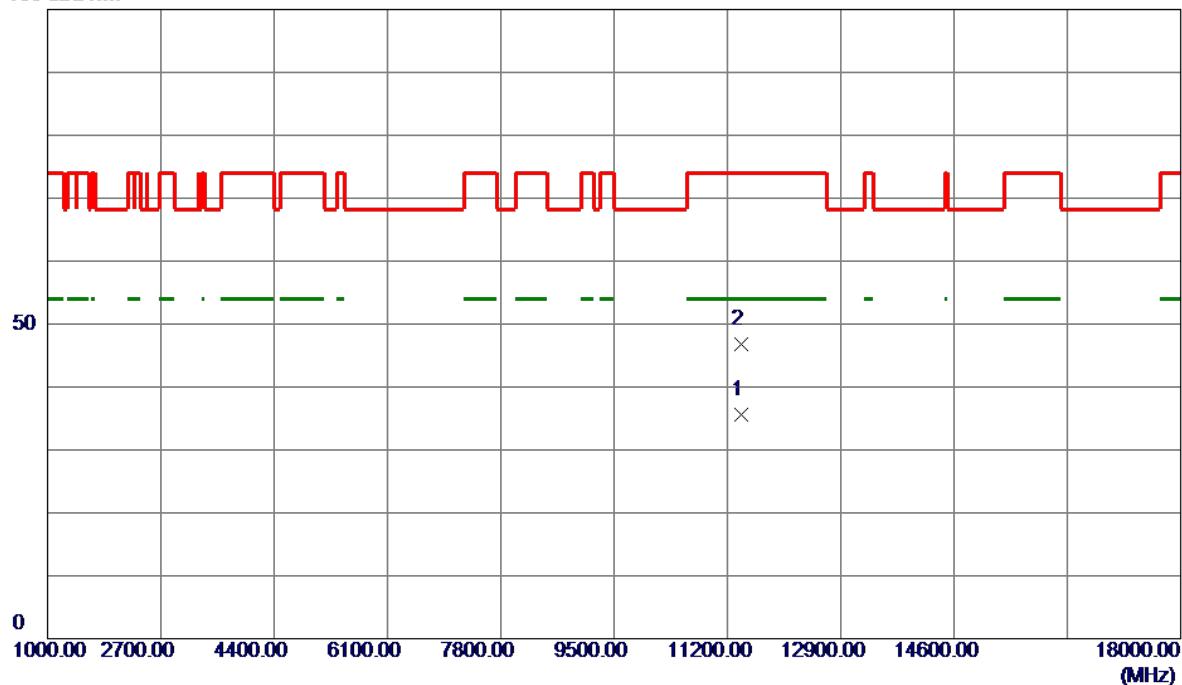


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11399.4000	25.04	10.65	35.69	54.00	-18.31	AVG	
2	11413.1000	36.14	10.67	46.81	74.00	-27.19	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

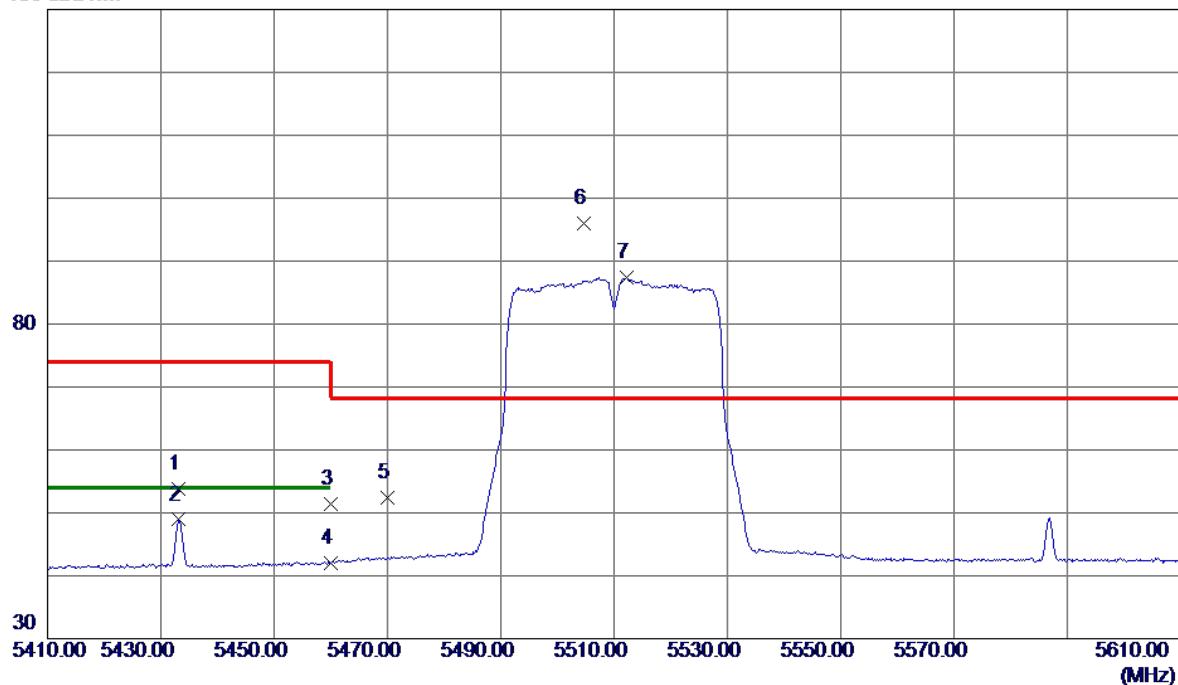


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5433.2000	39.92	13.86	53.78	74.00	-20.22	Peak	
2	5433.2000	35.04	13.86	48.90	54.00	-5.10	AVG	
3	5460.0000	37.60	13.87	51.47	74.00	-22.53	Peak	
4	5460.0000	28.14	13.87	42.01	54.00	-11.99	AVG	
5	5470.0000	38.51	13.87	52.38	68.20	-15.82	Peak	
6 *	5504.6000	82.05	13.89	95.94	68.20	27.74	Peak	No Limit
7	5512.2000	73.43	13.90	87.33	999.00	-911.67	AVG	No Limit

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

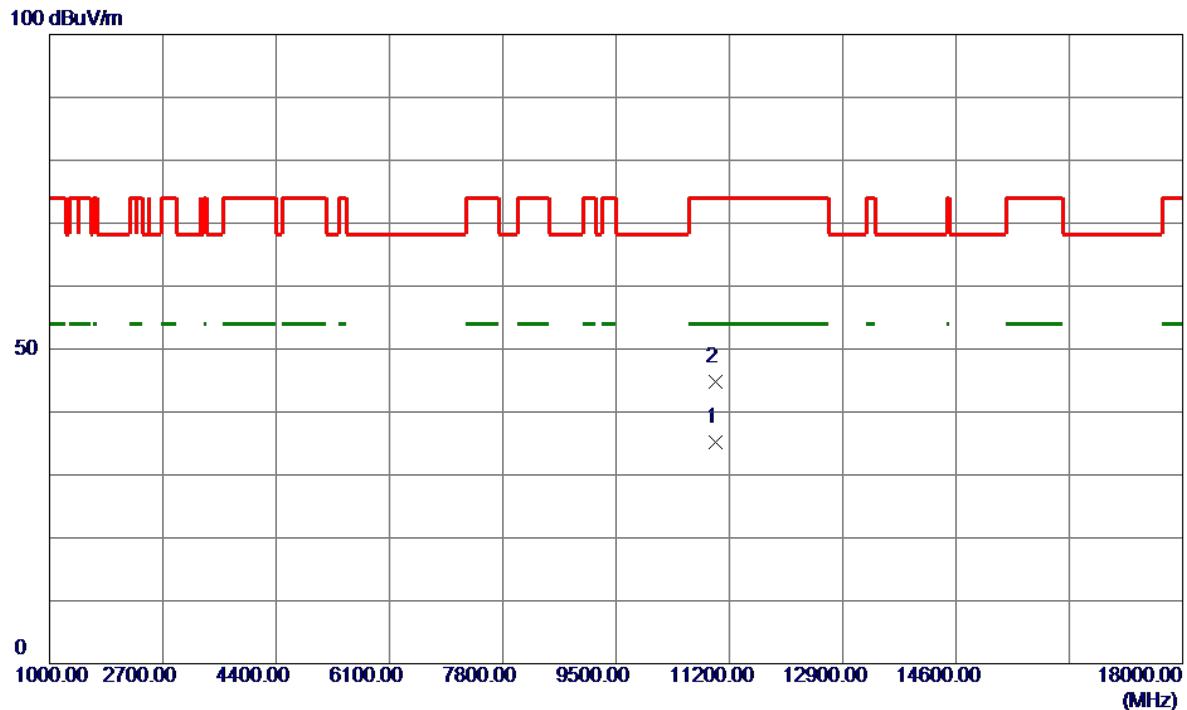


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10995.0000	25.16	10.13	35.29	54.00	-18.71	AVG	
2	10999.0500	34.67	10.13	44.80	74.00	-29.20	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

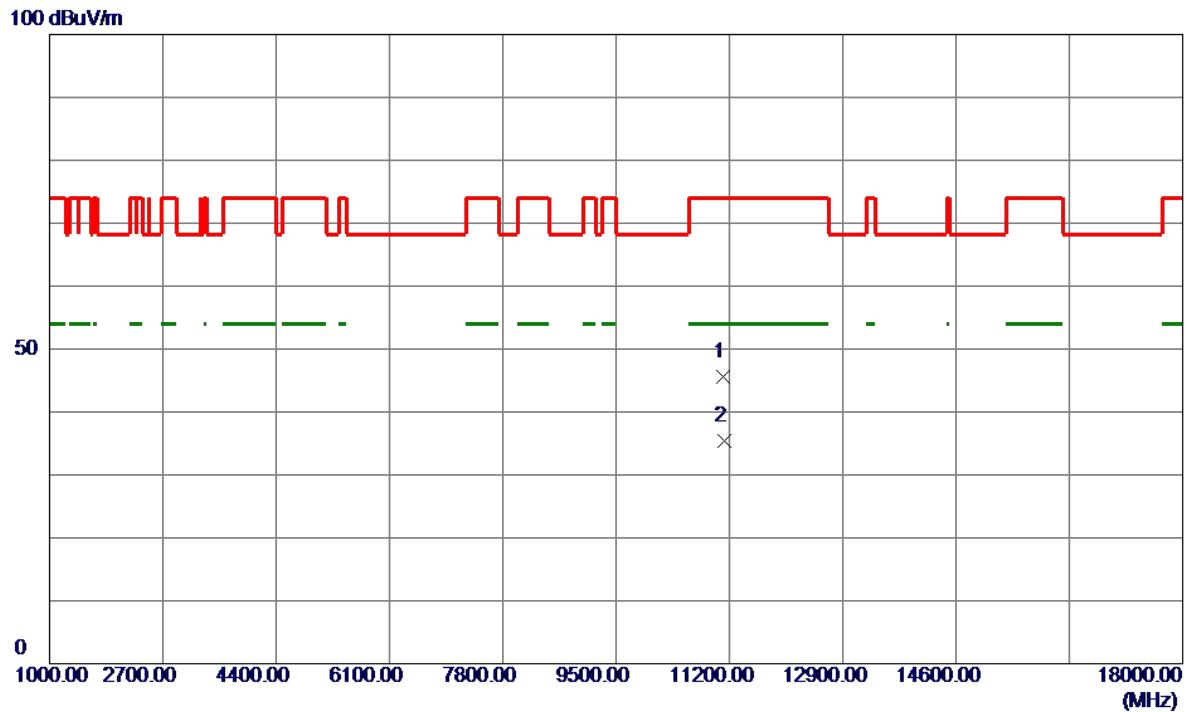


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11102.8500	35.25	10.26	45.51	74.00	-28.49	Peak	
2 *	11119.5500	25.19	10.29	35.48	54.00	-18.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

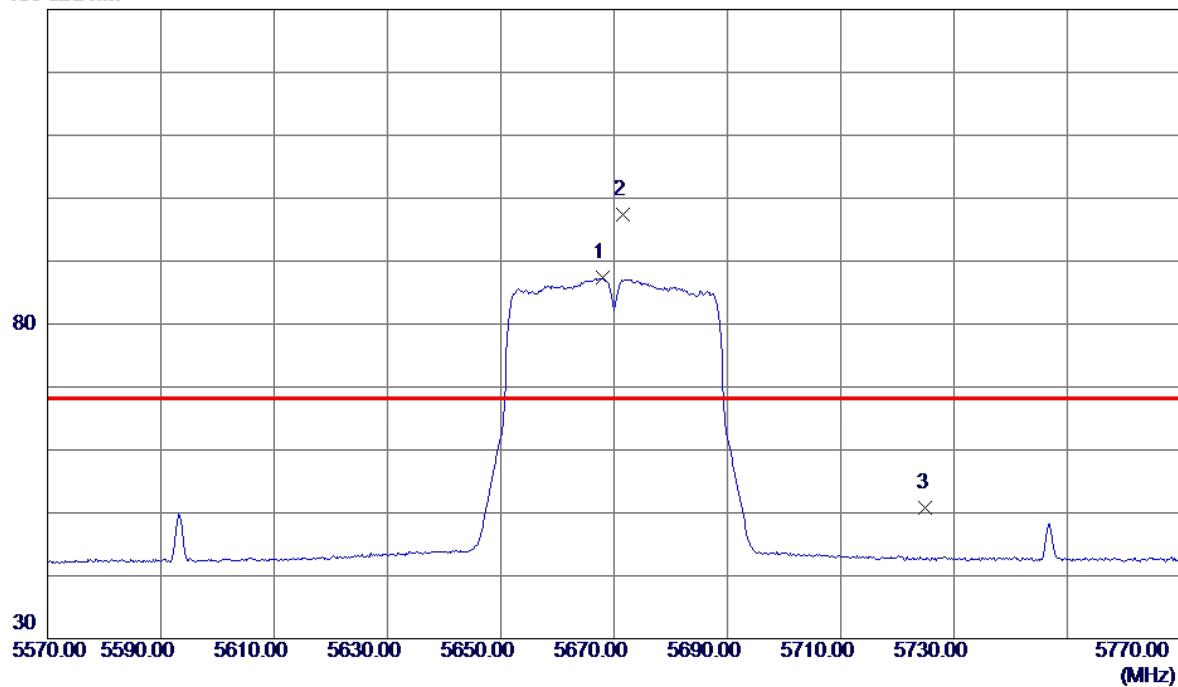


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5668.0000	73.22	14.22	87.44	999.00	-911.56	AVG	No Limit
2 *	5671.6000	83.18	14.22	97.40	68.20	29.20	Peak	No Limit
3	5725.0000	36.47	14.33	50.80	68.20	-17.40	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

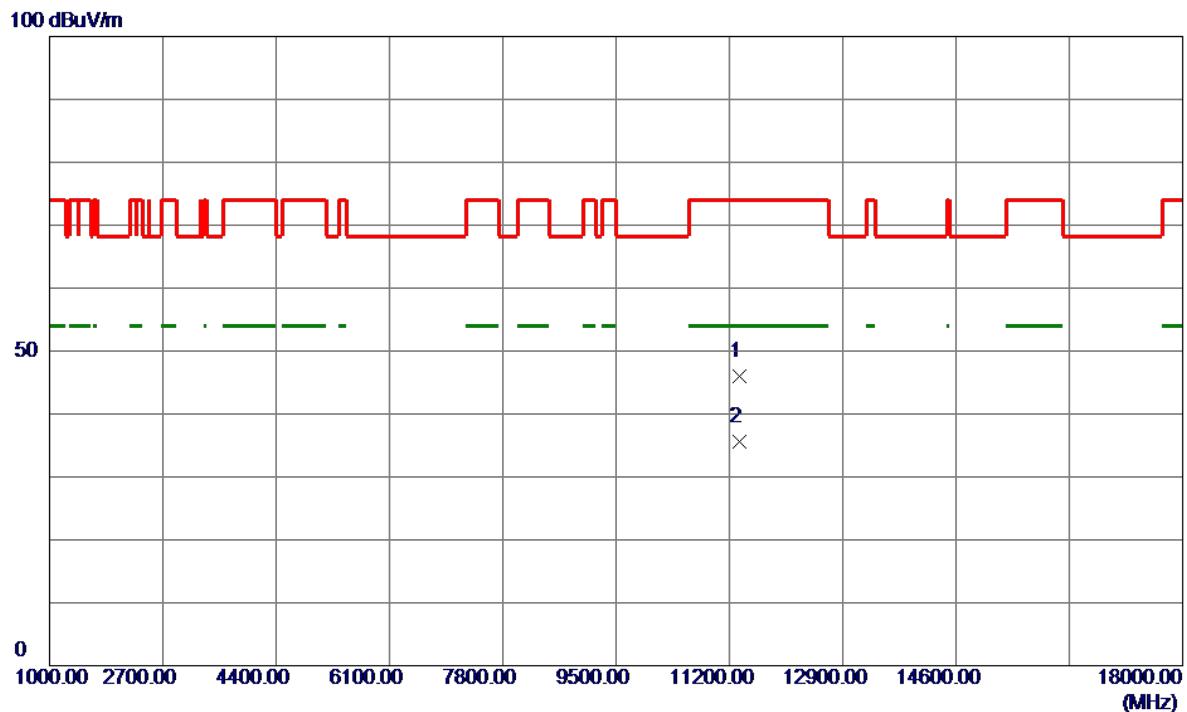


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	11343.3000	35.49	10.58	46.07	74.00	-27.93	Peak
2 *	11350.7500	25.02	10.59	35.61	54.00	-18.39	AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

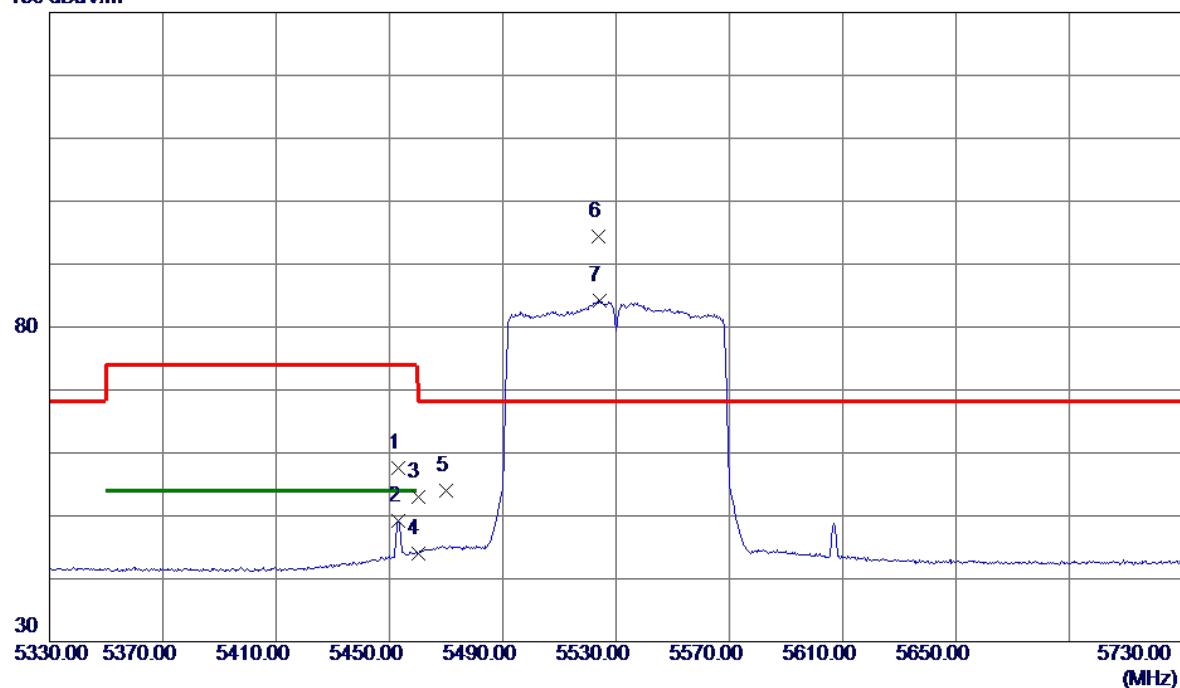


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.2000	43.65	13.87	57.52	74.00	-16.48	Peak	
2	5453.2000	35.28	13.87	49.15	54.00	-4.85	AVG	
3	5460.0000	39.07	13.87	52.94	74.00	-21.06	Peak	
4	5460.0000	30.15	13.87	44.02	54.00	-9.98	AVG	
5	5470.0000	40.16	13.87	54.03	68.20	-14.17	Peak	
6 *	5523.6000	80.38	13.93	94.31	68.20	26.11	Peak	No Limit
7	5524.0000	70.30	13.93	84.23	999.00	-914.77	AVG	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

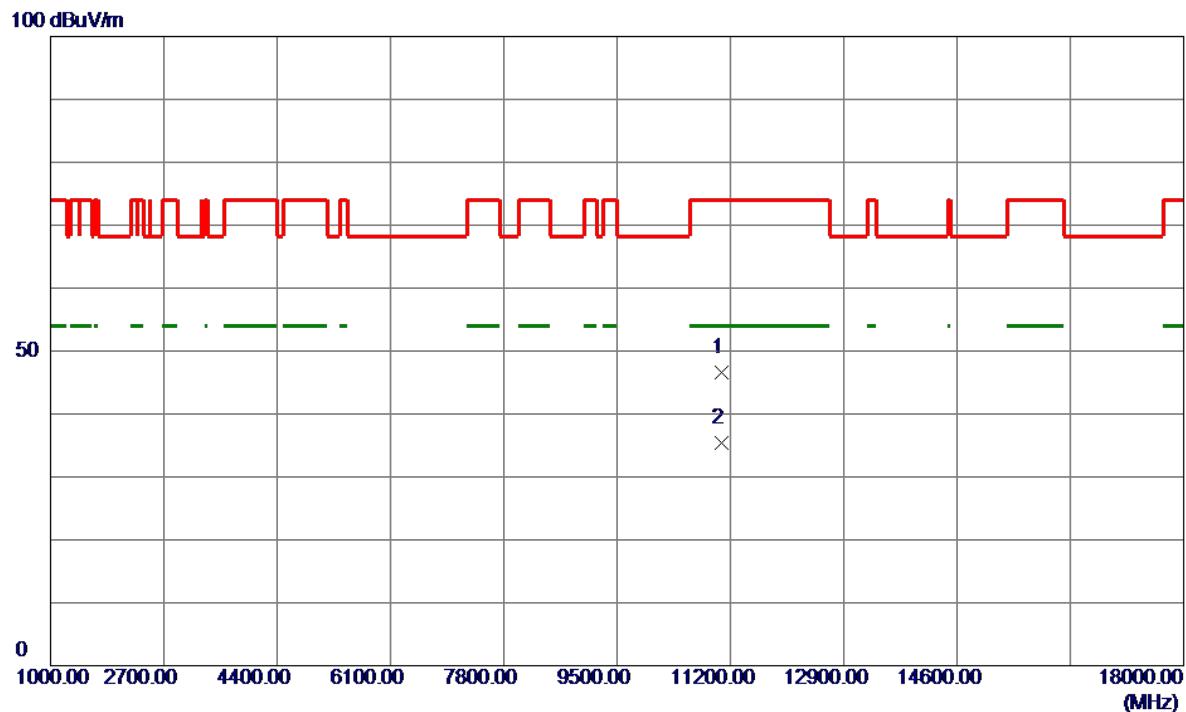


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11075.8000	36.43	10.23	46.66	74.00	-27.34	Peak	
2 *	11076.1500	25.13	10.23	35.36	54.00	-18.64	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

130 dBuV/m

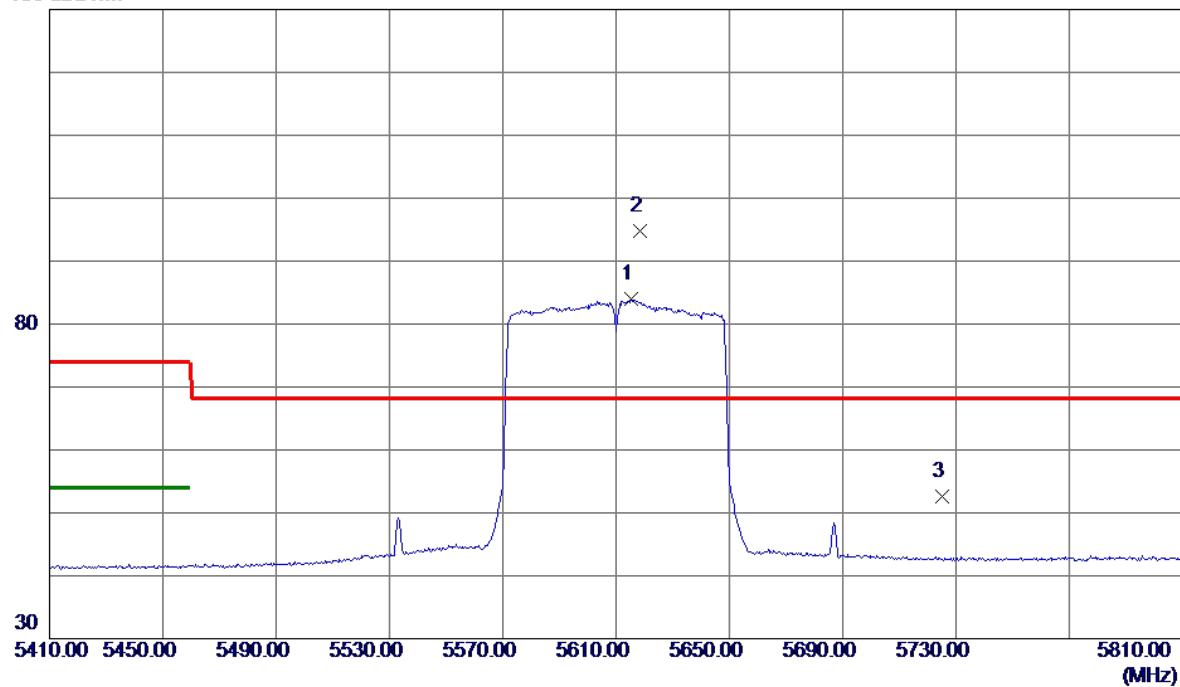


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5615.2000	69.89	14.11	84.00	999.00	-915.00	AVG	No Limit
2 *	5618.4000	80.65	14.12	94.77	68.20	26.57	Peak	No Limit
3	5725.0000	38.26	14.33	52.59	68.20	-15.61	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

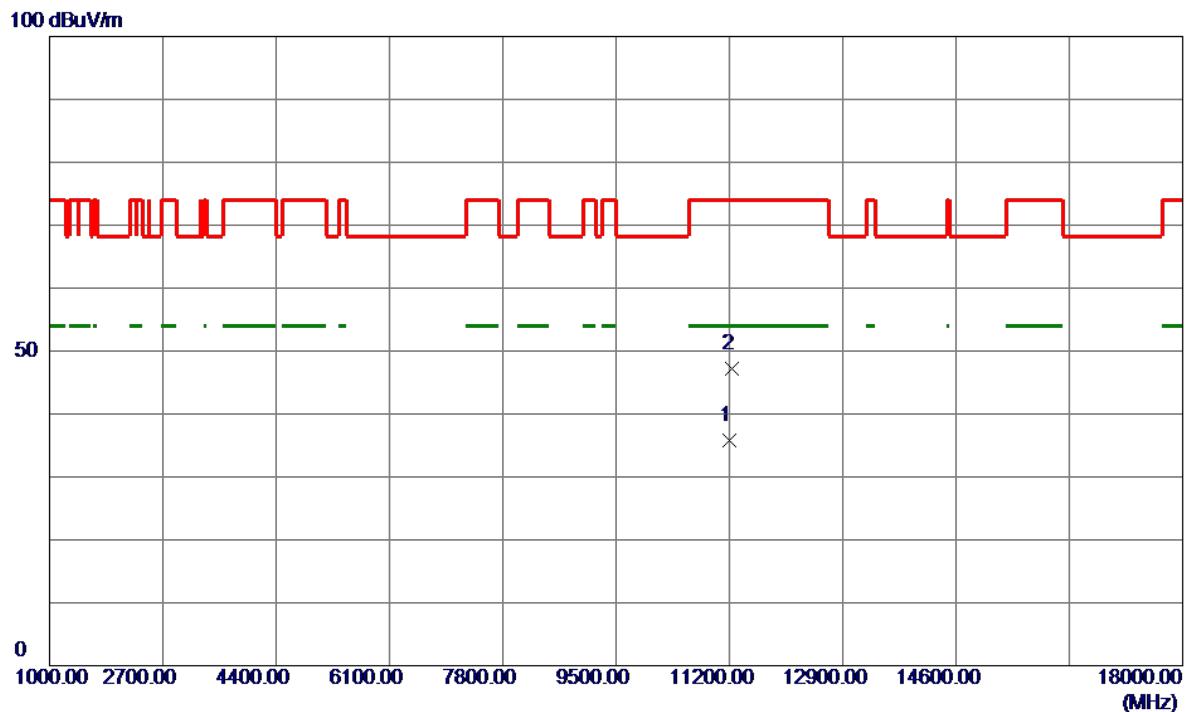


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11203.5000	25.40	10.39	35.79	54.00	-18.21	AVG	
2	11235.5500	36.80	10.44	47.24	74.00	-26.76	Peak	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

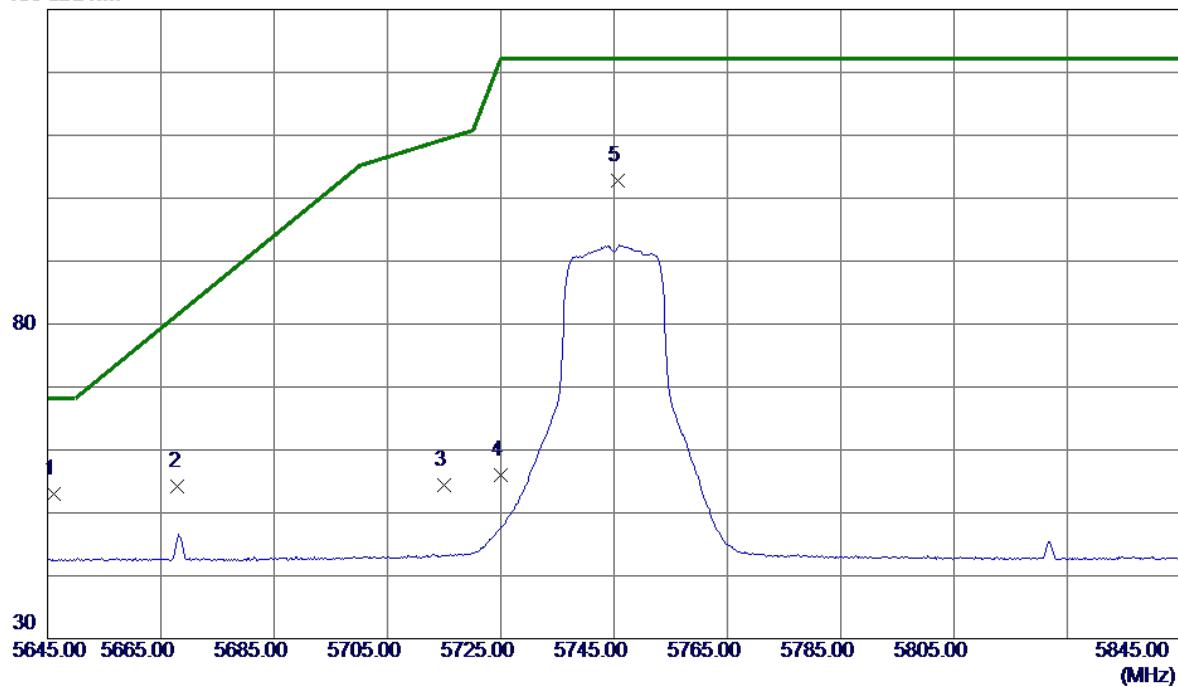


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.2000	38.92	14.17	53.09	68.20	-15.11	Peak	
2	5668.0000	39.94	14.22	54.16	81.52	-27.36	Peak	
3	5715.0000	40.01	14.31	54.32	109.40	-55.08	Peak	
4	5725.0000	41.66	14.33	55.99	122.20	-66.21	Peak	
5	5745.6000	88.44	14.37	102.81	122.20	-19.39	Peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

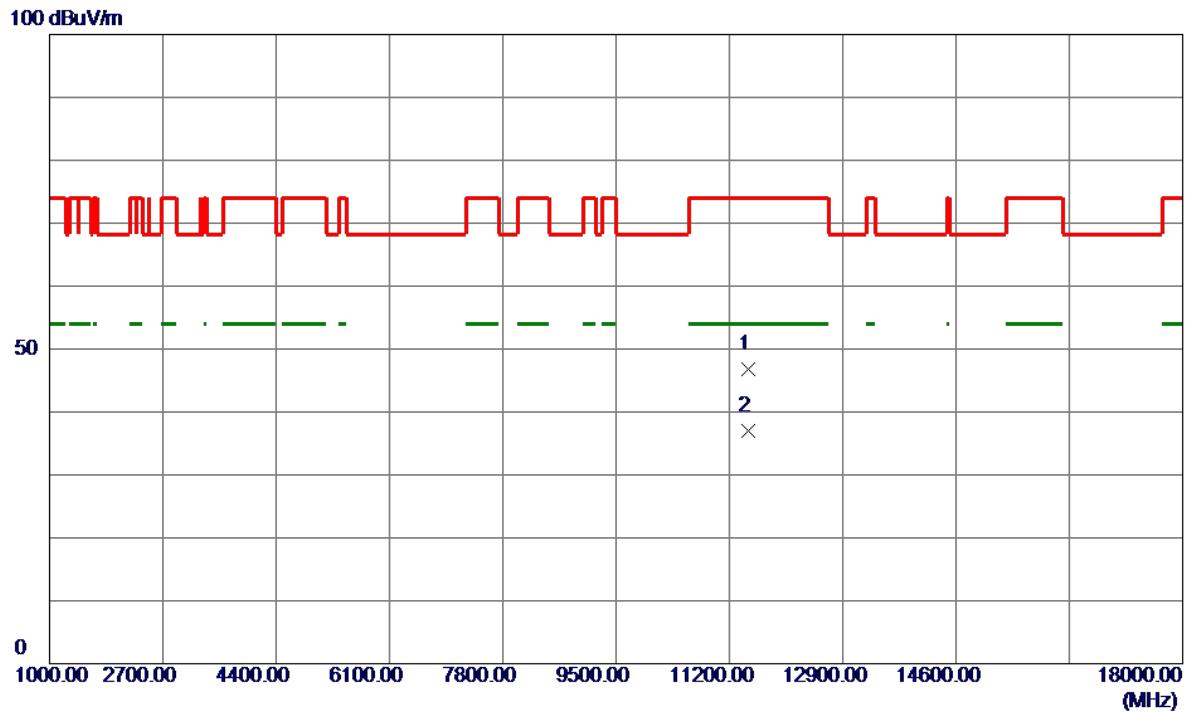


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	11480.2000	36.05	10.75	46.80	74.00	-27.20	Peak
2 *	11489.7500	26.19	10.77	36.96	54.00	-17.04	AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

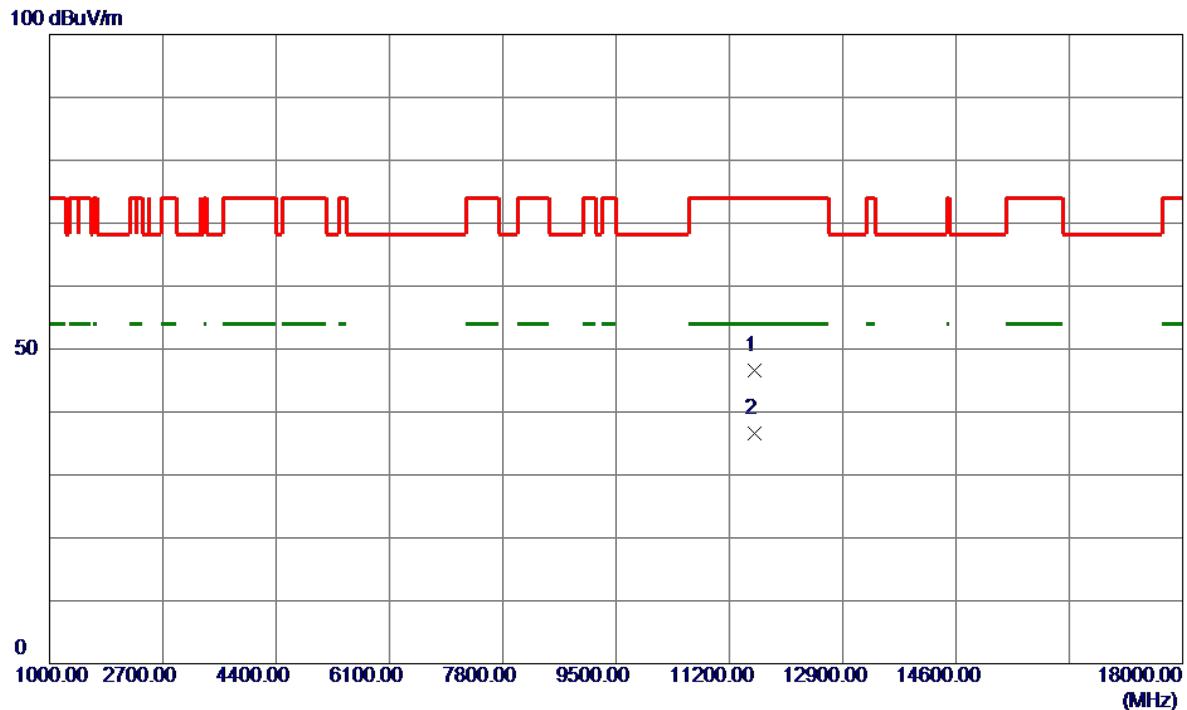


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11570.0000	35.83	10.79	46.62	74.00	-27.38	Peak	
2 *	11571.3500	25.76	10.79	36.55	54.00	-17.45	AVG	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

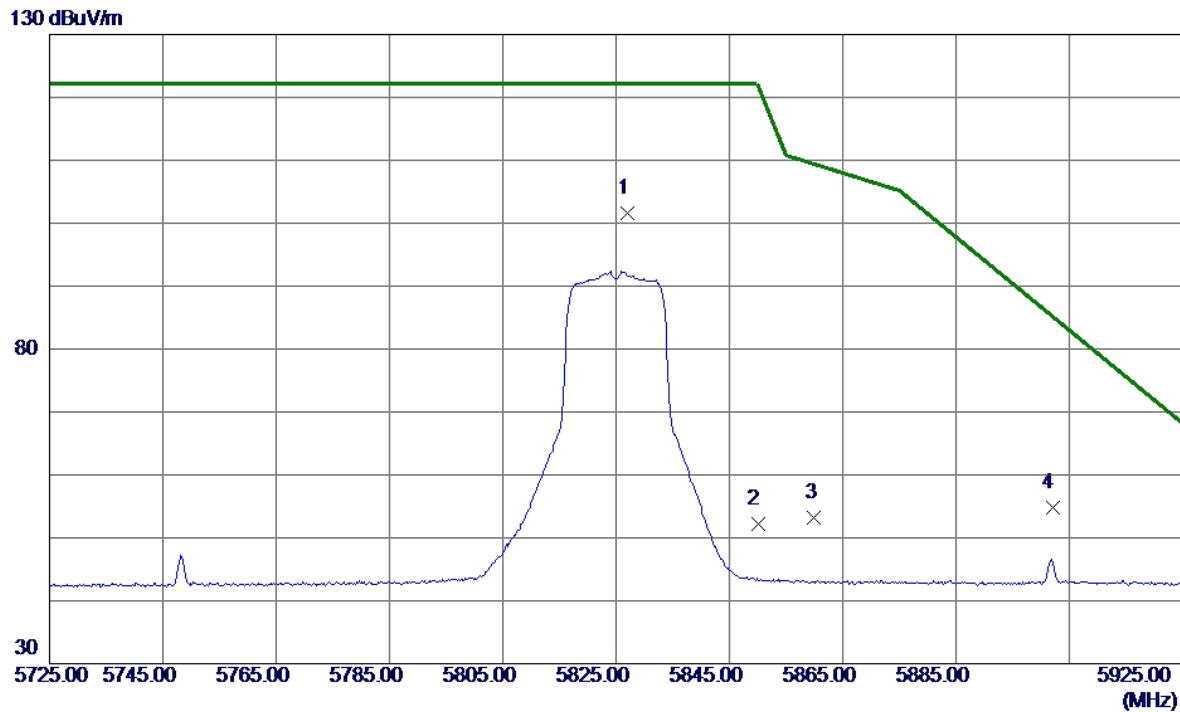


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5827.0000	87.04	14.53	101.57	122.20	-20.63	Peak	No Limit
2	5850.0000	37.55	14.58	52.13	122.20	-70.07	Peak	
3	5860.0000	38.55	14.60	53.15	109.40	-56.25	Peak	
4	5902.0000	40.04	14.68	54.72	85.22	-30.50	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

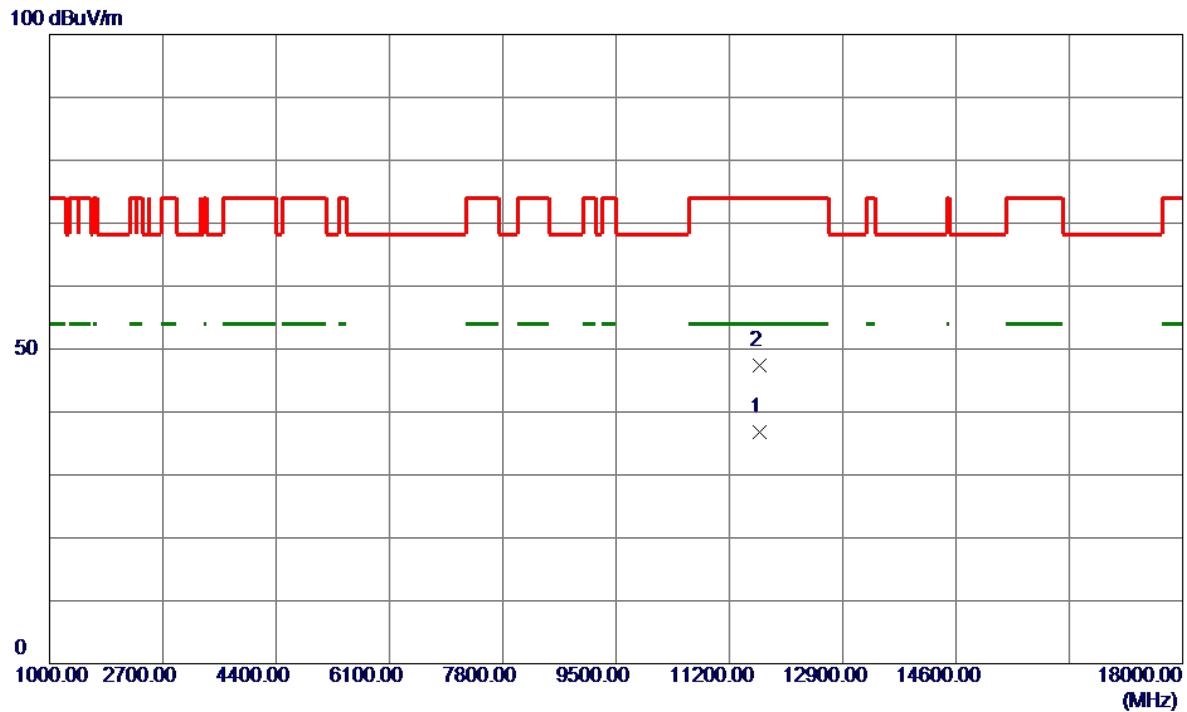


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11651.8500	25.98	10.79	36.77	54.00	-17.23	AVG	
2	11656.5500	36.56	10.79	47.35	74.00	-26.65	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

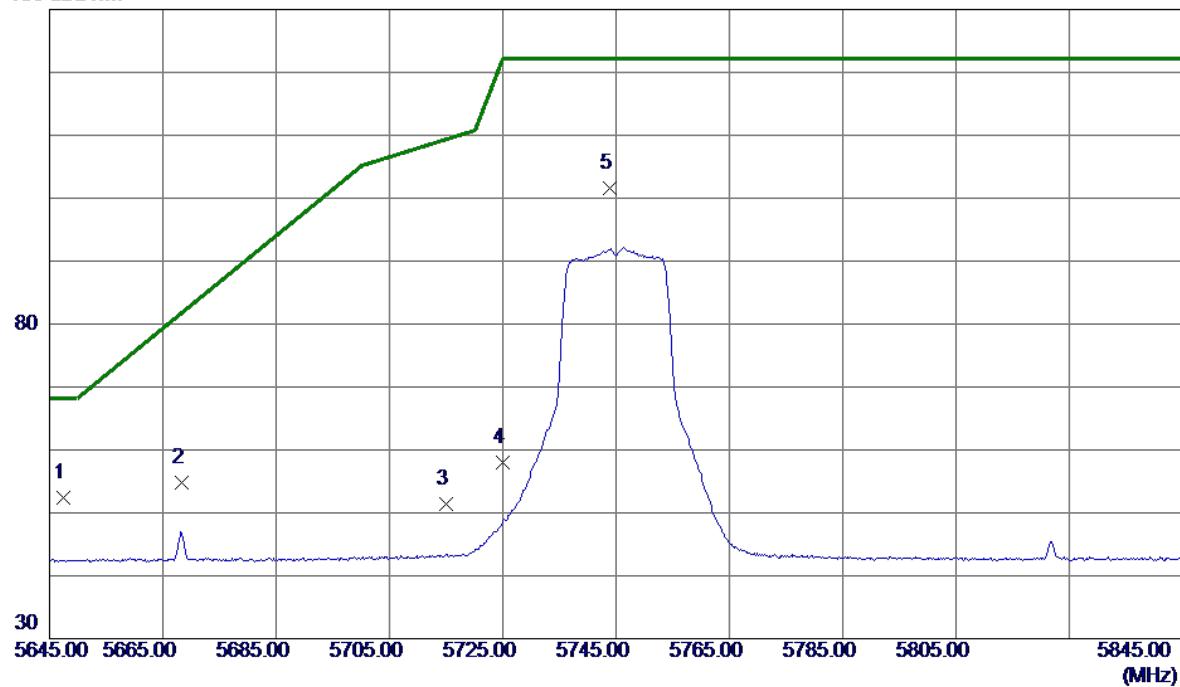


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1 *	5647.4000	38.14	14.17	52.31	68.20	-15.89	Peak		
2	5668.4000	40.62	14.22	54.84	81.82	-26.98	Peak		
3	5715.0000	37.05	14.31	51.36	109.40	-58.04	Peak		
4	5725.0000	43.73	14.33	58.06	122.20	-64.14	Peak		
5	5743.8000	87.17	14.37	101.54	122.20	-20.66	Peak		No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

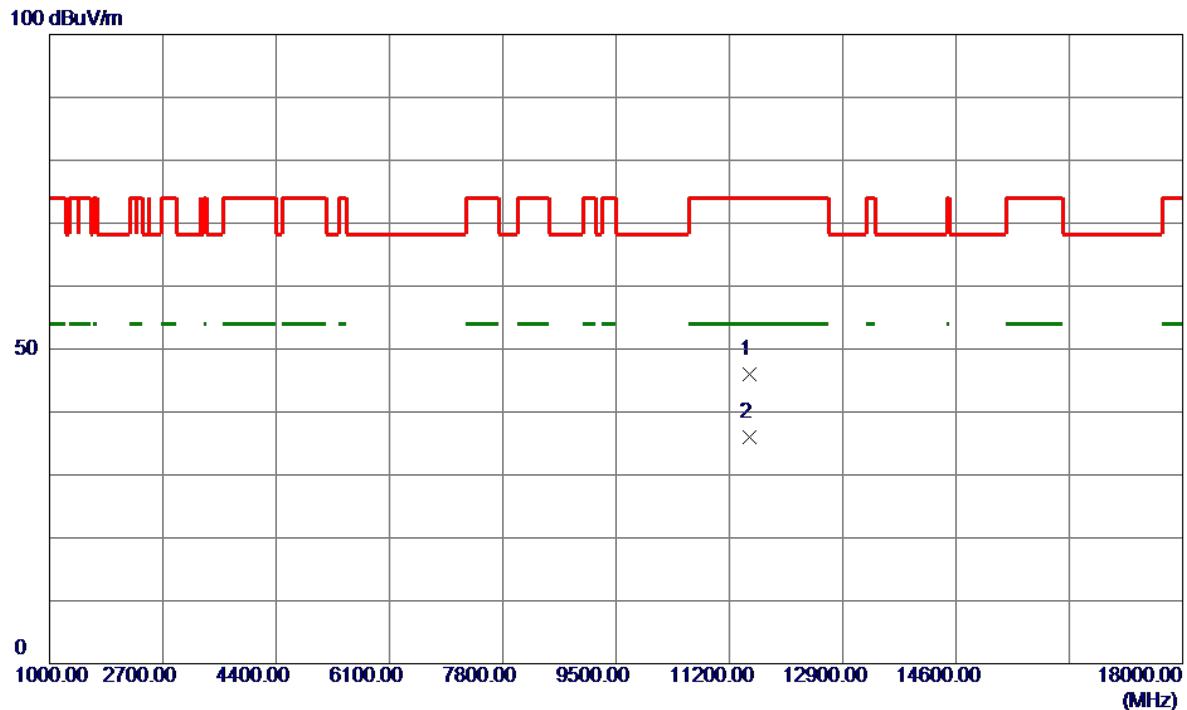


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11496.6000	35.25	10.78	46.03	74.00	-27.97	Peak	
2 *	11497.6500	25.27	10.78	36.05	54.00	-17.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

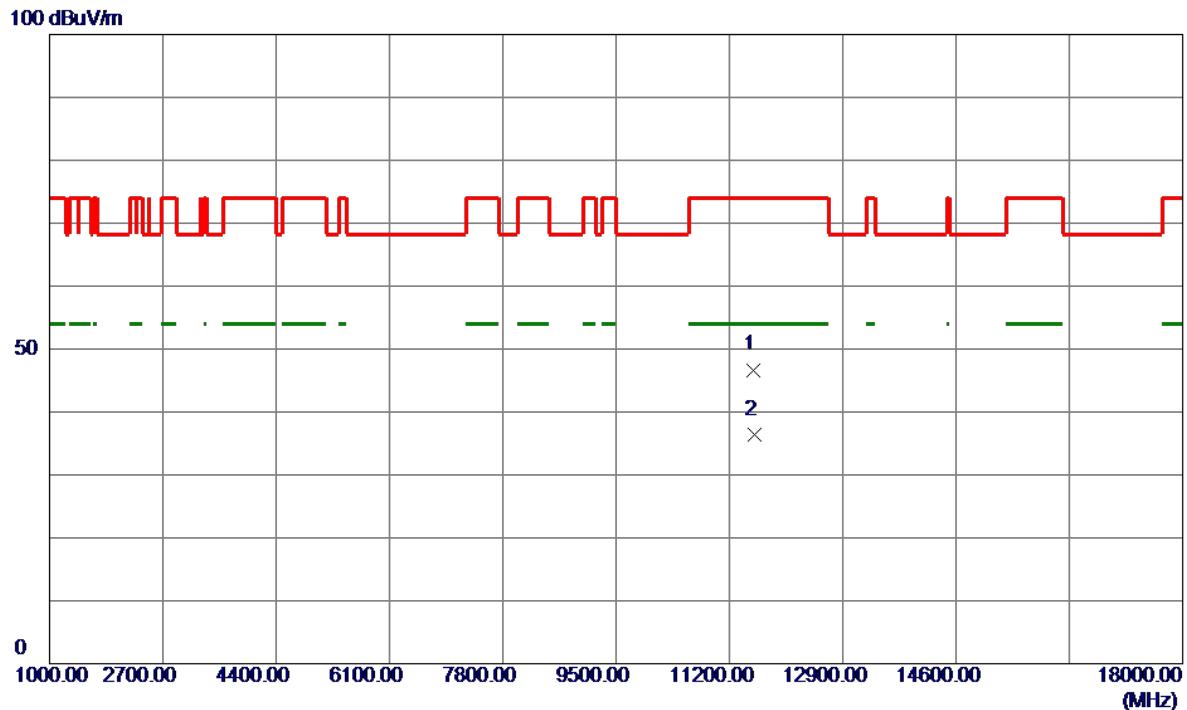


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11557.5500	35.92	10.78	46.70	74.00	-27.30	Peak	
2 *	11573.0500	25.52	10.79	36.31	54.00	-17.69	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

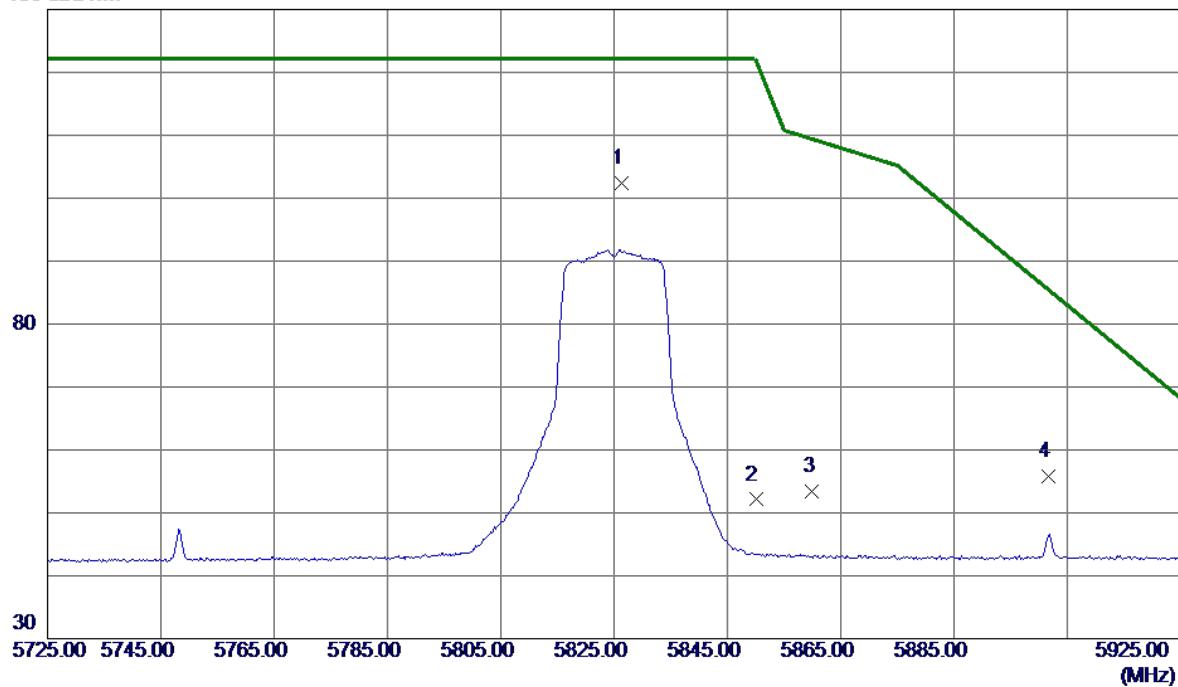


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5826.4000	87.86	14.53	102.39	122.20	-19.81	Peak	No Limit
2	5850.0000	37.52	14.58	52.10	122.20	-70.10	Peak	
3	5860.0000	38.72	14.60	53.32	109.40	-56.08	Peak	
4	5901.6000	41.07	14.68	55.75	85.52	-29.77	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

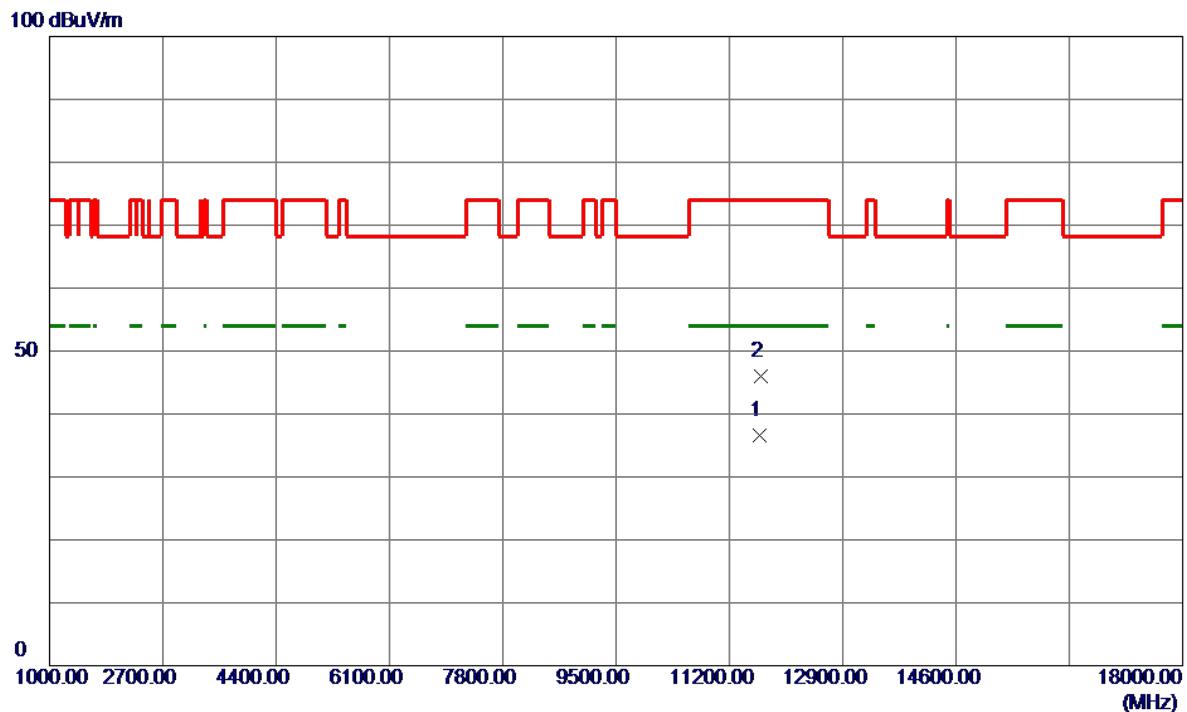


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector Comment
1 *	11649.3500	25.80	10.79	36.59	54.00	-17.41	AVG
2	11668.6000	35.30	10.79	46.09	74.00	-27.91	Peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

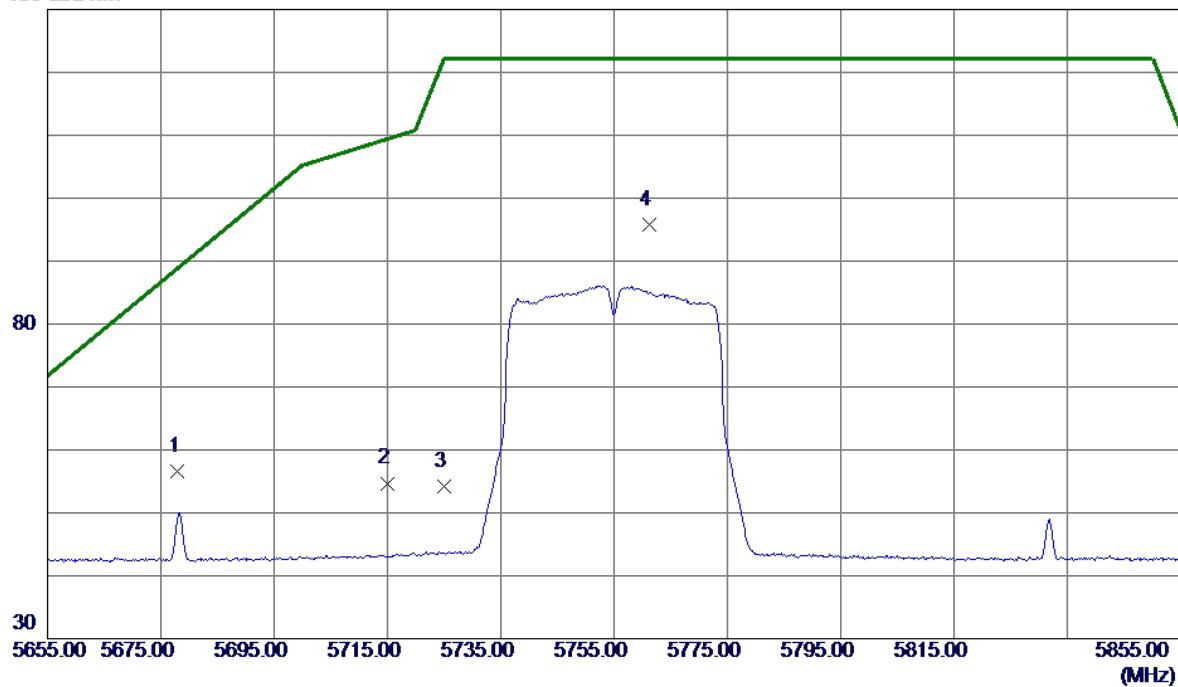


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5678.0000	42.35	14.24	56.59	88.92	-32.33	Peak	
2	5715.0000	40.39	14.31	54.70	109.40	-54.70	Peak	
3	5725.0000	39.96	14.33	54.29	122.20	-67.91	Peak	
4 *	5761.2000	81.43	14.40	95.83	122.20	-26.37	Peak	No Limit

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

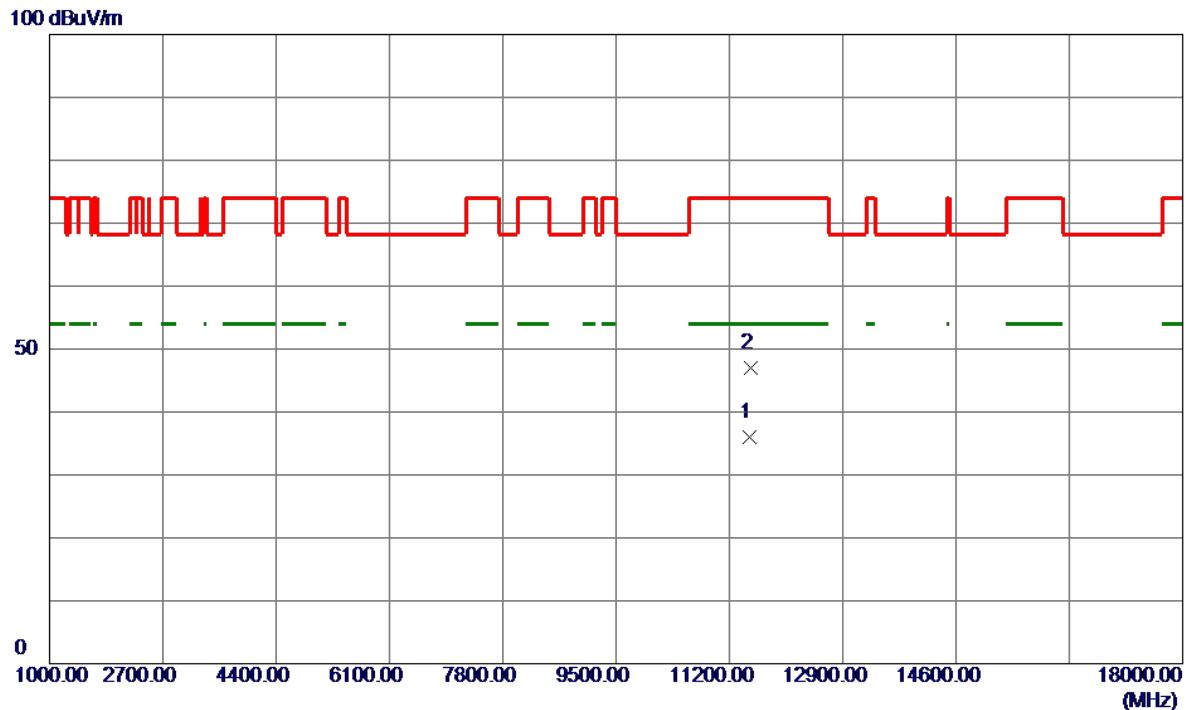


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11503.9000	25.17	10.78	35.95	54.00	-18.05	AVG	
2	11529.7500	36.18	10.78	46.96	74.00	-27.04	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

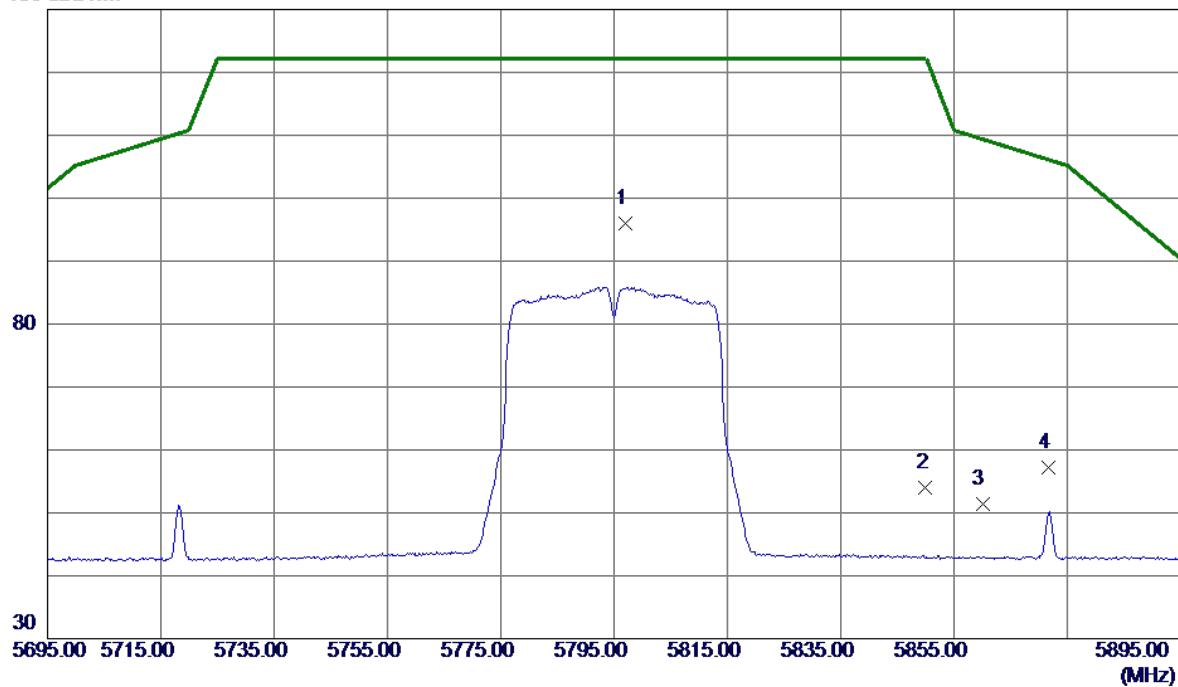


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5797.0000	81.61	14.47	96.08	122.20	-26.12	Peak	No Limit
2	5850.0000	39.38	14.58	53.96	122.20	-68.24	Peak	
3	5860.0000	36.81	14.60	51.41	109.40	-57.99	Peak	
4	5871.6000	42.64	14.62	57.26	106.15	-48.89	Peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

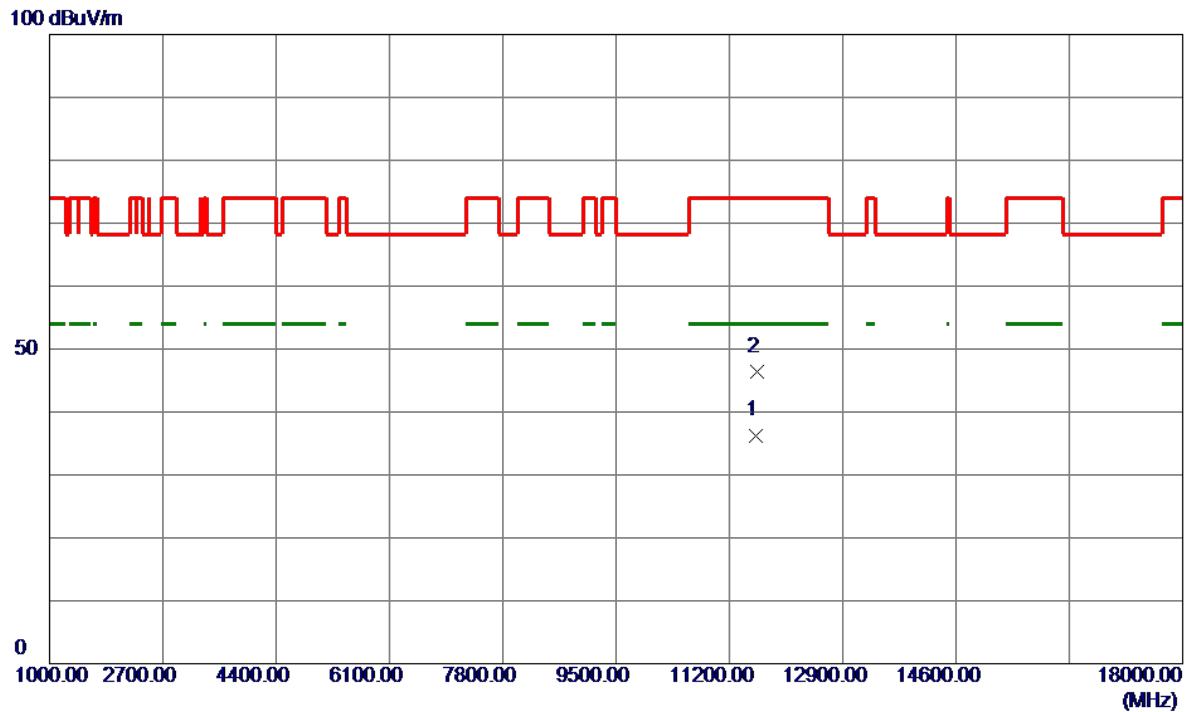


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11588.3000	25.51	10.79	36.30	54.00	-17.70	AVG	
2	11611.7000	35.70	10.79	46.49	74.00	-27.51	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

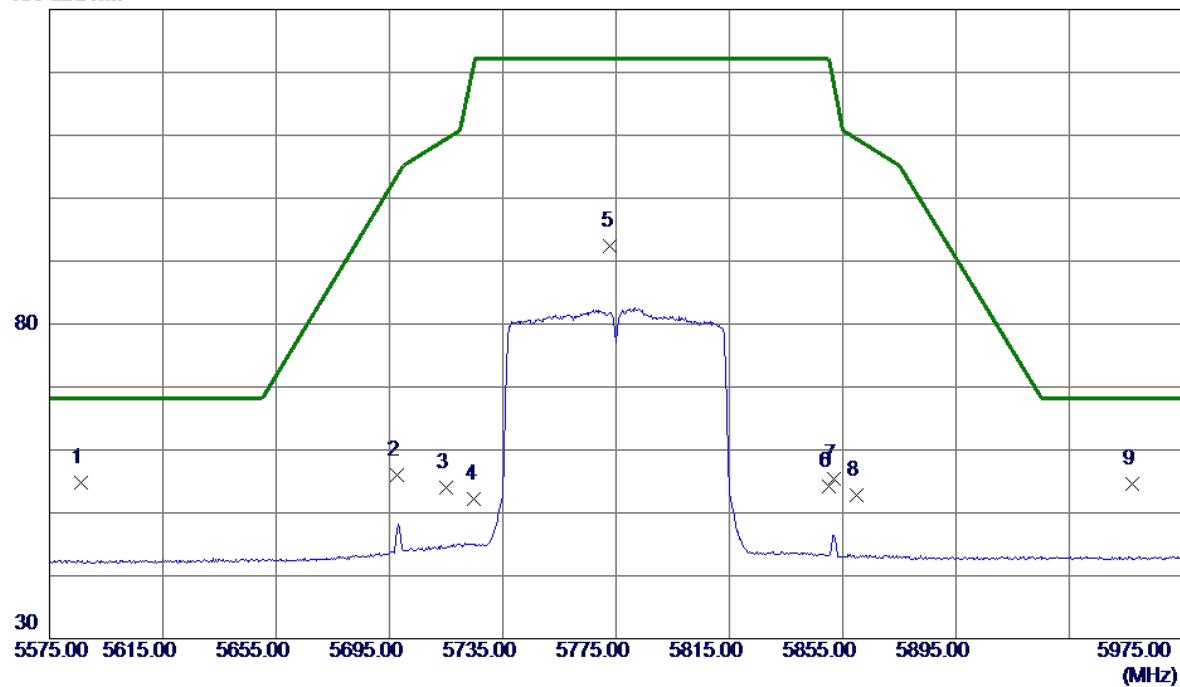


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5586.2000	40.72	14.05	54.77	68.20	-13.43	Peak	
2	5697.8000	41.66	14.28	55.94	103.57	-47.63	Peak	
3	5715.0000	39.74	14.31	54.05	109.40	-55.35	Peak	
4	5725.0000	37.87	14.33	52.20	122.20	-70.00	Peak	
5	5773.0000	77.88	14.43	92.31	122.20	-29.89	Peak	No Limit
6	5850.0000	39.71	14.58	54.29	122.20	-67.91	Peak	
7	5852.0000	40.79	14.58	55.37	117.64	-62.27	Peak	
8	5860.0000	38.17	14.60	52.77	109.40	-56.63	Peak	
9	5957.2000	39.73	14.79	54.52	68.20	-13.68	Peak	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

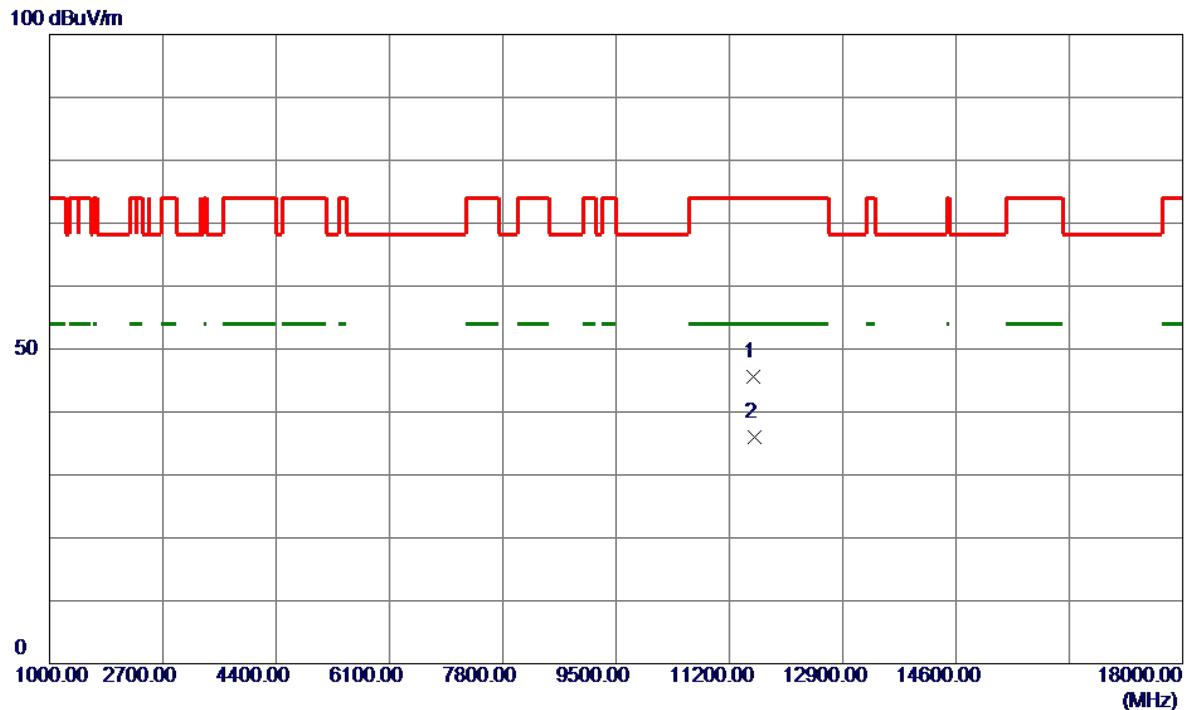


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11566.4500	34.74	10.79	45.53	74.00	-28.47	Peak	
2 *	11572.1500	25.21	10.79	36.00	54.00	-18.00	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

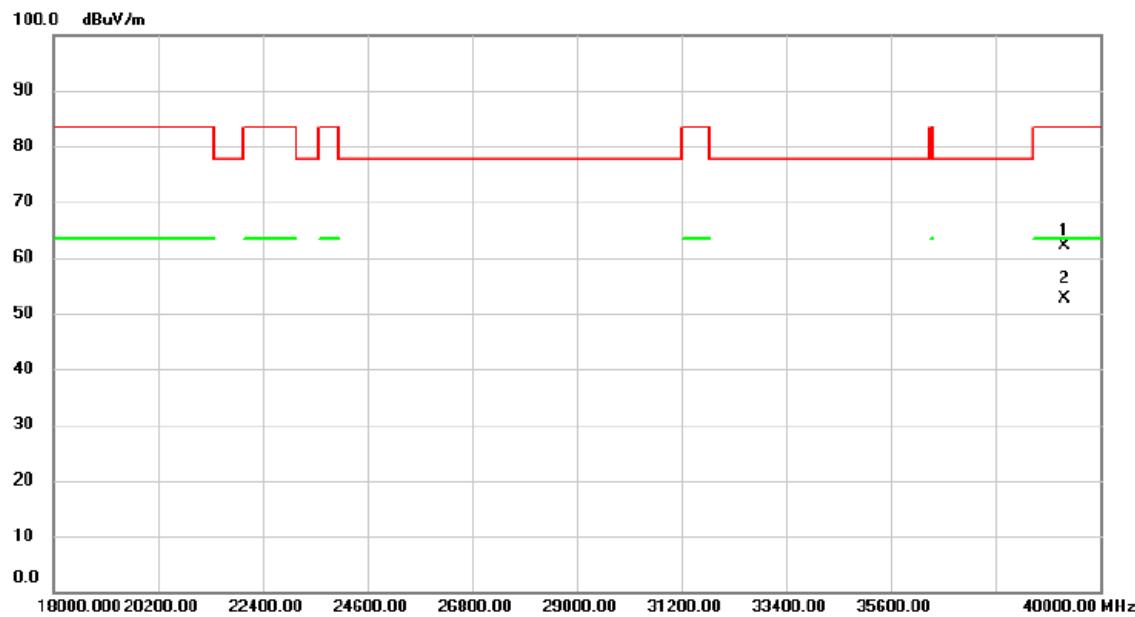


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		39241.000	50.95	11.13	62.08	83.50	-21.42	peak	
2	*	39241.000	41.47	11.13	52.60	63.50	-10.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 48 (UNII-1)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

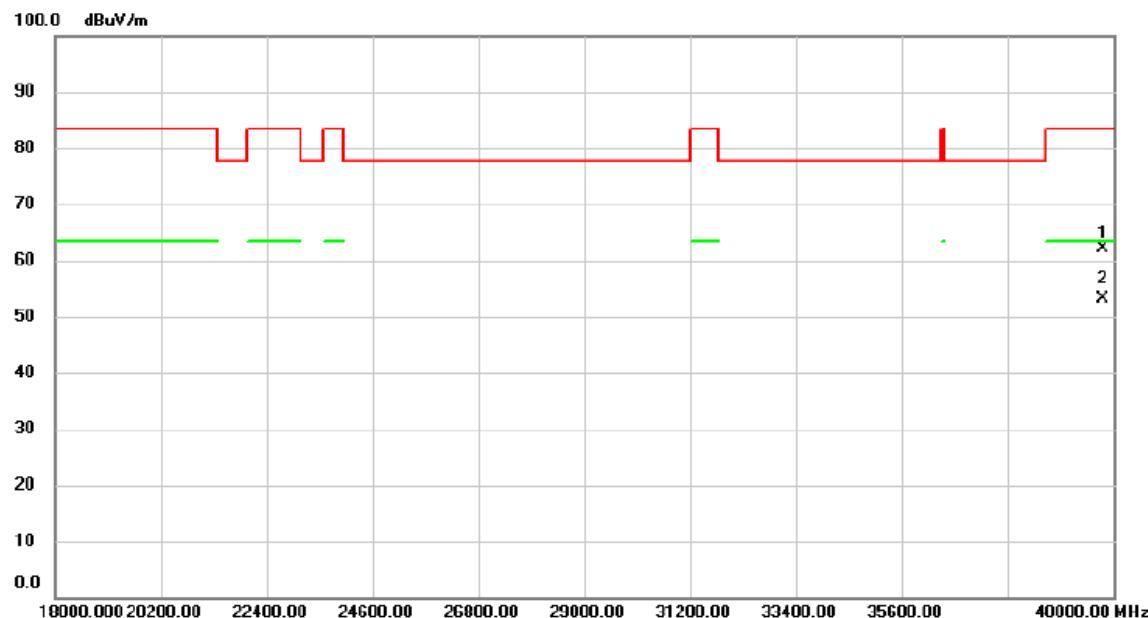

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		39791.000	51.28	10.88	62.16	83.50	-21.34	peak
2	*	39791.000	42.31	10.88	53.19	63.50	-10.31	AVG

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E - BANDWIDTH**


Test Mode UNII-1\_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.588	16.900
40	5200	23.597	16.900
48	5240	23.686	16.900

CH36

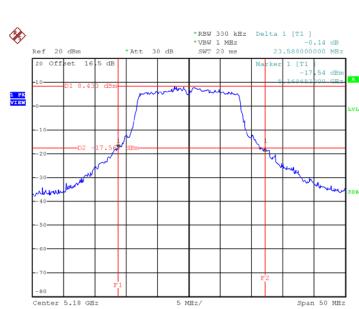


Date: 30.OCT.2024 16:27:17

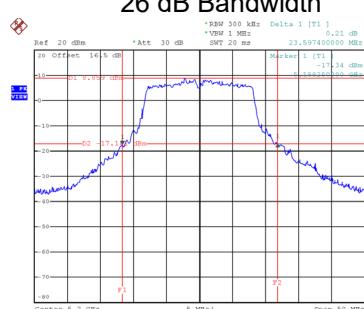CH40  
26 dB Bandwidth


Date: 30.OCT.2024 16:28:12

CH48




Date: 30.OCT.2024 16:29:00

99 % Occupied Bandwidth

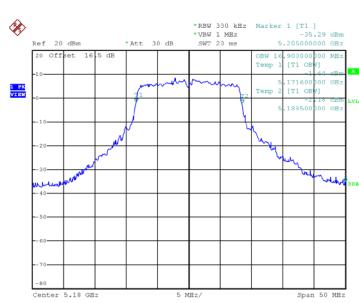

Date: 30.OCT.2024 16:26:43

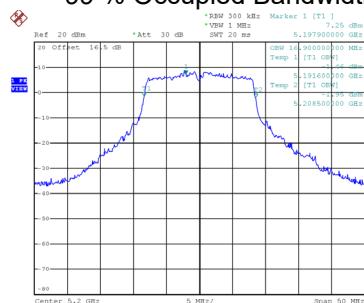

Date: 30.OCT.2024 16:27:41




Date: 30.OCT.2024 16:28:29


Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.050	18.000
40	5200	23.600	18.000
48	5240	23.690	18.000

CH36

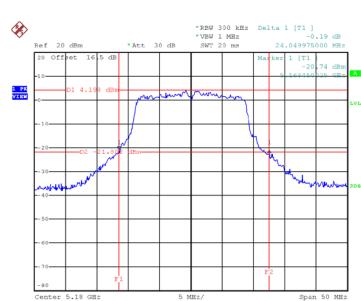


Date: 30.OCT.2024 16:39:30

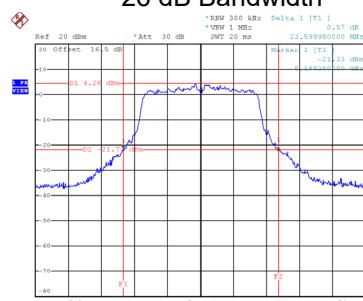CH40  
26 dB Bandwidth


Date: 30.OCT.2024 16:40:23

CH48



Date: 30.OCT.2024 16:41:13

99 % Occupied Bandwidth

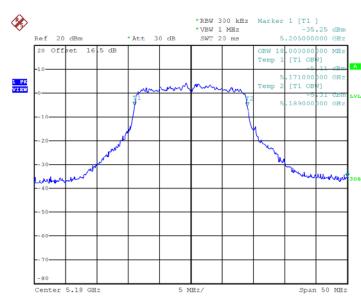

Date: 30.OCT.2024 16:39:00





Date: 30.OCT.2024 16:39:51





Date: 30.OCT.2024 16:40:41

Test Mode UNII-1\_TX AC(VHT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.188	36.600
46	5230	41.900	36.600

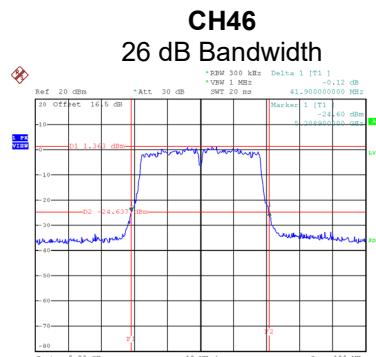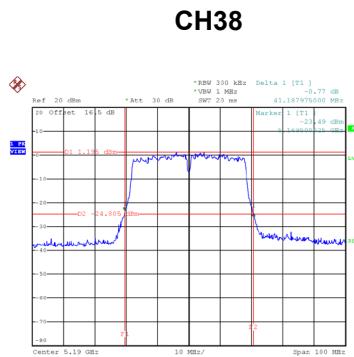


Date: 30.OCT.2024 16:55:09

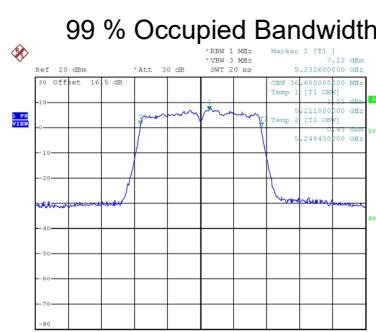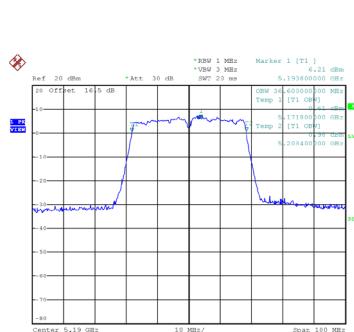


Date: 30-OCT-2024 16:54:20

Test Mode UNII-1\_TX AC(VHT80) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	87.990	76.400

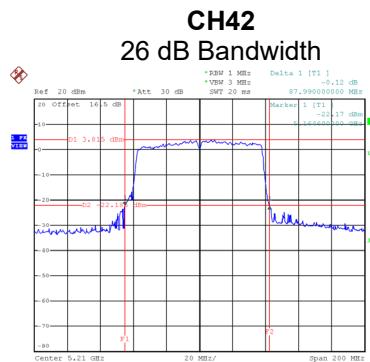

Date: 30.OCT.2024 17:07:39


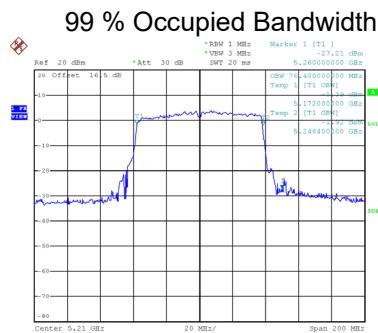


Date: 30.OCT.2024 17:06:52


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	24.290	16.800
60	5300	23.699	16.900
64	5320	24.290	16.900

CH52

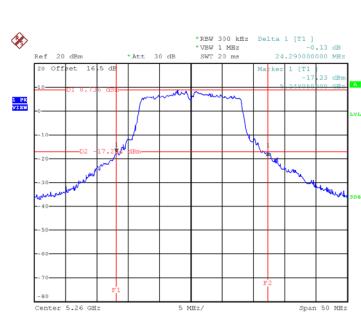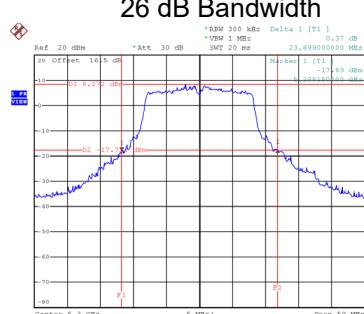CH60  
26 dB Bandwidth

CH64




Date: 30.OCT.2024 16:29:51

Date: 30.OCT.2024 16:30:41

Date: 30.OCT.2024 16:31:46

99 % Occupied Bandwidth

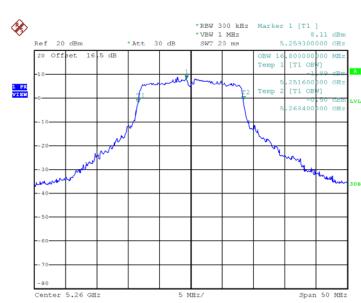

Date: 30.OCT.2024 16:29:20


Date: 30.OCT.2024 16:30:09

Date: 30.OCT.2024 16:31:16


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.589	18.000
60	5300	24.090	18.000
64	5320	24.990	18.000

CH52

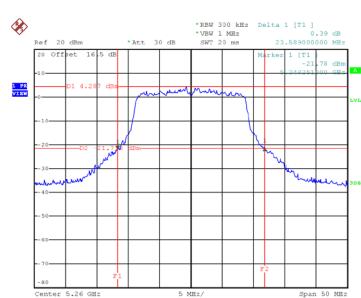


Date: 30.OCT.2024 16:43:48

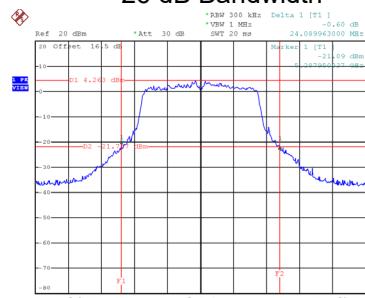CH60  
26 dB Bandwidth


Date: 30.OCT.2024 16:44:52

CH64

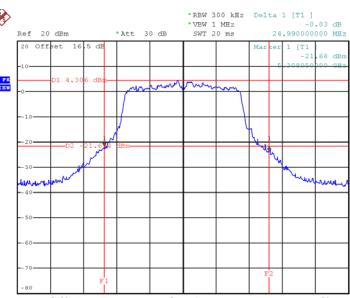


Date: 30.OCT.2024 16:45:43


99 % Occupied Bandwidth

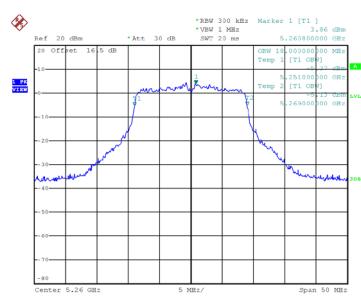

Date: 30.OCT.2024 16:41:28

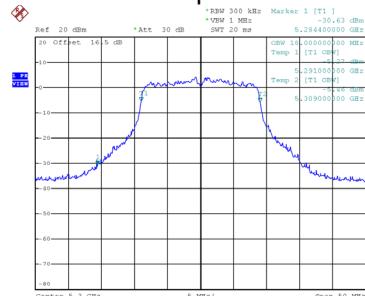

Date: 30.OCT.2024 16:44:20


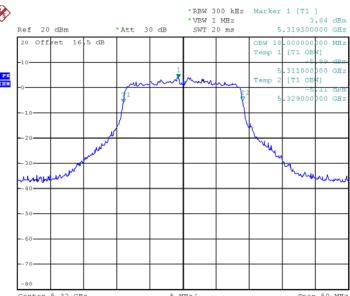


Date: 30.OCT.2024 16:45:14

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.800	36.800
62	5310	41.400	36.800



CH54

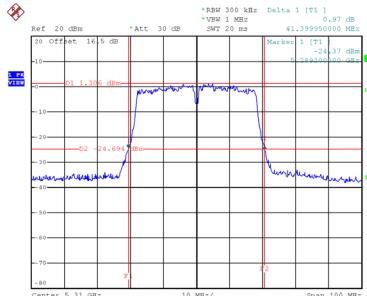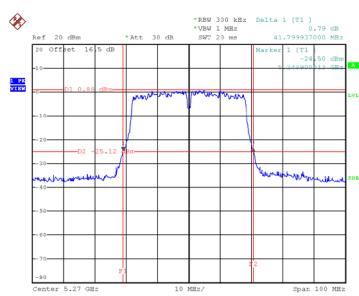CH62  
26 dB Bandwidth

Date: 30.OCT.2024 16:57:43

Date: 30.OCT.2024 16:59:12

99 % Occupied Bandwidth

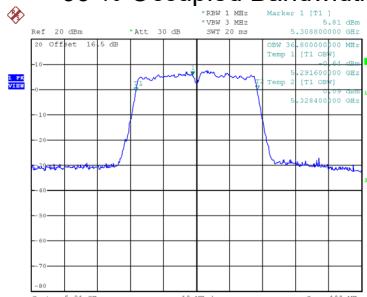
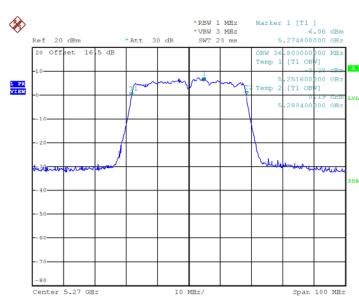


Date: 30.OCT.2024 16:56:54

Date: 30.OCT.2024 16:58:22

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	97.796	76.400

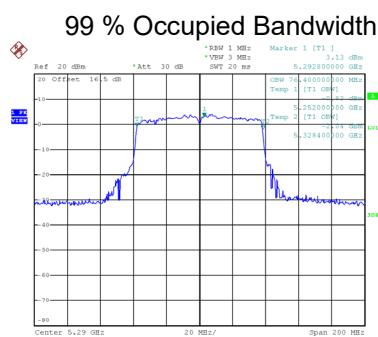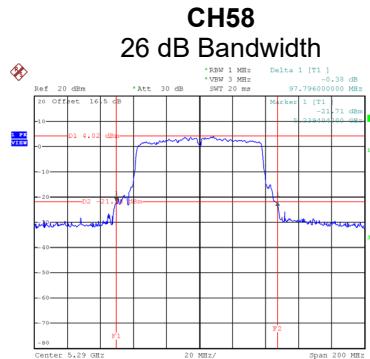


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	24.799	16.900
116	5580	24.890	17.000
140	5700	23.989	16.900

CH100

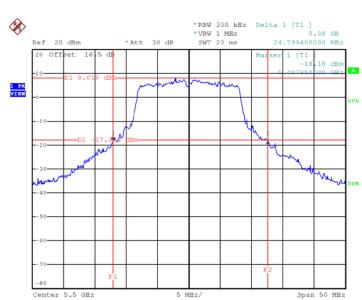


Date: 30.OCT.2024 16:32:39

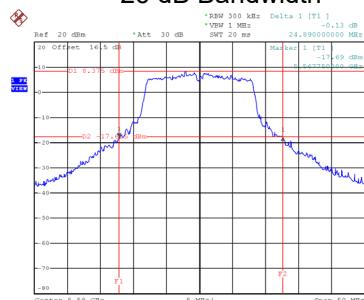CH116  
26 dB Bandwidth


Date: 30.OCT.2024 16:33:35

CH140




Date: 30.OCT.2024 16:34:35

99 % Occupied Bandwidth

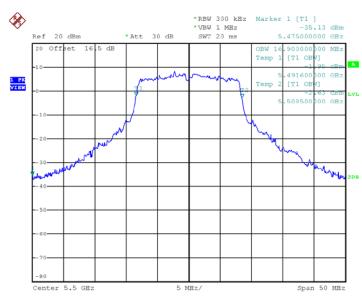

Date: 30.OCT.2024 16:32:10

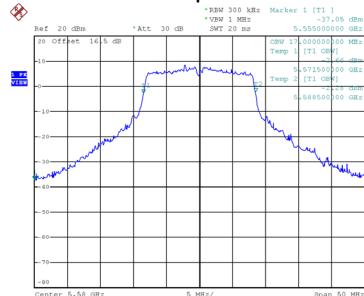




Date: 30.OCT.2024 16:33:06





Date: 30.OCT.2024 16:34:02

Test Mode UNII-2C\_TX AC(VHT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	24.690	18.000
116	5580	25.090	18.000
140	5700	24.900	18.000

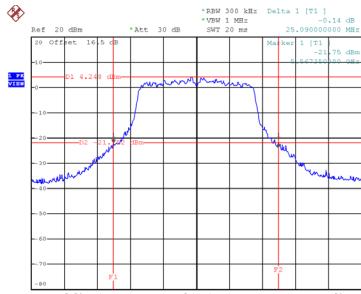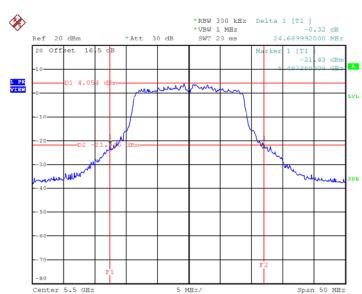

Date: 30.OCT.2024 16:46:47

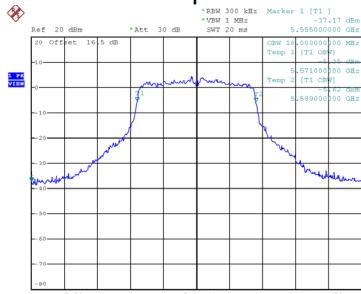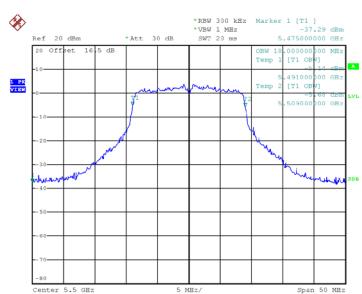


Date: 30.OCT.2024 16:46:15


Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	41.700	36.800
110	5550	41.600	36.800
134	5670	41.809	36.800

CH102

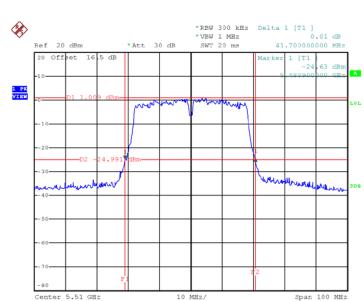


Date: 30.OCT.2024 17:00:20

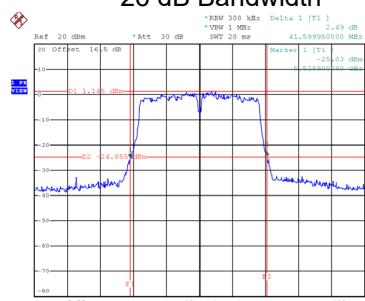CH110  
26 dB Bandwidth


Date: 30.OCT.2024 17:01:43

CH134




Date: 30.OCT.2024 17:03:11


99 % Occupied Bandwidth

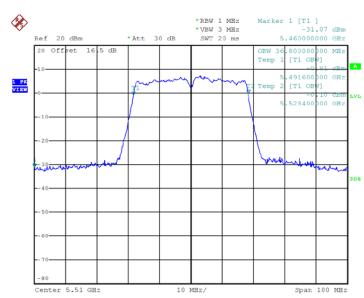

Date: 30.OCT.2024 16:59:33

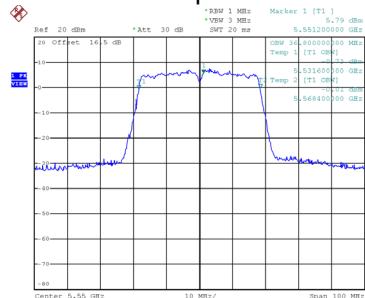

Date: 30.OCT.2024 17:00:54



Date: 30.OCT.2024 17:02:23