



Test Plots of detection time


PCS UL

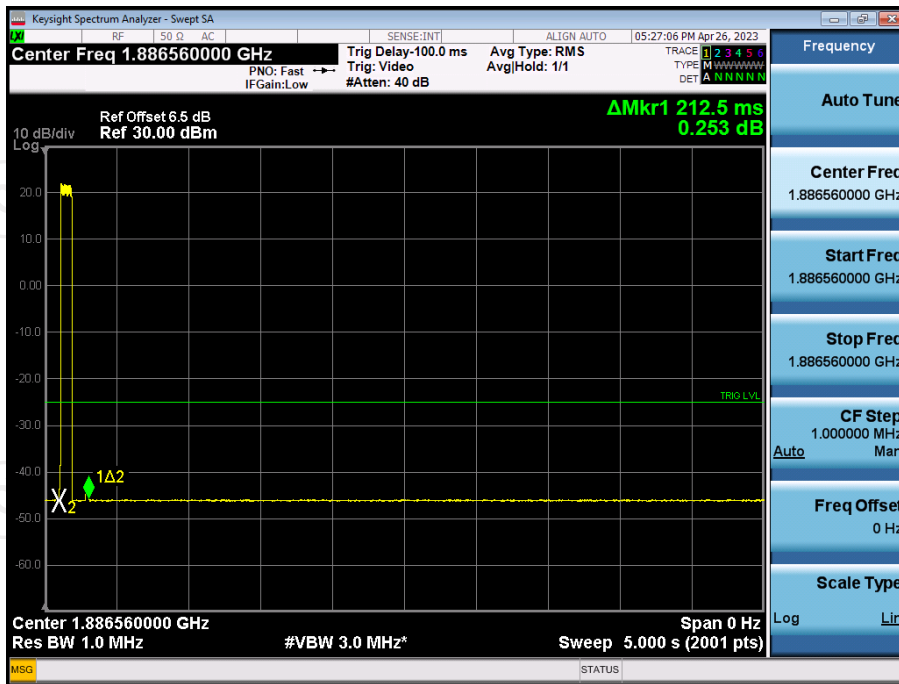


PCS DL

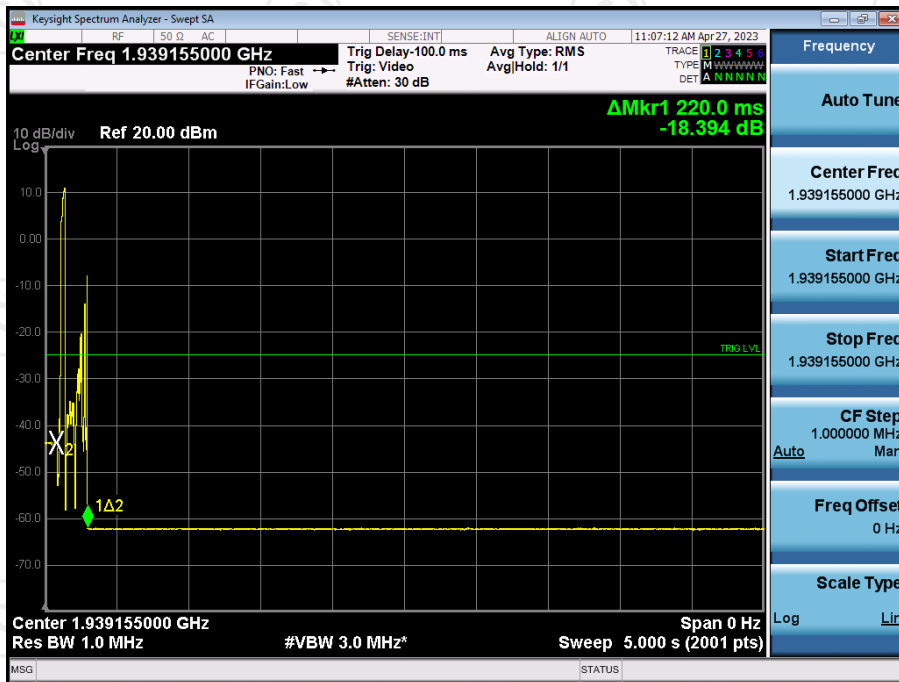


AWS-1 UL

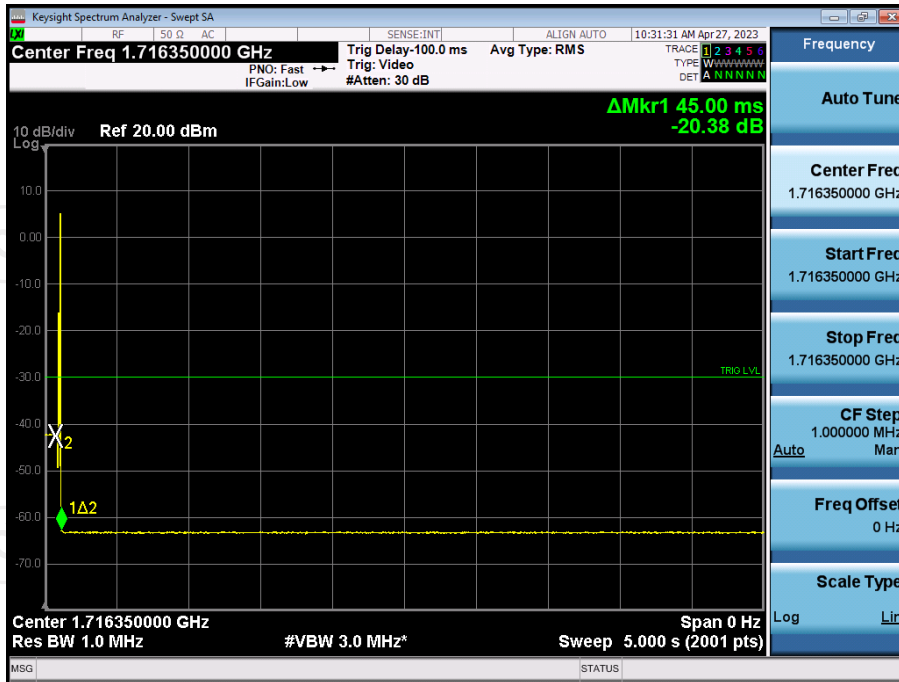


AWS-1 DL

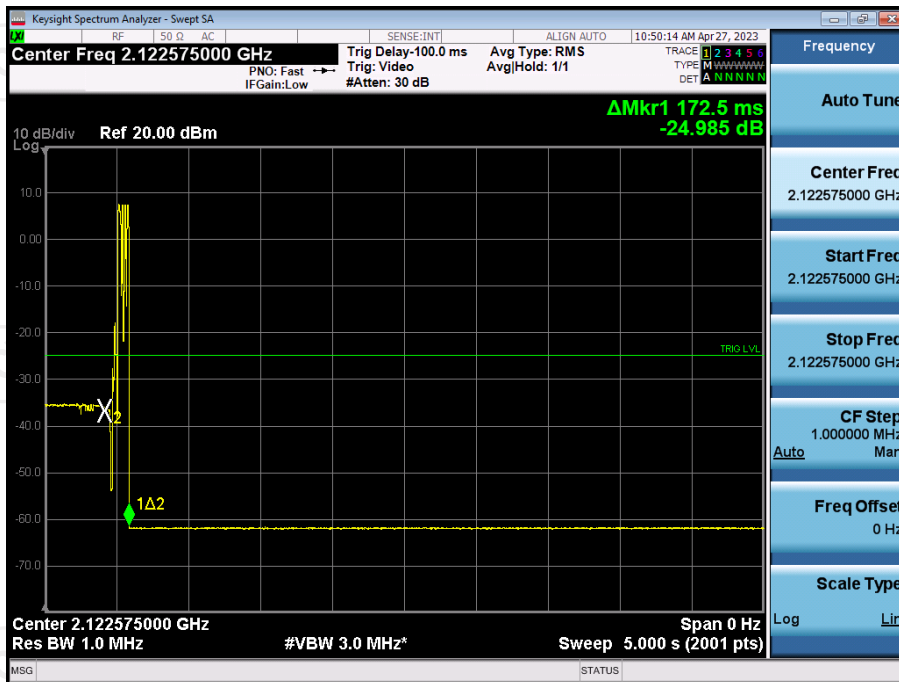


Cellular UL

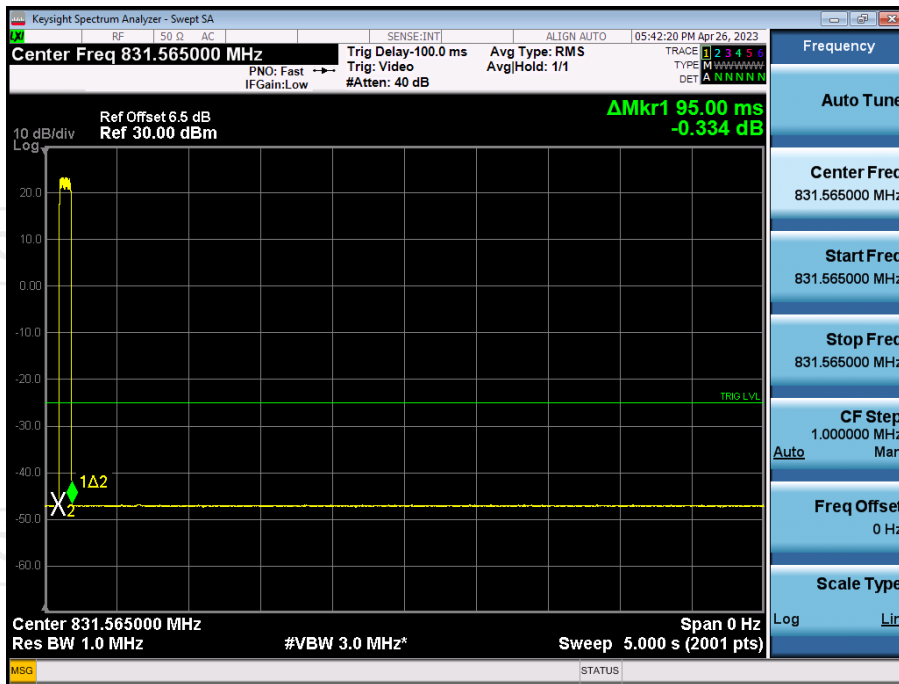


Cellular DL

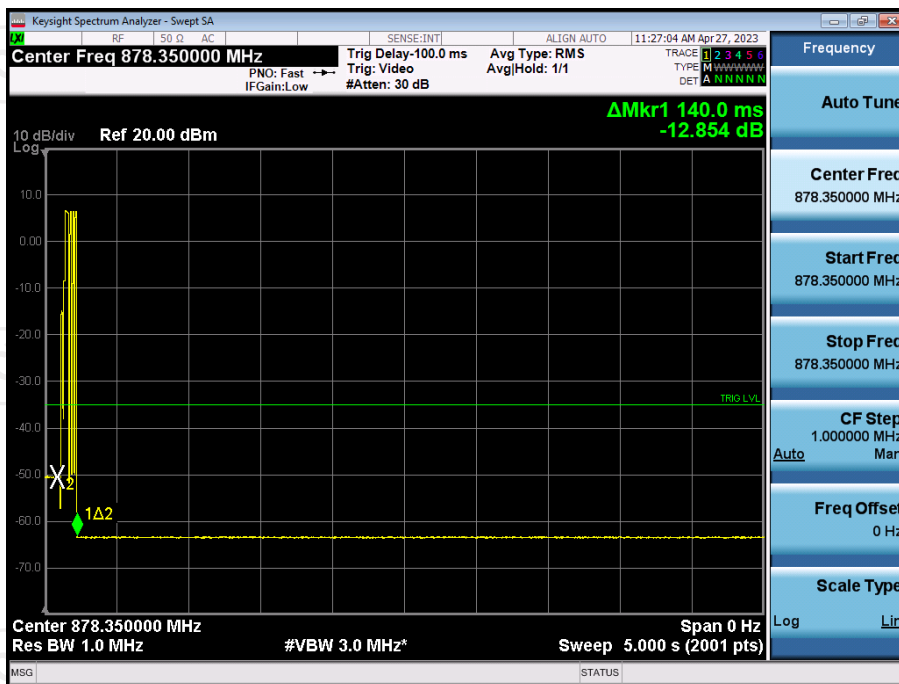


Lower700MHz UL

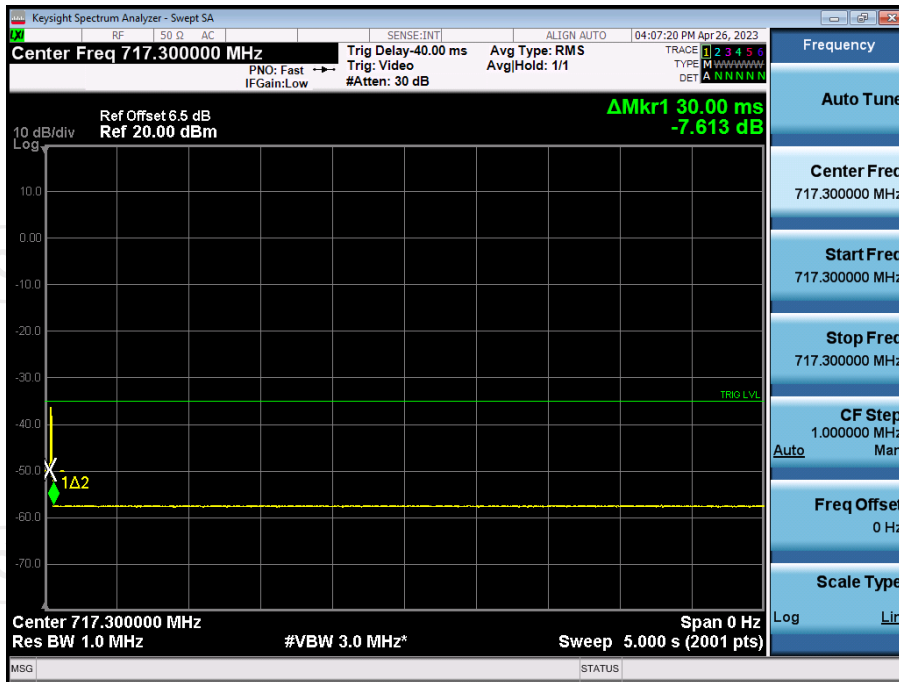


Lower700MHz DL

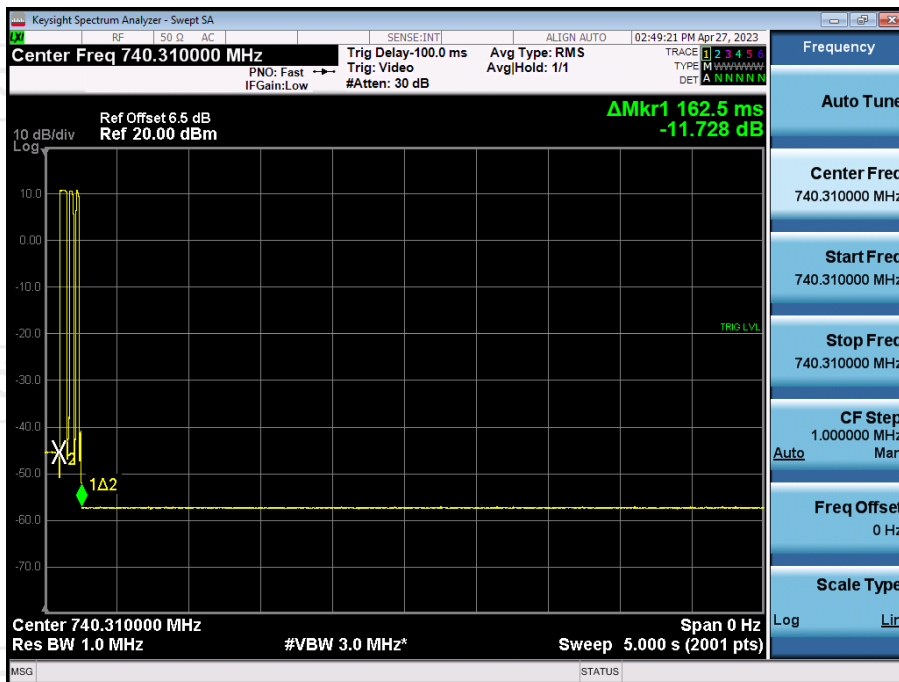

Upper700MHz UL

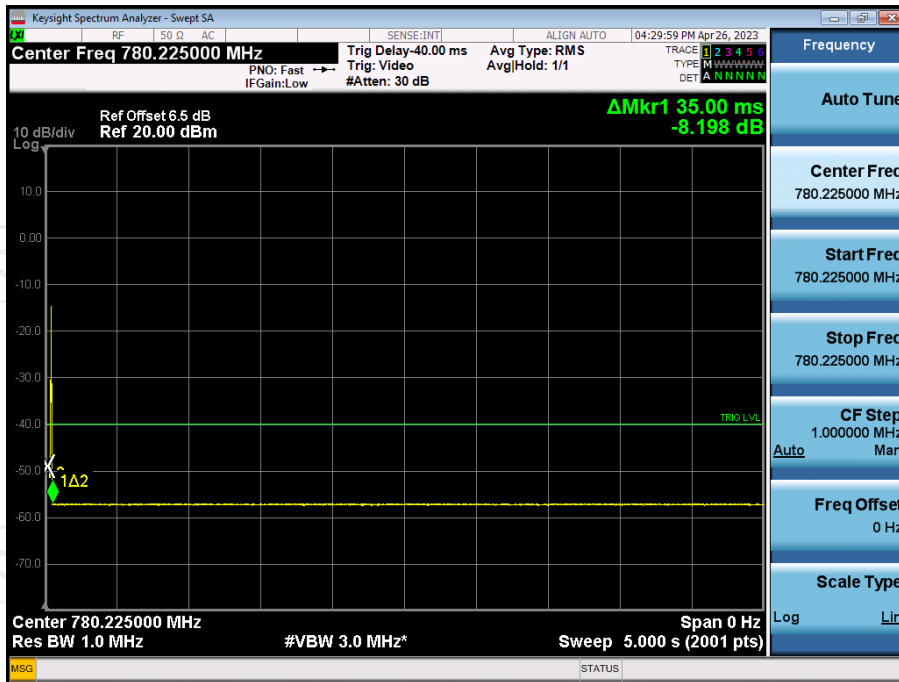


Upper700MHz DL

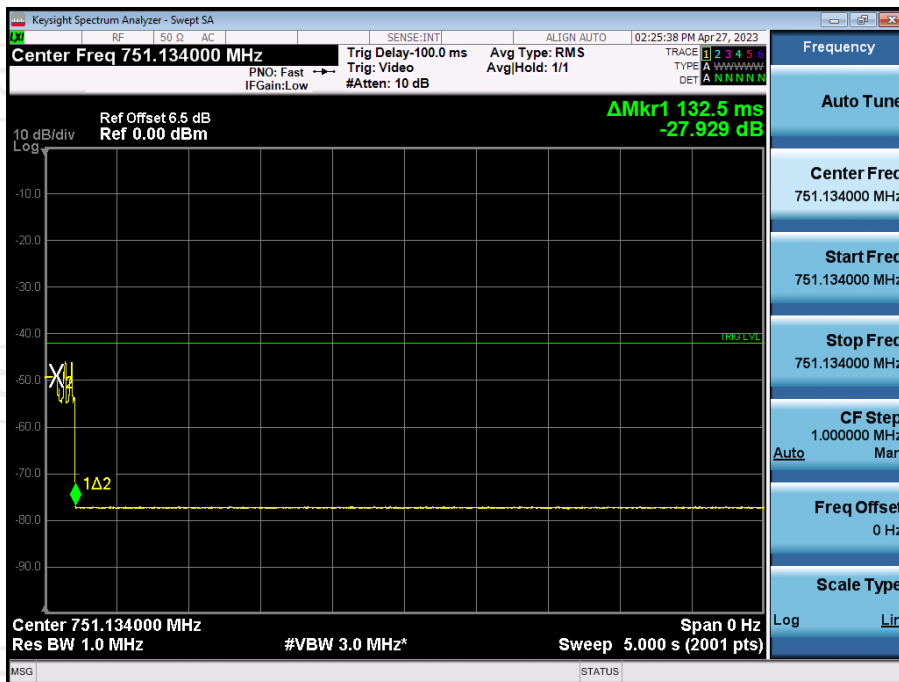


Test Plots of restarting time


PCS UL

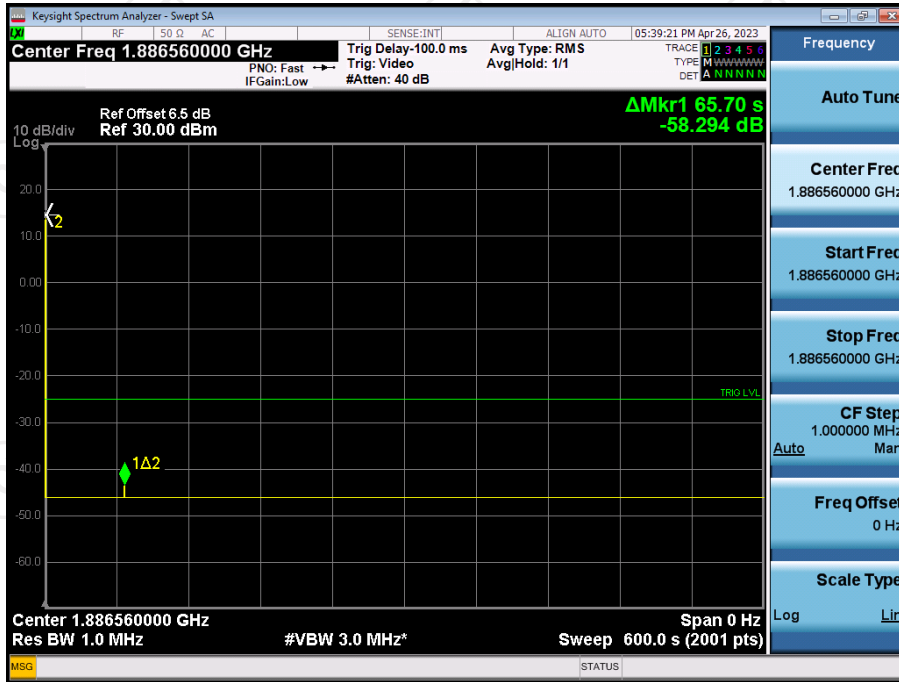


PCS DL

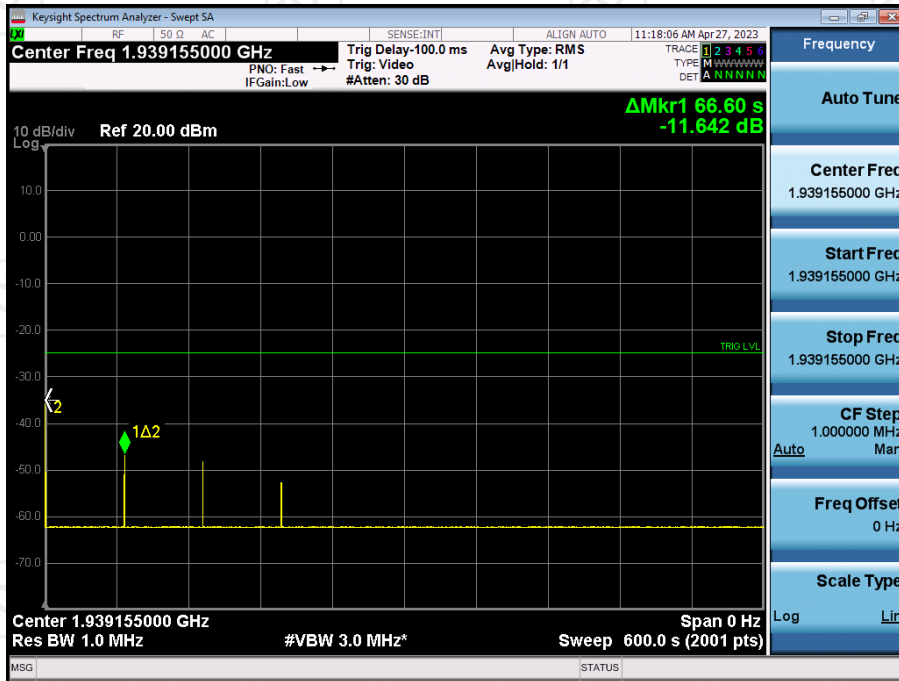


AWS-1 UL

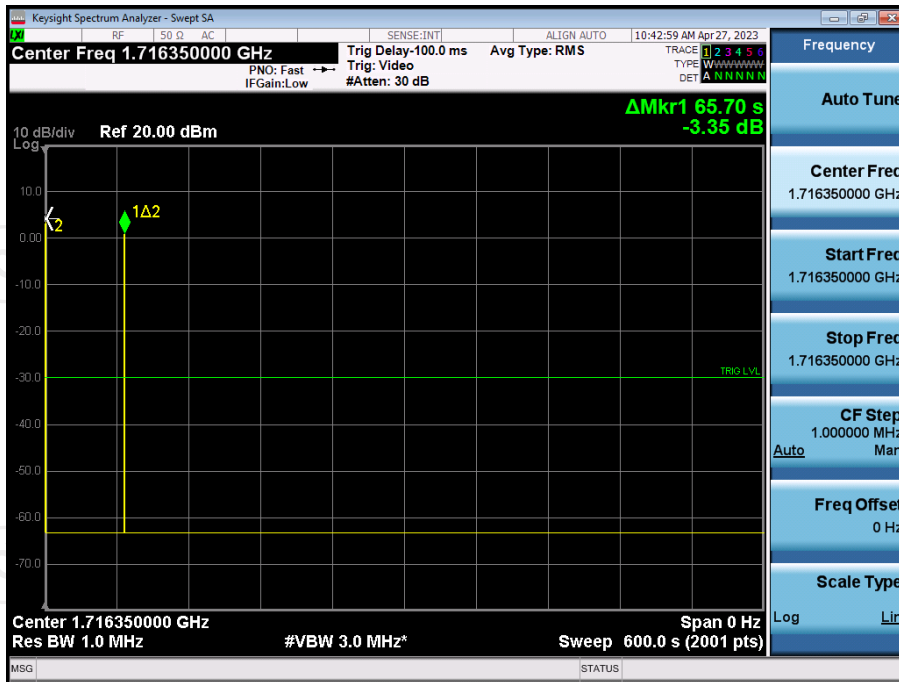


AWS-1 DL

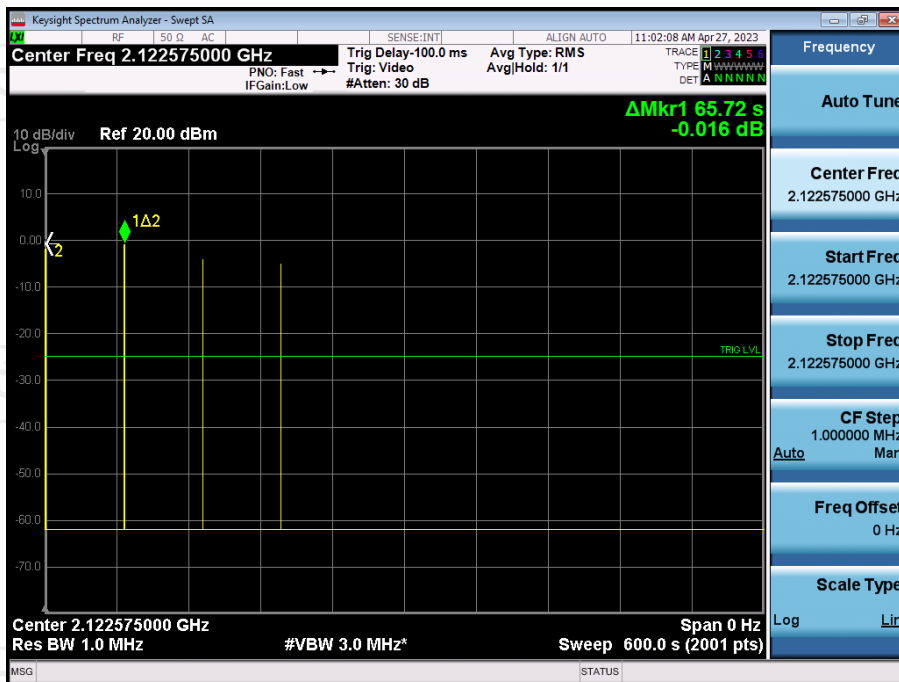


Cellular UL

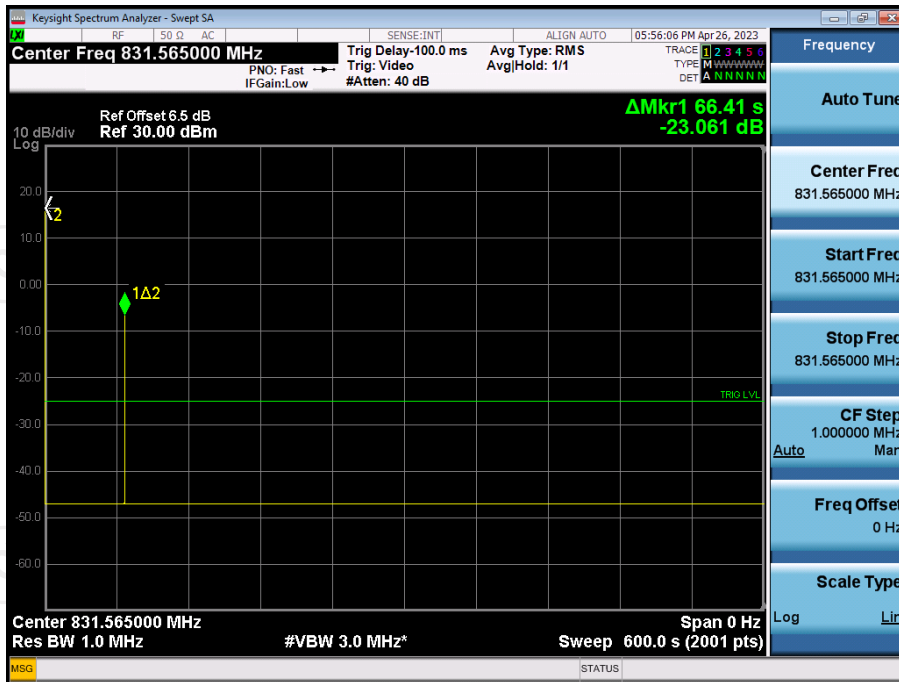


Cellular DL

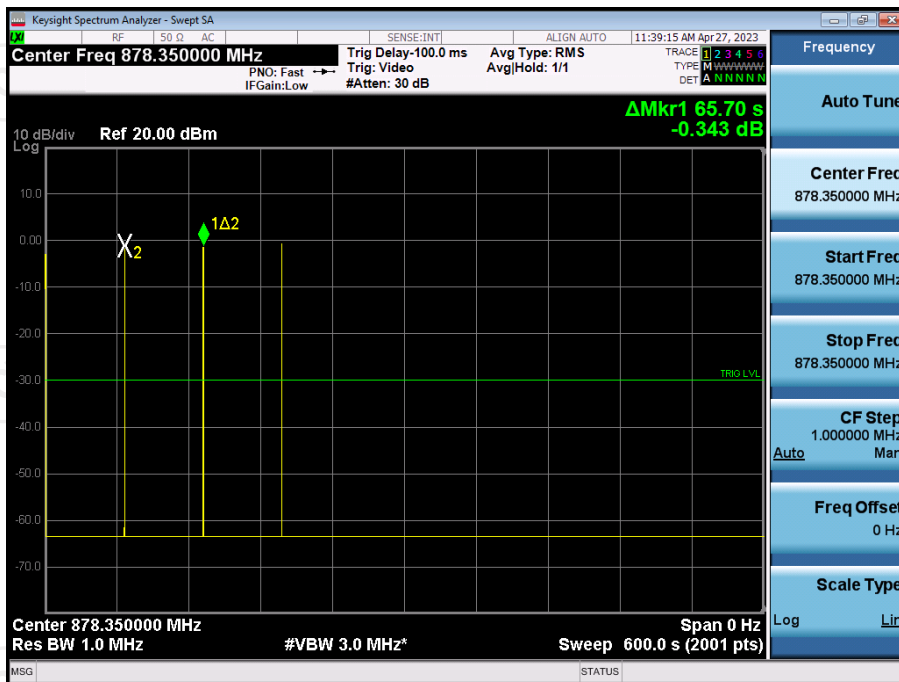


Lower700MHz UL

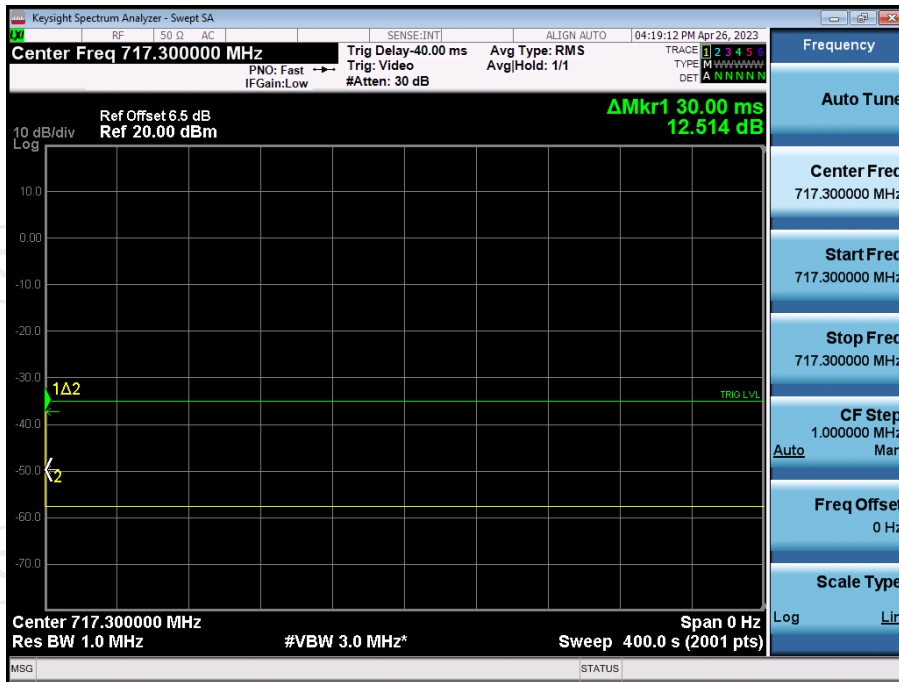

Lower700MHz DL

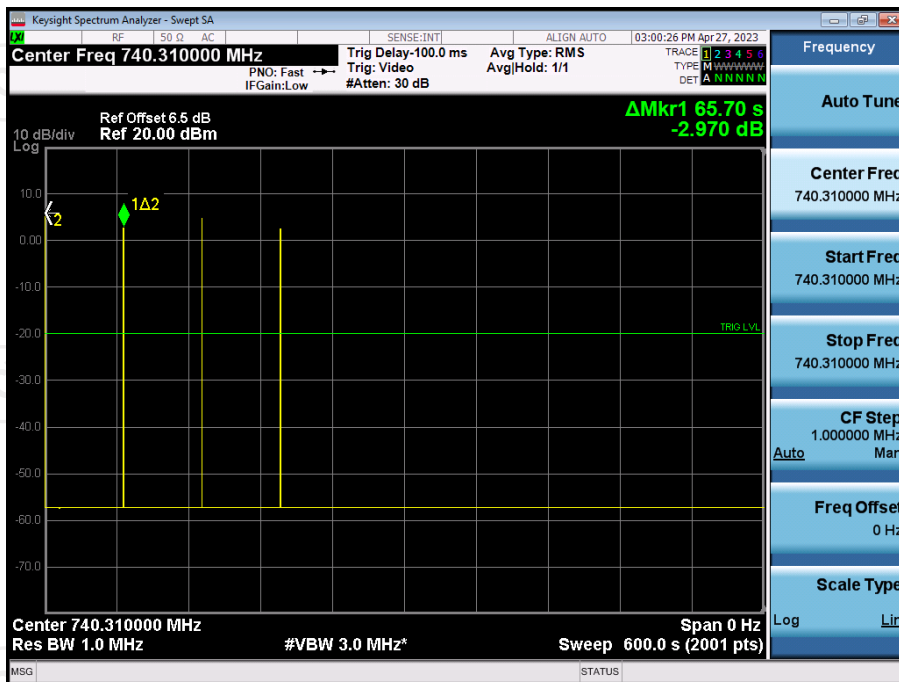

Upper700MHz UL

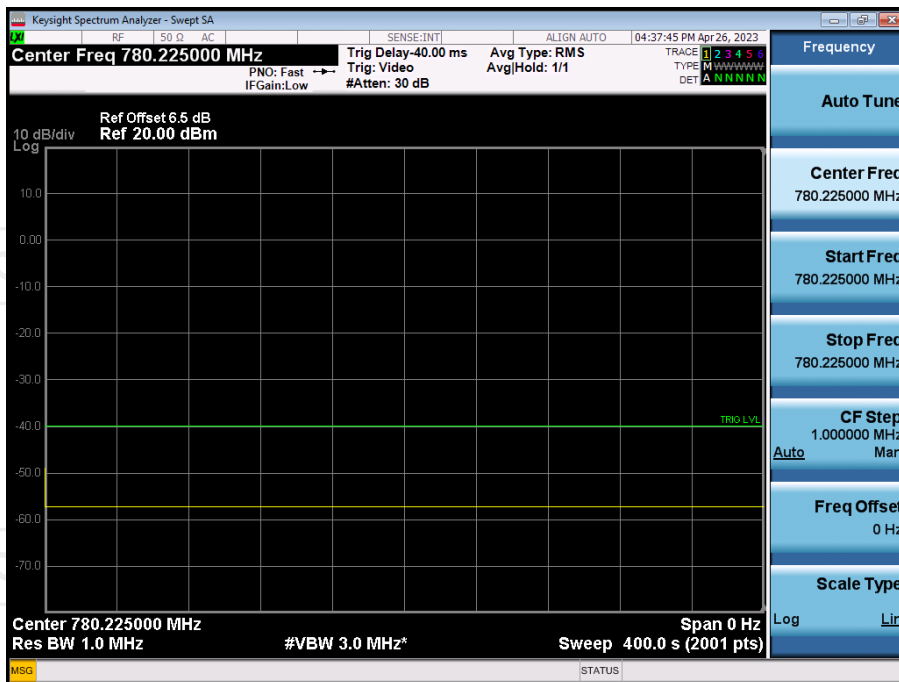

Upper700MHz DL



Test results of Mitigation or Shutdown

PCS	Uplink(1850-1915MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1889.95	-51.07	1893.82	-62.82	11.75	<12	148	300	Pass
+4	1889.95	-49.52	1893.82	-63.37	13.85	<12	145	300	Pass
+3	1889.95	-47.98	1893.82	-63.5	15.52	<12	147	300	Pass
+2	1889.95	-45.32	1893.82	-63.94	18.62	<12	144	300	Pass
+1	1889.95	-40.37	1893.82	-64.16	23.79	<12	141	300	Pass
0	1889.95	-20.78	1893.82	-65.08	44.30	<12	143	300	Pass
-1	EUT Shutdown								

PCS	Downlink(1930-1995MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1969.87	-57.61	1975.42	-66.60	8.99	<12	144	300	Pass
+4	1969.87	-57.60	1975.42	-67.36	9.76	<12	142	300	Pass
+3	1969.87	-56.52	1975.42	-67.02	10.50	<12	140	300	Pass
+2	1969.87	-55.82	1975.42	-67.72	11.90	<12	145	300	Pass
+1	1969.87	-54.55	1975.42	-67.74	13.19	<12	143	300	Pass
0	1969.87	-52.87	1975.42	-68.08	15.21	<12	146	300	Pass
-1	1969.87	-49.34	1975.42	-68.90	19.56	<12	148	300	Pass
-2	1969.87	-42.48	1975.42	-68.77	26.29	<12	147	300	Pass
-3	1969.87	-26.10	1975.42	-69.70	43.60	<12	145	300	Pass
-4	EUT Shutdown								

AWS-1		Uplink(1710-1755MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1723.92	-53.77	1729.40	-63.96	10.19	<12	149	300	Pass
+4	1723.92	-53.38	1729.40	-64.38	11.00	<12	141	300	Pass
+3	1723.92	-52.14	1729.40	-63.95	11.81	<12	143	300	Pass
+2	1723.92	-50.22	1729.40	-64.83	14.61	<12	145	300	Pass
+1	1723.92	-48.10	1729.40	-65.08	16.98	<12	147	300	Pass
0	1723.92	-45.52	1729.40	-65.28	19.76	<12	144	300	Pass
-1	1723.92	-40.04	1729.40	-65.77	25.73	<12	142	300	Pass
-2	1723.92	-3.97	1729.40	-66.04	62.07	<12	146	300	Pass
-3	EUT Shutdown								

AWS-1		Downlink(2110-2155MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	2137.30	-58.85	2144.64	-69.01	10.16	<12	146	300	Pass
+4	2137.30	-58.01	2144.64	-68.88	10.87	<12	140	300	Pass
+3	2137.30	-57.35	2144.64	-69.93	12.58	<12	142	300	Pass
+2	2137.30	-56.17	2144.64	-70.09	13.92	<12	145	300	Pass
+1	2137.30	-54.04	2144.64	-70.55	16.51	<12	143	300	Pass
0	2137.30	-50.88	2144.64	-70.00	19.12	<12	149	300	Pass
-1	2137.30	-42.93	2144.64	-71.48	28.55	<12	147	300	Pass
-2	2137.30	-7.80	2144.64	-71.52	63.72	<12	146	300	Pass
-3	EUT Shutdown								

Cellular	Uplink(824-849MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	833.78	-63.44	836.53	-70.09	6.65	<12	144	300	Pass
+4	833.78	-63.17	836.53	-70.31	7.14	<12	148	300	Pass
+3	833.78	-63.05	836.53	-70.75	7.70	<12	140	300	Pass
+2	833.78	-62.32	836.53	-71.01	8.69	<12	143	300	Pass
+1	833.78	-62.00	836.53	-71.55	9.55	<12	145	300	Pass
0	833.78	-61.14	836.53	-71.15	10.01	<12	142	300	Pass
-1	EUT Shutdown								

Cellular	Downlink(869-894MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	880.26	-60.63	881.76	-70.23	9.60	<12	143	300	Pass
+4	880.26	-59.64	881.76	-70.49	10.85	<12	140	300	Pass
+3	880.26	-57.76	881.76	-70.77	13.01	<12	148	300	Pass
+2	880.26	-56.64	881.76	-70.85	14.21	<12	144	300	Pass
+1	880.26	-53.85	881.76	-71.81	17.96	<12	146	300	Pass
0	880.26	-48.21	881.76	-71.99	23.78	<12	141	300	Pass
-1	EUT Shutdown								

Lower700M Hz	Uplink(698-716MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	705.98	-64.34	707.71	-69.35	5.01	<12	144	300	Pass
+4	705.98	-64.09	707.71	-69.21	5.12	<12	146	300	Pass
+3	705.98	-63.86	707.71	-69.82	5.96	<12	149	300	Pass
+2	705.98	-63.66	707.71	-70.05	6.39	<12	147	300	Pass
+1	705.98	-62.94	707.71	-70.18	7.24	<12	145	300	Pass
0	EUT Shutdown								


Lower700M Hz	Downlink(728-746MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	740.82	-60.38	742.50	-69.95	9.57	<12	145	300	Pass
+4	740.82	-59.95	742.50	-70.78	10.83	<12	140	300	Pass
+3	740.82	-57.50	742.50	-71.28	13.78	<12	148	300	Pass
+2	740.82	-56.29	742.50	-71.08	14.79	<12	142	300	Pass
+1	740.82	-53.77	742.50	-71.68	17.91	<12	141	300	Pass
0	740.82	-49.54	742.50	-71.80	22.26	<12	146	300	Pass
-1	740.82	-12.15	742.50	-73.29	61.14	<12	143	300	Pass
-2	EUT Shutdown								

Upper700M Hz		Uplink(776-787MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	777.68	-64.47	779.38	-69.66	5.19	<12	143	300	Pass
+4	777.68	-64.39	779.38	-69.86	5.47	<12	145	300	Pass
+3	777.68	-64.28	779.38	-70.18	5.90	<12	147	300	Pass
+2	777.68	-63.58	779.38	-70.75	7.17	<12	144	300	Pass
+1	777.68	-62.78	779.38	-70.45	7.67	<12	142	300	Pass
0	777.68	-62.24	779.38	-69.97	7.73	<12	146	300	Pass
-1	EUT Shutdown								

Upper700M Hz		Downlink(746-757MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	748.15	-62.91	749.99	-71.19	8.28	<12	141	300	Pass
+4	748.15	-62.60	749.99	-71.37	8.77	<12	145	300	Pass
+3	748.15	-61.86	749.99	-71.82	9.96	<12	142	300	Pass
+2	748.15	-61.39	749.99	-71.56	10.17	<12	146	300	Pass
+1	748.15	-60.94	749.99	-72.21	11.27	<12	143	300	Pass
0	748.15	-60.62	749.99	-71.98	11.36	<12	149	300	Pass
-1	748.15	-59.58	749.99	-71.85	12.27	<12	147	300	Pass
-2	748.15	-57.43	749.99	-72.52	15.09	<12	148	300	Pass
-3	748.15	-52.82	749.99	-73.61	20.79	<12	144	300	Pass
-4	EUT Shutdown								

6. Radiation Spurious Emission

6.1.1. Test Specification

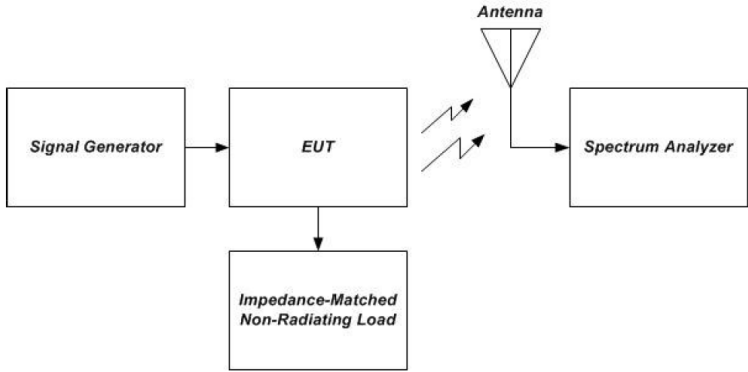Test Requirement:	FCC Part2 Section 2.1053
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-13dBm; For equipment operating in the frequency bands 746-757 MHz and 776-787 MHz, The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.
Test setup:	 <p style="text-align: center;">Figure 10 – Radiated spurious emissions test and instrumentation setup</p>
Test Procedure:	<ol style="list-style-type: none"> a) Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. b) Connect the EUT to the test equipment as shown in Figure 10 beginning with the uplink output (donor) port. c) Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test, and the power level set at PIN as determined from measurement results per 7.2. d) Measure the radiated spurious emissions from the EUT from the lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by using the procedures described in ANSI C63.4. e) Capture the peak emissions Test Plots using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer Test Plots. f) Repeat 7.12c) through 7.12e) for all uplink and downlink operational bands.

Test results:

PASS

6.1.2. Test Instruments

Radiated Emission				
Name	Model No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESIB7	R&S	Jul. 04, 2022	Jul. 03, 2023
Spectrum Analyzer	FSQ40	R&S	Jul. 04, 2022	Jul. 03, 2023
Pre-amplifier	8447D	HP	Jul. 04, 2022	Jul. 03, 2023
Pre-amplifier	LNPA_0118G-45	SKET	Feb. 21, 2023	Feb. 20, 2024
Pre-amplifier	LNPA_1840G-50	SKET	Feb. 21, 2023	Feb. 20, 2024
Broadband Antenna	VULB9163	Schwarzbeck	Jul. 06, 2022	Jul. 05, 2023
Horn Antenna	BBHA 9120D	Schwarzbeck	Jul. 06, 2022	Jul. 05, 2023
Horn Antenna	BBHA 9170	Schwarzbeck	Feb. 25, 2023	Feb. 24, 2024
Coaxial cable	RC-18G-N-M	SKET	Feb. 25, 2022	Feb. 24, 2024
Coaxial cable	RC_40G-K-M	SKET	Feb. 25, 2022	Feb. 24, 2024
Loop antenna	FMZB1519B	Schwarzbeck	Jun. 12, 2022	Jun. 11, 2023
Signal Generator	N5182A	Agilent	Jul. 04, 2022	Jul. 03, 2023

6.1.3. Test data

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
PCS Uplink						
1152.15	H	-43.67	-7.11	-50.78	-13.00	-37.78
1882.30	V	-36.08	-5.66	-41.74		-28.74
11032.55	H	-59.75	16.08	-43.67		-30.67
11653.90	V	-61.51	14.93	-46.58		-33.58
PCS Downlink						
1152.15	H	-43.50	-7.11	-50.61	-13.00	-37.61
1151.30	V	-48.12	-6.63	-54.75		-41.75
14128.25	H	-59.89	17.52	-42.37		-29.37
13910.65	V	-61.35	18.73	-42.62		-29.62

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
AWS-1 Uplink						
1151.30	H	-44.57	-7.11	-51.68	-13.00	-38.68
1152.15	V	-46.25	-6.62	-52.87		-39.87
13990.550	H	-61.11	17.87	-43.24		-30.24
13950.600	V	-60.97	18.94	-42.03		-29.03
AWS-1 Downlink						
1151.30	H	-42.90	-7.11	-50.01	-13.00	-37.01
1151.30	V	-48.14	-6.63	-54.77		-41.77
10488.55	H	-60.40	15.24	-45.16		-32.16
9275.60	V	-61.03	14.57	-46.46		-33.46

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Cellular Uplink						
1152.00	H	-43.72	-7.11	-50.83	-13.00	-37.83
1152.00	V	-44.61	-6.62	-51.23		-38.23
7927.60	H	-59.50	11.06	-48.44		-35.44
7098.40	V	-60.64	10.31	-50.33		-37.33
Cellular Downlink						
1152.00	H	-43.16	-7.11	-50.27	-13.00	-37.27
1152.00	V	-48.68	-6.62	-55.30		-42.30
7146.80	H	-60.33	10.09	-50.24		-37.24
6392.40	V	-60.25	8.26	-51.99		-38.99

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Lower700MHz Uplink						
1152.00	H	-51.62	-7.11	-58.73	-13.00	-45.73
1152.00	V	-46.53	-6.62	-53.15		-40.15
6805.20	H	-61.16	9.43	-51.73		-38.73
3532.40	V	-48.78	-0.23	-49.01		-36.01
Lower700MHz Downlink						
1151.90	H	-43.92	-7.11	-51.03	-13.00	-38.03
1124.95	V	-52.24	-6.76	-59.00		-46.00
6443.90	H	-58.64	8.35	-50.29		-37.29
7146.35	V	-60.33	10.32	-50.01		-37.01



Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Upper700MHz Uplink						
1152.00	H	-43.66	-7.11	-50.77	-13.00	-37.77
1152.00	V	-45.59	-6.62	-52.21		-39.21
7185.20	H	-60.34	10.08	-50.26		-37.26
6430.40	V	-59.50	8.23	-51.27		-38.27
1601.25	H	-61.96	-0.36	-62.32	-40.00	-22.32
1604.38	V	-65.65	2.92	-62.73		-22.73
Upper700MHz Downlink						
1151.90	H	-43.95	-7.11	-51.06	-13.00	-38.06
1151.90	V	-48.11	-6.63	-54.74		-41.74
6413.10	H	-58.75	8.37	-50.38		-37.38
7113.10	V	-59.93	10.32	-49.61		-36.61
1606.61	H	-61.44	-0.38	-61.82	-40.00	-21.82
1602.54	V	-65.08	2.94	-62.14		-22.14

Note: The Inside port can be divided into internal antennas and external antennas, but both antennas cannot work simultaneously and have undergone pre testing. The worst mode is reflected in the report.

Appendix A: Photographs of Test Setup



Product: Cell Signal Booster



Model: SF005A

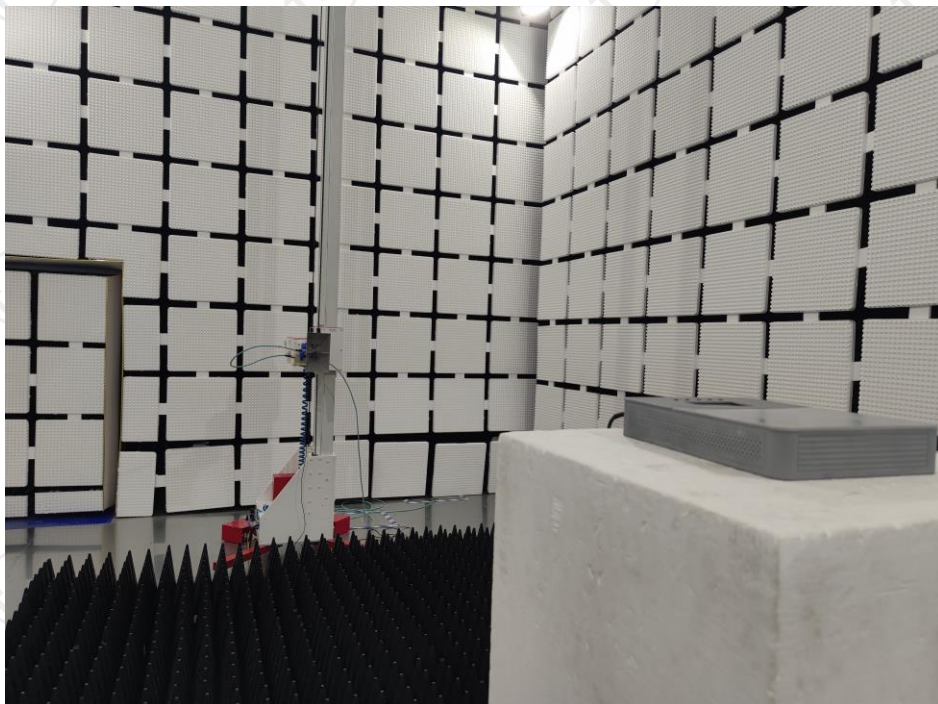
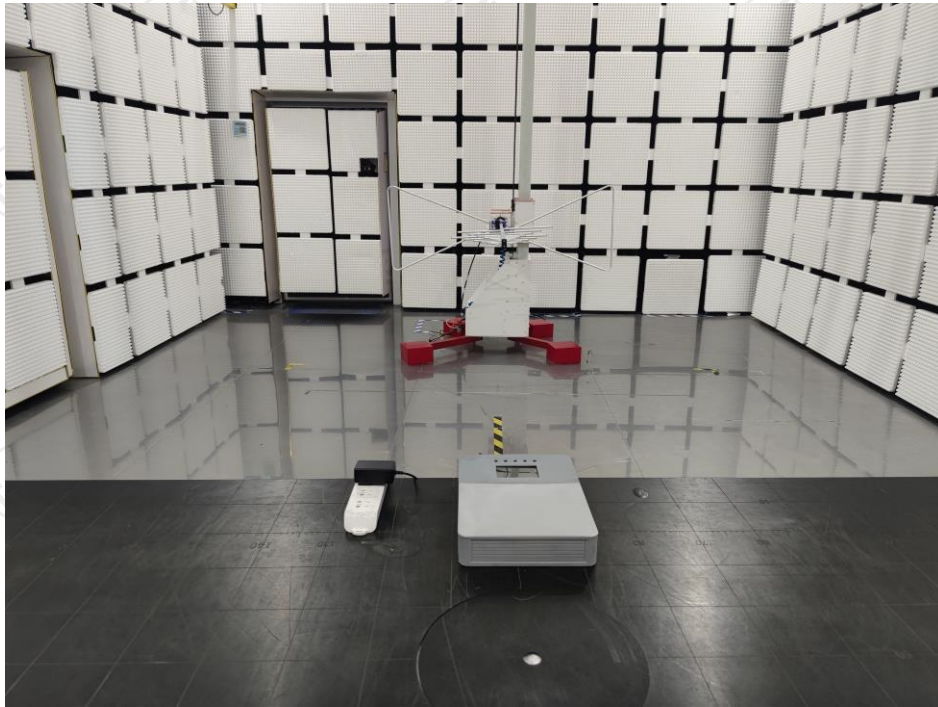






Appendix B: Photographs of EUT
Product: Cell Signal Booster
Model: SF005A
External Photos

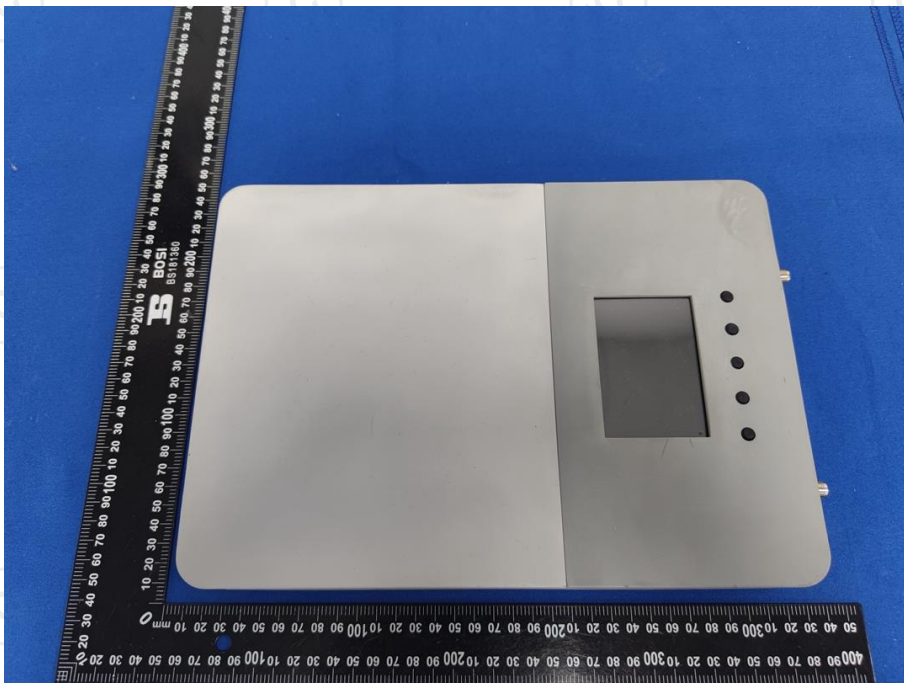
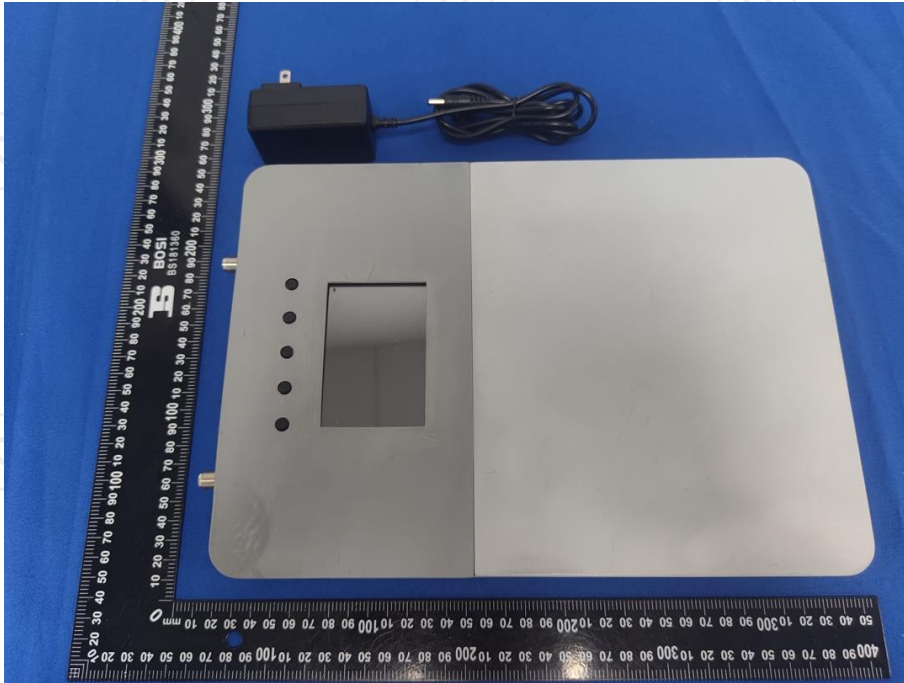


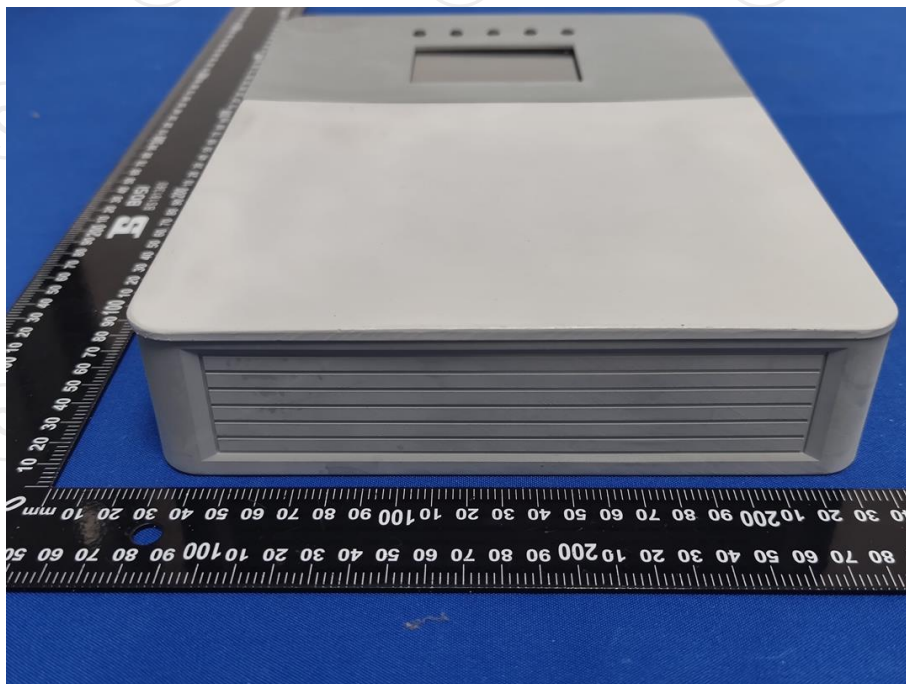
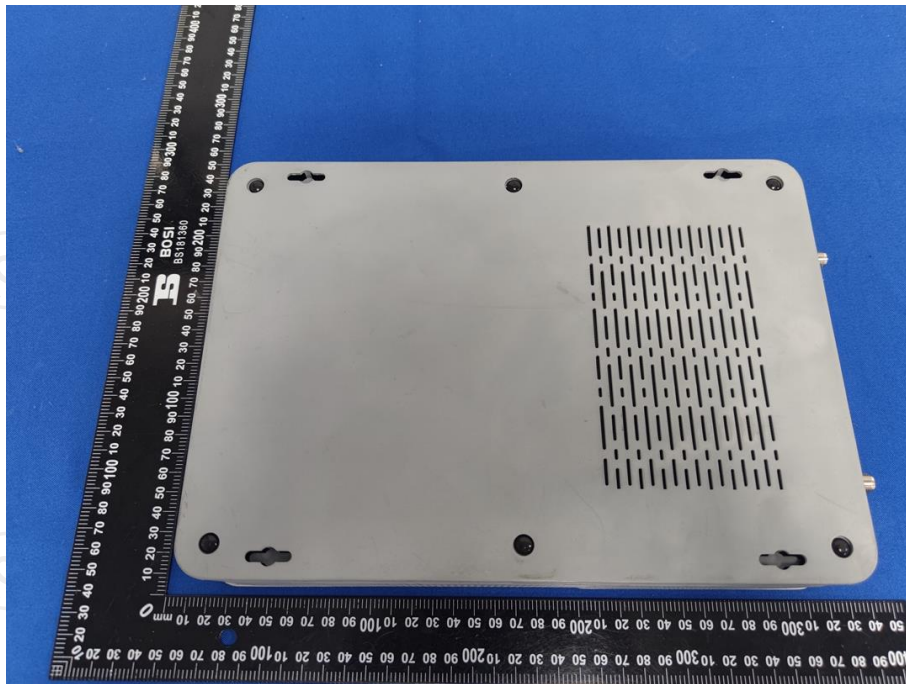


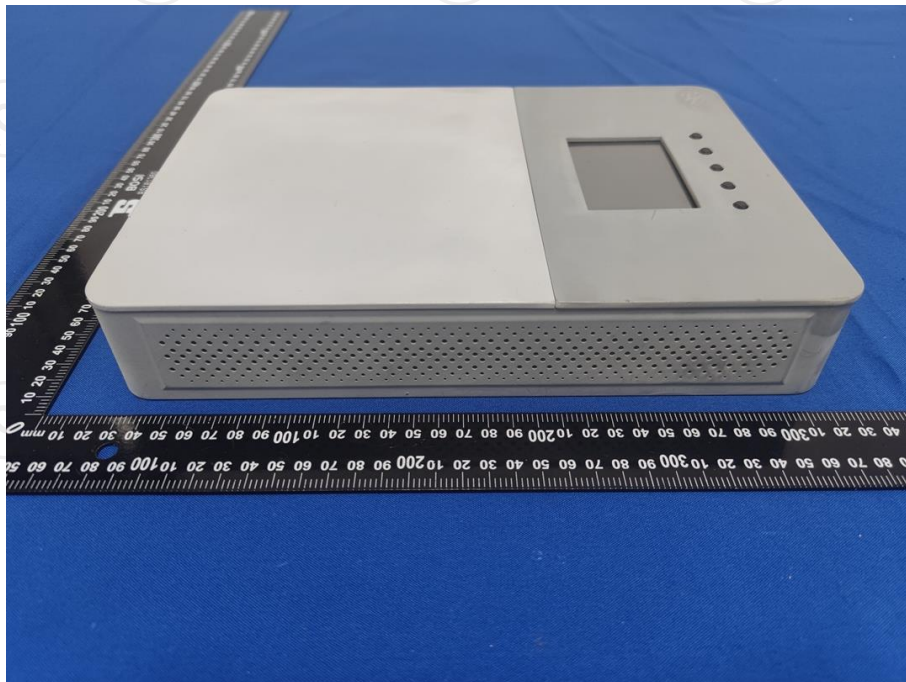
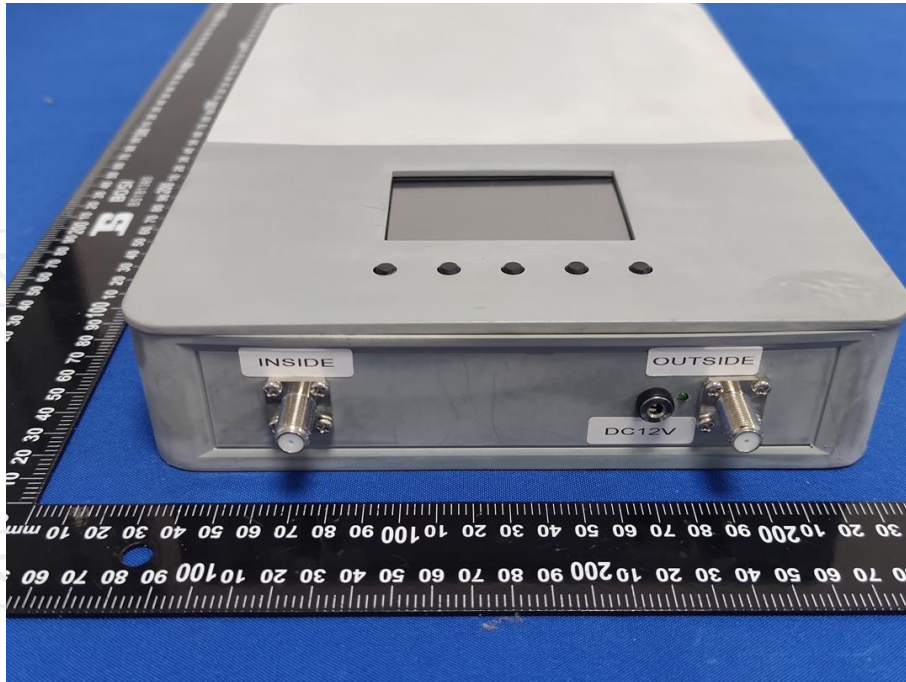


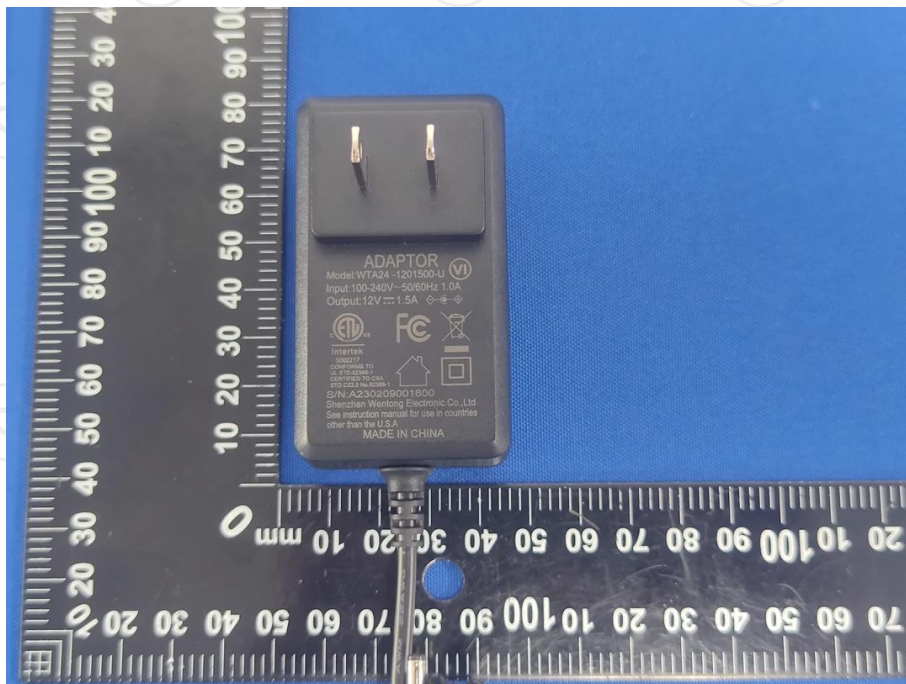
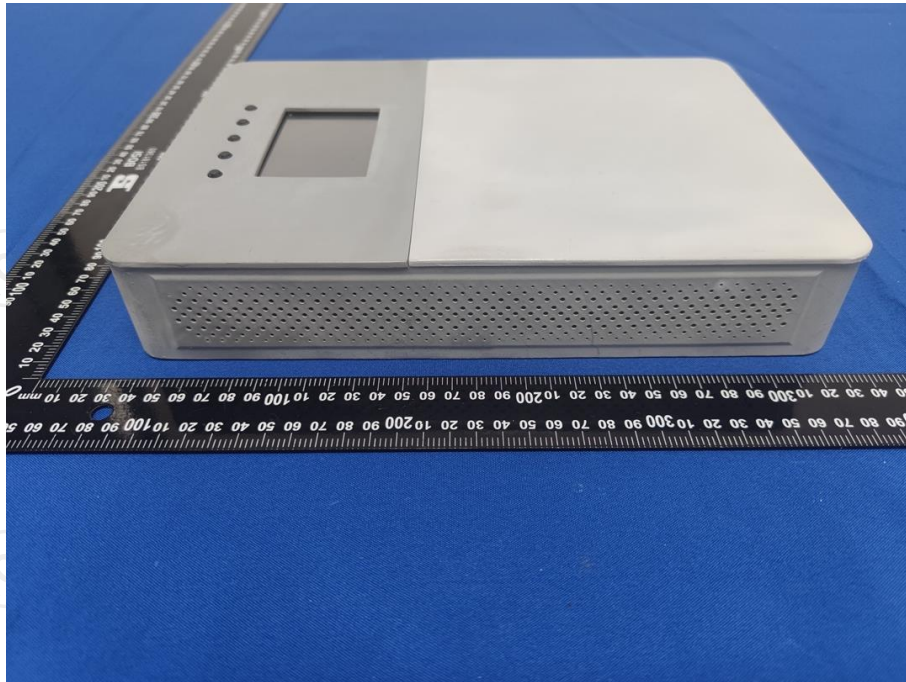




Product: Cell Signal Booster
Model: SF005A
Internal Photos

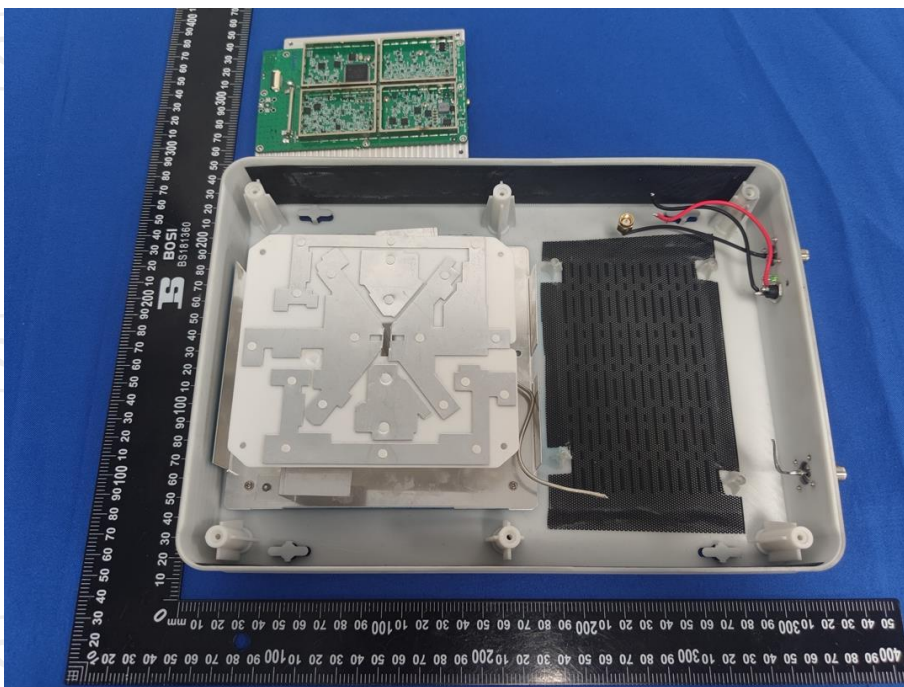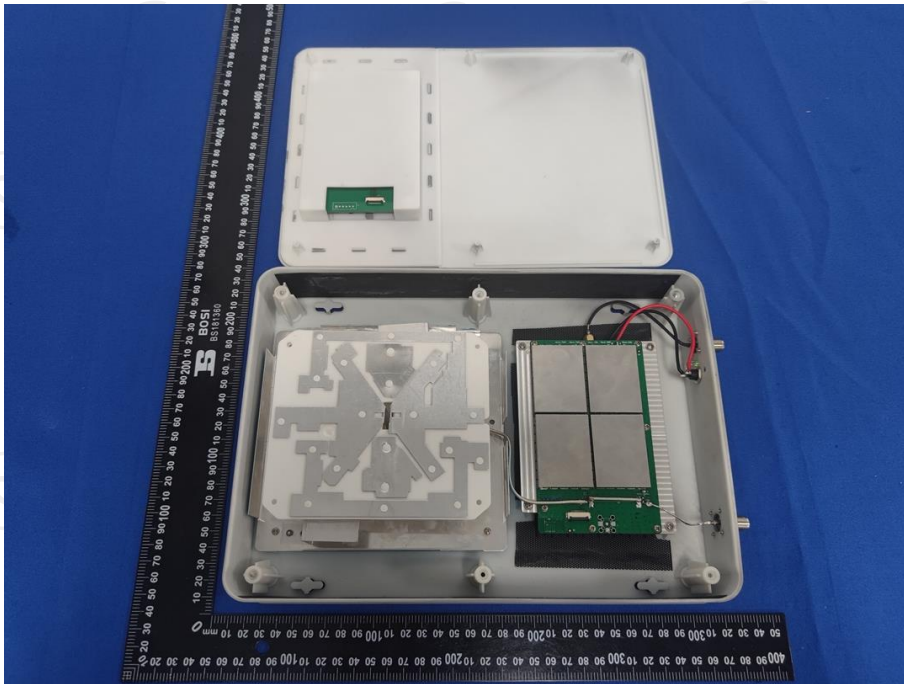

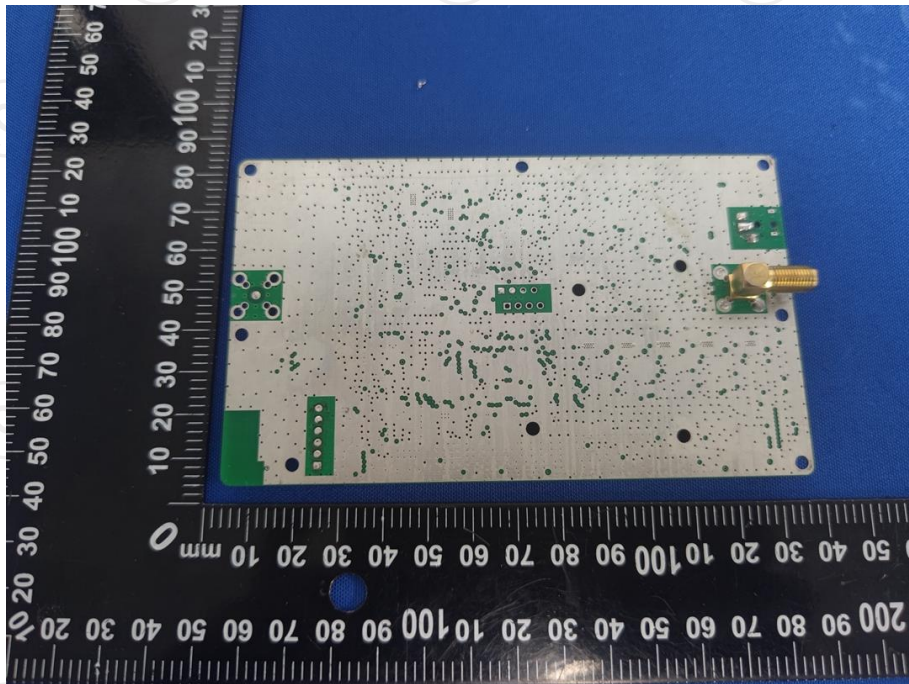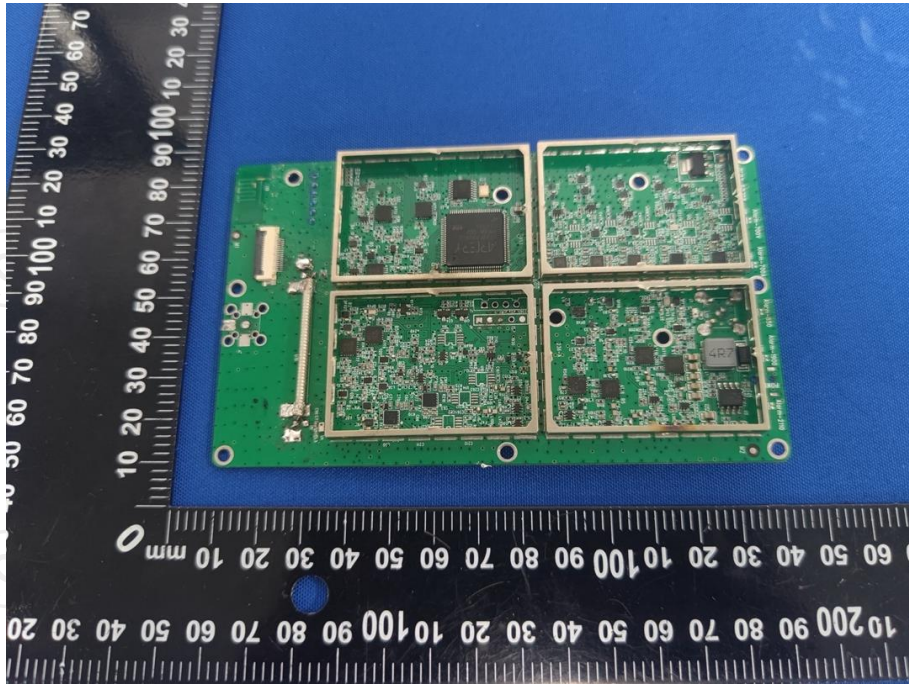

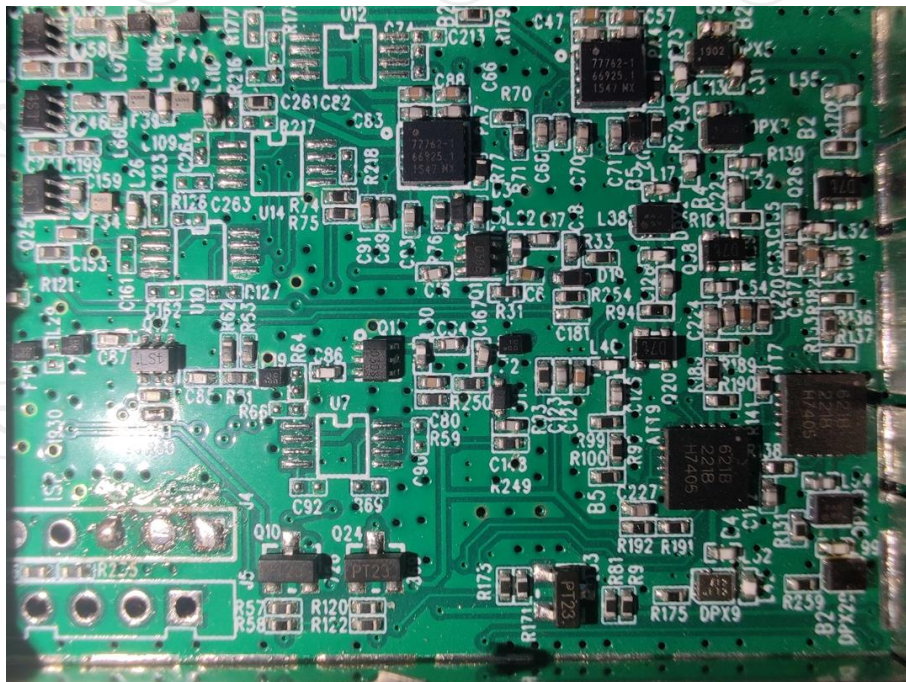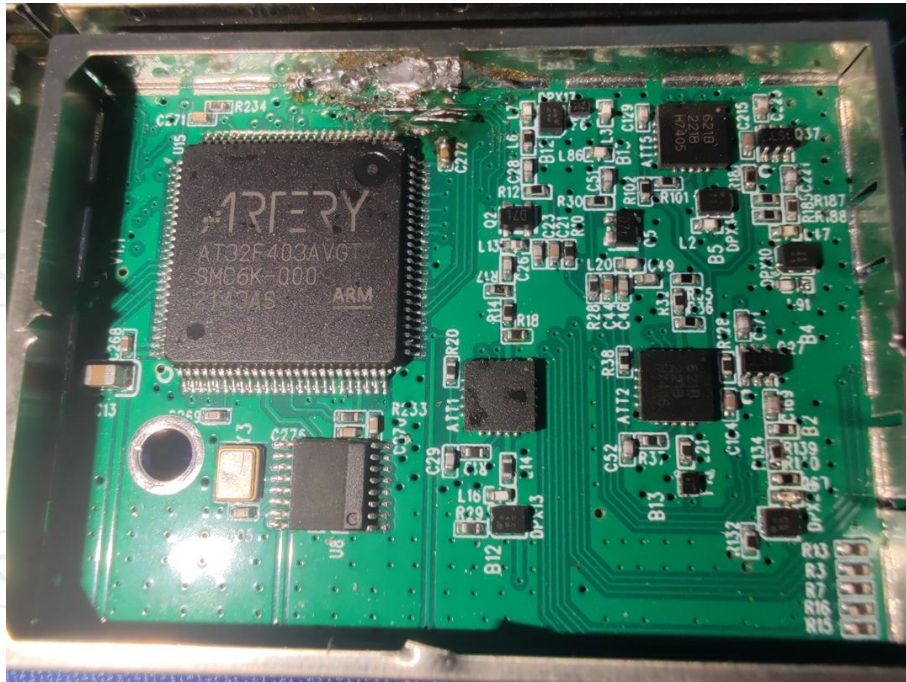

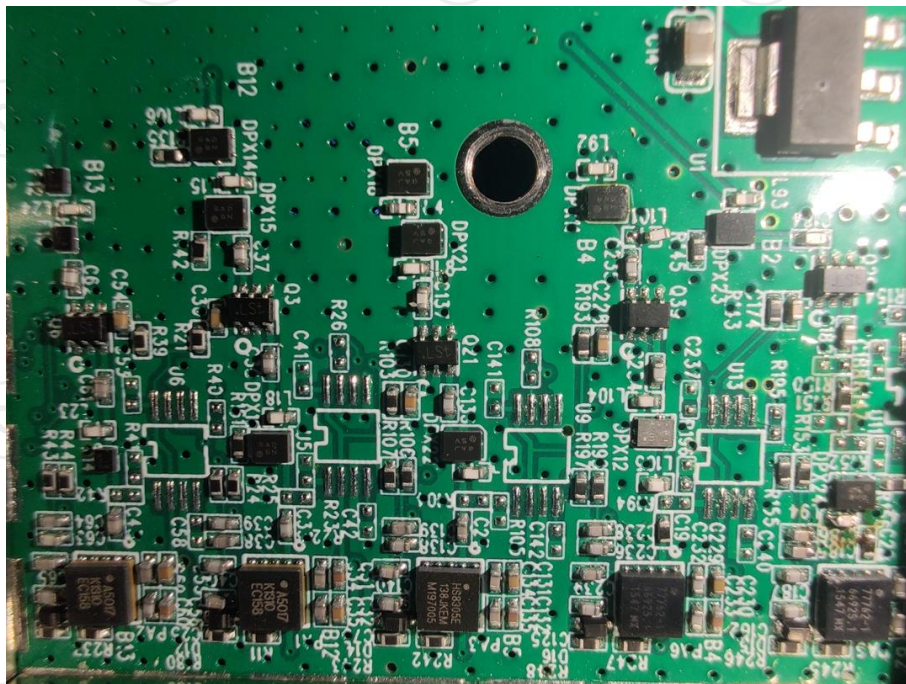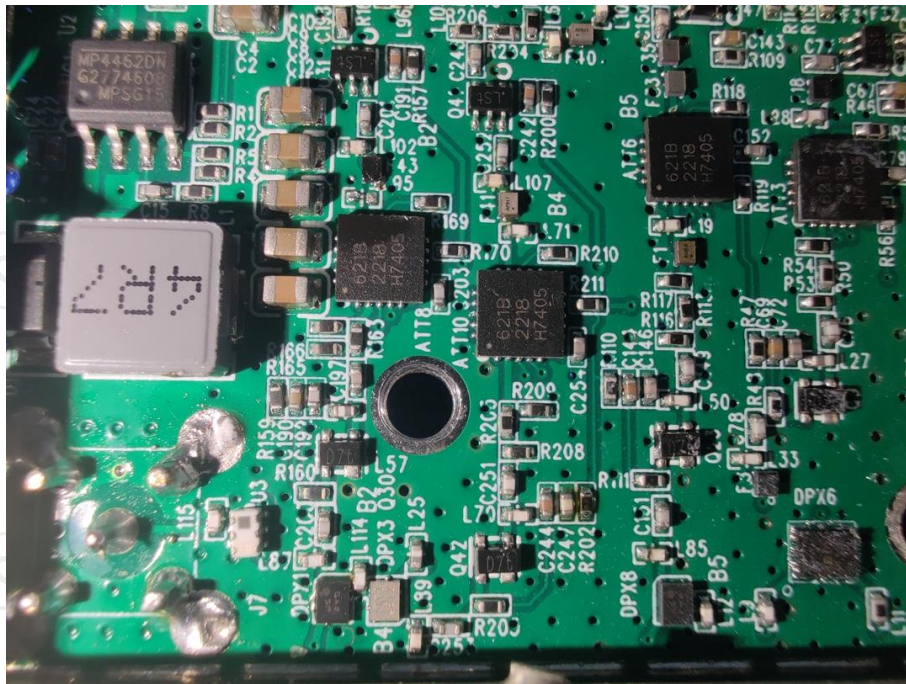

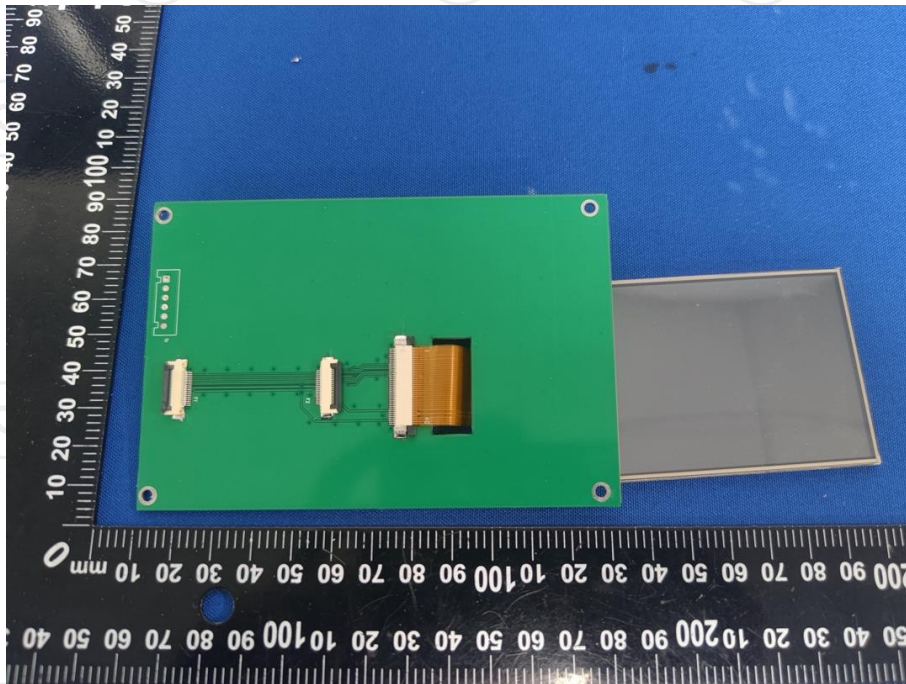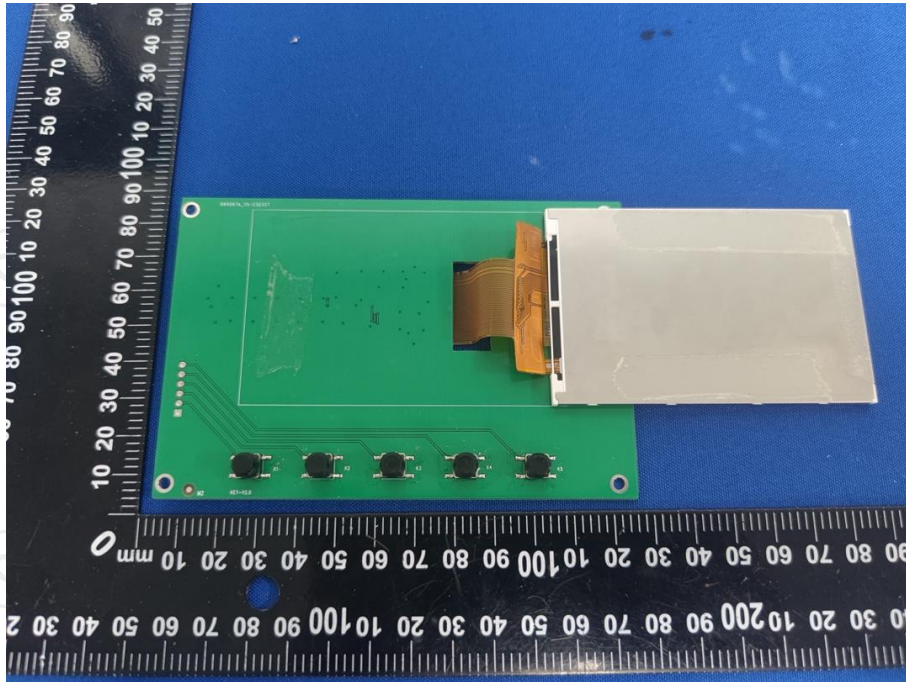

*******END OF REPORT*******