

E0 Bluetooth Headset User Manual

Please read below content carefully before using

thanks for purchasing E0 Bluetooth helmet intercom headset, may you will enjoy it.
please read the "Safety Instructions" before using the product for your safety and correct use.


Caution

- Do not immerse in water to avoid damaging the product as well as shortening its lifetime.
- DO NOT drop or apply shock to the product. Such act may cause irreparable damage to the product.
- DO NOT expose the product to open flame or under the direct sunlight for a prolonged period of the time. Such environment may cause malfunction or fire.
- Please do not change the setting or talk on the cell phone while driving. It may cause an accident. Please note: in no event our product shall be liable for any special, indirect, punitive, incidental, exemplary or consequential damages, or any damages whatsoever resulting from the usage of this product.
- Conversation on the cell phone when driving is extremely dangerous. Please go out of the road for doing the telephone call.
- If anything unusual such as smoke, heat or bad smell is detected, please disconnect immediately the power and stop the usage. Continuing the use may cause electric shock or fire.
- DO NOT lick, bite or put the product into the mouth. Such act may result in serious injuries/accidents. Take utmost caution around children.
- DO NOT change the mic when it gets wet. With water exposure, it may cause fire, electrification or failure.
- Temperature range of use: -15°C—45°C
- Please use only qualified accessories which have been authenticated by us, in order to guarantee the product correct functioning.

Note on battery charge

- For battery charge, use USB terminal or USB adaptor at normal temperature.
- Use regulation USB terminal only. Otherwise it may cause smoke generation or fire.
- When charging the battery, if any strange odor or high heat should broken out, please immediately pull the plug from the body. It may cause smoke generation or fire.
- Do not leave the product in a state of charge long after the charging is completed. Such condition may cause smoking/ignition.
- Charge battery at least once every six months even if the product is not use for an extended period of time. Over discharge may require battery replacement.

FCC ID: 2AIO2E0
Product description:

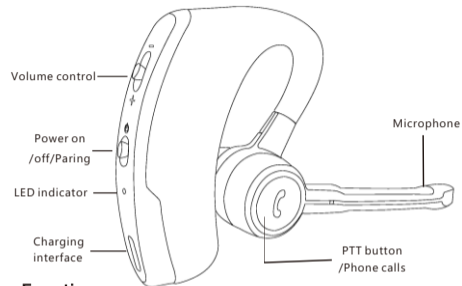

Function:

- PTT function
- Answer incoming call
- Hang up call
- Reject incoming call

Before using the headset, please recharge headphones

- Make sure your headset is fully charged three hours before use. From a mains socket. When a red light blink, indicating headset is under charging. After the headset been fully charged, the indicator will show a solid red light. Please note: if have been left too much time not charged, the battery life may be greatly reduced. Therefore it is recommended that you charge the E0 BT headset at least once a month.

Operation

- power on**
In power off state, turn Power on/off Button towards to power icon and hold it for about 3 seconds, until hear a "di" tone, release the button, blue indicator will flash slowly to indicate power on successfully.
- power off**
In power on state, turn Power on/off Button towards to power icon and hold it for about 6 seconds, until hear a long "di" tone, red indicator will flash quickly to indicate power off.

Pairing with mobile phone

- place the E0 Bluetooth headset and the mobile phone in a visible area within 1 meter range.
- Make sure the Bluetooth headset is in power off state.
- Turn Power on/off Button towards to power icon for about 8 seconds, when the Blue LED and the Red LED flashing alternately, release the button then the E0 Bluetooth headset is in pairing state now.
- Follow the user manual of your mobile phone, turn on the Bluetooth function, and searching the Bluetooth headset devices
- From the found devices in your mobile phone, select the device "Dellking E0 Vxx.xxrelated name, and then try to pair with it, when it prompts to enter password, enter pin code <0000>. Once paired successfully, LED Indicator will change from Blue/Red alternately to Blue flashing, and with a "di" tone to note that the Bluetooth headset has connected with your mobile phone. Now you can use the headset to push to talk or answer you phone call.

Note:

1. Password code may be not necessary for some mobile phones.
2. The pairing will be remembered after the first pair, you do not need to pair again next time.



Push To Talk Function For Poc App And Radio Phone

After connected to your cell phone Poc(PTT Over Cellphone) app or Bluetooth Dongle/ Adapter with E0, just push the PTT button to remote control the PTT function. some Poc app may need some setting change Bluetooth before use. Details please refer to the user guide of Poc App.

Note: Poc means PTT Over Cellular.



Phone call operation

Answer incoming call

- When there is an incoming phone call, press PTT Button to answer the call, or it may be automatically answered if there's no user operation for 10s.

Reject incoming

- Double press PTT Button to reject an incoming phone call.

Hang up call

- In call active state, double press PTT Button to hang up the call.

Voice dial

- While the E0 is connected with the mobile phone, quick double turn Volume+ Button, then the mobile will prompt you to speak out your desired name. (Note: Voice dial need Mobile Phone supports correspond HFP Voice Dial function)

Volume control

- Turn volume control button towards to "+" icon and hold it, the volume will be louder and louder, when maximum volume reached, a remind tone will be played. turn volume control button to "-" icon and hold it, the volume will be turned lower and lower, when minimum volume reached a remind tone will be played.

Technical Specification:

Model	E0
Bluetooth version	V4.1 Class 2
Operation range	10m
Profile	HFP,HSP,PTT
Frequency range	2402-2480MHz
Occupied Bandwidth	≤2MHz
Transmitting frequency	≤20dBm(EIRP)
Talking time	About 6 hours
Standby time	About 50 hours
Charging time	Less than 3 hours
Working temperature	-15°C ~ 45°C
Storage temperature	-25°C ~ 60°C

About Led Indicator and Charging

LED indicator flash mode	State of indication
LED indicator flashes blue every 2s	Working/ Standby mode
LED indicator flashes red/blue alternately and quickly	Pairing mode
LED indicator flashes red and blue every 2s	Battery low
LED indicator flashes red every 1s	Charging
LED indicator keeps red	Charging completed

FAQ :

Can not power on

- It might be in low battery, please try again after charging for 3 hours, then power on again.

No sound

- Please check if the speaker mic have connected to the device or the volume too low?

Disconnect with mobile phone, Bt Adapter/dongle, or GPS

- Make sure if it is in low battery, if not, the distance between the speaker mic and mobile phone within 10m? Or between them exist obstacles that absorb frequency signals like metals or water?

Fail to re-connect or automatically re-connect with mobile phone

- First make sure your Bluetooth function in your mobile phone have been turned on, then remove all the paired Bluetooth device in you cell phone. Then turn off your mobile phone, restart mobile phone and pair with Bluetooth speaker-mic and set the headset read as "default/trust/test/permit automatically connection/always visible/allow to be found" device, and further ensure that the phone prompt tone is not vibrating mode (because the vibrating impulse wave would interfere with Bluetooth frequency signal sometimes), then repair and connect with your mobile phone. For android system, please make sure in the Bluetooth device option list, you have "Phone" options selected.

System halted

- Use USB cable to charge the headset once then the headset will reset itself..

Abnormal instruction of Charging indicator

- When the headset haven't been used for long time or over used, it need to be pre-charge for an hour, then pull out and in the charger, it will indicate normal charging. Please don't count the pre-charging time into normal charging time.
- Try another charging cable or charger.

Crackle

- Put E0 headset nearer (less than 10 meter range) to your cell phone. put E0 and cellphone in a least obstacle blocking range.

Please send back your BT Speaker-mic head set to our after-sales service department for help if above suggestions fail to solve your problem.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radiofrequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.