



## MEASUREMENT REPORT

### FCC PART 22&24 Portable Handset

---

**FCC ID:** 2AIV6-T199

**APPLICANT:** Shenzhen Inrico Electronics Co.,Ltd

**Application Type:** Certification

**Product:** Smart Phone

**Model No.:** T198, T199

**Brand Name:** Inrico

**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** Part2, Part22 Subpart H, Part24 Subpart E

**Test Procedure(s):** ANSI/TIA-603-C-2010, KDB 971168 D01v02r02

**Test Date:** June 01 ~ 30, 2016

Reviewed By : Robin Wu  
Manager ( Robin Wu )

Approved By : Marlin Chen  
CEO ( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
1605RSU01401	Rev. 01	Initial report	09-07-2016	Invalid
1605RSU01401	Rev. 02	Revised product name	10-10-2016	Valid

# CONTENTS

Description	Page
<b>§2.1033 General Information.....</b>	<b>5</b>
<b>1. INTRODUCTION .....</b>	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION.....</b>	<b>7</b>
2.1. Feature of Equipment under Test .....	7
2.2. Equipment Description .....	7
2.3. Device Capabilities.....	7
2.4. Test Configuration .....	7
2.5. EMI Suppression Device(s)/Modifications.....	7
<b>3. DESCRIPTION OF TEST .....</b>	<b>8</b>
3.1. Evaluation Procedure .....	8
3.2. Cellular – Base Frequency Blocks .....	8
3.3. Cellular – Mobile Frequency Blocks .....	8
3.4. PCS – Base Frequency Blocks .....	8
3.5. PCS – Mobile Frequency Blocks.....	9
3.6. Occupied Bandwidth .....	9
3.7. Spurious and Harmonic Emissions at Antenna Terminal .....	9
3.8. Radiated Power and Radiated Spurious Emissions.....	10
3.9. Peak-Average Ratio .....	11
3.10. Frequency Stability / Temperature Variation .....	11
<b>4. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>12</b>
<b>5. SAMPLE CALCULATIONS.....</b>	<b>13</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>14</b>
<b>7. TEST RESULT .....</b>	<b>15</b>
7.1. Summary .....	15
7.2. Occupied Bandwidth .....	16
7.2.1. Test Limit .....	16
7.2.2. Test Procedure used .....	16
7.2.3. Test Setting.....	16
7.2.4. Test Setup .....	16
7.2.5. Test Result.....	17
7.3. Spurious and Harmonic Emissions at Antenna Terminal .....	23

---

7.3.1. Test Limit .....	23
7.3.2. Test Procedure Used.....	23
7.3.3. Test Setting.....	23
7.3.4. Test Setup .....	23
7.3.5. Test Result.....	24
7.4. Conducted & Radiated Power and Radiated Spurious Emissions .....	43
7.4.1. Test Limit .....	43
7.4.2. Test Procedure Used.....	43
7.4.3. Test Setting.....	43
7.4.4. Test Setup .....	45
7.4.5. Test Result.....	46
7.5. Peak-Average Ratio .....	61
7.5.1. Test Limit .....	61
7.5.2. Test Procedure .....	61
7.5.3. Test Setup .....	61
7.5.4. Test Result.....	62
7.6. Frequency Stability Under Temperature & Voltage Variations.....	63
7.6.1. Test Limit .....	63
7.6.2. Test Procedure .....	63
7.6.3. Test Setup .....	63
7.6.4. Test Result.....	64
<b>8. CONCLUSION.....</b>	<b>70</b>

## §2.1033 General Information

<b>Applicant:</b>	Shenzhen Inrico Electronics Co., Ltd
<b>Applicant Address:</b>	4/F, Building NO.108, High Tech Industrial Park, Guowei Road 72, Luohu District, Shenzhen, China
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part22 Subpart H, Part24 Subpart E
<b>Model No.:</b>	T198, T199
<b>FCC ID:</b>	2AIV6-T199
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name	Smart Phone
Model No.	T198, T199
Brand Name:	Inrico
Antenna Type	Dipole
GSM Operation Band (s)	GSM850 / PCS1900
WCDMA Operation Band (s)	Band II, Band V

### 2.2. Equipment Description

Antenna Type	Dipole
Antenna Gain	GSM850: 2.15dBi PCS1900: 2.15dBi WCDMA Band II: 2.15dBi WCDMA Band V: 2.15dBi
Type of Modulation	GPRS: GMSK; EDGE: 8PSK WCDMA/HSDPA/HSUPA: QPSK (Uplink)

Note: The test data contained in this report only to the emissions due to the EUT's 2G/3G licensed transmitters. The test report has showed the worst test mode.

The connector of the antenna is Reverse-SMA Connector which is unique connector

### 2.3. Device Capabilities

This device contains the following capabilities:

850/1900 GPRS/EDGE, 850/1900 WCDMA/HSDPA/HSUPA

### 2.4. Test Configuration

The **Smart Phone** was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01v02r02. See section 3.0 of this report for a description of the radiated and antenna port conducted emissions tests.

### 2.5. EMI Suppression Device(s)/Modifications


No EMI suppression device(s) were added and no modifications were made during testing.





### 3.5. PCS – Mobile Frequency Blocks

#### §24.229

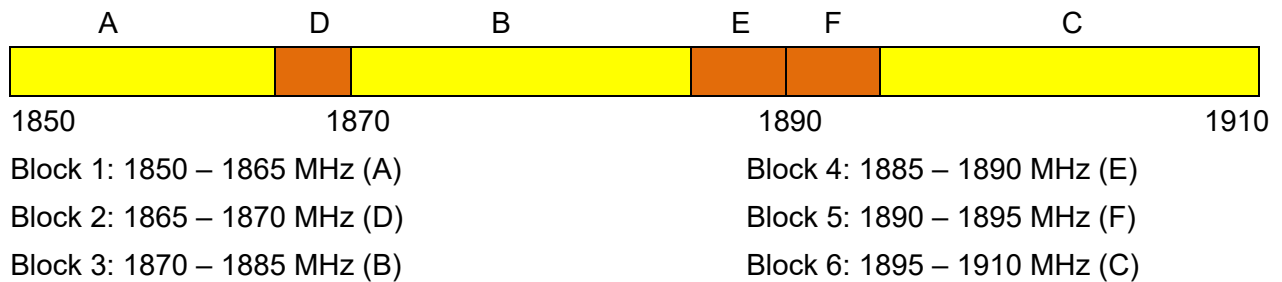

### 3.6. Occupied Bandwidth

#### §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

### 3.7. Spurious and Harmonic Emissions at Antenna Terminal

#### §2.1051 §22.917(a) §24.238(a)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 3.8. Radiated Power and Radiated Spurious Emissions

#### §2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurement and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 80cm high PVC support structure is placed on top of the turntable.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10 \cdot \log_{10}(\text{Power [Watts]})$  specified in 22.917(a) and 24.238(a).

### 3.9. Peak-Average Ratio

#### §24.232(d)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For pulsed signals, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power. For continuous signals, the trigger is set to “free run” in the CCDF measurement mode.

### 3.10. Frequency Stability / Temperature Variation

#### §2.1055 §22.355 §22.863 §22.905 §24.229 §24.235

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010.

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### 4. TEST EQUIPMENT CALIBRATION DATE

##### Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9038A	MY51210182	1 year	2017/06/23
Radio Communication Tester	R&S	CMU 200	117129	1 year	2016/11/10
Preamplifier	Agilent	83017A	MY53270040	1 year	2017/03/29
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2016/12/14
TRILOG Antenna	Schwarzbeck	VULB9168	9162-047	1 year	2016/12/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	1457	1 year	2016/11/07
Broadband Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170549	1 year	2017/01/04
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

##### Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9010A	MY51210182	1 year	2017/06/23
Radio Communication Tester	R&S	CMU 200	117129	1 year	2016/11/10
USB Wideband Power Sensor	Boonton	55006	8911	1 year	2017/05/08
Programmable Temperature & Humidity Chamber	BAOYT	BYH-1500L	1309W043	1 year	2016/12/08
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

## 5. SAMPLE CALCULATIONS

### **GSM Emission Designator**

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### **EDGE Emission Designator**

Emission Designator = 250KG7W

GSM BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### **WCDMA Emission Designator**

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### **Spurious Radiated Emission**

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0\text{dBm}$ .

The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3700.40\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.80\text{dBm}$ . The fundamental EIRP was  $25.50\text{dBm}$  so this harmonic was  $25.50\text{dBm} - (-24.80) = 50.3\text{dBc}$ .

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### Radiated Emission Measurement - AC1

Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):

9kHz ~ 1GHz:  $\pm 4.18\text{dB}$

1GHz ~ 40GHz:  $\pm 4.76\text{dB}$

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Shenzhen Inrico Electronics Co.,Ltd  
**FCC ID:** 2AIV6-T199  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**Mode(s):** GSM / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>Transmitter Mode(TX)</b>					
2.1049	Occupied bandwidth	N/A	Conducted	Pass	Section 7.2
2.1051 22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		Pass	Section 7.3
24.232(d)	Peak-Average Ratio	< 13 dB		Pass	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		Pass	RF Exposure Report
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	Radiated	Pass	Section 7.4
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		Pass	Section 7.4
2.1053 22.917(a) 24.238(a)	Undesirable Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		Pass	Section 7.4
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		Pass	Section 7.6

#### Notes:


- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 4.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.









**7.2.5. Test Result**

Test Mode	Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	-26dB Occupied Bandwidth (kHz)	Result
GPRS850	128	824.2	246.4	308.4	Pass
	189	836.4	247.0	311.5	Pass
	251	848.8	248.2	316.3	Pass
GPRS1900	512	1850.2	243.5	311.1	Pass
	661	1880.0	244.8	304.8	Pass
	810	1909.8	243.4	315.1	Pass
EDGE850	128	824.2	250.3	314.7	Pass
	189	836.4	254.5	313.1	Pass
	251	848.8	246.0	311.5	Pass
EDGE1900	512	1850.2	244.1	318.6	Pass
	661	1880.0	258.4	329.0	Pass
	810	1909.8	259.2	326.5	Pass
WCDMA Band II	9262	1852.4	4228.7	4826.0	Pass
	9400	1880.0	4213.2	4778.0	Pass
	9538	1907.6	4357.5	8774.0	Pass
WCDMA Band V	4132	826.4	4166.9	4696.0	Pass
	4182	836.4	4170.1	4698.0	Pass
	4233	846.6	4152.6	4693.0	Pass

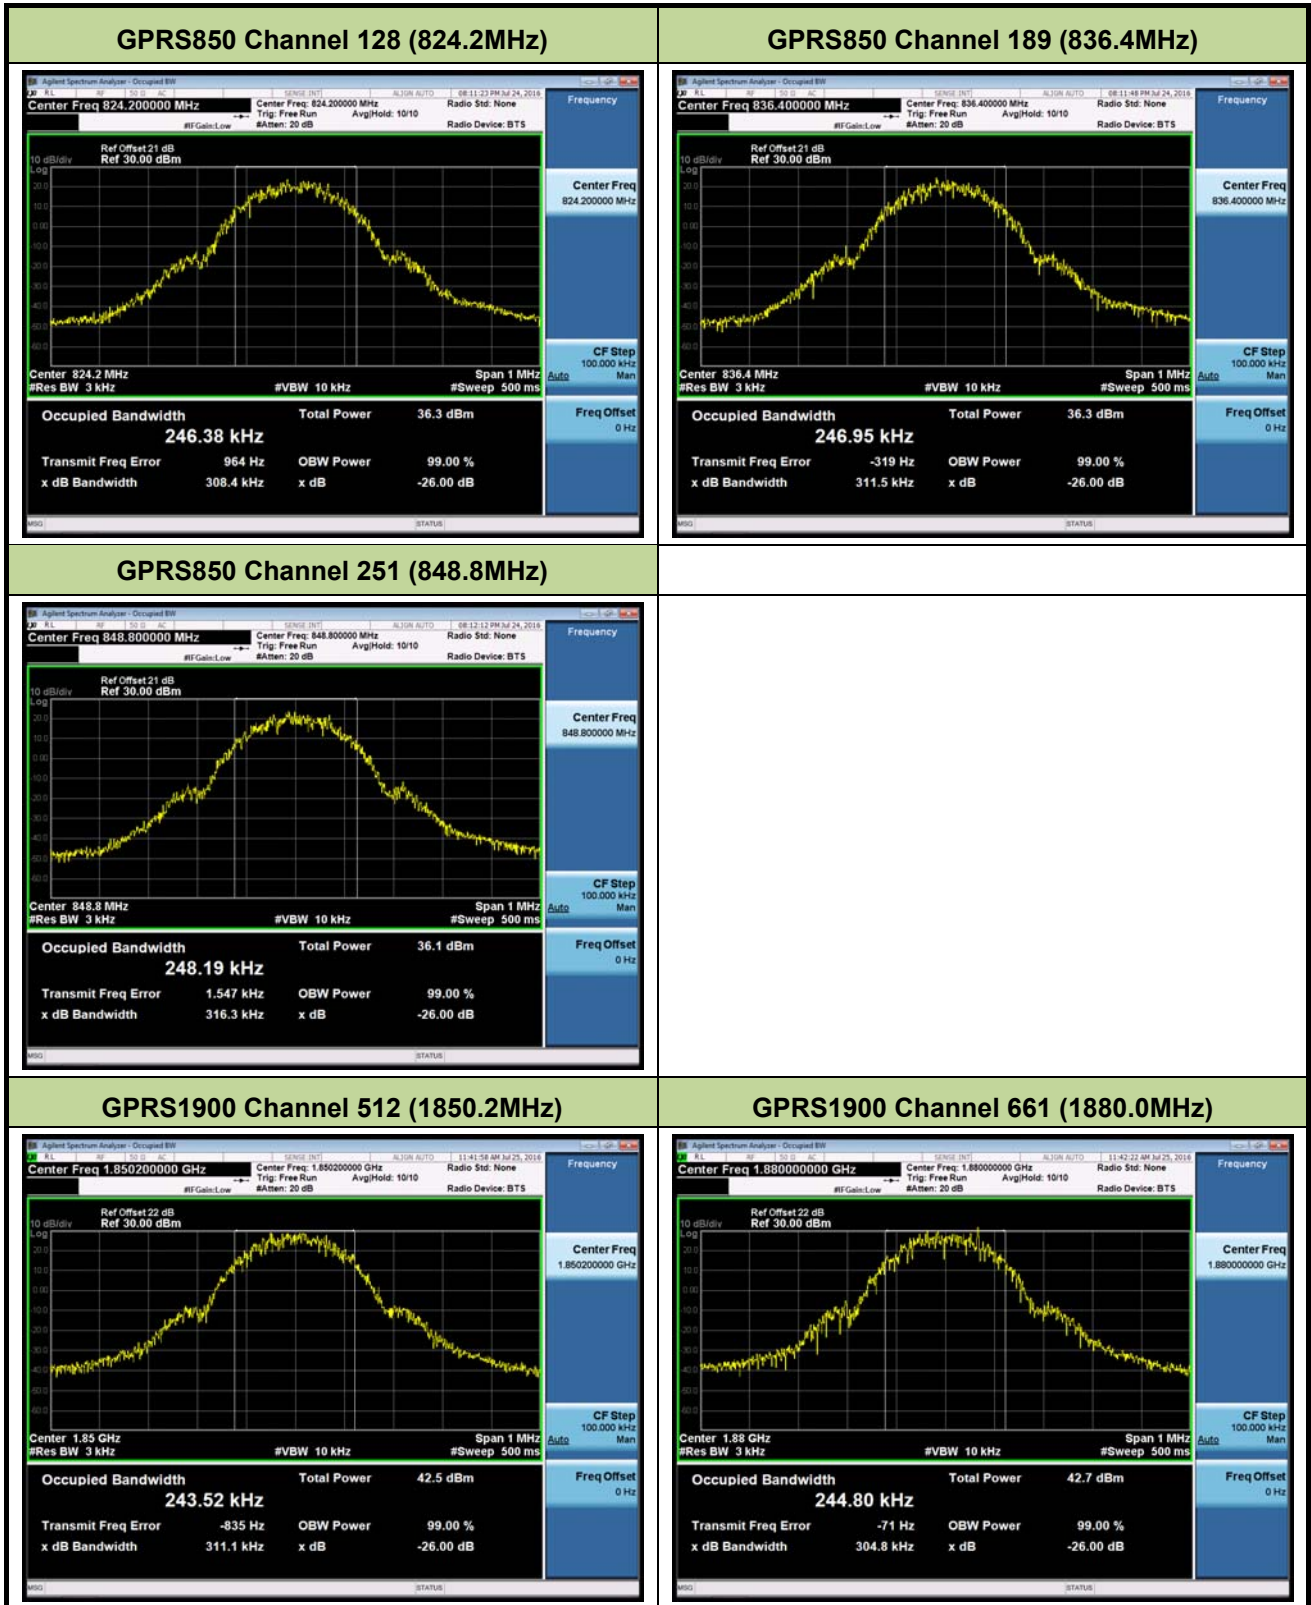

**GPRS1900 Channel 810 (1909.8MHz)**

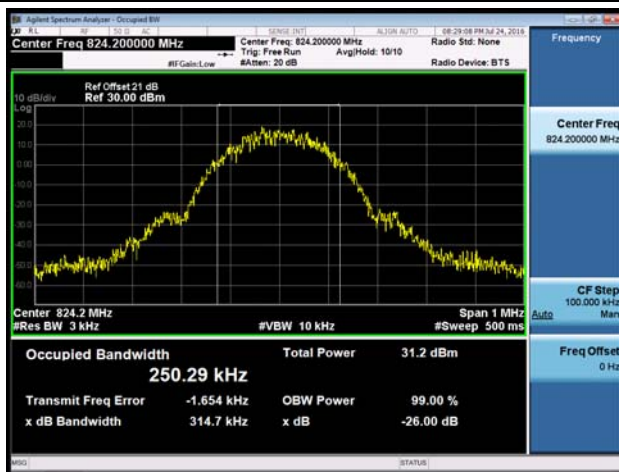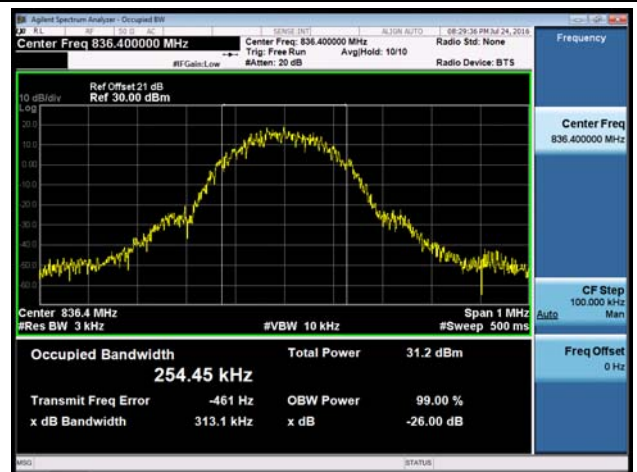
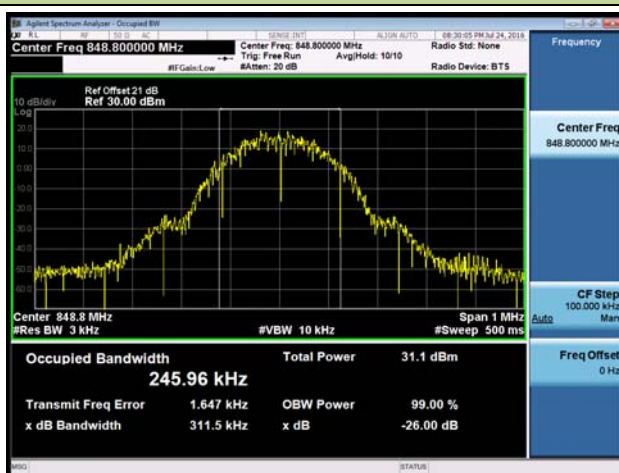
**EDGE850 Channel 128 (824.2MHz)**

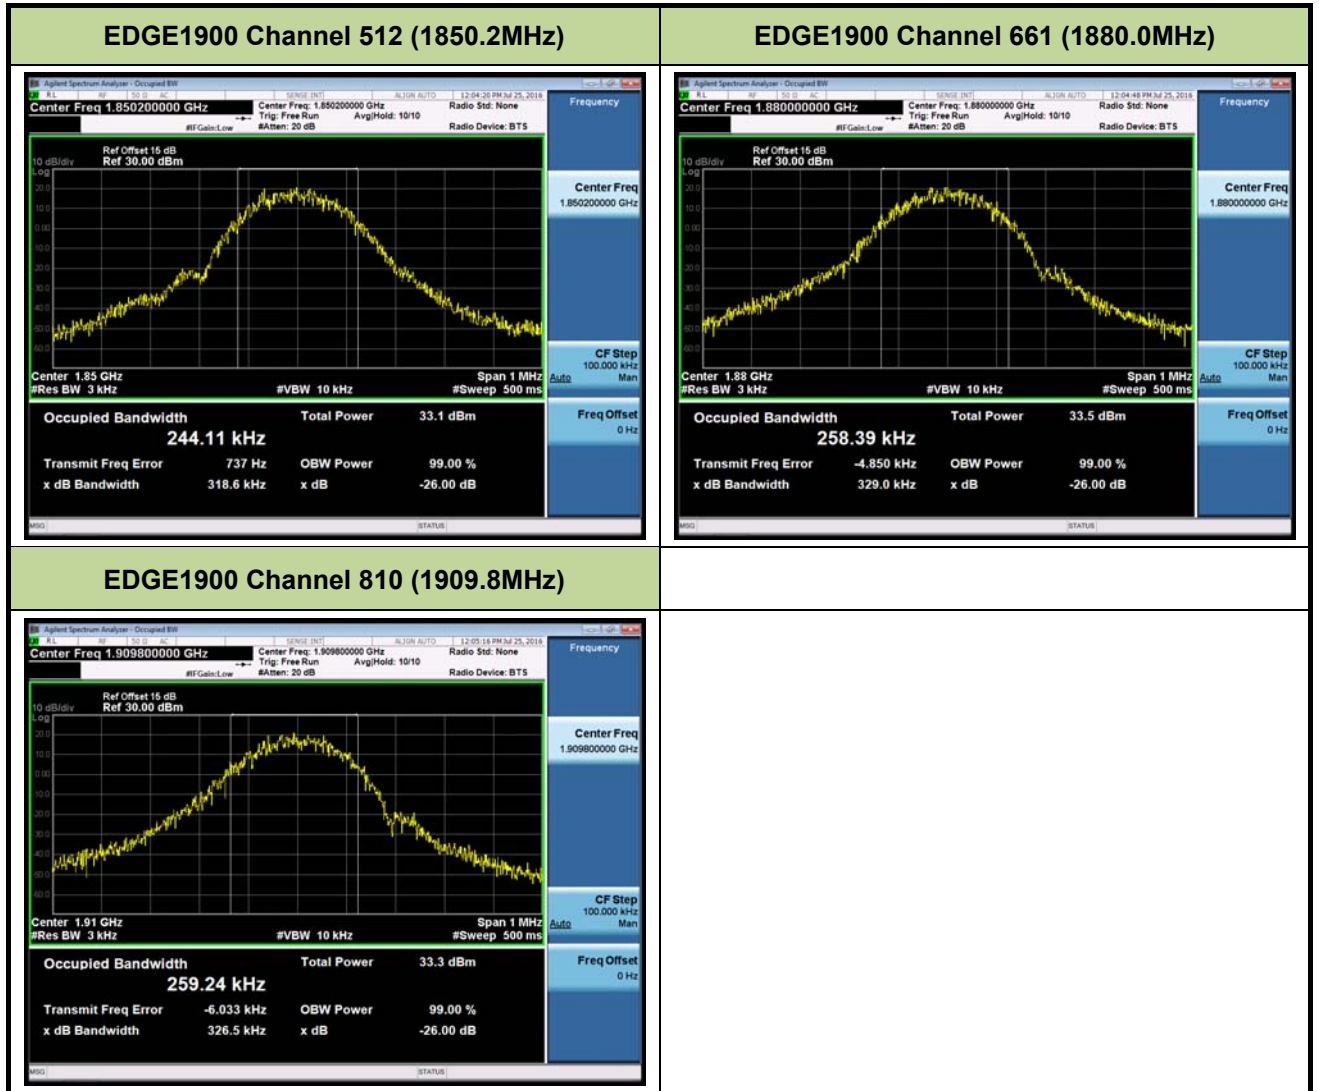**EDGE850 Channel 189 (836.4MHz)**

**EDGE850 Channel 251 (848.8MHz)**




**WCDMA Band II Channel 9262 (1852.4MHz)**

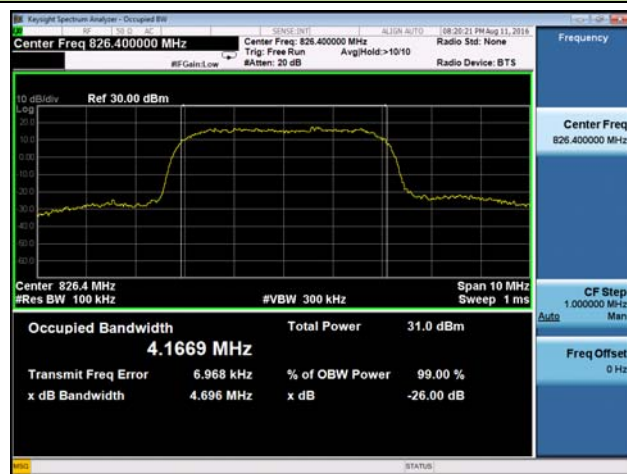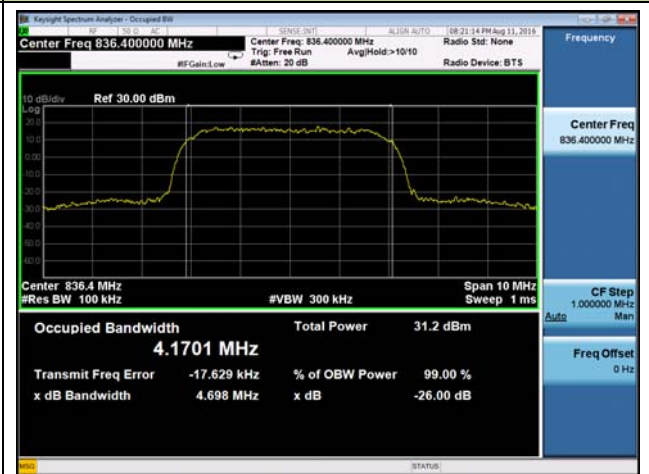**WCDMA Band II Channel 9400 (1880.0MHz)**

**WCDMA Band II Channel 9538 (1907.6MHz)**

**WCDMA Band V Channel 4132 (826.4MHz)**

**WCDMA Band V Channel 4182 (836.4MHz)**


**WCDMA Band V Channel 4233 (846.6MHz)**





### 7.3. Spurious and Harmonic Emissions at Antenna Terminal

#### 7.3.1. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.


#### 7.3.2. Test Procedure Used

KDB 971168 D01v02r02 – Section 6.0 & ANSI/TIA-603-D-2010

#### 7.3.3. Test Setting



In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

#### 7.3.4. Test Setup

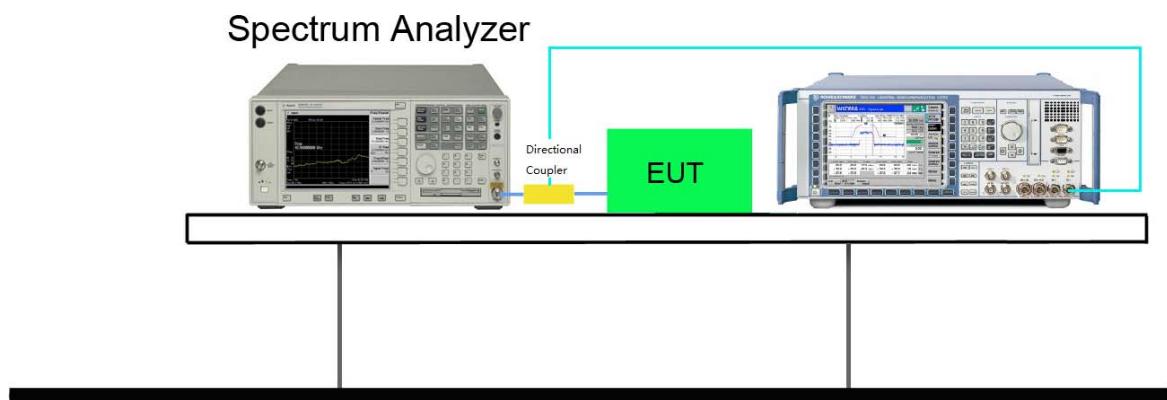


### 7.3.5. Test Result





Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
GPRS850	128	824.20	GMSK	Pass
GPRS850	189	836.40	GMSK	Pass
GPRS850	251	848.80	GMSK	Pass

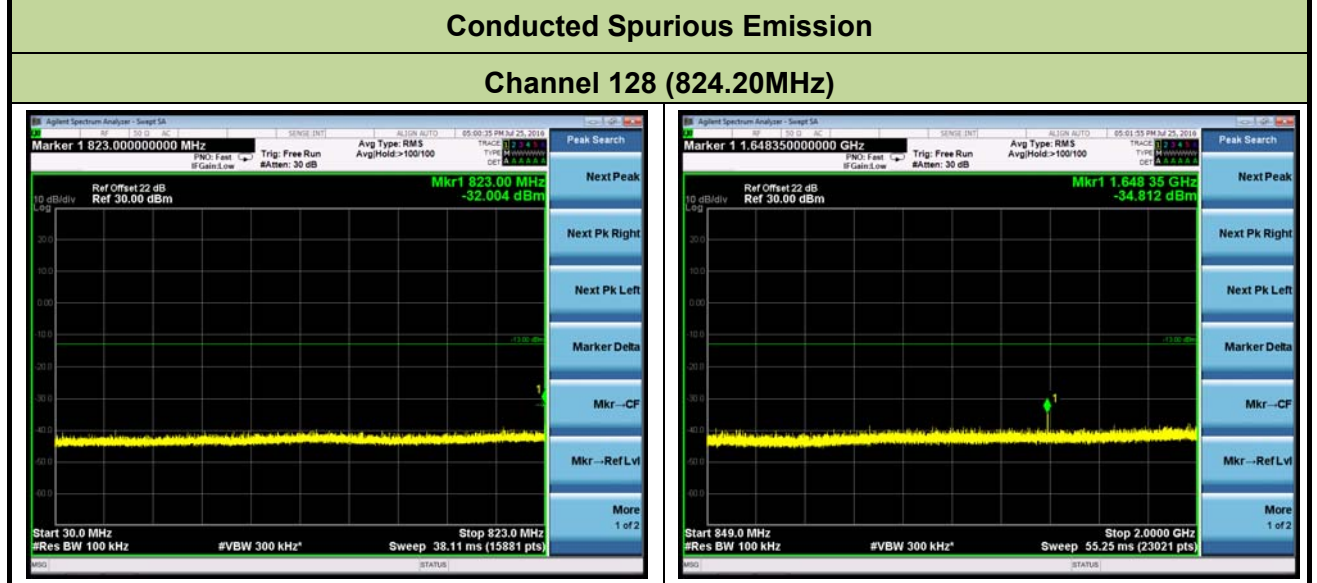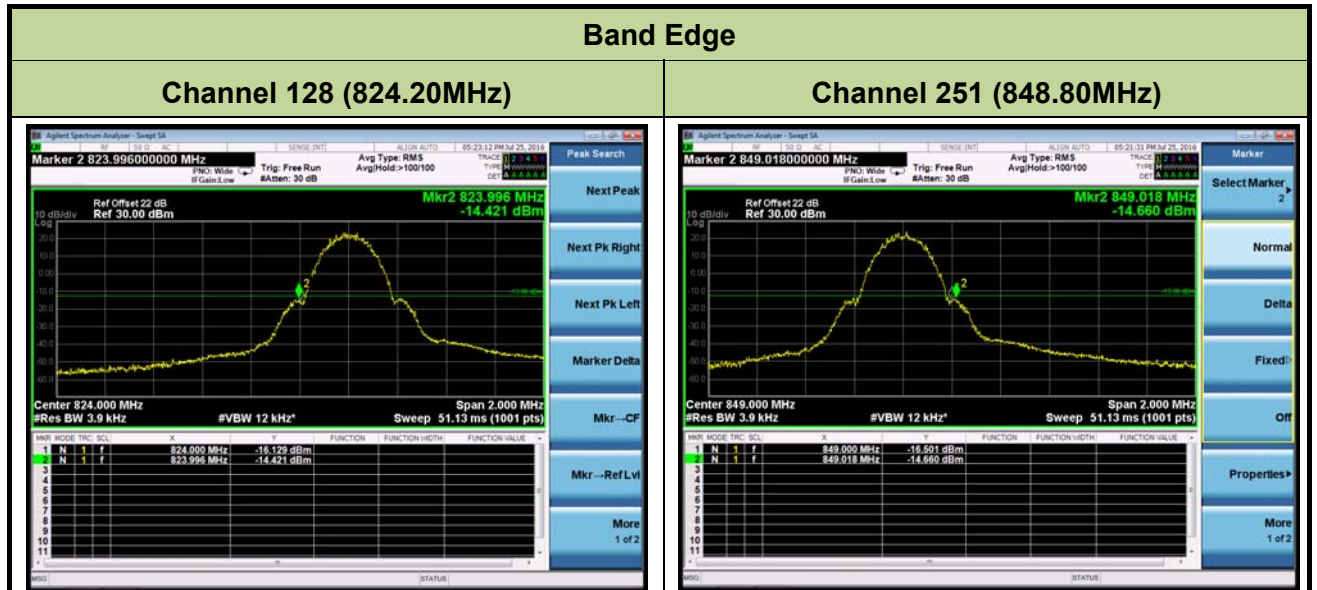






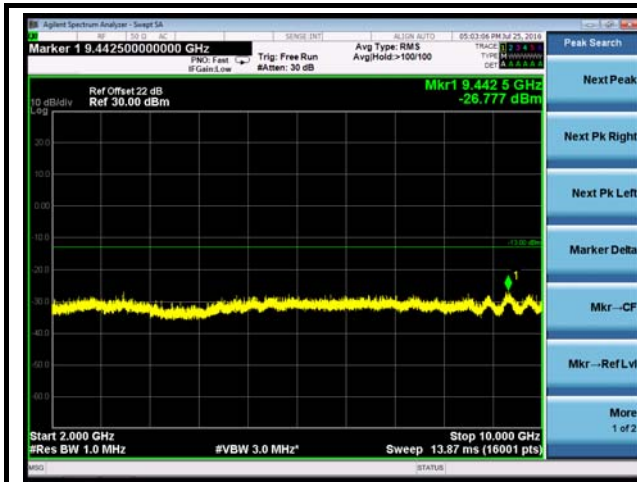

**Channel 189 (836.40MHz)**

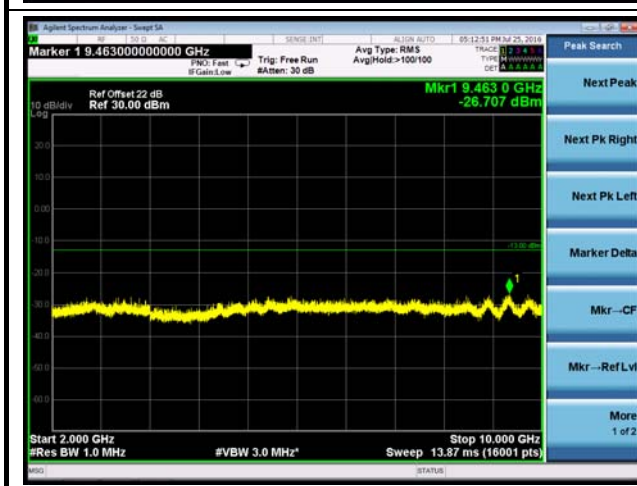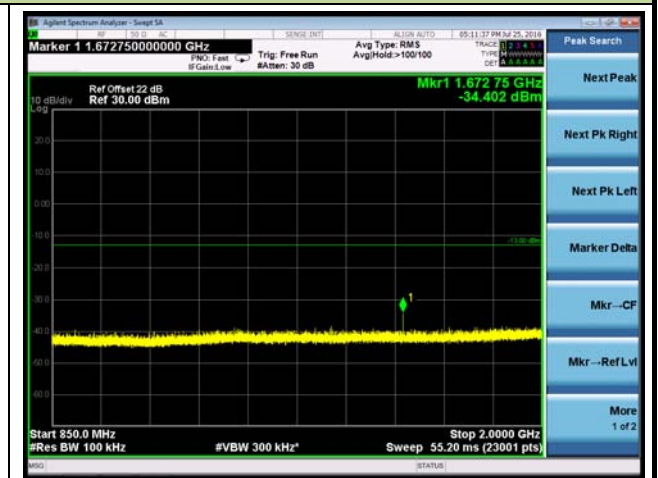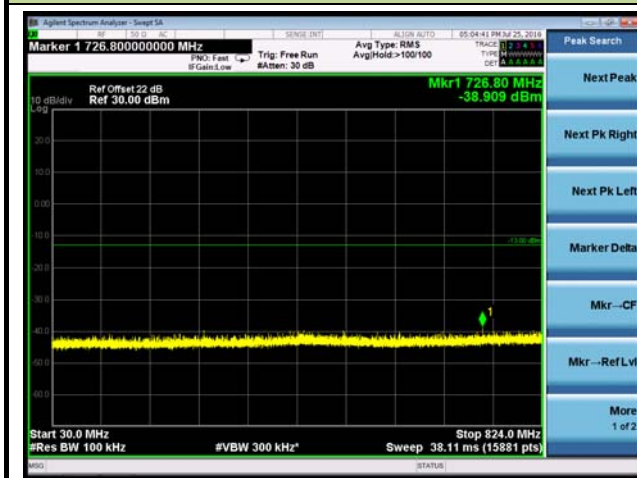



### Channel 251 (848.80MHz)

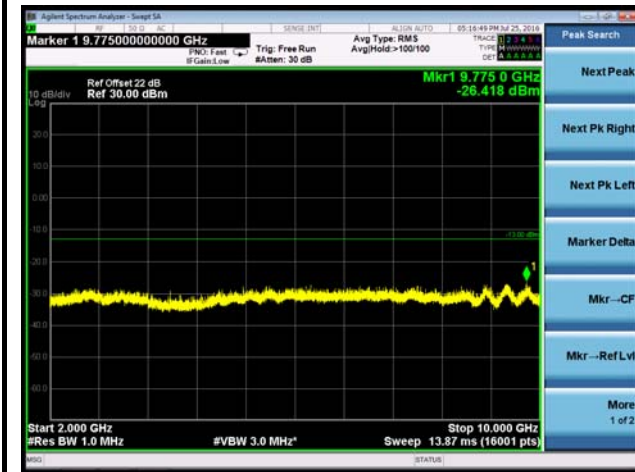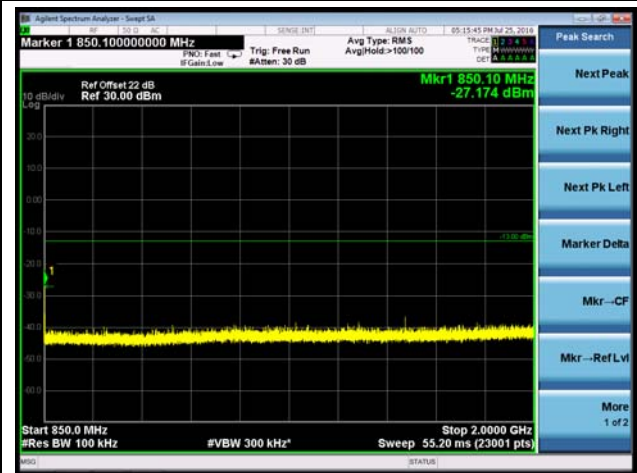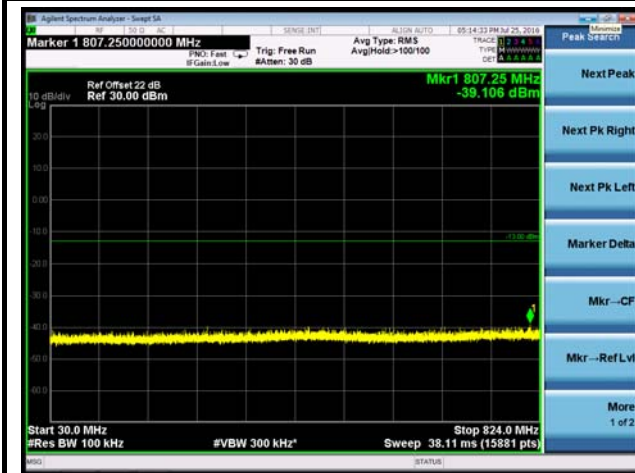



Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
GPRS1900	512	1850.20	GMSK	Pass
GPRS1900	661	1880.00	GMSK	Pass
GPRS1900	810	1909.80	GMSK	Pass

### Band Edge & 4MHz Span

#### Channel 512 (1850.20MHz)


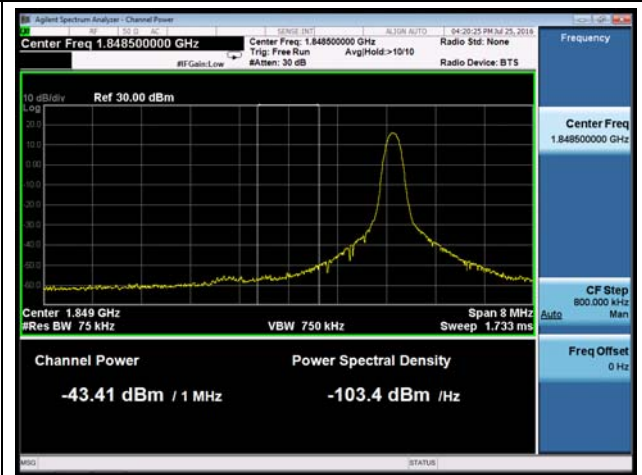
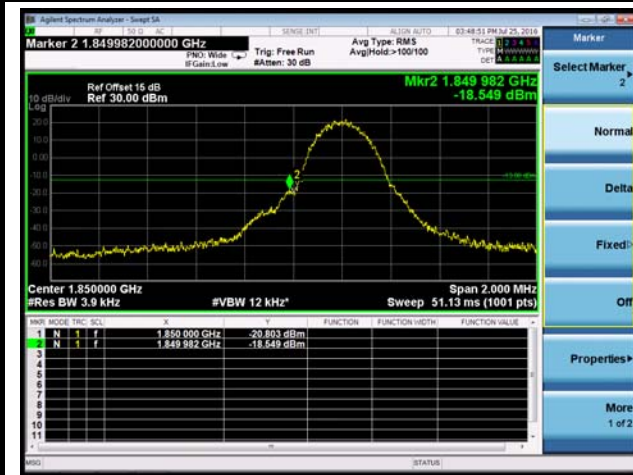


#### Channel 810 (1909.80MHz)

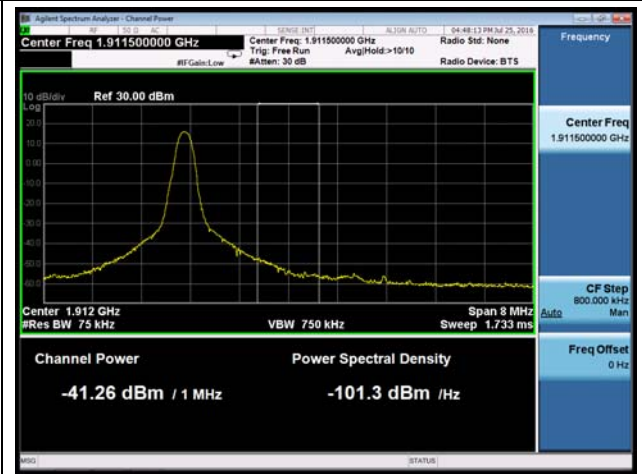
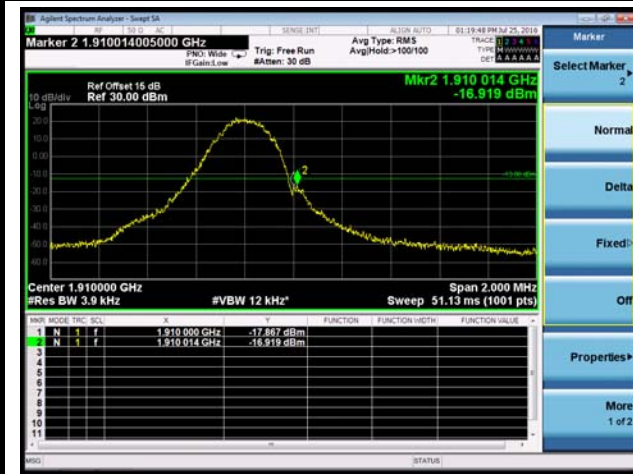



### Conducted Spurious Emission

#### Channel 512 (1850.20MHz)


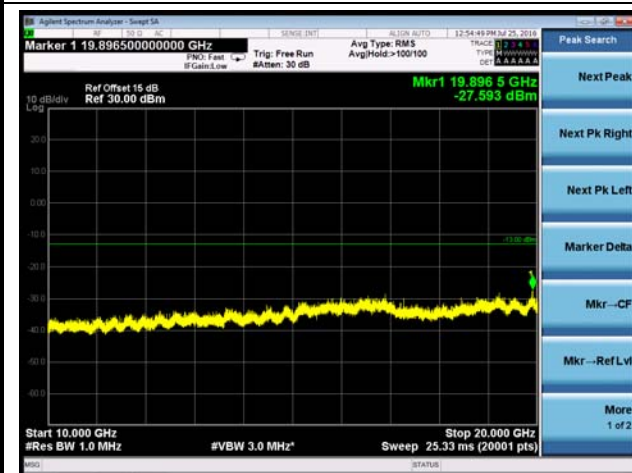
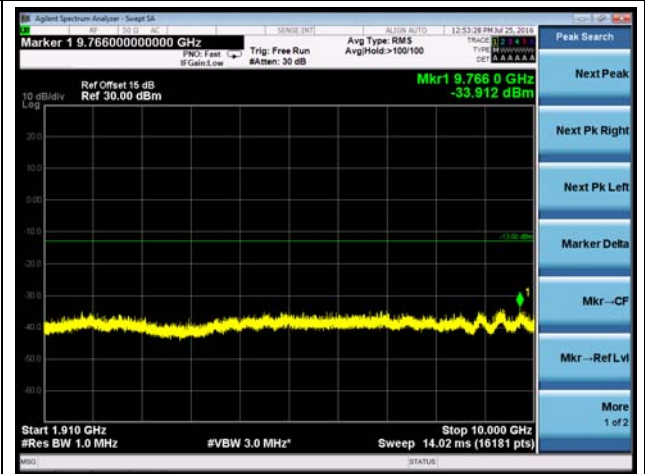
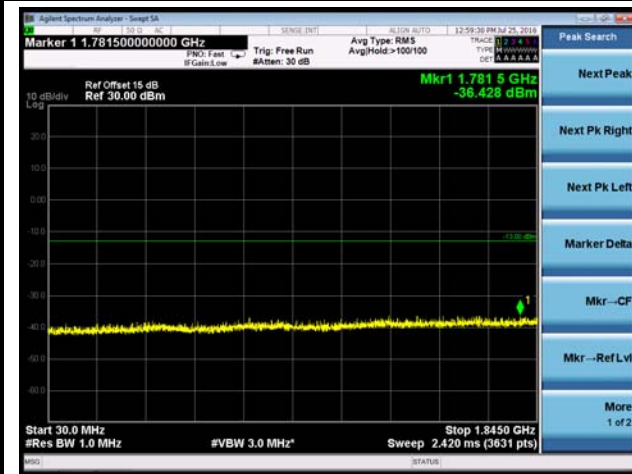


#### Channel 661 (1880.00MHz)

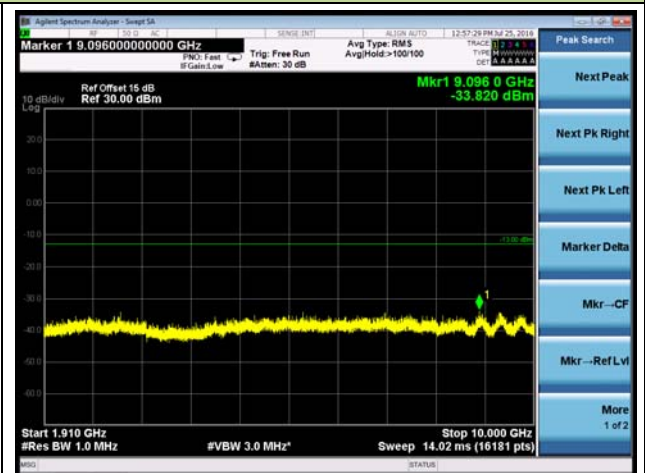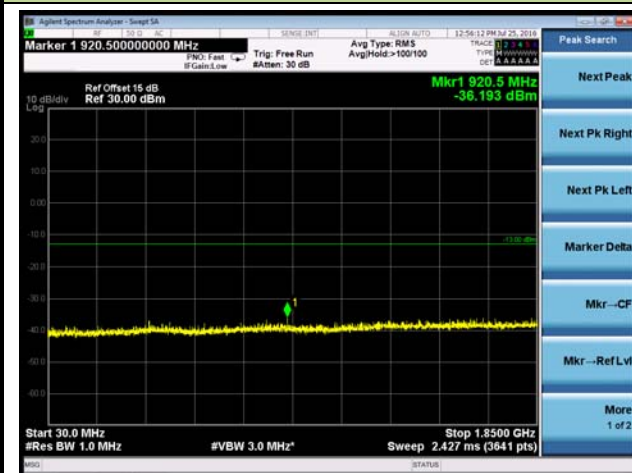

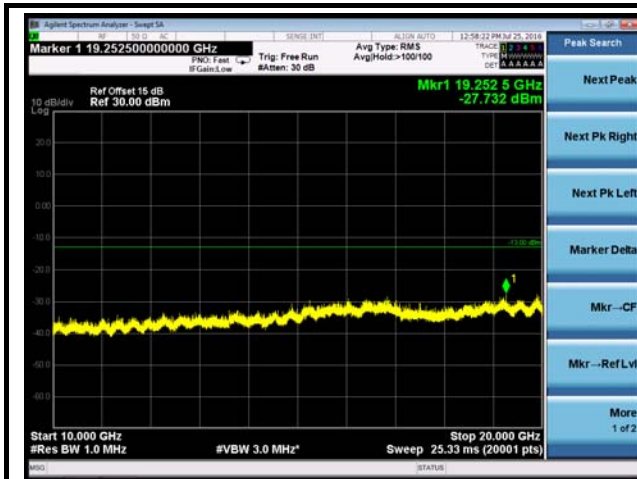


**Channel 810 (1909.80MHz)**

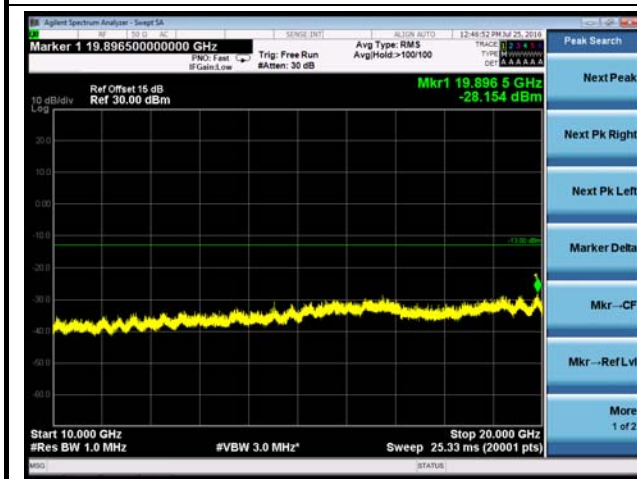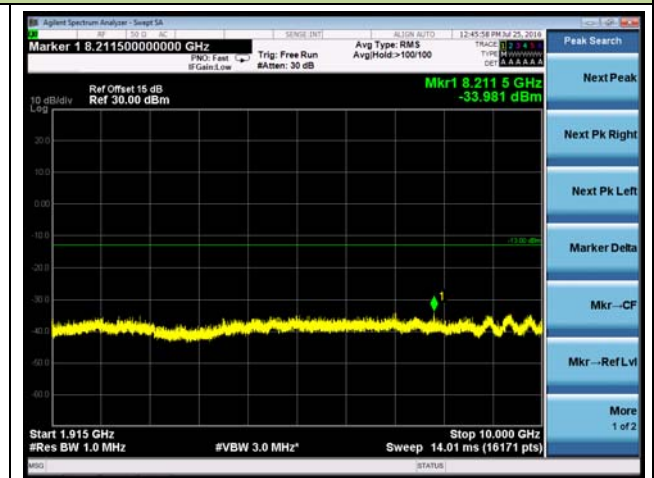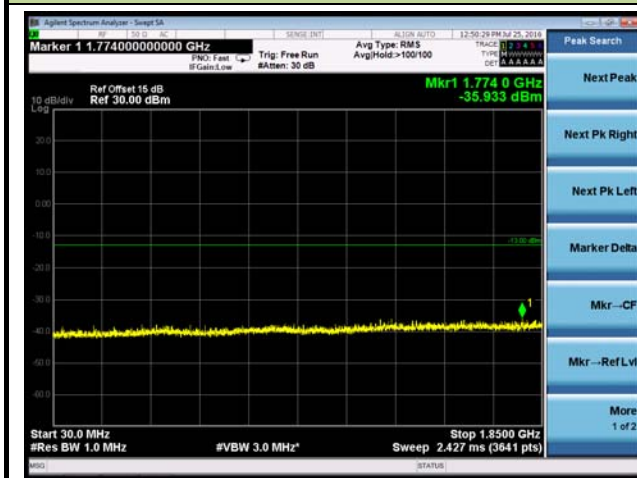





Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
EDGE850	128	824.20	8PSK	Pass
EDGE850	189	836.40	8PSK	Pass
EDGE850	251	848.80	8PSK	Pass

### Band Edge



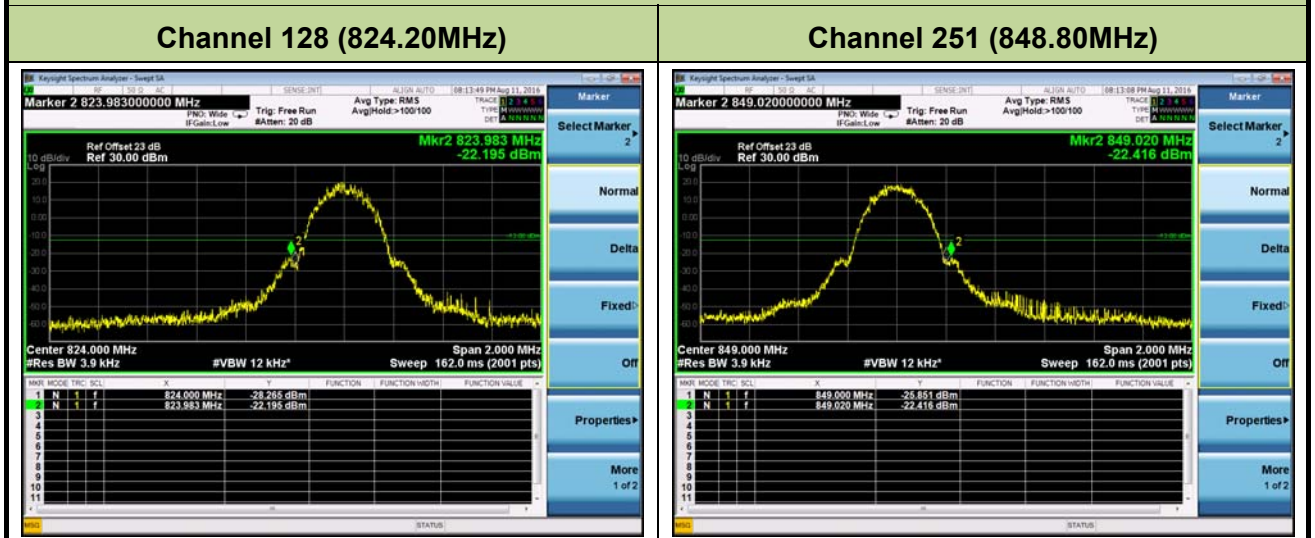


### Conducted Spurious Emission



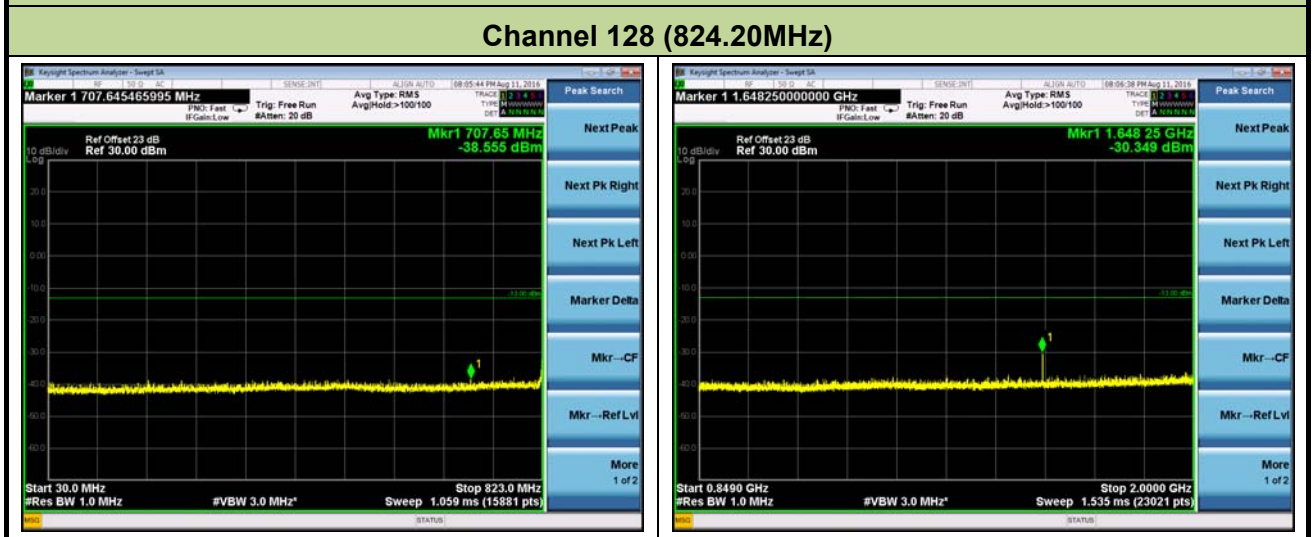


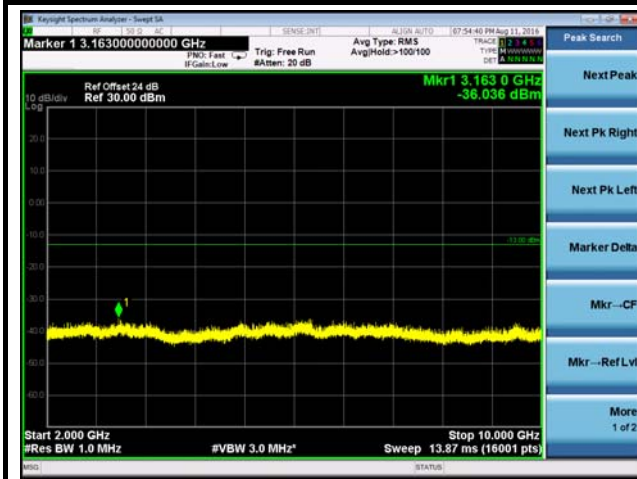

**Channel 189 (836.40MHz)**

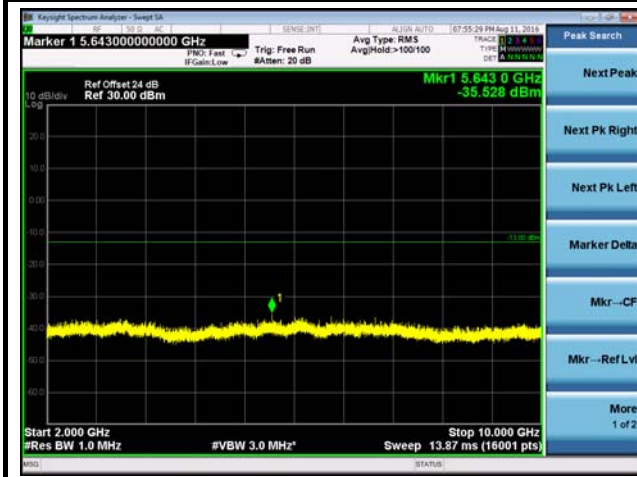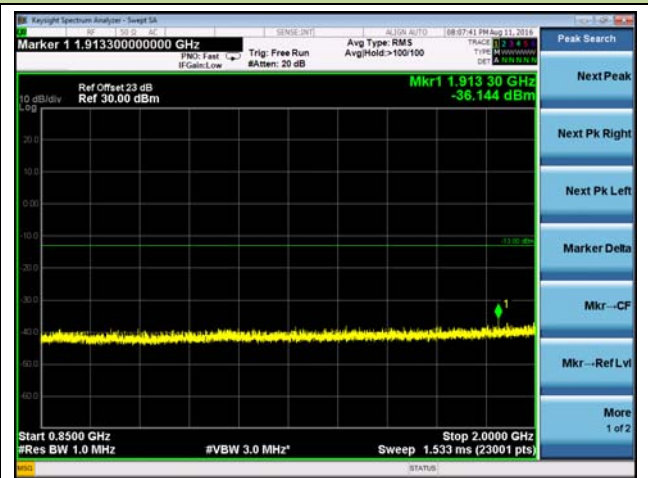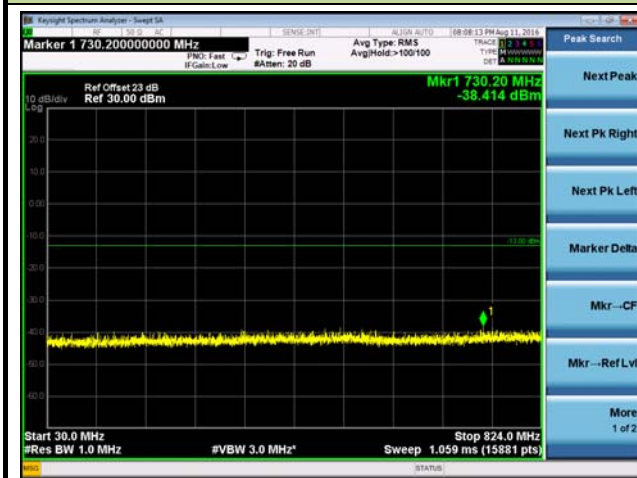

### Channel 251 (848.80MHz)

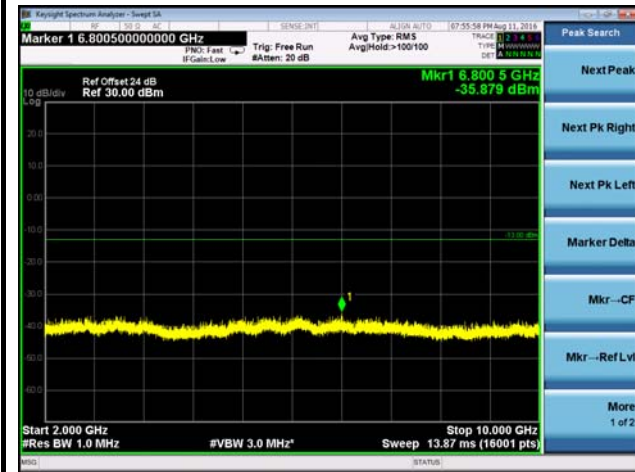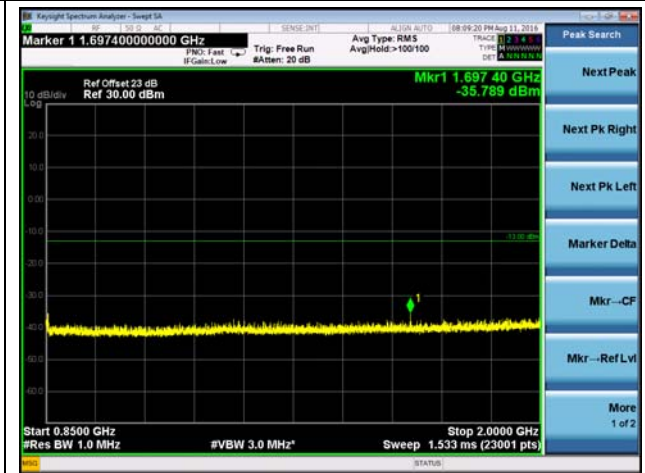
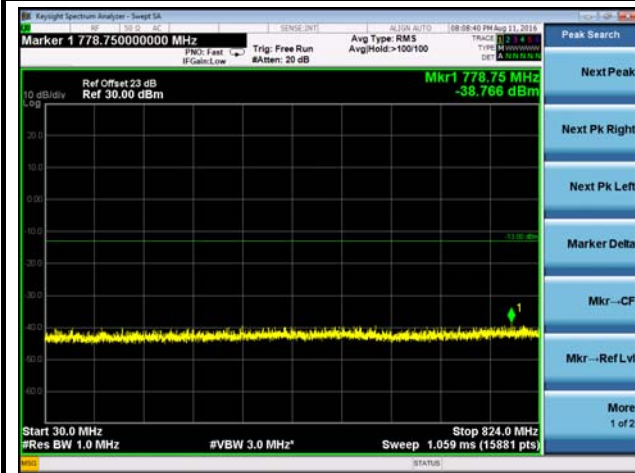






Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
EDGE1900	512	1850.20	8PSK	Pass
EDGE1900	661	1880.00	8PSK	Pass
EDGE1900	810	1909.80	8PSK	Pass

### Band Edge & 4MHz Span




#### Channel 512 (1850.20MHz)

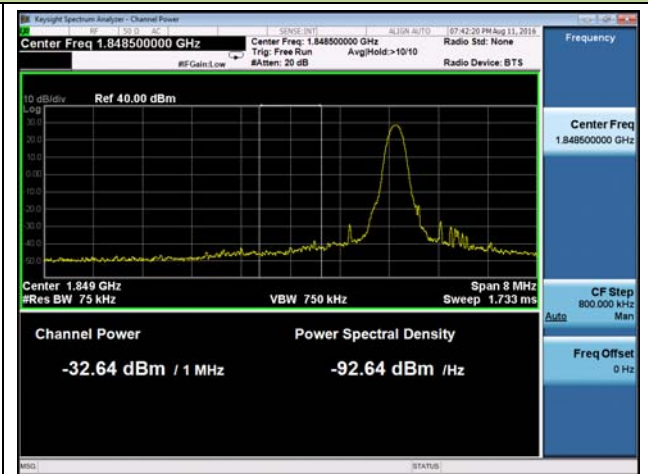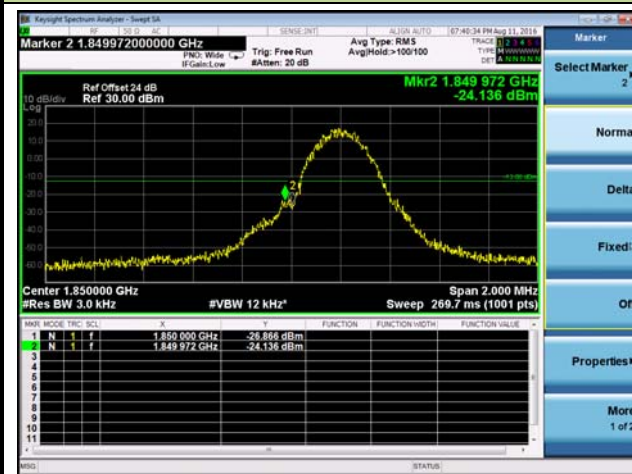



#### Channel 810 (1909.80MHz)

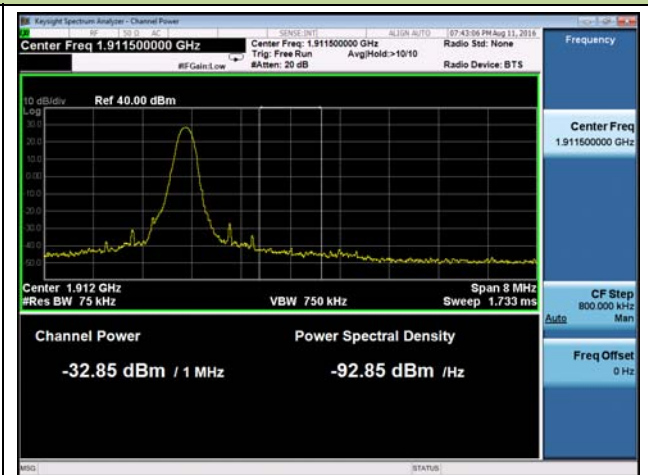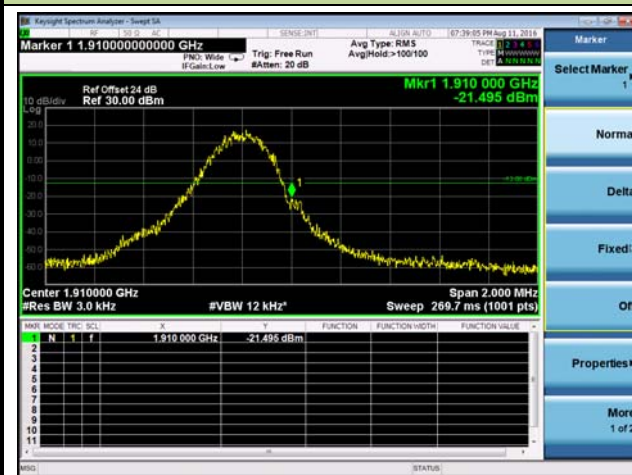



**Conducted Spurious Emission**  
**Channel 512 (1850.20MHz)**

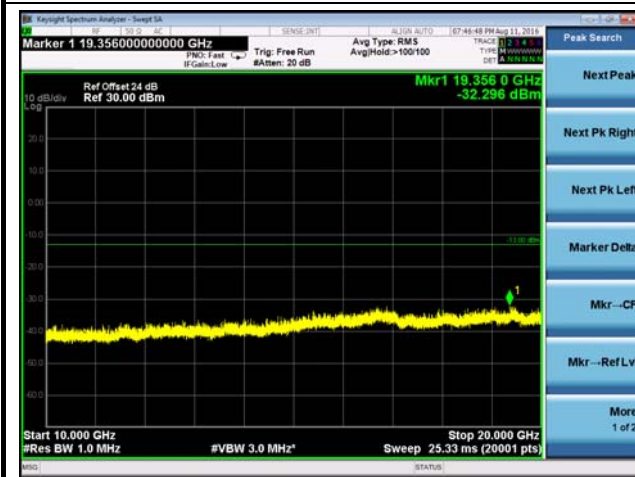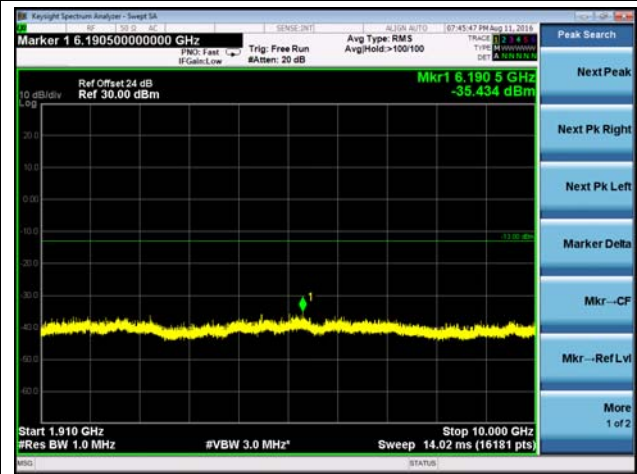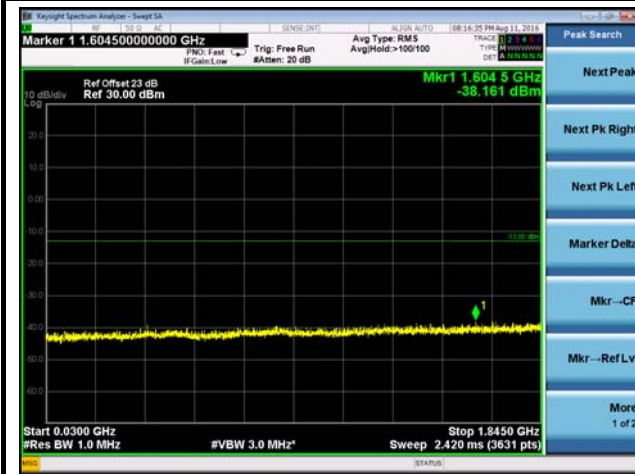


### Channel 661 (1880.00MHz)

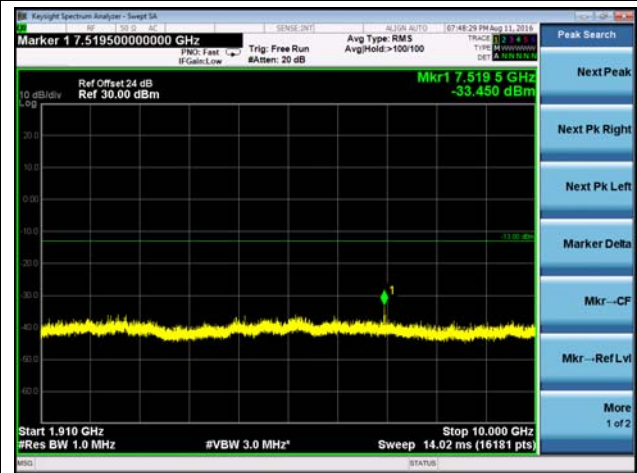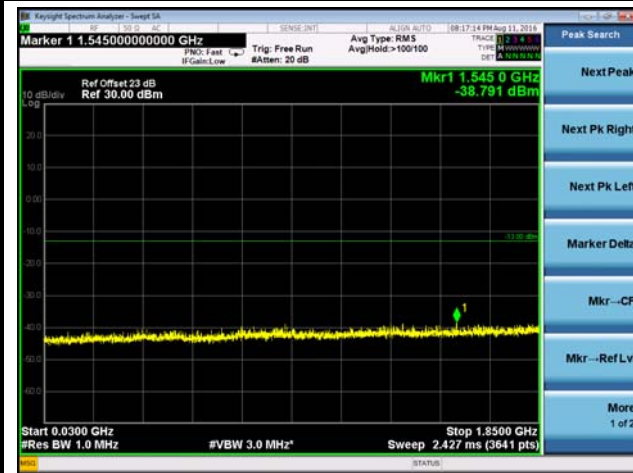

### Channel 810 (1909.80MHz)

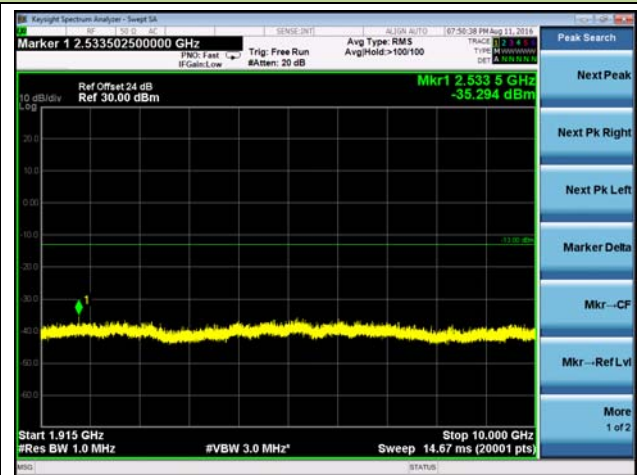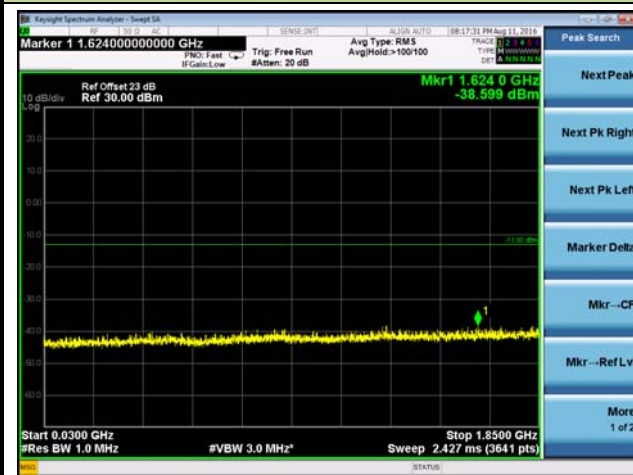

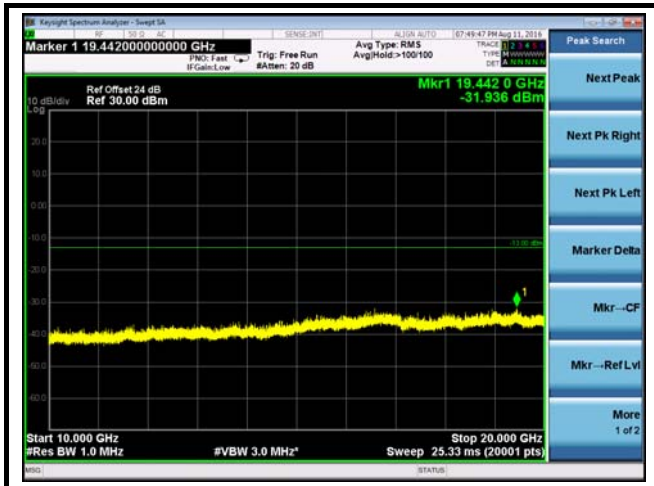

Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
WCDMA Band II	9262	1852.4	QPSK	Pass
WCDMA Band II	9400	1880.0	QPSK	Pass
WCDMA Band II	9538	1907.6	QPSK	Pass

### Band Edge & 4MHz Span

#### Channel 9262 (1852.4MHz)





#### Channel 9538 (1907.6MHz)








### Conducted Spurious Emission

#### Channel 9262 (1852.4MHz)

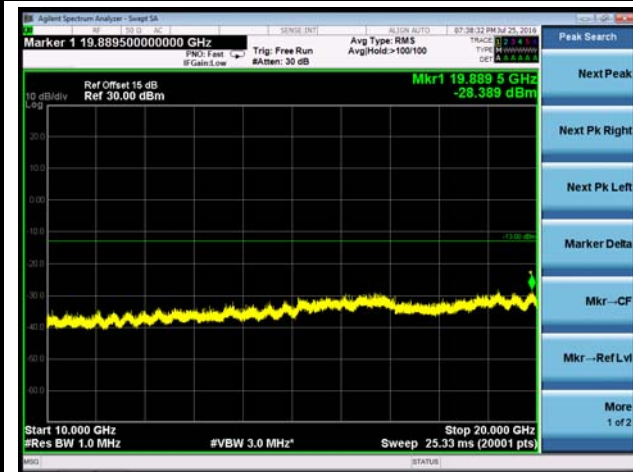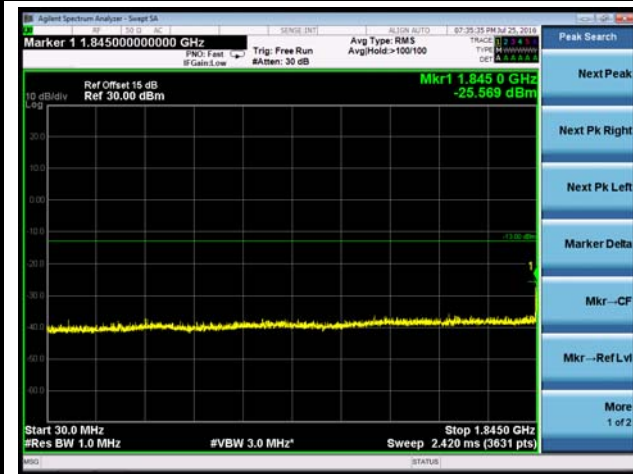

#### Channel 9400 (1880.0MHz)

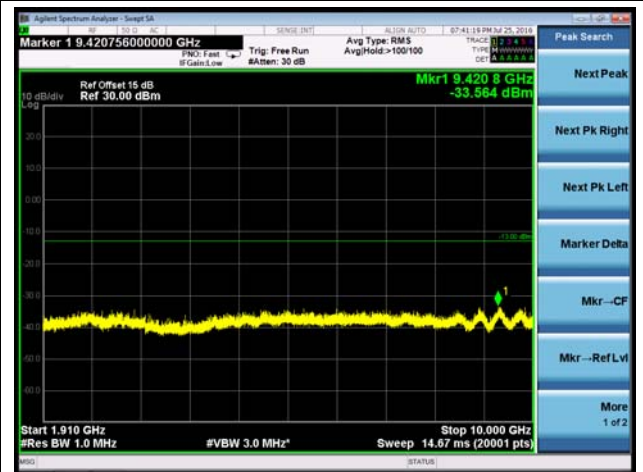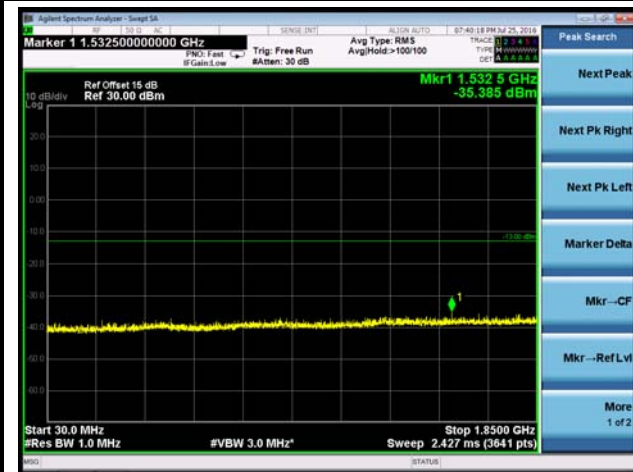

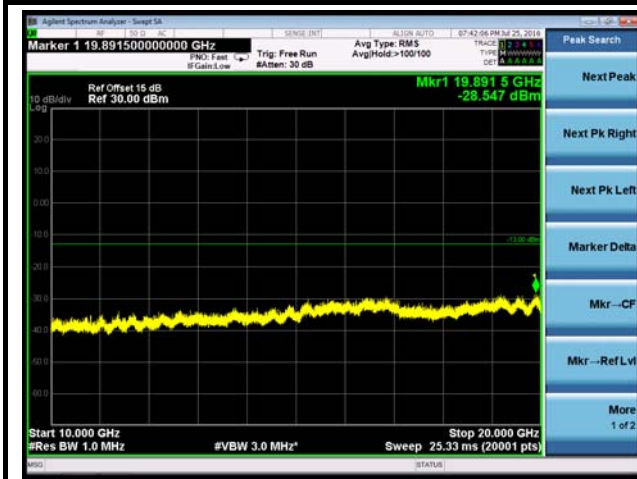

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

**Channel 9538 (1907.6MHz)**

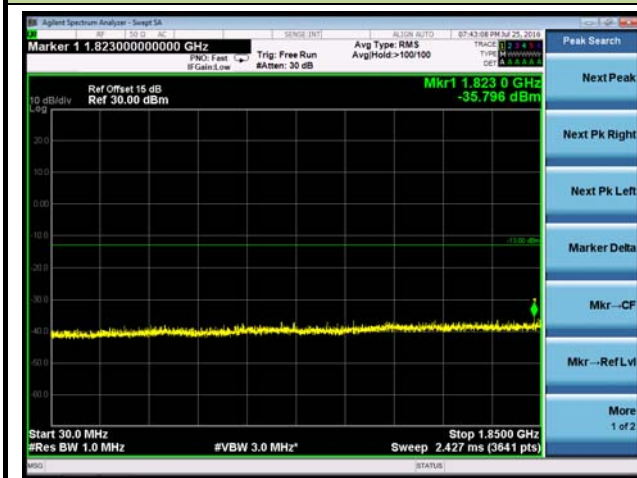

Peak Search

Next Peak

Next Pk Right


Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

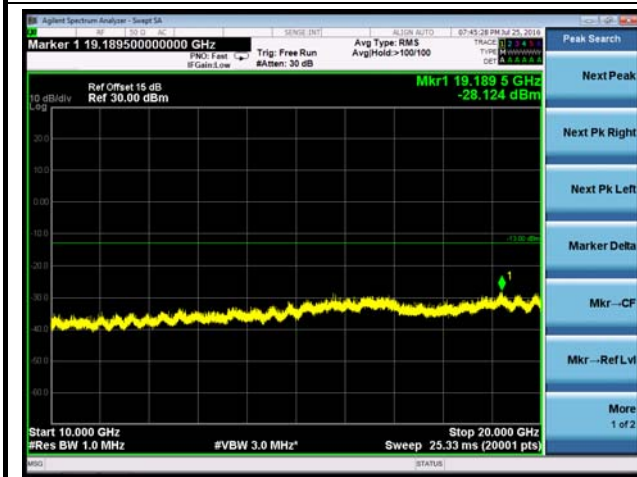

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta


Mkr--CF

Mkr--Ref Lvl


More  
1 of 2

Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
WCDMA Band V	4132	826.40	QPSK	Pass
WCDMA Band V	4182	836.40	QPSK	Pass
WCDMA Band V	4233	846.60	QPSK	Pass


### Band Edge

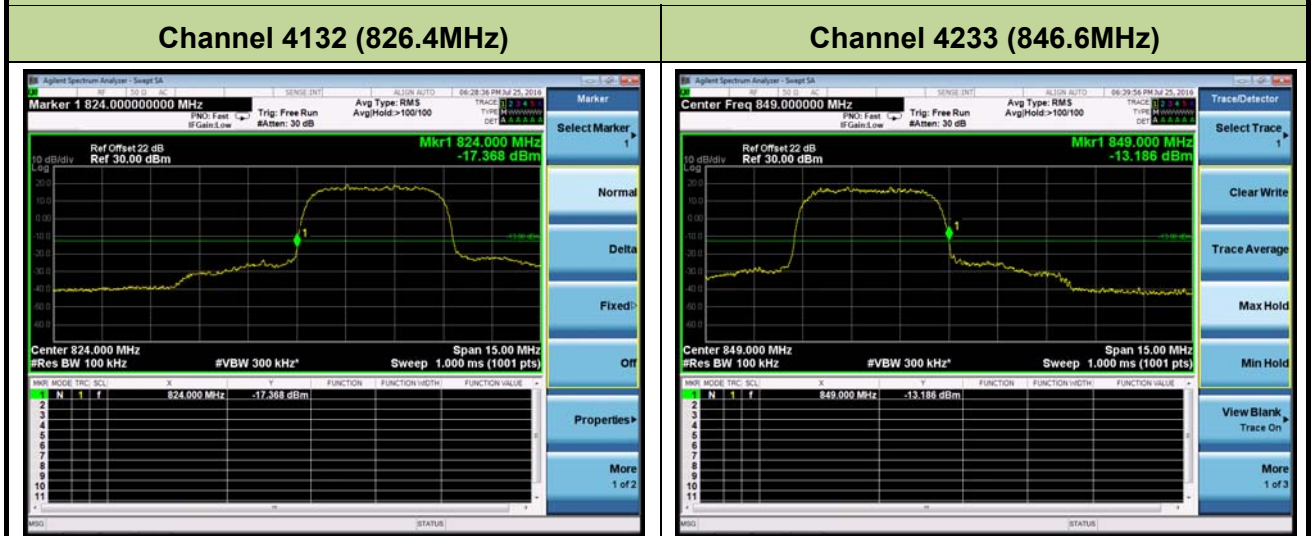





### Conducted Spurious Emission

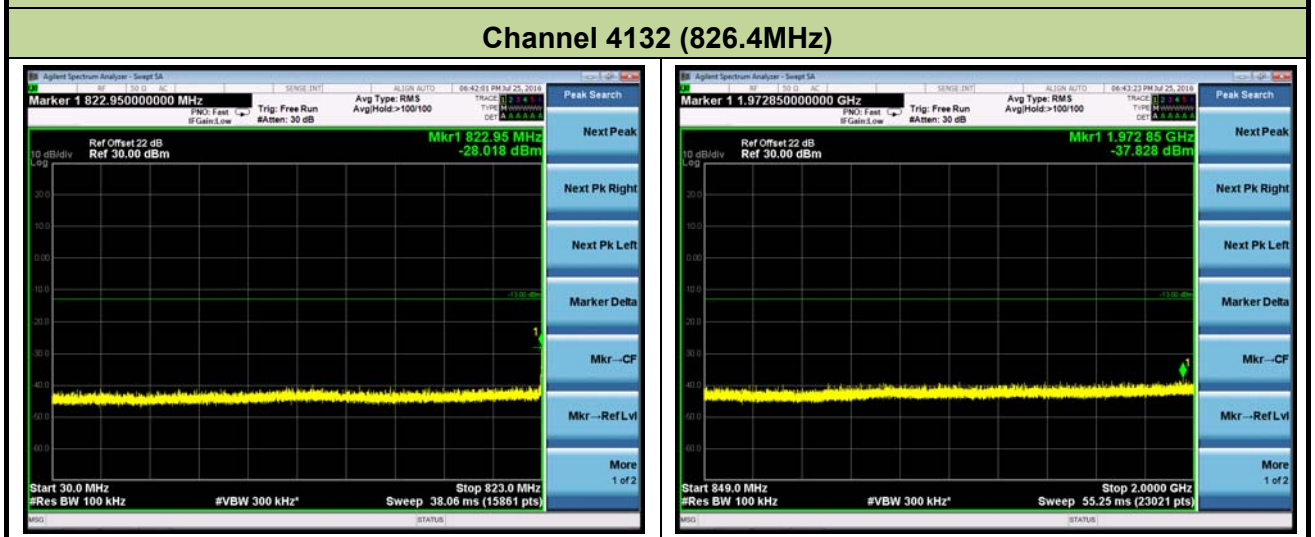







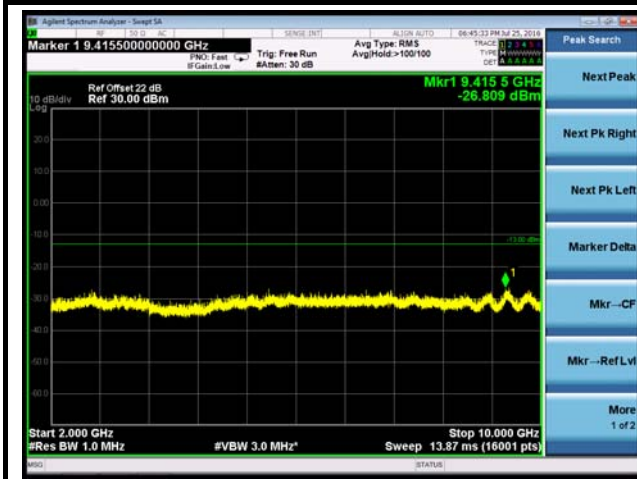

**Channel 4182 (836.4MHz)**

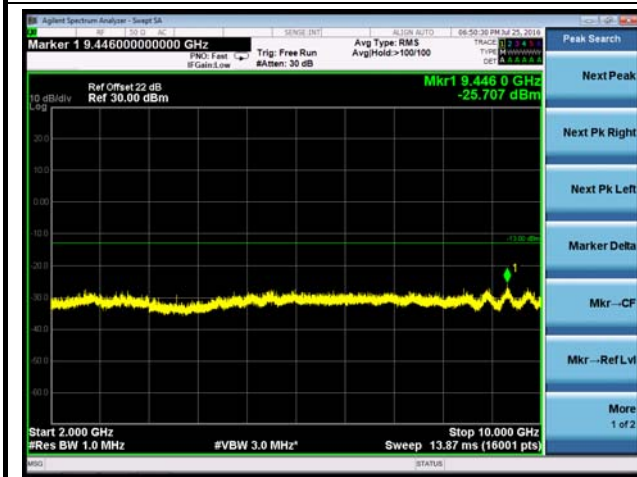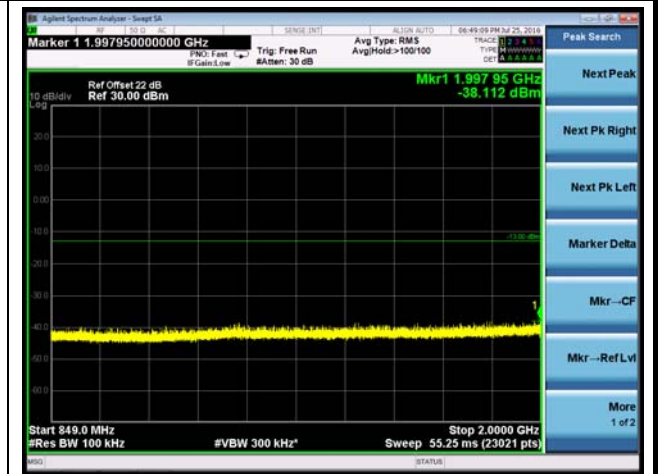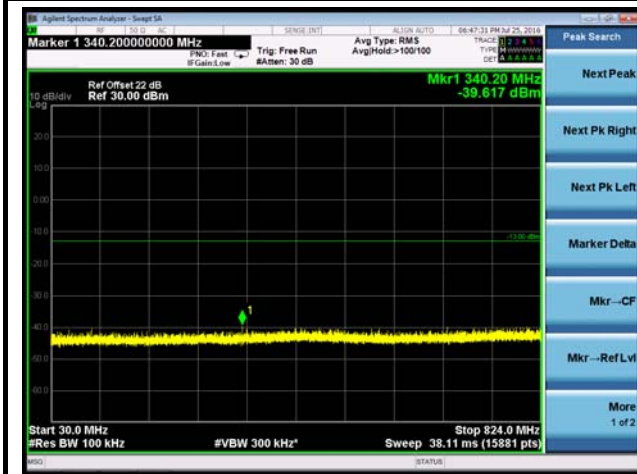

### Channel 4233 (846.6MHz)

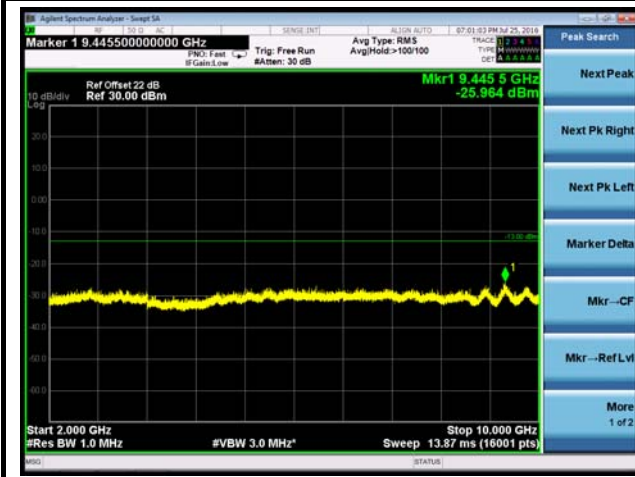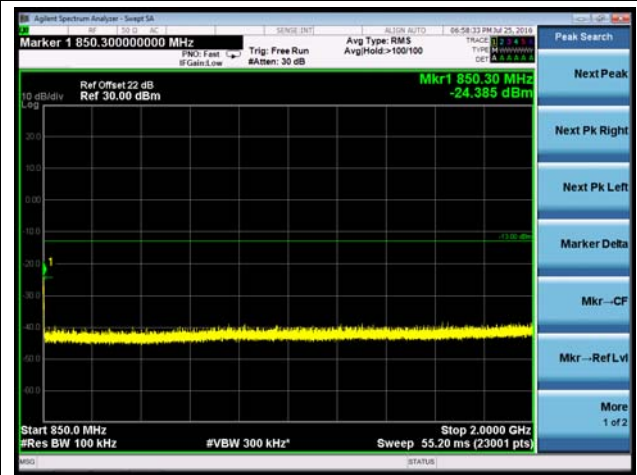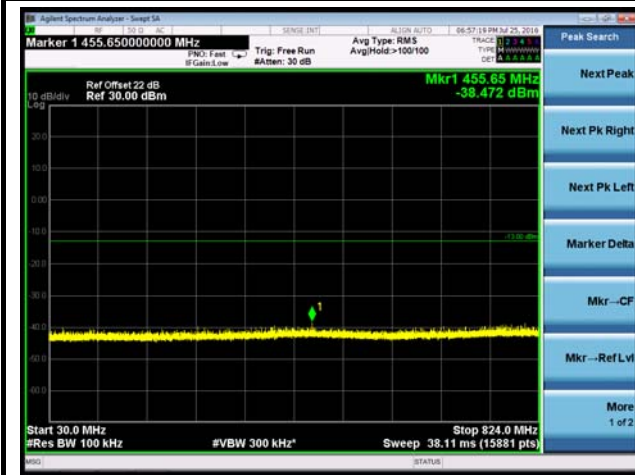

## 7.4. Conducted & Radiated Power and Radiated Spurious Emissions

### 7.4.1. Test Limit

#### Radiated Power

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

#### Radiated Spurious Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### 7.4.2. Test Procedure Used

KDB 971168 D01v02r02 - Section 7.0 & ANSI/TIA-603-D-2010


### 7.4.3. Test Setting

1. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
3. The output of the test antenna shall be connected to the measuring receiver.
4. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through  $360^\circ$  in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.


8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a substitution antenna.
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
16. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
17. Test site anechoic chamber refer to ANSI C63.4: 2009.

### 7.4.4. Test Setup

#### 30MHz ~ 1GHz Test Setup:

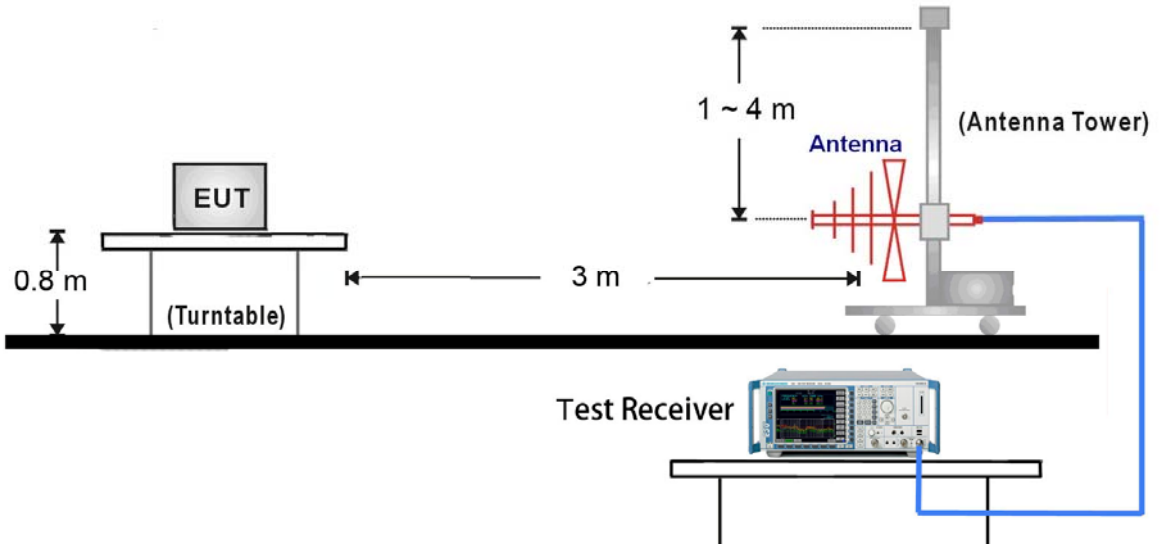

#### 1GHz ~ 20GHz Test Setup:

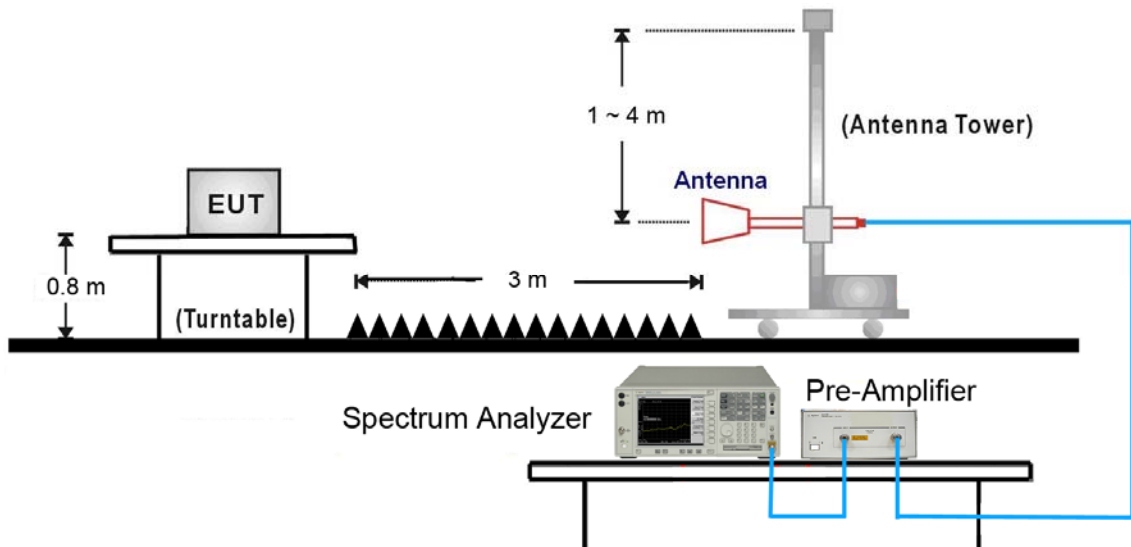

### 7.4.5. Test Result

#### Conducted Power

Mode	Frequency (MHz)	Avg. Burst Power (dBm)	Duty Cycle Factor (dB)	Frame Power (dBm)
GPRS850(1 Slot)	824.2	32.27	-9	23.27
	836.4	32.24	-9	23.24
	848.8	32.15	-9	23.15
GPRS850(2 Slot)	824.2	31.47	-6	25.47
	836.4	31.46	-6	25.46
	848.8	31.39	-6	25.39
GPRS850(3 Slot)	824.2	29.81	-4.25	25.56
	836.4	29.73	-4.25	25.48
	848.8	29.64	-4.25	25.39
GPRS850(4 Slot)	824.2	28.93	-3	25.93
	836.4	28.89	-3	25.89
	848.8	28.82	-3	25.82
EDGE850(1 Slot)	824.2	27.04	-9	18.04
	836.4	26.99	-9	17.99
	848.8	26.91	-9	17.91
EDGE850(2 Slot)	824.2	27.01	-6	21.01
	836.4	26.96	-6	20.96
	848.8	26.87	-6	20.87
EDGE850(3 Slot)	824.2	26.99	-4.25	22.74
	836.4	26.95	-4.25	22.70
	848.8	26.86	-4.25	22.61
EDGE850(4 Slot)	824.2	26.96	-3	23.96
	836.4	26.91	-3	23.91
	848.8	26.80	-3	23.80
GPRS1900(1 Slot)	1850.2	28.93	-9	19.93
	1880.0	29.14	-9	20.14
	1909.8	29.30	-9	20.30
GPRS1900(2 Slot)	1850.2	27.94	-6	21.94
	1880.0	28.15	-6	22.15
	1909.8	28.29	-6	22.29
GPRS1900(3 Slot)	1850.2	26.40	-4.25	22.15
	1880.0	26.67	-4.25	22.42

	1909.8	26.82	-4.25	22.57
GPRS1900(4 Slot)	1850.2	25.90	-3	22.90
	1880.0	26.15	-3	23.15
	1909.8	26.32	-3	23.32
EDGE1900(1 Slot)	1850.2	25.97	-9	16.97
	1880.0	26.20	-9	17.20
	1909.8	26.37	-9	17.37
EDGE1900(2 Slot)	1850.2	25.93	-6	19.93
	1880.0	26.20	-6	20.20
	1909.8	26.37	-6	20.37
EDGE1900(3 Slot)	1850.2	25.92	-4.25	21.67
	1880.0	26.18	-4.25	21.93
	1909.8	26.33	-4.25	22.08
EDGE1900(4 Slot)	1850.2	25.90	-3	22.90
	1880.0	26.16	-3	23.16
	1909.8	26.32	-3	23.32

Note: Frame Power (dBm) = Avg. Burst Power (dBm) + Duty Cycle Factor (dB)

Mode	3GPP Subtest	Conducted Power (dBm)			MPR
		Band II Channel			
		9262	9400	9538	
<b>WCDMA R99</b>	1	22.42	21.22	21.02	N/A
<b>Rel5 HSDPA</b>	1	22.41	21.25	21.01	0
	2	22.33	21.21	20.98	0
	3	22.28	21.14	20.79	0.5
	4	22.05	20.97	20.64	0.5
<b>Rel6 HSUPA</b>	1	22.42	21.24	20.98	0.0
	2	22.32	21.17	20.81	2.0
	3	22.20	21.05	20.58	1.0
	4	21.02	20.88	20.47	2.0
	5	20.82	20.67	20.21	0.0
Mode	3GPP Subtest	Conducted Power (dBm)			MPR
		Band V Channel			
		4132	4182	4233	
<b>WCDMA R99</b>	1	21.38	21.61	21.29	N/A
<b>Rel5 HSDPA</b>	1	21.39	21.62	21.28	0
	2	21.28	21.51	21.13	0
	3	21.09	21.48	20.98	0.5
	4	20.93	21.29	20.77	0.5
<b>Rel6 HSUPA</b>	1	21.38	21.58	21.30	0.0
	2	21.18	21.43	21.12	2.0
	3	20.99	21.28	20.97	1.0
	4	20.81	21.06	20.84	2.0
	5	20.68	20.89	20.55	0.0



### Radiated Power

#### GPRS850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)							
824.2	H	12.25	1.78	6.38	16.85	38.5	-21.65
824.2	V	25.15	1.78	6.52	29.89	38.5	-8.61
Middle Channel 189 (836.40MHz)							
836.4	H	12.33	1.80	6.15	16.68	38.5	-21.82
836.4	V	23.50	1.80	6.63	28.33	38.5	-10.17
High Channel 251 (848.80MHz)							
848.8	H	12.19	1.82	6.54	16.91	38.5	-21.59
848.8	V	25.00	1.82	6.8	29.98	38.5	-8.52

#### GPRS1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
1850.2	H	7.79	2.70	10.40	15.49	33.0	-17.51
1850.2	V	17.33	2.70	10.40	25.03	33.0	-7.97
Middle Channel 661 (1880.00MHz)							
1880.0	H	9.40	2.72	10.43	17.11	33.0	-15.89
1880.0	V	16.50	2.72	10.43	24.21	33.0	-8.79
High Channel 810 (1909.80MHz)							
1909.8	H	8.35	2.75	10.44	16.04	33.0	-16.96
1909.8	V	18.19	2.75	10.44	25.88	33.0	-7.12

## EDGE850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)							
824.2	H	7.43	1.78	6.38	12.03	38.5	-26.47
824.2	V	21.25	1.78	6.52	25.99	38.5	-12.51
Middle Channel 189 (836.40MHz)							
836.4	H	10.11	1.80	6.15	14.46	38.5	-24.04
836.4	V	19.75	1.80	6.63	24.58	38.5	-13.92
High Channel 251 (848.80MHz)							
848.8	H	10.43	1.82	6.54	15.15	38.5	-23.35
848.8	V	20.9	1.82	6.80	25.88	38.5	-12.62

## EDGE1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
1850.2	H	12.15	2.70	10.40	19.85	33.0	-13.15
1850.2	V	13.66	2.70	10.40	21.36	33.0	-11.64
Middle Channel 661 (1880.00MHz)							
1880.0	H	11.76	2.72	10.43	19.47	33.0	-13.53
1880.0	V	14.1	2.72	10.43	21.81	33.0	-11.19
High Channel 810 (1909.80MHz)							
1909.8	H	11.45	2.75	10.44	19.14	33.0	-13.86
1909.8	V	12.44	2.75	10.44	20.13	33.0	-12.87

## WCDMA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
1852.4	H	6.93	2.70	10.40	14.63	33.0	-18.37
1852.4	V	12.62	2.70	10.40	20.32	33.0	-12.68
Middle Channel 9400 (1880.00MHz)							
1880.0	H	6.45	2.72	10.43	14.16	33.0	-18.84
1880.0	V	12.54	2.72	10.43	20.25	33.0	-12.75
High Channel 9538 (1907.60MHz)							
1907.6	H	7.44	2.75	10.44	15.13	33.0	-17.87
1907.6	V	12.14	2.75	10.44	19.83	33.0	-13.17

## WCDMA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)							
826.4	H	10.66	1.79	6.50	15.37	38.5	-23.13
826.4	V	16.03	1.79	6.30	20.54	38.5	-17.96
Middle Channel 4182 (836.40MHz)							
836.4	H	10.49	1.80	6.63	15.32	38.5	-23.18
836.4	V	16.68	1.80	6.15	21.03	38.5	-17.47
High Channel 4233 (846.60MHz)							
846.6	H	9.91	1.82	6.80	14.89	38.5	-23.61
846.6	V	16.18	1.82	6.51	20.87	38.5	-17.63

## HSUPA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
1852.4	H	5.95	2.70	10.40	13.65	33.0	-19.35
1852.4	V	12.06	2.70	10.40	19.76	33.0	-13.24
Middle Channel 9400 (1880.00MHz)							
1880.0	H	5.86	2.72	10.43	13.57	33.0	-19.43
1880.0	V	12.12	2.72	10.43	19.83	33.0	-13.17
High Channel 9538 (1907.60MHz)							
1907.6	H	6.42	2.75	10.44	14.11	33.0	-18.89
1907.6	V	11.28	2.75	10.44	18.97	33.0	-14.03

## HSUPA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)							
826.4	H	10.15	1.79	6.50	14.86	38.5	-23.64
826.4	V	15.41	1.79	6.30	19.92	38.5	-18.58
Middle Channel 4182 (836.40MHz)							
836.4	H	9.75	1.80	6.63	14.58	38.5	-23.92
836.4	V	15.61	1.80	6.15	19.96	38.5	-18.54
High Channel 4233 (846.60MHz)							
846.6	H	9.17	1.82	6.80	14.15	38.5	-24.35
846.6	V	15.24	1.82	6.51	19.93	38.5	-18.57

## HSDPA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
1852.4	H	6.31	2.70	10.40	14.01	33.0	-18.99
1852.4	V	12.33	2.70	10.40	20.03	33.0	-12.97
Middle Channel 9400 (1880.00MHz)							
1880.0	H	6.25	2.72	10.43	13.96	33.0	-19.04
1880.0	V	12.27	2.72	10.43	19.98	33.0	-13.02
High Channel 9538 (1907.60MHz)							
1907.6	H	6.30	2.75	10.44	13.99	33.0	-19.01
1907.6	V	11.77	2.75	10.44	19.46	33.0	-13.54

## HSDPA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)							
826.4	H	9.86	1.79	6.50	14.57	38.5	-23.93
826.4	V	15.65	1.79	6.30	20.16	38.5	-18.34
Middle Channel 4182 (836.40MHz)							
836.4	H	10.03	1.80	6.63	14.86	38.5	-23.64
836.4	V	15.71	1.80	6.15	20.06	38.5	-18.44
High Channel 4233 (846.60MHz)							
846.6	H	9.30	1.82	6.80	14.28	38.5	-24.22
846.6	V	15.18	1.82	6.51	19.87	38.5	-18.63

## NOTES:

- ERP (dBm) / EIRP (dBm) = SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)
- This device was tested under all configurations and the highest power is reported in GPRS mode. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA and GPRS/EDGE capabilities. For WCDMA and HSPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps rate.

3. This unit was tested with its standard adapter.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found in the EUT in the H positioning. The data reported in the table above was measured in this test setup.

### Radiated Spurious Emission

GPRS850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 128 (824.20MHz)</b>							
1646.0	V	-50.76	0.47	9.76	-41.47	-13	-28.47
3295.0	V	-46.15	0.69	12.75	-34.09	-13	-21.09
1646.0	H	-44.27	0.47	9.76	-34.98	-13	-21.98
3295.0	H	-44.10	0.69	12.75	-32.04	-13	-19.04
<b>Middle Channel 189 (836.40MHz)</b>							
3346.0	V	-48.31	0.69	12.86	-36.14	-13	-23.14
7528.0	V	-47.06	1.04	11.30	-36.80	-13	-23.80
1671.5	H	-47.10	0.48	9.93	-37.65	-13	-24.65
3346.0	H	-43.58	0.69	12.86	-31.41	-13	-18.41
<b>High Channel 251 (848.80MHz)</b>							
3397.0	V	-49.89	0.69	12.96	-37.62	-13	-24.62
7638.5	V	-49.49	1.07	11.46	-39.11	-13	-26.11
1697.0	H	-48.03	0.48	10.11	-38.40	-13	-25.40
3397.0	H	-46.74	0.69	12.96	-34.47	-13	-21.47

Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2.  $ERP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBd)}$



## GPRS1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
7400.5	V	-25.08	1.02	11.02	-15.08	-13	-2.08
9253.5	V	-37.70	1.14	11.70	-27.13	-13	-14.13
7400.5	H	-25.16	1.02	11.02	-15.16	-13	-2.16
9253.5	H	-32.51	1.14	11.70	-21.94	-13	-8.94
Middle Channel 661 (1880.00MHz)							
7519.5	V	-25.15	1.05	11.28	-14.91	-13	-1.91
9398.0	V	-30.01	1.12	11.59	-19.54	-13	-6.54
7519.5	H	-24.52	1.05	11.28	-14.28	-13	-1.28
9398.0	H	-33.79	1.12	11.59	-23.32	-13	-10.32
High Channel 810 (1909.80MHz)							
7638.5	V	-27.78	1.08	11.46	-17.39	-13	-4.39
9551.0	V	-29.87	1.16	11.85	-19.17	-13	-6.17
7638.5	H	-26.67	1.08	11.46	-16.28	-13	-3.28
9551.0	H	-34.18	1.16	11.85	-23.48	-13	-10.48

## Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2.  $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

## EDGE850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)							
3295.0	V	-49.77	0.69	12.75	-37.71	-13	-24.71
7417.5	V	-52.43	1.04	11.05	-42.42	-13	-29.42
3295.0	H	-47.44	0.69	12.75	-35.38	-13	-22.38
7417.5	H	-49.81	1.04	11.05	-39.80	-13	-26.80
Middle Channel 189 (836.40MHz)							
3346.0	V	-50.27	0.69	12.86	-38.10	-13	-25.10
7528.0	V	-51.39	1.04	11.30	-41.13	-13	-28.13
3346.0	H	-47.78	0.69	12.86	-35.61	-13	-22.61
7528.0	H	-49.21	1.04	11.30	-38.95	-13	-25.95
High Channel 251 (848.80MHz)							
3397.0	V	-52.39	0.69	12.96	-40.12	-13	-27.12
7638.5	V	-52.24	1.08	11.46	-41.85	-13	-28.85
3397.0	H	-49.08	0.69	12.96	-36.81	-13	-23.81
7638.5	H	-49.08	1.08	11.46	-38.69	-13	-25.69

## Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2.  $ERP \text{ (dBm)} = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBd)}$

## EDGE1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
7400.5	V	-24.26	1.02	11.02	-14.26	-13	-1.26
9253.5	V	-37.40	1.14	11.70	-26.83	-13	-13.83
7400.5	H	-24.83	1.02	11.02	-14.83	-13	-1.83
9253.5	H	-34.35	1.14	11.70	-23.78	-13	-10.78
Middle Channel 661 (1880.00MHz)							
7519.5	V	-24.77	1.05	11.28	-14.53	-13	-1.53
9398.0	V	-33.76	1.12	11.59	-23.29	-13	-10.29
7519.5	H	-24.67	1.05	11.28	-14.43	-13	-1.43
9398.0	H	-38.05	1.12	11.59	-27.58	-13	-14.58
High Channel 810 (1909.80MHz)							
7638.5	V	-29.64	1.08	11.93	-18.78	-13	-5.78
9551.0	V	-37.13	1.16	11.85	-26.43	-13	-13.43
7638.5	H	-25.04	1.08	11.93	-14.18	-13	-1.18
9551.0	H	-32.69	1.16	11.85	-21.99	-13	-8.99

## Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2.  $EIRP (dBm) = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBi)}$

## WCDMA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
5556.0	V	-57.29	0.89	13.15	-45.03	-13	-32.03
7409.0	V	-50.34	1.03	11.03	-40.34	-13	-27.34
3703.0	H	-52.12	0.74	12.69	-40.16	-13	-27.16
5556.0	H	-52.83	0.89	13.15	-40.57	-13	-27.57
Middle Channel 9400 (1880.00MHz)							
5641.0	V	-58.79	0.91	13.14	-46.56	-13	-33.56
7519.5	V	-54.59	1.05	11.28	-44.35	-13	-31.35
3754.0	H	-62.70	0.74	12.72	-50.72	-13	-37.72
5641.0	H	-56.53	0.91	13.14	-44.30	-13	-31.30
High Channel 9538 (1907.60MHz)							
7638.5	V	-47.24	1.08	11.46	-36.85	-13	-23.85
10885.5	V	-49.52	1.27	11.55	-39.23	-13	-26.23
5726.0	H	-52.09	0.92	13.11	-39.90	-13	-26.90
7630.0	H	-51.14	1.09	11.46	-40.77	-13	-27.77

## Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2.  $ERP \text{ (dBm)} = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBd)}$

## WCDMA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
<b>Low Channel 4132 (826.40MHz)</b>							
1654.5	V	-59.59	0.47	9.82	-50.24	-13	-37.24
2445.0	V	-63.52	0.59	10.38	-53.14	-13	-40.14
1654.5	H	-57.01	0.47	9.82	-47.66	-13	-34.66
2445.0	H	-68.36	0.59	10.38	-57.98	-13	-44.98
<b>Middle Channel 4182 (836.40MHz)</b>							
1671.5	V	-63.66	0.48	9.93	-54.21	-13	-41.21
1952.4	V	-66.54	0.52	10.40	-56.14	-13	-43.14
1671.5	H	-61.63	0.48	9.93	-52.18	-13	-39.18
1952.4	H	-58.54	0.52	10.40	-48.14	-13	-35.14
<b>High Channel 4233 (846.60MHz)</b>							
1688.5	V	-56.17	0.48	10.05	-46.60	-13	-33.60
2445.0	V	-62.11	0.59	10.38	-52.32	-13	-39.32
1688.5	H	-55.61	0.48	10.05	-46.04	-13	-33.04
2538.5	H	-62.91	0.60	10.67	-52.84	-13	-39.84

## Note:

3. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
4.  $ERP \text{ (dBm)} = SG \text{ Reading (dBm)} - Cable \text{ Loss (dB)} + Substitute \text{ Antenna Gain (dBd)}$

## 7.5. Peak-Average Ratio


### 7.5.1. Test Limit

The transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

### 7.5.2. Test Procedure

KDB 971168 D01v02r02 - Section 5.7 & ANSI/TIA-603-D-2010

### 7.5.3. Test Setup

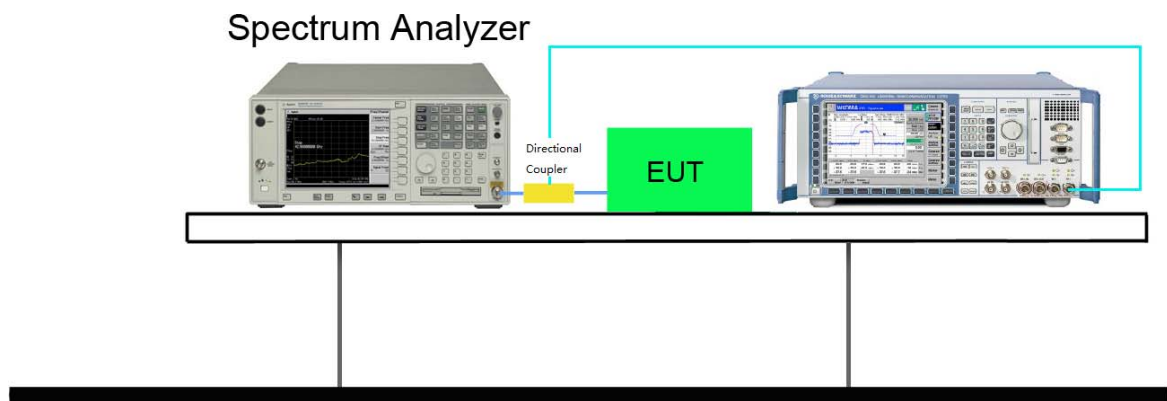



**7.5.4. Test Result**

Test Item	Peak-Average Ratio	Test Engineer	Roy Cheng
Test Site	TR3	Test Date	2016/07/25



## 7.6. Frequency Stability Under Temperature & Voltage Variations

### 7.6.1. Test Limit


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	$< \pm 2.5 \text{ ppm}$
-------	-------------------------

### 7.6.2. Test Procedure

KDB 971168 D01v02r02 - Section 9.0 & ANSI/TIA-603-D-2010

### 7.6.3. Test Setup

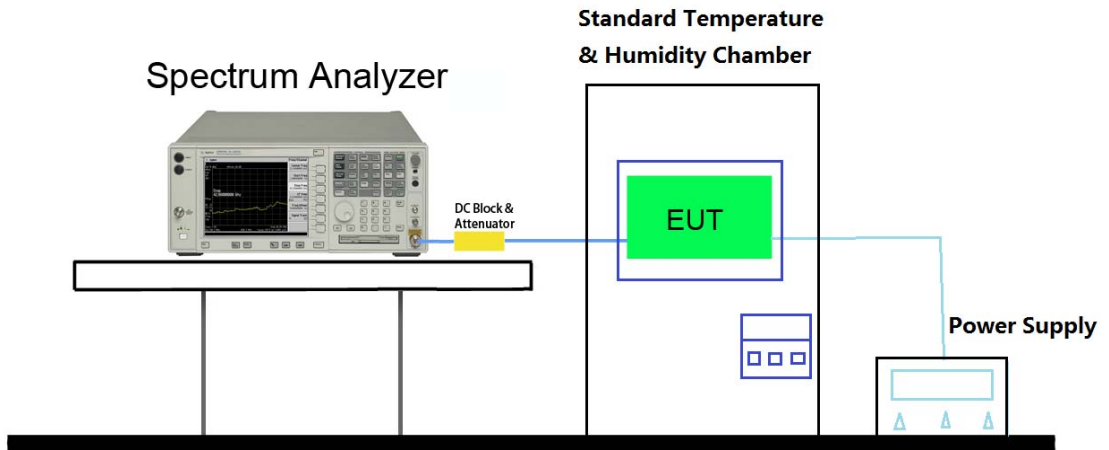

**7.6.4. Test Result**

Operating Frequency	836,400,000 Hz
Channel	189
Test Mode	GPRS850
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,400,000	64	0.00000765
100%		-30	836,400,000	-69	-0.00000825
100%		-20	836,400,000	72	0.00000861
100%		-10	836,400,000	71	0.00000849
100%		0	836,400,000	-56	-0.00000670
100%		+10	836,400,000	-47	-0.00000562
100%		+20	836,400,000	68	0.00000813
100%		+30	836,400,000	-59	-0.00000705
100%		+40	836,400,000	64	0.00000765
100%		+50	836,400,000	69	0.00000825
115%		4.2	+20	836,400,000	-53
BAT.ENDPOINT	3.6	+20	836,400,000	51	0.00000610

Operating Frequency	1,880,000,000 Hz
Channel	661
Test Mode	GPRS1900
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,000	38	0.00000202
100%		-30	1,880,000,000	59	0.00000314
100%		-20	1,880,000,000	-63	-0.00000335
100%		-10	1,880,000,000	51	0.00000271
100%		0	1,880,000,000	69	0.00000367
100%		+10	1,880,000,000	-57	-0.00000303
100%		+20	1,880,000,000	46	0.00000245
100%		+30	1,880,000,000	59	0.00000314
100%		+40	1,880,000,000	-63	-0.00000335
100%		+50	1,880,000,000	-48	-0.00000255
115%		4.2	+20	1,880,000,000	57
BAT.ENDPOINT	3.6	+20	1,880,000,000	49	0.00000261

Operating Frequency	836,400,000 Hz
Channel	189
Test Mode	EDGE850
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,400,000	69	0.00000825
100%		-30	836,400,000	53	0.00000634
100%		-20	836,400,000	69	0.00000825
100%		-10	836,400,000	-61	-0.00000729
100%		0	836,400,000	58	0.00000693
100%		+10	836,400,000	73	0.00000873
100%		+20	836,400,000	-72	-0.00000861
100%		+30	836,400,000	53	0.00000634
100%		+40	836,400,000	62	0.00000741
100%		+50	836,400,000	-57	-0.00000681
115%		4.2	+20	836,400,000	62
BAT.ENDPOINT	3.6	+20	836,400,000	58	0.00000693

Operating Frequency	1,880,000,000 Hz
Channel	661
Test Mode	EDGE1900
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,000	62	0.00000330
100%		-30	1,880,000,000	58	0.00000309
100%		-20	1,880,000,000	-51	-0.00000271
100%		-10	1,880,000,000	69	0.00000367
100%		0	1,880,000,000	53	0.00000282
100%		+10	1,880,000,000	49	0.00000261
100%		+20	1,880,000,000	-63	-0.00000335
100%		+30	1,880,000,000	55	0.00000293
100%		+40	1,880,000,000	-71	-0.00000378
100%		+50	1,880,000,000	69	0.00000367
115%		4.2	+20	1,880,000,000	58
BAT.ENDPOINT	3.6	+20	1,880,000,000	62	0.00000330



Operating Frequency	1,880,000,000 Hz
Channel	9400
Test Mode	WCDMA Band II
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,000	59	0.00000314
100%		-30	1,880,000,000	63	0.00000335
100%		-20	1,880,000,000	-59	-0.00000314
100%		-10	1,880,000,000	72	0.00000383
100%		0	1,880,000,000	64	0.00000340
100%		+10	1,880,000,000	62	0.00000330
100%		+20	1,880,000,000	-57	-0.00000303
100%		+30	1,880,000,000	59	0.00000314
100%		+40	1,880,000,000	62	0.00000330
100%		+50	1,880,000,000	65	0.00000346
115%		4.2	+20	1,880,000,000	-69
BAT.ENDPOINT	3.6	+20	1,880,000,000	58	0.00000309

Operating Frequency	836,400,000 Hz
Channel	4182
Test Mode	WCDMA Band V
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,400,000	64	0.00000765
100%		-30	836,400,000	51	0.00000610
100%		-20	836,400,000	73	0.00000873
100%		-10	836,400,000	-72	-0.00000861
100%		0	836,400,000	59	0.00000705
100%		+10	836,400,000	-61	-0.00000729
100%		+20	836,400,000	65	0.00000777
100%		+30	836,400,000	-49	-0.00000586
100%		+40	836,400,000	58	0.00000693
100%		+50	836,400,000	-71	-0.00000849
115%		4.2	+20	836,400,000	-72
BAT.ENDPOINT	3.6	+20	836,400,000	-53	-0.00000634

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Smart Phone** compliance with all the requirements of Parts 2, 22, 24 of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_