


封面


Panoramic Vision

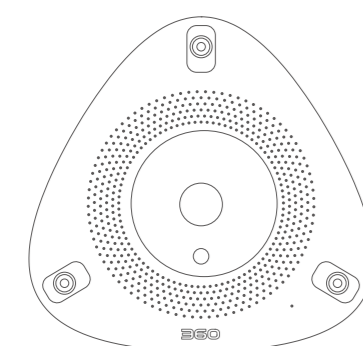

360 Smart Camera User Manual

360 Smart Camera


Product Appearance

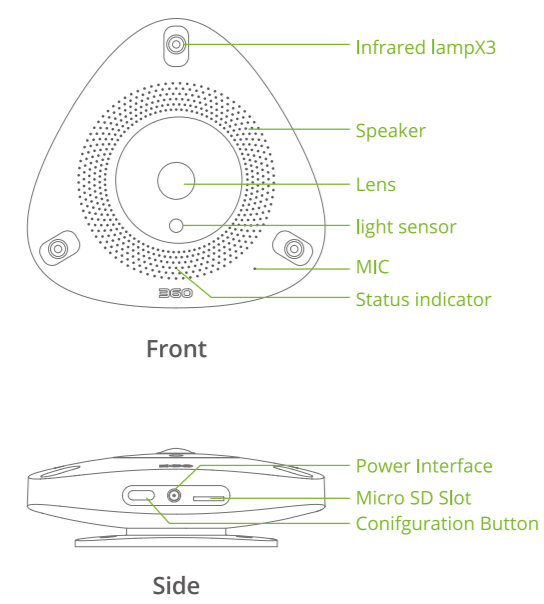

User Guide

1) Connect with Power

1. Insert Power Line into Power interface which behind the camera. When the status indicator lamp turns green, shows the camera start working.

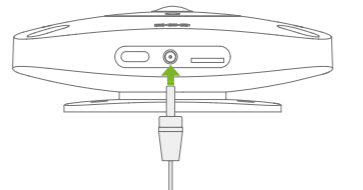

Note: Please use original power adapter.

2. Please make sure your phone has connected to internet.
3. Please make sure to hang up on the wall after finishing connecting the camera.

2) Download 360 Smart Camera APP

Scan the QRcode below, click" Download App" to install.



3) Add camera

1) Open 360 Smart Camera APP, click "register" button and start register an account. If you already have an account, login directly.
2) After login, click "+" button which on the right-top corner of screen. Click on "connect to my camera" and follow the voice prompts to complete.



Note: The issues mentioned below may cause the network disconnection problem, suggest to avoid those items.


- During acoustic matching, please keep away from noisy environment.
- Please turn off MAC Address Filter function in WiFi router, otherwise the camera may not be connected successfully.

- Make sure the camera connect to 2.4GHz.
 - The camera temporarily not supports WPA/WPA2 enterprise-class WiFi, please select other options.
 - Suggest connecting nonbridging contact WiFi.
- 3) After adding successfully, start your discovery.

4) Fix camera

Step 1: Rotate and separate the Camera and Base.
Step 2: Mount the camera on the wall with 3M Tape and 3 screws.
Step 3: Rotate and fix the camera on the base. (See below).

- Note:
- ① The maximum viscosity of 3M Tape will be worked in 72 hours.
 - ② The painted wall may destroy the 3M Tape, please adhere on the smooth and clean wall without waterlogging.
 - ③ To meet different kinds of demand for install, you can buy an extended cable in 360 Mall.
 - ④ the ceiling can hold at least 3 times gorss weight of the camera.
 - ⑤ you can also purchase longer power cord for your varified demand.

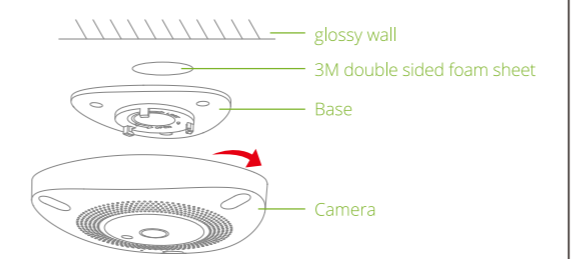

Packing list

Please confirm that the camera is intact and fully equipped with accessories when you open the package.

- 1) 3M Double sided foam sheetx1
- 2) Camerax1
- 3) Clip bucklex5
- 4) User Manualx1
- 5) (Screw + expansion tube) x3
- 6) Adaptex1

Product Description

1. 1080P (1920*1080) high definition provides superb performacnse and bright luminosity.
2. When night vision mode is switched on/off, a clicking sound will be heard as internal filter changes.

Frequently Asked Questions (FAQ)

- 1) What do all the status indicator light colors mean?**
- Steady Green: Camera initializing
 - Flashing Green: Configuring Wi-Fi or camera offline
 - Steady Blue: Camera online
 - Flashing Blue: Camera being viewed

2) Is my camera overheating?

The camera will be relatively warm when running, this is normal, do not worry about it.
Acceptable operating temperature: -5~40 C.

3) Important considerations when using night vision

To improve the night vision effect, keep the camera away from reflective surfaces such as glass surfaces and white walls to avoid reflecting light making everything look white or faraway places looking too dark.



The night vision imaging effect

The night vision imaging effect



Correct placement example
please make sure there is no shelter in front of or next to the camera lens.

Note: the lens are fragile if the camera falls.

Important Notice

1) Privacy Safety

For the security of yourself and your family, please ensure that your camera is not binding to unauthorized persons. 360 commit to the strictest measures to guarantee that your personal information and privacy is not released.

2) Description of Hazardous Material Contents

Toxic and Harmful Substances and Elementst	Parts name				
	Plastic shell	PCB	Powercord	Adapter	Lens
Lead (Pb)	○	×	×	×	○
Mercury (Hg)	○	○	○	○	○
Cadmium (Cd)	○	○	○	○	○
Hexavalent Chromium (Cr(VI))	○	○	○	○	○
Polybrominated Biphenyls (PBB)	○	○	○	○	○
Polybrominated Diphenyl Ethers (PBDE)	○	○	○	○	○

Environmental protection period (EPP): PCB 10 years, power cable 10 years, battery 5 years. EPP refers to the poison-free period of the all items within the product under instructed application conditions.
○ : Indicates that for each item in this product, said hazardous substance is below the requirements set forth by the standard SJ/T11363-2006.
× : Indicates that there are one or more items that contain an amount of said substance that exceeds the requirements set forth by the standard SJ/T11363-2006.

Note: a small patch of electronic components for special purposes is marked with "X" in the table (such as high voltage resistors, ceramic resistors, diodes) in which lead content may exceed 0.1%. As the core in the screws and in the data lines using better performance alloy, the lead content may also be exceeds 0.1%. These components are in line with the requirements of the exemption clause of the EU RoHS directive, currently limited by the global technology development there is no other alternative technologies and components, the external lead contents of these components are in line with environmental requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

After-Sales Service

1) Warranty policy of 360 Smart Camera

This product comes with a One-year Local Warranty Service. For detail of warranty service, please kindly contact local Authorized Distributors in your country.

2) Non warranty policy of 360 Smart Camera

- Cannot present valid warranty certificate and purchase invoice.
- Damages which result from improper use or handle, water damage, unauthorized maintenance or modification.
- Damage because of force majeure.
- Normal decoloration and wastage during usage will not be included into warranty service.

Contact US

Facebook: <https://www.facebook.com/360smartAI/>
After-Service E-mail: support@360smartAI.com

360 Smart Camera warranty certificate

1. User Information

Name _____ Tel _____
E-mail _____ Post Code _____
Address _____

2. Product Information

Color _____
SN _____

3. Repair Record

Repair Record	Fault Phenomenon	Accepted Date	Signature of Repair Engineer