

TABLE OF CONTENTS

1 Conducted output power	2
2 Frequency stability	9
3 Peak-to-Average Ratio	10
4 Occupied bandwidth	15
5 Band edge	26
6 Out-of-band emissions	34

1 Conducted output power

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	1	#0	QPSK	22.78	0.5	-1.65	21.13	38.45	Pass
Band26(814-824)	1.4	26697	1	#Mid	QPSK	22.90	0.5	-1.65	21.25	38.45	Pass
Band26(814-824)	1.4	26697	1	#Max	QPSK	22.79	0.5	-1.65	21.14	38.45	Pass
Band26(814-824)	1.4	26697	3	#0	QPSK	22.94	0.5	-1.65	21.29	38.45	Pass
Band26(814-824)	1.4	26697	3	#Mid	QPSK	22.96	0.5	-1.65	21.31	38.45	Pass
Band26(814-824)	1.4	26697	3	#Max	QPSK	22.97	0.5	-1.65	21.32	38.45	Pass
Band26(814-824)	1.4	26697	6	#0	QPSK	21.94	0.5	-1.65	20.29	38.45	Pass
Band26(814-824)	1.4	26697	1	#0	QAM16	21.99	0.5	-1.65	20.34	38.45	Pass
Band26(814-824)	1.4	26697	1	#Mid	QAM16	22.02	0.5	-1.65	20.37	38.45	Pass
Band26(814-824)	1.4	26697	1	#Max	QAM16	22.00	0.5	-1.65	20.35	38.45	Pass
Band26(814-824)	1.4	26697	3	#0	QAM16	22.13	0.5	-1.65	20.48	38.45	Pass
Band26(814-824)	1.4	26697	3	#Mid	QAM16	22.21	0.5	-1.65	20.56	38.45	Pass
Band26(814-824)	1.4	26697	3	#Max	QAM16	22.17	0.5	-1.65	20.52	38.45	Pass
Band26(814-824)	1.4	26697	6	#0	QAM16	21.12	0.5	-1.65	19.47	38.45	Pass
Band26(814-824)	1.4	26740	1	#0	QPSK	22.92	0.5	-1.65	21.27	38.45	Pass
Band26(814-824)	1.4	26740	1	#Mid	QPSK	22.99	0.5	-1.65	21.34	38.45	Pass
Band26(814-824)	1.4	26740	1	#Max	QPSK	22.88	0.5	-1.65	21.23	38.45	Pass
Band26(814-824)	1.4	26740	3	#0	QPSK	23.00	0.5	-1.65	21.35	38.45	Pass
Band26(814-824)	1.4	26740	3	#Mid	QPSK	23.02	0.5	-1.65	21.37	38.45	Pass

-824)											
Band26(814-824)	1.4	26740	3	#Max	QPSK	22.95	0.5	-1.65	21.30	38.45	Pass
Band26(814-824)	1.4	26740	6	#0	QPSK	21.99	0.5	-1.65	20.34	38.45	Pass
Band26(814-824)	1.4	26740	1	#0	QAM16	21.68	0.5	-1.65	20.03	38.45	Pass
Band26(814-824)	1.4	26740	1	#Mid	QAM16	21.82	0.5	-1.65	20.17	38.45	Pass
Band26(814-824)	1.4	26740	1	#Max	QAM16	21.73	0.5	-1.65	20.08	38.45	Pass
Band26(814-824)	1.4	26740	3	#0	QAM16	22.13	0.5	-1.65	20.48	38.45	Pass
Band26(814-824)	1.4	26740	3	#Mid	QAM16	22.16	0.5	-1.65	20.51	38.45	Pass
Band26(814-824)	1.4	26740	3	#Max	QAM16	22.12	0.5	-1.65	20.47	38.45	Pass
Band26(814-824)	1.4	26740	6	#0	QAM16	21.21	0.5	-1.65	19.56	38.45	Pass
Band26(814-824)	1.4	26783	1	#0	QPSK	23.00	0.5	-1.65	21.35	38.45	Pass
Band26(814-824)	1.4	26783	1	#Mid	QPSK	23.14	0.5	-1.65	21.49	38.45	Pass
Band26(814-824)	1.4	26783	1	#Max	QPSK	23.02	0.5	-1.65	21.37	38.45	Pass
Band26(814-824)	1.4	26783	3	#0	QPSK	23.00	0.5	-1.65	21.35	38.45	Pass
Band26(814-824)	1.4	26783	3	#Mid	QPSK	23.03	0.5	-1.65	21.38	38.45	Pass
Band26(814-824)	1.4	26783	3	#Max	QPSK	23.05	0.5	-1.65	21.40	38.45	Pass
Band26(814-824)	1.4	26783	6	#0	QPSK	22.10	0.5	-1.65	20.45	38.45	Pass
Band26(814-824)	1.4	26783	1	#0	QAM16	22.11	0.5	-1.65	20.46	38.45	Pass
Band26(814-824)	1.4	26783	1	#Mid	QAM16	22.13	0.5	-1.65	20.48	38.45	Pass
Band26(814-824)	1.4	26783	1	#Max	QAM16	22.04	0.5	-1.65	20.39	38.45	Pass
Band26(814-824)	1.4	26783	3	#0	QAM16	22.19	0.5	-1.65	20.54	38.45	Pass
Band26(814-824)	1.4	26783	3	#Mid	QAM16	22.21	0.5	-1.65	20.56	38.45	Pass
Band26(814-824)	1.4	26783	3	#Max	QAM16	22.17	0.5	-1.65	20.52	38.45	Pass

-824)											
Band26(814 -824)	1.4	26783	6	#0	QAM16	21.27	0.5	-1.65	19.62	38.45	Pass
Band26(814 -824)	3	26705	1	#0	QPSK	22.69	0.5	-1.65	21.04	38.45	Pass
Band26(814 -824)	3	26705	1	#Mid	QPSK	22.74	0.5	-1.65	21.09	38.45	Pass
Band26(814 -824)	3	26705	1	#Max	QPSK	22.71	0.5	-1.65	21.06	38.45	Pass
Band26(814 -824)	3	26705	8	#0	QPSK	21.87	0.5	-1.65	20.22	38.45	Pass
Band26(814 -824)	3	26705	8	#Mid	QPSK	21.94	0.5	-1.65	20.29	38.45	Pass
Band26(814 -824)	3	26705	8	#Max	QPSK	21.95	0.5	-1.65	20.30	38.45	Pass
Band26(814 -824)	3	26705	15	#0	QPSK	21.95	0.5	-1.65	20.30	38.45	Pass
Band26(814 -824)	3	26705	1	#0	QAM16	22.07	0.5	-1.65	20.42	38.45	Pass
Band26(814 -824)	3	26705	1	#Mid	QAM16	22.18	0.5	-1.65	20.53	38.45	Pass
Band26(814 -824)	3	26705	1	#Max	QAM16	22.15	0.5	-1.65	20.50	38.45	Pass
Band26(814 -824)	3	26705	8	#0	QAM16	20.88	0.5	-1.65	19.23	38.45	Pass
Band26(814 -824)	3	26705	8	#Mid	QAM16	21.03	0.5	-1.65	19.38	38.45	Pass
Band26(814 -824)	3	26705	8	#Max	QAM16	20.98	0.5	-1.65	19.33	38.45	Pass
Band26(814 -824)	3	26705	15	#0	QAM16	20.99	0.5	-1.65	19.34	38.45	Pass
Band26(814 -824)	3	26740	1	#0	QPSK	22.76	0.5	-1.65	21.11	38.45	Pass
Band26(814 -824)	3	26740	1	#Mid	QPSK	22.80	0.5	-1.65	21.15	38.45	Pass
Band26(814 -824)	3	26740	1	#Max	QPSK	22.75	0.5	-1.65	21.10	38.45	Pass
Band26(814 -824)	3	26740	8	#0	QPSK	21.94	0.5	-1.65	20.29	38.45	Pass
Band26(814 -824)	3	26740	8	#Mid	QPSK	21.99	0.5	-1.65	20.34	38.45	Pass
Band26(814 -824)	3	26740	8	#Max	QPSK	22.02	0.5	-1.65	20.37	38.45	Pass
Band26(814 -824)	3	26740	15	#0	QPSK	21.96	0.5	-1.65	20.31	38.45	Pass

-824)											
Band26(814-824)	3	26740	1	#0	QAM16	21.98	0.5	-1.65	20.33	38.45	Pass
Band26(814-824)	3	26740	1	#Mid	QAM16	22.08	0.5	-1.65	20.43	38.45	Pass
Band26(814-824)	3	26740	1	#Max	QAM16	21.99	0.5	-1.65	20.34	38.45	Pass
Band26(814-824)	3	26740	8	#0	QAM16	20.99	0.5	-1.65	19.34	38.45	Pass
Band26(814-824)	3	26740	8	#Mid	QAM16	21.02	0.5	-1.65	19.37	38.45	Pass
Band26(814-824)	3	26740	8	#Max	QAM16	20.95	0.5	-1.65	19.30	38.45	Pass
Band26(814-824)	3	26740	15	#0	QAM16	20.95	0.5	-1.65	19.30	38.45	Pass
Band26(814-824)	3	26775	1	#0	QPSK	22.84	0.5	-1.65	21.19	38.45	Pass
Band26(814-824)	3	26775	1	#Mid	QPSK	22.95	0.5	-1.65	21.30	38.45	Pass
Band26(814-824)	3	26775	1	#Max	QPSK	22.97	0.5	-1.65	21.32	38.45	Pass
Band26(814-824)	3	26775	8	#0	QPSK	21.98	0.5	-1.65	20.33	38.45	Pass
Band26(814-824)	3	26775	8	#Mid	QPSK	22.08	0.5	-1.65	20.43	38.45	Pass
Band26(814-824)	3	26775	8	#Max	QPSK	22.00	0.5	-1.65	20.35	38.45	Pass
Band26(814-824)	3	26775	15	#0	QPSK	22.01	0.5	-1.65	20.36	38.45	Pass
Band26(814-824)	3	26775	1	#0	QAM16	21.67	0.5	-1.65	20.02	38.45	Pass
Band26(814-824)	3	26775	1	#Mid	QAM16	21.76	0.5	-1.65	20.11	38.45	Pass
Band26(814-824)	3	26775	1	#Max	QAM16	21.68	0.5	-1.65	20.03	38.45	Pass
Band26(814-824)	3	26775	8	#0	QAM16	20.96	0.5	-1.65	19.31	38.45	Pass
Band26(814-824)	3	26775	8	#Mid	QAM16	21.03	0.5	-1.65	19.38	38.45	Pass
Band26(814-824)	3	26775	8	#Max	QAM16	21.03	0.5	-1.65	19.38	38.45	Pass
Band26(814-824)	3	26775	15	#0	QAM16	21.09	0.5	-1.65	19.44	38.45	Pass
Band26(814-824)	5	26715	1	#0	QPSK	22.95	0.5	-1.65	21.30	38.45	Pass

-824)											
Band26(814-824)	5	26715	1	#Mid	QPSK	23.03	0.5	-1.65	21.38	38.45	Pass
Band26(814-824)	5	26715	1	#Max	QPSK	22.97	0.5	-1.65	21.32	38.45	Pass
Band26(814-824)	5	26715	12	#0	QPSK	22.00	0.5	-1.65	20.35	38.45	Pass
Band26(814-824)	5	26715	12	#Mid	QPSK	22.07	0.5	-1.65	20.42	38.45	Pass
Band26(814-824)	5	26715	12	#Max	QPSK	22.02	0.5	-1.65	20.37	38.45	Pass
Band26(814-824)	5	26715	25	#0	QPSK	21.97	0.5	-1.65	20.32	38.45	Pass
Band26(814-824)	5	26715	1	#0	QAM16	22.37	0.5	-1.65	20.72	38.45	Pass
Band26(814-824)	5	26715	1	#Mid	QAM16	22.61	0.5	-1.65	20.96	38.45	Pass
Band26(814-824)	5	26715	1	#Max	QAM16	22.55	0.5	-1.65	20.90	38.45	Pass
Band26(814-824)	5	26715	12	#0	QAM16	20.98	0.5	-1.65	19.33	38.45	Pass
Band26(814-824)	5	26715	12	#Mid	QAM16	21.08	0.5	-1.65	19.43	38.45	Pass
Band26(814-824)	5	26715	12	#Max	QAM16	21.07	0.5	-1.65	19.42	38.45	Pass
Band26(814-824)	5	26715	25	#0	QAM16	21.04	0.5	-1.65	19.39	38.45	Pass
Band26(814-824)	5	26740	1	#0	QPSK	22.96	0.5	-1.65	21.31	38.45	Pass
Band26(814-824)	5	26740	1	#Mid	QPSK	23.06	0.5	-1.65	21.41	38.45	Pass
Band26(814-824)	5	26740	1	#Max	QPSK	23.08	0.5	-1.65	21.43	38.45	Pass
Band26(814-824)	5	26740	12	#0	QPSK	21.95	0.5	-1.65	20.30	38.45	Pass
Band26(814-824)	5	26740	12	#Mid	QPSK	22.05	0.5	-1.65	20.40	38.45	Pass
Band26(814-824)	5	26740	12	#Max	QPSK	22.03	0.5	-1.65	20.38	38.45	Pass
Band26(814-824)	5	26740	25	#0	QPSK	22.04	0.5	-1.65	20.39	38.45	Pass
Band26(814-824)	5	26740	1	#0	QAM16	22.30	0.5	-1.65	20.65	38.45	Pass
Band26(814-824)	5	26740	1	#Mid	QAM16	22.42	0.5	-1.65	20.77	38.45	Pass

-824)											
Band26(814-824)	5	26740	1	#Max	QAM16	22.36	0.5	-1.65	20.71	38.45	Pass
Band26(814-824)	5	26740	12	#0	QAM16	20.86	0.5	-1.65	19.21	38.45	Pass
Band26(814-824)	5	26740	12	#Mid	QAM16	21.06	0.5	-1.65	19.41	38.45	Pass
Band26(814-824)	5	26740	12	#Max	QAM16	21.05	0.5	-1.65	19.40	38.45	Pass
Band26(814-824)	5	26740	25	#0	QAM16	21.07	0.5	-1.65	19.42	38.45	Pass
Band26(814-824)	5	26765	1	#0	QPSK	22.91	0.5	-1.65	21.26	38.45	Pass
Band26(814-824)	5	26765	1	#Mid	QPSK	23.05	0.5	-1.65	21.40	38.45	Pass
Band26(814-824)	5	26765	1	#Max	QPSK	23.00	0.5	-1.65	21.35	38.45	Pass
Band26(814-824)	5	26765	12	#0	QPSK	22.04	0.5	-1.65	20.39	38.45	Pass
Band26(814-824)	5	26765	12	#Mid	QPSK	22.12	0.5	-1.65	20.47	38.45	Pass
Band26(814-824)	5	26765	12	#Max	QPSK	22.07	0.5	-1.65	20.42	38.45	Pass
Band26(814-824)	5	26765	25	#0	QPSK	22.09	0.5	-1.65	20.44	38.45	Pass
Band26(814-824)	5	26765	1	#0	QAM16	22.28	0.5	-1.65	20.63	38.45	Pass
Band26(814-824)	5	26765	1	#Mid	QAM16	22.38	0.5	-1.65	20.73	38.45	Pass
Band26(814-824)	5	26765	1	#Max	QAM16	22.29	0.5	-1.65	20.64	38.45	Pass
Band26(814-824)	5	26765	12	#0	QAM16	21.06	0.5	-1.65	19.41	38.45	Pass
Band26(814-824)	5	26765	12	#Mid	QAM16	21.16	0.5	-1.65	19.51	38.45	Pass
Band26(814-824)	5	26765	12	#Max	QAM16	21.16	0.5	-1.65	19.51	38.45	Pass
Band26(814-824)	5	26765	25	#0	QAM16	21.05	0.5	-1.65	19.40	38.45	Pass
Band26(814-824)	10	26740	1	#0	QPSK	23.01	0.5	-1.65	21.36	38.45	Pass
Band26(814-824)	10	26740	1	#Mid	QPSK	23.06	0.5	-1.65	21.41	38.45	Pass
Band26(814-824)	10	26740	1	#Max	QPSK	23.15	0.5	-1.65	21.50	38.45	Pass

-824)											
Band26(814 -824)	10	26740	25	#0	QPSK	21.97	0.5	-1.65	20.32	38.45	Pass
Band26(814 -824)	10	26740	25	#Mid	QPSK	22.02	0.5	-1.65	20.37	38.45	Pass
Band26(814 -824)	10	26740	25	#Max	QPSK	22.04	0.5	-1.65	20.39	38.45	Pass
Band26(814 -824)	10	26740	50	#0	QPSK	22.02	0.5	-1.65	20.37	38.45	Pass
Band26(814 -824)	10	26740	1	#0	QAM16	22.40	0.5	-1.65	20.75	38.45	Pass
Band26(814 -824)	10	26740	1	#Mid	QAM16	22.52	0.5	-1.65	20.87	38.45	Pass
Band26(814 -824)	10	26740	1	#Max	QAM16	22.49	0.5	-1.65	20.84	38.45	Pass
Band26(814 -824)	10	26740	25	#0	QAM16	21.00	0.5	-1.65	19.35	38.45	Pass
Band26(814 -824)	10	26740	25	#Mid	QAM16	21.17	0.5	-1.65	19.52	38.45	Pass
Band26(814 -824)	10	26740	25	#Max	QAM16	21.20	0.5	-1.65	19.55	38.45	Pass
Band26(814 -824)	10	26740	50	#0	QAM16	21.13	0.5	-1.65	19.48	38.45	Pass

2 Frequency stability

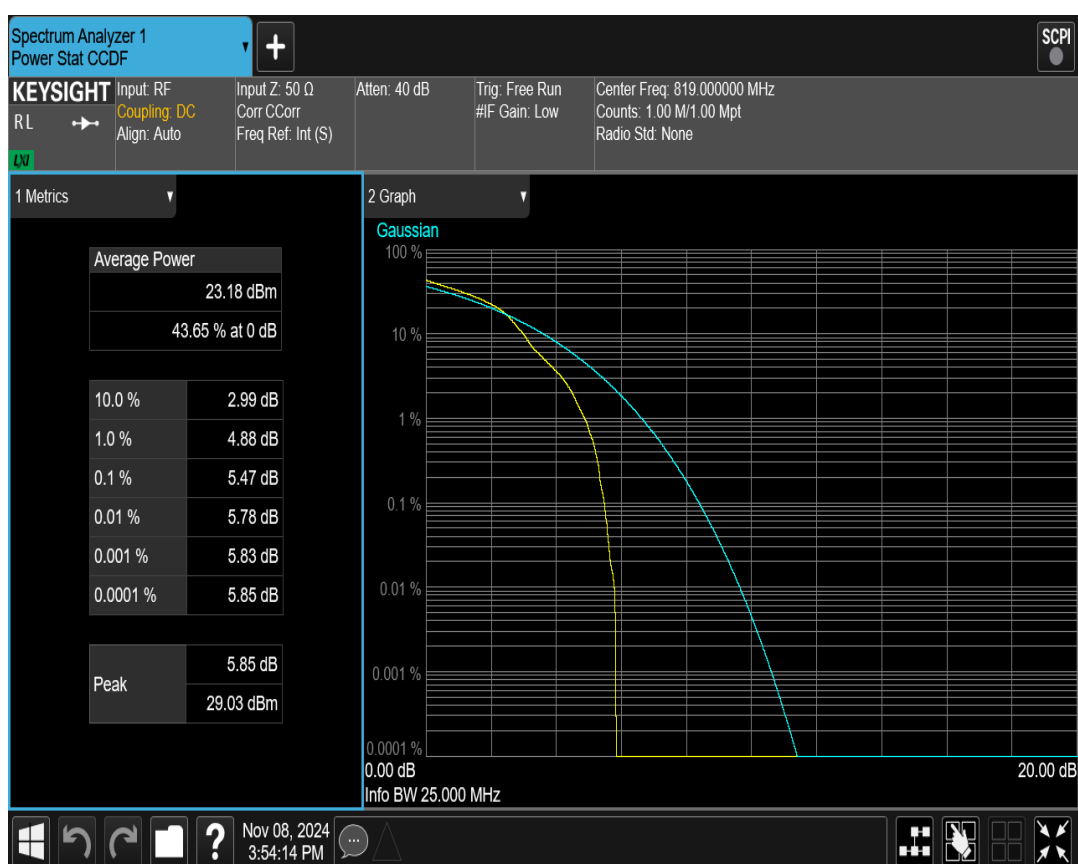
<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
Band26(814-824)	10	26740	50	#0	QPSK	1.18	0.001	-2.5	2.5	PASS
Band26(814-824)	10	26740	50	#0	QAM16	-2.90	-0.004	-2.5	2.5	PASS

Note: (Voltage: 3.85V, Temperature: 25°C) only reflect the worst mode.



3 Peak-to-Average Ratio



Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Result (dB)	high Limit (dB)	Verdict
Band26(814-824)	1.4	26740	1	#0	QPSK	4.69	13	PASS
Band26(814-824)	1.4	26740	1	#0	QAM16	5.47	13	PASS
Band26(814-824)	3	26740	1	#0	QPSK	4.72	13	PASS
Band26(814-824)	3	26740	1	#0	QAM16	5.66	13	PASS
Band26(814-824)	5	26740	1	#0	QPSK	4.66	13	PASS
Band26(814-824)	5	26740	1	#0	QAM16	5.40	13	PASS
Band26(814-824)	10	26740	1	#0	QPSK	4.20	13	PASS
Band26(814-824)	10	26740	1	#0	QAM16	5.09	13	PASS



Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=1 Position=#0




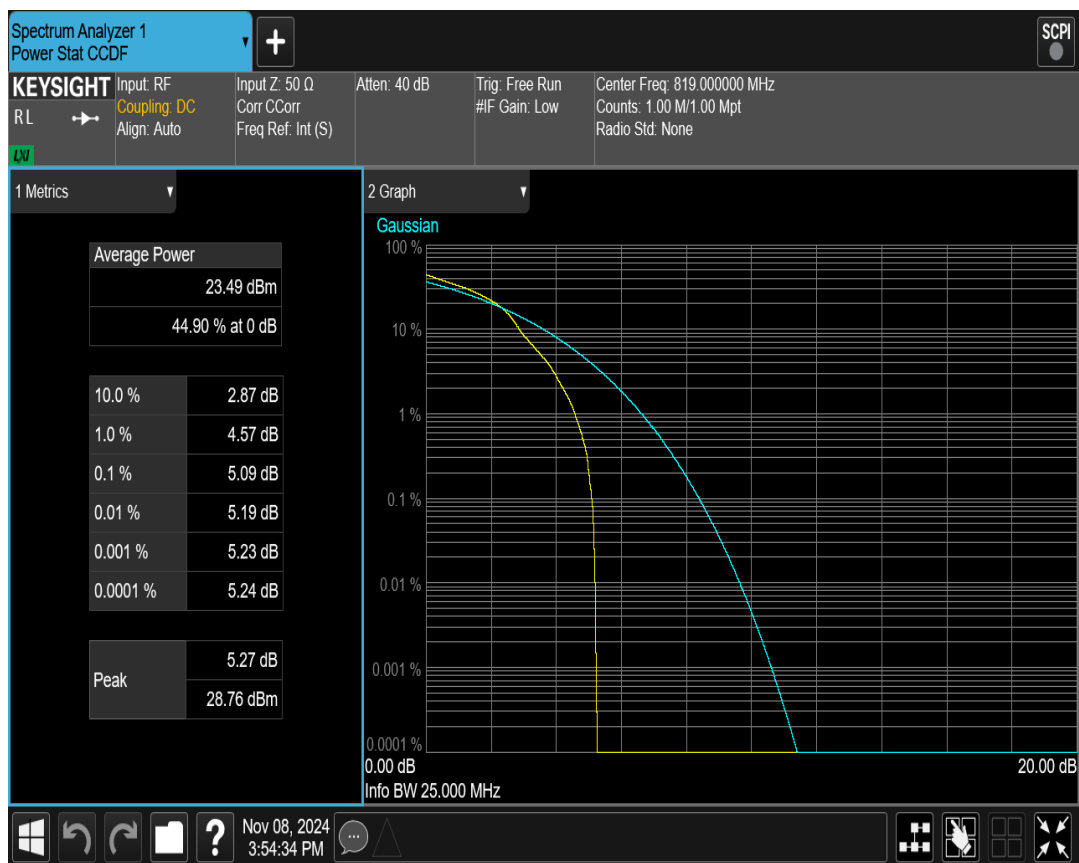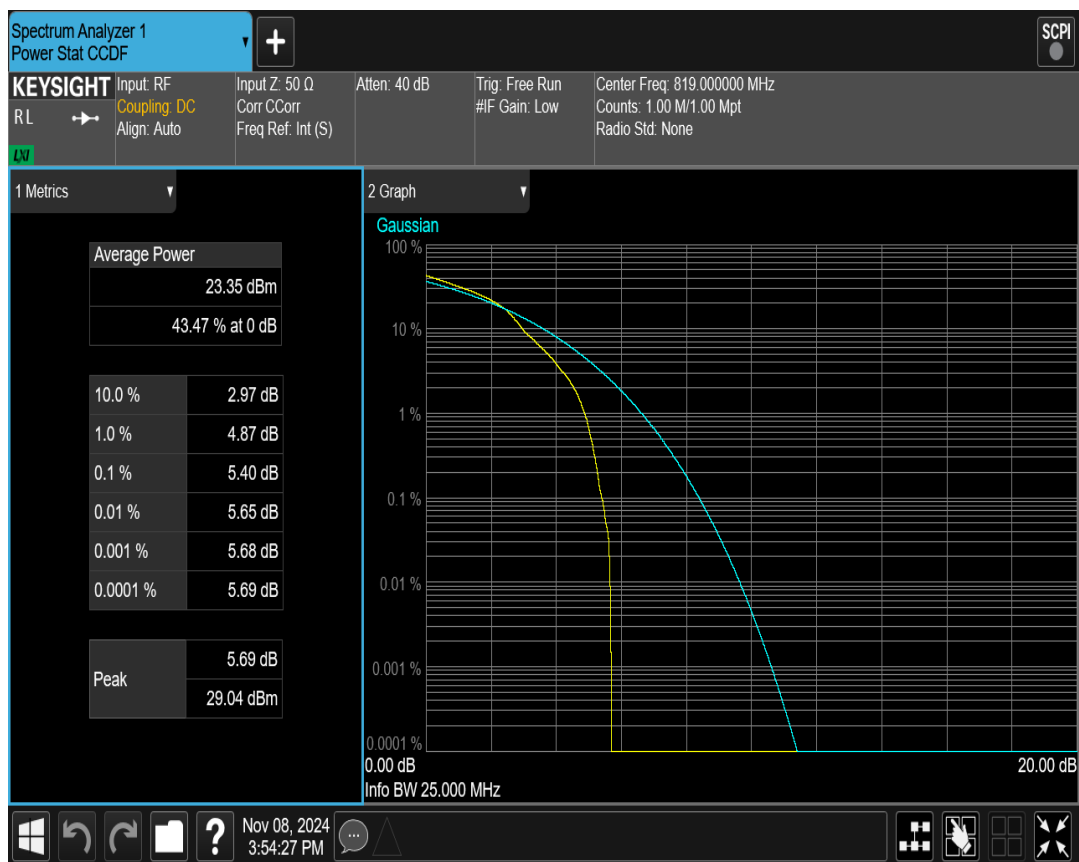Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=1 Position=#0

**Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=1 Position=#0**

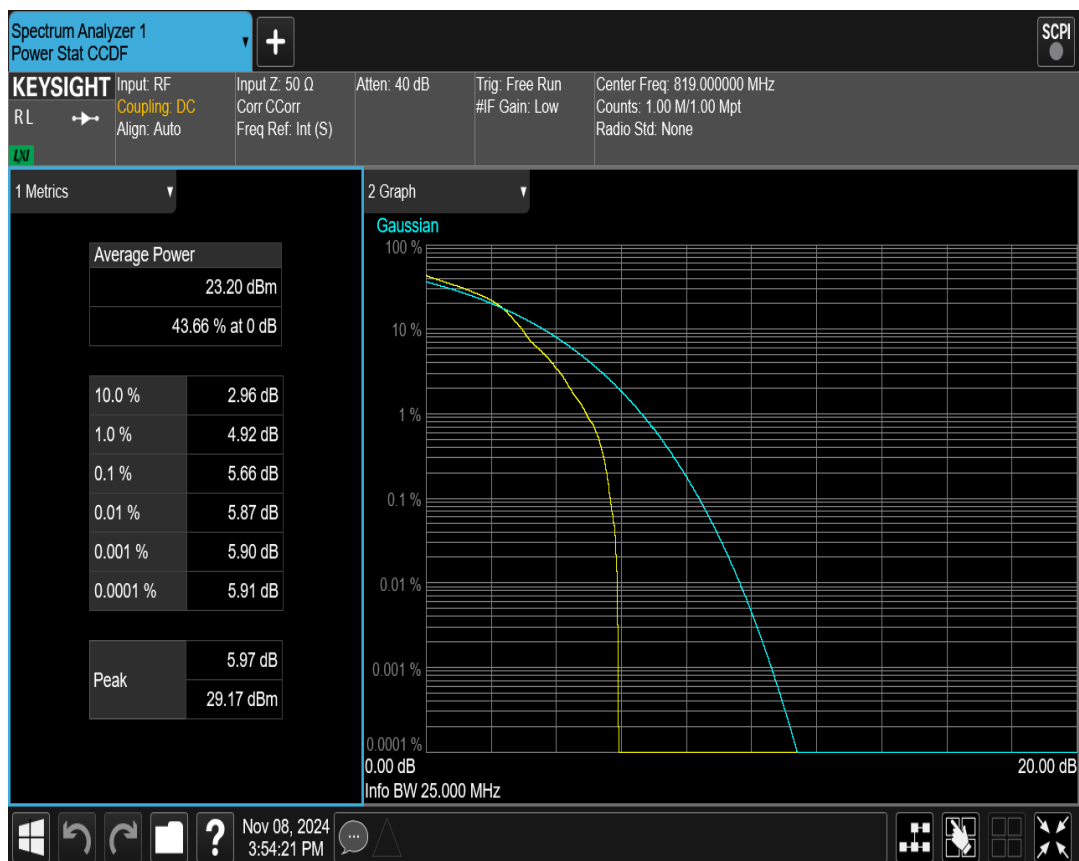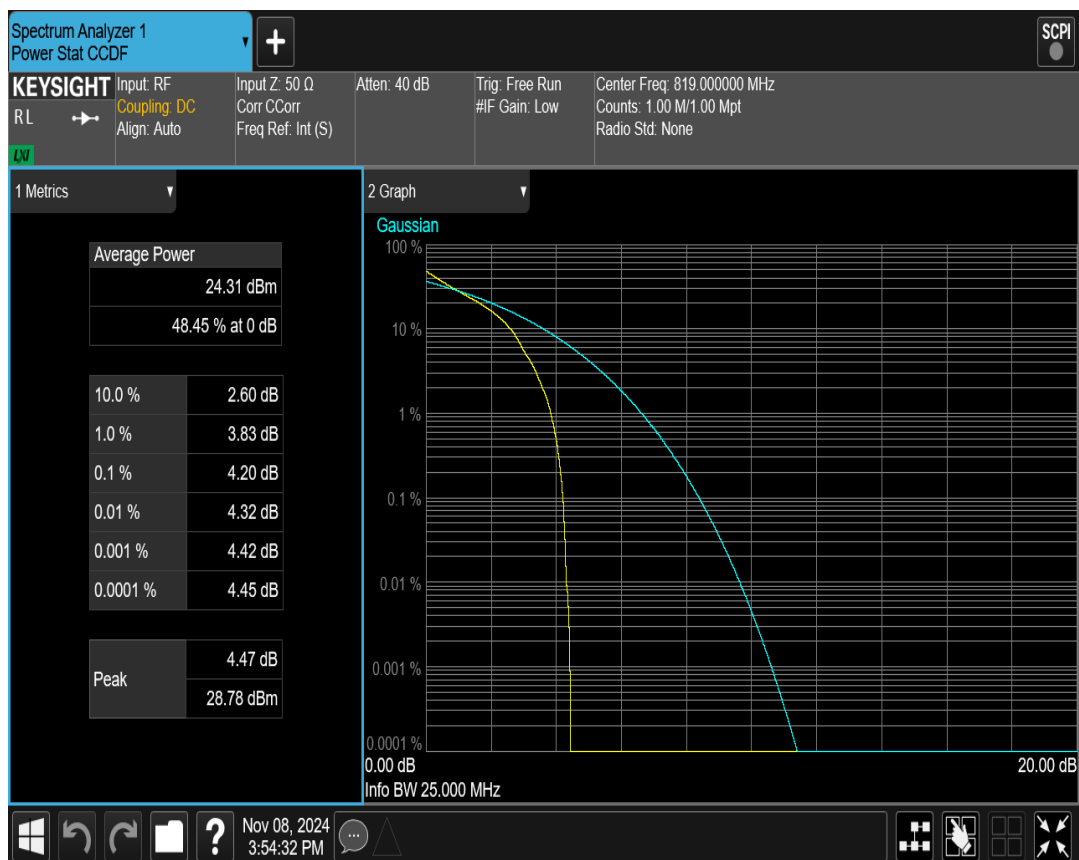**Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=1 Position=#0**

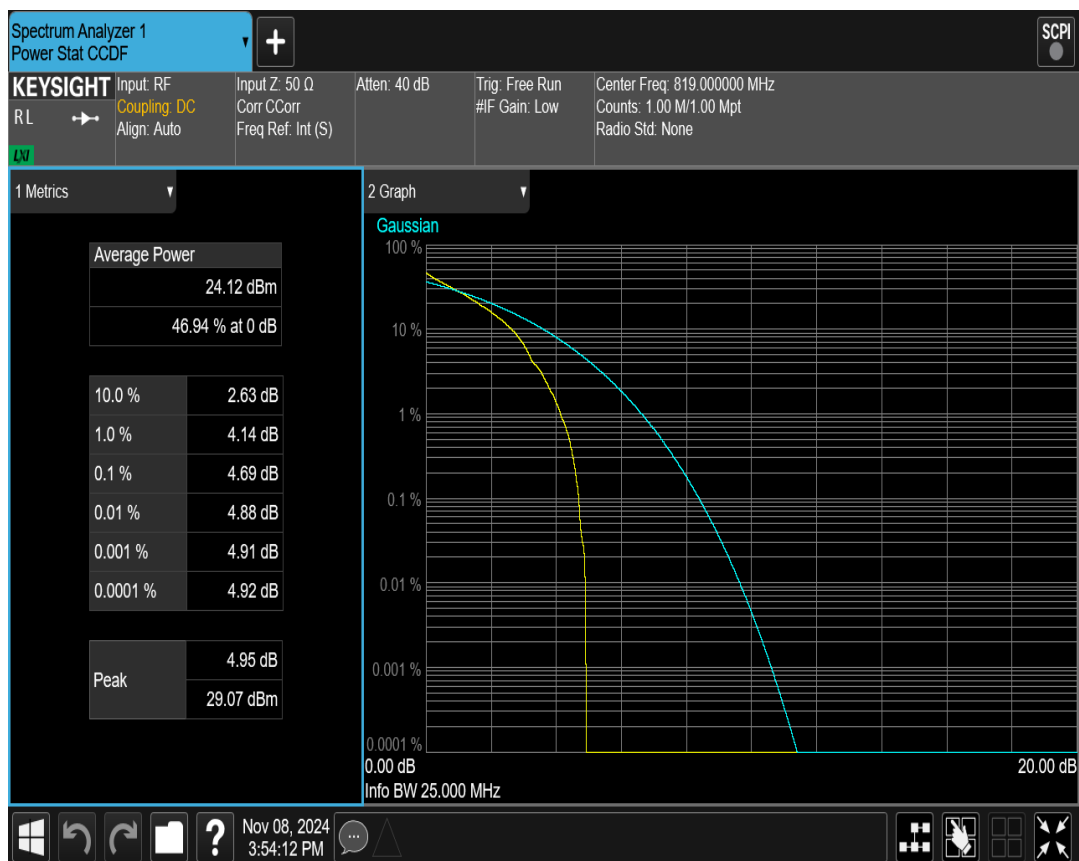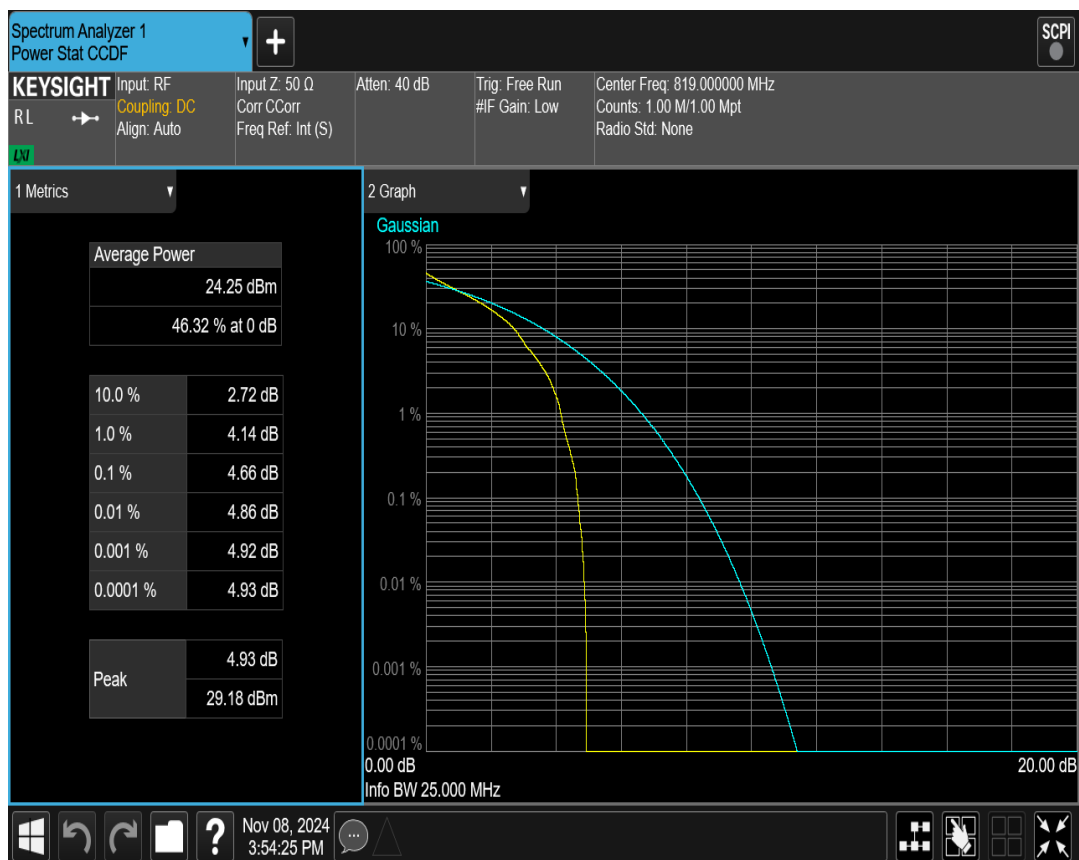
**Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=1 Position=#0**

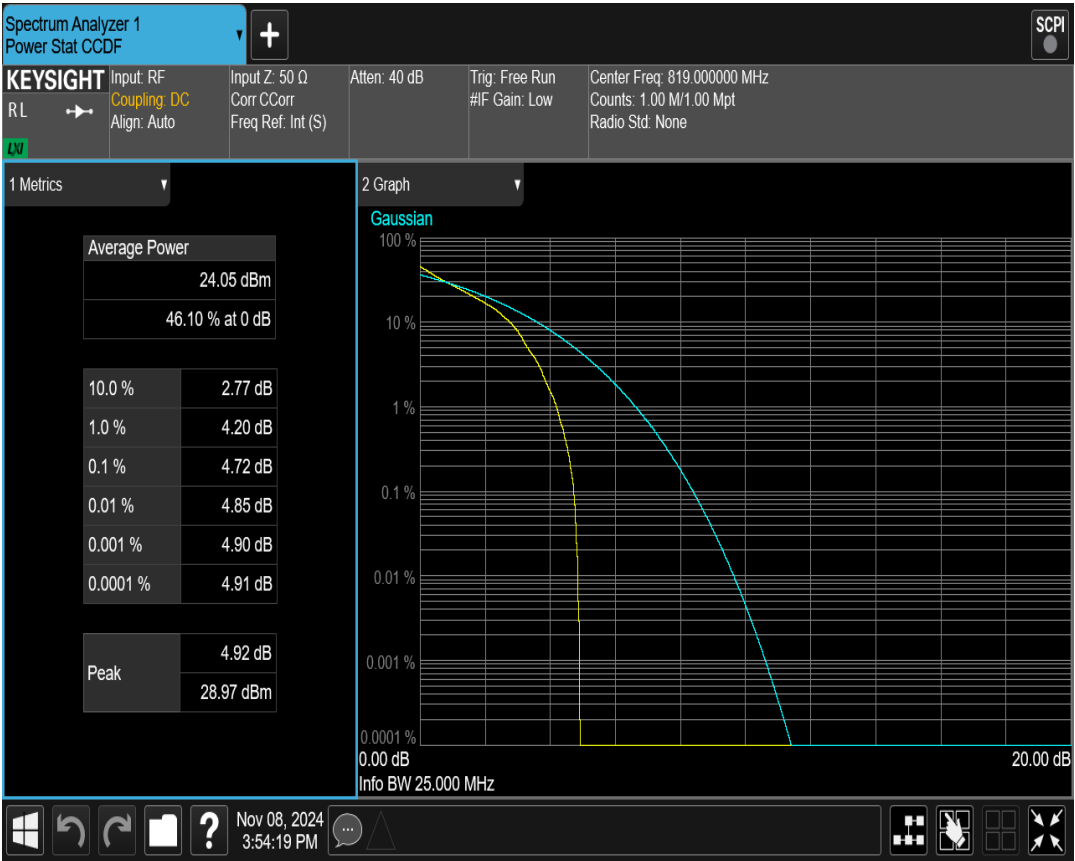


4 Occupied bandwidth

<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>99% OBW (MHz)</i>	<i>-26dB EBW (MHz)</i>	<i>Verdict</i>
Band26(814-824)	1.4	26697	6	#0	QPSK	1.107	1.254	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	1.095	1.251	PASS
Band26(814-824)	1.4	26740	6	#0	QPSK	1.089	1.280	PASS
Band26(814-824)	1.4	26740	6	#0	QAM16	1.102	1.302	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	1.099	1.283	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	1.095	1.274	PASS
Band26(814-824)	3	26705	15	#0	QPSK	2.689	2.942	PASS
Band26(814-824)	3	26705	15	#0	QAM16	2.687	2.946	PASS
Band26(814-824)	3	26740	15	#0	QPSK	2.686	2.966	PASS
Band26(814-824)	3	26740	15	#0	QAM16	2.690	2.973	PASS
Band26(814-824)	3	26775	15	#0	QPSK	2.688	2.963	PASS
Band26(814-824)	3	26775	15	#0	QAM16	2.686	2.967	PASS
Band26(814-824)	5	26715	25	#0	QPSK	4.515	4.902	PASS
Band26(814-824)	5	26715	25	#0	QAM16	4.512	4.933	PASS
Band26(814-824)	5	26740	25	#0	QPSK	4.503	4.909	PASS
Band26(814-824)	5	26740	25	#0	QAM16	4.503	4.922	PASS
Band26(814-824)	5	26765	25	#0	QPSK	4.511	4.918	PASS
Band26(814-824)	5	26765	25	#0	QAM16	4.521	4.888	PASS
Band26(814-824)	10	26740	50	#0	QPSK	8.984	9.619	PASS
Band26(814-824)	10	26740	50	#0	QAM16	8.947	9.670	PASS


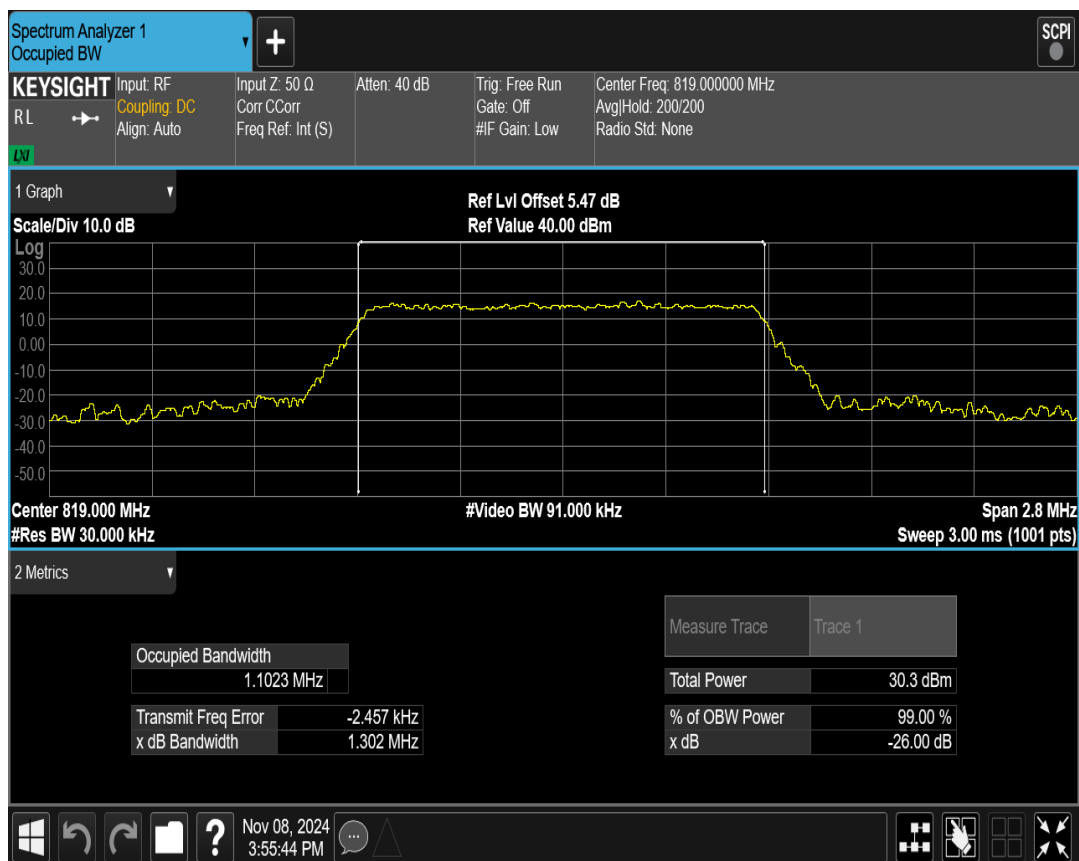
Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=6 Position=#0






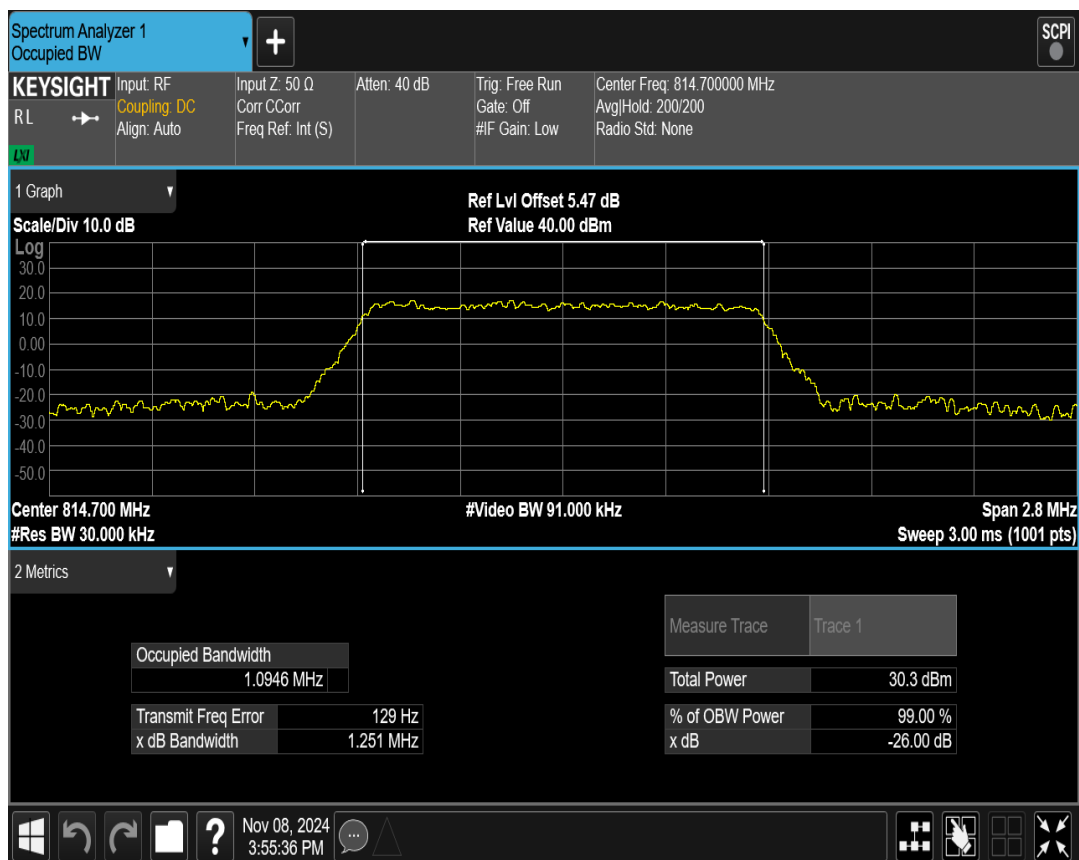
Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0




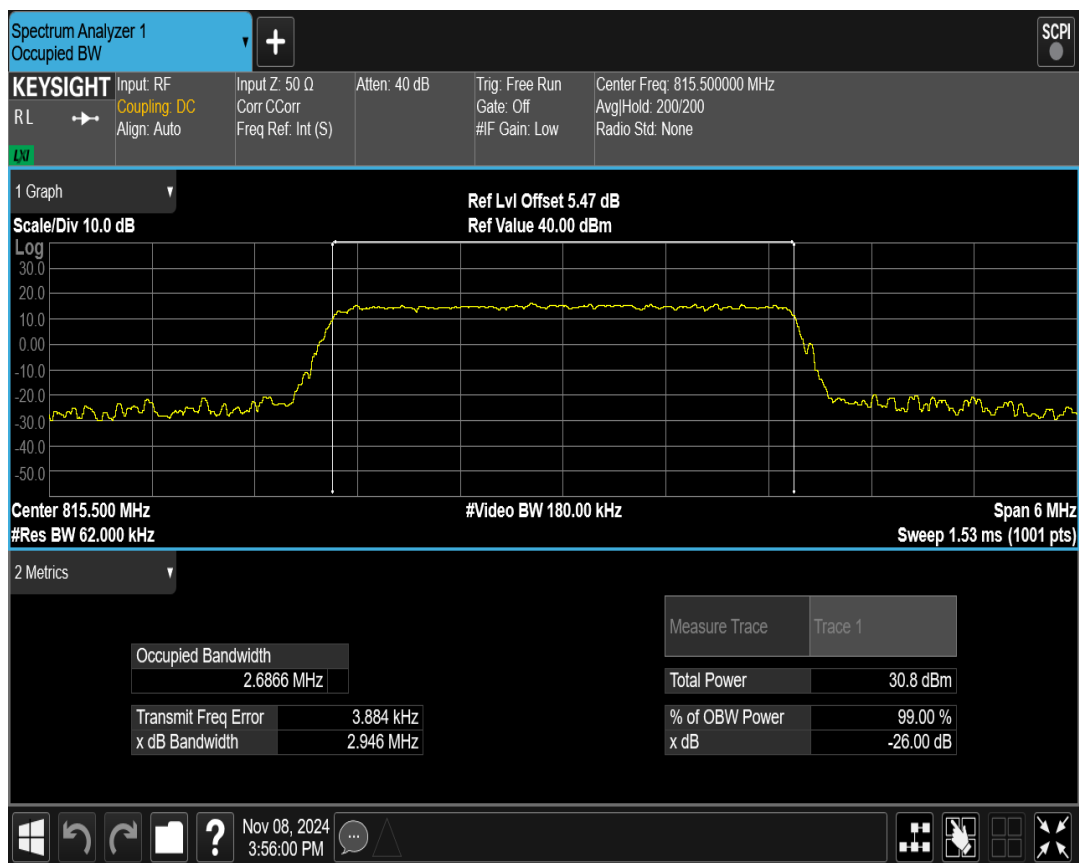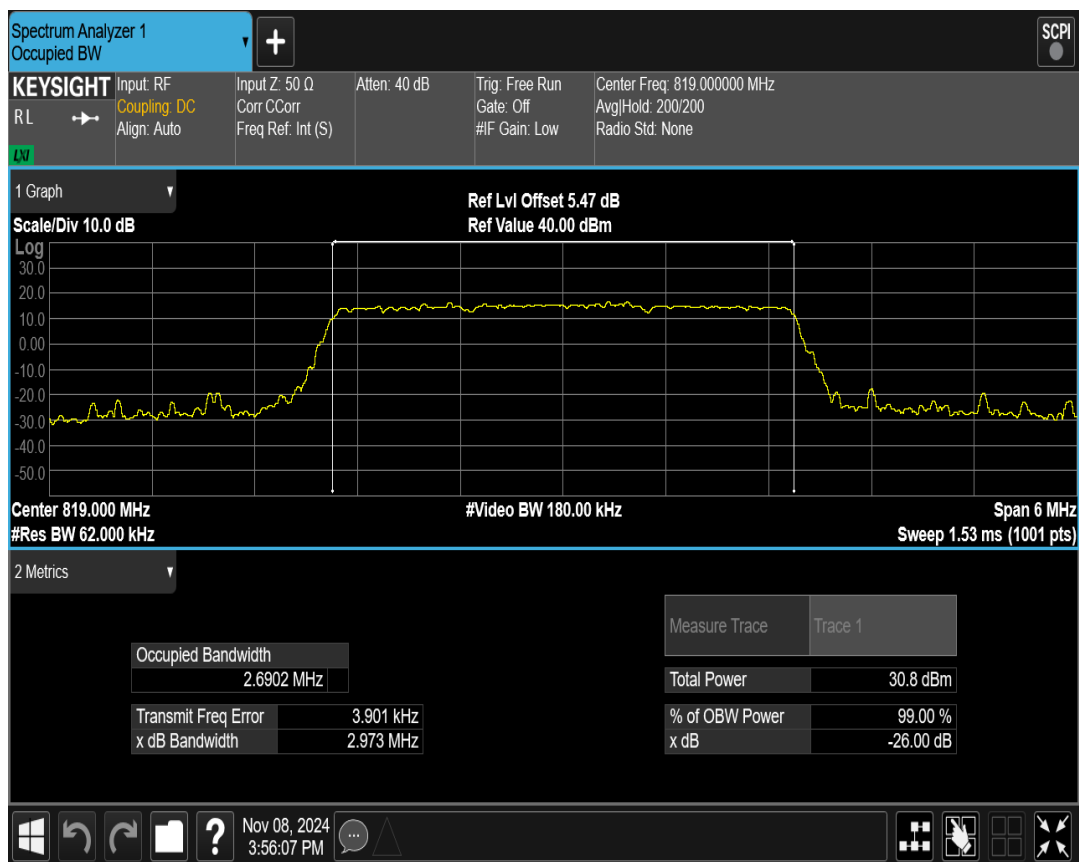Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0


**Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=15 Position=#0****Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0**

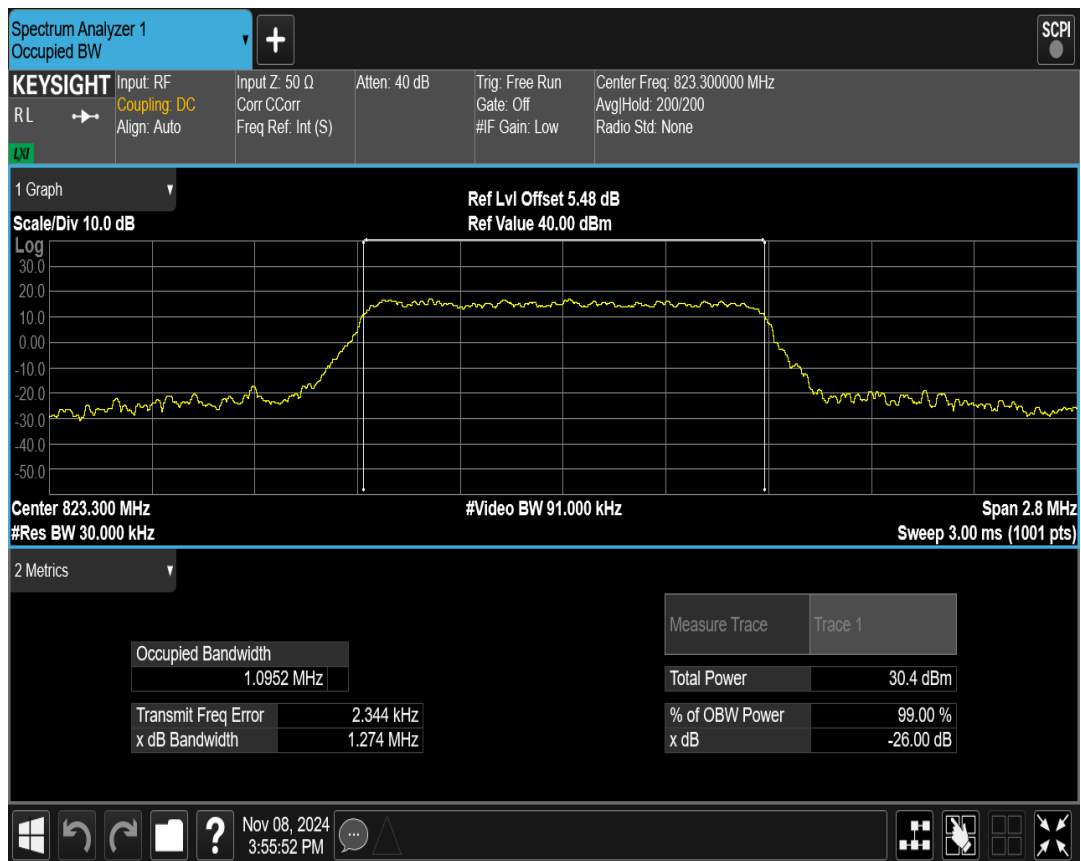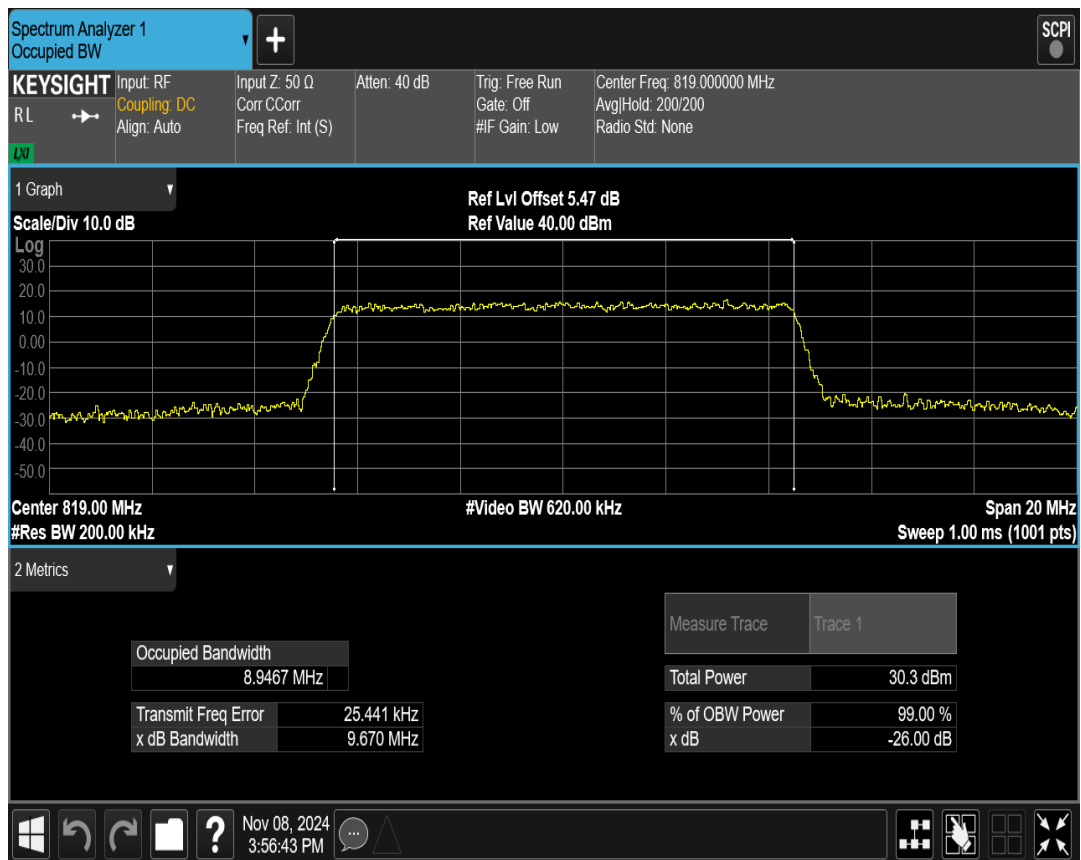**Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0****Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0**

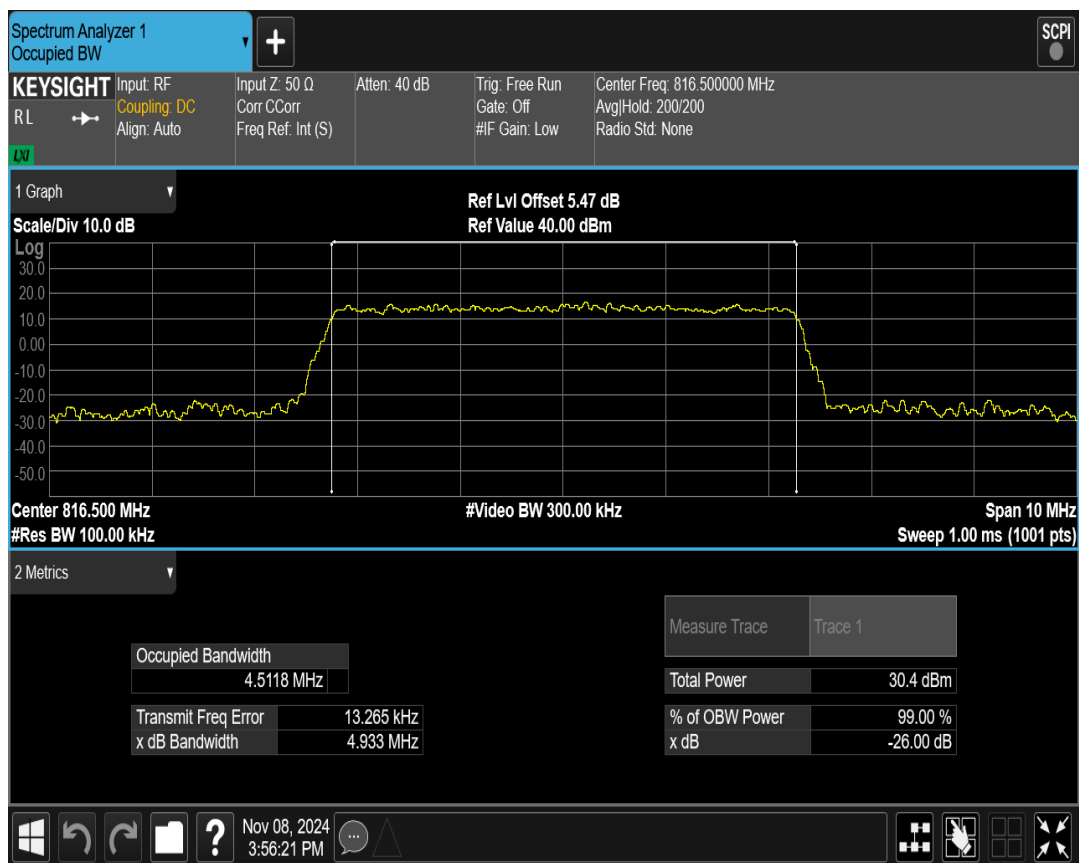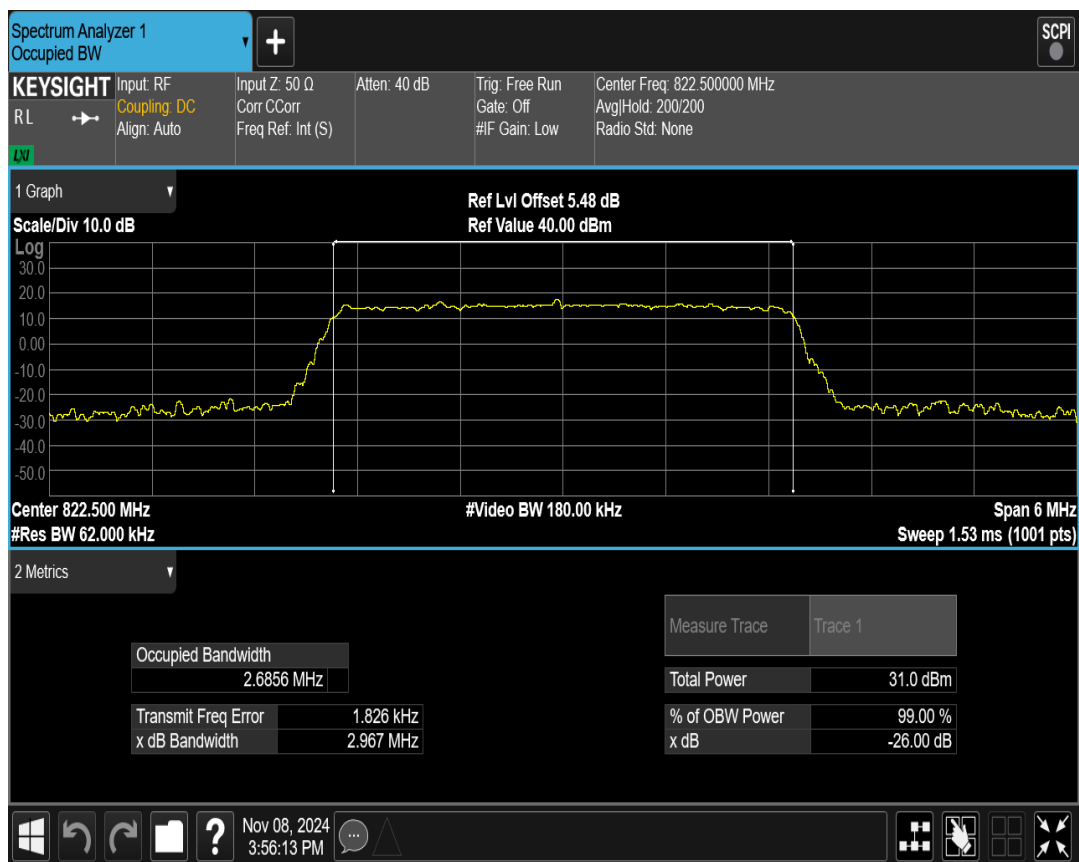
**Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=6 Position=#0**

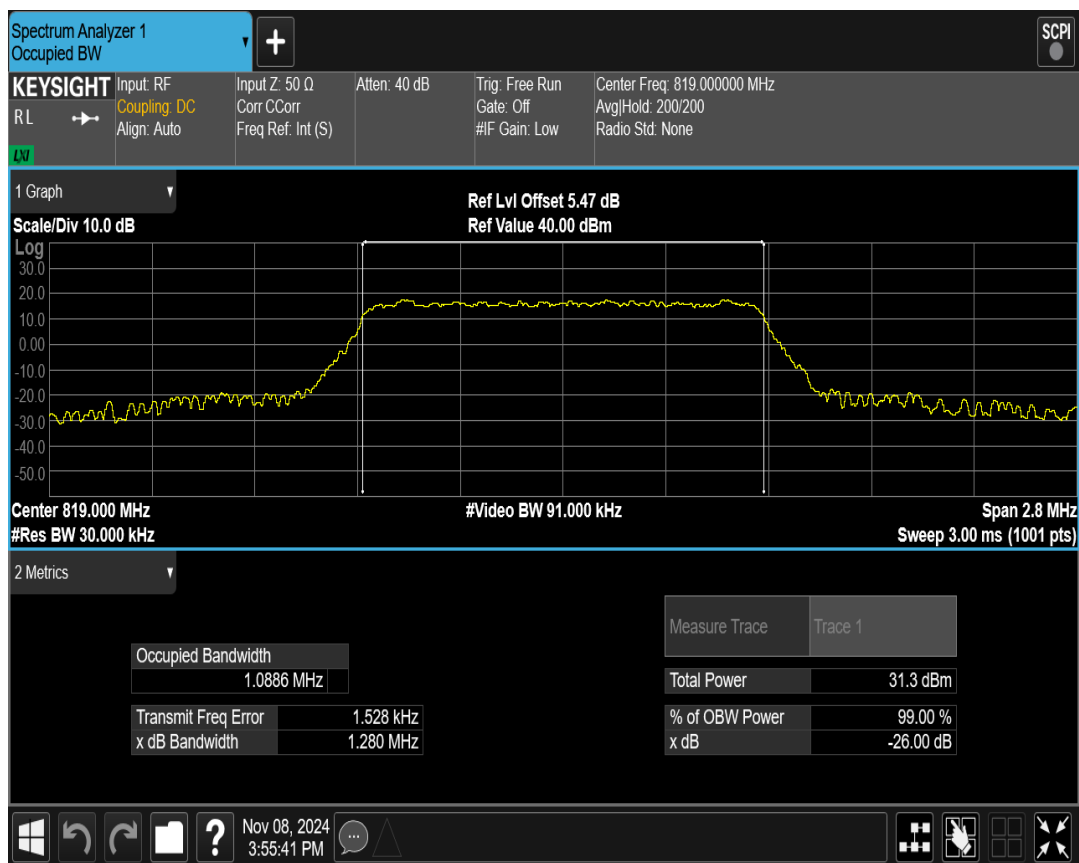

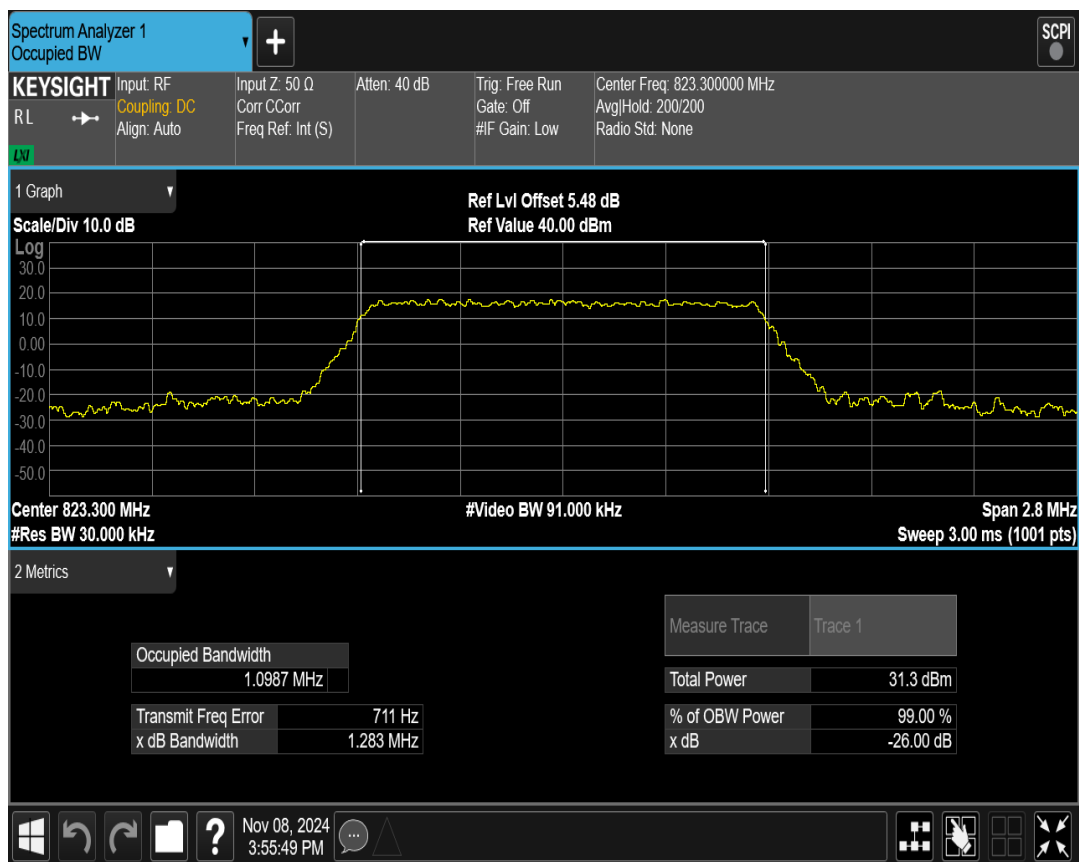
Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0



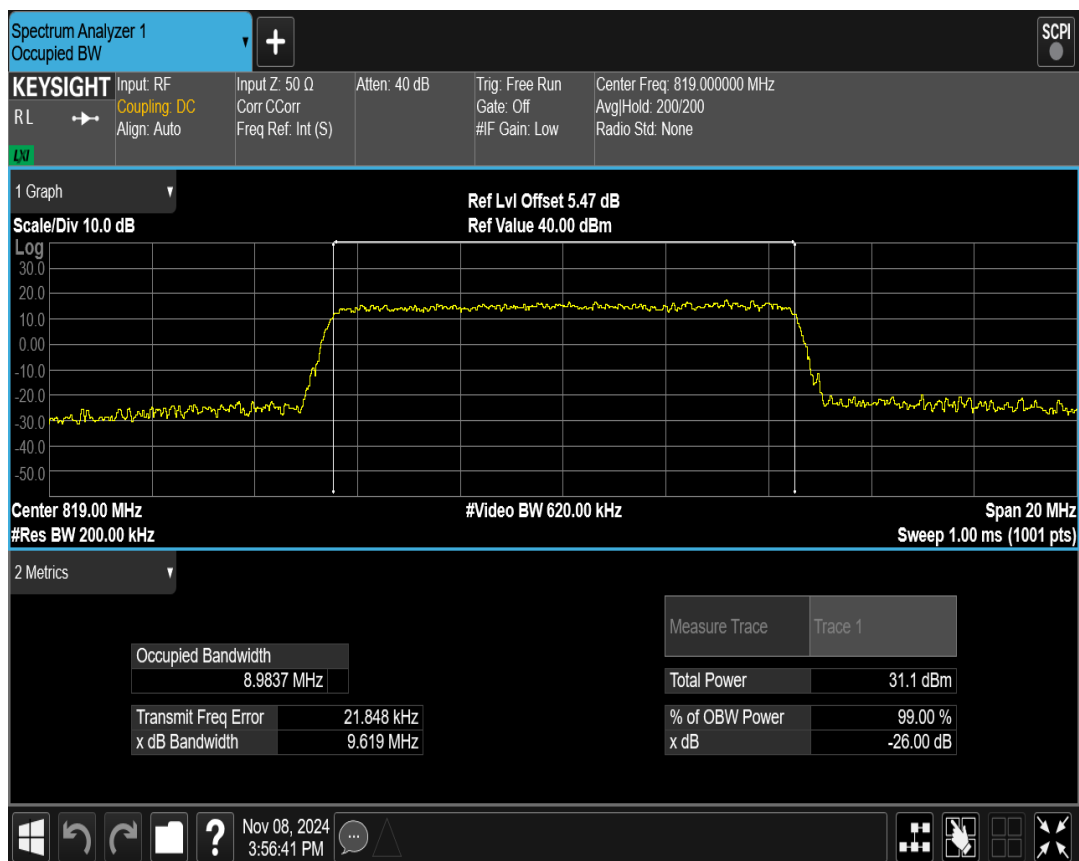
Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0




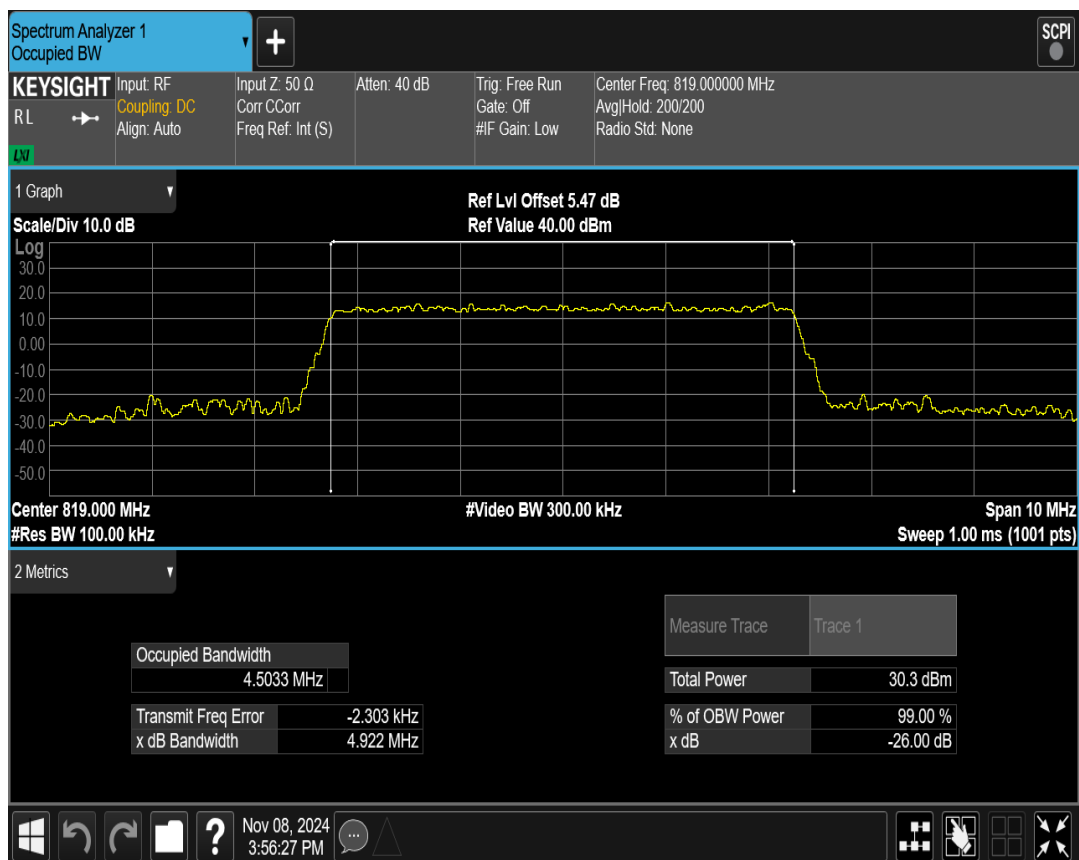Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=25 Position=#0




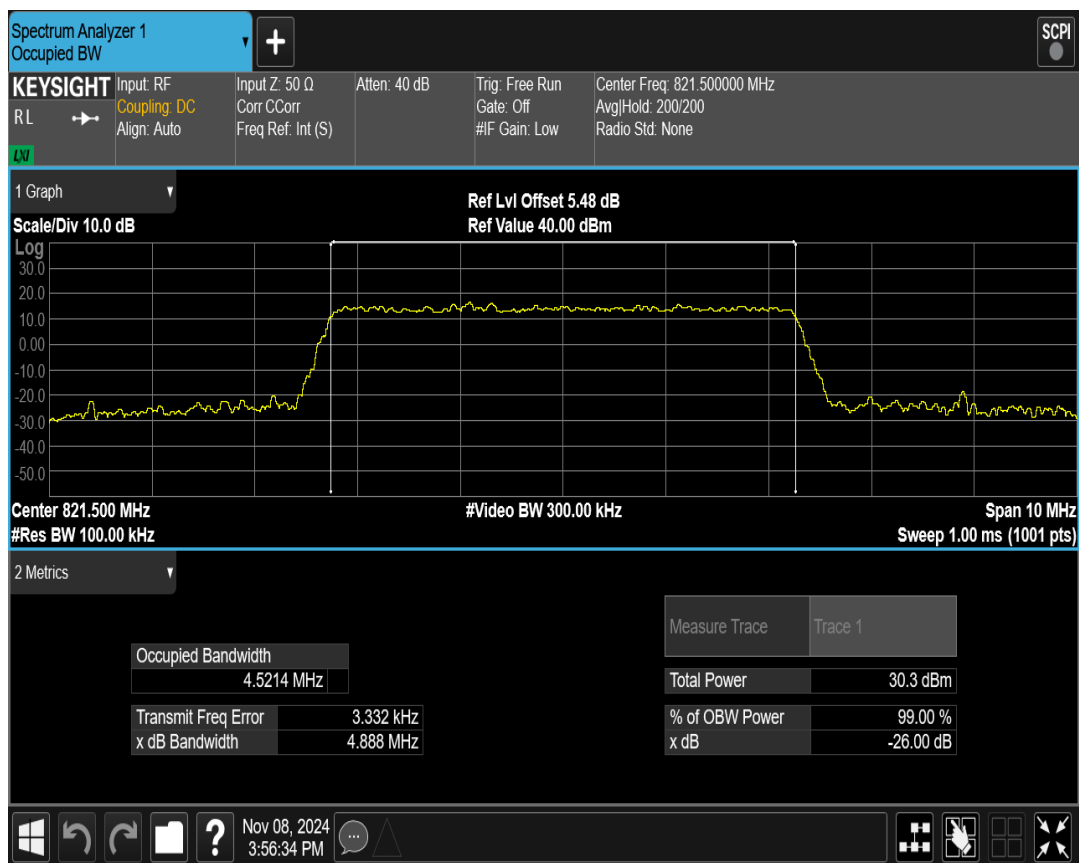Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0


**Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0**

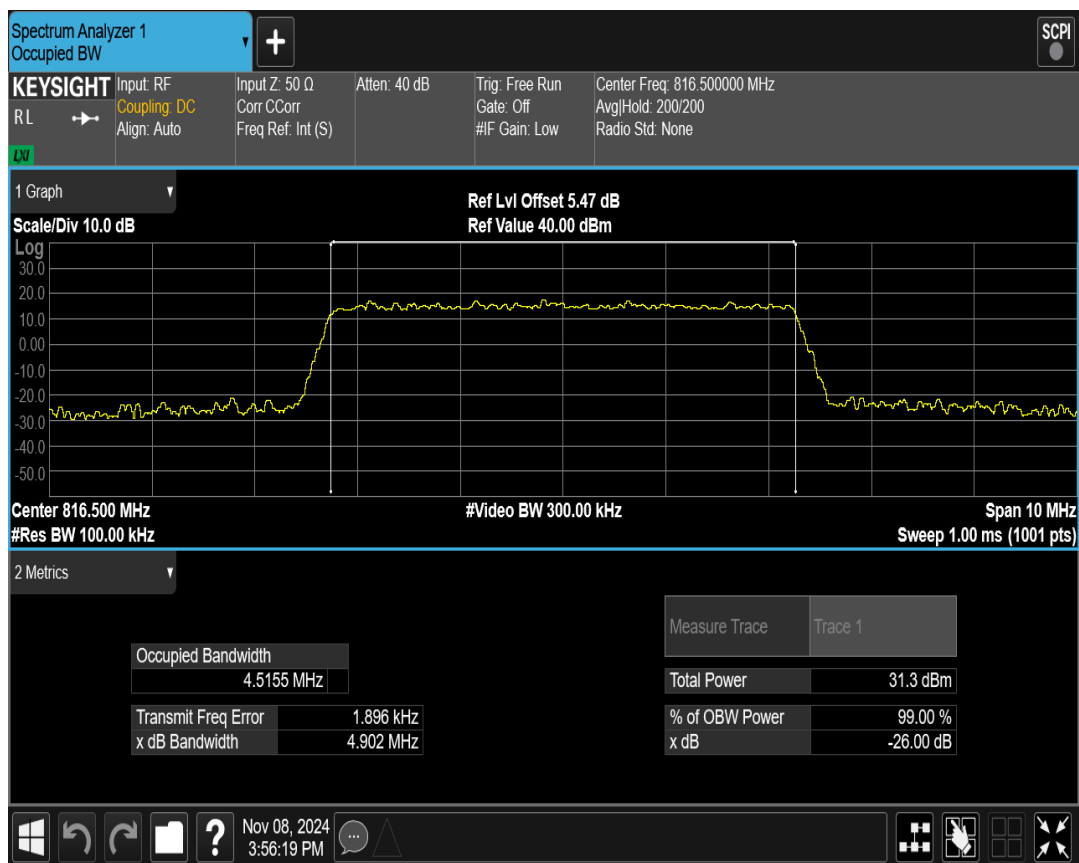

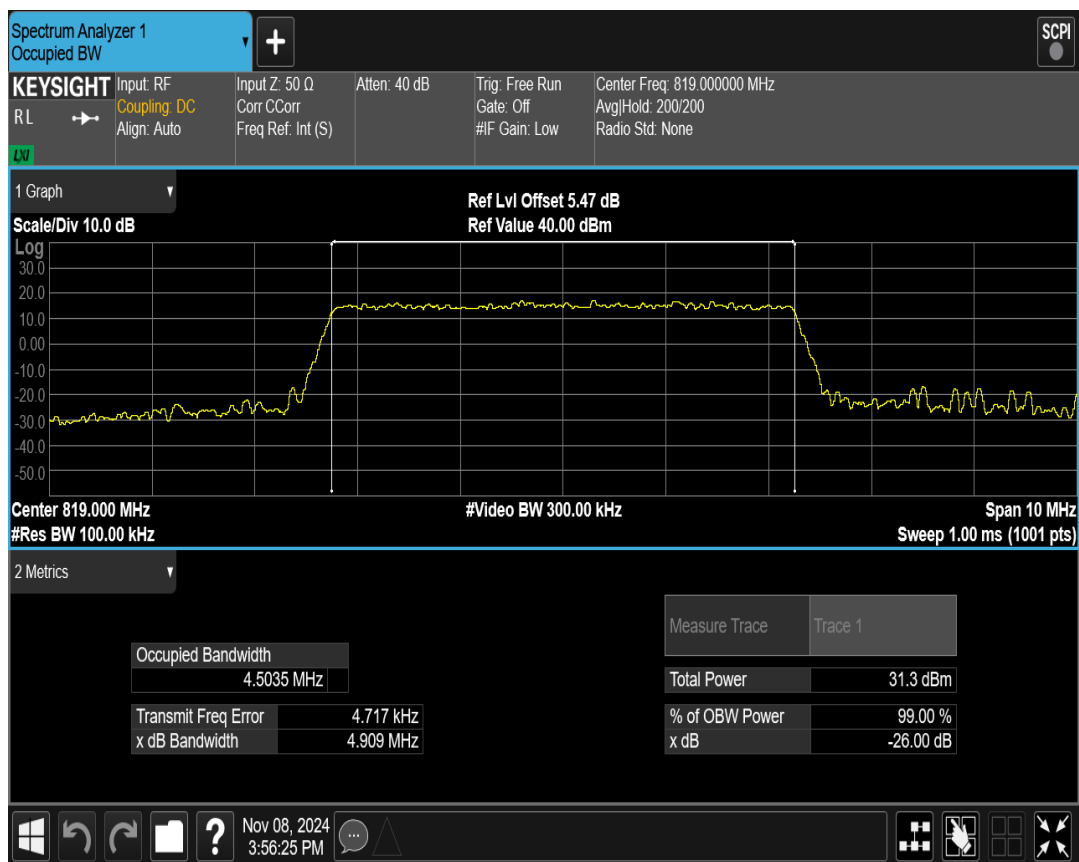
Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=25 Position=#0



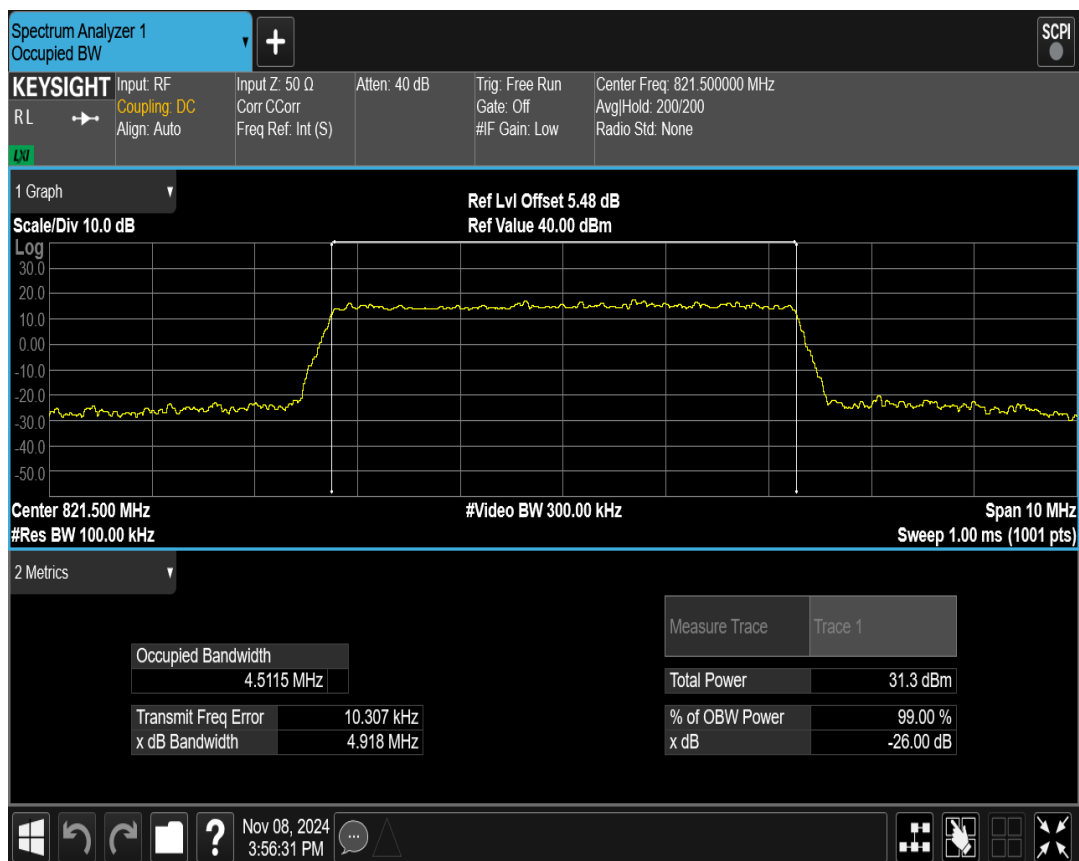
Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0



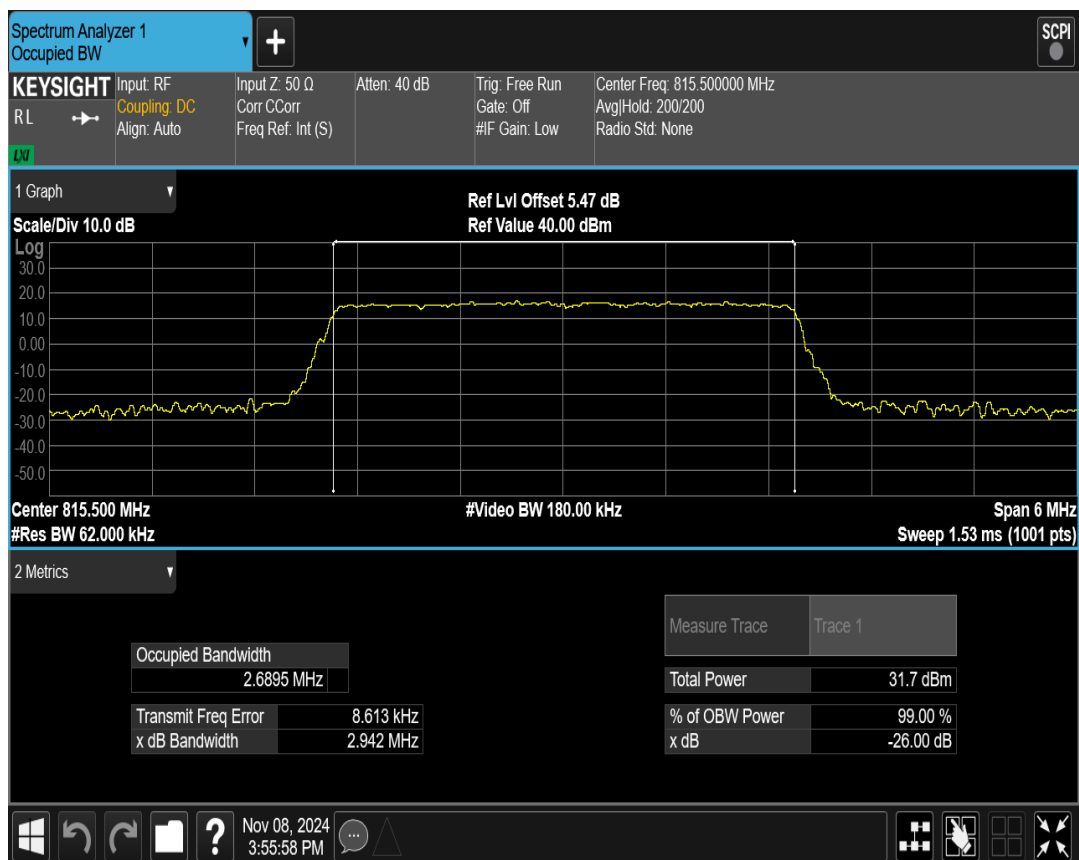
Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0



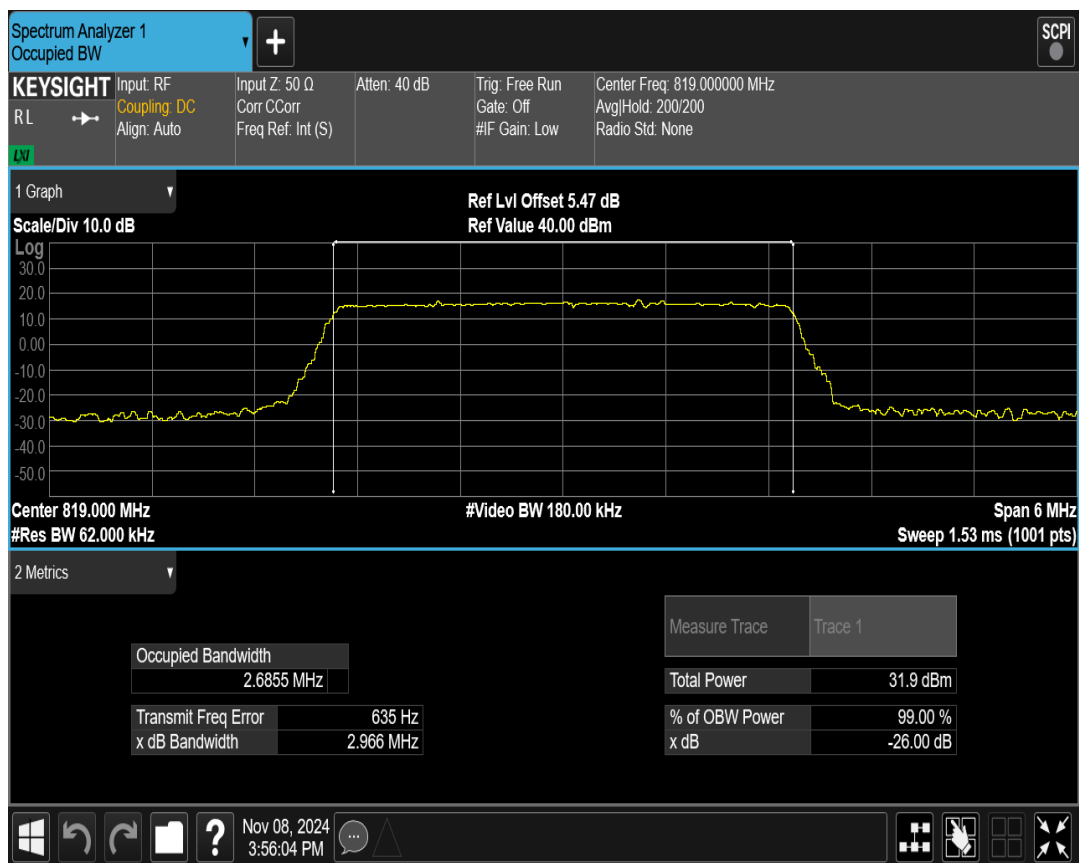Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=15 Position=#0



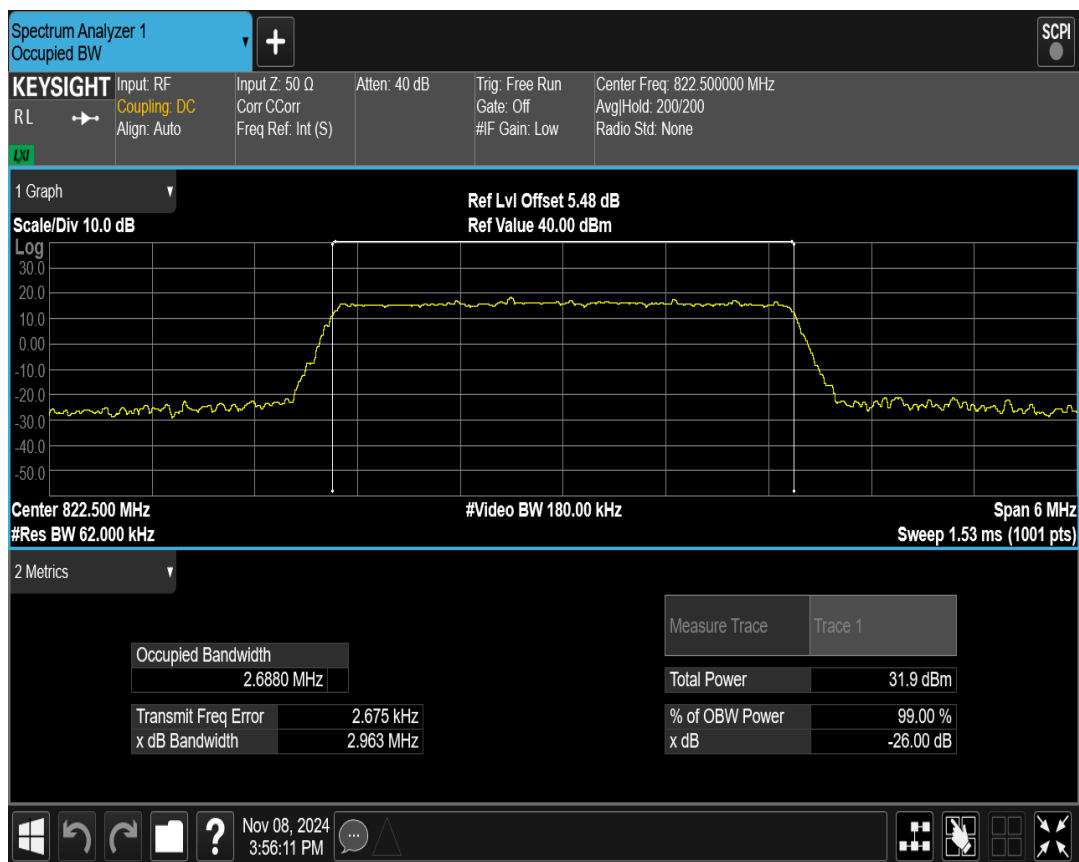
Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0




5 Band edge

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	813.94	-24.04	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	815.45	-24.85	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	824.10	-23.02	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	822.41	-24.84	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	817.04	-23.75	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	813.95	-25.46	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	820.96	-23.88	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	820.96	-24.35	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	819.04	-30.82	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	819.04	-31.12	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	824.04	-28.83	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	824.07	-31.30	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	824.28	-33.57	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	824.06	-34.78	-13	PASS

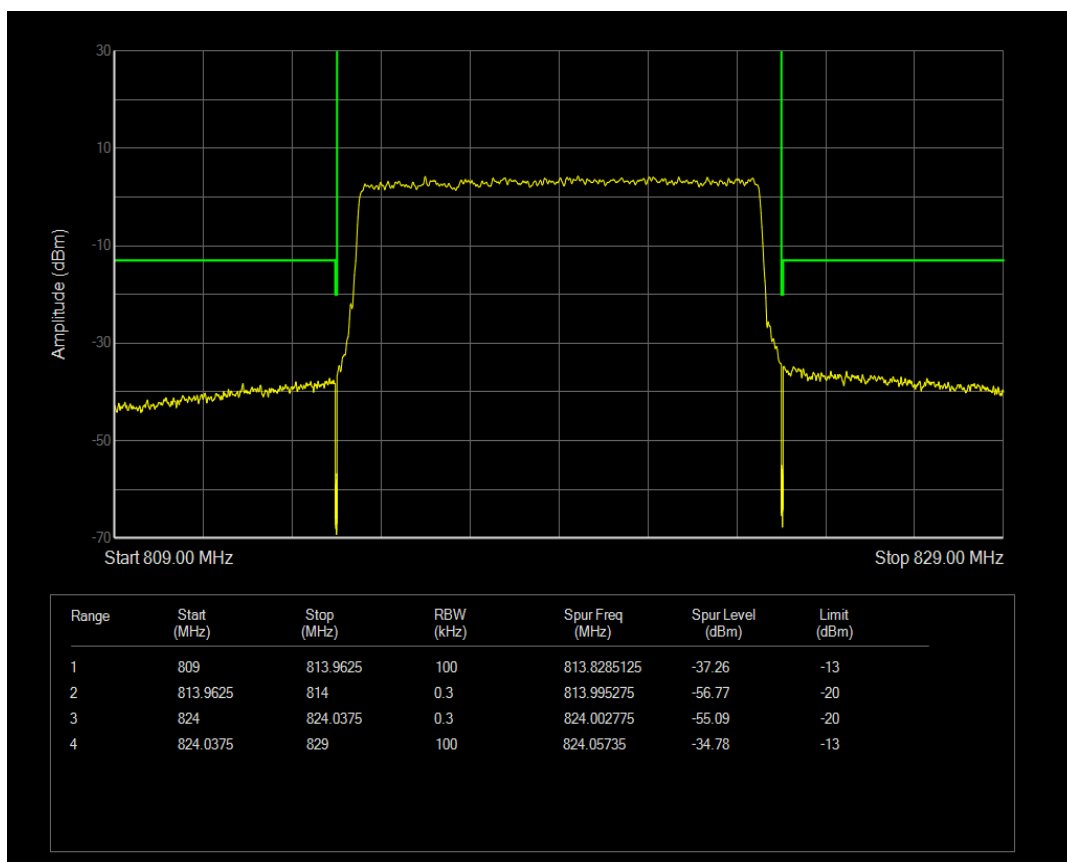
Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0



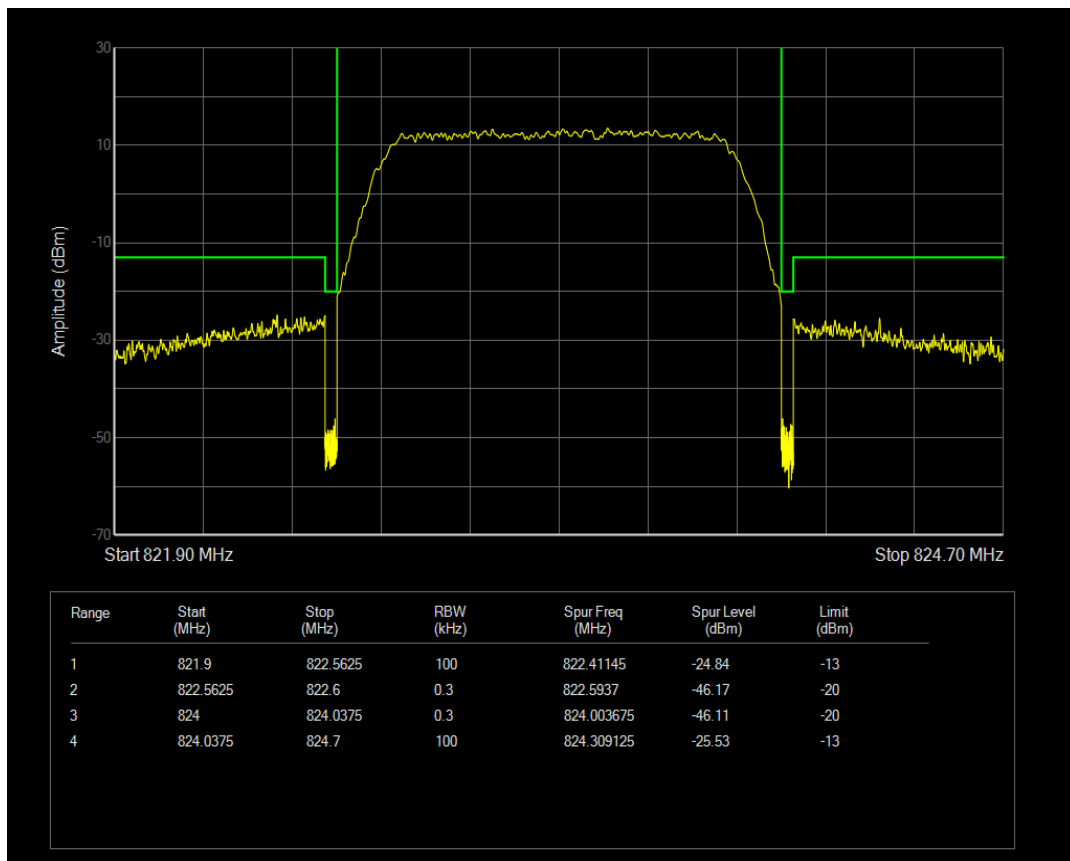
Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0



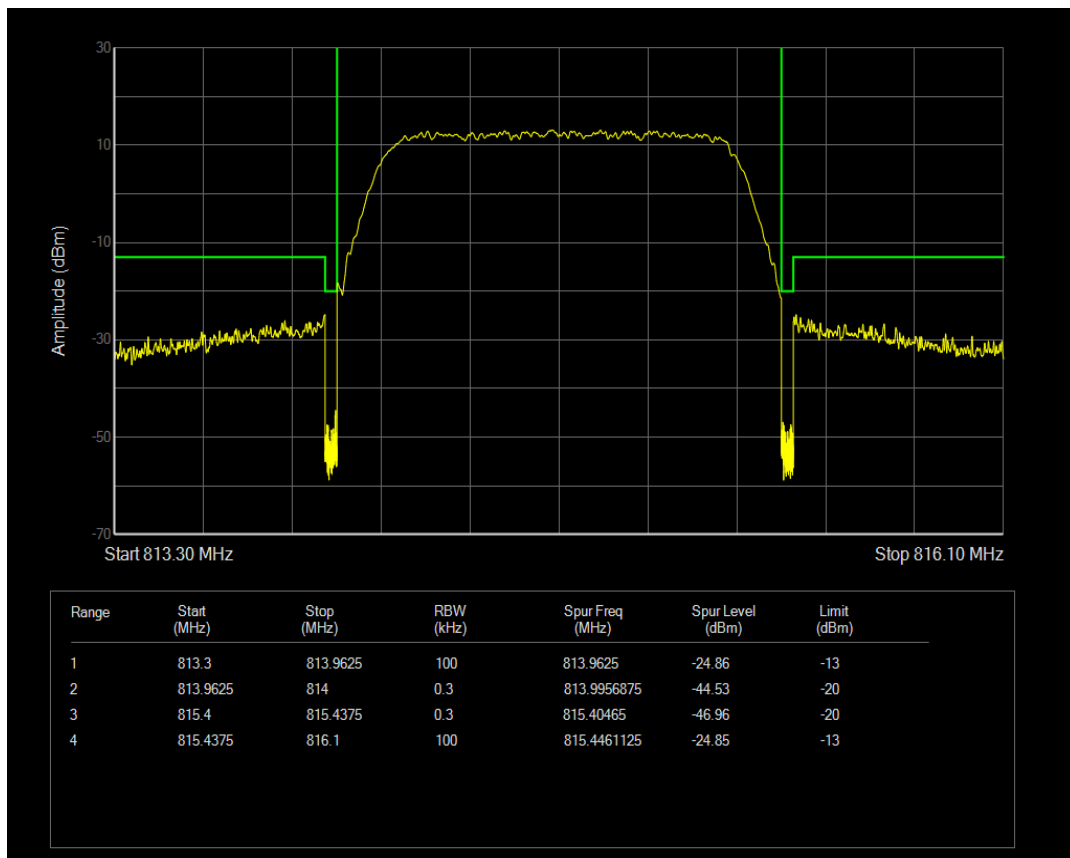Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0




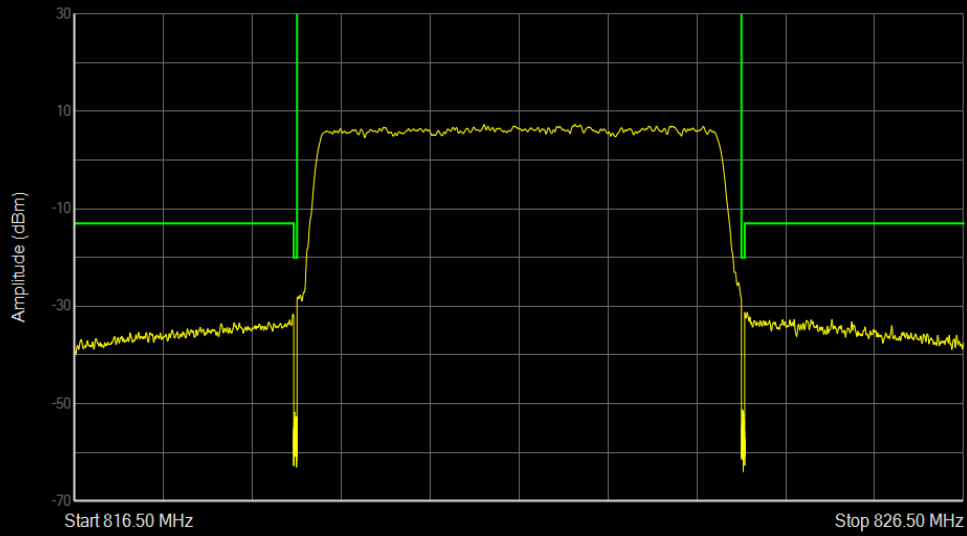Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0





Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	816.5	818.9625	100	818.9551125	-31.6	-13
2	818.9625	819	0.3	818.973525	-51.73	-20
3	824	824.0375	0.3	824.0136875	-51.3	-20
4	824.0375	826.5	100	824.06705	-31.3	-13


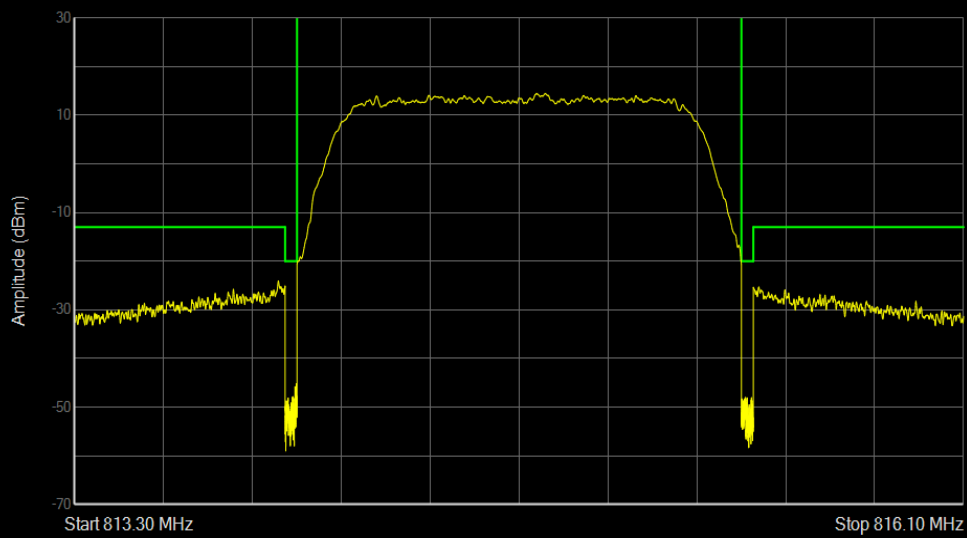
Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0






Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	813.3	813.9625	100	813.9413	-24.04	-13
2	813.9625	814	0.3	813.997675	-45.18	-20
3	815.4	815.4375	0.3	815.4132	-48.02	-20
4	815.4375	816.1	100	815.454725	-25.31	-13

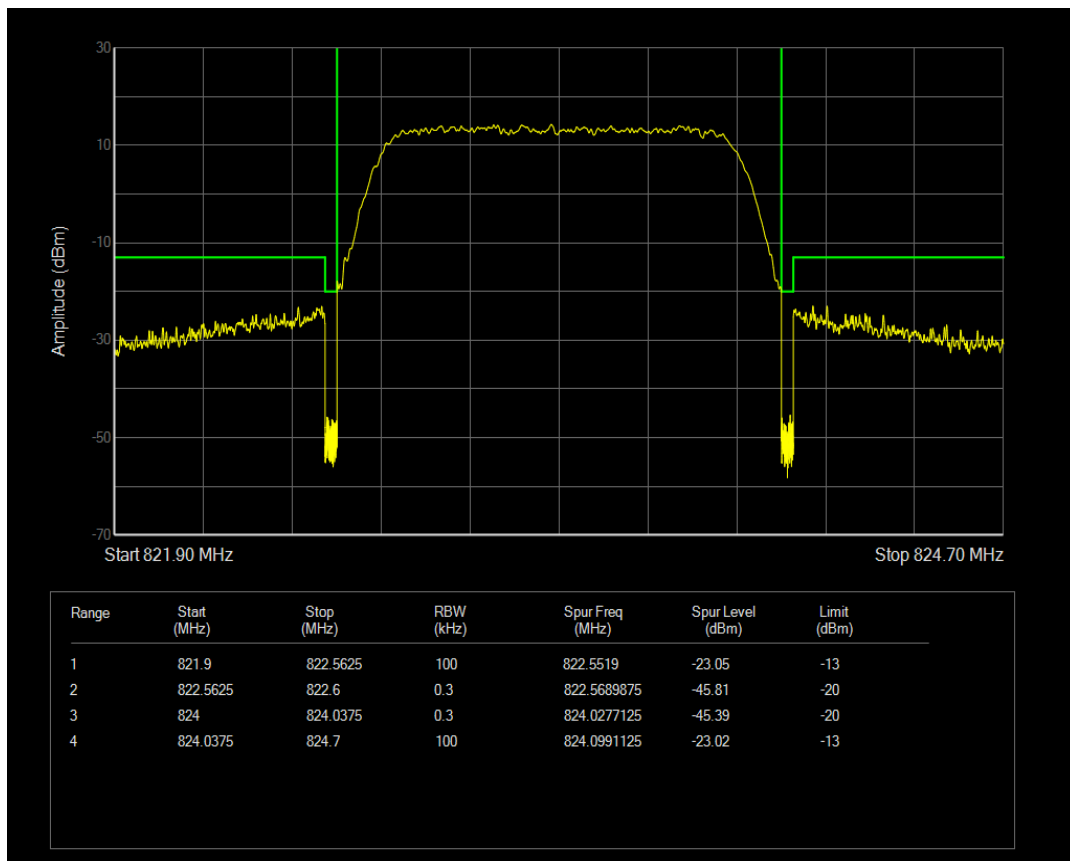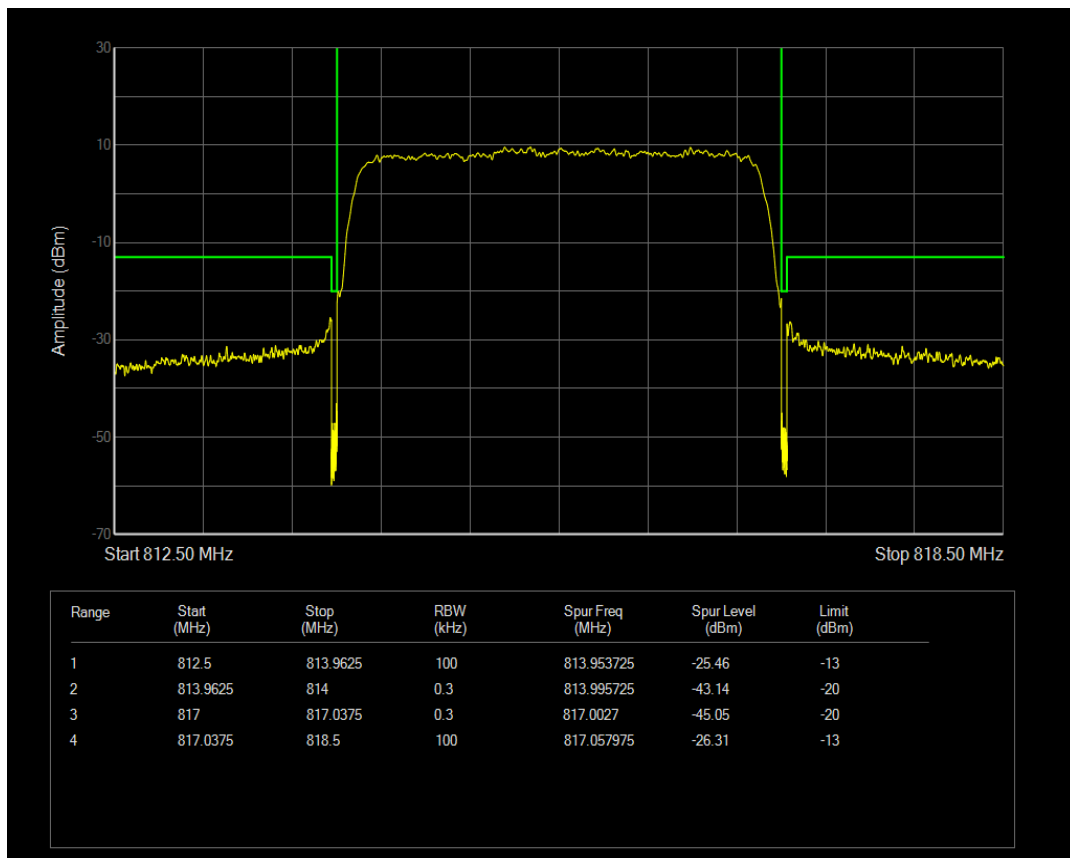Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0

**Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0**

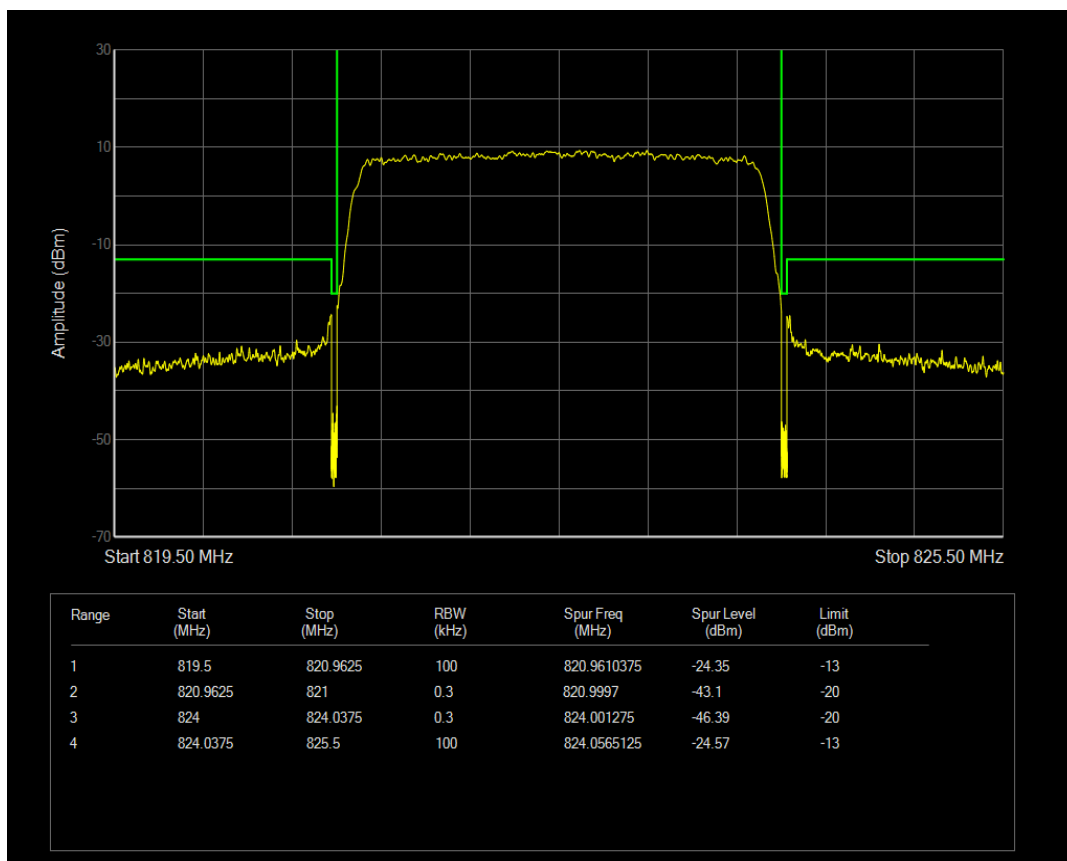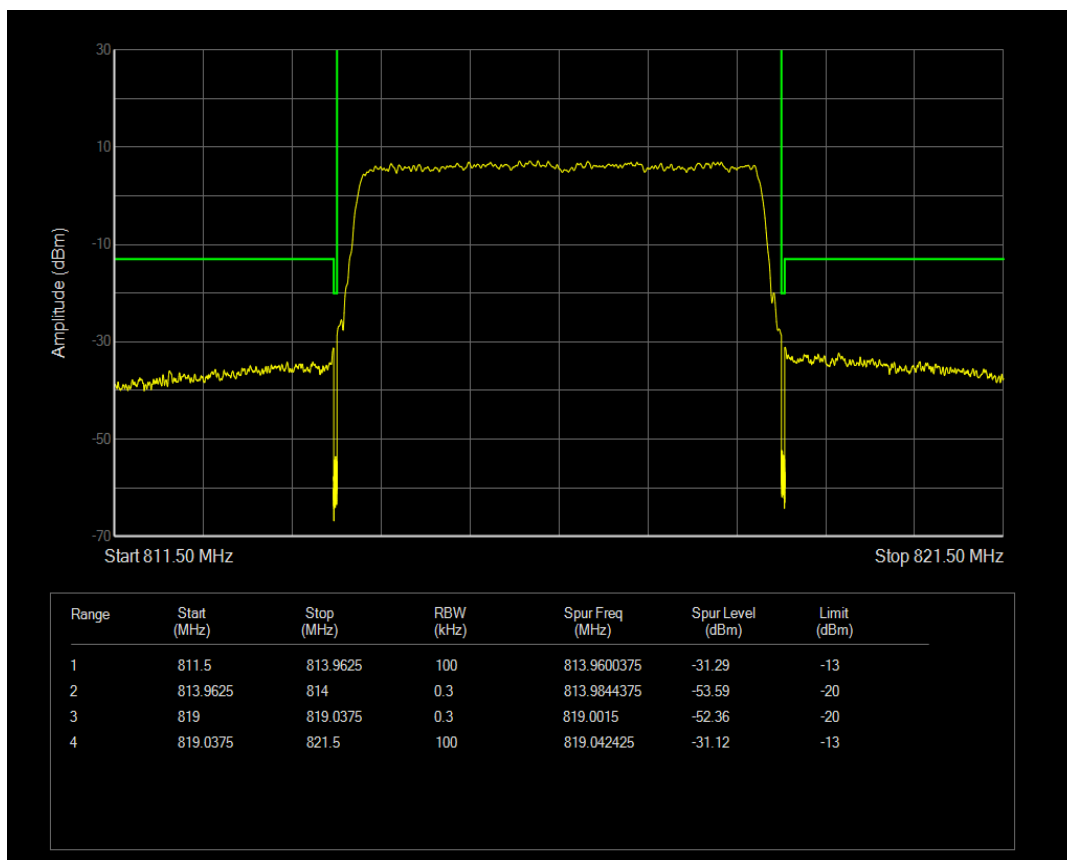
**Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0**

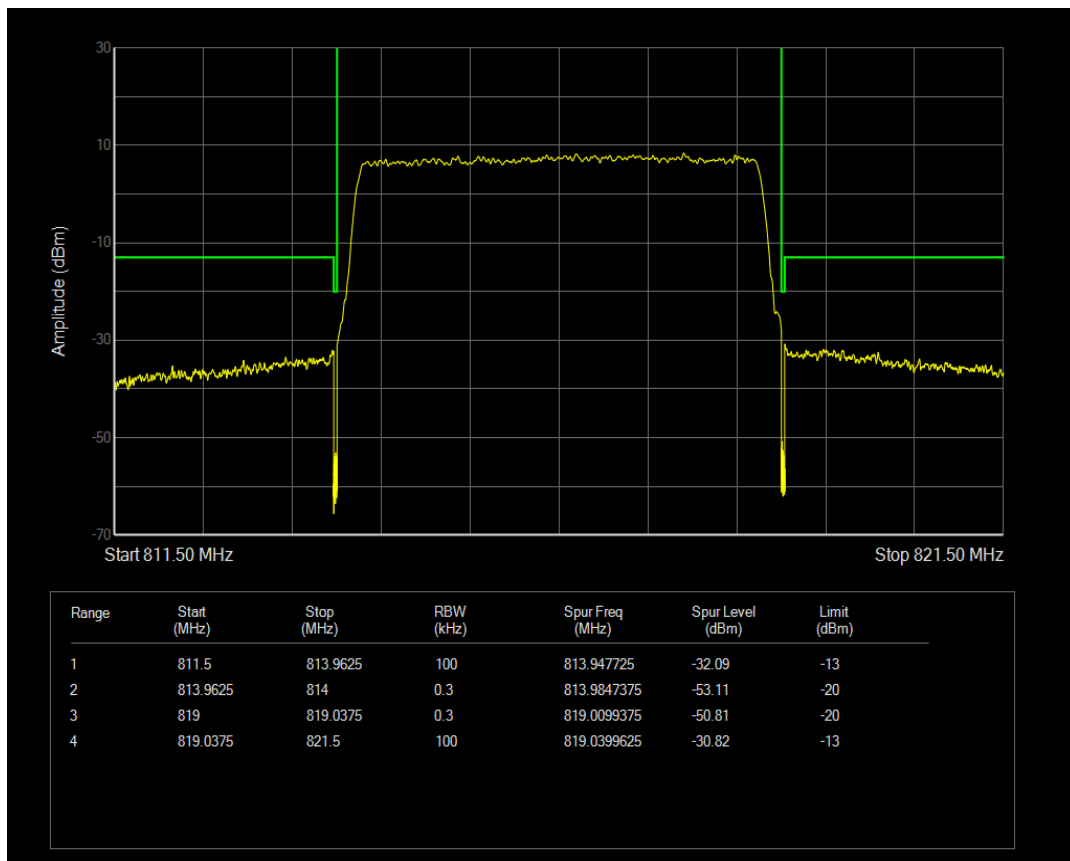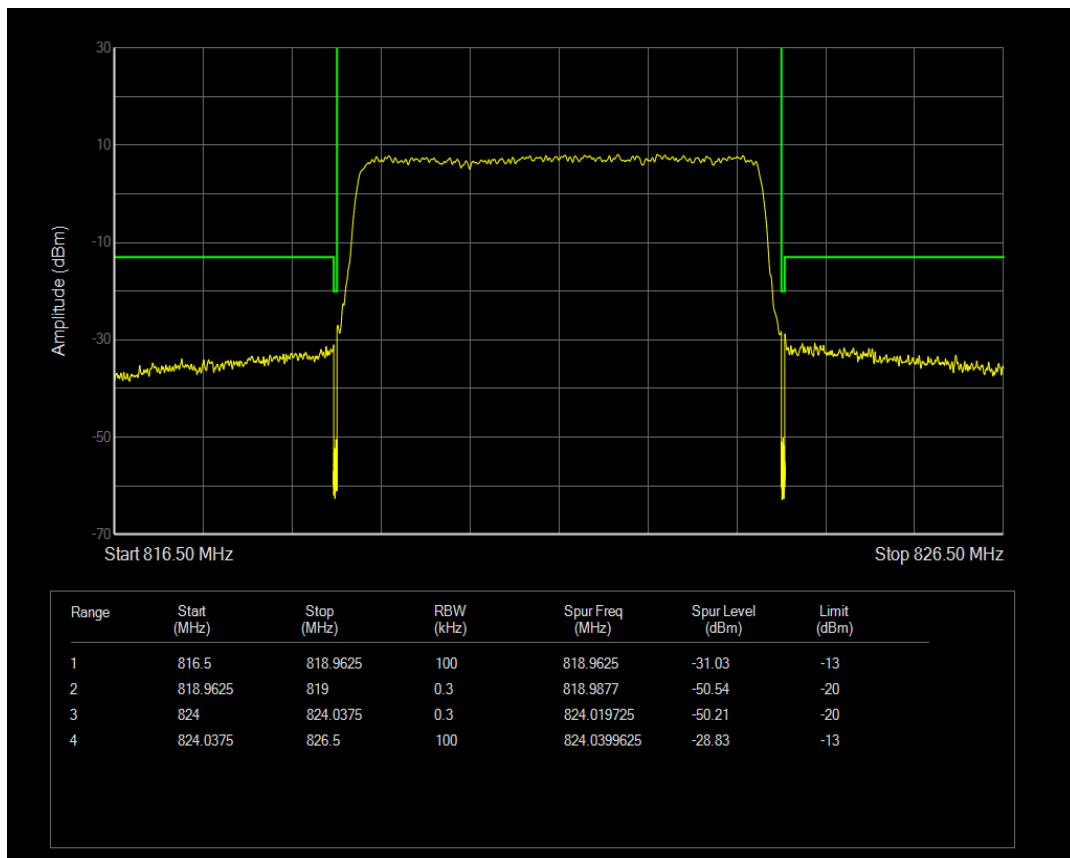**Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0****Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0**

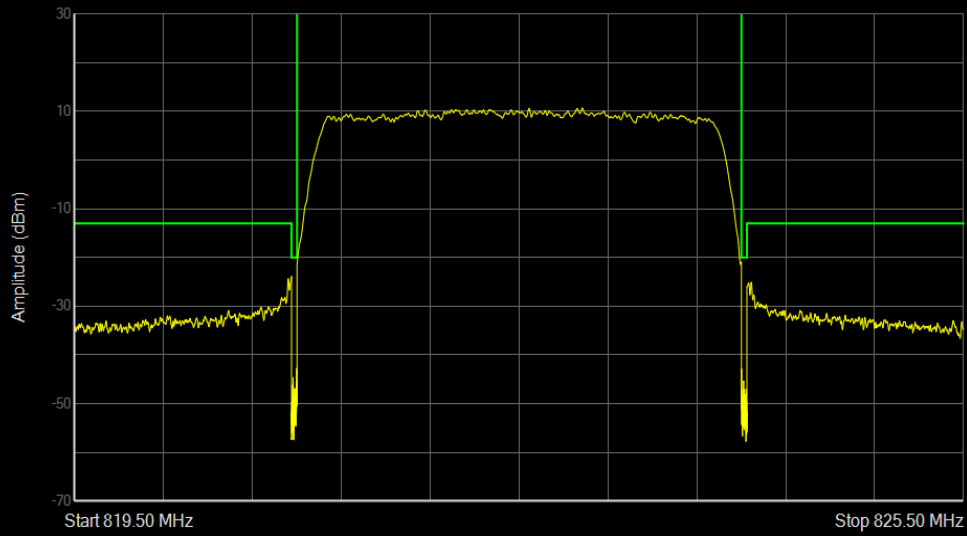


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	819.5	820.9625	100	820.9625	-23.88	-13
2	820.9625	821	0.3	820.9977125	-42.75	-20
3	824	824.0375	0.3	824.000975	-42.93	-20
4	824.0375	825.5	100	824.06675	-25.09	-13

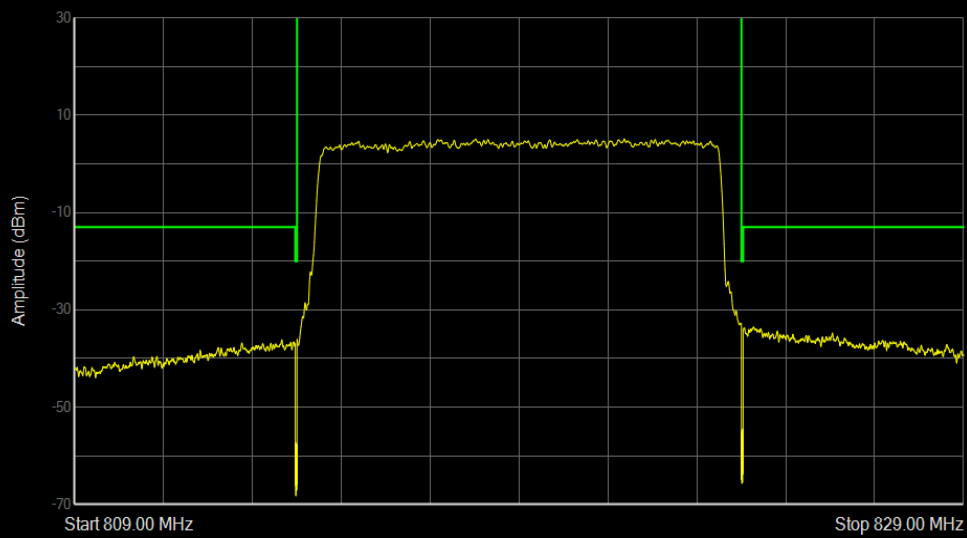Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0



Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	809	813.9625	100	813.654825	-36.15	-13
2	813.9625	814	0.3	813.9676375	-57.31	-20
3	824	824.0375	0.3	824.0292125	-54.5	-20
4	824.0375	829	100	824.2757	-33.57	-13

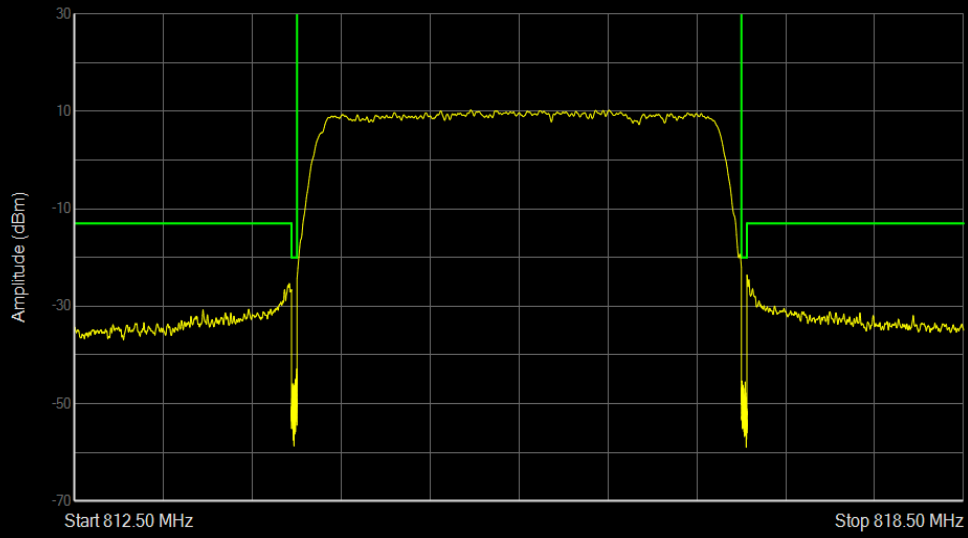Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0




Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	812.5	813.9625	100	813.947875	-25.34	-13
2	813.9625	814	0.3	813.997825	-42.87	-20
3	817	817.0375	0.3	817.004275	-45.36	-20
4	817.0375	818.5	100	817.0389625	-23.75	-13



6 Out-of-band emissions



Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	3778.75	-39.33	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	3750.63	-39.10	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	2470.15	-34.77	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	2470.15	-38.94	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	3879.10	-39.76	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	3837.93	-38.99	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	3857.73	-39.46	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	3834.10	-39.06	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	3818.13	-39.57	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	3767.95	-39.14	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	3868.98	-39.86	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	3789.10	-39.44	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	3866.50	-39.72	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	3871.90	-39.65	-13	PASS


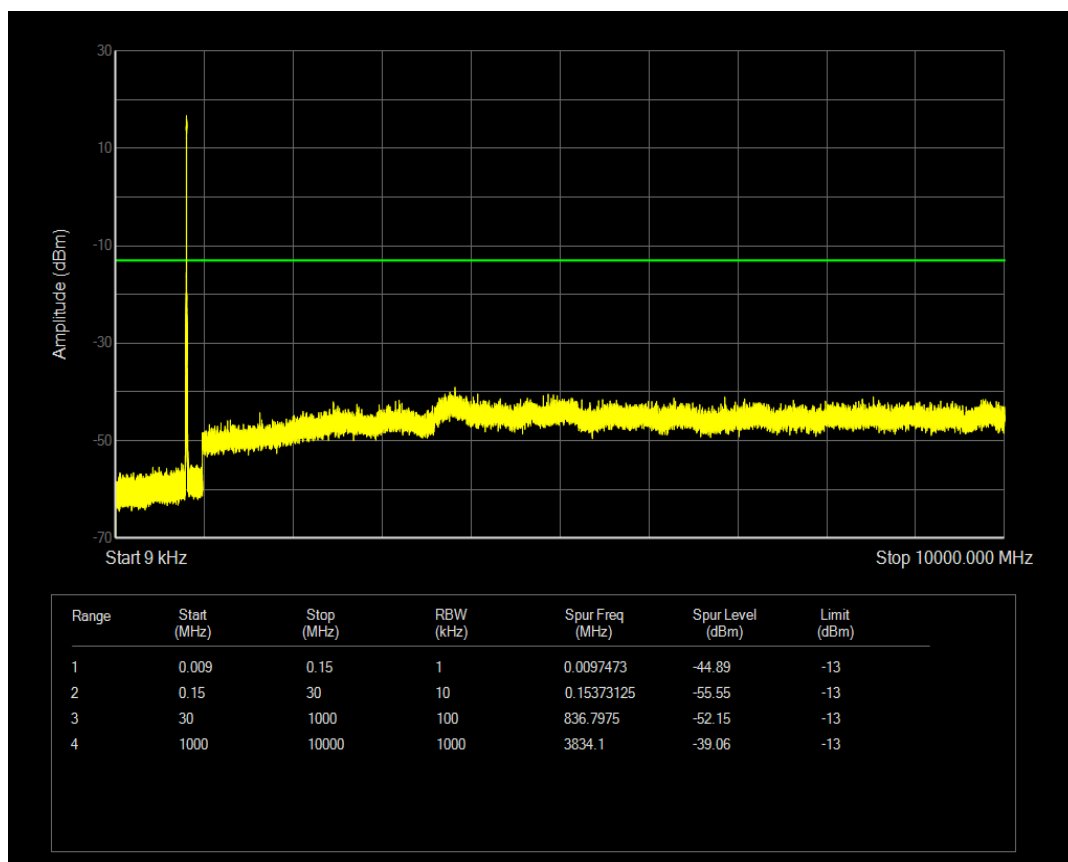
Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0





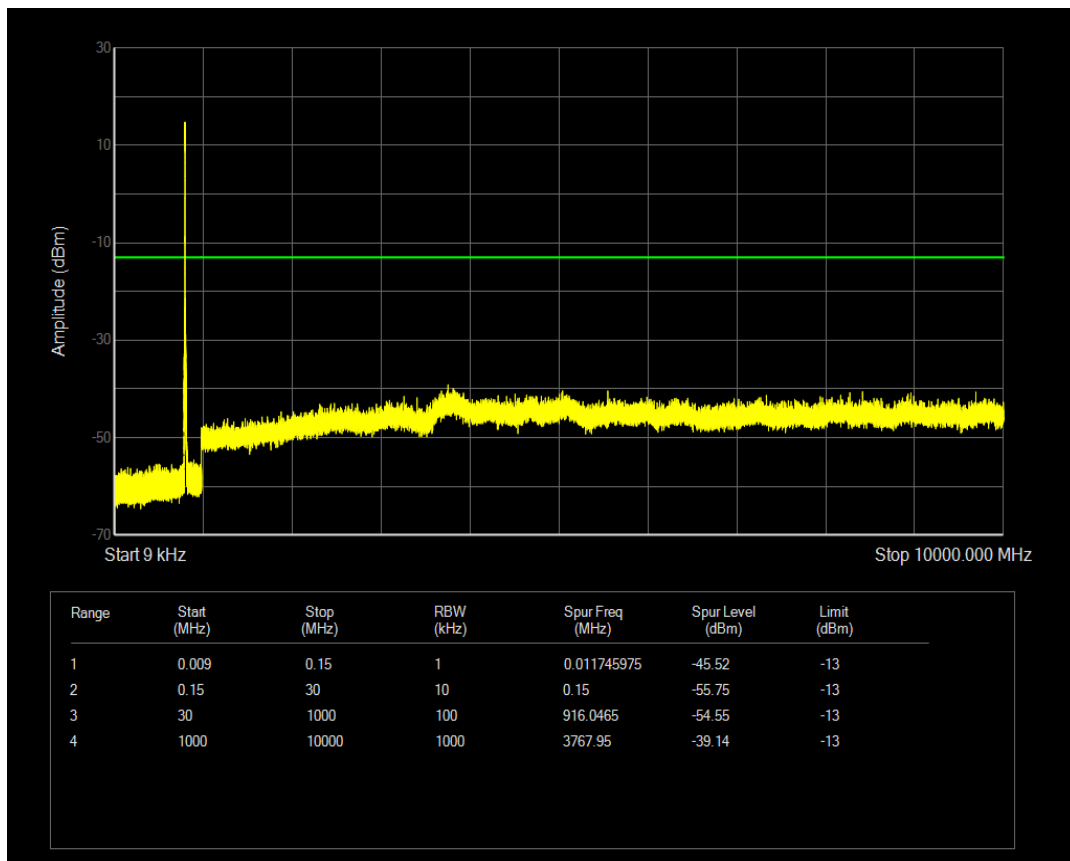
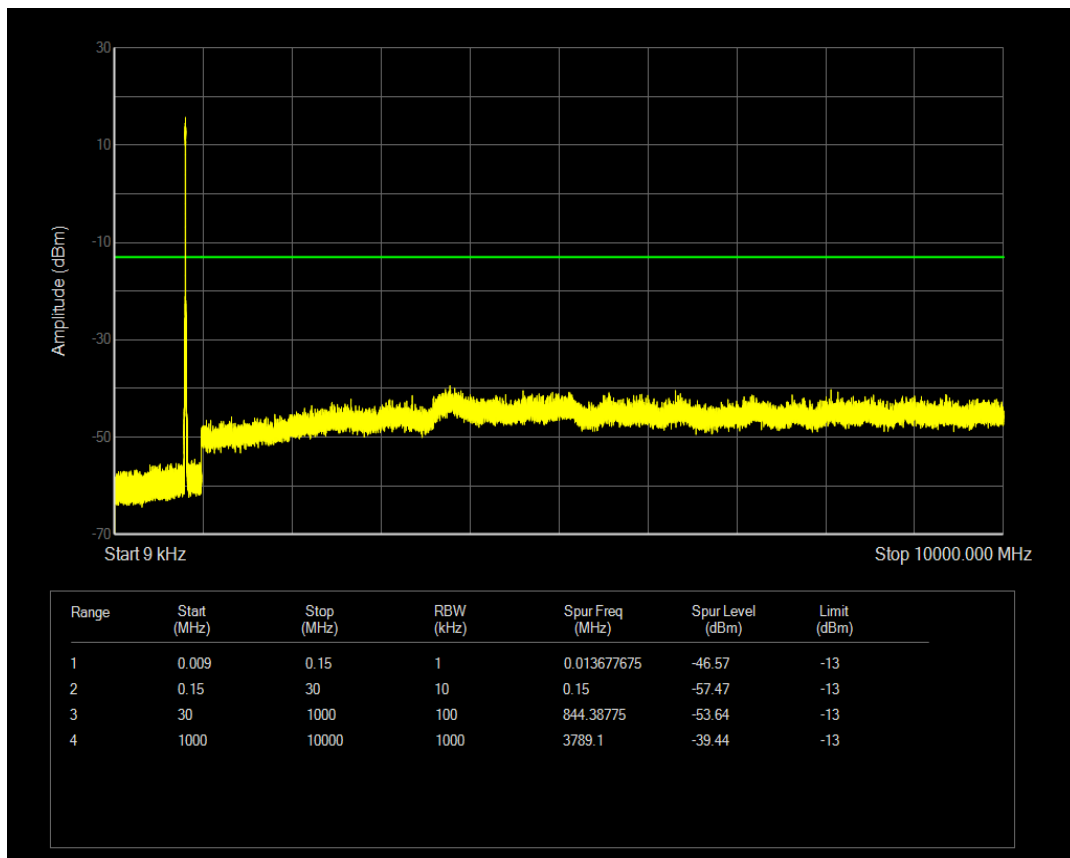
Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0



**Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0**

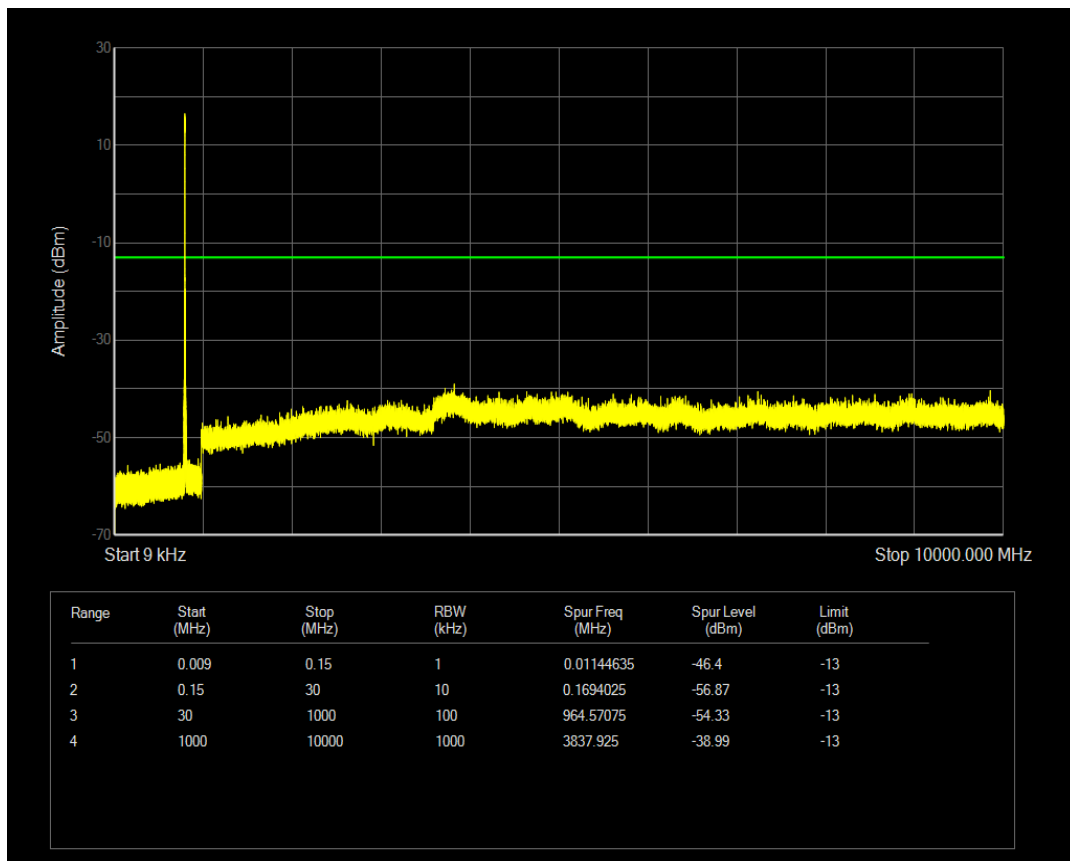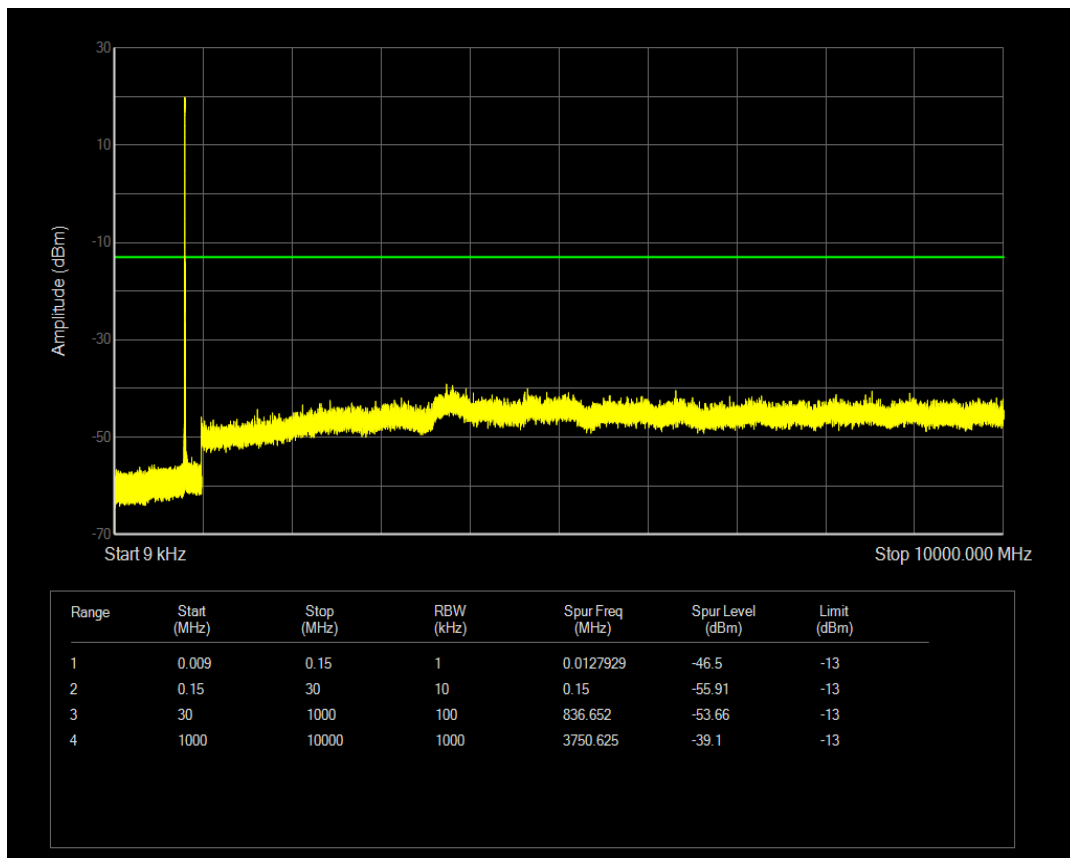**Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0****Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0**

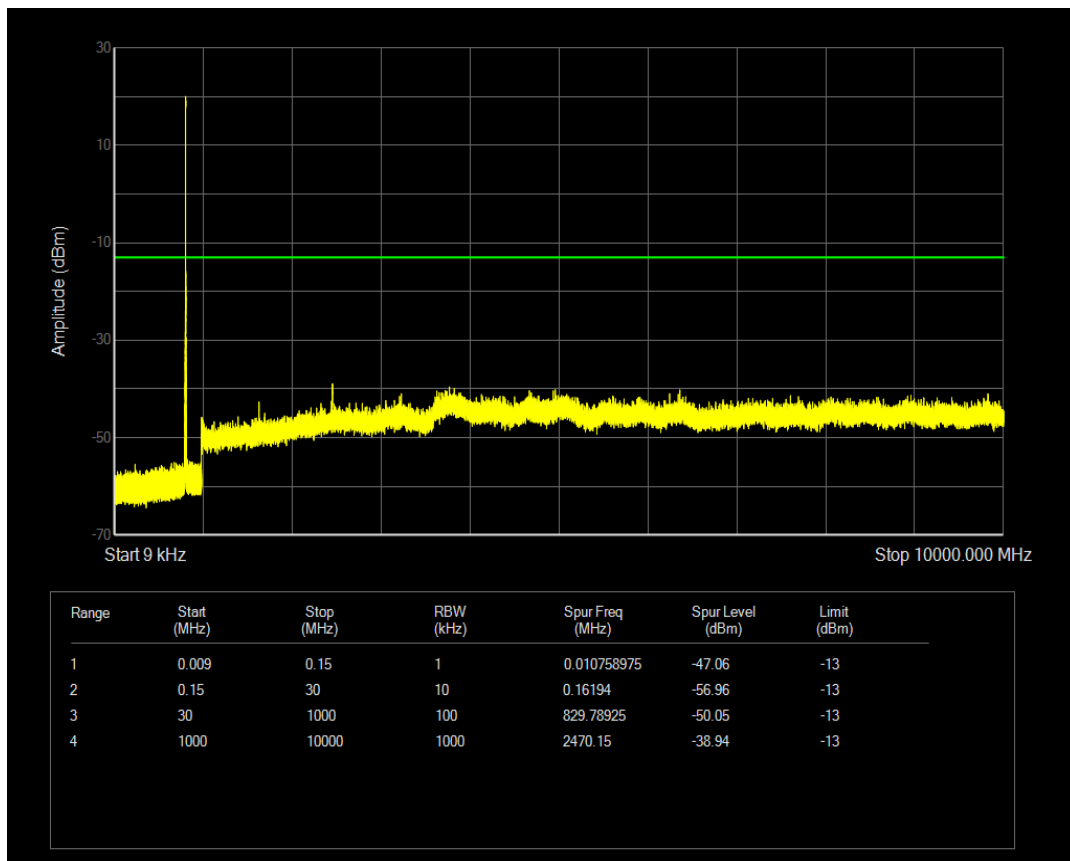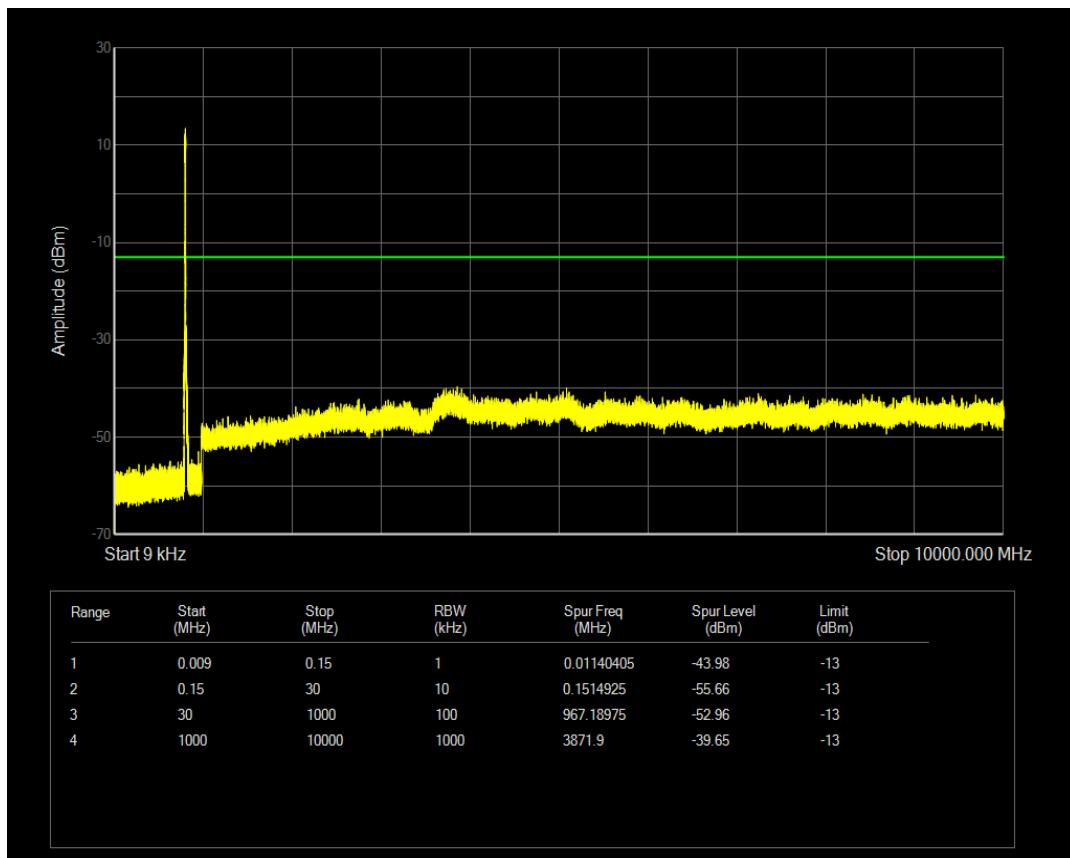**Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0****Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0**

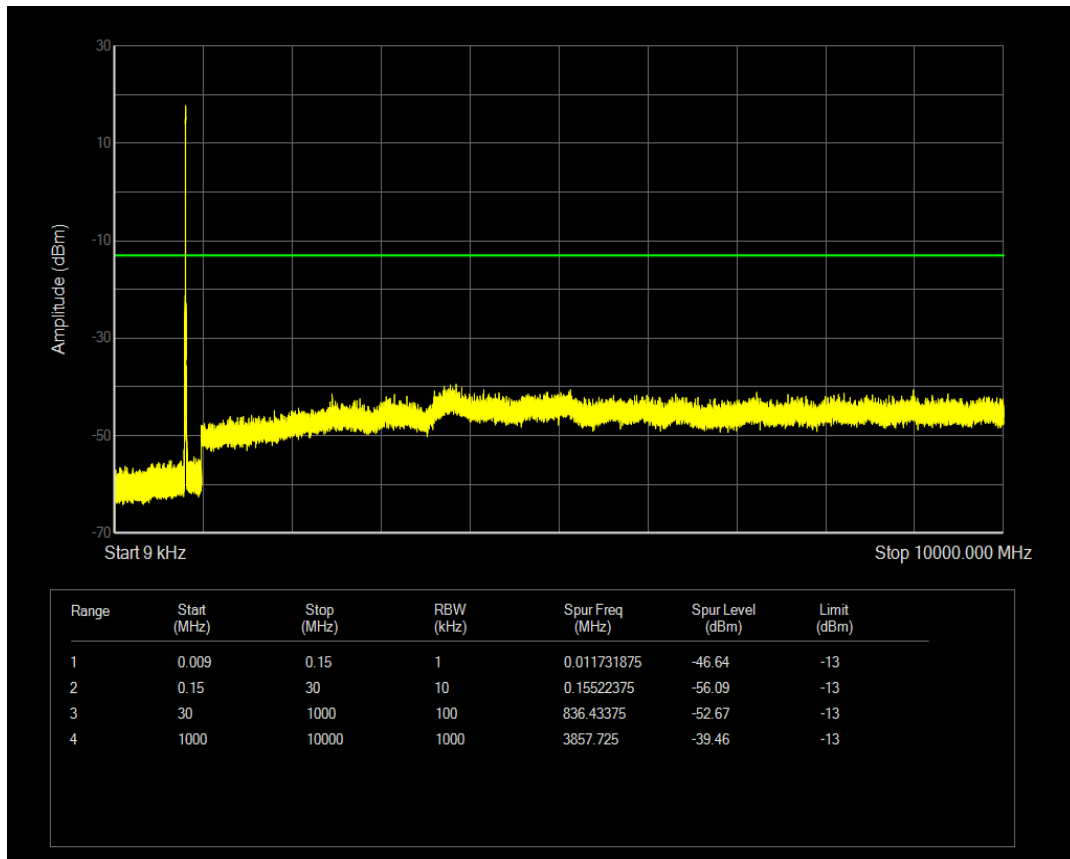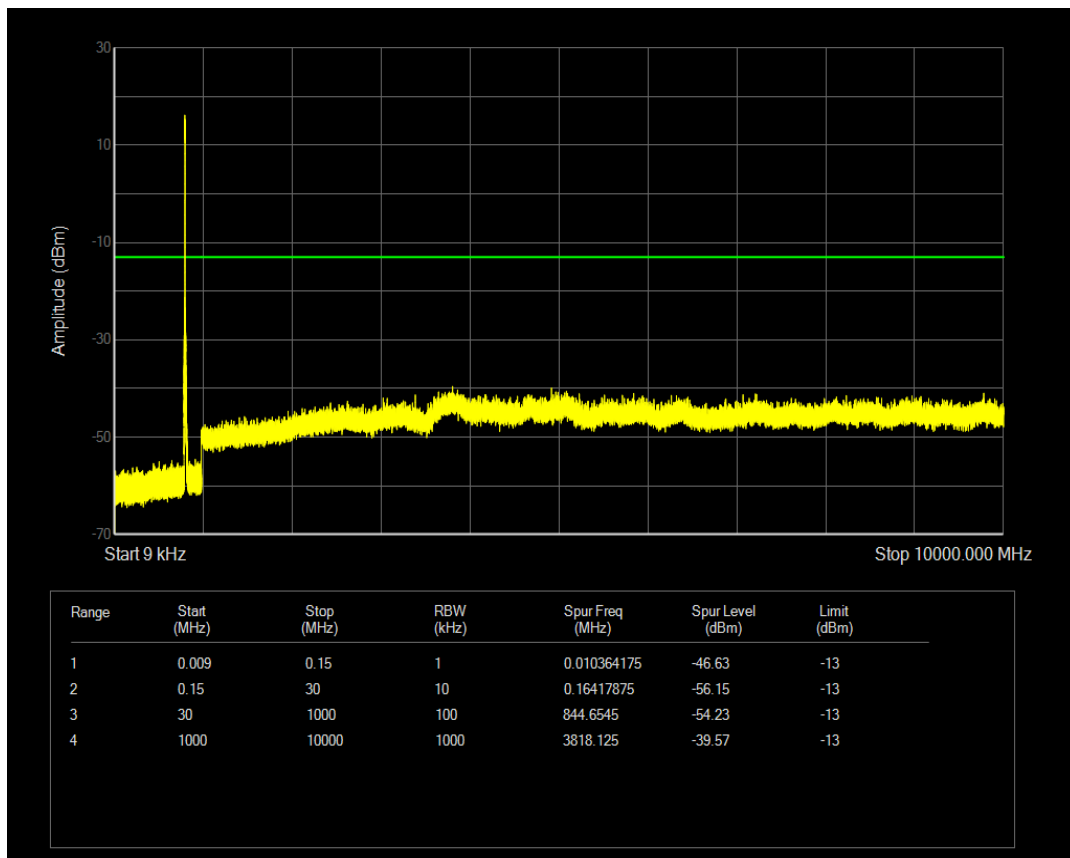**Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0**

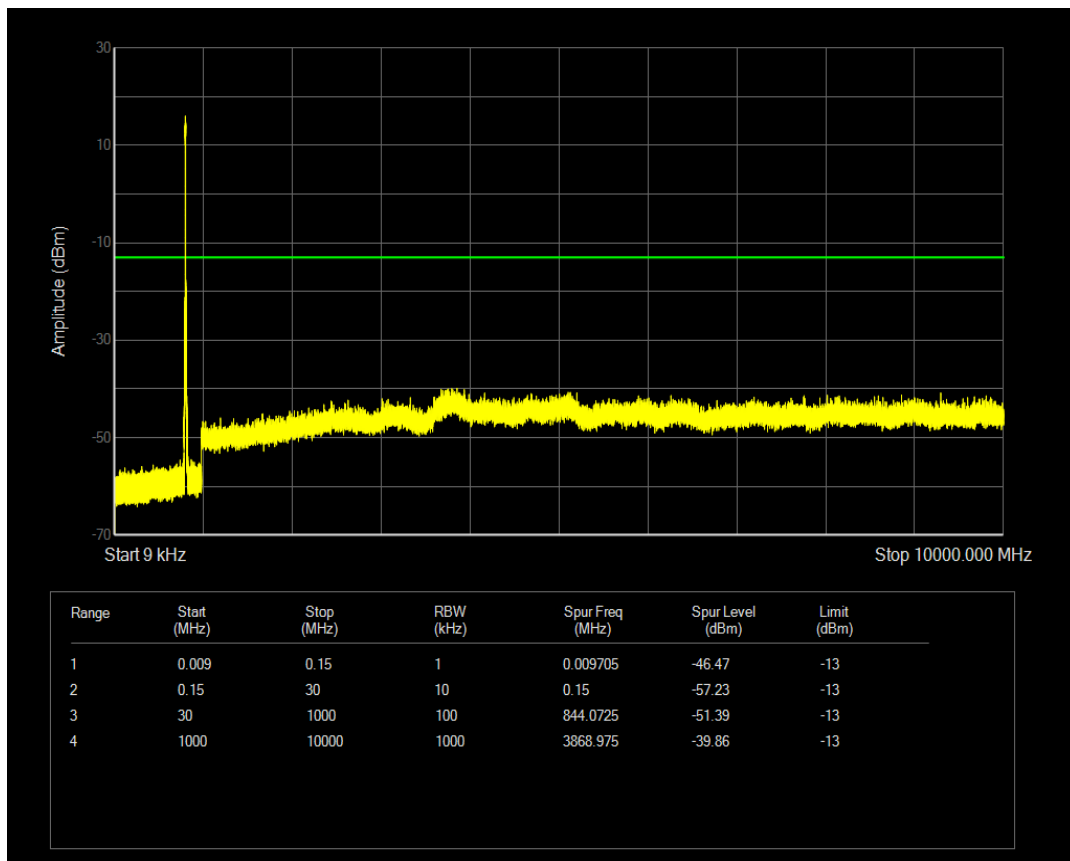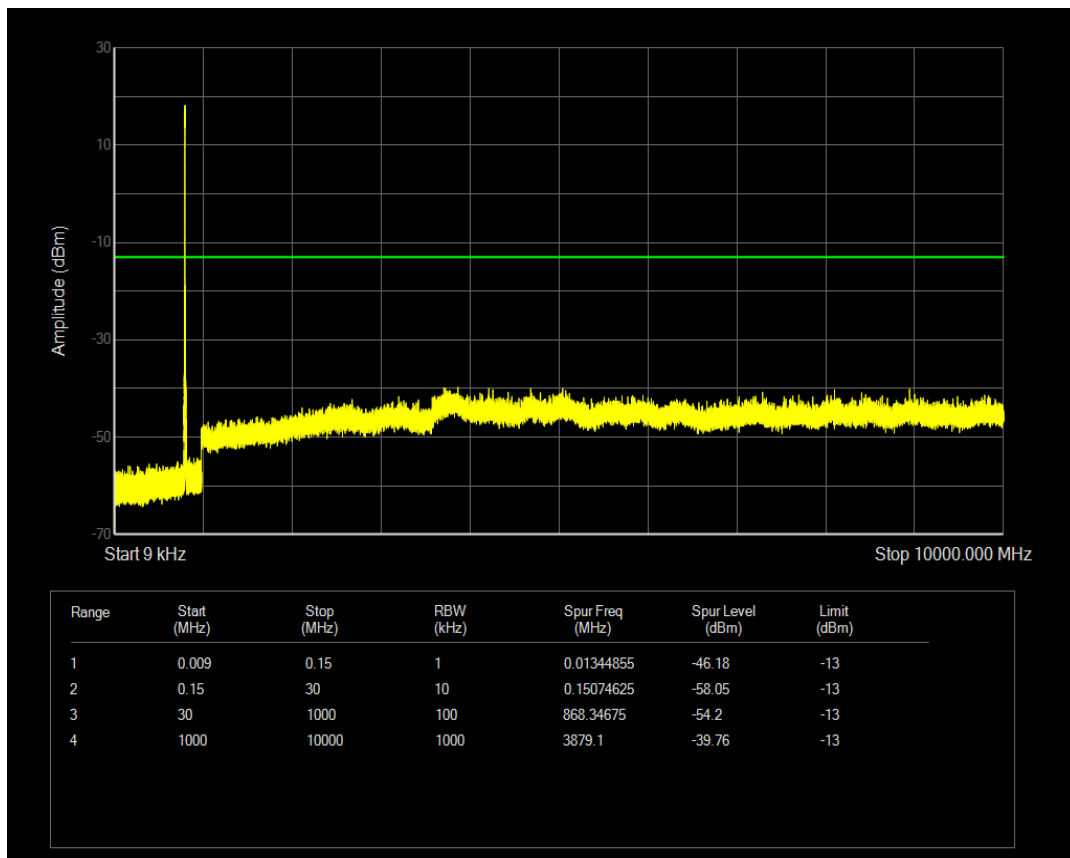**Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0**

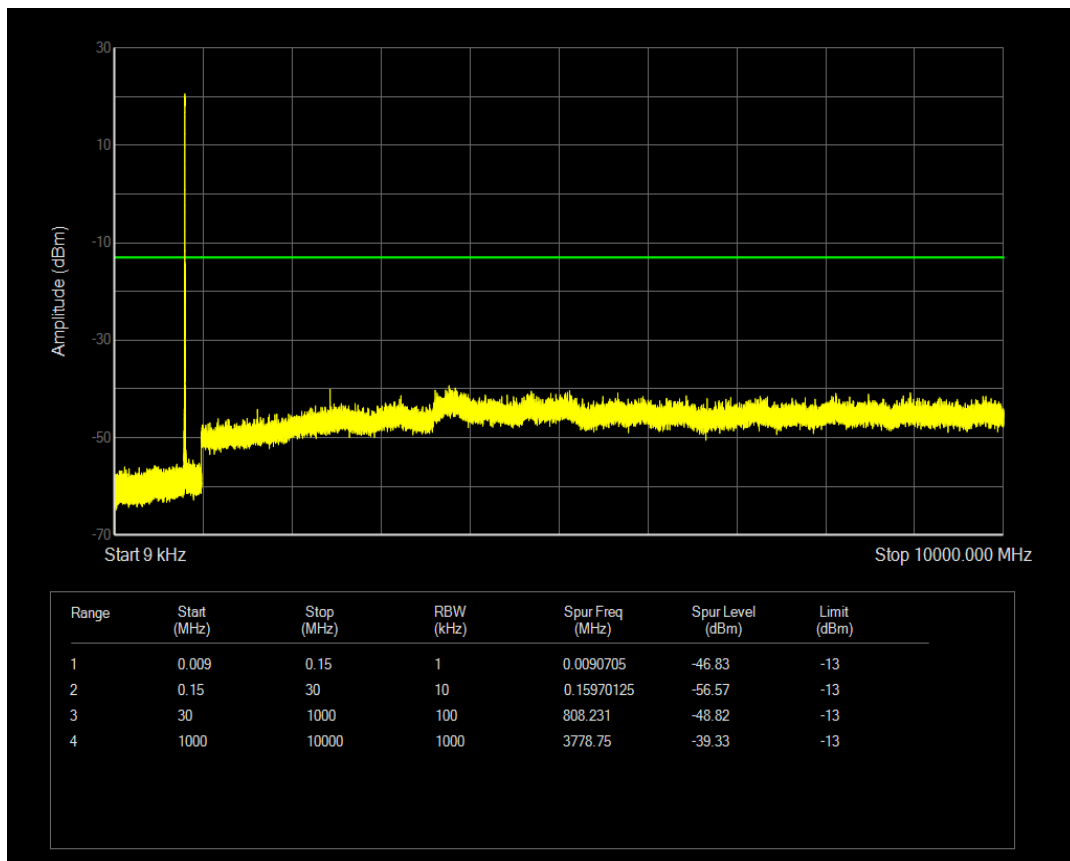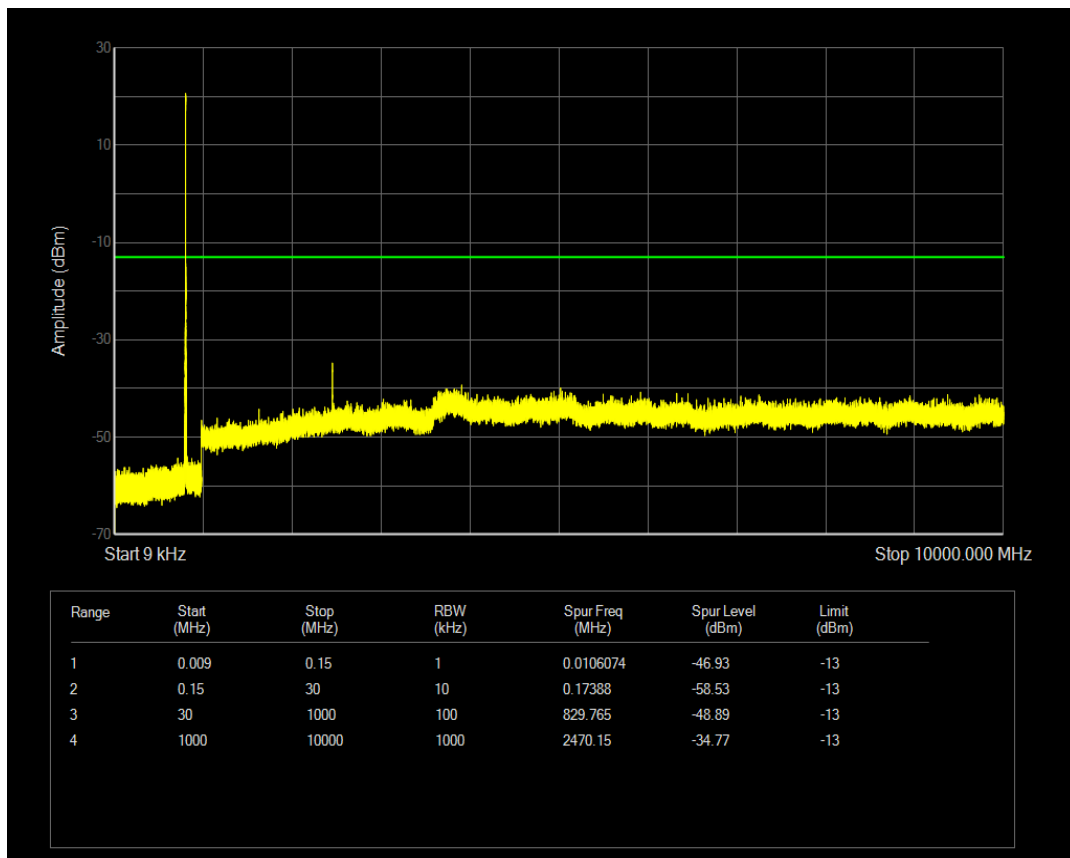**Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0****Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0**

