


Test Data**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.197	0	-5.197	30	Pass
NVNT	BLE	2442	Ant1	-4.377	0	-4.377	30	Pass
NVNT	BLE	2480	Ant1	-4.927	0	-4.927	30	Pass

Test Graphs


Power NVNT BLE 2402MHz Ant1

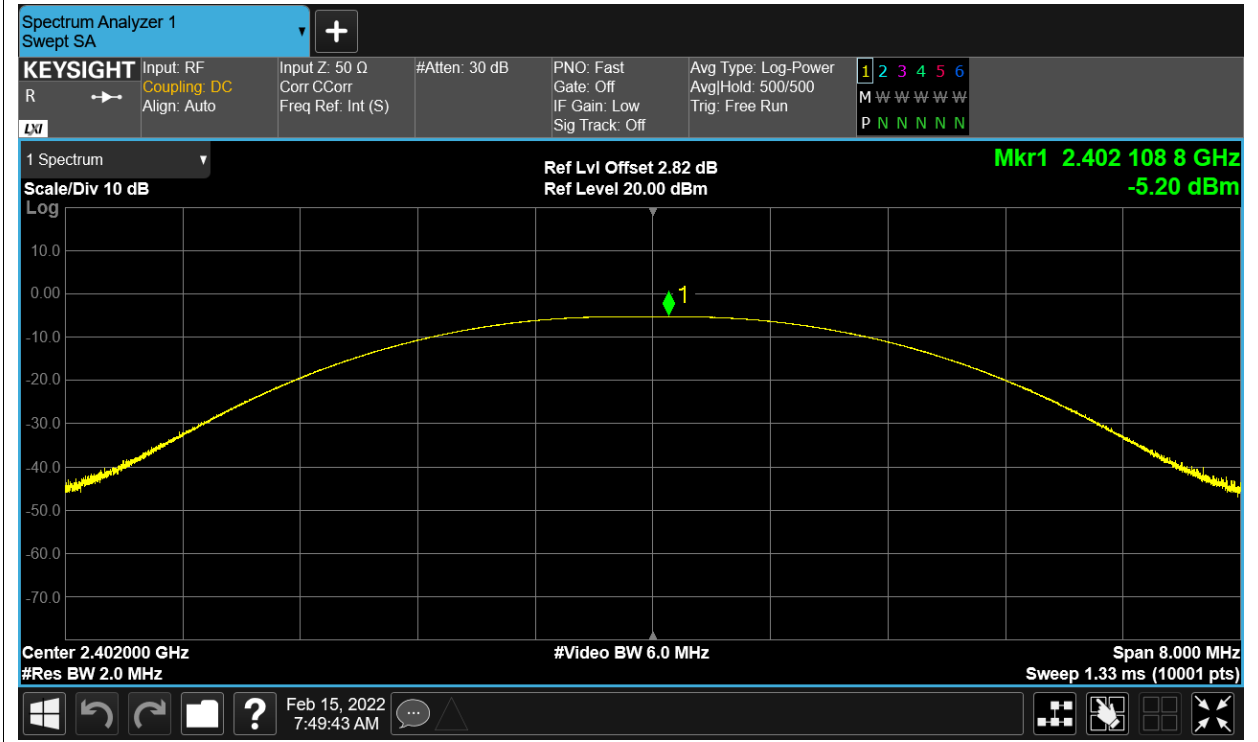

Power NVNT BLE 2442MHz Ant1

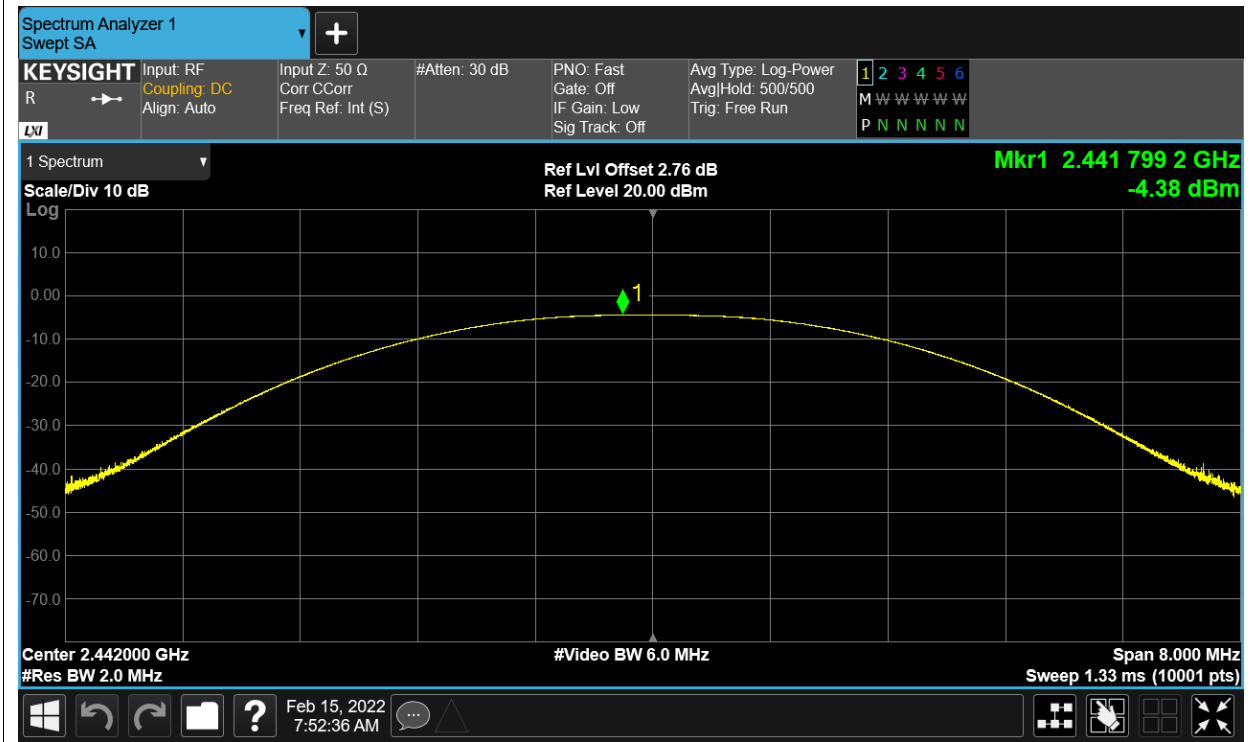

Power NVNT BLE 2480MHz Ant1

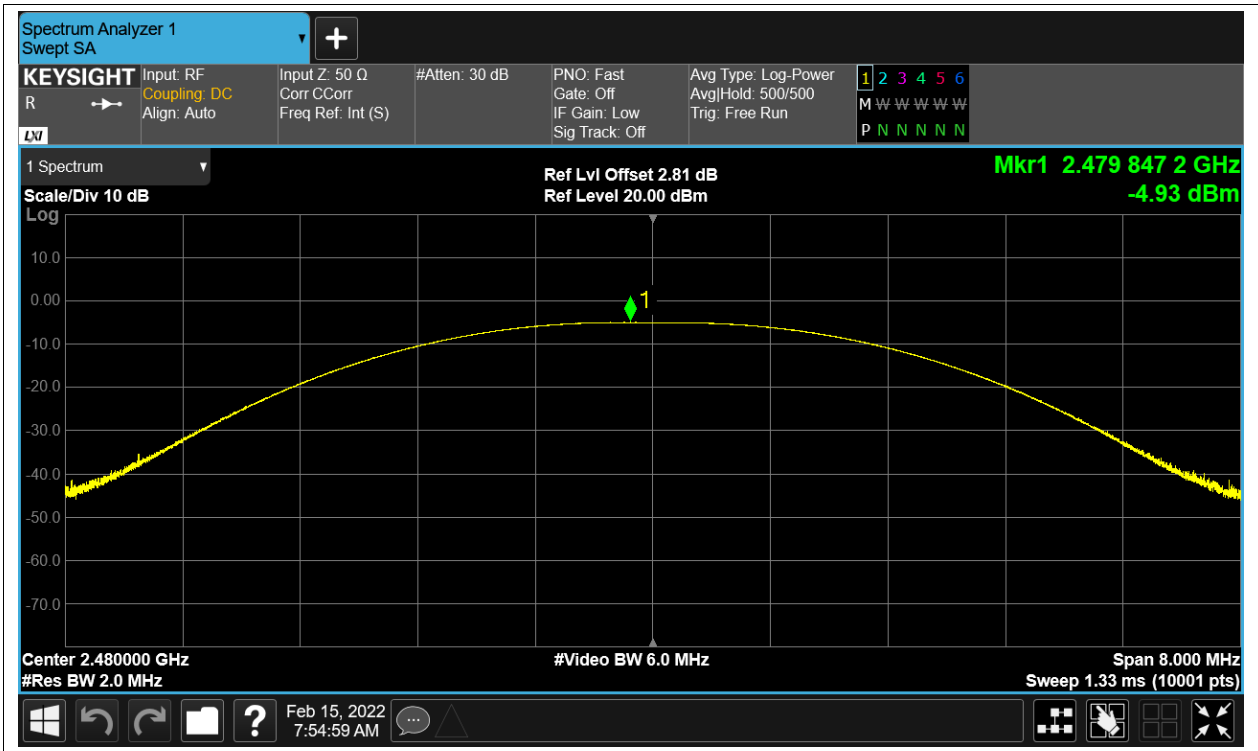


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.662	0.5	Pass
NVNT	BLE	2442	Ant1	0.661	0.5	Pass
NVNT	BLE	2480	Ant1	0.662	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 2402MHz Ant1

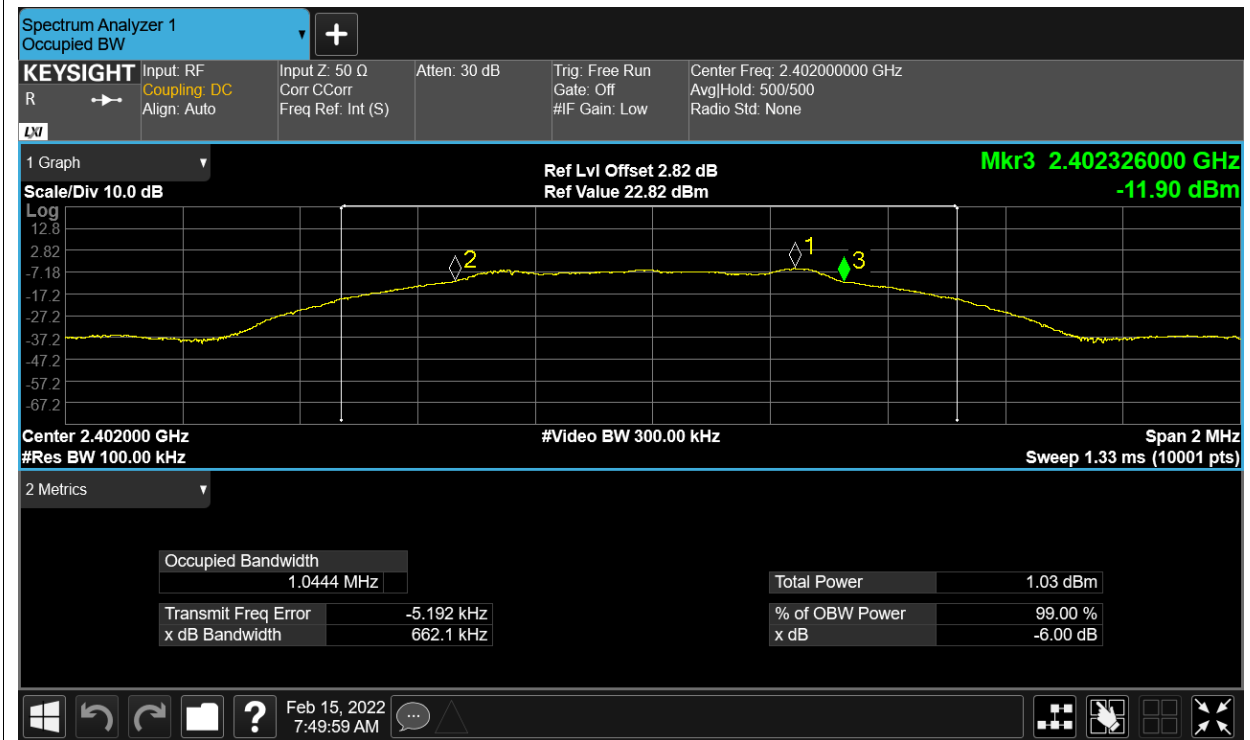

-6dB Bandwidth NVNT BLE 2442MHz Ant1

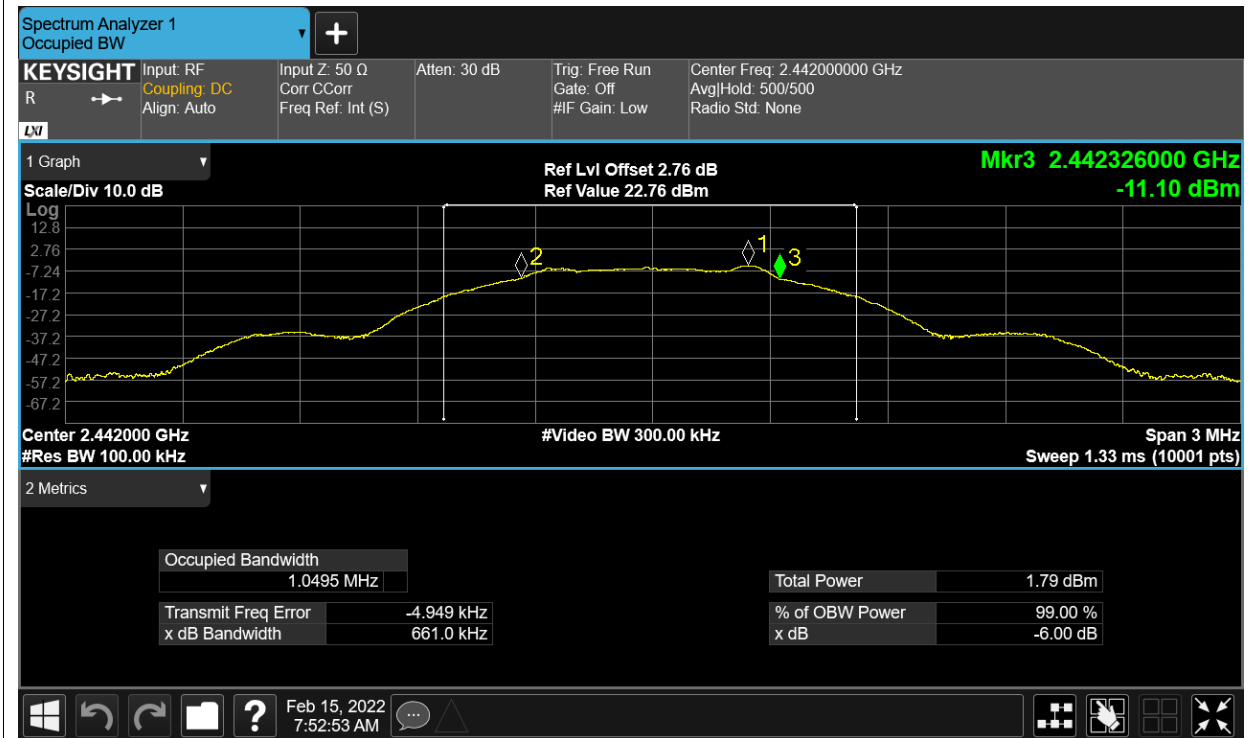

-6dB Bandwidth NVNT BLE 2480MHz Ant1

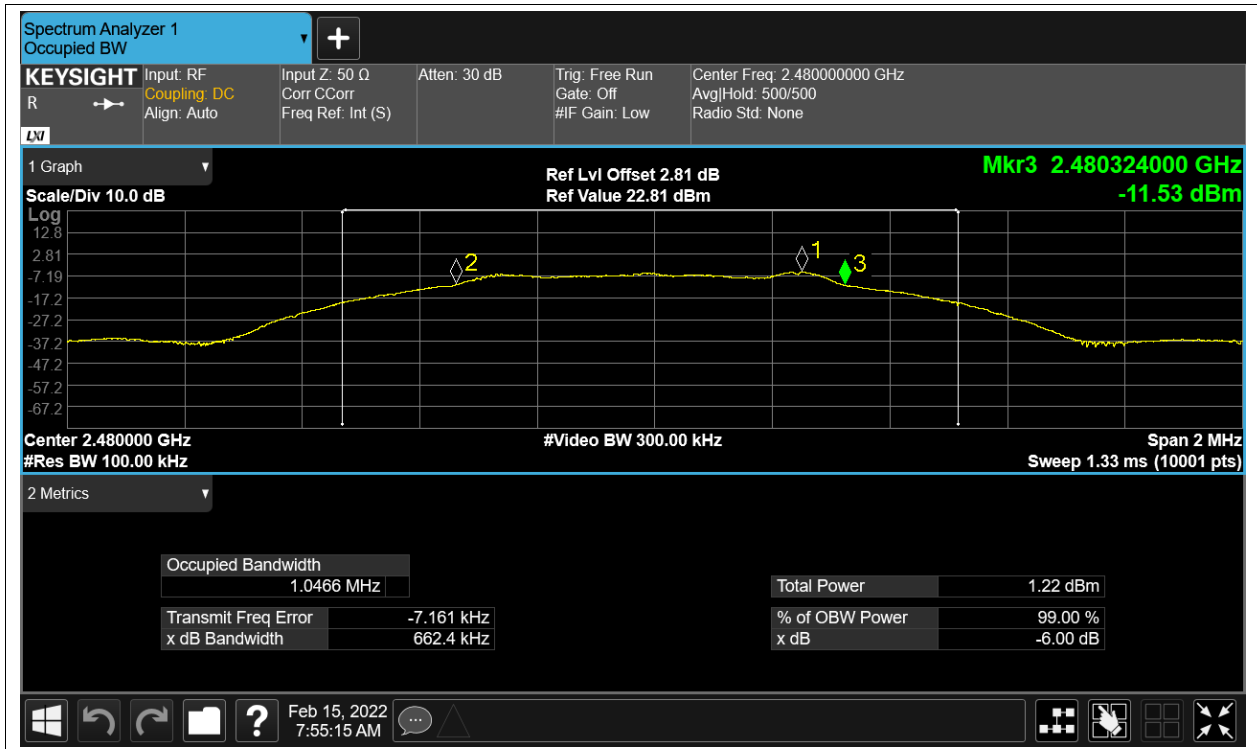


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.042884233
NVNT	BLE	2442	Ant1	1.040909033
NVNT	BLE	2480	Ant1	1.042437697

Test Graphs


OBW NVNT BLE 2402MHz Ant1

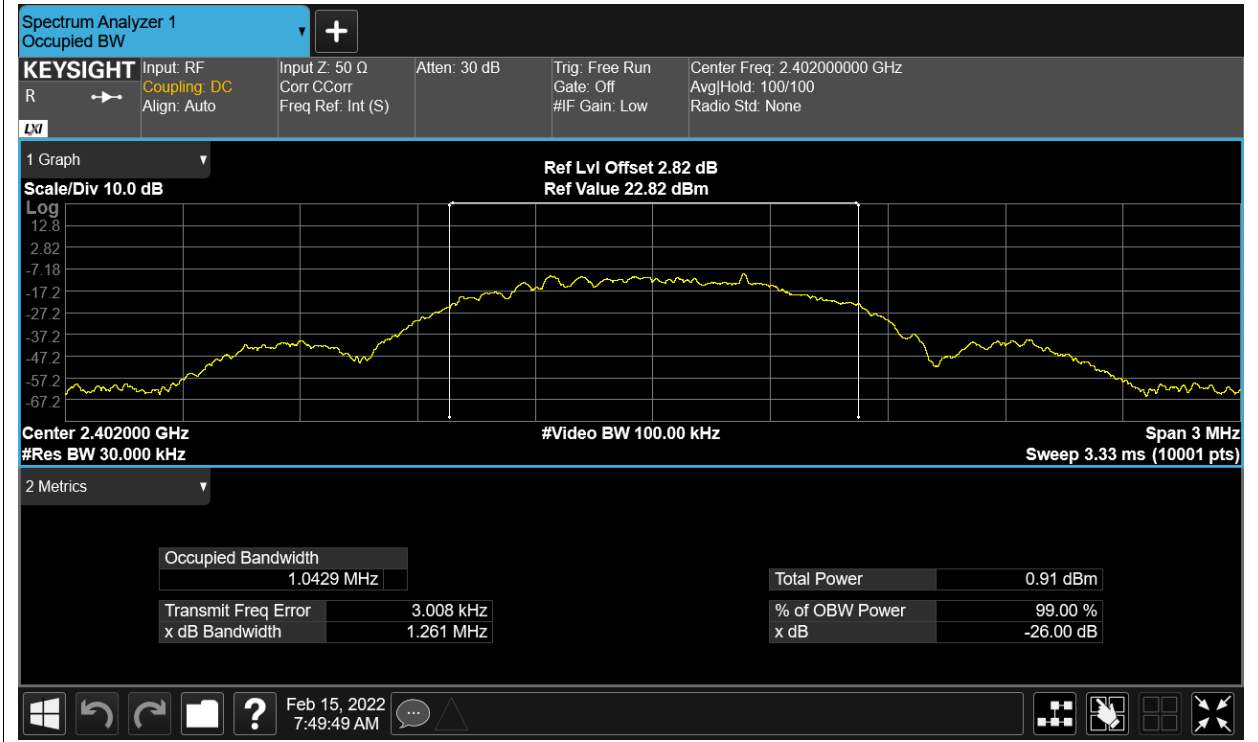

OBW NVNT BLE 2442MHz Ant1


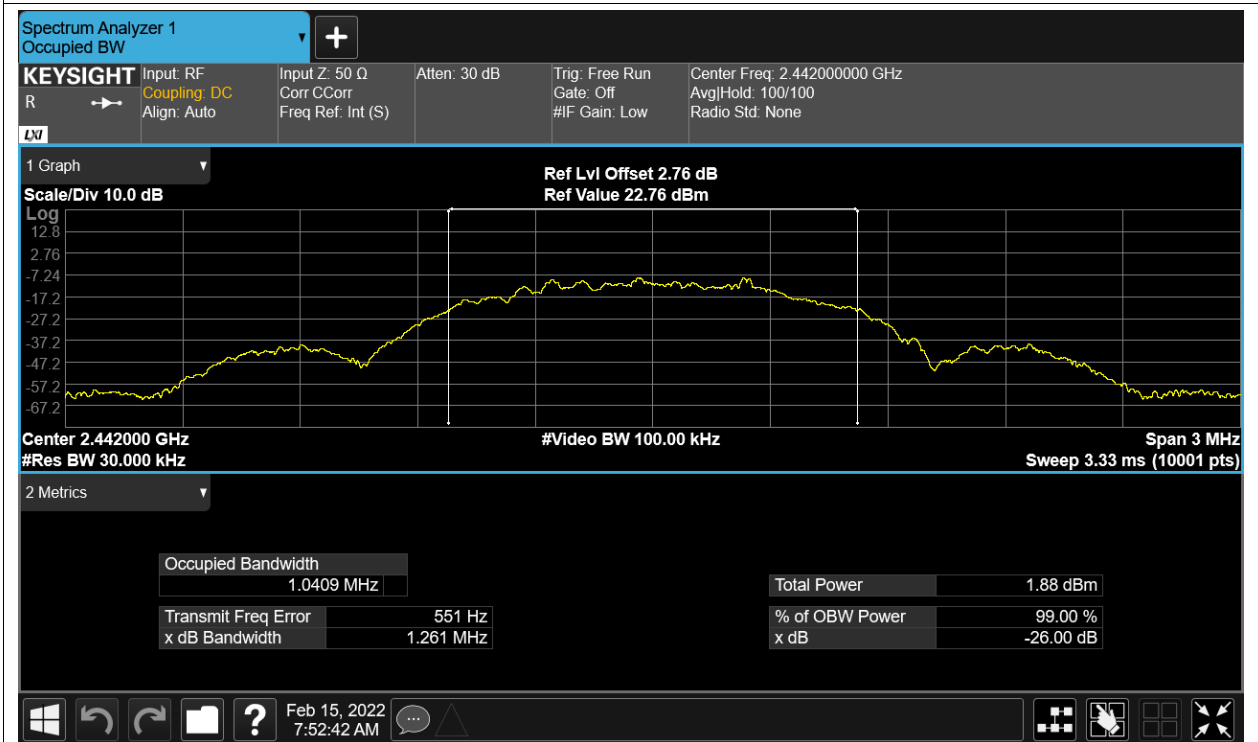



OBW NVNT BLE 2480MHz Ant1

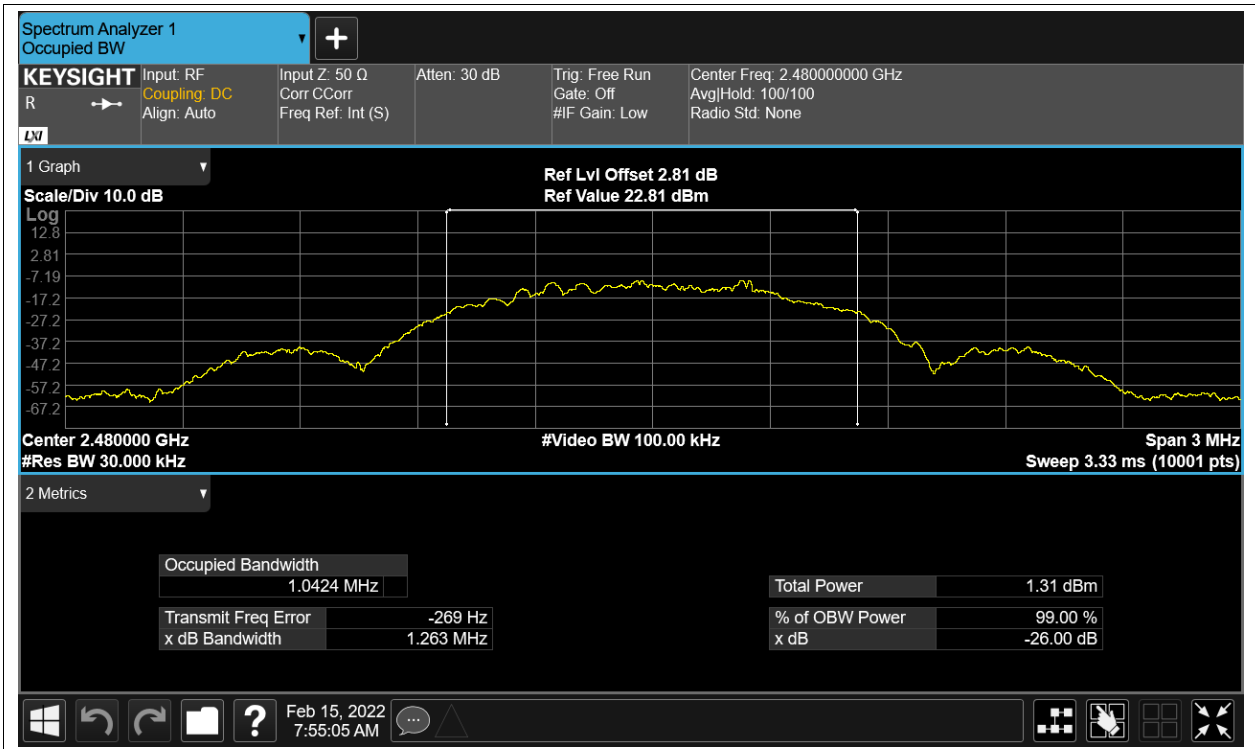

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-21.525	8	Pass
NVNT	BLE	2442	Ant1	-20.738	8	Pass
NVNT	BLE	2480	Ant1	-21.282	8	Pass

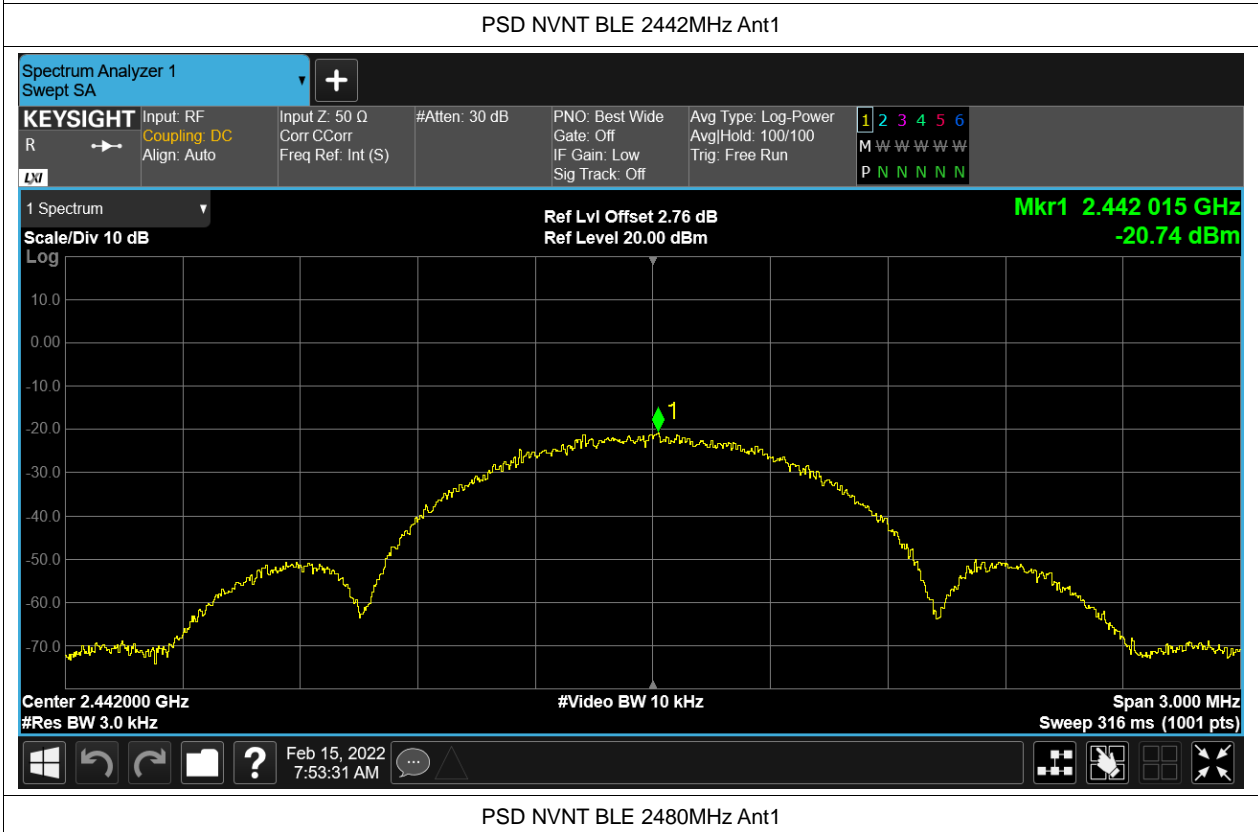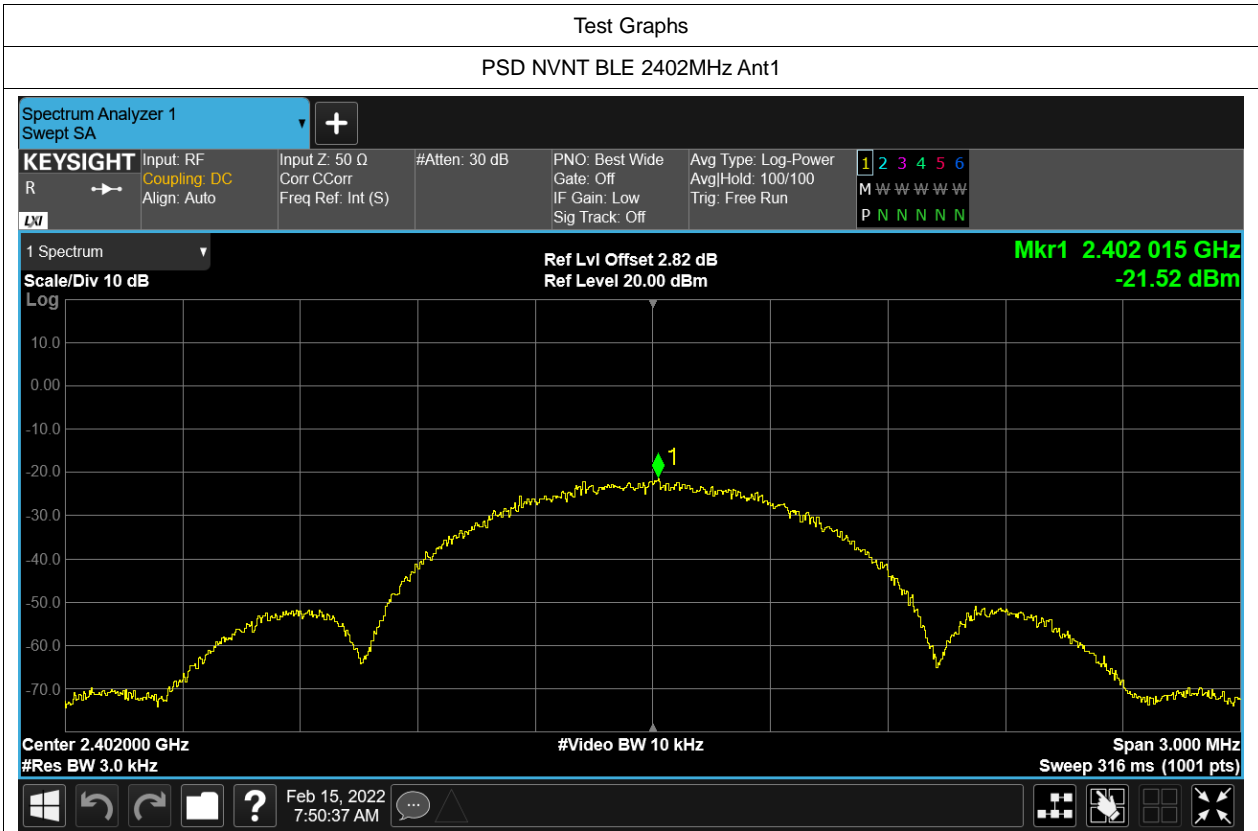

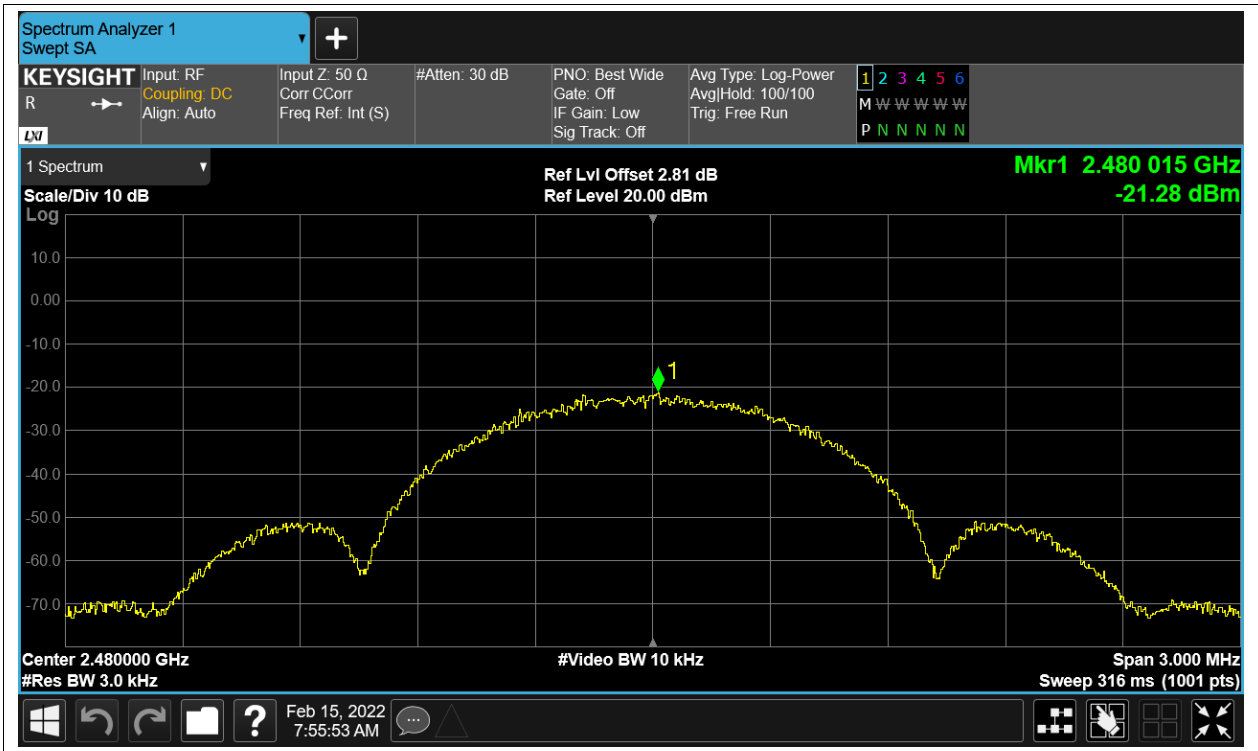


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.07	-20	Pass
NVNT	BLE	2480	Ant1	-51.14	-20	Pass

Test Graphs


Band Edge NVNT BLE 2402MHz Ant1 Ref

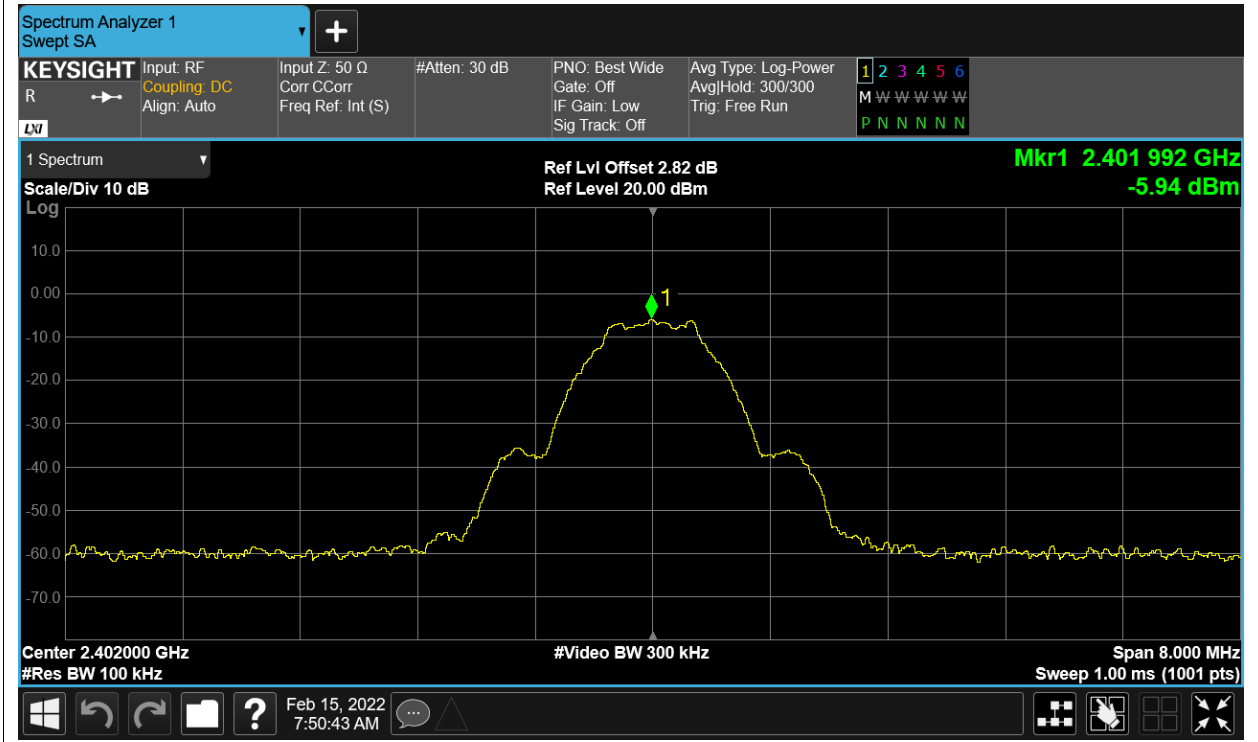


Band Edge NVNT BLE 2402MHz Ant1 Emission

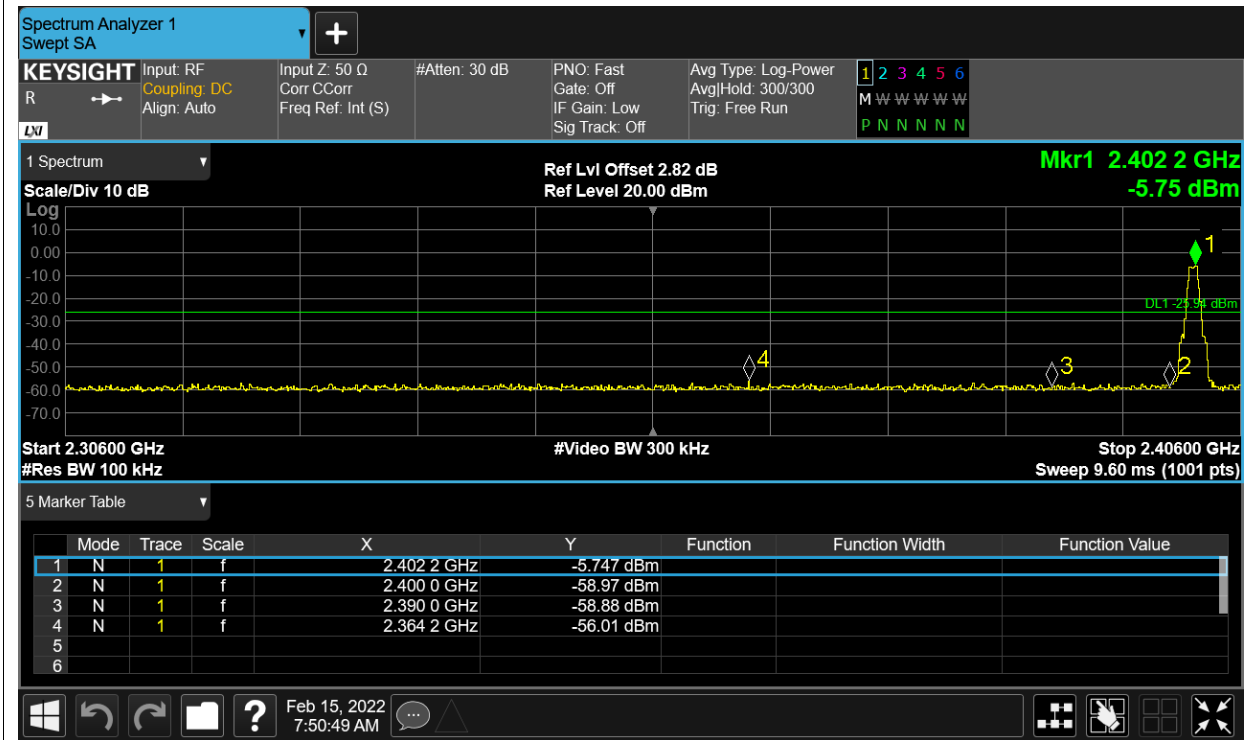

Band Edge NVNT BLE 2480MHz Ant1 Ref

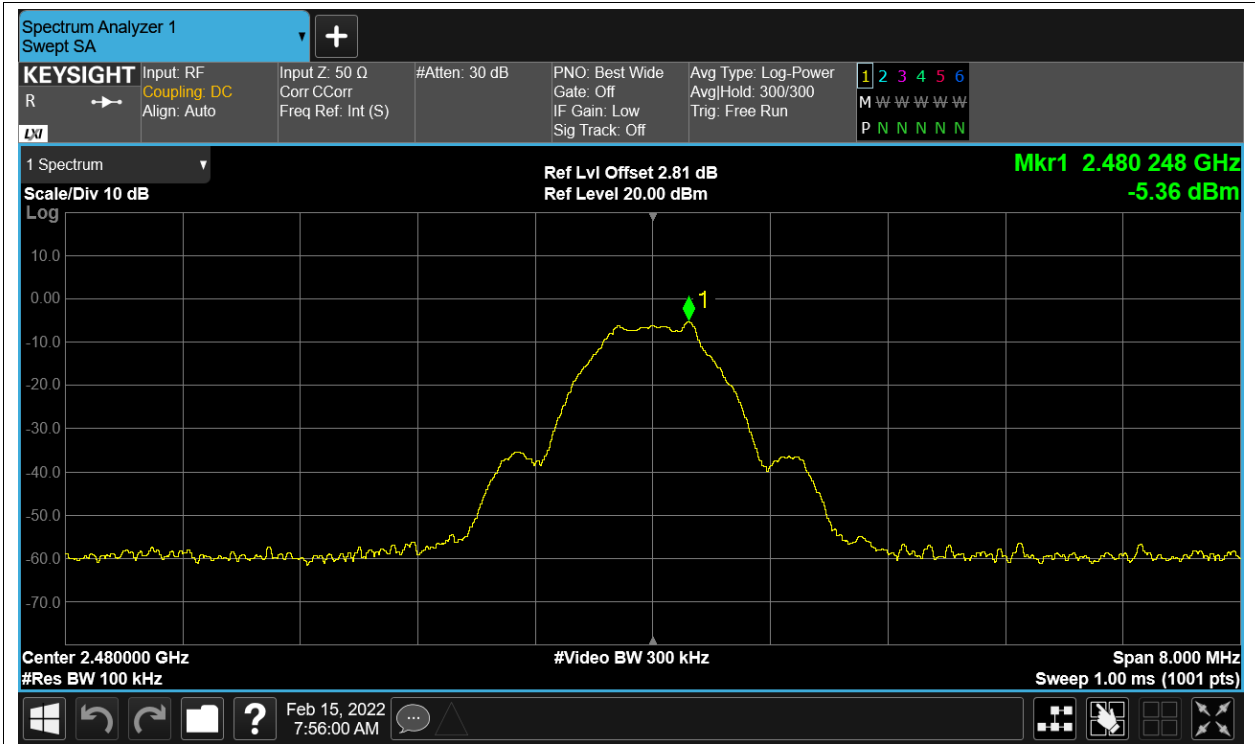

Band Edge NVNT BLE 2480MHz Ant1 Emission

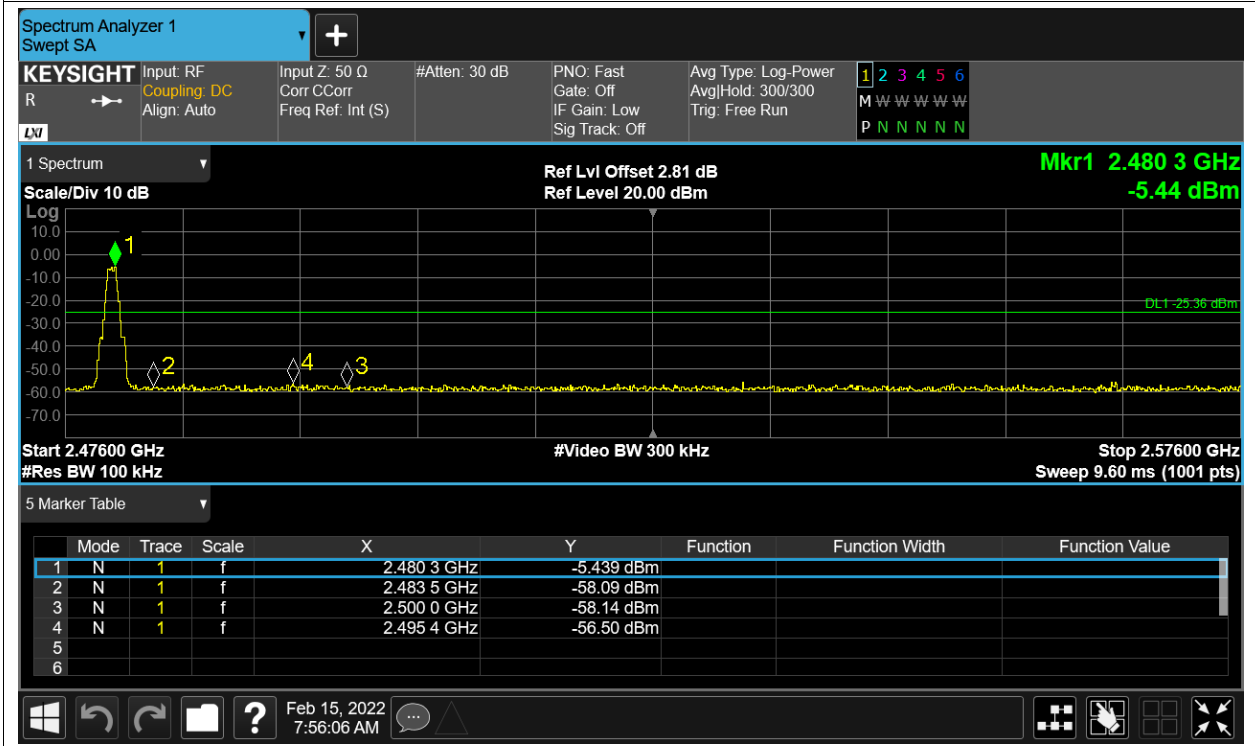


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.44	-20	Pass
NVNT	BLE	2442	Ant1	-45.79	-20	Pass
NVNT	BLE	2480	Ant1	-44.8	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

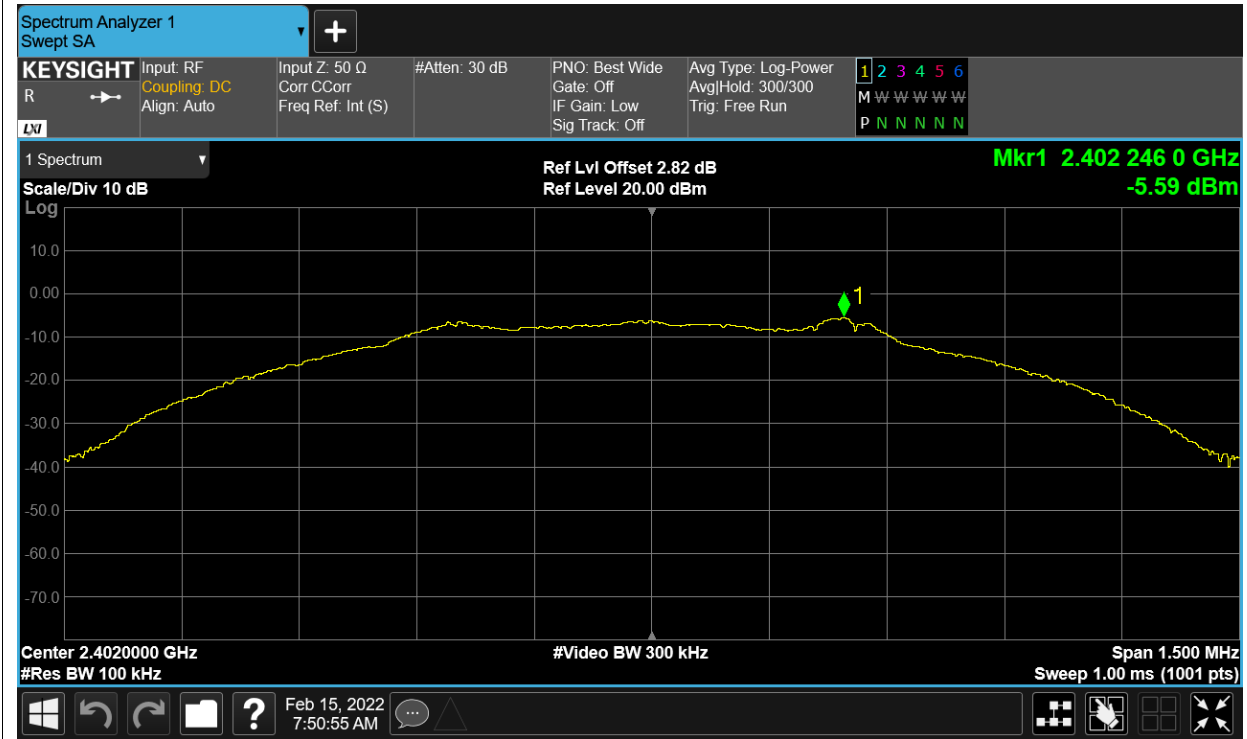


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission

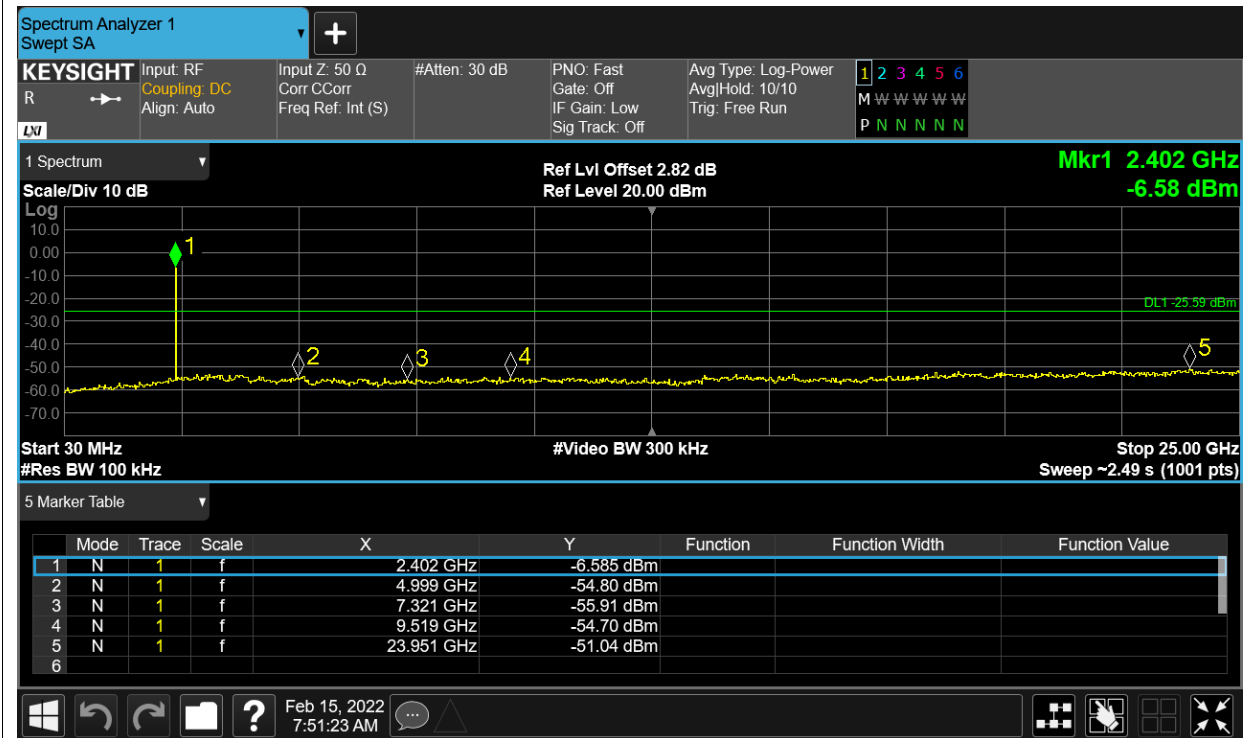


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

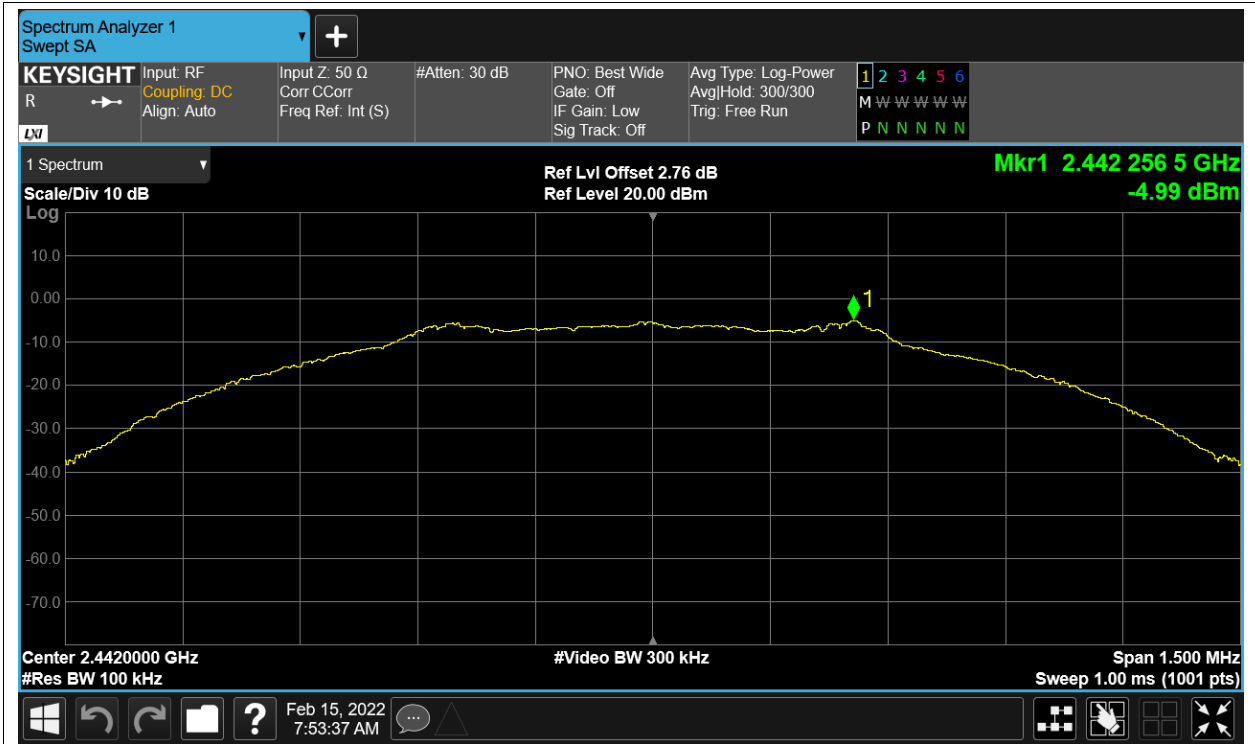

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

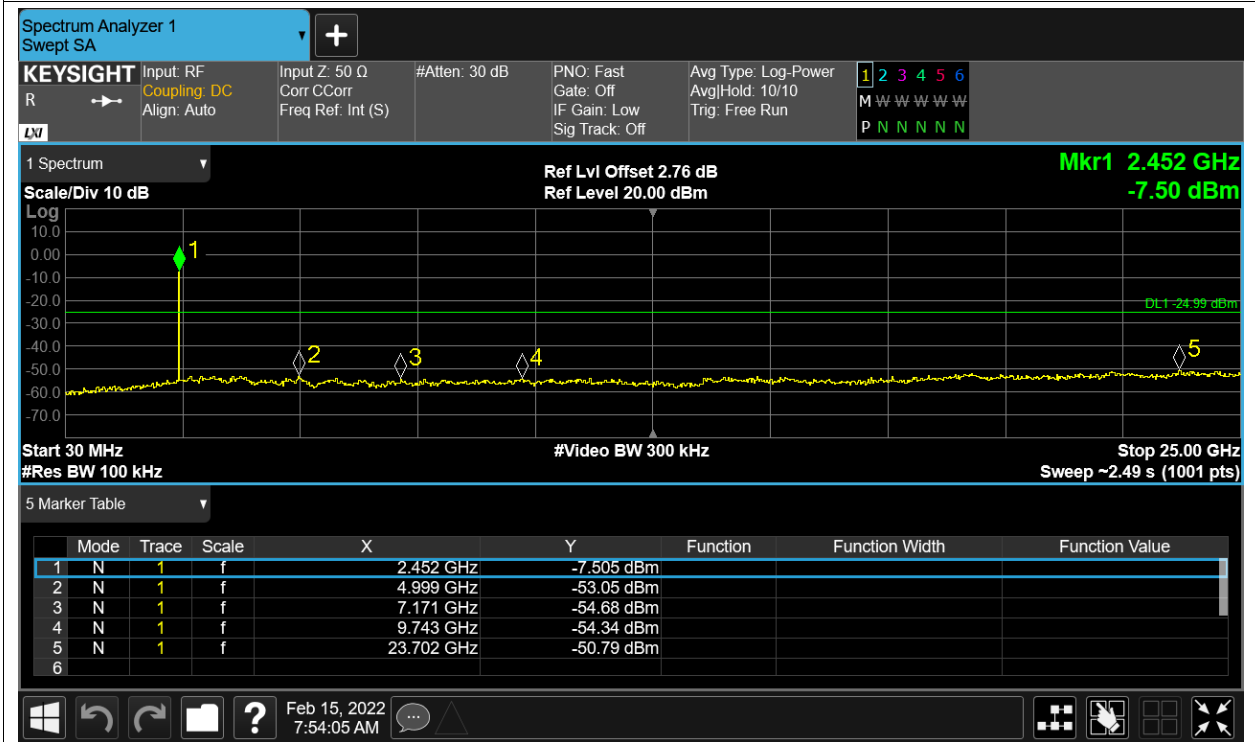

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

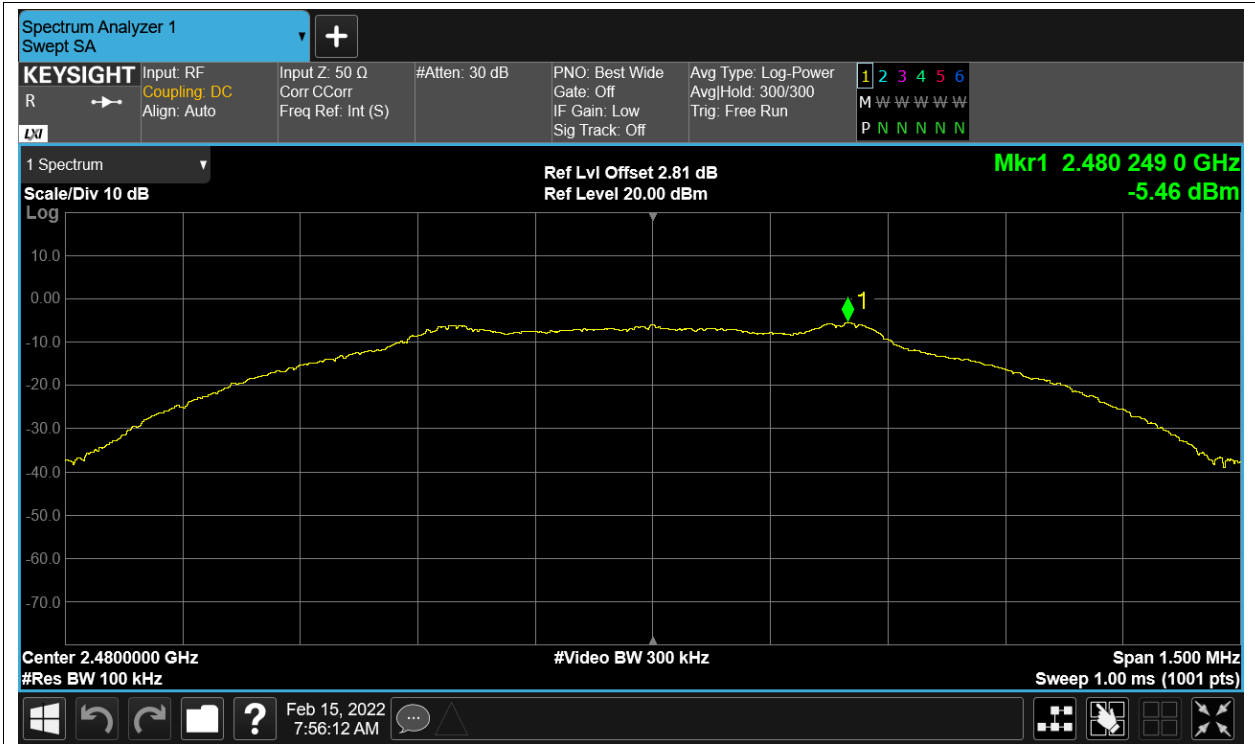

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

