


Test Data**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.244	0	-5.244	30	Pass
NVNT	BLE	2442	Ant1	-4.493	0	-4.493	30	Pass
NVNT	BLE	2480	Ant1	-5.017	0	-5.017	30	Pass

Test Graphs


Power NVNT BLE 2402MHz Ant1

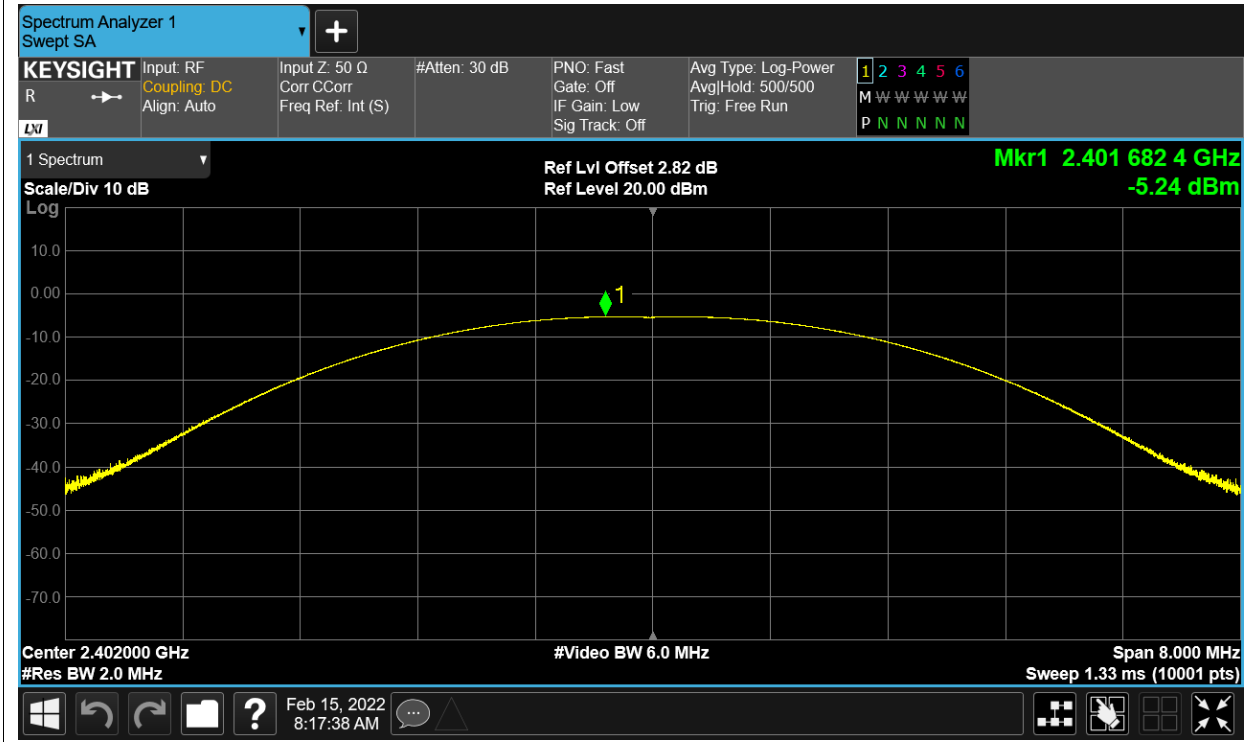

Power NVNT BLE 2442MHz Ant1


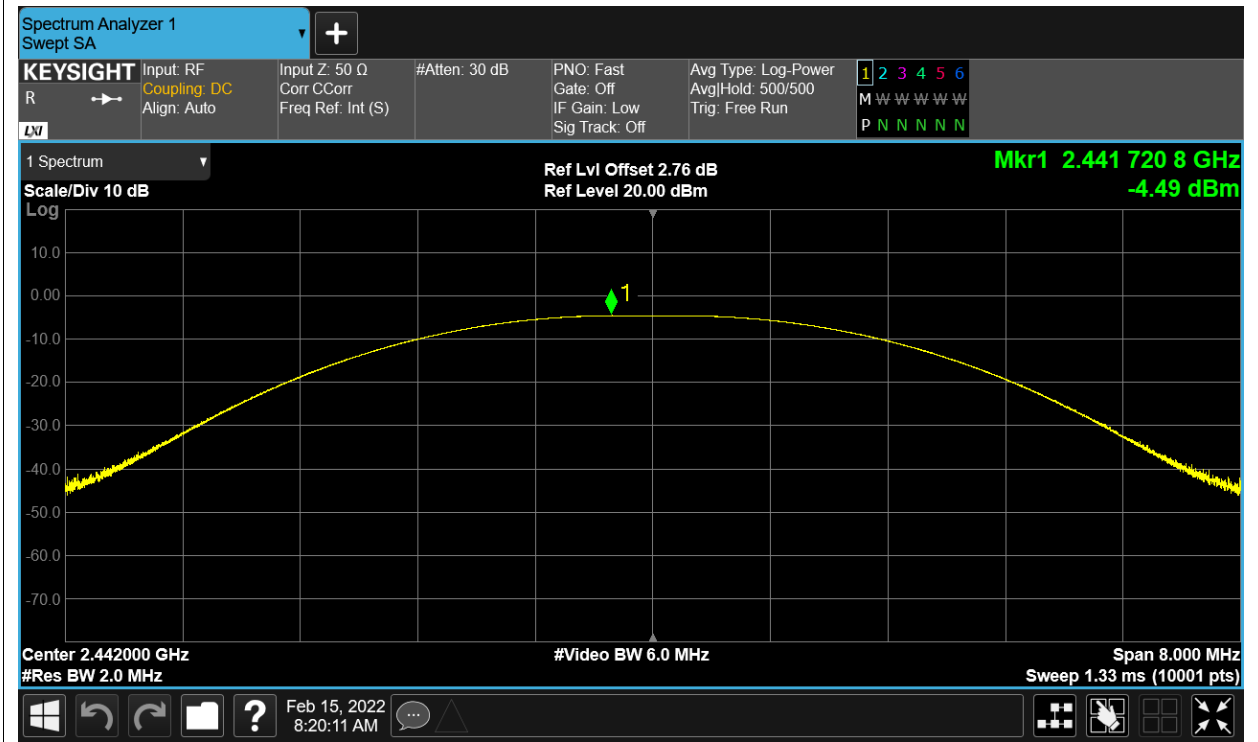



Power NVNT BLE 2480MHz Ant1

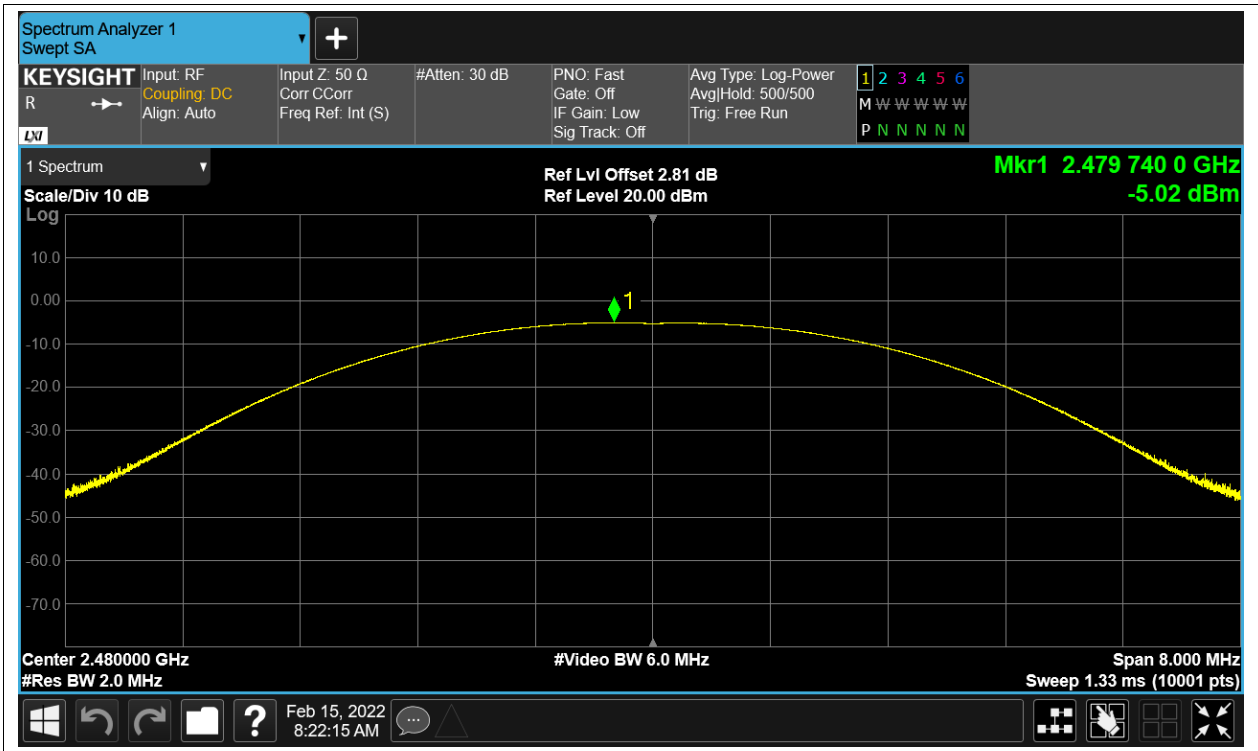

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.683	0.5	Pass
NVNT	BLE	2442	Ant1	0.682	0.5	Pass
NVNT	BLE	2480	Ant1	0.681	0.5	Pass

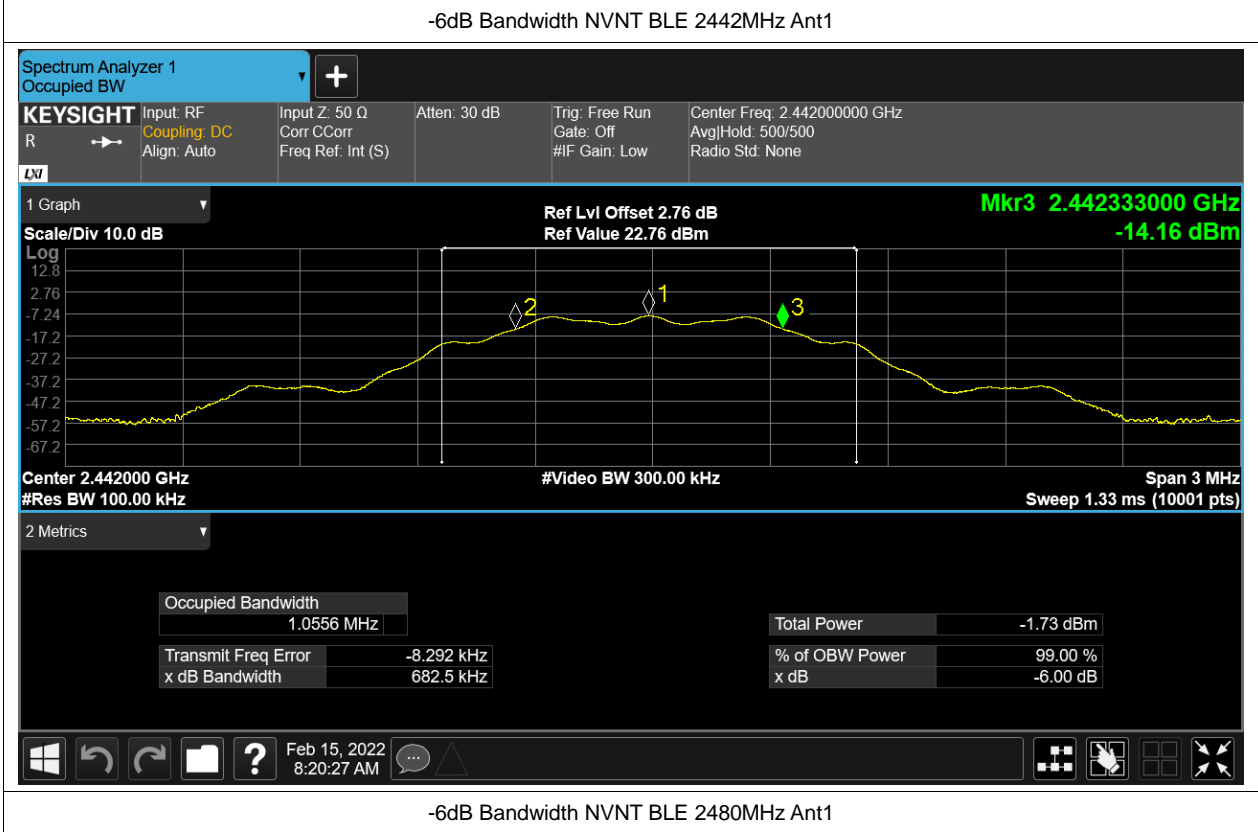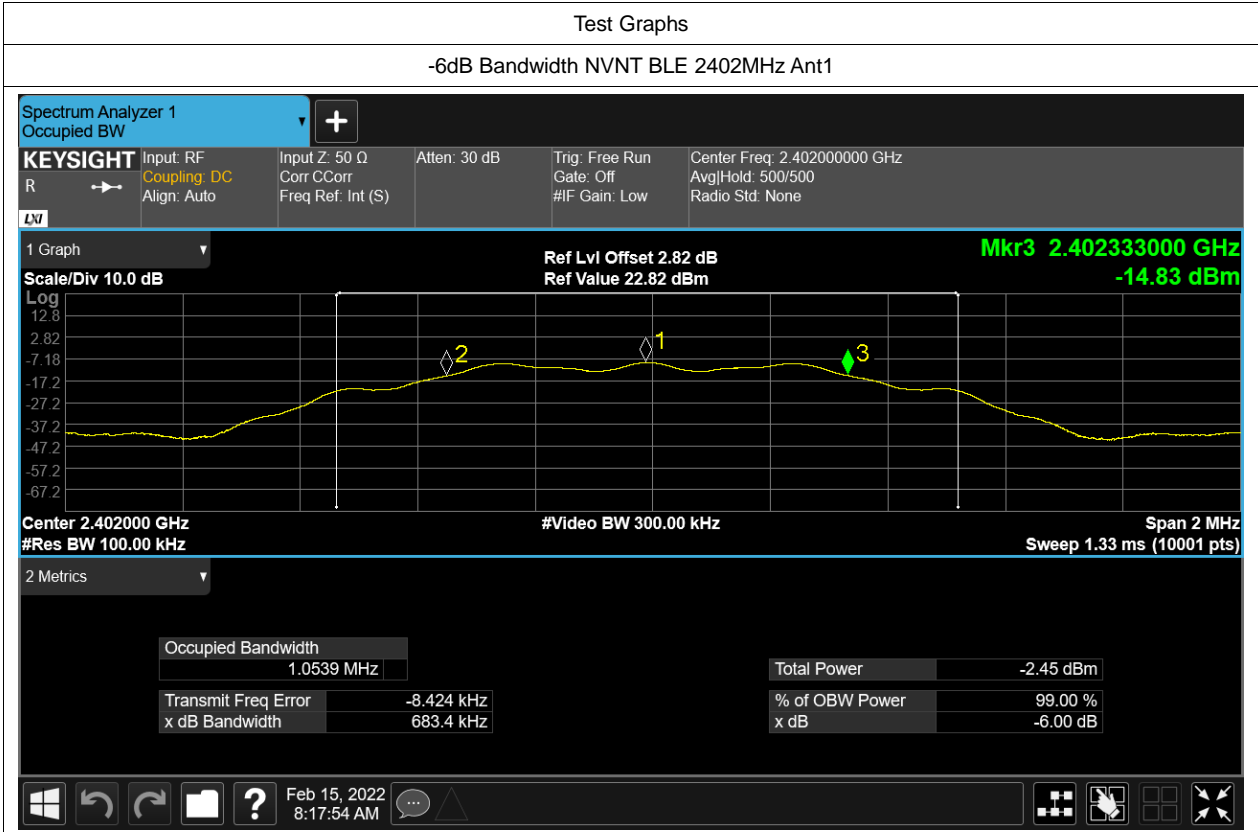

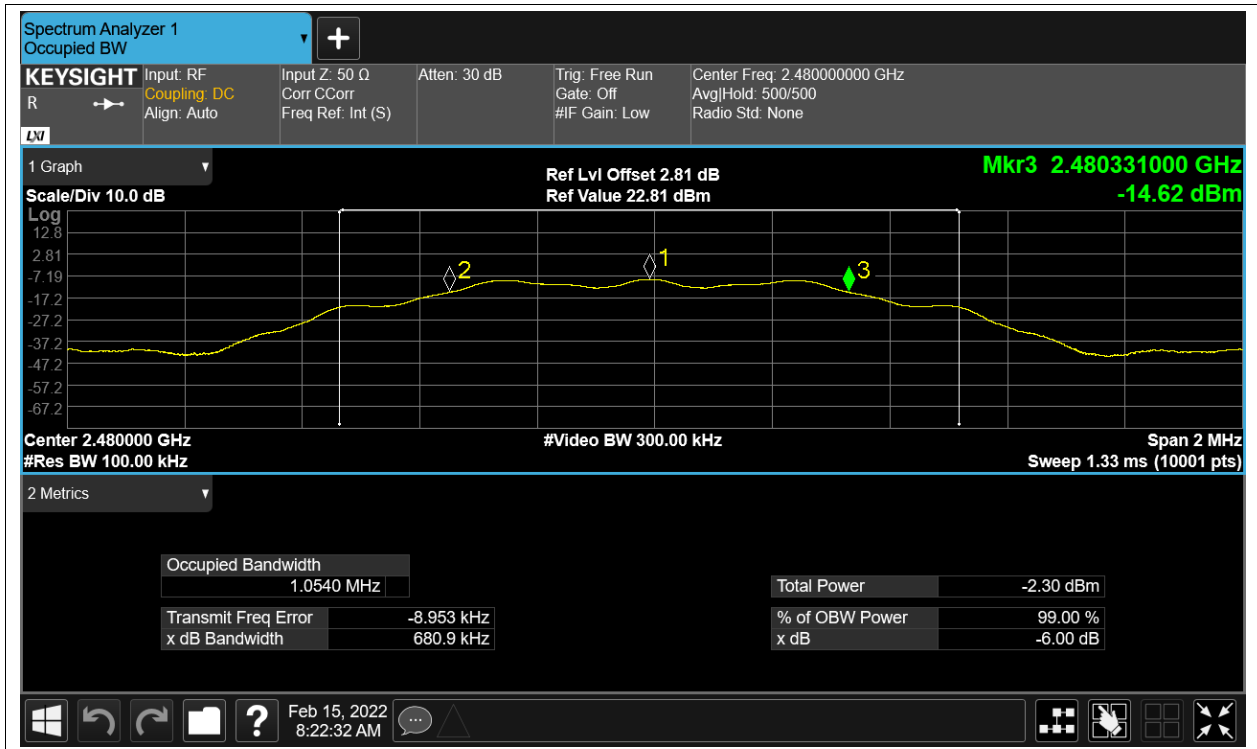


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.057341944
NVNT	BLE	2442	Ant1	1.056894353
NVNT	BLE	2480	Ant1	1.046642585

Test Graphs

OBW NVNT BLE 2402MHz Ant1

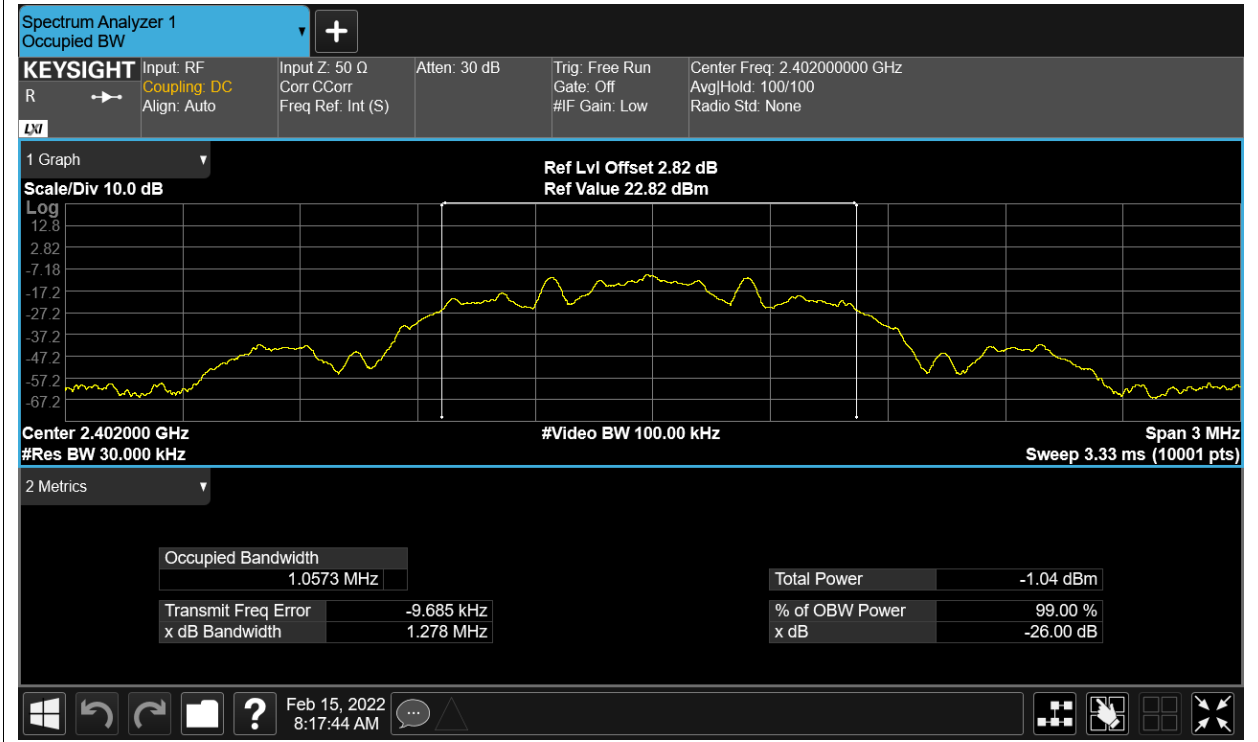

OBW NVNT BLE 2442MHz Ant1




OBW NVNT BLE 2480MHz Ant1



Maximum Power Spectral Density Level



Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-11.681	8	Pass
NVNT	BLE	2442	Ant1	-10.943	8	Pass
NVNT	BLE	2480	Ant1	-11.456	8	Pass



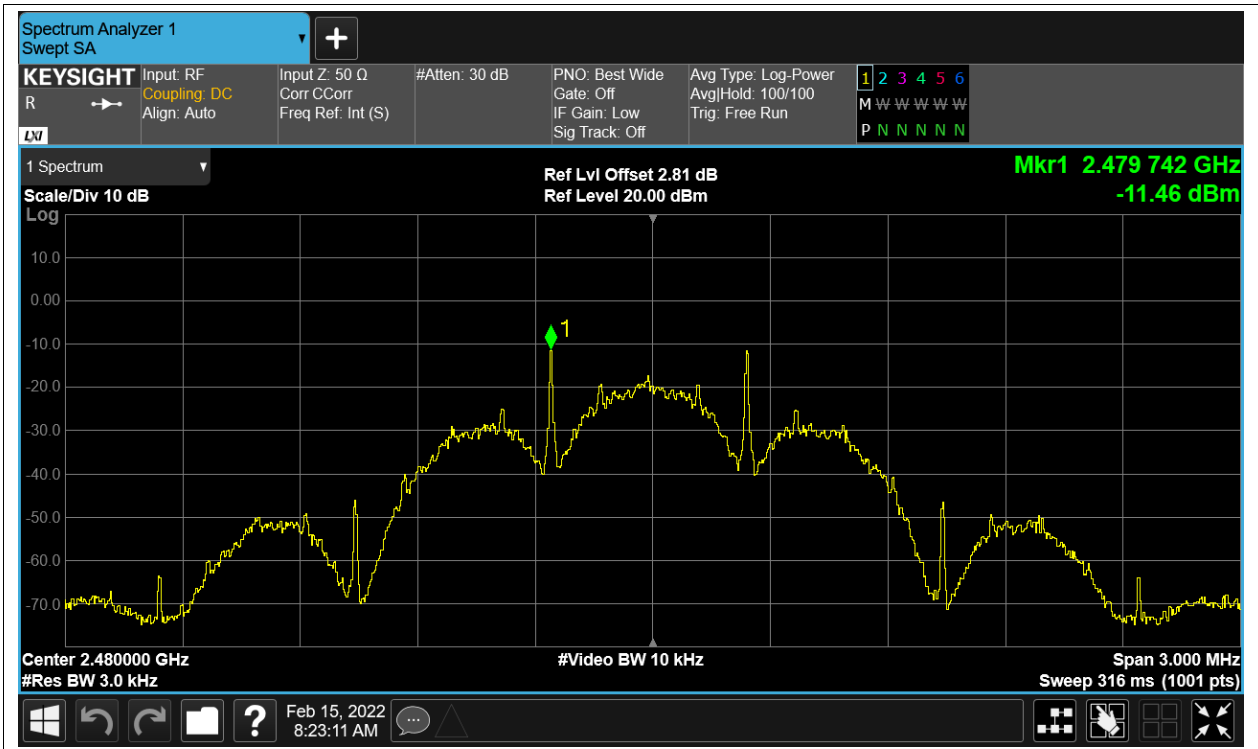


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-46.88	-20	Pass
NVNT	BLE	2480	Ant1	-47.8	-20	Pass

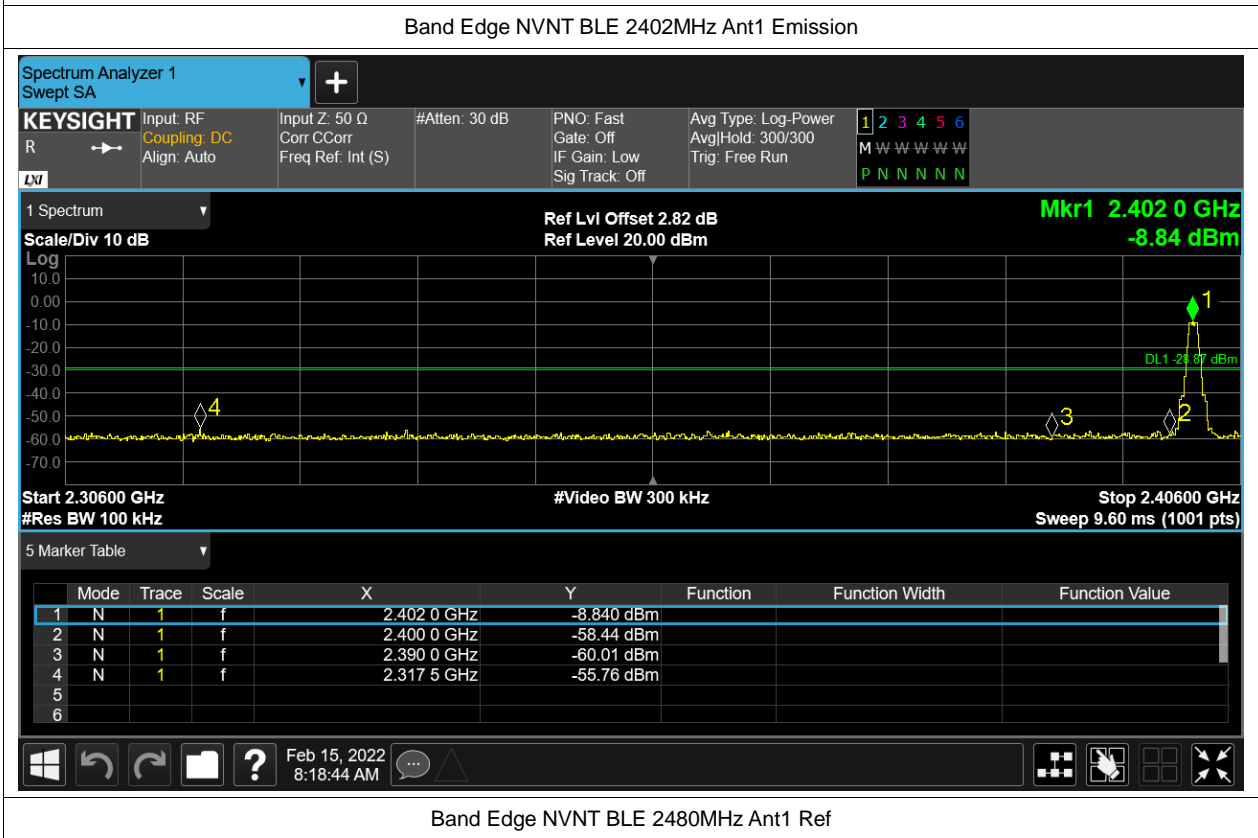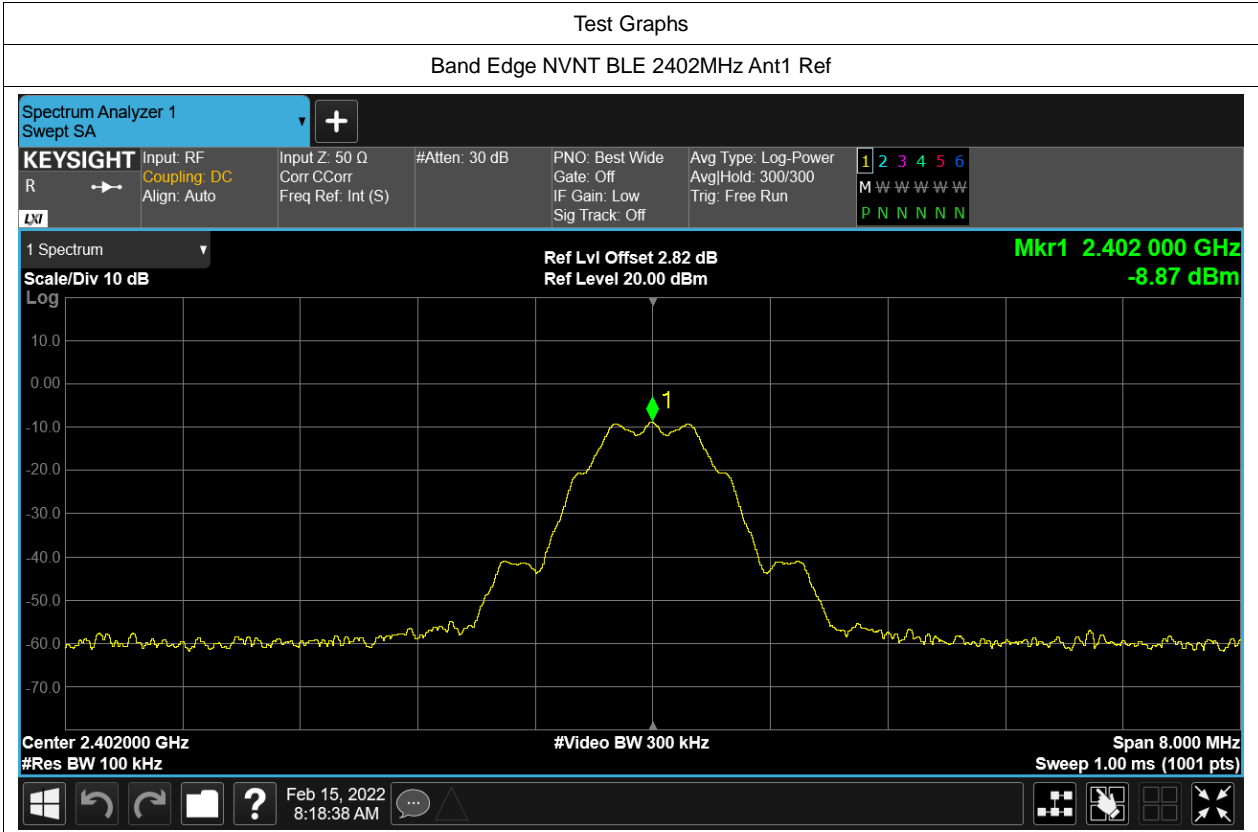

Band Edge NVNT BLE 2480MHz Ant1 Ref


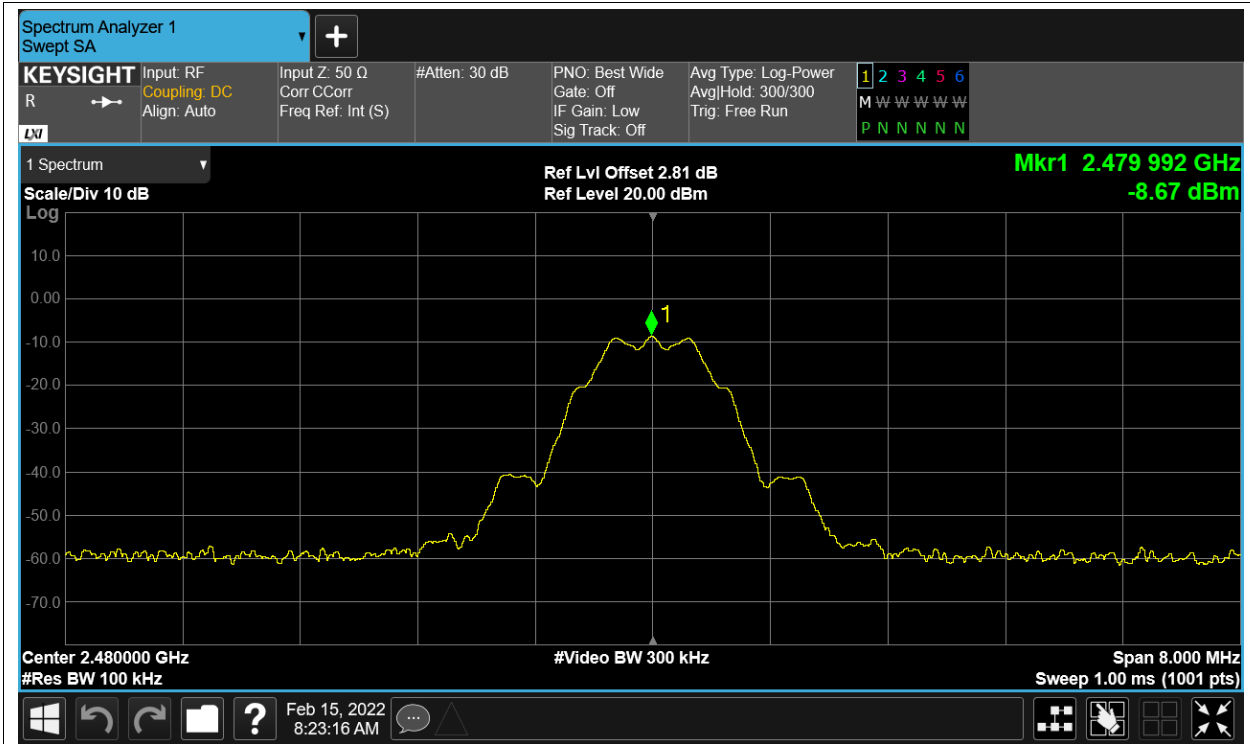



Band Edge NVNT BLE 2480MHz Ant1 Emission

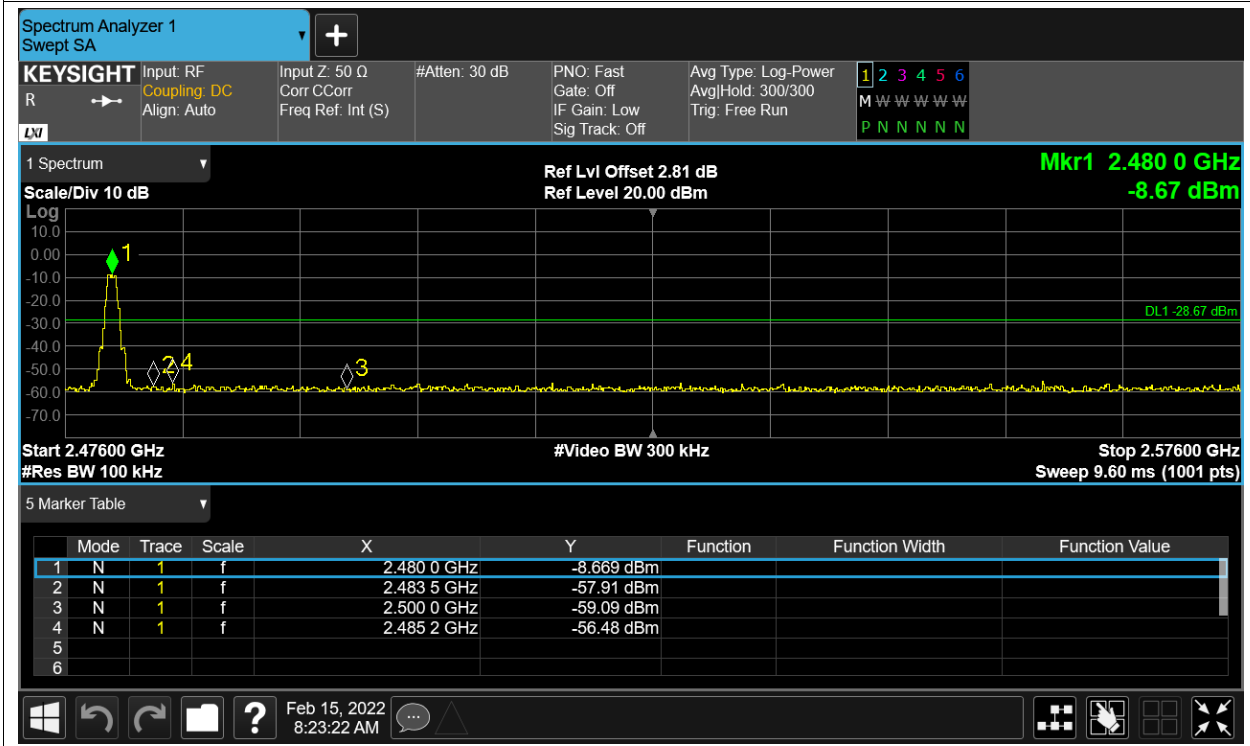


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-40.68	-20	Pass
NVNT	BLE	2442	Ant1	-42.79	-20	Pass
NVNT	BLE	2480	Ant1	-41.8	-20	Pass

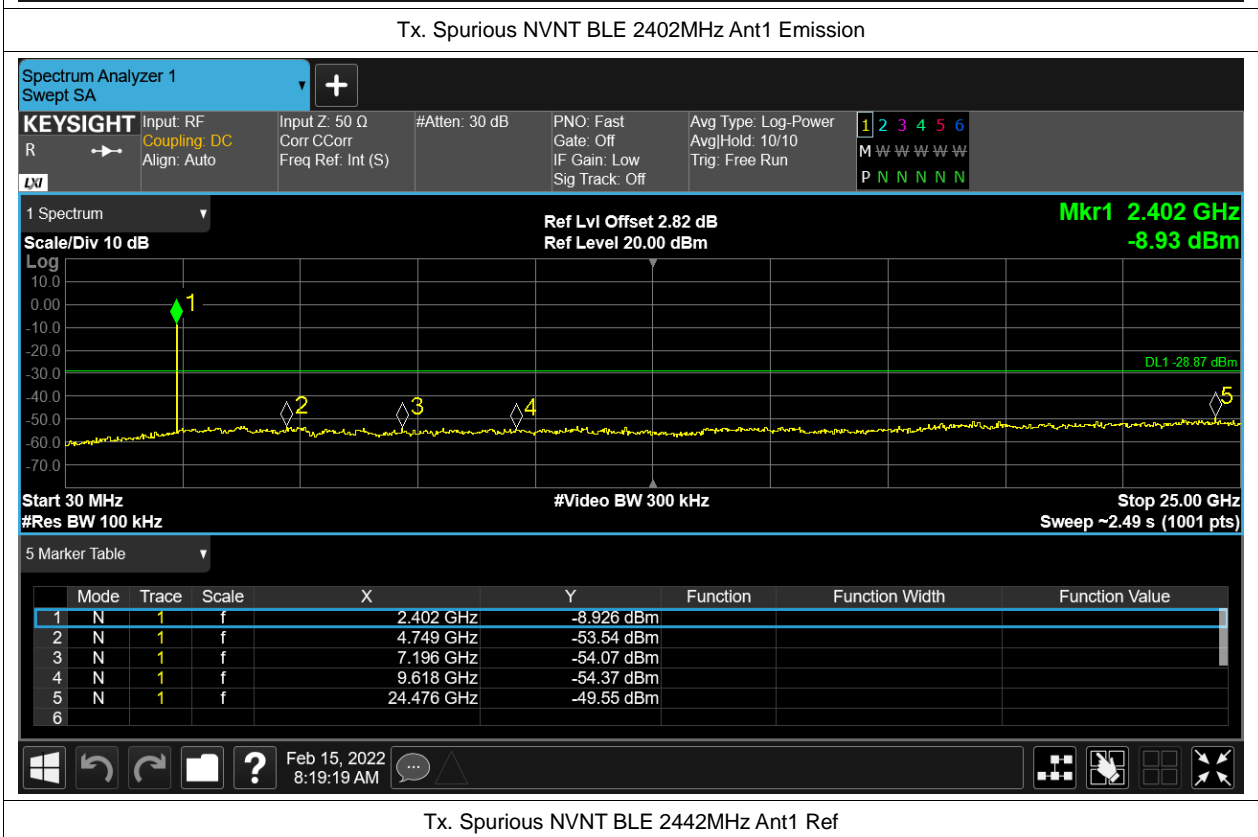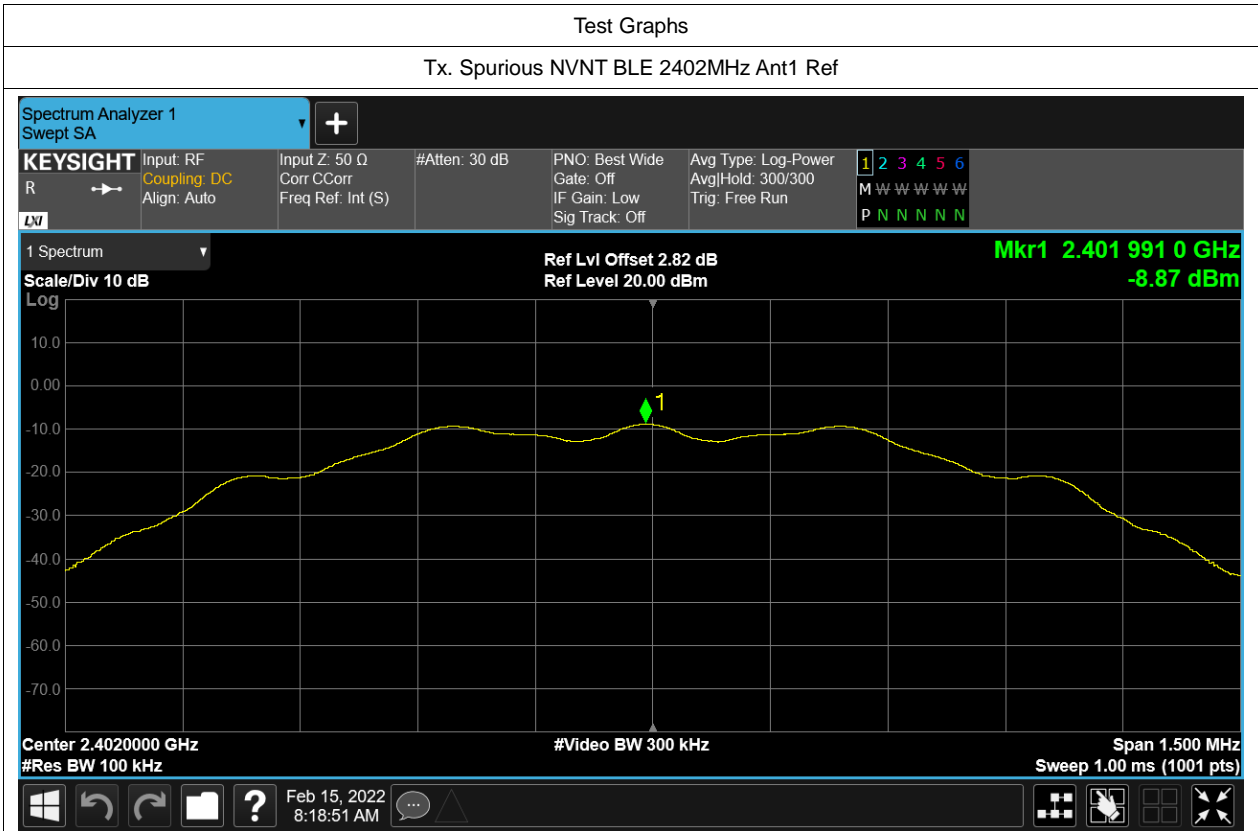


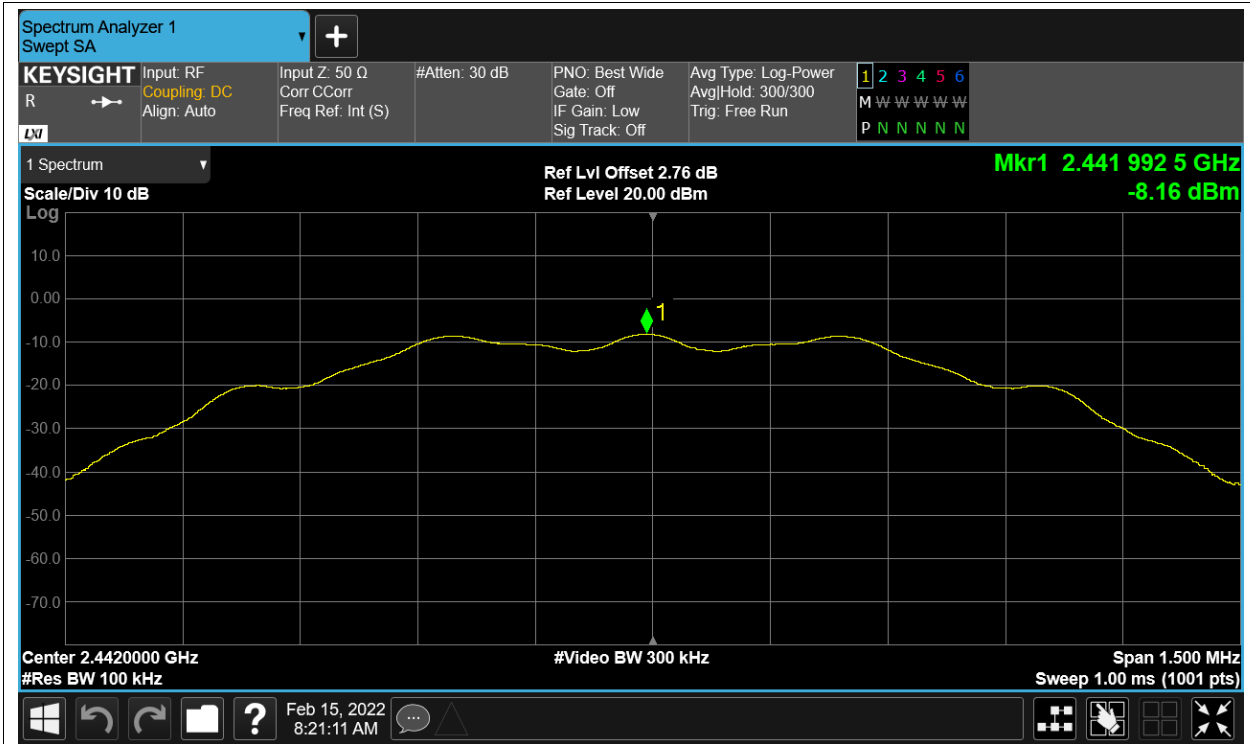

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

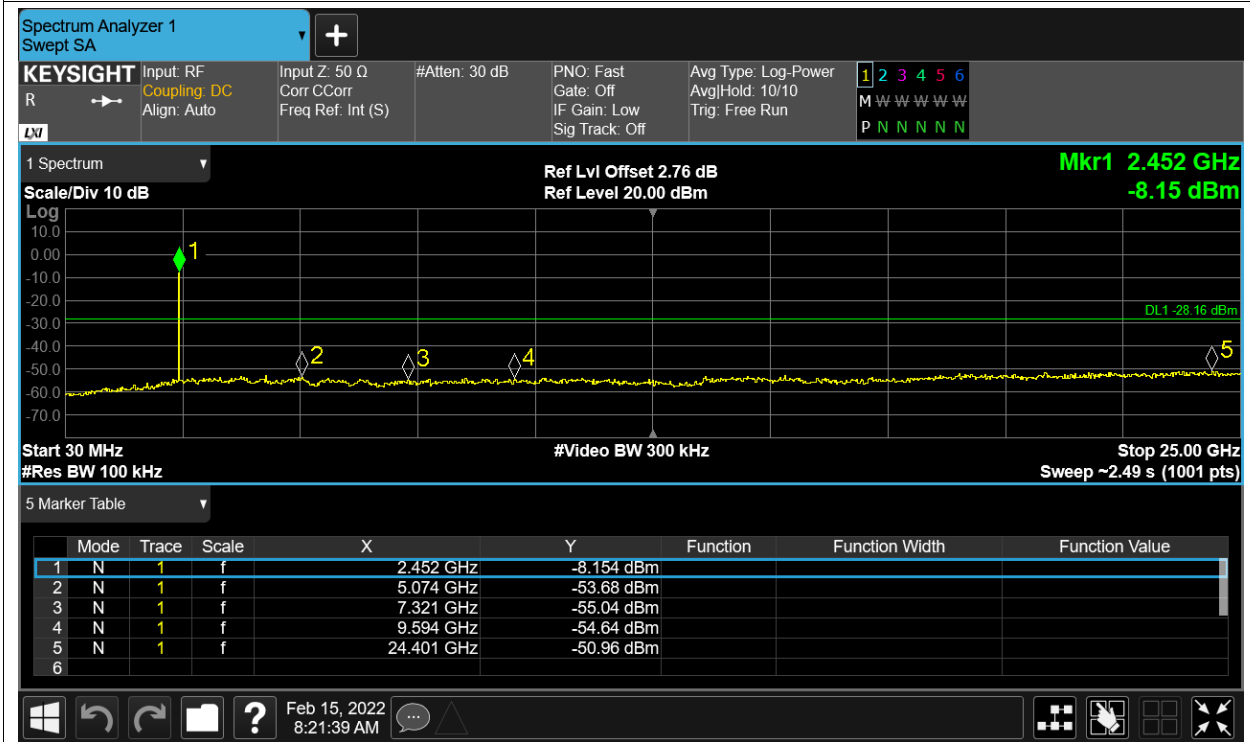

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

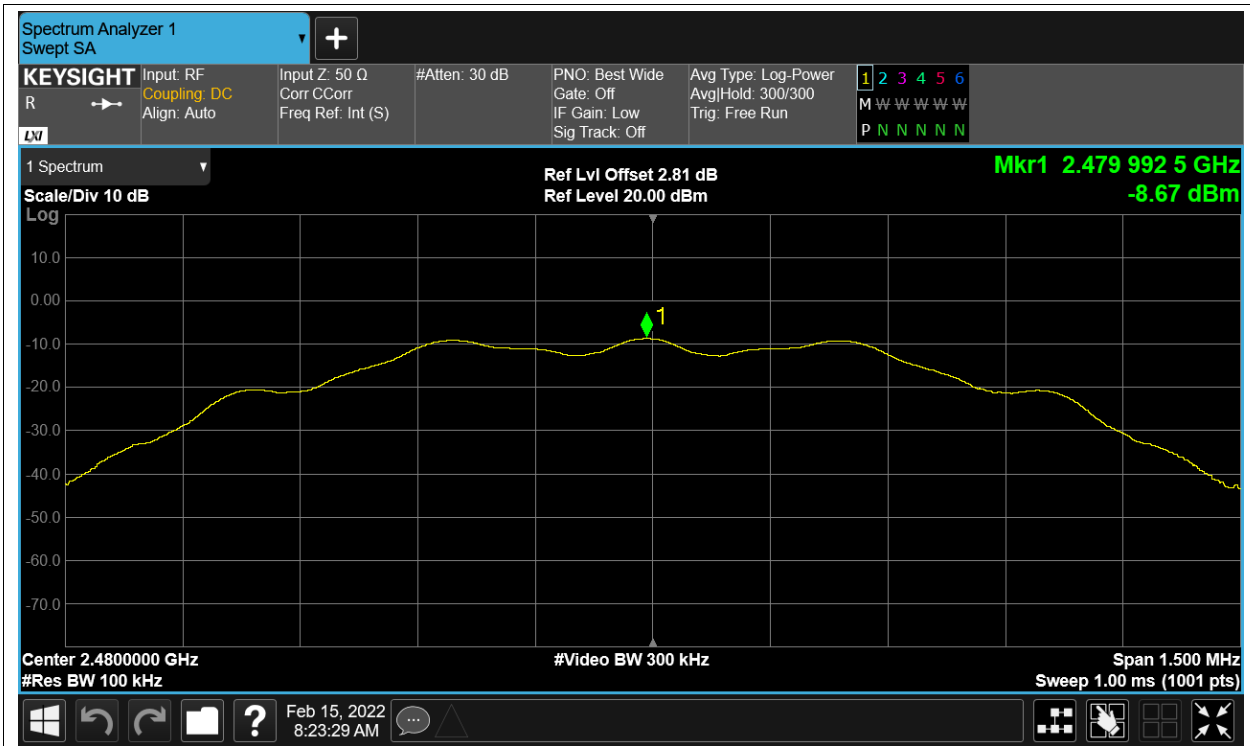

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

