



**Test Data****Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.898	0	-3.898	30	Pass
NVNT	BLE	2442	Ant1	-3.324	0	-3.324	30	Pass
NVNT	BLE	2480	Ant1	-5.771	0	-5.771	30	Pass

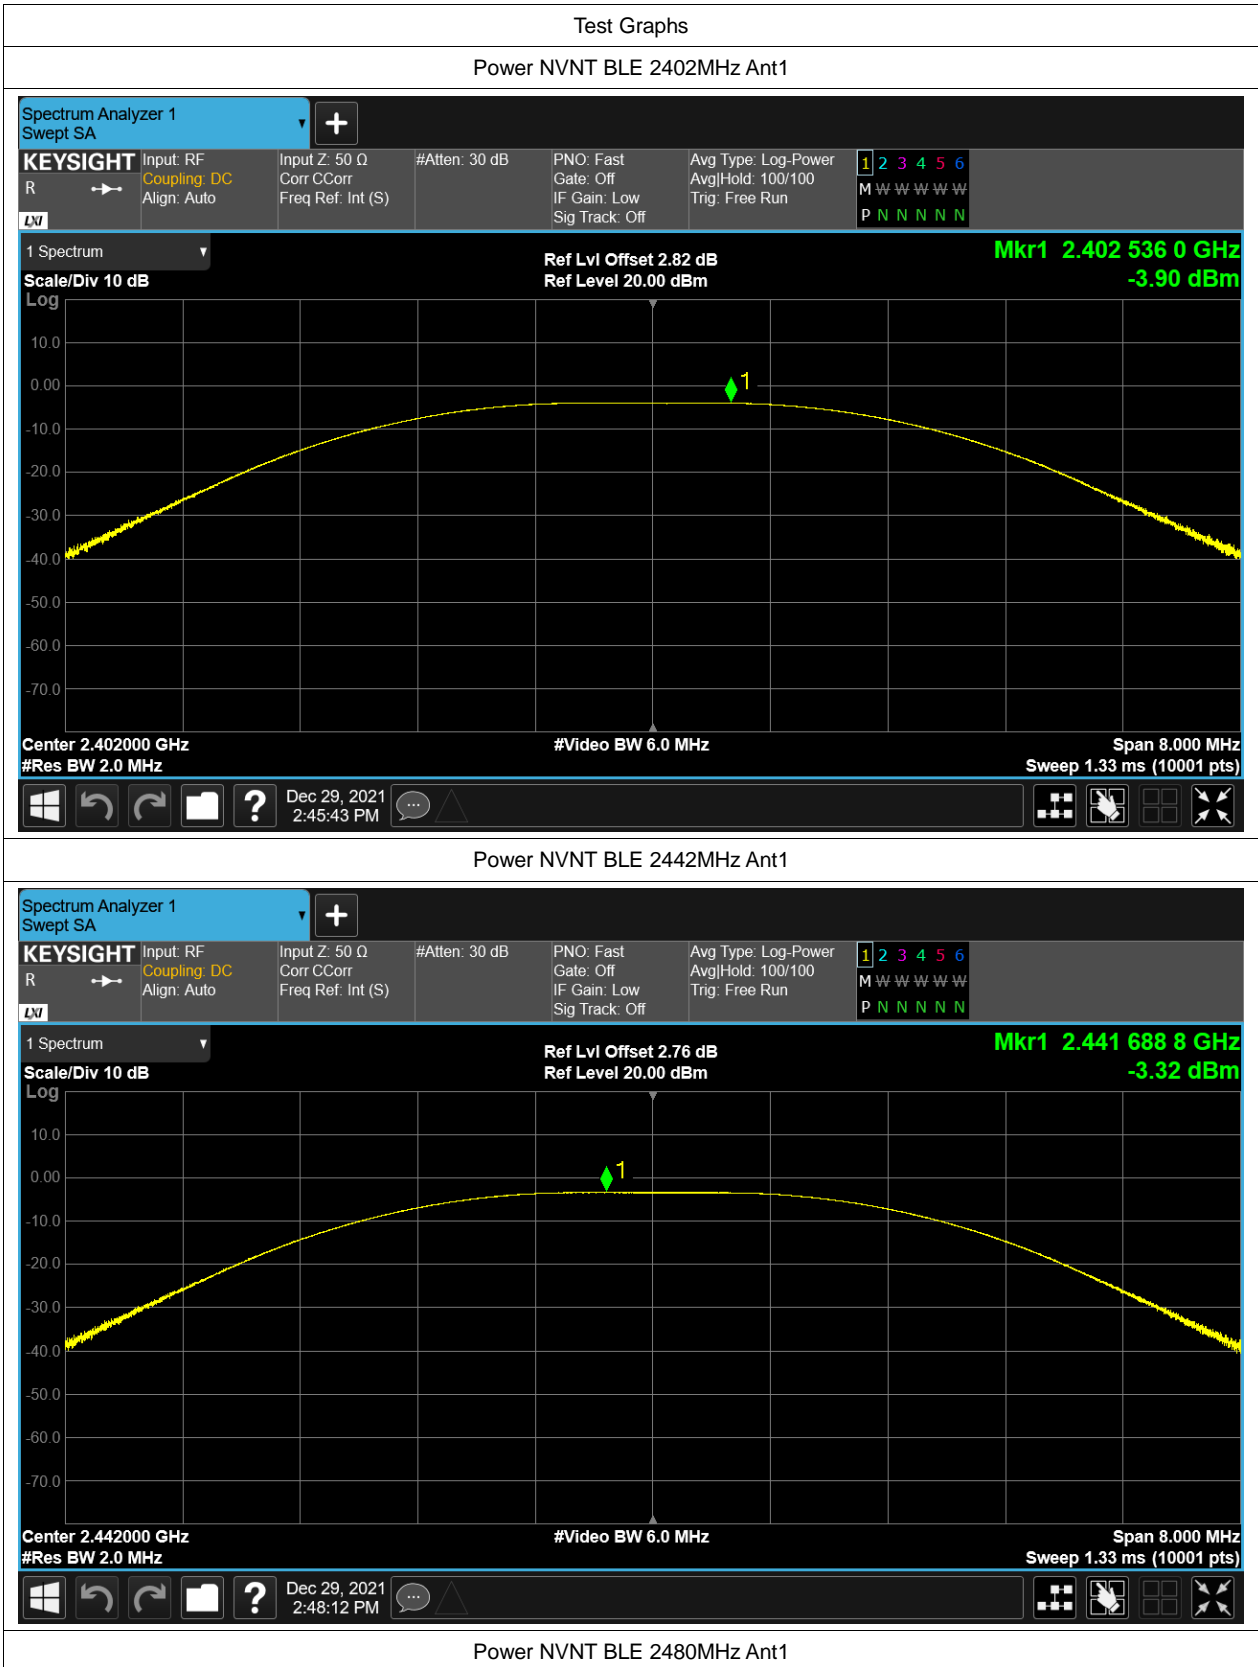


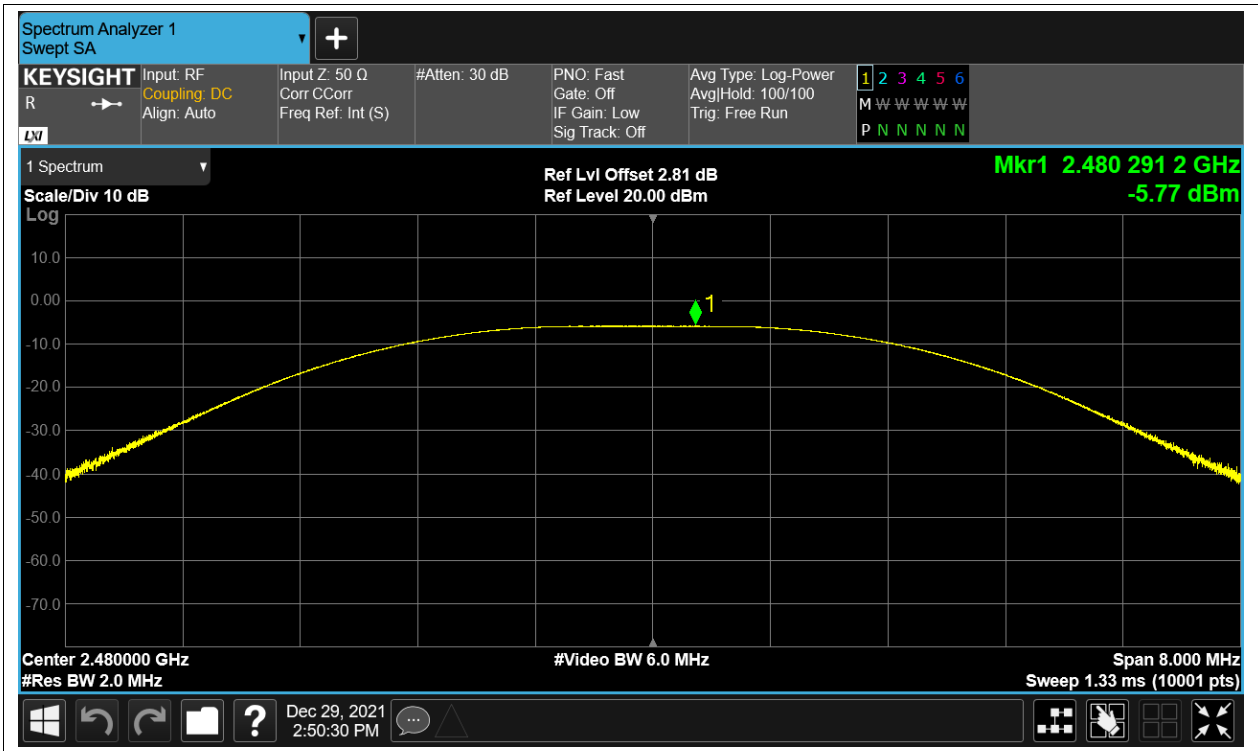

## -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.144	0.5	Pass
NVNT	BLE	2442	Ant1	1.166	0.5	Pass
NVNT	BLE	2480	Ant1	1.166	0.5	Pass

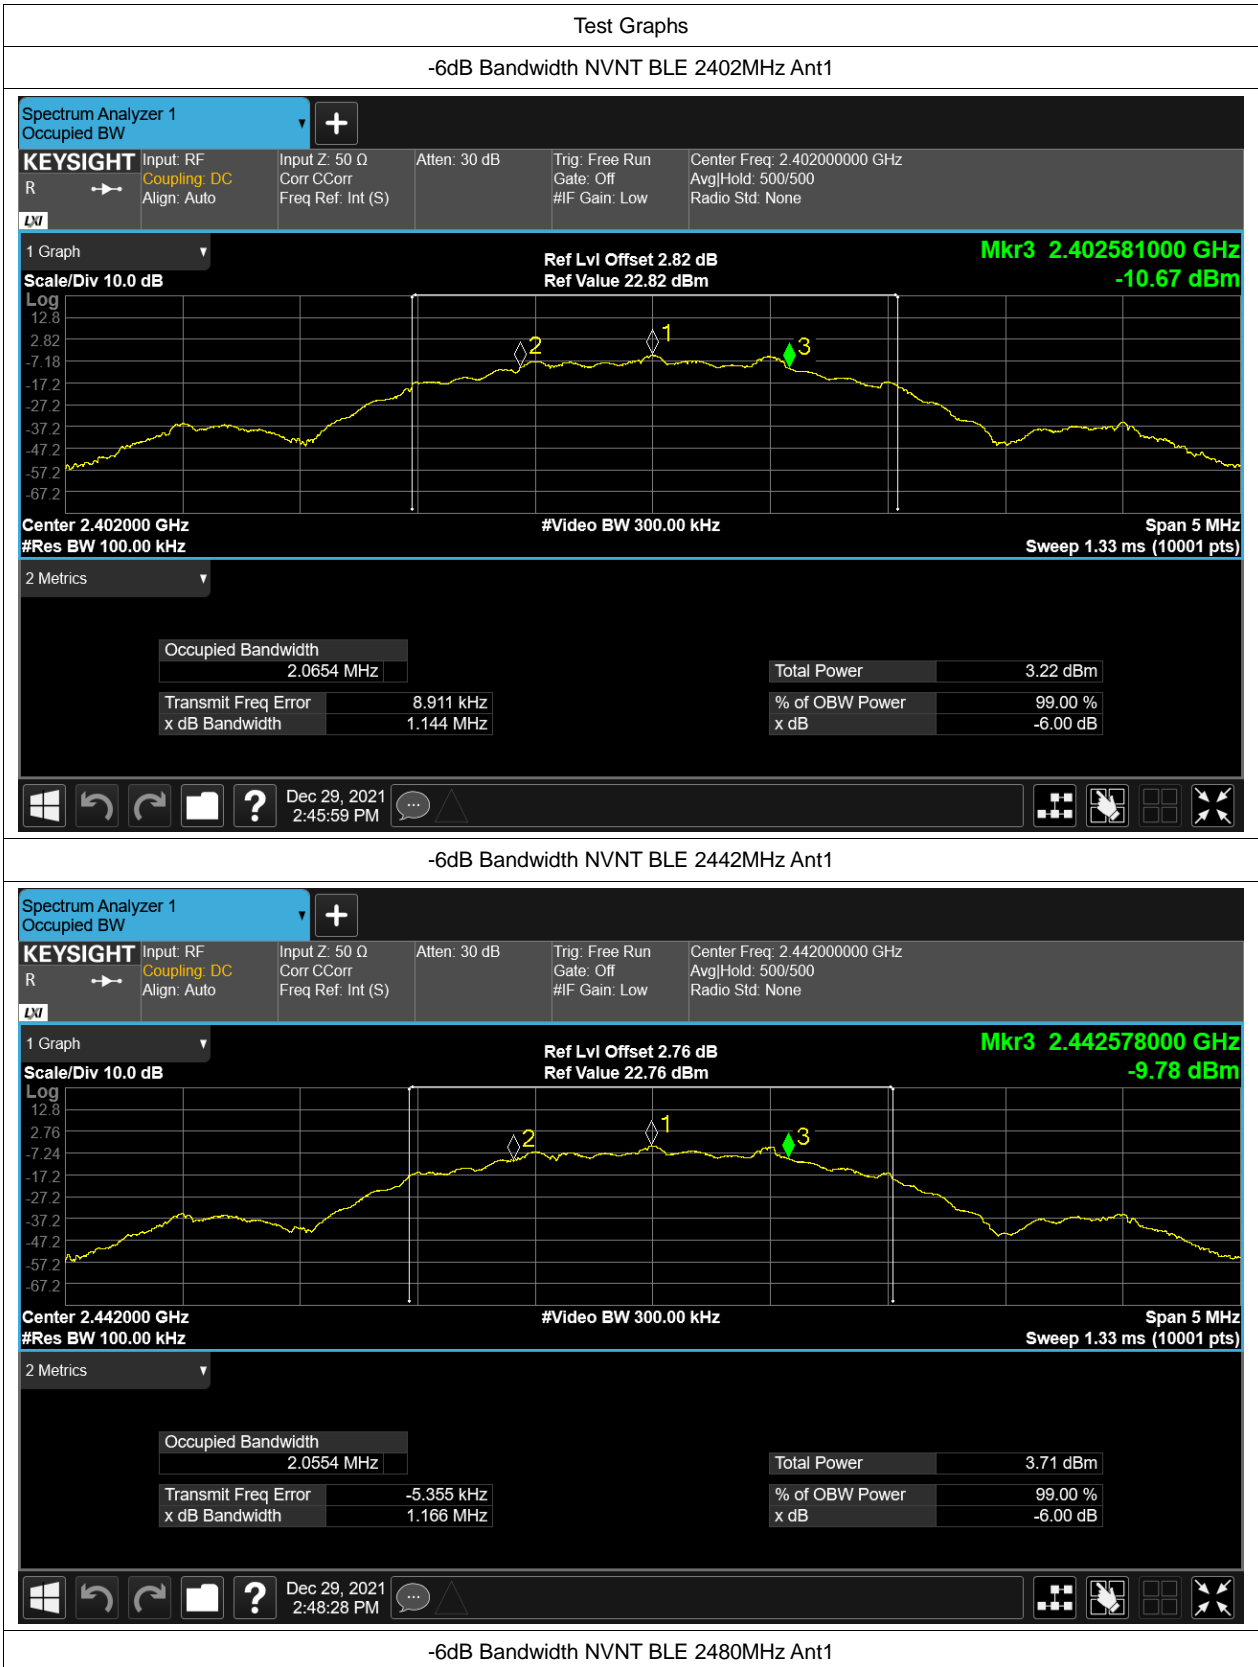

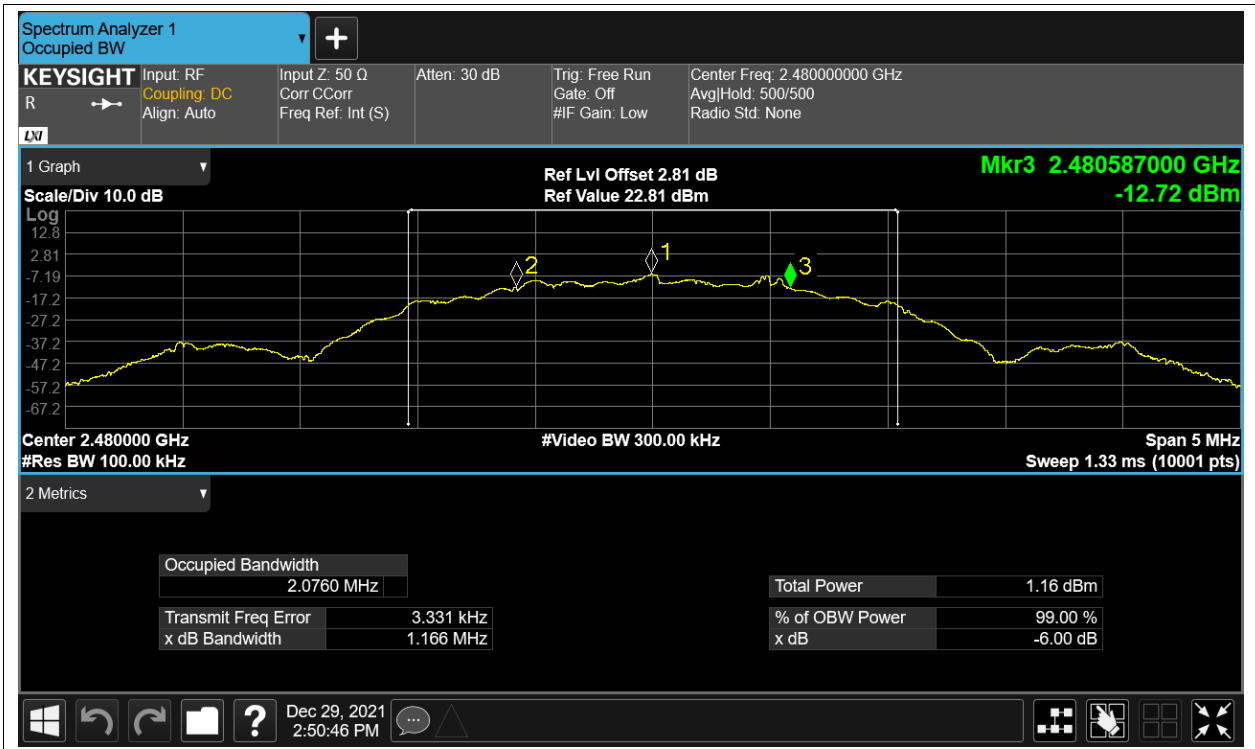


## Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.085005998
NVNT	BLE	2442	Ant1	2.084473831
NVNT	BLE	2480	Ant1	2.082617496







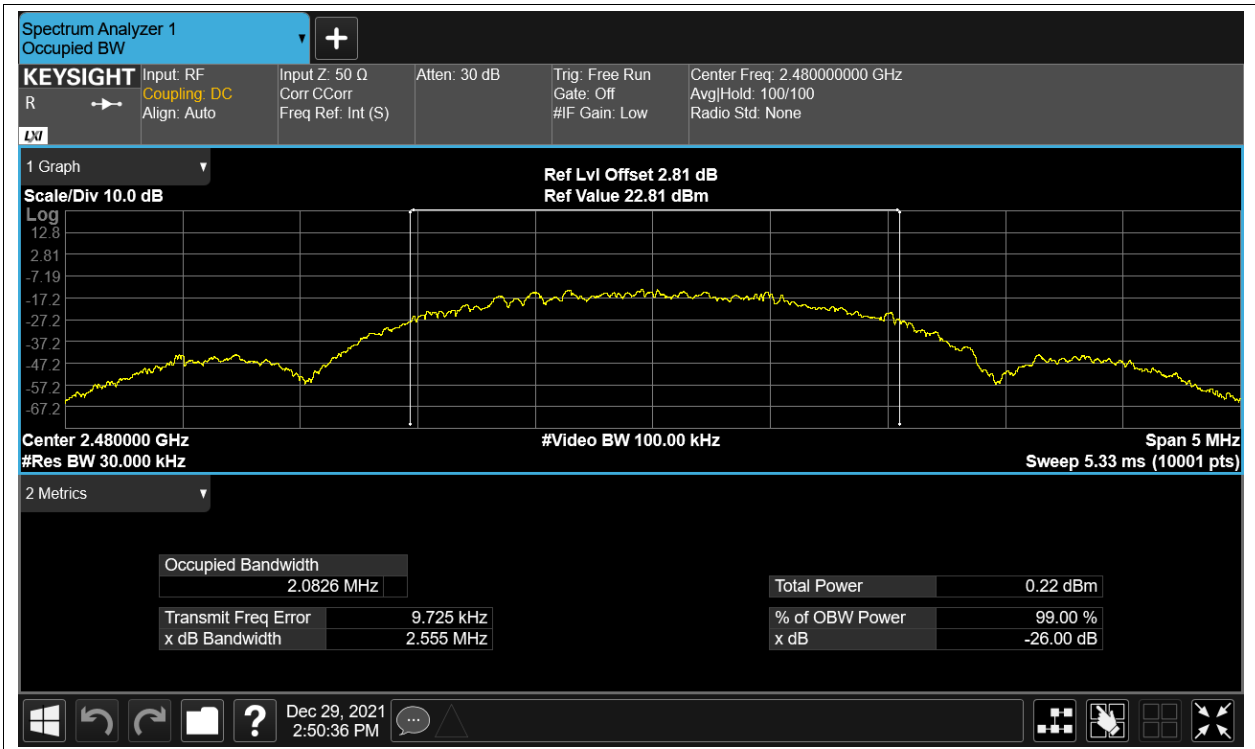

## Maximum Power Spectral Density Level



Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-22.489	8	Pass
NVNT	BLE	2442	Ant1	-21.906	8	Pass
NVNT	BLE	2480	Ant1	-24.381	8	Pass

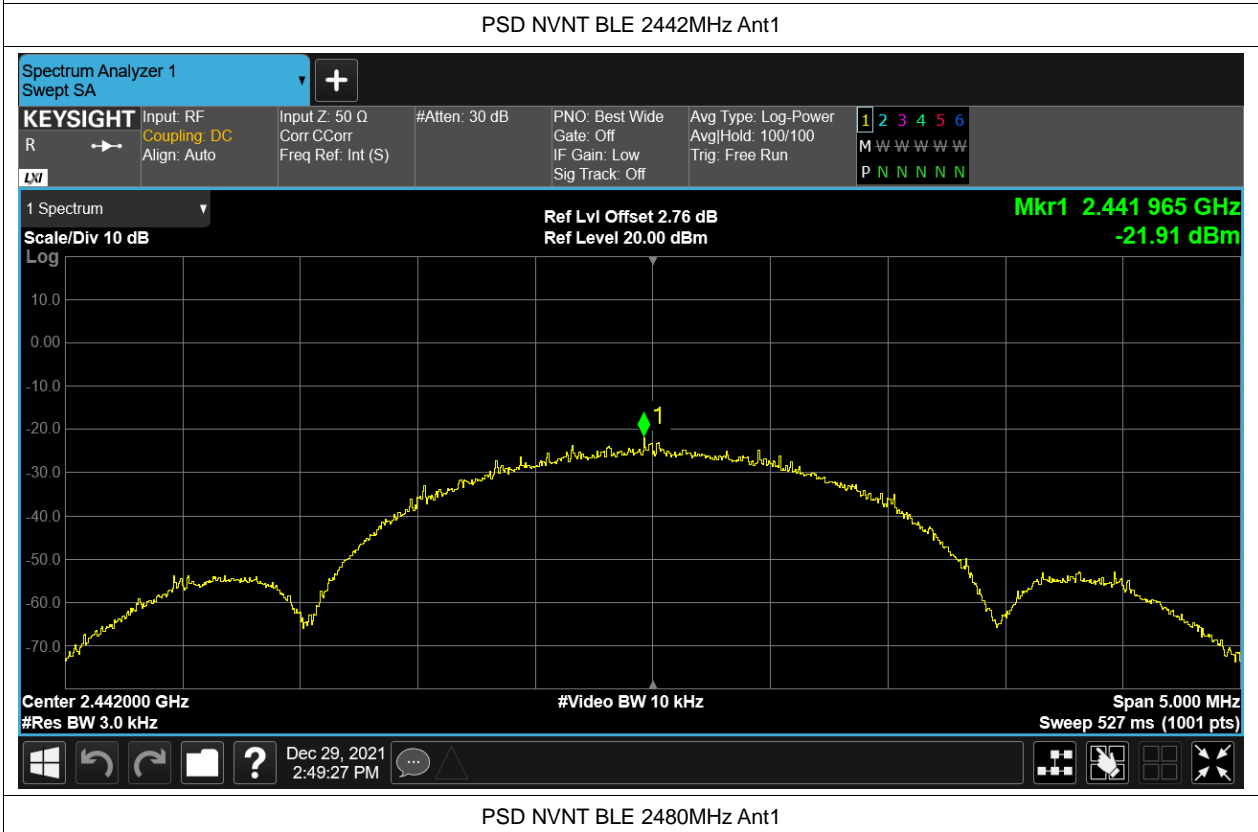

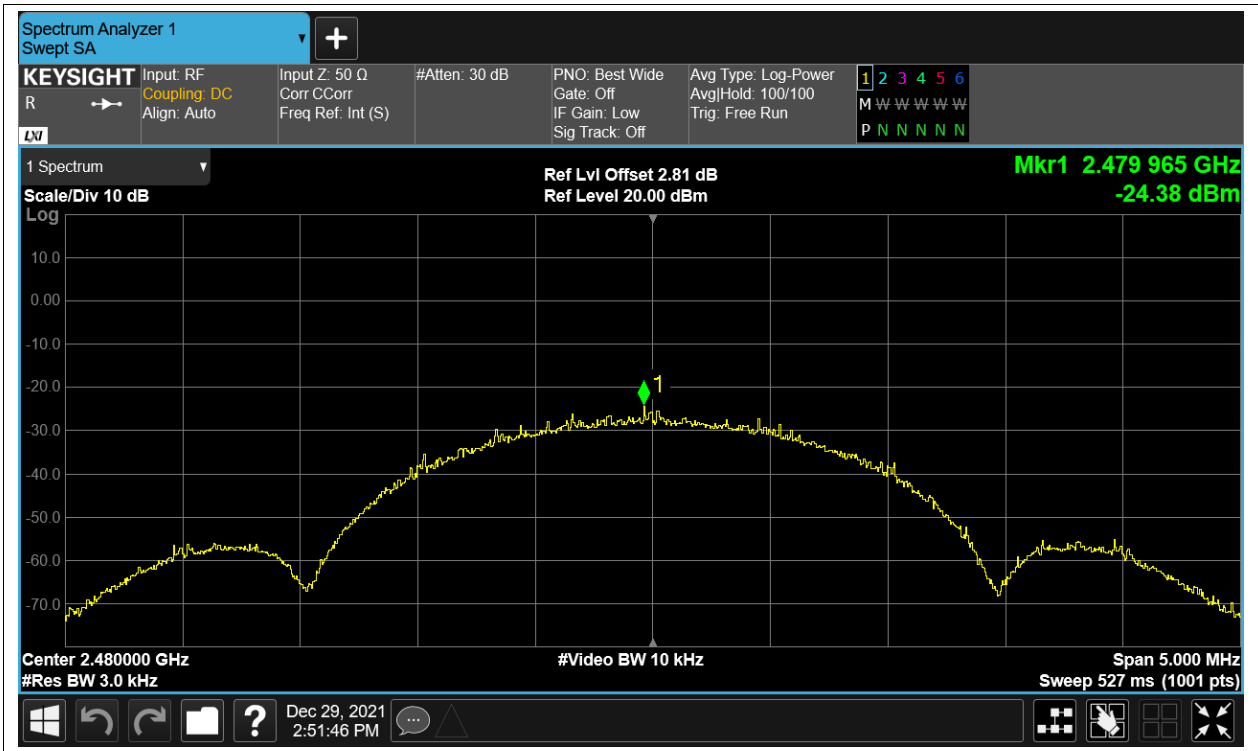


## Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.35	-20	Pass
NVNT	BLE	2480	Ant1	-50.09	-20	Pass

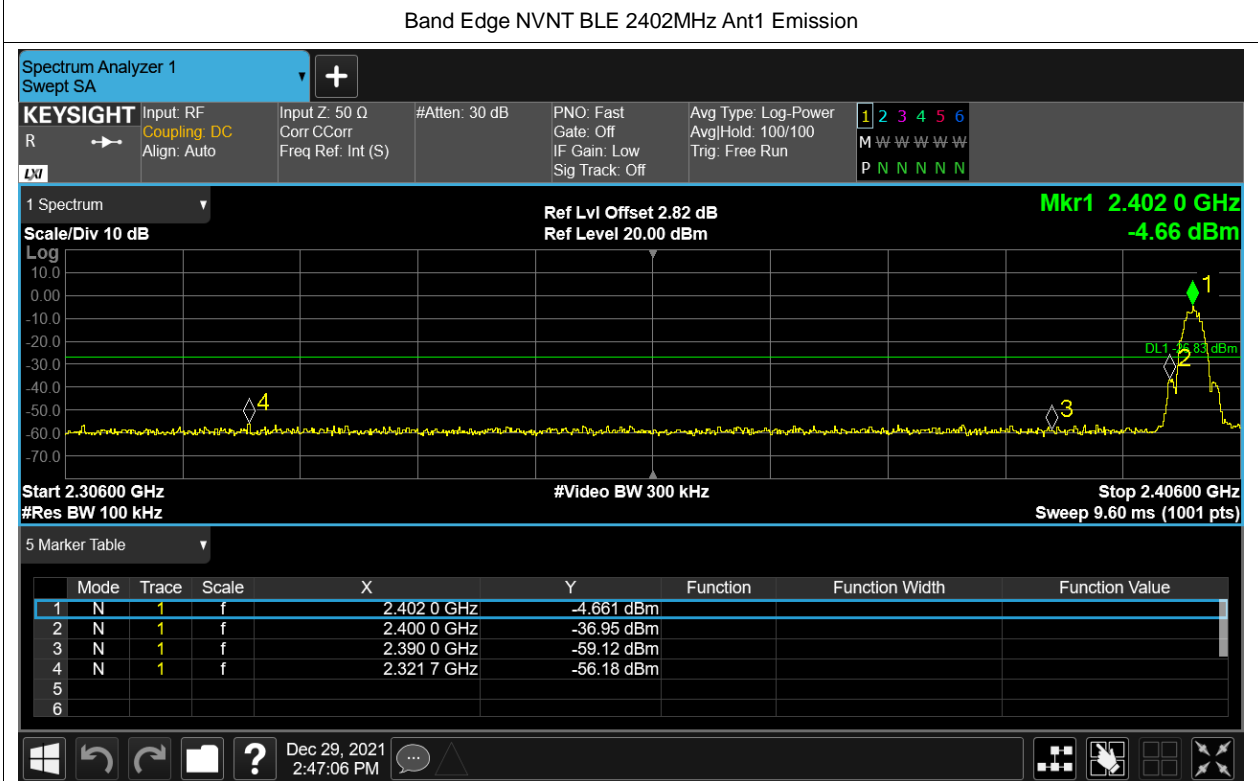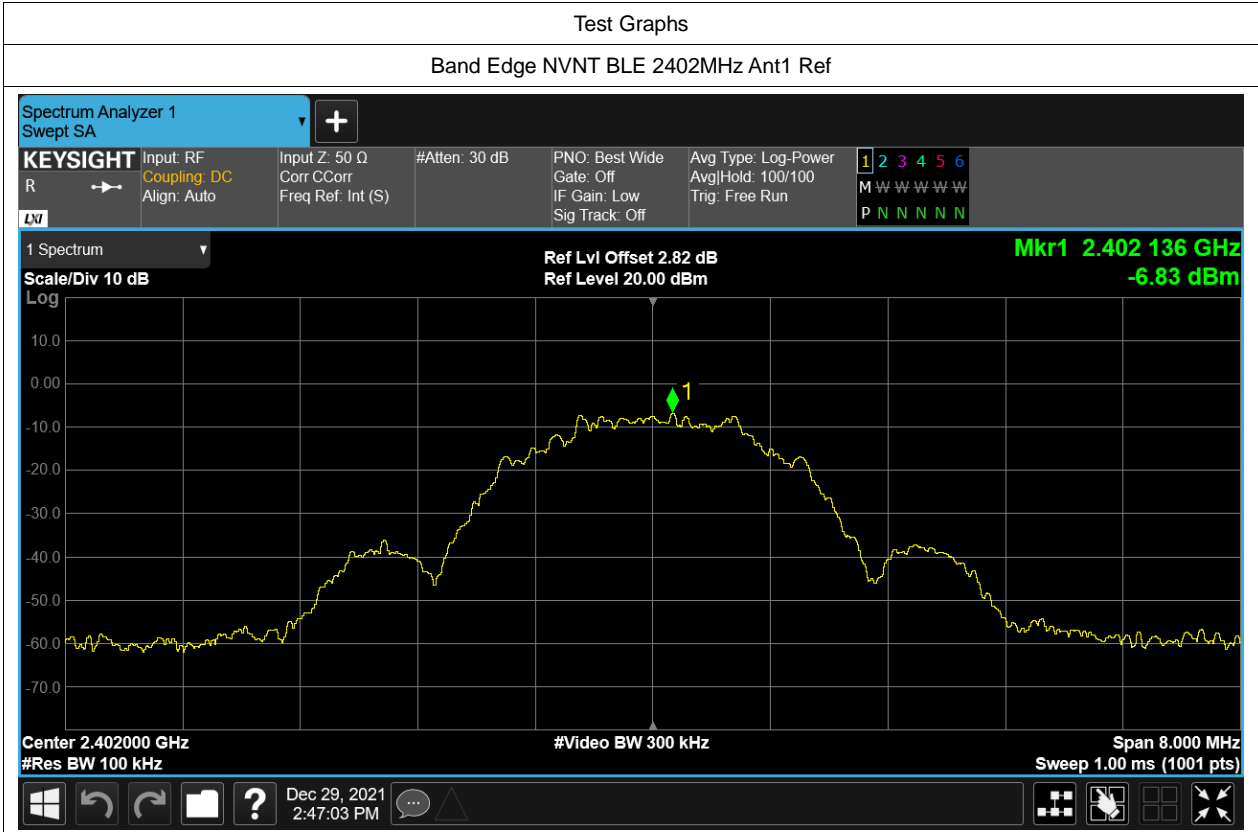

Band Edge NVNT BLE 2480MHz Ant1 Ref

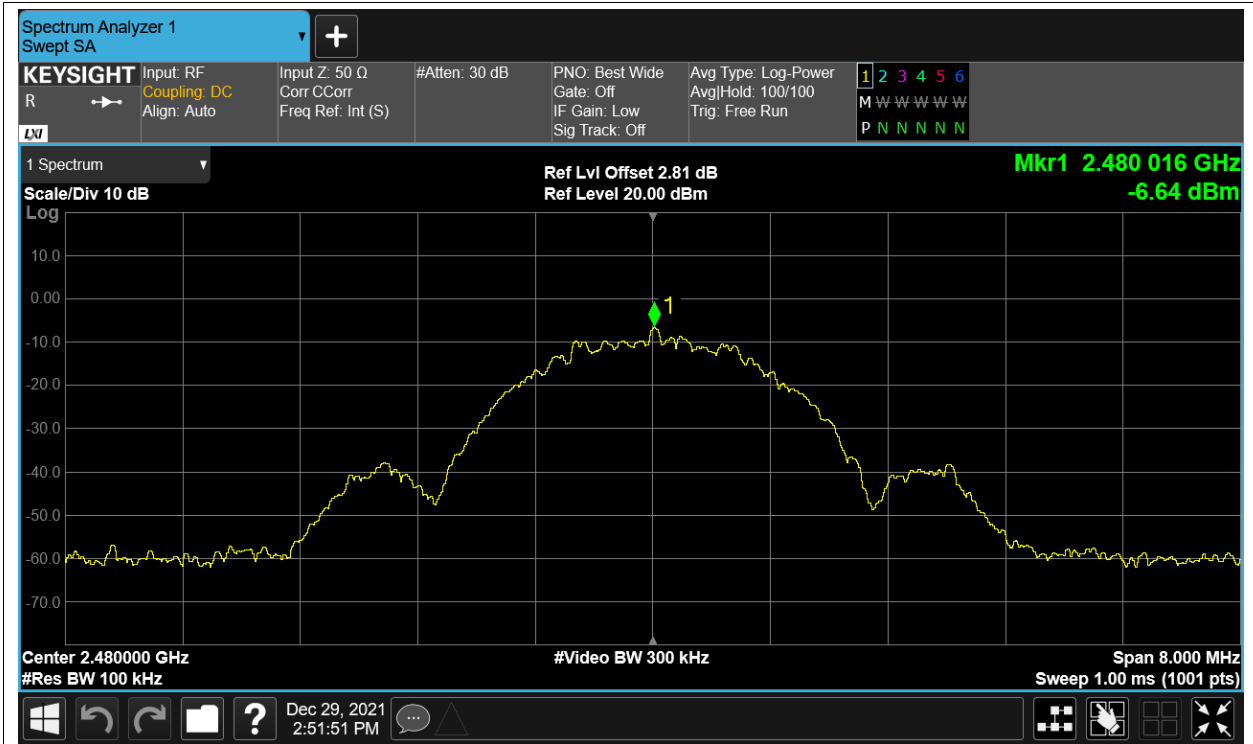



Band Edge NVNT BLE 2480MHz Ant1 Emission

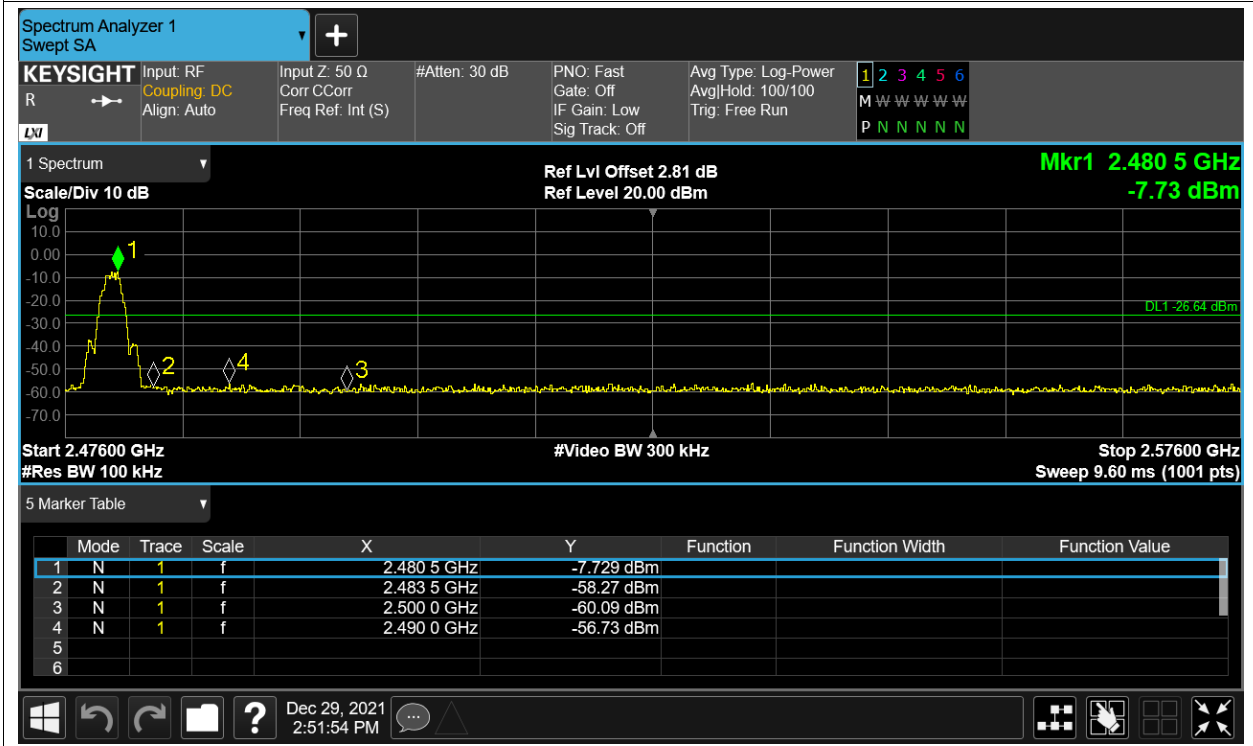


## Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.28	-20	Pass
NVNT	BLE	2442	Ant1	-43.82	-20	Pass
NVNT	BLE	2480	Ant1	-41.84	-20	Pass




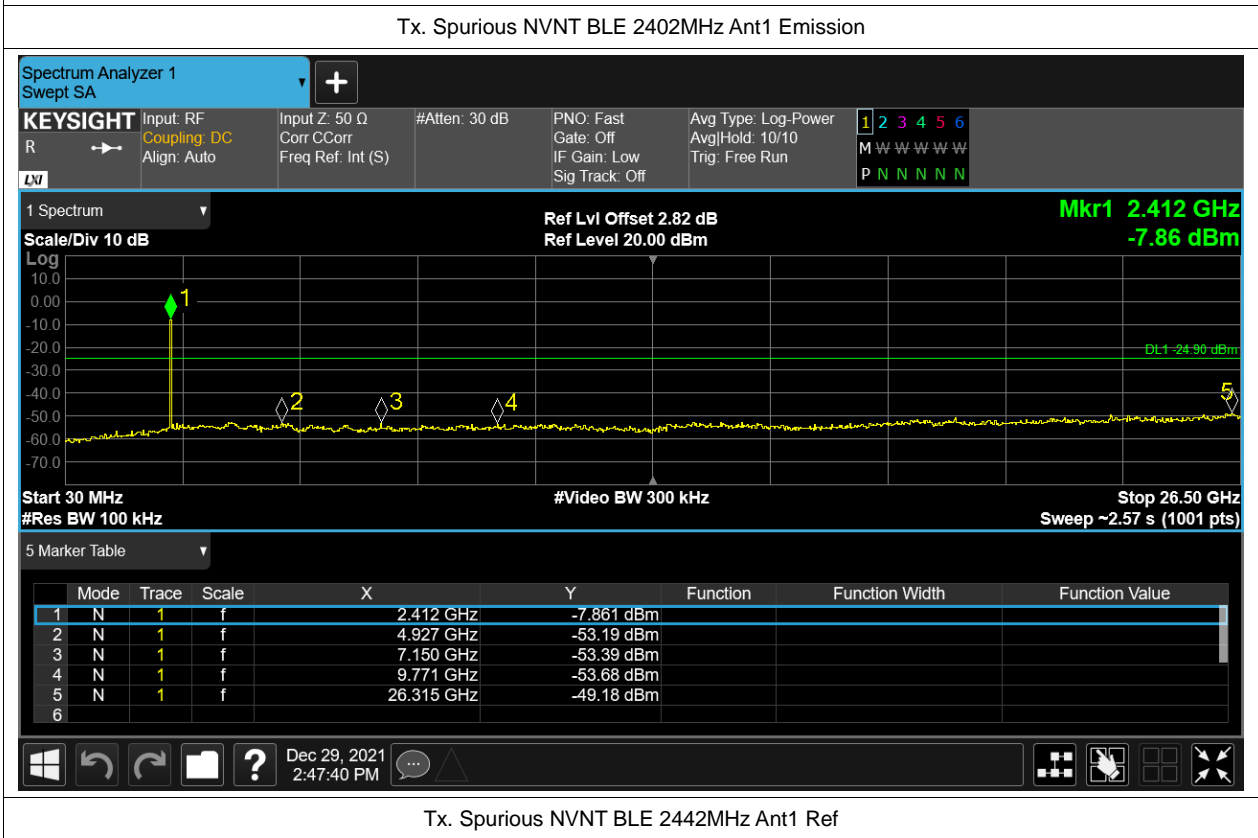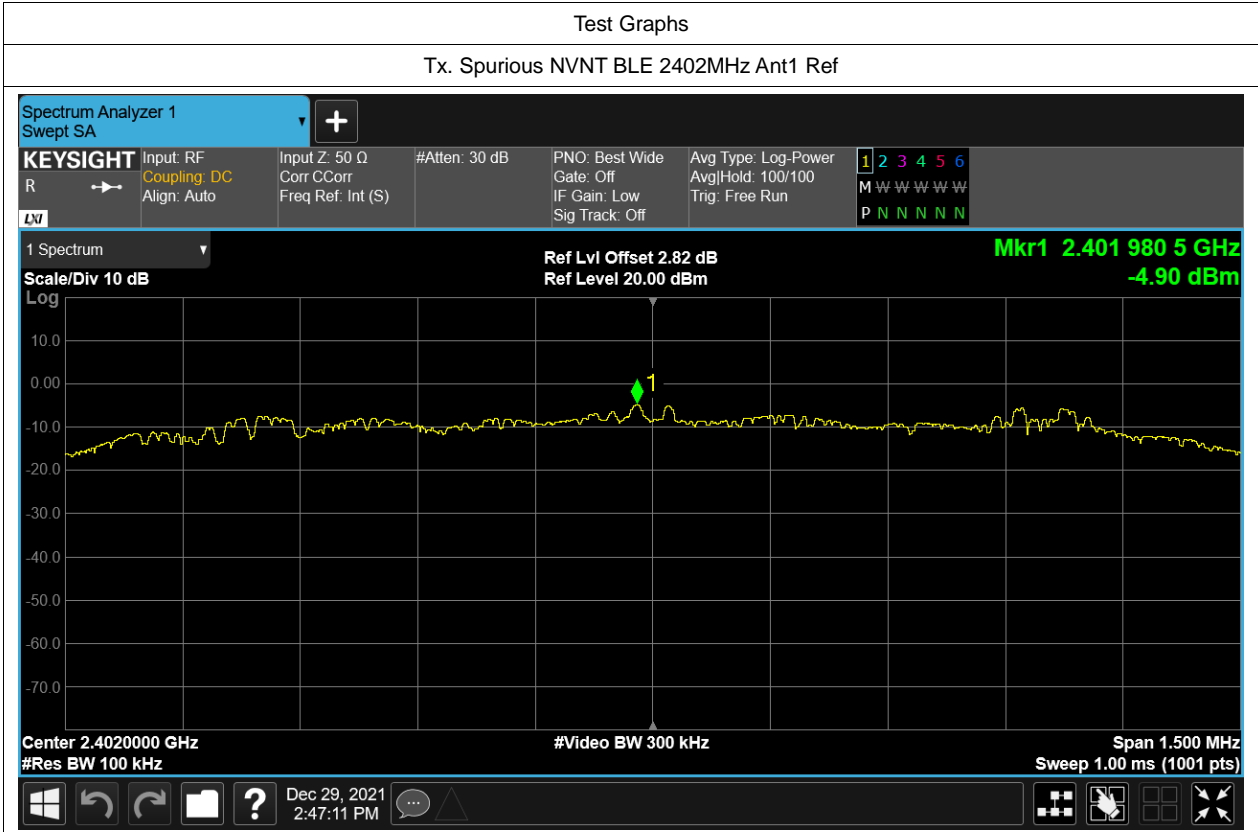


Tx. Spurious NVNT BLE 2442MHz Ant1 Ref

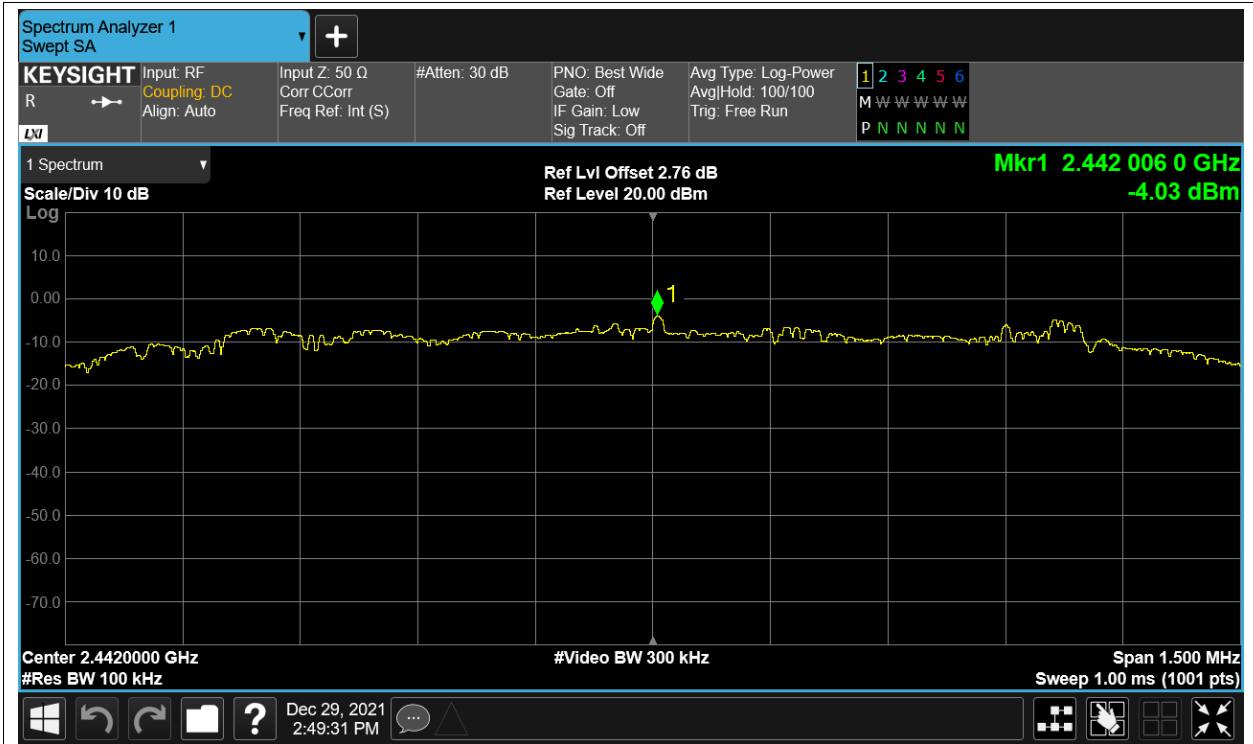

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

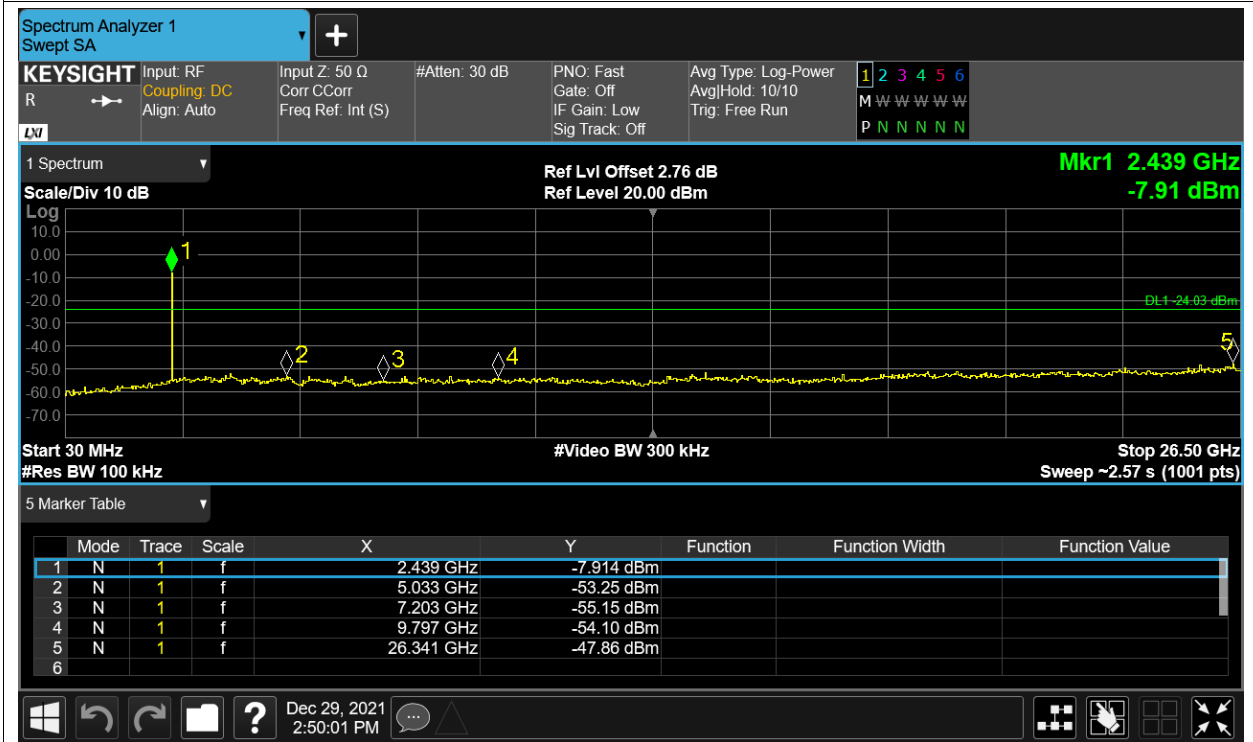

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

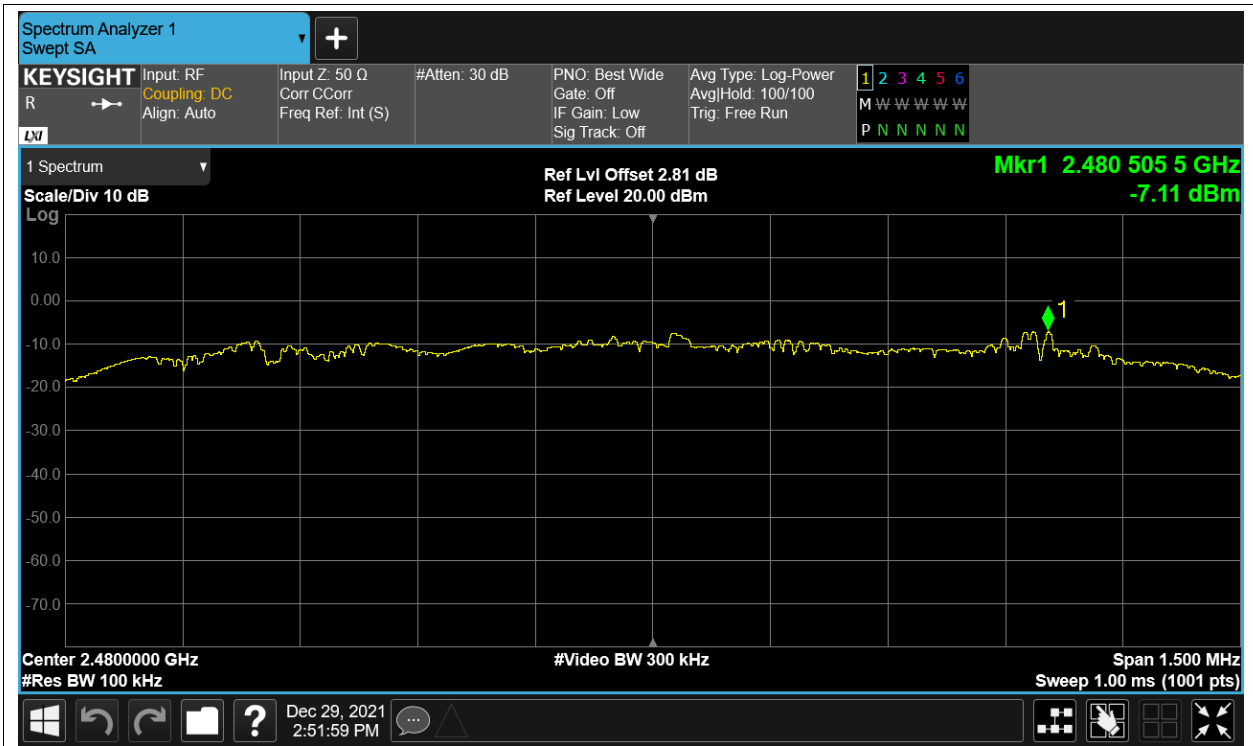

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

