



Feature

- ※ High gain
- ※ Omani-directional
- ※ Wide bandwidth

Application


※ GSM 850/900/DCS/PCS WCDMA BAND1/ BAND2/ BAND4/ BAND5/ BAND8
LTE B1/B2/B3/B4/ B5/B7 / B8/B12/B13/B17/B25/B26/B28/ B38/B40/ B41/B66

Name and address of the antenna manufacturer	Model number of the antenna
Shenzhen ruide communication technology co., ltd Room 604, Floor 6, Building 27, Xiantao Data Valley, Yubei District, Chongqing	3IN1: X6528-ANT1-RD DIV: X6528-ANT2-RD MAIN: X6528-ANT3-RD 5G WIFI: X6528-ANT4-RD


Transmitter Frequency		GSM 850/WCDMA B5/LTE B5/B26: 824 - 849 MHz
		GSM 900/WCDMA B8/LTE B8: 880 - 915 MHz
		DCS /WCDMA B4/LTE B3/B4/B66: 1710 - 1785 MHz
		PCS/WCDMA B2/LTE B2/B25: 1850-1910MHz
		WCDMA B1/LTE B1: 1920 - 1980MHz
		LTE B7: 2496-2565MHz
		LTE B40: 2300-2400MHz
		LTE B38: 2570-2620MHz
		LTE B41: 2496-2690MHz
		LTE B28/B12/B13/B17: 710-755MHz
Receiver Frequency		GSM 850/WCDMA B5/LTE B5/B26: 869 - 894 MHz
		GSM 900/WCDMA B8/LTE B8: 925 - 960 MHz
		DCS/LTE B3: 1805 - 1880 MHz
		WCDMA 4/LTE B4/B66: 2110-2155 MHz
		PCS/WCDMA B2/LTE B2/B25: 1930-1990MHz
		WCDMA B1/LTE B1: 2110 - 2170MHz
		LTE B7: 2620-2690MHz
		LTE B40: 2300-2400MHz
		LTE B38: 2570-2620MHz
		LTE B41: 2496-2690MHz
LTEB28/B12/13/17: 758-803MHz		
Antenna Gain	ANT3	GSM 850/WCDMA B5/LTE B5/B26: -5.0dBi
		GSM 900/WCDMA B8/LTE B8: -5.2dBi
		DCS /WCDMA B4/LTE B3/B4/B66: -1.4dBi
		PCS/WCDMA B2/LTE B2/B25: -1.3dBi
		WCDMA B1/LTE B1: -1.4dBi
		LTE B7/B38/B41: -0.2dBi
		LTE B40: -0.8dBi
		LTE B28/B12/B13/B17: -6.2dBi
	ANT1	2.4G Wi-Fi/Bluetooth: -3.2dBi
	ANT4	5G: -0.9dBi

※ Antenna Gain


ANT1 2.4G WIFI&BT

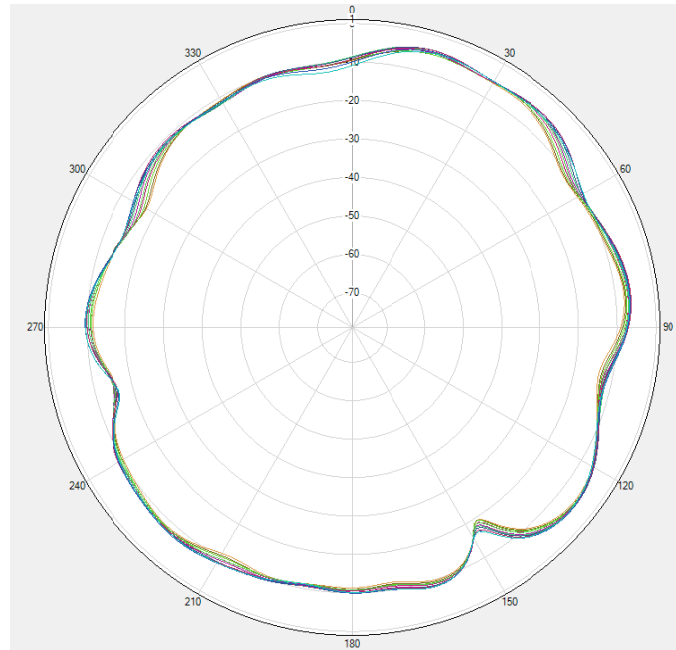

2.4G WIFI&BT Phi=0deg

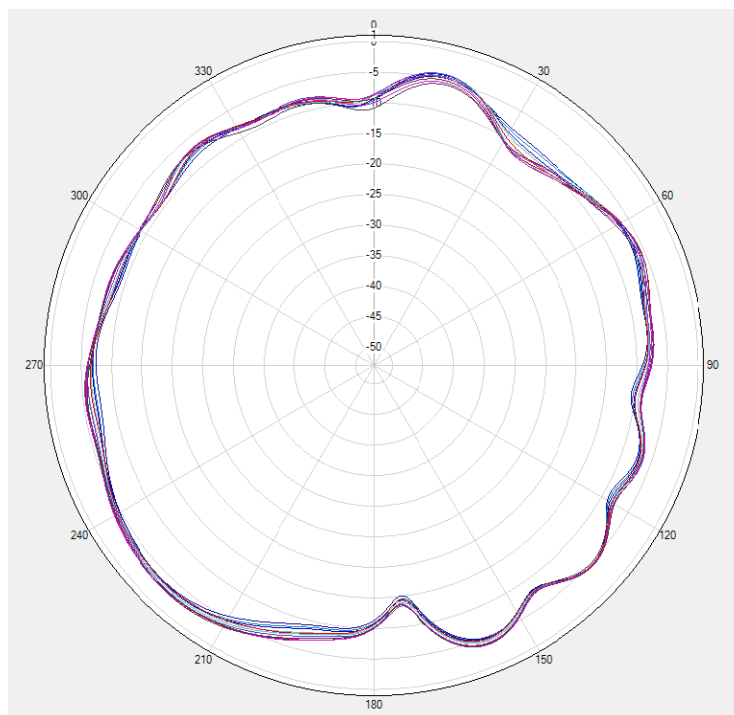


2.4G WIFI&BT Phi=90deg

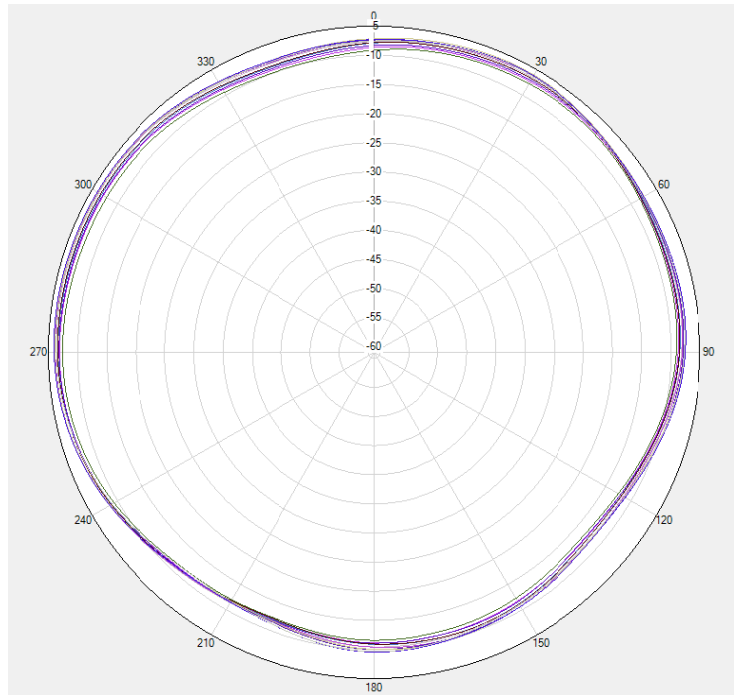


2.4G WIFI&BT Theta=90deg


※ Antenna Gain
ANT3
Main Antenna

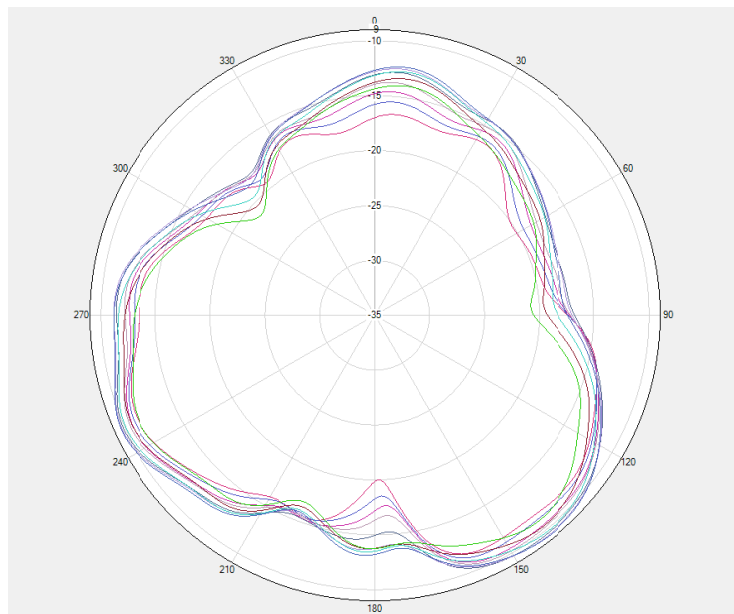

GSM850 / WCDMA B5 / LTE B5/B26 Phi=0deg

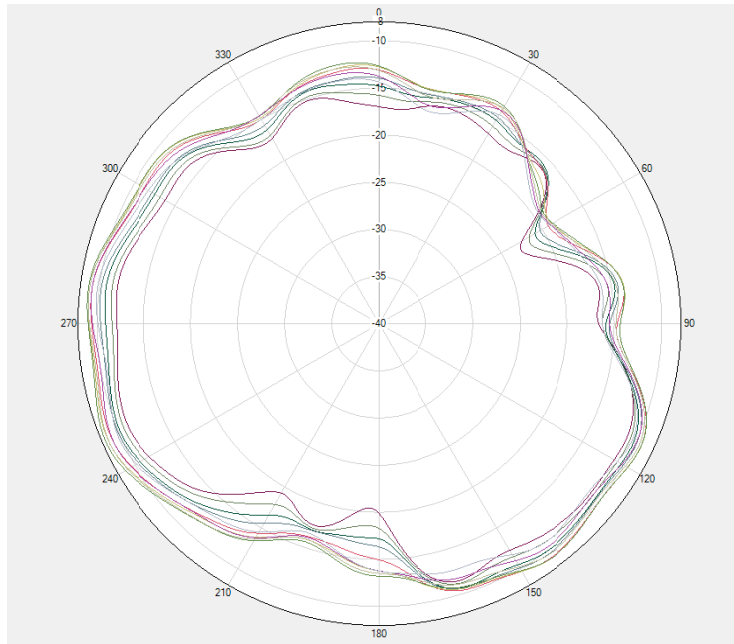


GSM850 / WCDMA B5 / LTE B5/B26 Phi=90deg

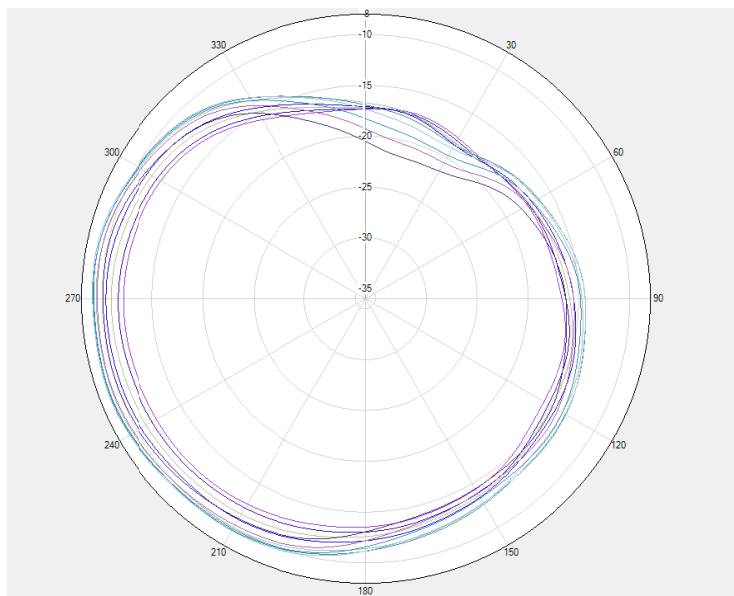


GSM850 / WCDMA B5 / LTE B5/B26 Theta=90deg


※ Antenna Gain
Main Antenna

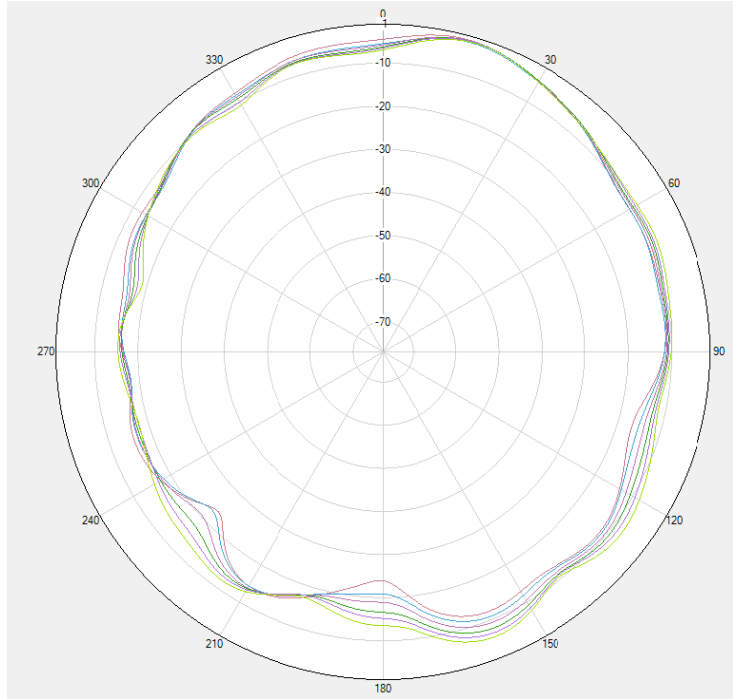

LTE B40 Phi=0deg

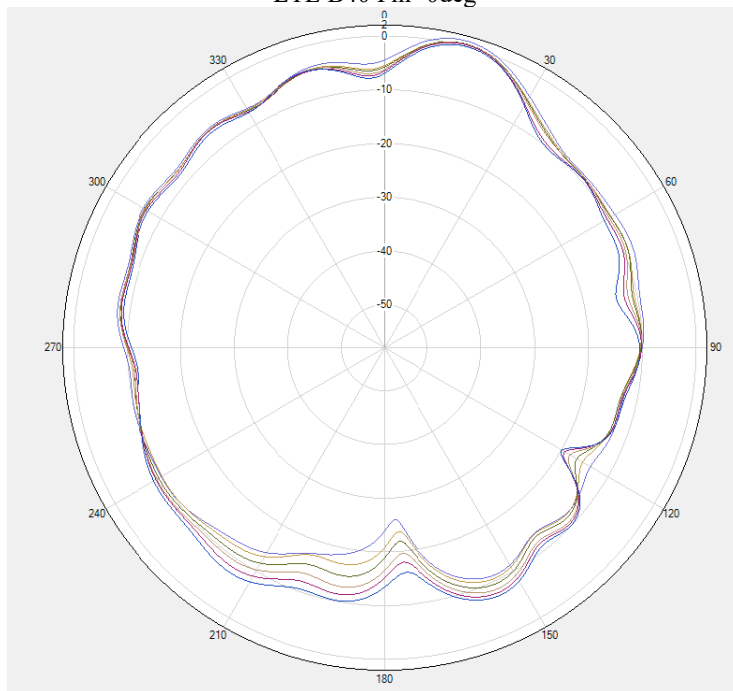


LTE B40 Phi=90deg

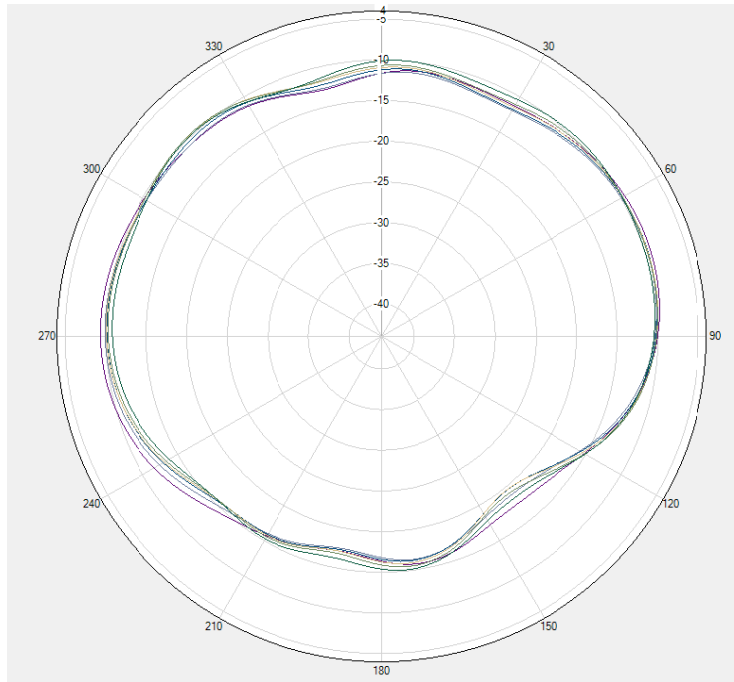


LTE B40 Theta=90deg


※ Antenna Gain
Main Antenna

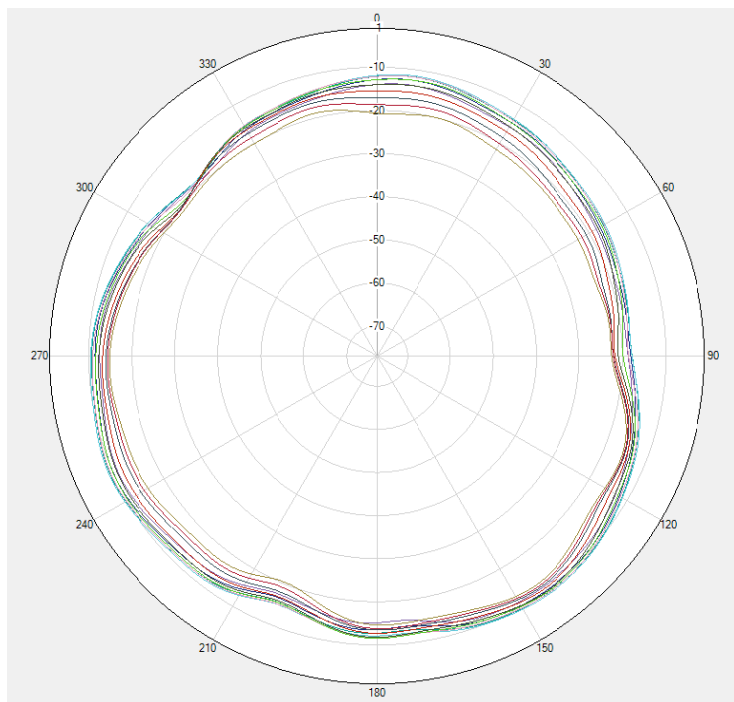

GSM900 / WCDMA B8 / LTE B8 Phi=0deg

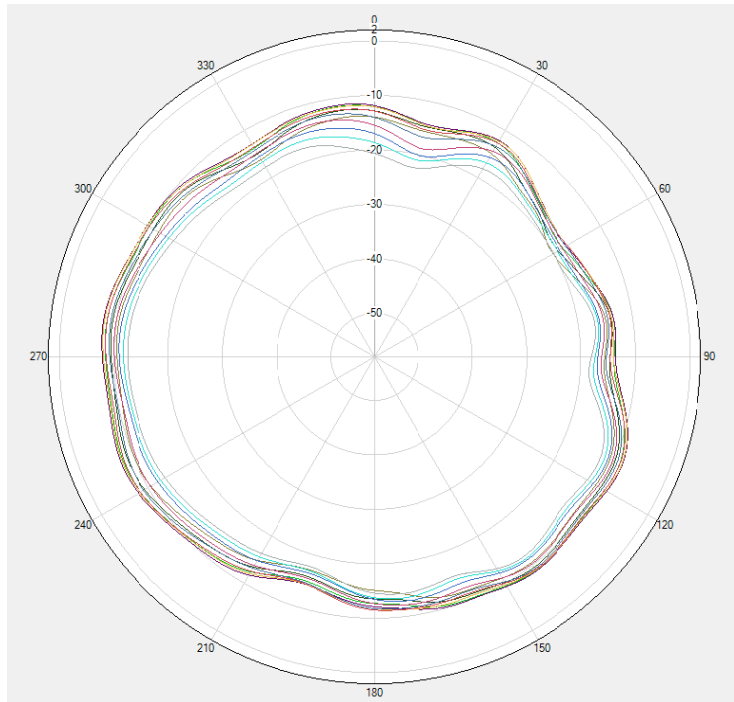


GSM900 / WCDMA B8 / LTE B8 Phi=90deg

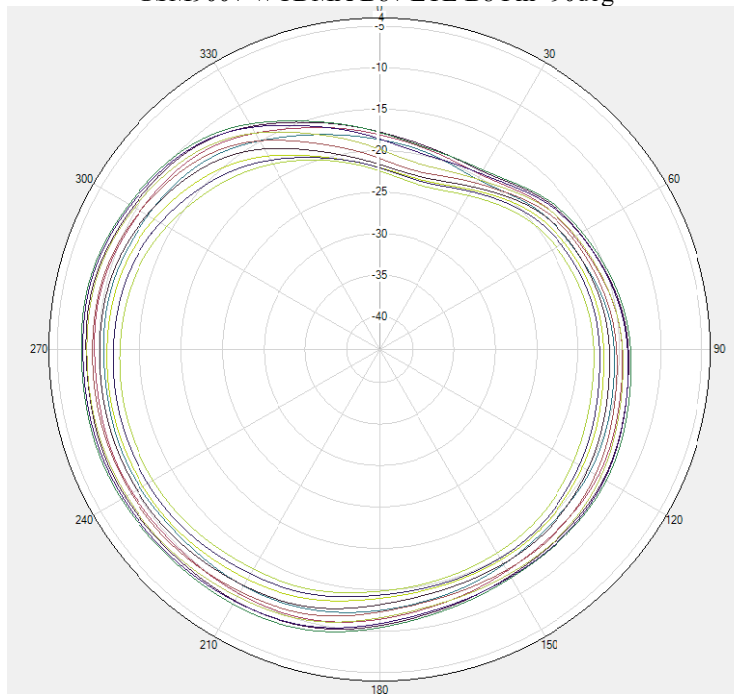


GSM900 / WCDMA B8 / LTE B8 Theta=90deg


※ Antenna Gain
Main Antenna

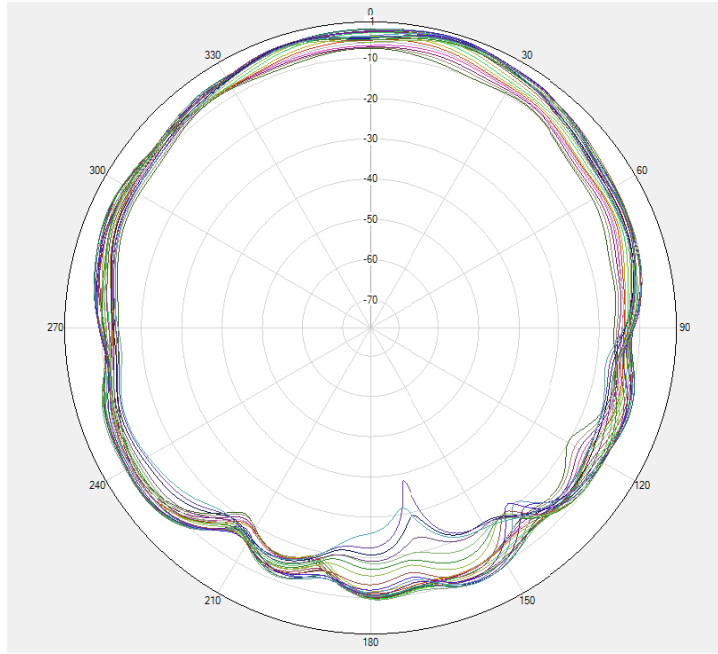

DCS1800/PCS1900/WCDMA B1/B2LTE B1/B2/B3/B4/B25/B66 $\Phi=0^\circ$

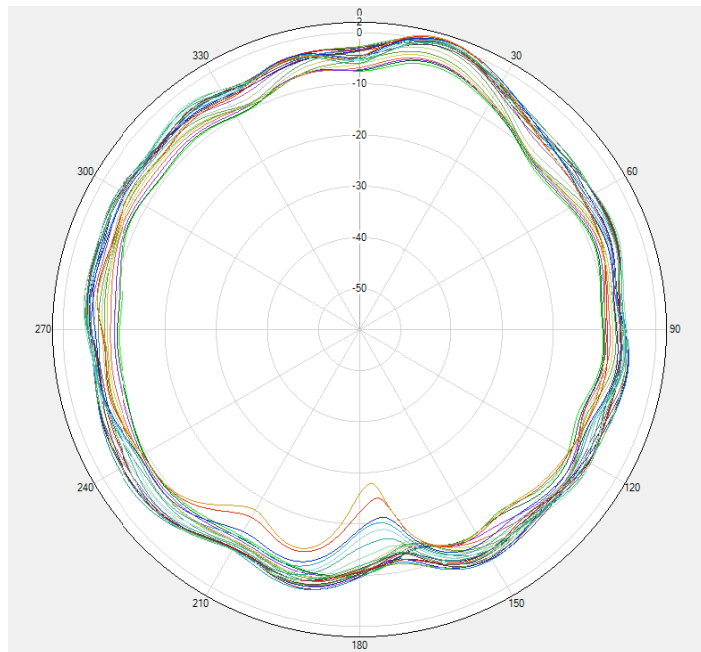


DCS1800/PCS1900/WCDMA B1/B2LTE B1/B2/B3/B4/B25/B66 $\Phi=90^\circ$

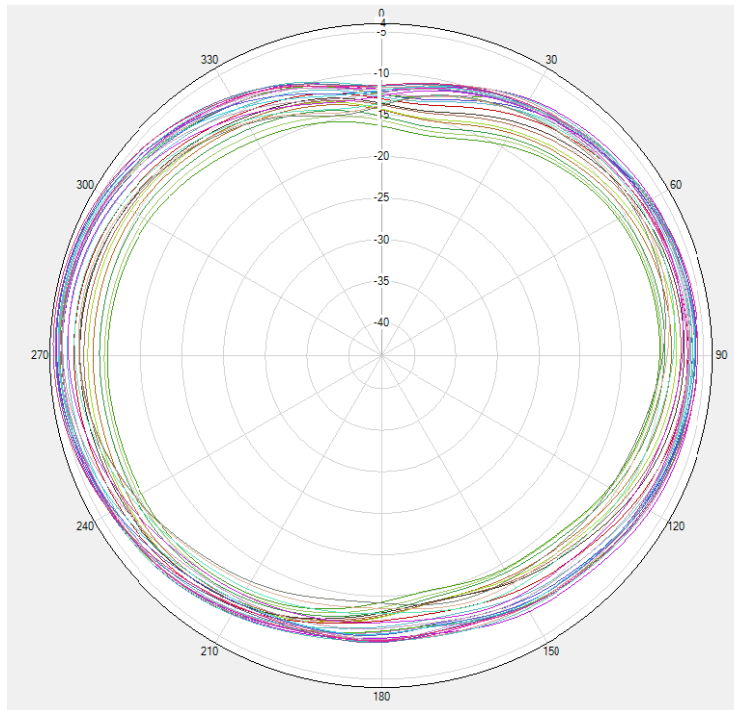


DCS1800/PCS1900/WCDMA B1/B2 LTE B1/B2/B3/B4/B25/B66 Theta=90deg


※ Antenna Gain
Main Antenna

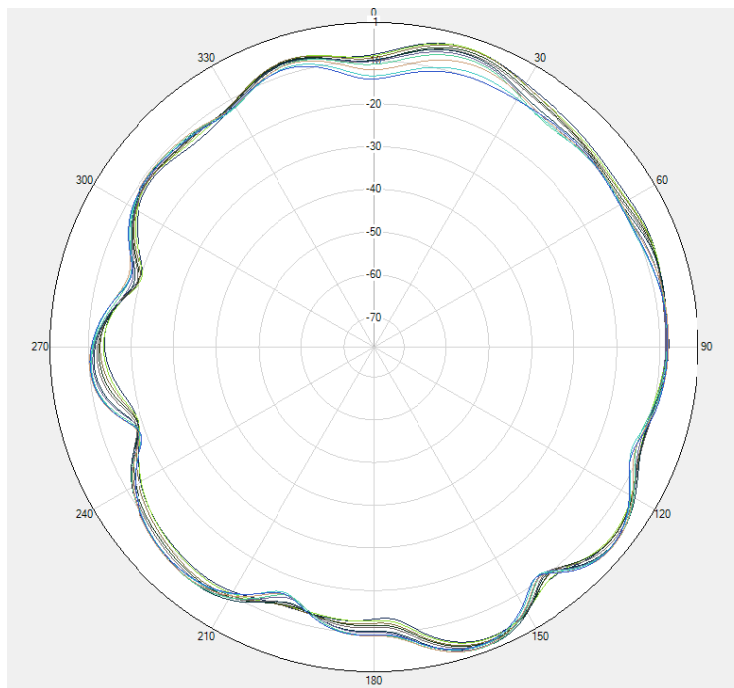

LTE B7/B38/41 Phi=0deg

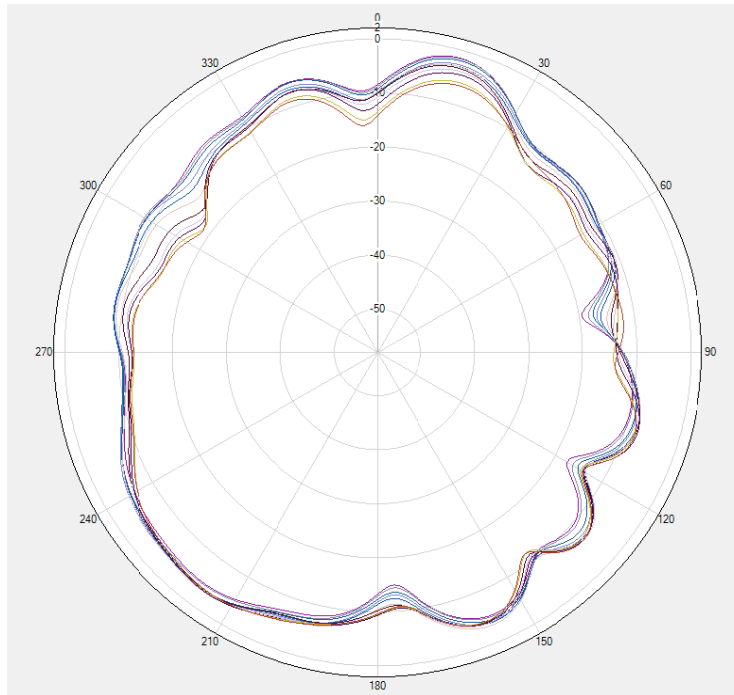


LTE B7/B38/41 $\Phi=90^\circ$

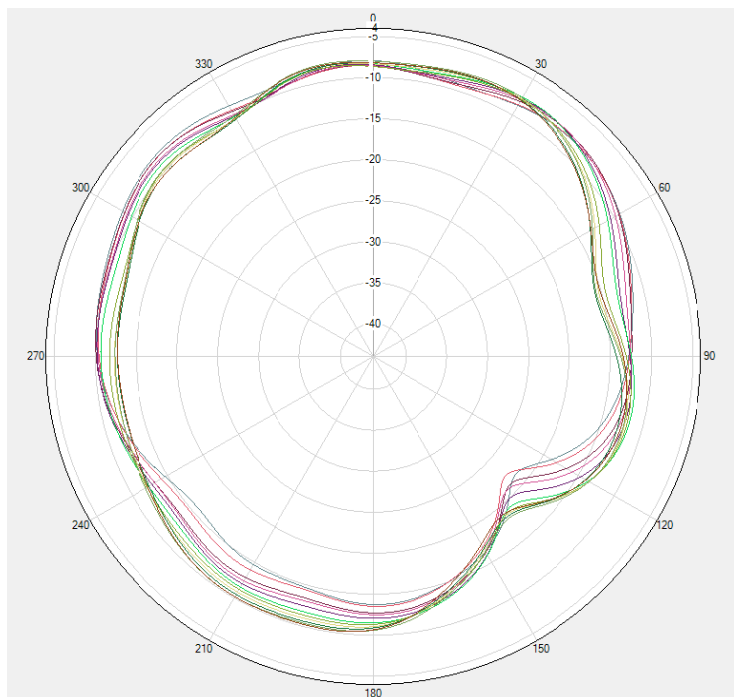


LTE B7/B38/41 $\Theta=90^\circ$


※ Antenna Gain
Main Antenna

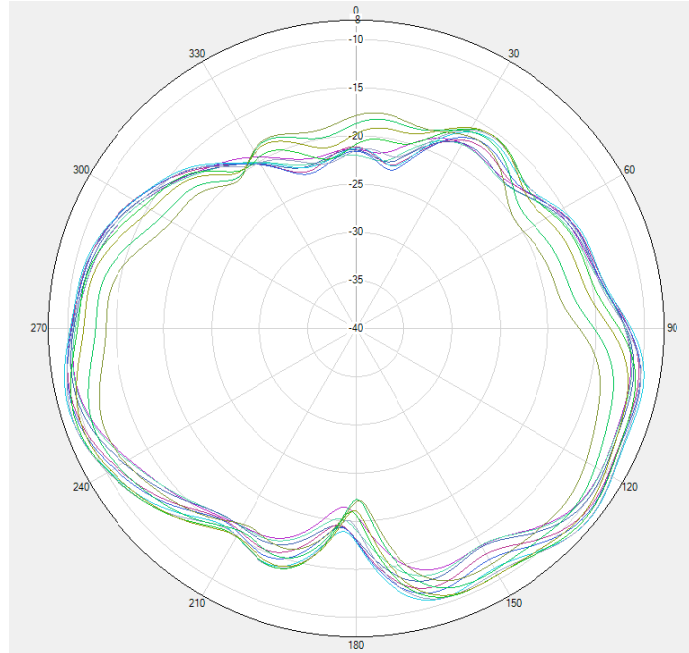

LTEB28/B12/B13/B17 Phi=0deg

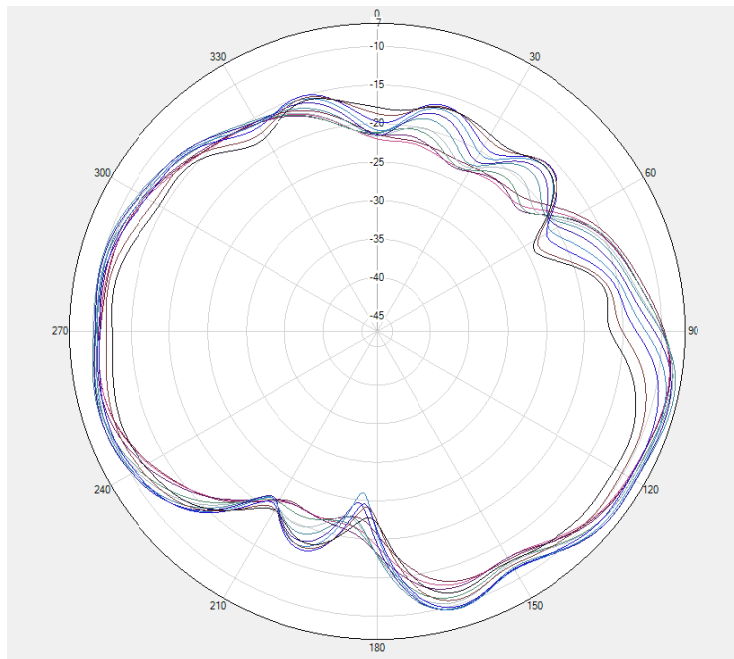


LTE B28/B12/B13/B17 Phi=90deg

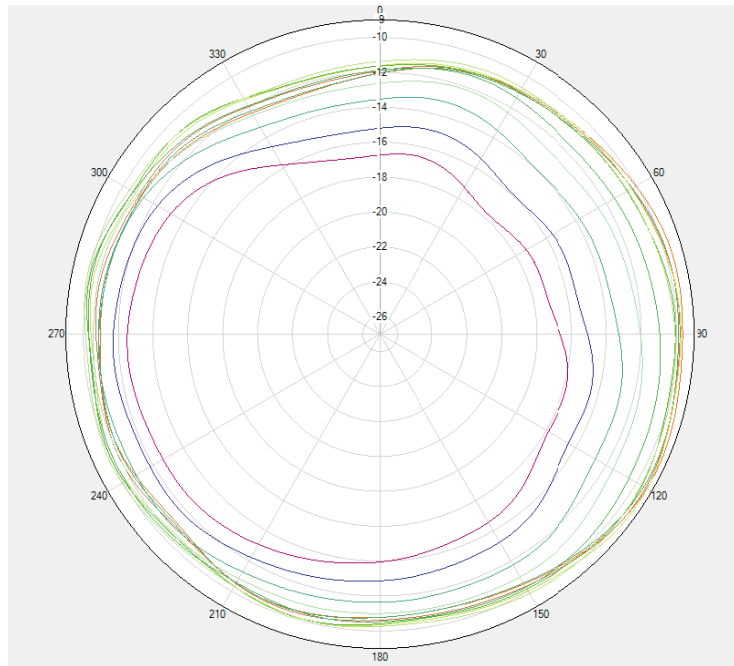


LTE B28/B12/B13/B17 Theta=90deg


※ Antenna Gain
ANT4

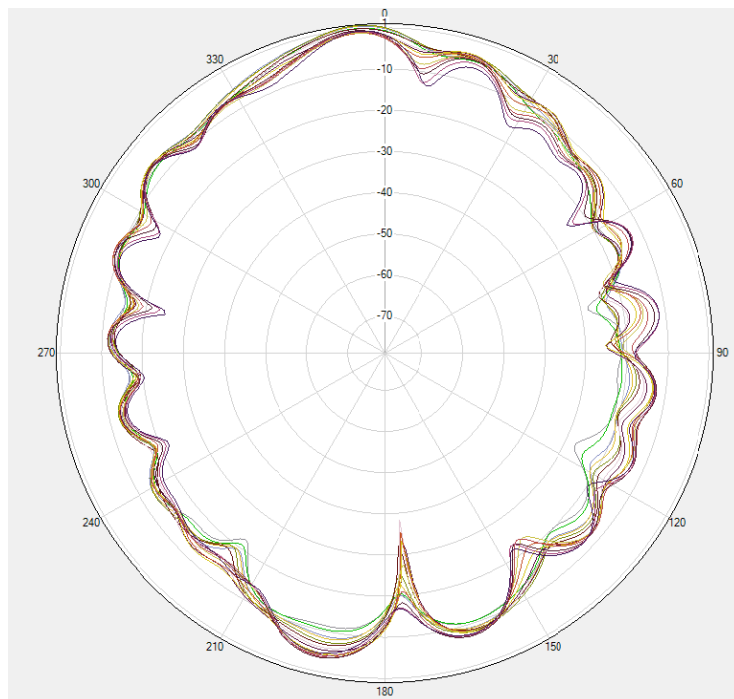

5G WIFI Phi=0deg


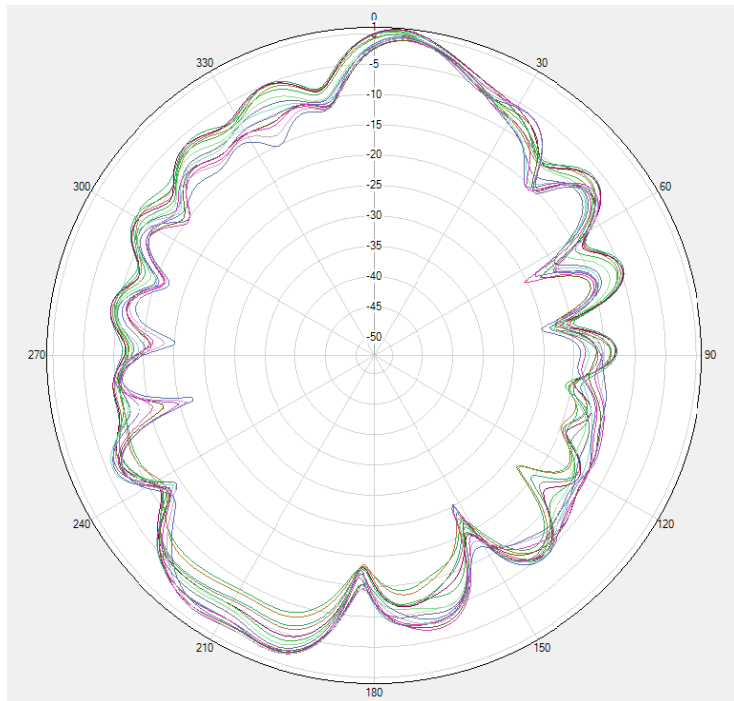


5G WIFI $\Phi=90^\circ$

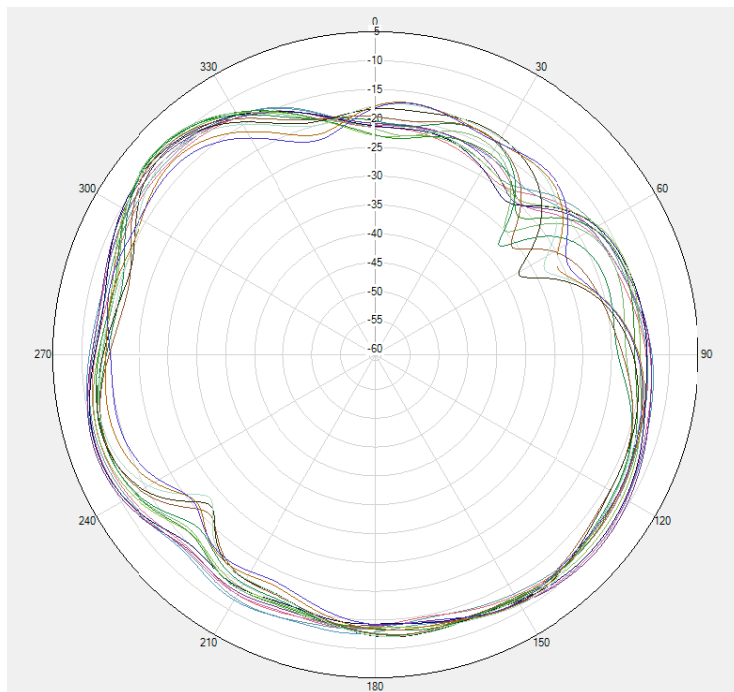

5G WIFI $\Theta=90^\circ$

Antenna Photo:

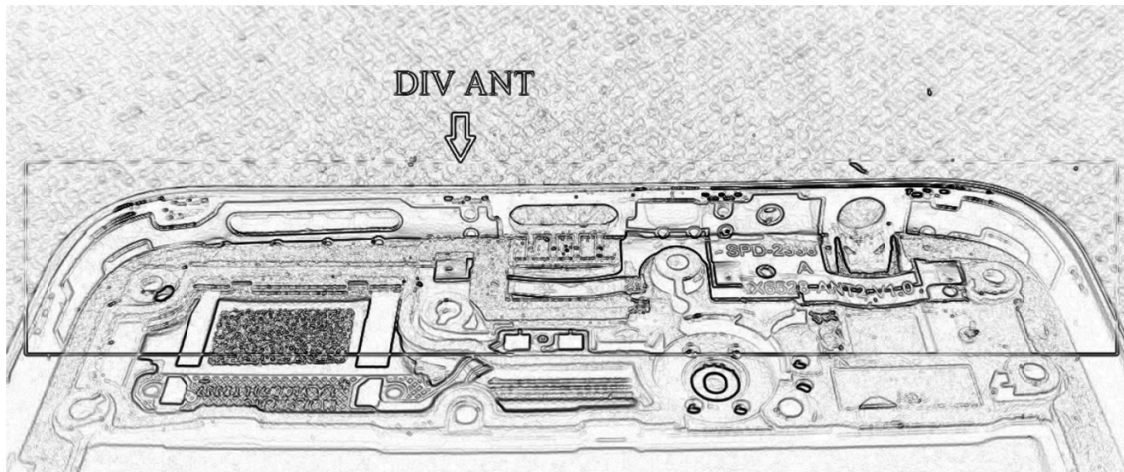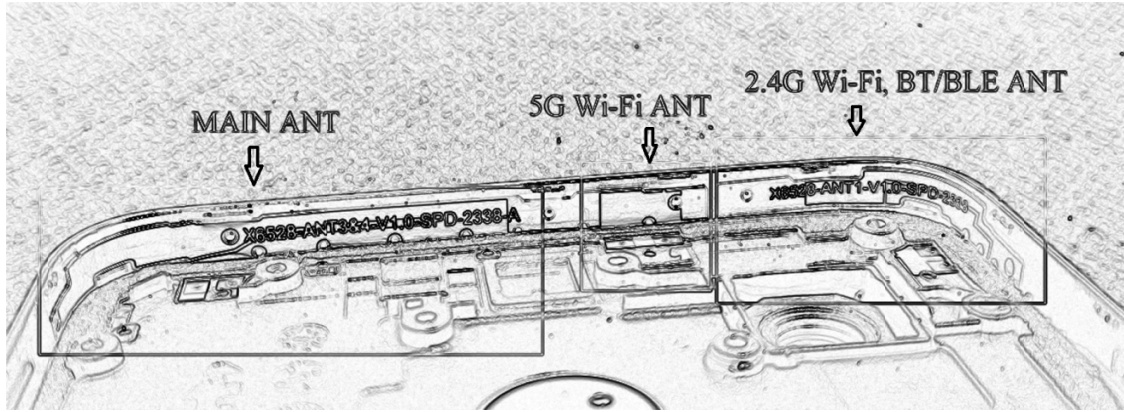

PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
			DATE:	2023/010/20