


CSR BLUETOOTH MODULES

MBC005

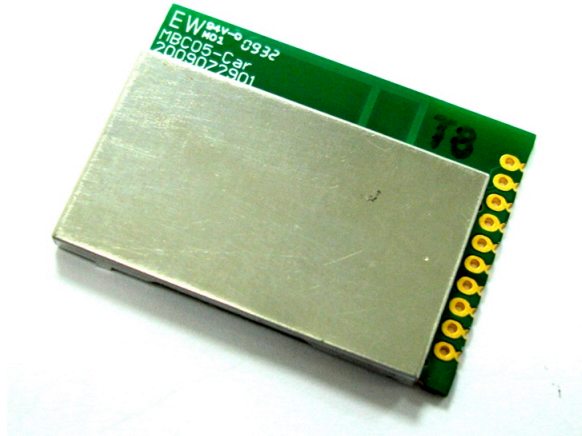

Specification
Version 1.1
05-Aug.-2016

Product No.: MBC005

Product Description:

Bluetooth v3.0 Class 2 BT Stereo Module

Issue Date: 2016/08/05

Release Version: 1.1

Documentation History

| Revision | Description | Date | Remark |
|-----------------|-------------------------|-------------|---------------|
| V0.1 | MBC005 | Aug 2009 | |
| V1.0 | MBC005 | Jan 2012 | |
| V1.1 | MBC005 with SPP profile | Jan 2015 | |

Content

| | |
|---------------------------------------|----|
| Features..... | 4 |
| Hardware & Technical Information..... | 5 |
| Mechanical Specification..... | 6 |
| Reference Schematic..... | 6 |
| Electrical Characteristics | 7 |
| Software specification..... | 9 |
| Ordering Code..... | 10 |

Features

CSR BlueCore05 Chip.

Bluetooth v3.0 Compliant.

Bluetooth Class2 RF. Up to 10 meters transmission distance.

Supported A2DP, HFP, AVRCP, PBAP(Phone Book Access Profile),SPP and Easy pairing.

Fully configurable with simple AT style commands over UART and Bluetooth connections.

On board printing antenna and external antenna versions.

Support Single End Audio output.

Dimension: 35X25X2.7mm.


Castellated SMT pads or 10 PIN pitch 2.0mm connector easy and reliable PCB mounting.

Description

MBC005-CAR-AT audio transmitter/Receiver is power by CSR BC05 technology. That provides a complete 2.4GHz

Bluetooth technology for stereo music transmission. The MBC005-CAR-AT module is compliant with Bluetooth specification v3.0 and support A2DP, AVRCP, HFP, SPP and PBAP(Phone Book Access Profile). It is the class 2 module with build in antenna. Reduce the effort on the RF section when the engineer designs it into the system. SmartDesign also customize the software to meet the requirement from customer.

Block Diagram

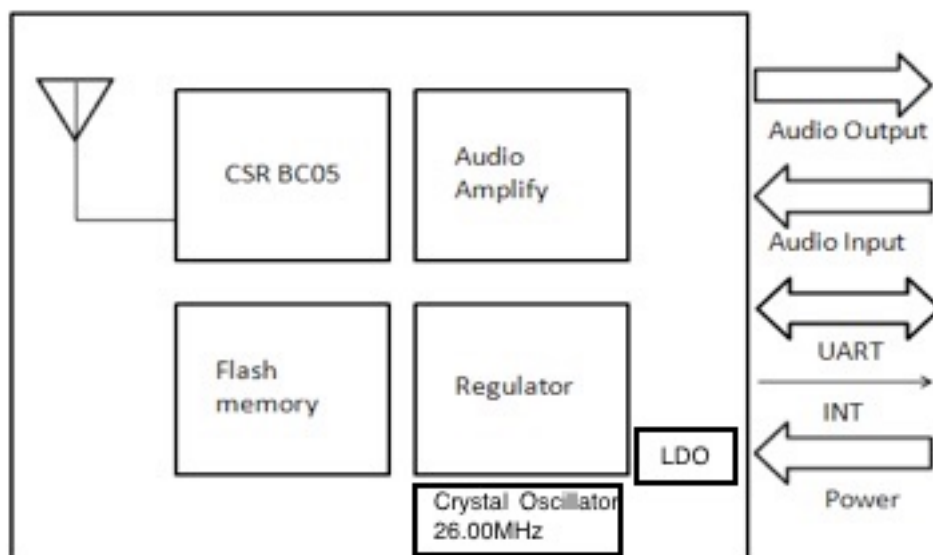

MBC005 Class2 Module Block Diagram

Hardware & Technical Information

Pin Definition

| PIN | Name | Type | Note |
|-----|---------|------|-----------------------------|
| 1 | R_SPK | O | Right side audio out put |
| 2 | L_SPK | O | Left side side audio output |
| 3 | SPK_GND | O | Ground for speaker |
| 4 | MIC+ | I | Microphone + |
| 5 | MIC- | I | Microphone - |
| 6 | VCC | PWR | Power input |
| 7 | GND | PWR | Ground |
| 8 | TX | O | UART TX |
| 9 | RX | I | UART RX |
| 10 | INT | O | Interrupt |
| 11 | GND | PWR | Ground |
| 12 | GND | PWR | Ground |
| 13 | GND | PWR | Ground |

VCC

Supply voltage at this pin with 5 V.

GND

Connect GND pins to the ground plane of the PCB.

RX

RX is used to implement UART data transfer from another device to MBC005-CAR-AT. The UART interface requires an external RS232 transceiver chip. TTL level.

TX

TX is used to implement UART data transfer from MBC005-CAR-AT to another device. TTL level.

L_SPK

Left channel audio output. The audio output line is the single-ended. Use low impedance ground plane dedicated for the audio signals.

R_SPK

Right channel audio output. The audio output line is the single-ended. Use low impedance ground plane dedicated for the audio signals

SPK_GND

Audio ground. Connect to right and left Audio line.


MIC+ and MIC-

Audio inputs. This audio input can be configured to microphone or line input. Route differential pairs close to each other and use a solid dedicated audio ground plane for the audio signals.

INT

Interrupt output. Normally keep in "Low". Change to "High" when Audio output.

Mechanical Specification

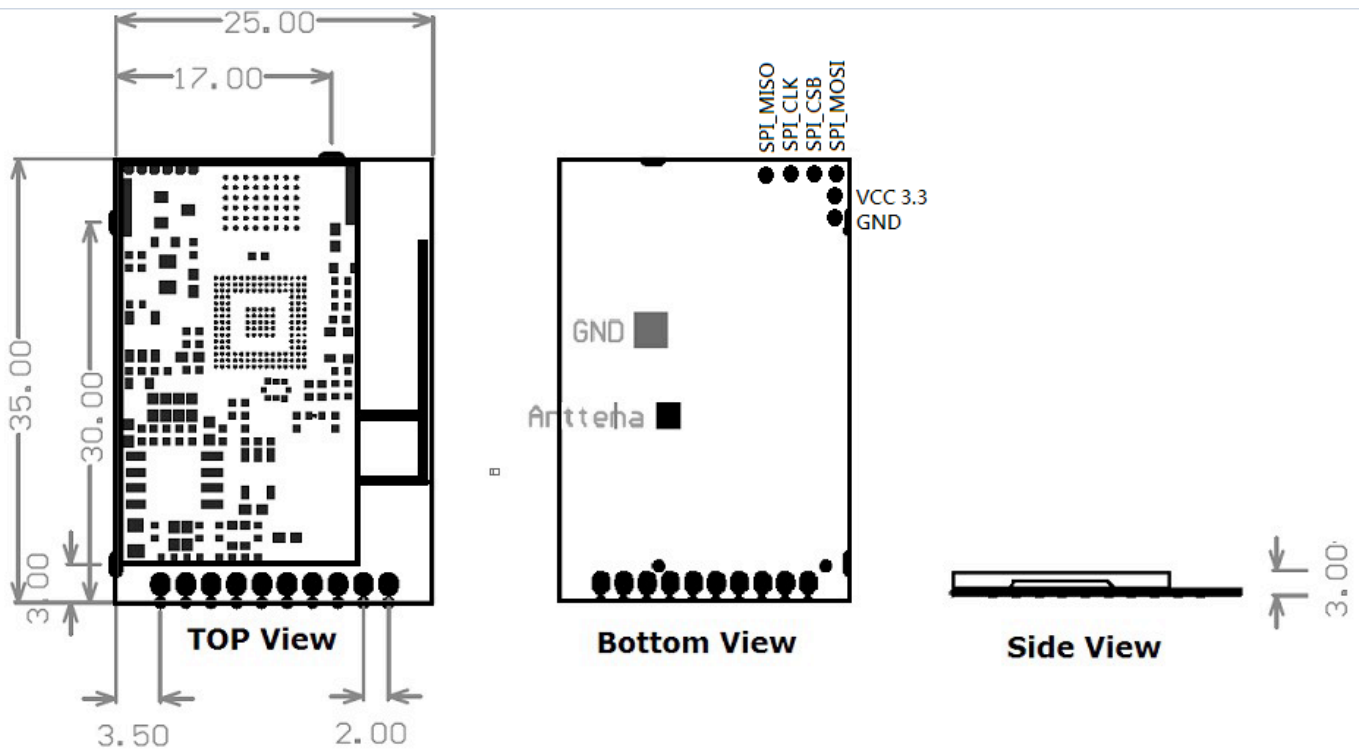


10 PINs Pitch 2.0

MBC005 CLASS2 Mechanical Specification

unit: mm

Reference Schematic

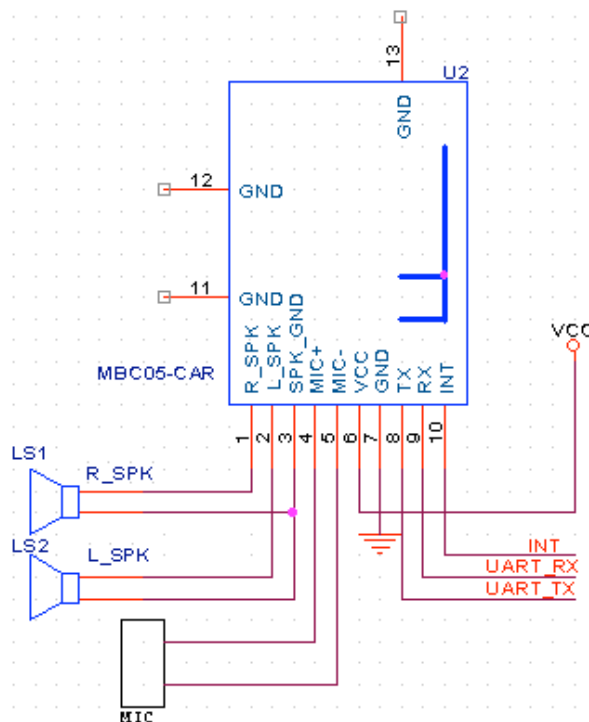

Electrical Characteristics

■ Voltage Input

| | MIN | Typ. | MAX | Unit |
|----------------|-----|------|-----|------|
| Supply Voltage | 3.5 | 5 | 5.3 | V |

■ Power Consumption

| Mode | Avg. |
|---------|------|
| Standby | 10mA |
| HFP | 26mA |
| A2DP | 39mA |
| Link | 11mA |

■ Operating Conditions

| | |
|-------------------------------|--------------|
| Voltage Range | 3.5-5.3V |
| Operating Temperature Range | -20°C ~ 70°C |
| Storage Temperature Range | -30°C ~ 80°C |
| Relative Humidity (Operating) | <=90% |
| Relative Humidity (Storage) | <=90% |

Radio Characteristics

| | Frequency (GHz) | MIN | TYP | MAX | BT Spec | Unit |
|---|-----------------|------|-----|------|-------------------------|------|
| Sensitivity at 0.1%BER | 2.402 | ≤-84 | -80 | - | ≤ -70 | dBm |
| | 2.441 | ≤-84 | -80 | - | | dBm |
| | 2.480 | ≤-84 | -80 | - | | dBm |
| RF Transmit Power | 2.402 | -2 | 0 | 4 | ≤ 4 | dBm |
| | 2.441 | -2 | 0 | 4 | | dBm |
| | 2.480 | -2 | 0 | 4 | | dBm |
| Initial Carrier Frequency Tolerance | 2.402 | - | 5 | 75 | 75 | kHz |
| | 2.441 | - | 5 | 75 | | kHz |
| | 2.480 | - | 5 | 75 | | kHz |
| 20dB bandwidth for modulated carrier | | - | 900 | 1000 | ≤1000 | kHz |
| Drift (Five slots packet) | | - | 15 | - | 40 | kHz |
| Drift Rate | | - | 13 | - | 20 | kHz |
| $\Delta f1_{avg}$ "Maximum Modulation" | 2.402 | 140 | 165 | 175 | 140 < $\Delta f1_{avg}$ | kHz |
| | 2.441 | 140 | 165 | 175 | | kHz |
| | 2.480 | 140 | 165 | 175 | | kHz |
| $\Delta f2_{max}$ "Minimum Modulation" | 2.402 | 115 | 190 | - | 115 | kHz |
| | 2.441 | 115 | 190 | - | | kHz |
| | 2.480 | 115 | 190 | - | | kHz |

Software specification

Profile

| | |
|--|------------------------|
| Model name \ Profile | MBC005-AT2 |
| Control | AT command |
| Flash Memory | 16 MB |
| Command Manual | A2DP_AT_Commands_v2.0d |
| A2DP | V |
| HFP | V |
| AVRCP | V |
| PBAP | V |
| SPP | V |

Software function

MBC005-CAR-AT will act only when you send AT command. Detailed AT command, please check the document.

Default setting Information

| | Parameter | Value |
|---|-----------------|-------------|
| 1 | Baud Rate | 9600 |
| 2 | Pin Code Prompt | 0000 |
| 3 | Local Name | MBC005-CAR |
| 4 | SYNC/AG | SYNC module |
| | | |
| | | |

Ordering Code

| Order code | Description | Remark |
|------------|---|--------|
| MBC005-AT2 | MBC005-CAR-AT with A2DP, HFP, AVRCP, PBAP , SPP AT command profile | |

Federal Communications Commission (FCC) Statement**15.21**

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference and**
- 2) this device must accept any interference received, including interference that may cause undesired operation of the device.**

The end product with this module may subject to perform FCC part 15 unintentional emission test requirement and be properly authorized.

This device is intended for OEM integrator only.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

USERS MANUAL OF THE END PRODUCT:

The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: 2AJFZ-MBC005 ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.