

# TEST REPORT

Product Name: wireless karaoke microphone  
FCC ID: 2AJJB-MKP100  
Trademark: MONO  
Model Number: MKP100, MKP200, MKP300, MKP400, MKP500, MKP600, MKP700, MKP800, MKP900  
Prepared For: Shenzhen Maono Technology Co., Ltd.  
Address: 401, Building 47, Software Town of Universiade, No. 8288 Longgang Rd., He'ao Community, Yuanshan Street, Longgang District, Shenzhen, China  
Manufacturer: Guangdong Dingchuang Smart Manufacturing Company Limited  
Address: Room 401, Building 8, Fenggang Tianan Digital City, No. 208, Fenggang Section, Dongshen Road, Fenggang Town, Dongguan City, Guangdong Province  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.  
Sample Received Date: Sep. 15, 2022  
Sample tested Date: Sep. 15, 2022 to Sep. 22, 2022  
Issue Date: Sep. 22, 2022  
Report No.: CTB220922015RF  
Test Standards: FCC Part 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Li, Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	11
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION</b> .....	15
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	26
8.1 Block Diagram Of Test Setup .....	26
8.2 Limit .....	26
8.3 Test procedure .....	26
8.4 Test Result .....	27
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	34
9.1 Block Diagram Of Test Setup .....	34
9.2 Limit .....	34
9.3 Test procedure .....	34
9.4 Test Result .....	35
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	39
10.1 Block Diagram Of Test Setup .....	39
10.2 Limit .....	39
10.3 Test procedure .....	39
10.4 Test Result .....	39
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	43
11.1 Block Diagram Of Test Setup .....	43
11.2 Limit .....	43
11.3 Test procedure .....	43
11.4 Test Result .....	43
<b>12. HOPPING CHANNEL NUMBER</b> .....	47
12.1 Block Diagram Of Test Setup .....	47
12.2 Limit .....	47
12.3 Test procedure .....	47
12.4 Test Result .....	47
<b>13. DWELL TIME</b> .....	49

13.1	Block Diagram Of Test Setup .....	49
13.2	Limit .....	49
13.3	Test procedure .....	49
13.4	Test Result .....	50
<b>14.</b>	<b>PSEUDORANDOM FREQUENCY .....</b>	<b>54</b>
14.1	Limit .....	54
14.2	Test procedure .....	54
14.3	Test Result .....	55
<b>15.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>56</b>
<b>16.</b>	<b>EUT PHOTOGRAPHS .....</b>	<b>57</b>
<b>17.</b>	<b>EUT TEST SETUP PHOTOGRAPHS .....</b>	<b>58</b>

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220922015RF	Sep. 22, 2022	Original	Valid



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	MKP100, MKP200, MKP300, MKP400, MKP500, MKP600, MKP700, MKP800, MKP900
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: MKP100
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 3.496dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 5.94dBi
Ratings:	DC 5V by adapter DC 3.7V by battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

**Continuous disturbance**


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

**Radiated emission**

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

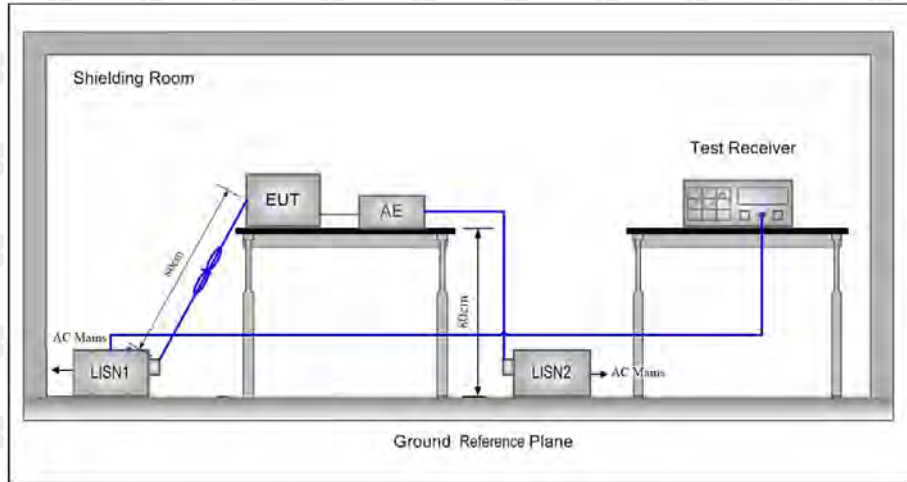

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.




This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



### 6.4 Test Result

L:

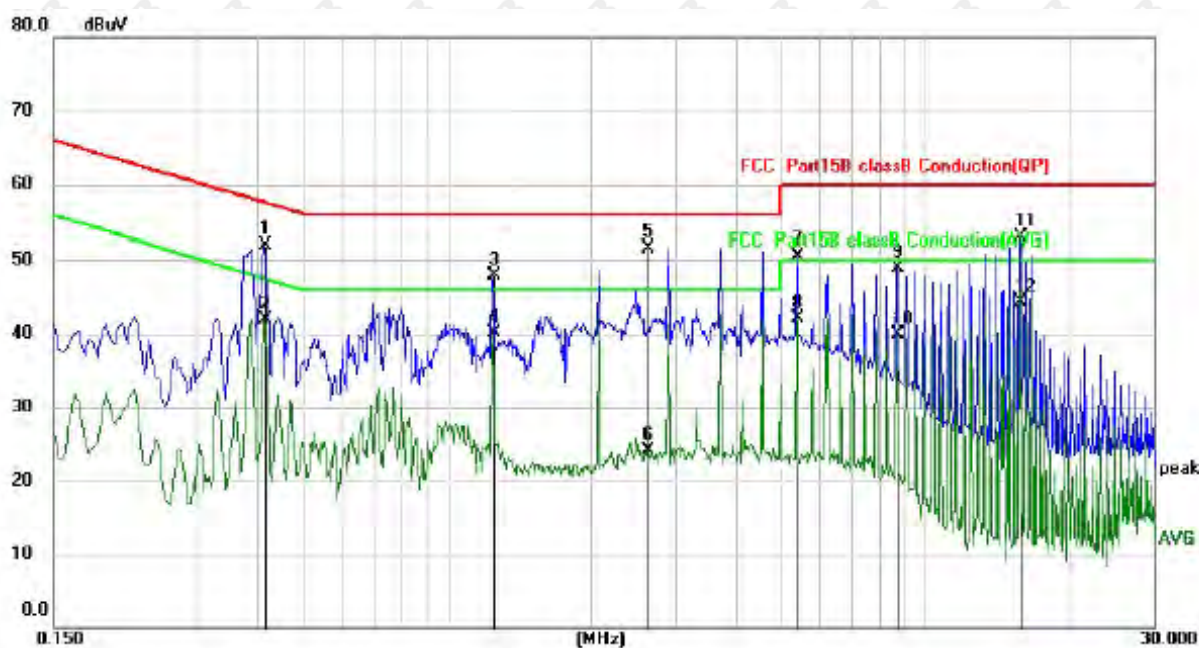


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4140	41.91	9.98	51.89	57.57	-5.68	QP
2		0.4140	31.83	9.98	41.81	47.57	-5.76	AVG
3		1.2460	37.98	9.99	47.97	56.00	-8.03	QP
4		1.2460	30.19	9.99	40.18	46.00	-5.82	AVG
5	*	2.6099	41.53	10.06	51.59	56.00	-4.41	QP
6		2.6099	14.09	10.06	24.15	46.00	-21.85	AVG
7		5.3939	40.36	10.18	50.54	60.00	-9.46	QP
8		5.3939	32.01	10.18	42.19	50.00	-7.81	AVG
9		8.7100	38.52	10.30	48.82	60.00	-11.18	QP
10		8.7100	29.57	10.30	39.87	50.00	-10.13	AVG
11		15.7619	42.36	10.48	52.84	60.00	-7.16	QP
12		15.7619	33.92	10.48	44.40	50.00	-5.60	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

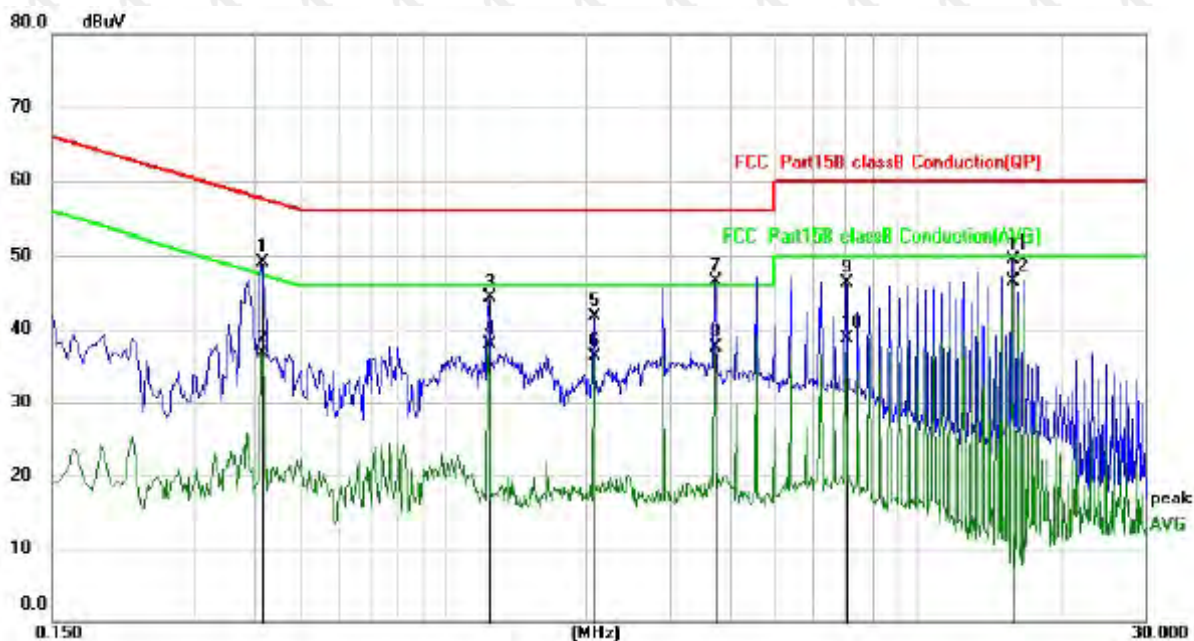

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4140	39.14	9.98	49.12	57.57	-8.45	QP
2		0.4140	26.80	9.98	36.78	47.57	-10.79	AVG
3		1.2460	34.29	9.99	44.28	56.00	-11.72	QP
4		1.2460	27.94	9.99	37.93	46.00	-8.07	AVG
5		2.0740	31.65	10.03	41.68	56.00	-14.32	QP
6		2.0740	26.19	10.03	36.22	46.00	-9.78	AVG
7		3.7340	36.42	10.11	46.53	56.00	-9.47	QP
8		3.7340	27.46	10.11	37.57	46.00	-8.43	AVG
9		7.0539	36.08	10.24	46.32	60.00	-13.68	QP
10		7.0539	28.56	10.24	38.80	50.00	-11.20	AVG
11		15.7700	39.11	10.48	49.59	60.00	-10.41	QP
12	*	15.7700	36.04	10.48	46.52	50.00	-3.48	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

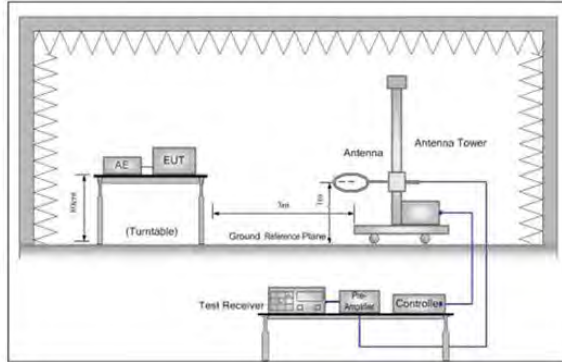


Figure 1. Below 30MHz

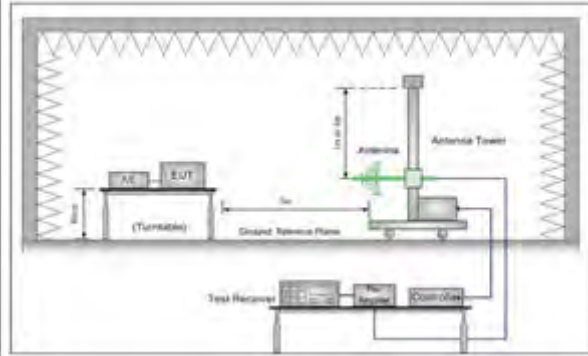


Figure 2. 30MHz to 1GHz

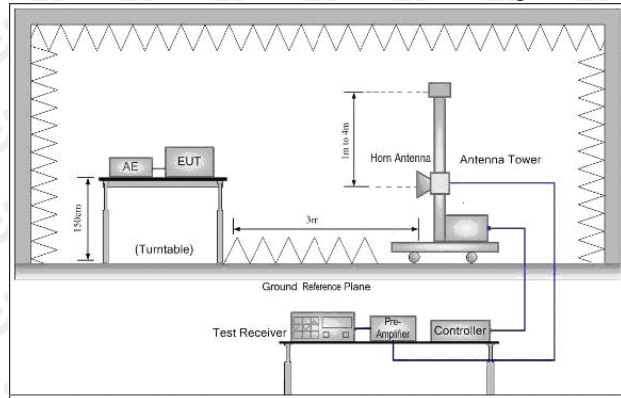


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.1795	28.37	-6.79	21.58	40.00	-18.42	QP
2		68.9930	28.68	-8.93	19.75	40.00	-20.25	QP
3		140.3421	26.57	-5.51	21.06	43.50	-22.44	QP
4	*	219.4598	43.17	-8.99	34.18	43.50	-9.32	QP
5		319.9370	39.68	-4.91	34.77	46.00	-11.23	QP
6		789.2338	26.03	5.57	31.60	46.00	-14.40	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

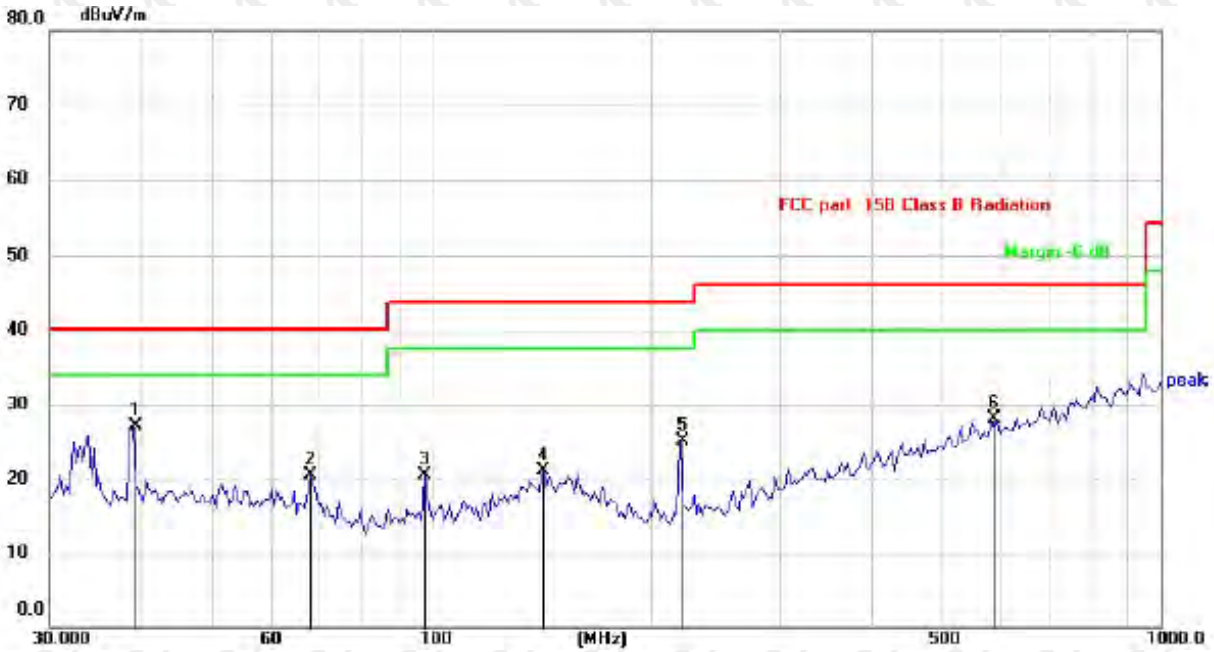

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	39.0245	33.56	-6.50	27.06	40.00	-12.94	QP
2		68.3908	29.32	-8.83	20.49	40.00	-19.51	QP
3		97.9699	30.33	-9.78	20.55	43.50	-22.95	QP
4		142.8243	26.56	-5.50	21.06	43.50	-22.44	QP
5		219.4598	34.09	-8.99	25.10	43.50	-18.40	QP
6		585.8157	25.93	2.11	28.04	46.00	-17.96	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.63	-3.65	53.98	74.00	-20.02	peak
4804	49.22	-3.65	45.57	54.00	-8.43	AVG
7206	60.85	-0.95	59.90	74.00	-14.10	peak
7206	41.34	-0.95	40.39	54.00	-13.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.45	-3.65	52.80	74.00	-21.20	peak
4804	50.75	-3.65	47.10	54.00	-6.90	AVG
7206	59.76	-0.95	58.81	74.00	-15.19	peak
7206	40.48	-0.95	39.53	54.00	-14.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	60.45	-3.54	56.91	74.00	-17.09	peak
4882.00	47.72	-3.54	44.18	54.00	-9.82	AVG
7323.00	56.11	-0.81	55.30	74.00	-18.70	peak
7323.00	42.09	-0.81	41.28	54.00	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	57.42	-3.54	53.88	74.00	-20.12	peak
4882.00	48.30	-3.54	44.76	54.00	-9.24	AVG
7323.00	57.87	-0.81	57.06	74.00	-16.94	peak
7323.00	42.61	-0.81	41.80	54.00	-12.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



CH High (2480MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.61	-3.43	53.18	74.00	-20.82	peak
4960	49.20	-3.44	45.76	54.00	-8.24	AVG
7440	60.78	-0.77	60.01	74.00	-13.99	peak
7440	42.17	-0.77	41.40	54.00	-12.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.71	-3.43	53.28	74.00	-20.72	peak
4960	47.98	-3.44	44.54	54.00	-9.46	AVG
7440	60.17	-0.77	59.40	74.00	-14.60	peak
7440	40.82	-0.77	40.05	54.00	-13.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.28	-5.81	51.47	74.00	-22.53	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.26	-5.84	50.42	74.00	-23.58	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.68	-5.81	50.87	74.00	-23.13	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.09	-5.84	49.25	74.00	-24.75	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.76	-5.81	49.95	74.00	-24.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.68	-6.06	47.62	74.00	-26.38	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.75	-5.81	49.94	74.00	-24.06	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.08	-6.06	49.02	74.00	-24.98	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.53	-5.81	50.72	74.00	-23.28	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.48	-5.84	48.64	74.00	-25.36	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.03	-5.81	48.22	74.00	-25.78	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.06	-5.84	47.22	74.00	-26.78	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.48	-5.81	49.67	74.00	-24.33	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	57.07	-6.06	51.01	74.00	-22.99	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.80	-5.81	49.99	74.00	-24.01	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.91	-6.06	48.85	74.00	-25.15	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

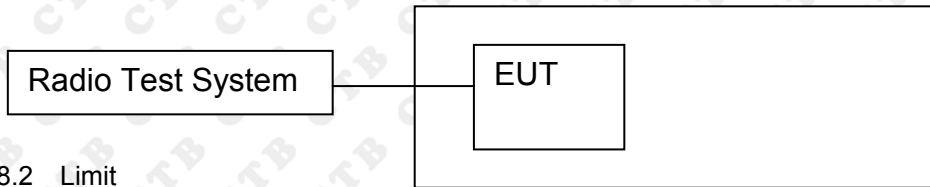

### 8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold



## 8.4 Test Result

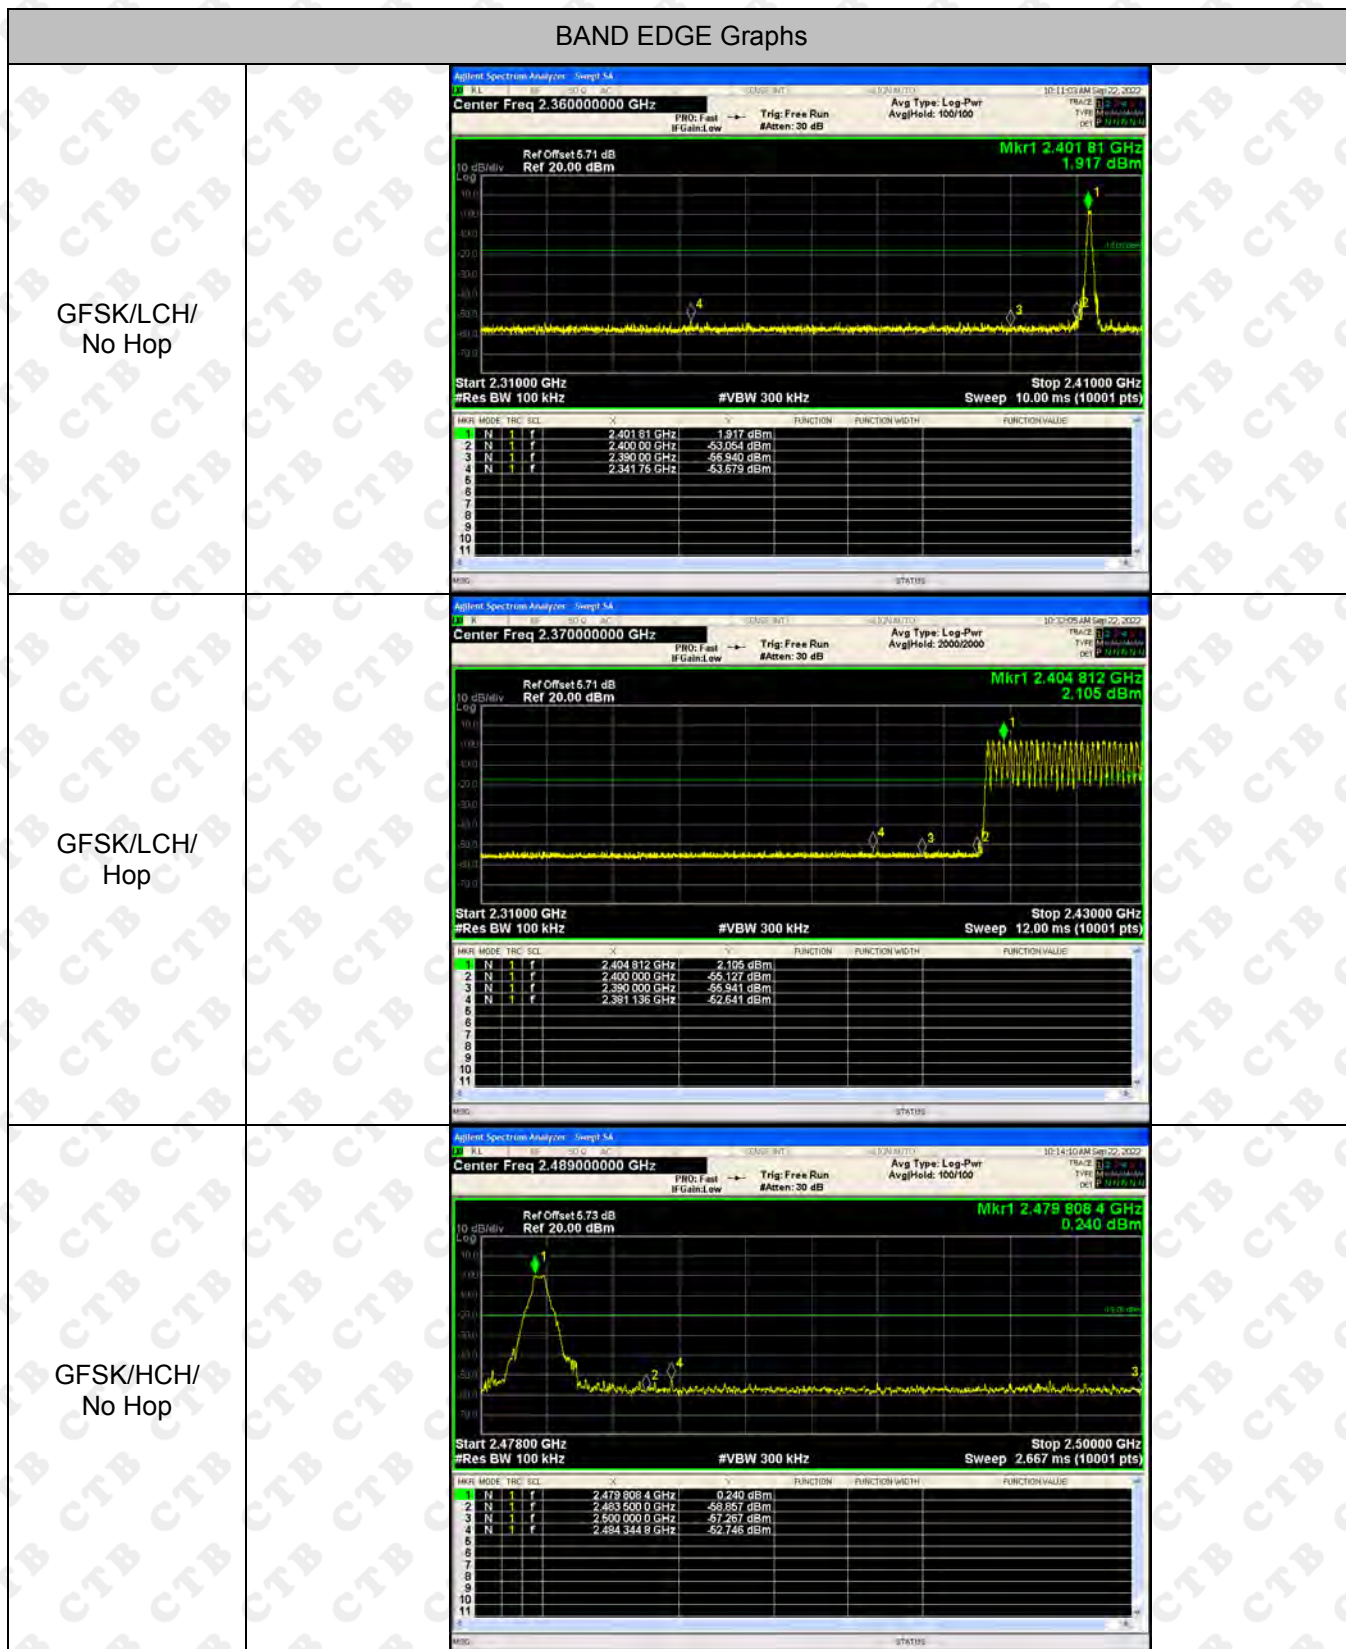

<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.46750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.446 812 50 GHz 1.325 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.446 812 50 GHz</td> <td>1.325 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-55.470 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-55.594 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.496 181 25 GHz</td> <td>-52.758 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.446 812 50 GHz	1.325 dBm				2	N	1	f	2.483 500 00 GHz	-55.470 dBm				3	N	1	f	2.500 000 00 GHz	-55.594 dBm				4	N	1	f	2.496 181 25 GHz	-52.758 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.446 812 50 GHz	1.325 dBm																																									
2	N	1	f	2.483 500 00 GHz	-55.470 dBm																																									
3	N	1	f	2.500 000 00 GHz	-55.594 dBm																																									
4	N	1	f	2.496 181 25 GHz	-52.758 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.36000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.401 84 GHz 0.920 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 84 GHz</td> <td>0.920 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-53.586 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 00 GHz</td> <td>-55.444 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.398 63 GHz</td> <td>-53.593 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 84 GHz	0.920 dBm				2	N	1	f	2.400 00 GHz	-53.586 dBm				3	N	1	f	2.399 00 GHz	-55.444 dBm				4	N	1	f	2.398 63 GHz	-53.593 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 84 GHz	0.920 dBm																																									
2	N	1	f	2.400 00 GHz	-53.586 dBm																																									
3	N	1	f	2.399 00 GHz	-55.444 dBm																																									
4	N	1	f	2.398 63 GHz	-53.593 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.37000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.408 832 GHz 1.240 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.408 832 GHz</td> <td>1.240 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-55.575 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 000 GHz</td> <td>-55.860 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.341 798 GHz</td> <td>-52.315 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.408 832 GHz	1.240 dBm				2	N	1	f	2.400 00 GHz	-55.575 dBm				3	N	1	f	2.399 000 GHz	-55.860 dBm				4	N	1	f	2.341 798 GHz	-52.315 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.408 832 GHz	1.240 dBm																																									
2	N	1	f	2.400 00 GHz	-55.575 dBm																																									
3	N	1	f	2.399 000 GHz	-55.860 dBm																																									
4	N	1	f	2.341 798 GHz	-52.315 dBm																																									




<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 5.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.479 955 8 GHz -0.225 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 955 8 GHz</td> <td>-0.225 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-56.858 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-58.439 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 474 2 GHz</td> <td>-53.980 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 955 8 GHz	-0.225 dBm				2	N	1	f	2.483 500 0 GHz	-56.858 dBm				3	N	1	f	2.500 000 0 GHz	-58.439 dBm				4	N	1	f	2.499 474 2 GHz	-53.980 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 955 8 GHz	-0.225 dBm																																									
2	N	1	f	2.483 500 0 GHz	-56.858 dBm																																									
3	N	1	f	2.500 000 0 GHz	-58.439 dBm																																									
4	N	1	f	2.499 474 2 GHz	-53.980 dBm																																									
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 5.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.437 962 50 GHz 1.201 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 962 50 GHz</td> <td>1.201 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-55.293 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-54.267 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 237 50 GHz</td> <td>-52.711 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 962 50 GHz	1.201 dBm				2	N	1	f	2.483 500 00 GHz	-55.293 dBm				3	N	1	f	2.500 000 00 GHz	-54.267 dBm				4	N	1	f	2.493 237 50 GHz	-52.711 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.437 962 50 GHz	1.201 dBm																																									
2	N	1	f	2.483 500 00 GHz	-55.293 dBm																																									
3	N	1	f	2.500 000 00 GHz	-54.267 dBm																																									
4	N	1	f	2.493 237 50 GHz	-52.711 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 03 GHz 0.288 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 03 GHz</td> <td>0.288 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-53.351 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-57.959 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.349 70 GHz</td> <td>-53.463 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	0.288 dBm				2	N	1	f	2.400 00 GHz	-53.351 dBm				3	N	1	f	2.390 00 GHz	-57.959 dBm				4	N	1	f	2.349 70 GHz	-53.463 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 03 GHz	0.288 dBm																																									
2	N	1	f	2.400 00 GHz	-53.351 dBm																																									
3	N	1	f	2.390 00 GHz	-57.959 dBm																																									
4	N	1	f	2.349 70 GHz	-53.463 dBm																																									




<p>8DPSK /LCH/Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.403 120 GHz 1.948 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.403 120 GHz</td> <td>1.948 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-55.361 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-54.165 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.388 894 GHz</td> <td>-52.656 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403 120 GHz	1.948 dBm				2	N	1	f	2.400 000 GHz	-55.361 dBm				3	N	1	f	2.390 000 GHz	-54.165 dBm				4	N	1	f	2.388 894 GHz	-52.656 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.403 120 GHz	1.948 dBm																																									
2	N	1	f	2.400 000 GHz	-55.361 dBm																																									
3	N	1	f	2.390 000 GHz	-54.165 dBm																																									
4	N	1	f	2.388 894 GHz	-52.656 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 5.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.480 120 8 GHz 0.268 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 120 8 GHz</td> <td>0.268 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-57.603 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-56.888 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 805 2 GHz</td> <td>-53.888 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 120 8 GHz	0.268 dBm				2	N	1	f	2.483 500 0 GHz	-57.603 dBm				3	N	1	f	2.500 000 0 GHz	-56.888 dBm				4	N	1	f	2.490 805 2 GHz	-53.888 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 120 8 GHz	0.268 dBm																																									
2	N	1	f	2.483 500 0 GHz	-57.603 dBm																																									
3	N	1	f	2.500 000 0 GHz	-56.888 dBm																																									
4	N	1	f	2.490 805 2 GHz	-53.888 dBm																																									
<p>8DPSK /HCH/Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 5.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.440 943 75 GHz 1.419 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 943 75 GHz</td> <td>1.419 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.974 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-55.226 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.492 552 25 GHz</td> <td>-51.988 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 943 75 GHz	1.419 dBm				2	N	1	f	2.483 500 0 GHz	-54.974 dBm				3	N	1	f	2.500 000 00 GHz	-55.226 dBm				4	N	1	f	2.492 552 25 GHz	-51.988 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.440 943 75 GHz	1.419 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.974 dBm																																									
3	N	1	f	2.500 000 00 GHz	-55.226 dBm																																									
4	N	1	f	2.492 552 25 GHz	-51.988 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

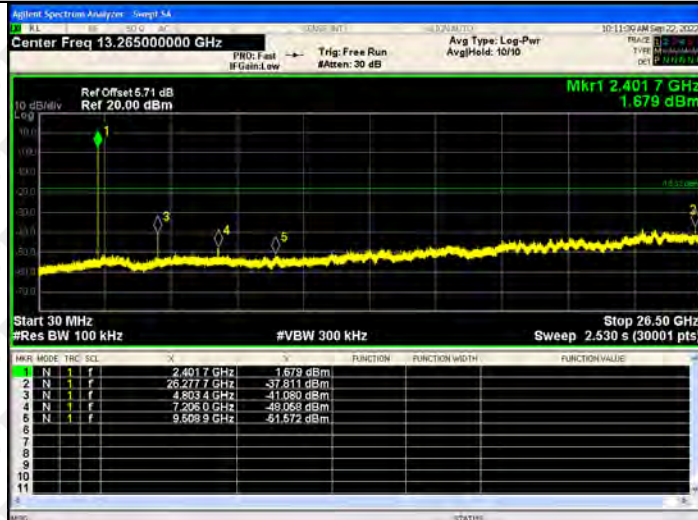

GFSK/MCH

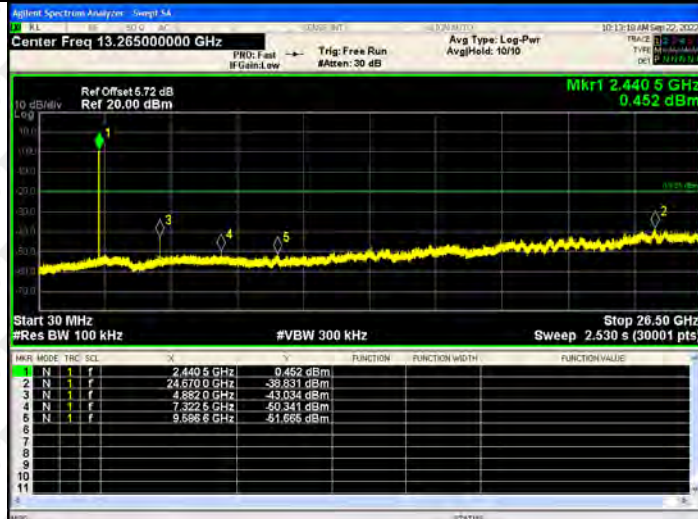

GFSK/HCH

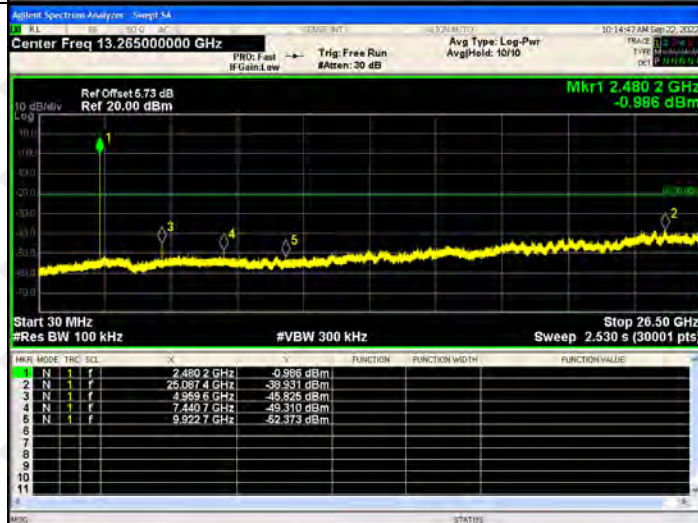




<p><math>\pi/4</math>DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-3.782 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6418 GHz</td> <td>-39.010 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8034 GHz</td> <td>-49.302 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0613 GHz</td> <td>-51.345 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.4895 GHz</td> <td>-50.803 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-3.782 dBm				2	N	1	f	24.6418 GHz	-39.010 dBm				3	N	1	f	4.8034 GHz	-49.302 dBm				4	N	1	f	7.0613 GHz	-51.345 dBm				5	N	1	f	9.4895 GHz	-50.803 dBm			
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-3.782 dBm																																																		
2	N	1	f	24.6418 GHz	-39.010 dBm																																																		
3	N	1	f	4.8034 GHz	-49.302 dBm																																																		
4	N	1	f	7.0613 GHz	-51.345 dBm																																																		
5	N	1	f	9.4895 GHz	-50.803 dBm																																																		
<p><math>\pi/4</math>DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>0.662 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1474 GHz</td> <td>-39.709 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8920 GHz</td> <td>-42.387 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2387 GHz</td> <td>-50.982 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-50.472 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	0.662 dBm				2	N	1	f	25.1474 GHz	-39.709 dBm				3	N	1	f	4.8920 GHz	-42.387 dBm				4	N	1	f	7.2387 GHz	-50.982 dBm				5	N	1	f	9.7639 GHz	-50.472 dBm			
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	0.662 dBm																																																		
2	N	1	f	25.1474 GHz	-39.709 dBm																																																		
3	N	1	f	4.8920 GHz	-42.387 dBm																																																		
4	N	1	f	7.2387 GHz	-50.982 dBm																																																		
5	N	1	f	9.7639 GHz	-50.472 dBm																																																		
<p><math>\pi/4</math>DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-0.846 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6683 GHz</td> <td>-39.792 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9895 GHz</td> <td>-48.877 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2615 GHz</td> <td>-50.367 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9677 GHz</td> <td>-52.678 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-0.846 dBm				2	N	1	f	24.6683 GHz	-39.792 dBm				3	N	1	f	4.9895 GHz	-48.877 dBm				4	N	1	f	7.2615 GHz	-50.367 dBm				5	N	1	f	9.9677 GHz	-52.678 dBm			
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-0.846 dBm																																																		
2	N	1	f	24.6683 GHz	-39.792 dBm																																																		
3	N	1	f	4.9895 GHz	-48.877 dBm																																																		
4	N	1	f	7.2615 GHz	-50.367 dBm																																																		
5	N	1	f	9.9677 GHz	-52.678 dBm																																																		



<p>8DPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-3.779 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0442 GHz</td> <td>-39.831 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8024 GHz</td> <td>-43.677 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3525 GHz</td> <td>-51.162 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6077 GHz</td> <td>-49.781 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-3.779 dBm				2	N	1	f	25.0442 GHz	-39.831 dBm				3	N	1	f	4.8024 GHz	-43.677 dBm				4	N	1	f	7.3525 GHz	-51.162 dBm				5	N	1	f	9.6077 GHz	-49.781 dBm			
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-3.779 dBm																																																		
2	N	1	f	25.0442 GHz	-39.831 dBm																																																		
3	N	1	f	4.8024 GHz	-43.677 dBm																																																		
4	N	1	f	7.3525 GHz	-51.162 dBm																																																		
5	N	1	f	9.6077 GHz	-49.781 dBm																																																		
<p>8DPSK /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-3.029 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6815 GHz</td> <td>-39.021 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8820 GHz</td> <td>-48.033 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3322 GHz</td> <td>-51.676 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-51.156 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-3.029 dBm				2	N	1	f	24.6815 GHz	-39.021 dBm				3	N	1	f	4.8820 GHz	-48.033 dBm				4	N	1	f	7.3322 GHz	-51.676 dBm				5	N	1	f	9.7639 GHz	-51.156 dBm			
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-3.029 dBm																																																		
2	N	1	f	24.6815 GHz	-39.021 dBm																																																		
3	N	1	f	4.8820 GHz	-48.033 dBm																																																		
4	N	1	f	7.3322 GHz	-51.676 dBm																																																		
5	N	1	f	9.7639 GHz	-51.156 dBm																																																		
<p>8DPSK /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-2.931 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6215 GHz</td> <td>-39.555 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9805 GHz</td> <td>-50.024 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2634 GHz</td> <td>-50.930 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.1045 GHz</td> <td>-51.379 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.931 dBm				2	N	1	f	24.6215 GHz	-39.555 dBm				3	N	1	f	4.9805 GHz	-50.024 dBm				4	N	1	f	7.2634 GHz	-50.930 dBm				5	N	1	f	10.1045 GHz	-51.379 dBm			
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.931 dBm																																																		
2	N	1	f	24.6215 GHz	-39.555 dBm																																																		
3	N	1	f	4.9805 GHz	-50.024 dBm																																																		
4	N	1	f	7.2634 GHz	-50.930 dBm																																																		
5	N	1	f	10.1045 GHz	-51.379 dBm																																																		

## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

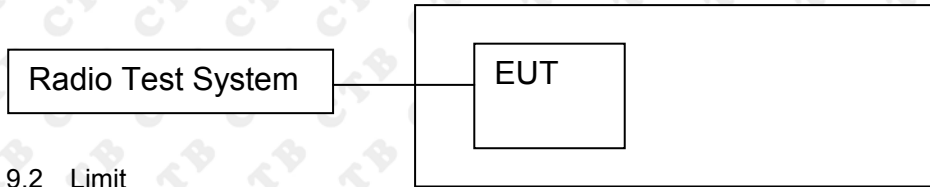

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	2.16	PASS
	MCH	1.625	PASS
	HCH	0.443	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	2.814	PASS
	MCH	2.22	PASS
	HCH	1.055	PASS
EDR mode (8DPSK)	LCH	3.496	PASS
	MCH	2.957	PASS
	HCH	1.762	PASS



Test Graph:

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.40200000 GHz          Ref Offset: 5.71 dB          Ref: 20.00 dBm          Mkr1 2.40186 GHz          2.180 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.44100000 GHz          Ref Offset: 5.72 dB          Ref: 20.00 dBm          Mkr1 2.44095 GHz          1.625 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.48000000 GHz          Ref Offset: 5.73 dB          Ref: 20.00 dBm          Mkr1 2.47994 GHz          0.443 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	




<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.40194 GHz 3.496 dBm</p> <p>Center 2.402000 GHz #Res BW 2.0 MHz</p> <p>#VBW 6.0 MHz</p> <p>Span 10.00 MHz Sweep 1,000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 5.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.44090 GHz 2.957 dBm</p> <p>Center 2.441000 GHz #Res BW 2.0 MHz</p> <p>#VBW 6.0 MHz</p> <p>Span 10.00 MHz Sweep 1,000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 5.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.48000 GHz 1.782 dBm</p> <p>Center 2.480000 GHz #Res BW 2.0 MHz</p> <p>#VBW 6.0 MHz</p> <p>Span 10.00 MHz Sweep 1,000 ms (1001 pts)</p>



## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

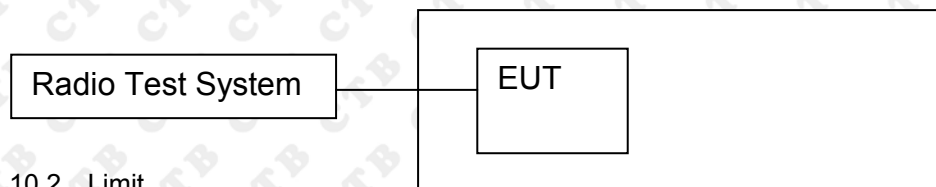

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.911	<b>PASS</b>
	Mid channel	0.928	<b>PASS</b>
	High channel	0.877	<b>PASS</b>
$\pi/4$ DQPSK	Low channel	1.276	<b>PASS</b>
	Mid channel	1.274	<b>PASS</b>
	High channel	1.28	<b>PASS</b>
8DPSK	Low channel	1.278	<b>PASS</b>
	Mid channel	1.278	<b>PASS</b>
	High channel	1.282	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>		
<p>GFSK Mid channel</p>		
<p>GFSK High channel</p>		


<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.71 dB</p> <p>Ref: 25.71 dBm</p> <p>Mkr3 2.402594 GHz</p> <p>-21.200 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.83 dBm</td> </tr> <tr> <td>1.1597 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-44.446 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.276 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.83 dBm	1.1597 MHz			Transmit Freq Error	OBW Power	99.00 %	-44.446 kHz			x dB Bandwidth	x dB	-20.00 dB	1.276 MHz		
Occupied Bandwidth	Total Power	7.83 dBm																	
1.1597 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-44.446 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.276 MHz																			
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.72 dB</p> <p>Ref: 25.72 dBm</p> <p>Mkr3 2.441593 GHz</p> <p>-19.969 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.20 dBm</td> </tr> <tr> <td>1.1631 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-43.727 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.274 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.20 dBm	1.1631 MHz			Transmit Freq Error	OBW Power	99.00 %	-43.727 kHz			x dB Bandwidth	x dB	-20.00 dB	1.274 MHz		
Occupied Bandwidth	Total Power	7.20 dBm																	
1.1631 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-43.727 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.274 MHz																			
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.73 dB</p> <p>Ref: 25.73 dBm</p> <p>Mkr3 2.480597 GHz</p> <p>-21.261 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.59 dBm</td> </tr> <tr> <td>1.1562 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-42.297 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.280 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.59 dBm	1.1562 MHz			Transmit Freq Error	OBW Power	99.00 %	-42.297 kHz			x dB Bandwidth	x dB	-20.00 dB	1.280 MHz		
Occupied Bandwidth	Total Power	6.59 dBm																	
1.1562 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-42.297 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.280 MHz																			



<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.71 dB</p> <p>Ref: 25.71 dBm</p> <p>Mkr3 2.402598 GHz</p> <p>-23.225 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1725 MHz</p> <p>Total Power 7.71 dBm</p> <p>Transmit Freq Error -43.127 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.278 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.72 dB</p> <p>Ref: 25.72 dBm</p> <p>Mkr3 2.441594 GHz</p> <p>-22.783 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1635 MHz</p> <p>Total Power 7.57 dBm</p> <p>Transmit Freq Error -44.423 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.278 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 5.73 dB</p> <p>Ref: 25.73 dBm</p> <p>Mkr3 2.480598 GHz</p> <p>-24.770 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1606 MHz</p> <p>Total Power 6.06 dBm</p> <p>Transmit Freq Error -42.612 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.282 MHz</p> <p>x dB -20.00 dB</p>

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

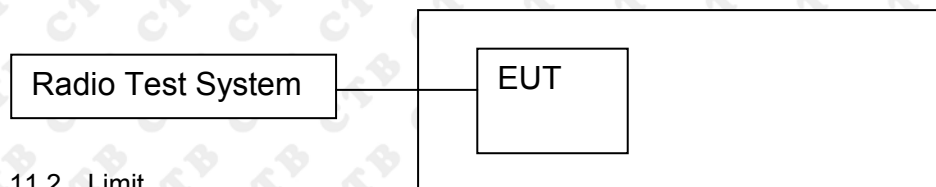

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.607	PASS
GFSK	MCH	1.002	0.619	PASS
GFSK	HCH	1.002	0.585	PASS
$\pi/4$ DQPSK	LCH	1.000	0.851	PASS
$\pi/4$ DQPSK	MCH	1.002	0.849	PASS
$\pi/4$ DQPSK	HCH	1.002	0.853	PASS
8DPSK	LCH	1.000	0.852	PASS
8DPSK	MCH	1.000	0.852	PASS
8DPSK	HCH	1.000	0.855	PASS

Test Graph

Graphs																									
GFSK/LCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz (Δ)</td> <td></td> <td></td> <td>-0.114 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.401984 GHz</td> <td></td> <td></td> <td>1.444 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f (Δ)	1.000 MHz (Δ)			-0.114 dB	2	F	1	f	2.401984 GHz			1.444 dBm
MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	f (Δ)	1.000 MHz (Δ)			-0.114 dB																		
2	F	1	f	2.401984 GHz			1.444 dBm																		
GFSK/MCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz (Δ)</td> <td></td> <td></td> <td>-0.057 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.440908 GHz</td> <td></td> <td></td> <td>0.714 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f (Δ)	1.002 MHz (Δ)			-0.057 dB	2	F	1	f	2.440908 GHz			0.714 dBm
MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	f (Δ)	1.002 MHz (Δ)			-0.057 dB																		
2	F	1	f	2.440908 GHz			0.714 dBm																		
GFSK/HCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz (Δ)</td> <td></td> <td></td> <td>0.277 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.478952 GHz</td> <td></td> <td></td> <td>-0.163 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f (Δ)	1.002 MHz (Δ)			0.277 dB	2	F	1	f	2.478952 GHz			-0.163 dBm
MNR	MODE	TRC	SC1	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	f (Δ)	1.002 MHz (Δ)			0.277 dB																		
2	F	1	f	2.478952 GHz			-0.163 dBm																		




<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.00000000 MHz</p> <p>Ref Offset: 6.71 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz 0.556 dB</p> <p>Center 2.402500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.556 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401990 GHz</td> <td></td> <td></td> <td>0.138 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.556 dB	2	F	1	f		2.401990 GHz			0.138 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.556 dB																					
2	F	1	f		2.401990 GHz			0.138 dBm																					
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.00200000 MHz</p> <p>Ref Offset: 6.72 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz -0.306 dB</p> <p>Center 2.441500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.306 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441050 GHz</td> <td></td> <td></td> <td>-1.179 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-0.306 dB	2	F	1	f		2.441050 GHz			-1.179 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-0.306 dB																					
2	F	1	f		2.441050 GHz			-1.179 dBm																					
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.00200000 MHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz -2.465 dB</p> <p>Center 2.479500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-2.465 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478946 GHz</td> <td></td> <td></td> <td>-0.668 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-2.465 dB	2	F	1	f		2.478946 GHz			-0.668 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		-2.465 dB																					
2	F	1	f		2.478946 GHz			-0.668 dBm																					

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset: 6.71 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -0.291 dB</p> <p>Center 2.402500 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.291 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 120 GHz</td> <td></td> <td></td> <td>1.726 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.291 dB	2	F	1	f		2.402 120 GHz			1.726 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.291 dB																					
2	F	1	f		2.402 120 GHz			1.726 dBm																					
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset: 6.72 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -5.816 dB</p> <p>Center 2.441500 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-5.816 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 124 GHz</td> <td></td> <td></td> <td>1.170 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-5.816 dB	2	F	1	f		2.441 124 GHz			1.170 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-5.816 dB																					
2	F	1	f		2.441 124 GHz			1.170 dBm																					
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz 0.029 dB</p> <p>Center 2.479500 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.029 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 978 GHz</td> <td></td> <td></td> <td>-0.692 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.029 dB	2	F	1	f		2.479 978 GHz			-0.692 dBm	
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.029 dB																					
2	F	1	f		2.479 978 GHz			-0.692 dBm																					

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

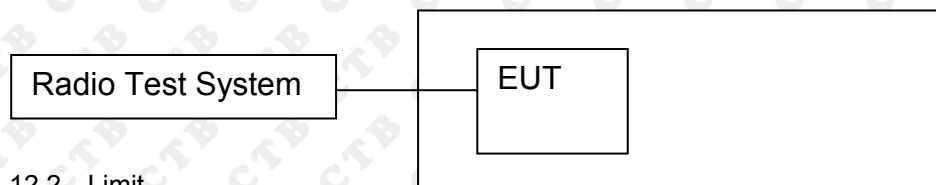

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS




Test Graph

Graphs																												
GFSK/Hop	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.4018370 GHz 2.117 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td></td> <td>2.4018370 GHz</td> <td>2.117 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td></td> <td>2.4798260 GHz</td> <td>0.446 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.4018370 GHz	2.117 dBm				2	N	f		2.4798260 GHz	0.446 dBm			
MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	f		2.4018370 GHz	2.117 dBm																							
2	N	f		2.4798260 GHz	0.446 dBm																							
$\pi/4$ DQPSK/Hop	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.4019205 GHz 0.986 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td></td> <td>2.4019205 GHz</td> <td>0.986 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td></td> <td>2.4800765 GHz</td> <td>-0.996 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.4019205 GHz	0.986 dBm				2	N	f		2.4800765 GHz	-0.996 dBm			
MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	f		2.4019205 GHz	0.986 dBm																							
2	N	f		2.4800765 GHz	-0.996 dBm																							
8DPSK/Hop	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 5.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.4017635 GHz -2.906 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td></td> <td>2.4017635 GHz</td> <td>-2.906 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td></td> <td>2.4800765 GHz</td> <td>-0.269 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.4017635 GHz	-2.906 dBm				2	N	f		2.4800765 GHz	-0.269 dBm			
MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	f		2.4017635 GHz	-2.906 dBm																							
2	N	f		2.4800765 GHz	-0.269 dBm																							

### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

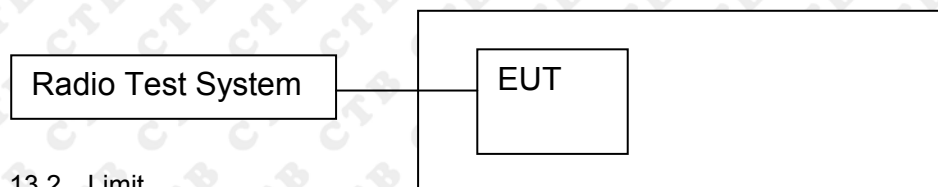

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.388	124.16	400	PASS
	DH1	MCH	0.388	124.16	400	PASS
	DH1	HCH	0.388	124.16	400	PASS
	DH3	LCH	1.65	264	400	PASS
	DH3	MCH	1.65	264	400	PASS
	DH3	HCH	1.65	264	400	PASS
	DH5	LCH	2.901	309.44	400	PASS
	DH5	MCH	2.901	309.44	400	PASS
	DH5	HCH	2.902	309.547	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$


DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$

DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$


Remark: Mkr Delta is once pulse time.




## Test Graph

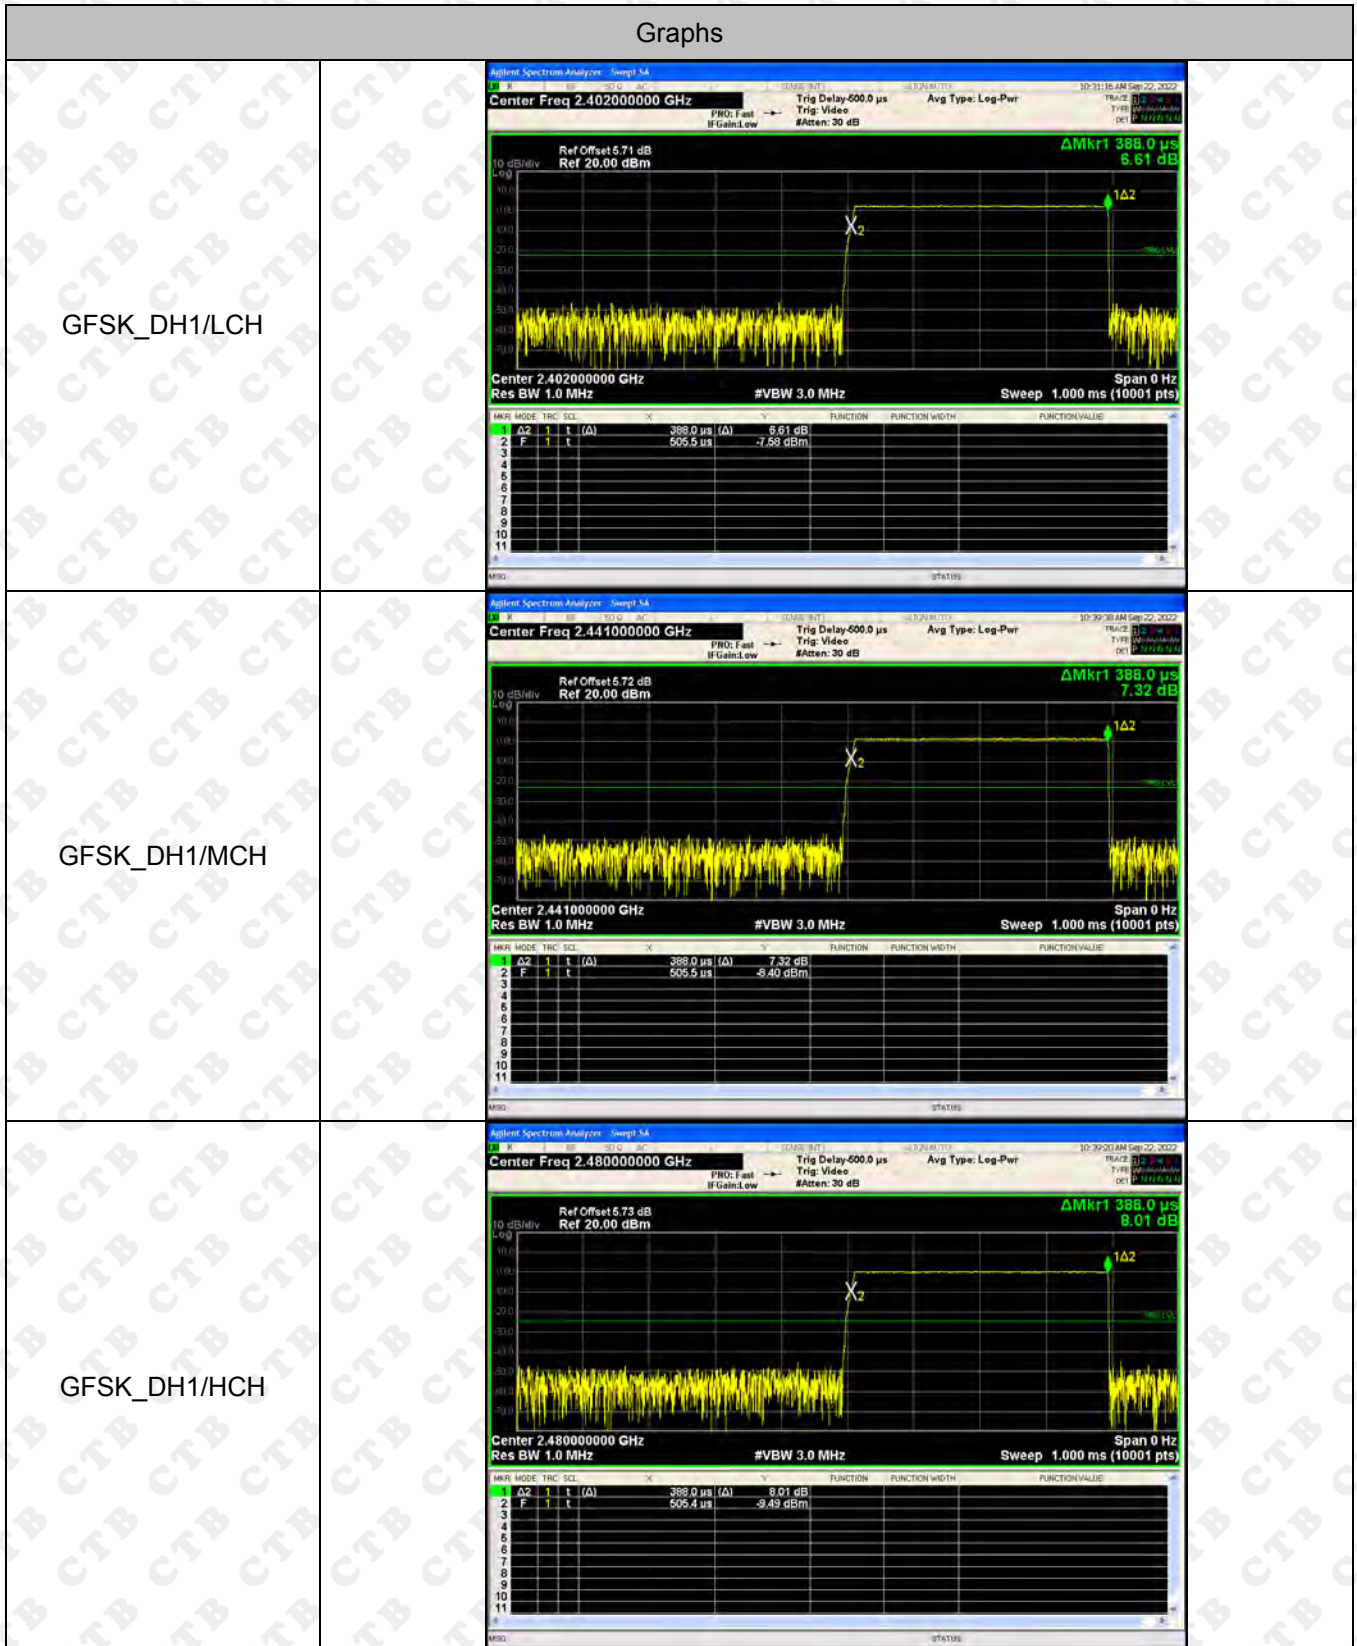


GFSK\_DH3/LCH

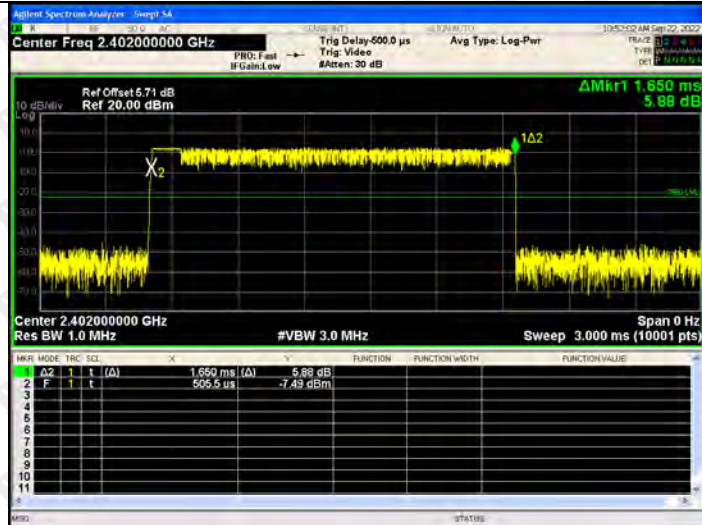

GFSK\_DH3/MCH

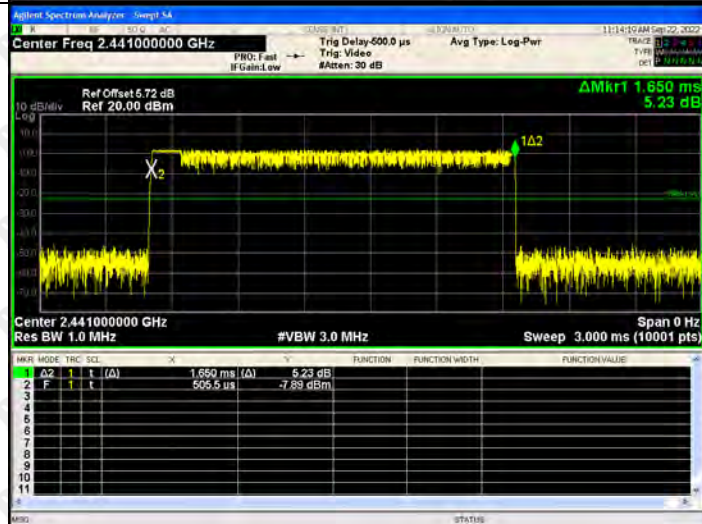

GFSK\_DH3/HCH

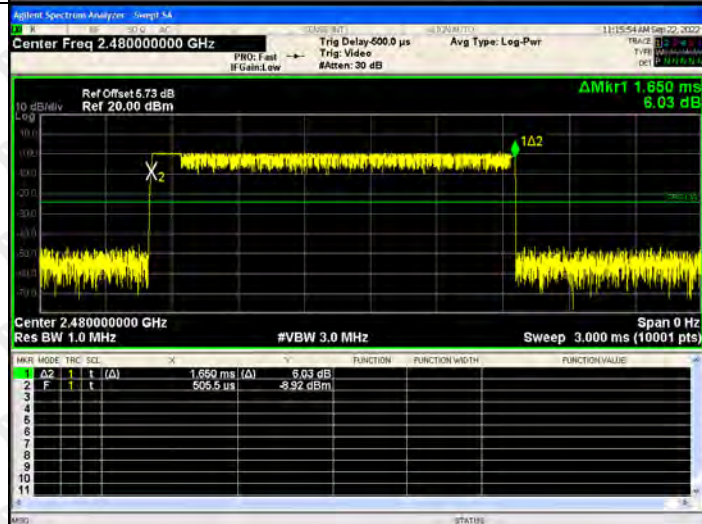





GFSK\_DH5/LCH



GFSK\_DH5/MCH

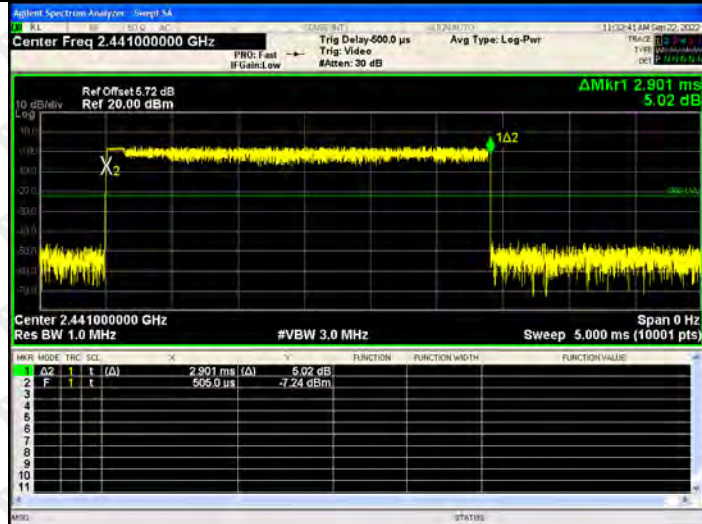

GFSK\_DH5/HCH

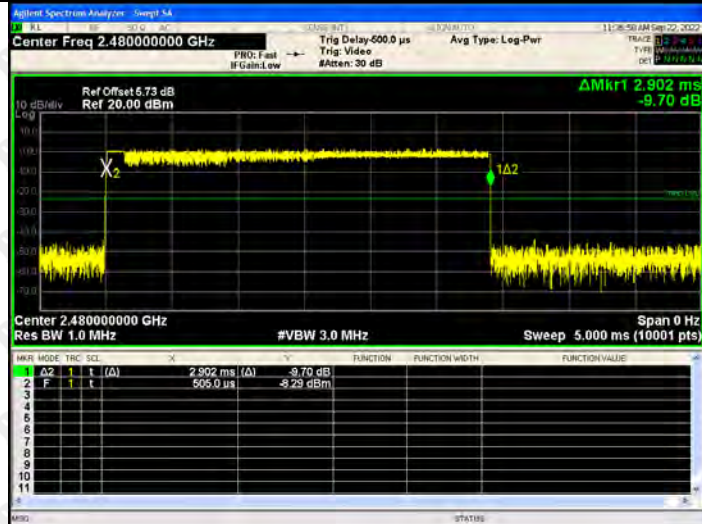



### 14. PSEUDORANDOM FREQUENCY

#### 14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


#### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

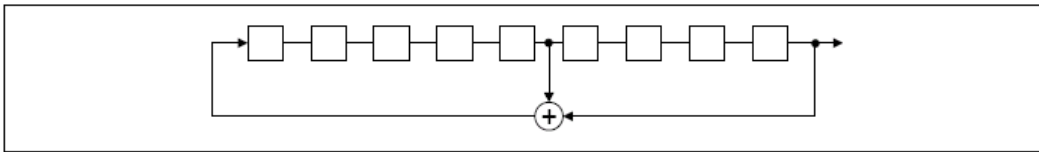

An example of Pseudorandom Frequency Hopping Sequence as follow:

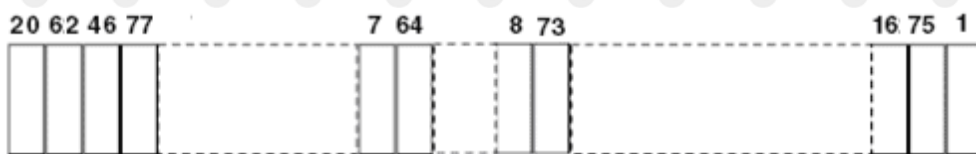

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 5.94dBi.




## 16. EUT PHOTOGRAPHS

### External Photos EUT Photo 1




### EUT Photo 2

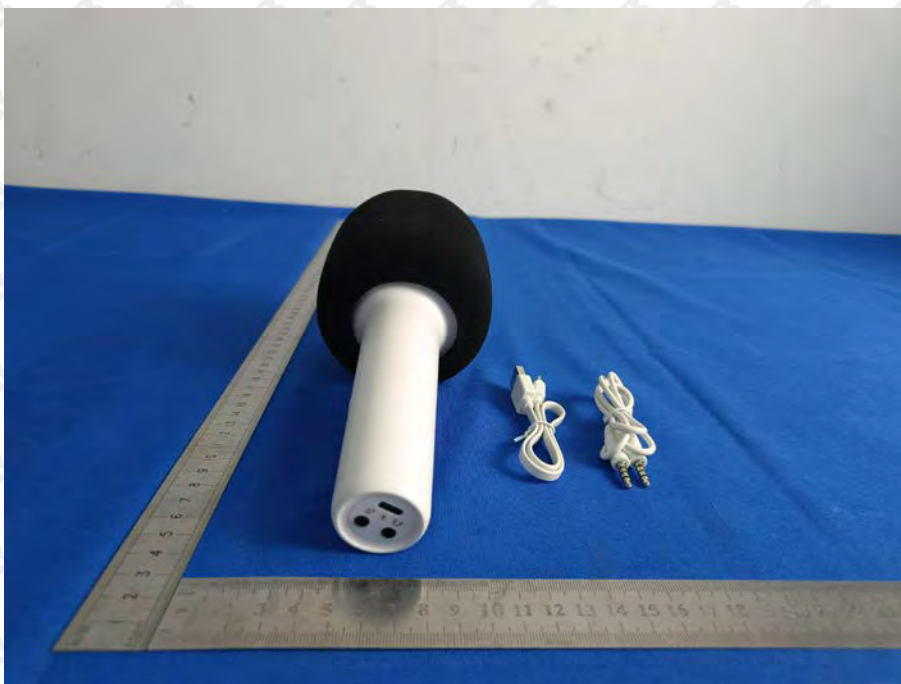

## 17. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G

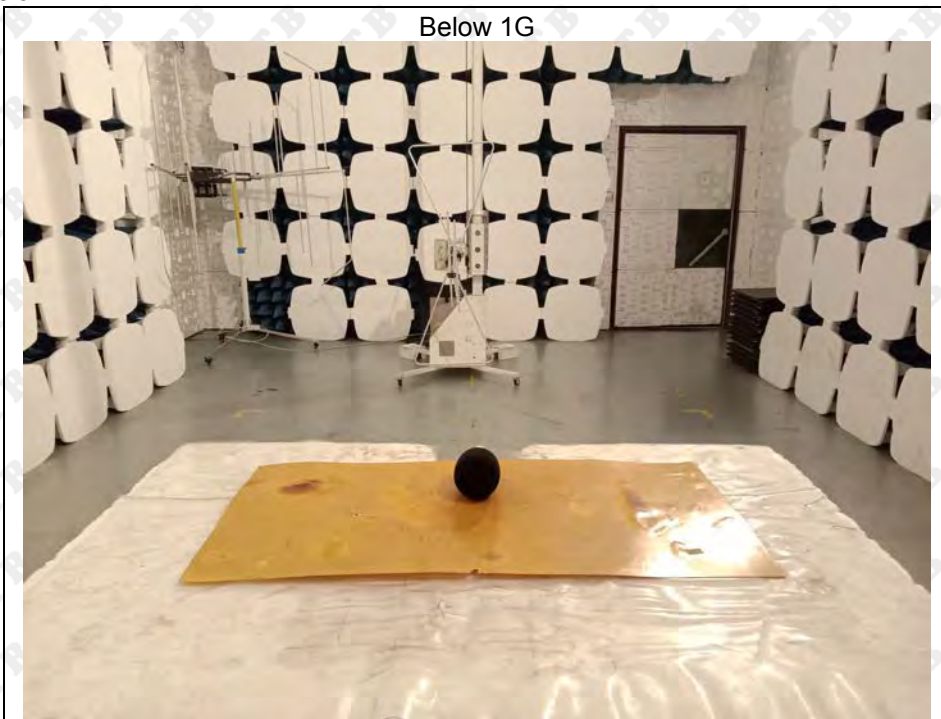


Above 1G





## Conducted emissions

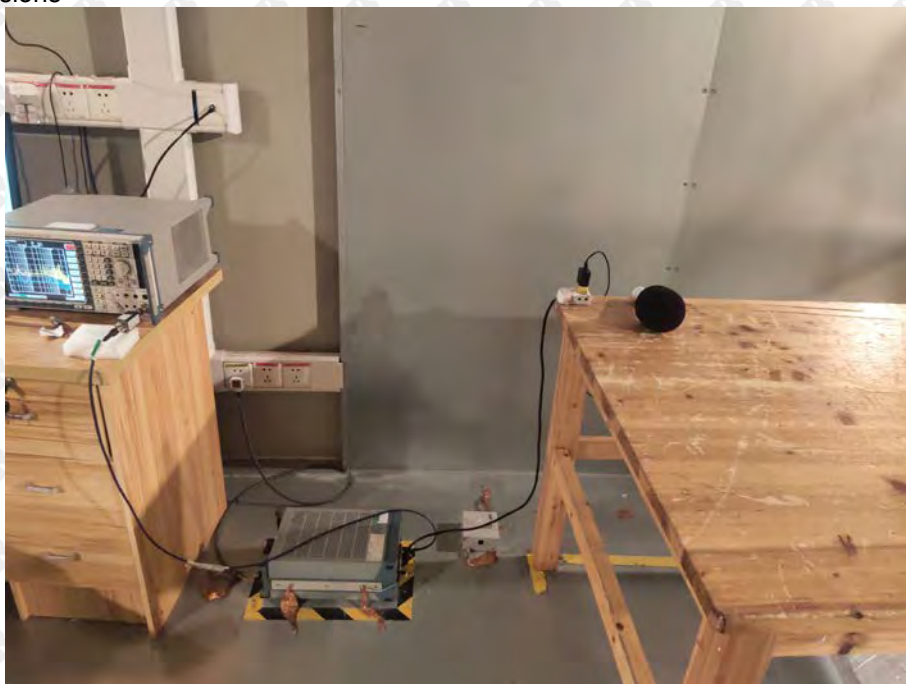

\*\*\*\*\* END OF REPORT \*\*\*\*\*