

Manufacturer's name: Dongguan Linyar Technology Co.,Ltd.

Model: Soundwae

Antenna type : Ceramic antenna

Applications:

WLAN, 802.11b/g, Bluetooth, etc...

Features

SMD, high reliability, ultra compact, Omni-directional...



Part number

ANT **3216** **R** **2400** **3K** **L1**
(1) (2) (3) (4) (5)


(1) Size Code	3.2x1.6mm
(2) Packing	Tape and reel
(3) Frequency	2.4GHz
(4) Packing Number	3K
(5) Code	L1

Electrical Specification

Working Frequency Range	2400 ~2484 MHz
Peak Gain	1.5 dBi (Typ.)
Impedance	50 Ohm
VSWR	2.5 (Max)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40 ~85°C

The specification is defined on EVB.

Dimension and Terminal Configuration

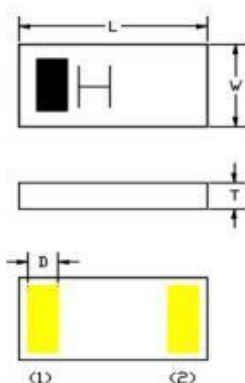


Dimension (mm)	
L	3.20±0.15
W	1.60±0.15
T	0.55±0.10
D	0.50±0.15


No.	Terminal Name
1	Feeding
2	Soldering

Evaluation Board Reference

PCB Dimension

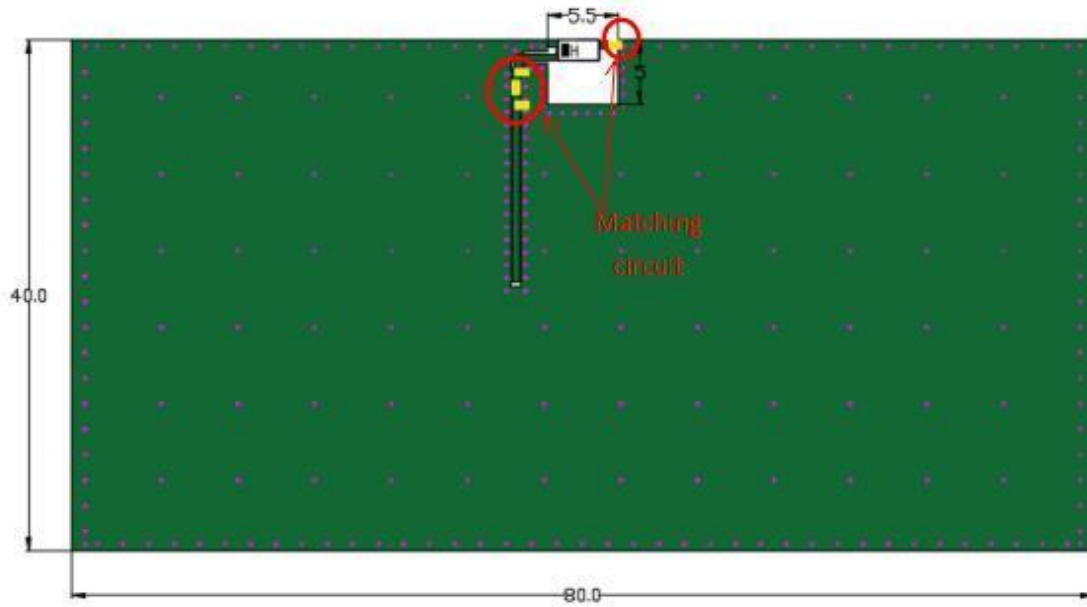


Antenna Layout Reference

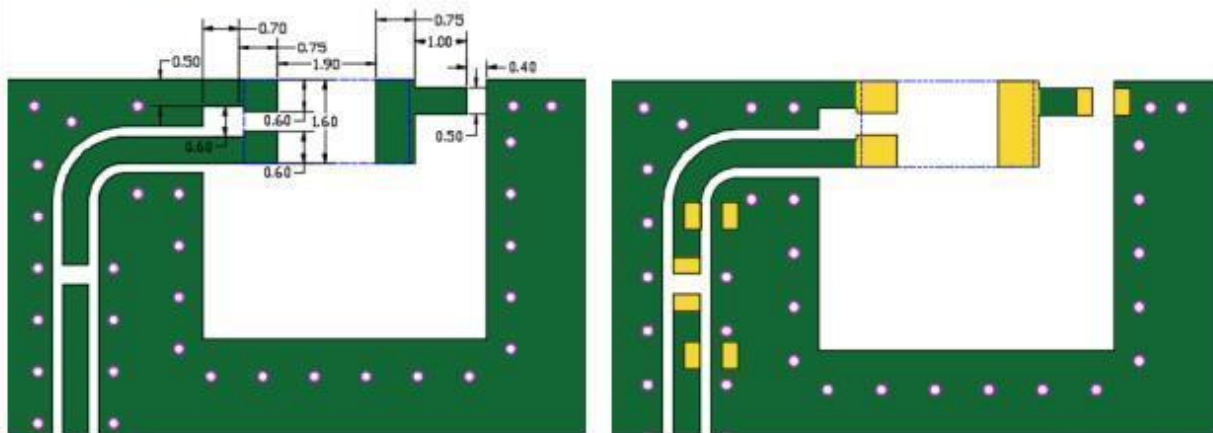



Unit : mm

 : Chip Antenna



 : Land Pattern

Electrical Characteristics




VSWR&Efficiency

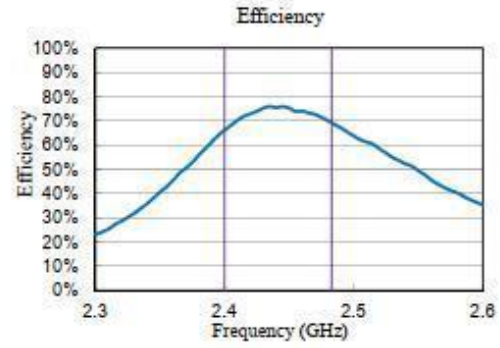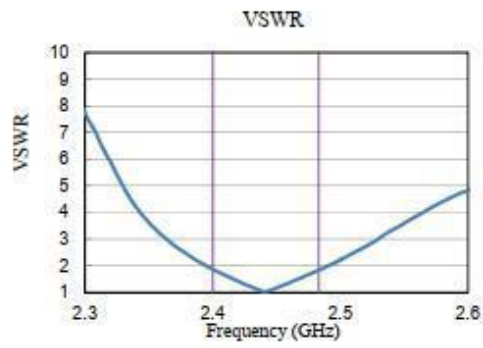


Radiation Pattern

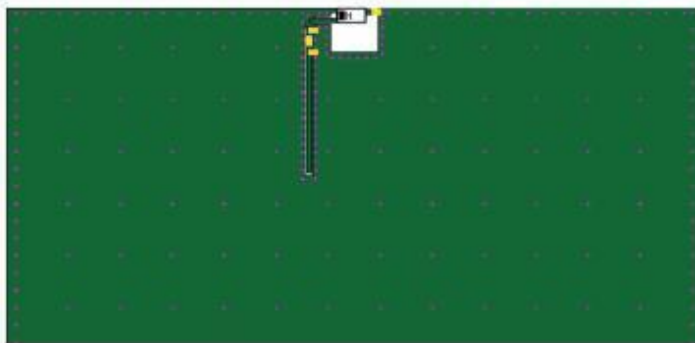



ZX-Plane

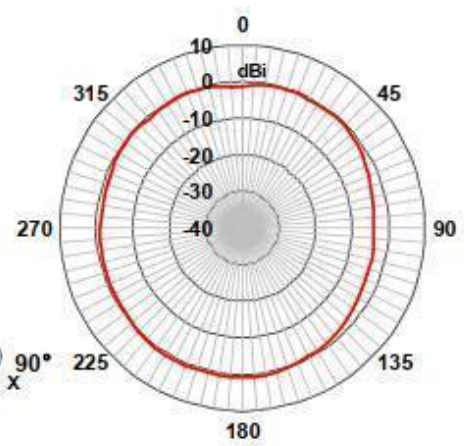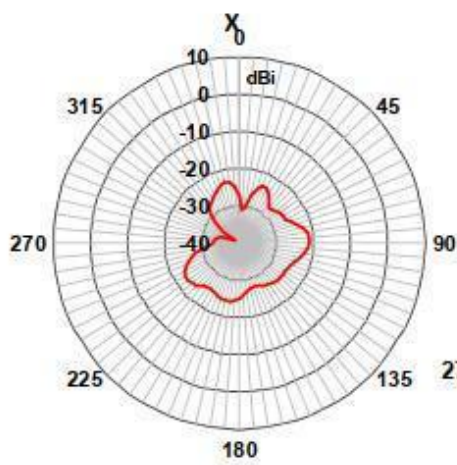

ZY-Plane

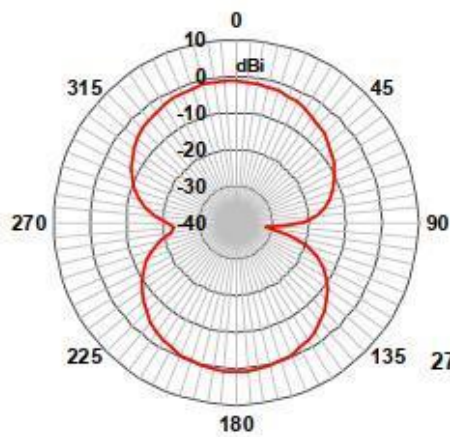


Horizontal Polarization

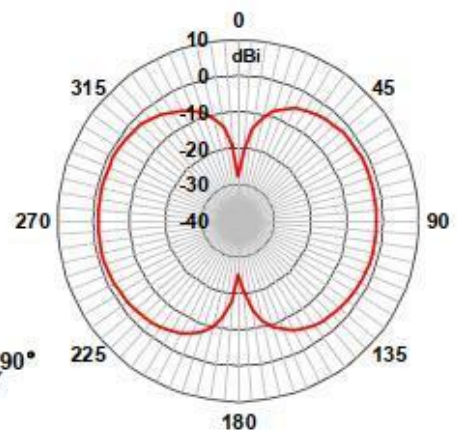



Vertical Polarization

XY-Plane

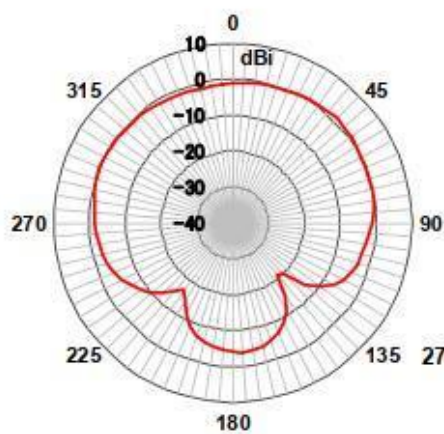

Horizontal Polarization

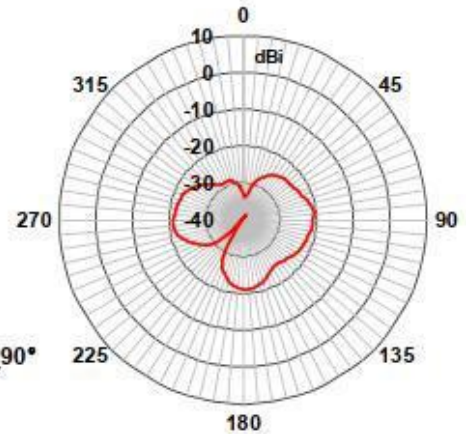


Vertical Polarization

Taping Specifications


Reel and Taping Specification

Reel Specification

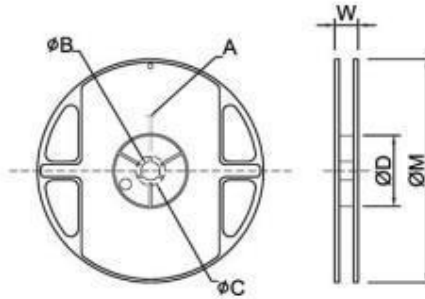

TYPE	SIZE	A	ϕB	ϕC	ϕD	W	ϕM	
3216	7"	3K/Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0


Taping Specification

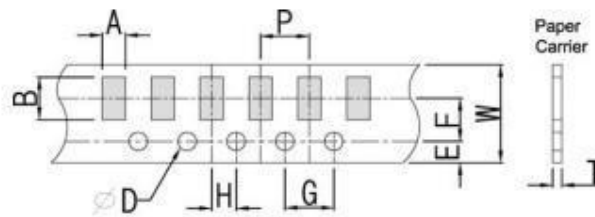

Packaging	Type	A	B	W	E	F	G	H	T	ϕD	P
Paper Type	3216	1.90±0.20	3.50±0.20	8.0±0.20	1.75±0.10	3.5±0.05	4.0±0.10	2.0±0.05	0.75±0.10	1.50 +0.10 -0	4.0±0.1

Recommended Reflow Profile

Pb free solder

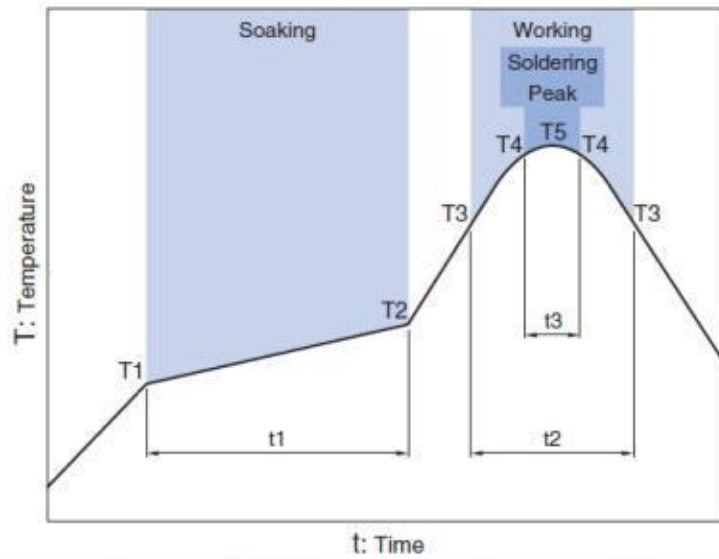

Soaking			Working		Soldering		Peak
Temp.	Temp.	Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

March 2020 Ver.H01