

BTHP10 Wireless Business Headset


User Manual

Contents:

1. Product Overview	2
2. Basic Operation	3
3. Bluetooth Pairing and Connection	4
4. Connection with Two devices	5
5. LED Indicator	6
6. Charging	7
7. Product Specification	8
8. Attention and Q & A	9


1

1. Product Overview

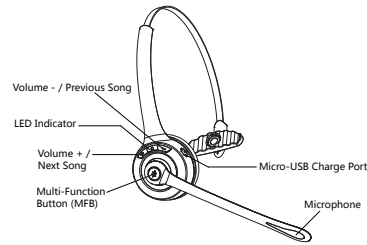

Package Contents:

- A. Bluetooth Headset BTHP10 X 1
- B. Micro USB charging cable x 1
- C. User manual x 1



2



2. Basic Operation

Button	Function	Operation
MFB	Power On	In off status, Long press MFB for 3 seconds to power on.
	Power Off	In on status, Long press MFB for 5 seconds to power off.
	Enter Pairing Mode	In off status, long press MFB for 5 seconds to enter pairing mode.
	Play/Pause	Short press when play music.
	Redial A Call	In connected status, double press MFB to dial the last call.
	Voice Dialing	In connected status, long press MFB for 3 second then release.
	Audio Switch	When during a call, long press for 1 second MFB then release.
	Answer A Call	When a call incoming, short press to answer
	Hang Up A Call	When during a call, short press to hang up
	Reject A Call	When a call incoming, long press for 1 second to reject a call.
Volume +	Volume Up	Short press.
	Next Song	Long press for 1 second.
Volume -	Volume Down	Short press.
	Previous Song	Long press for 1 second

3

3. Bluetooth Pairing and Connection:


- A. In off status, long press MFB for 3 seconds to enter pairing mode with Blue & Red LED flash alternately (If there is pairing record please long press MFB for 5 seconds).
- B. Search and click to connect " BTHP10" on your phone Bluetooth lists, LED change to Blue slow flash once every 10 seconds after connected, now you can play music from phone to headphone.
- C. You can press MFB / volume+ / volume- on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous song, volume up and down.



4

4. Connection with Two devices:

- A. Follow part 3 to connect with first phone, then turn off the Bluetooth function of first phone.
- B. Turn off the headset then long press MFB for 5 seconds to enter pairing mode again with Red & Blue LED flash alternately. Turn on the bluetooth function of second phone to search and connect "BTHP10", LED change to Blue flash once every 10 seconds.
- C. Turn on Bluetooth function of second phone, click to reconnect "BTHP10" on Bluetooth lists. LED change to Blue slow flash after connected.
- D. Turn on Bluetooth function of first phone, click to reconnect "BTHP10" on Bluetooth lists. Headset is connected with two phones now.

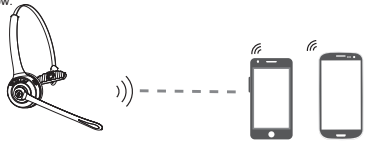

Notes :

Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or turn off the music of the previous phone. The same operation during talking status.

5

5. LED Indicator

Mode	LED Indicator
Power on	Blue LED flash 3 times
Power off	Red LED is on for 1 second
Pairing mode	Red & Blue LED flash alternately
Reconnect mode	Blue LED flash twice every 5 seconds
Connected standby mode	LED Blue flash once every 10 seconds
Playing Music	LED Blue flash twice every 10 seconds
Talking	LED Blue flash twice every 10 seconds
Delete paired record	Blue and Red LED flash once at the same time
Charging	Solid Red LED
Full charged	Solid Blue LED
Low battery	Red LED flash


6

6. Charging

Please charge the BTHP10 at once when the Red LED flash. Charging time is about 2 hours. Red LED turn off when full charged.

Charge Connections

Please connect to the BTHP10 charging port through the Micro USB end of Micro USB charging cable, the USB end to the charger as car charger, travel charger, computer USB, etc.

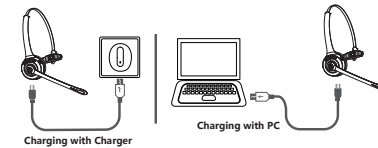

Notes:

- 1. Please charge the BTHP10 at least one time every 2 months when don't use it.
- 2. Plug charging cable for charging when power on, will reset the headset and power off.

7

7. Product Specification:

Bluetooth Version	V5.0, Class II
Operation Range	10 meters
Bluetooth Protocols	HSP, HFP, AVRCP, A2DP
CODEC Code	SBC
Battery Capacity	180mAh/3.7V
Charging Time	About 2 hours
Standby Time	About 160 hours
Music Time	About 13 hours
Talking Time	About 11 hours
Working Temperature	-10—55°C
Headset Net Weight	41.5g
Headset Dimension	151*49*51mm

Notes :

*Actual use time will differ from environment and music

8

8. Attentions and Q & A :

A. How to reconnect and operation when failed to reconnect?

When BTHP10 connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on, If failed, please pair and connect again.

B. How to delete paired records?

In power on status, long press the MFB and Volume + for 5 seconds to clear the pairing record. Blue and Red LED flash once at the same time that means the pairing record has been cleared, and the BTHP10 will not connect the connected device. When there are various connection problem, try clearing the pairing record firstly.

C. What's the password for pairing?

Some connection devices require password for pairing, please try 0000 or 8888 or 1111 or 1234.

D. What devices could charge for the headphone?

Any car charger, power bank, PC etc which meet DC 5V , charging current more than 500mA could be charge for this item.

E. How to do if can not power on or dead?

Please try charging reset: Plug the charging cable when power on, it will reset the headset and power off.

9

9.FCC Warning :

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference , and (2) this device must accept any interference received , including interference that may cause undesired operation .

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver .

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected .

—Consult the dealer or an experienced radio / TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

10.IC Warning

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard (s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. Le onjunc areil est conforme aux CNR d' l'innovation, la science et le développement économique Canada licables aux areils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

(1) l'areil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, onj si le brouillage est susceptible d'en compromettre le fonctionnement.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Tous les changements ou modifications non expressé ment approuvé e par le responsable de la conformité pourrait vider l'utilisateur est habilité à exploiter l'équipemen.

ISED Radiation Exposure Statement:

This equipment complies with ISED RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

IC exposition aux radiations:

Cet équipement est conforme avec ISED les limites d'exposition aux rayonnements définies pour un contrôlé environnement.

Cet émetteur ne doit pas être co-localisés ou fonctionner en conjonction avec une autre antenne ou émetteur.

Cet appareil est

conforme aux limites d'exposition de rayonnement RF ISED établies pour un environne-ment non contrôlé. Cet'émetteur ne doit pas être co-implanté ou fonctionner en onjuncion avec toute autre antenne ou transmetteur.