

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.


2 PRINTING SPECIFICATION:

INK COLOR - BLACK
 BACKGROUND - WHITE
 MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
 ADHESIVE - 1.8 mil #350 ACRYLIC


LABEL SIZE - 2.0 x 1.0 ± .02
 CORNER RADIUS - .05 ± .02
 ROLL SIZE - 500, MAX

3 INNER DIE CUT: 1.25 x 0.5 ± .02

- 4. DIE CUT TO LINER. PERFORATE LINER BETWEEN LABELS. PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.
- 5. LABEL MUST CONFORM TO UL 969 AND CSA 22.2 NO. 0.15-95 AND SHALL BE UL APPROVED MATERIAL, WITH SUPPLIER NAME AND LABEL NAME OR DESIGNATION ON INSIDE OF ROLL CORE.
- 6. LABEL MUST BE PROCURED FROM UL AUTHORIZED SUPPLIER.
- 7. REFERENCE S14913.
- 8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS PART MUST BE REVIEWED BY EMC/SAFETY GROUP. LABEL TO BE U.L. RECOGNIZED COMPONENT CATEGORY PGDQ2/PGDQ8. EMC/SAFETY GROUP MUST REVIEW ALL SUPPLIERS.
- 9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE LATEST REVISION OF ABBOTT SPECIFICATION S205053.

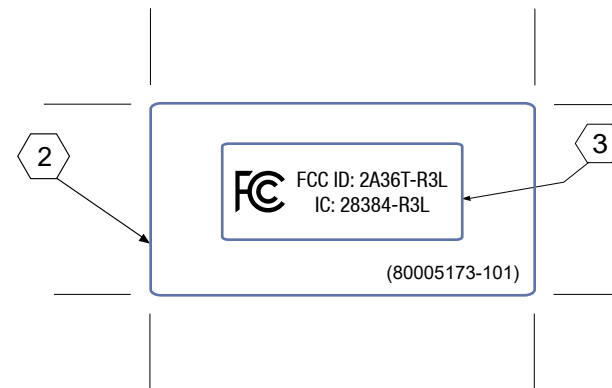

CONFIDENTIAL INFORMATION
 CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED BY 21CFR 20.61. DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 03/03/23	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA			
	MATERIAL: 2		TITLE: LABEL, R3L FCC - IC ID			
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 ANGULAR ± 2° .XXX ± .010 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.	APPLIED FINISH: None		SCALE 1/1	SIZE B	DWG NO. 80005173-101	REV. A
	DO NOT SCALE DRAWING			SHEET 1 OF 1		

1

2

3

4

A

A

B

B

C

C

D


D

E

E

F

F



Fonts:

- 1) Calibri 8 normal
- 2) Calibri 7 normal

*: Deviating dimensions require the consent of Abbott /
 *: Abweichende Maße bedürfen der Zustimmung durch Abbott

Material requirements:
 self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C /
 Materialanforderungen:
 Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C


		General tolerances		Surface finish		Scale 1:1		Weight: 0.00 g	
		DIN ISO 2768 - mK		DIN ISO 1302		Material		Sale No. 12799	
		Date		Signature		Component Label, Roundabout 3-entry			
		Cre. Part 27.07.2023		wredekk					
		Cre. Drw. 27.07.2023		wredekk					
		Appv'd							
		Standard				Article No. 35032927-101		Sheet 1 / 1	
				 Sachsenkamp 5, 20097 Hamburg		Replacement for:		Replaced by:	
Rev.	Change	Date	Name	Refer to protection notice ISO 16016					

1

2

3

4

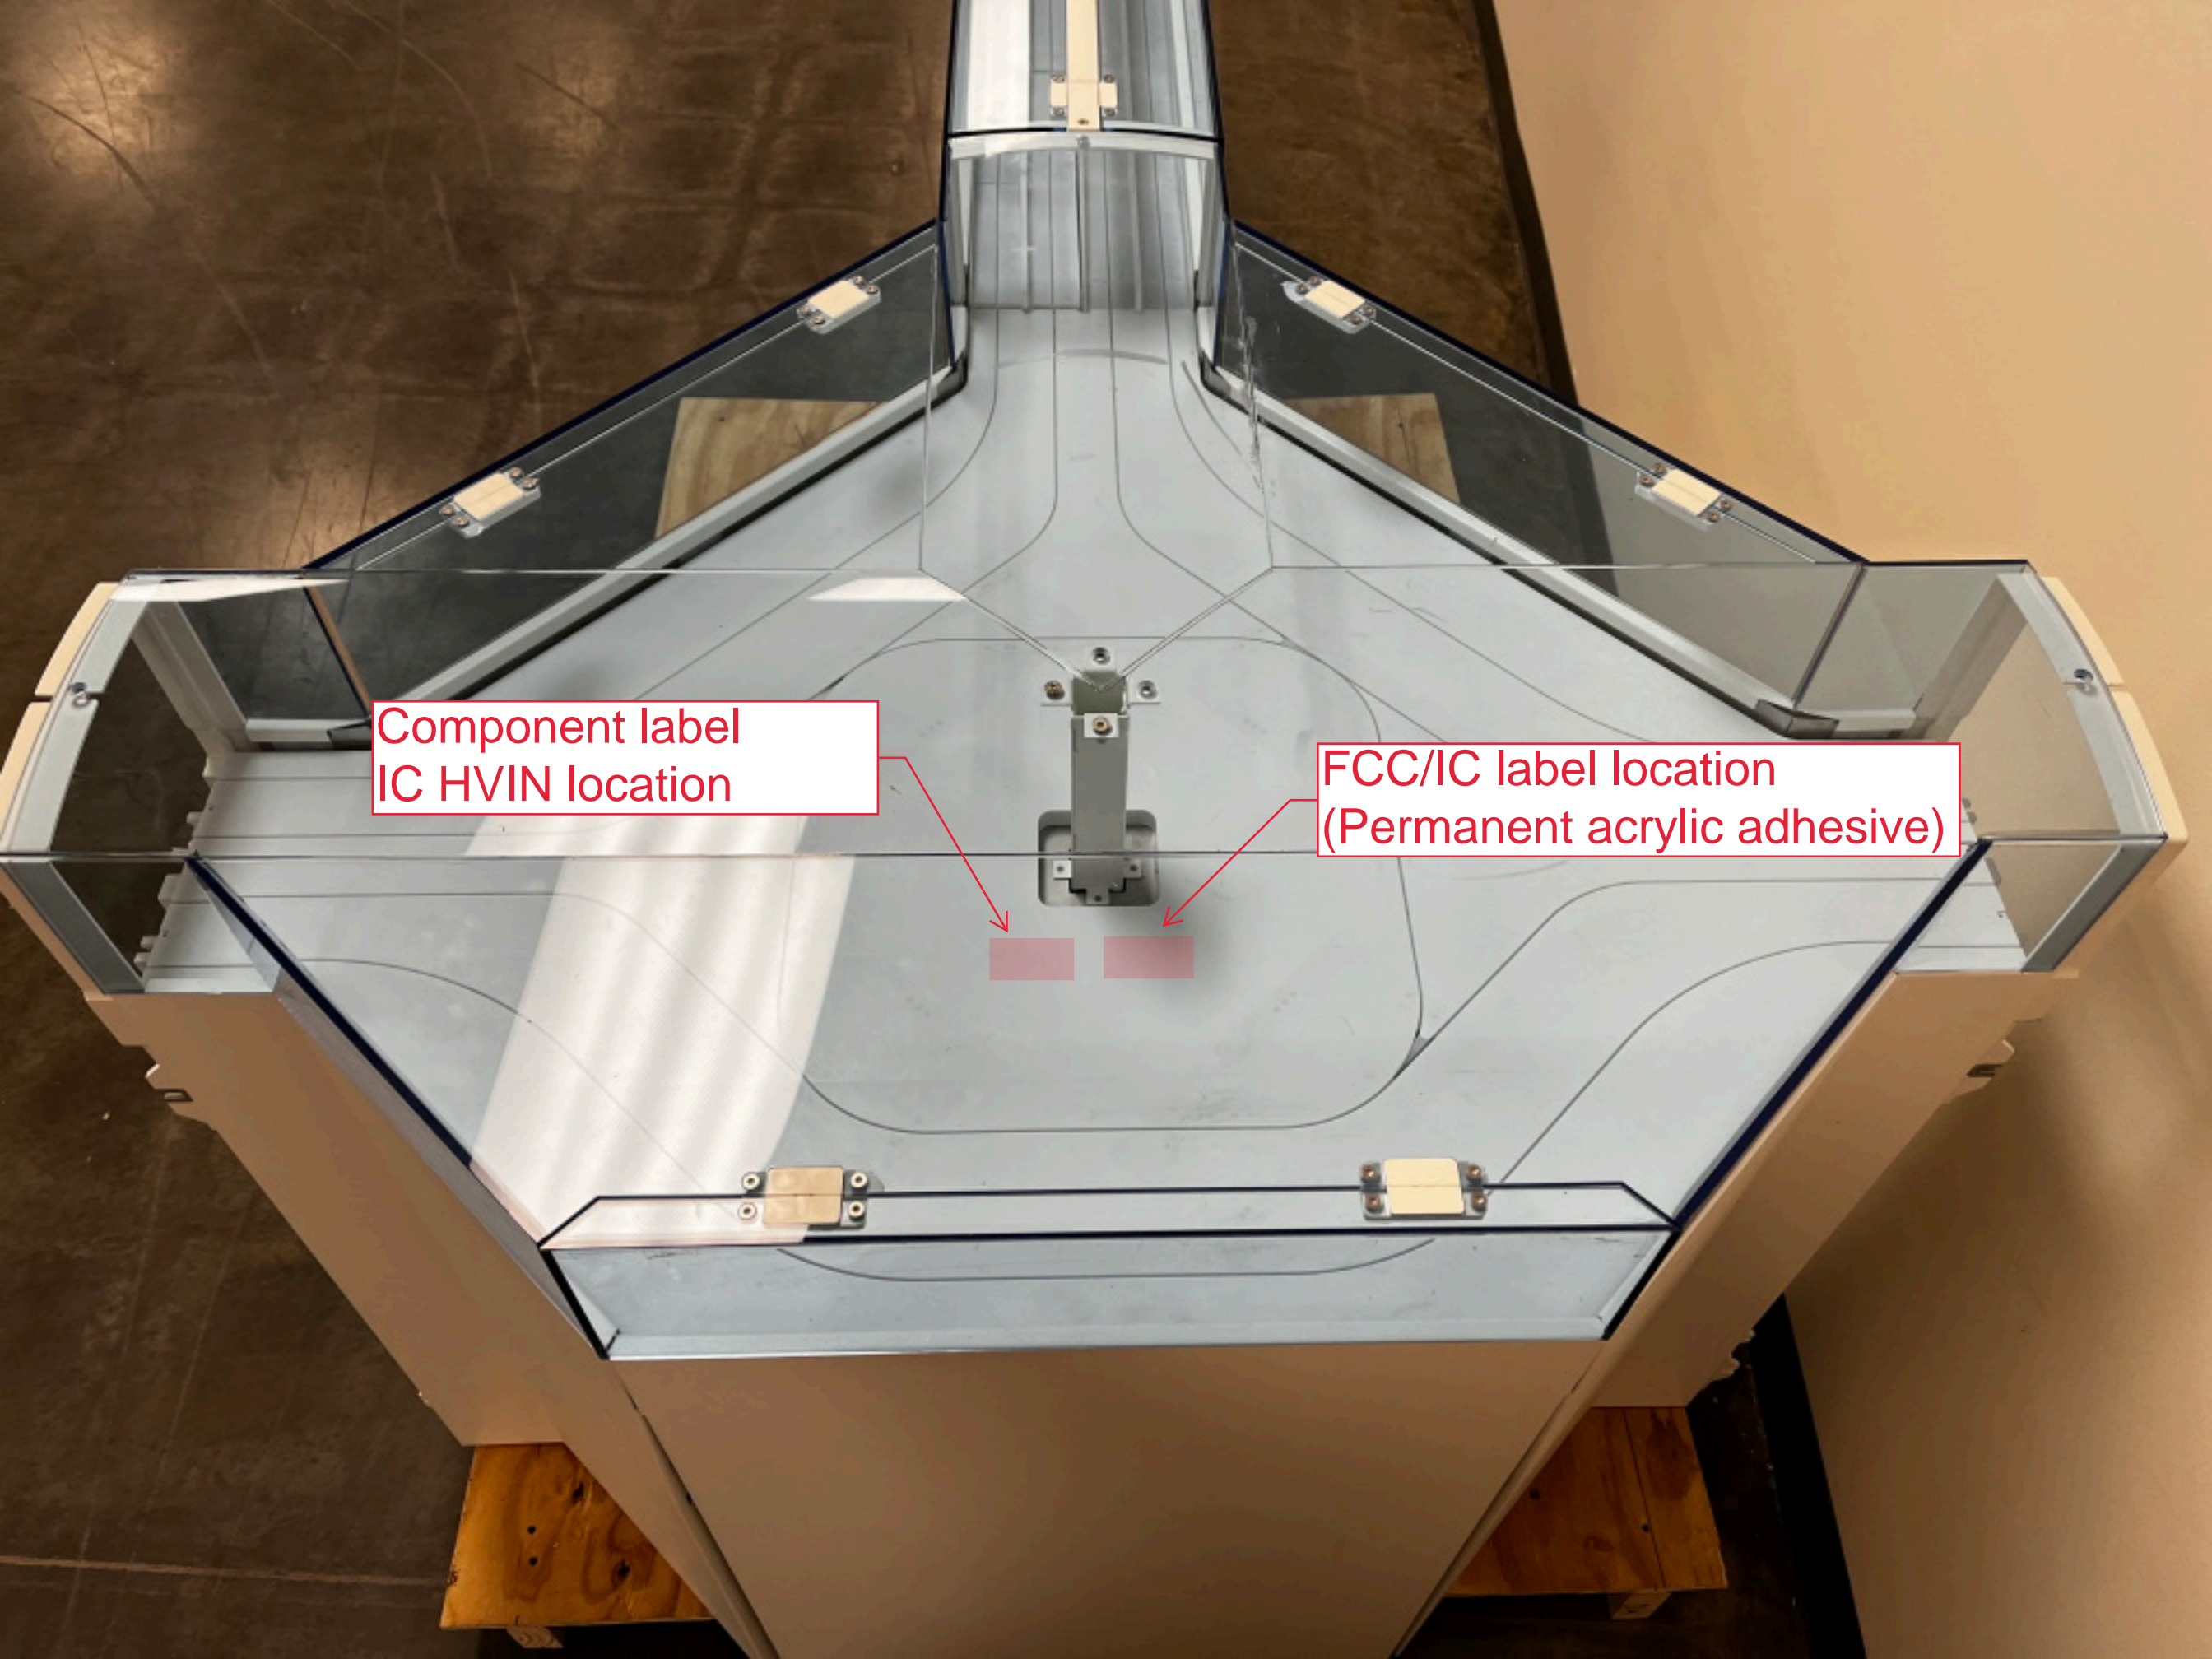

Component label
IC HVIN location

FCC/IC label location
(Permanent acrylic adhesive)