

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.


2 PRINTING SPECIFICATION:

INK COLOR - BLACK
BACKGROUND - WHITE
MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE - 2.0 x 1.0 ± .02
CORNER RADIUS - .05 ± .02
ROLL SIZE - 500, MAX


3 INNER DIE CUT: 1.25 x 0.5 ± .02

4. DIE CUT TO LINER.
PERFORATE LINER BETWEEN LABELS.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.
5. LABEL MUST CONFORM TO UL 969 AND CSA 22.2 NO. 0.15-95 AND
SHALL BE UL APPROVED MATERIAL, WITH SUPPLIER NAME AND
LABEL NAME OR DESIGNATION ON INSIDE OF ROLL CORE.
6. LABEL MUST BE PROCURED FROM UL AUTHORIZED
SUPPLIER.
7. REFERENCE S14913.
8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS PART
MUST BE REVIEWED BY EMC/SAFETY GROUP. LABEL TO BE U.L.
RECOGNIZED COMPONENT CATEGORY PGDQ2/PGDQ8.
EMC/SAFETY GROUP MUST REVIEW ALL SUPPLIERS.
9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE
LATEST REVISION OF ABBOTT SPECIFICATION S205053.

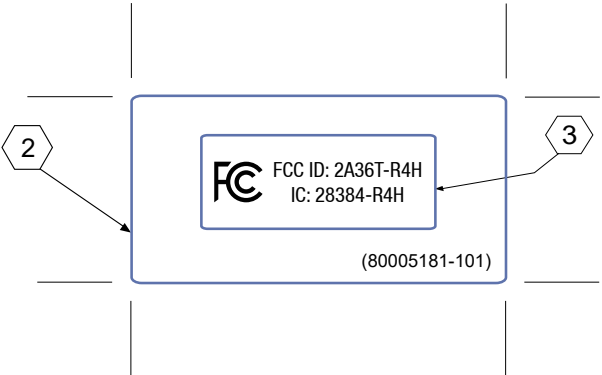

CONFIDENTIAL INFORMATION
CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61, DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: D. Dominguez	DATE: 03/13/23	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA		
	MATERIAL:	2			
	APPLIED FINISH:	None	TITLE: LABEL, R4H FCC – IC ID		
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010 ANGULAR ± 2° 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.			SCALE 1/1	SIZE B	DWG NO. 80005181-101
			REV. A		
			DO NOT SCALE DRAWING		SHEET 1 OF 1

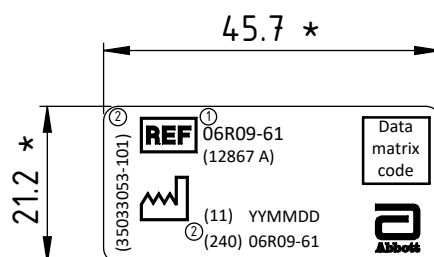


Fonts:

- 1) Calibri 8 normal
- 2) Calibri 7 normal

*: Deviating dimensions require the consent of Abbott /
 *: Abweichende Maße bedürfen der Zustimmung durch Abbott

Material requirements:
 self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C /
 Materialanforderungen:
 Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C

		General tolerances		Surface finish		Scale 1:1		Weight: 0.00 g		
		DIN ISO 2768 - mK		DIN ISO 1302		Material		Sale No. 12867 Revision A		
		Date		Signature		Title				
		Cre. Part				Component Label, Roundabout 4-entry HL				
		Cre. Drw.								
		Appv'd								
		Standard								
				Abbott Sachsenkamp 5, 20097 Hamburg		Article No.			Sheet	
						35033053-101			1 / 1	
Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:		Replaced by:		

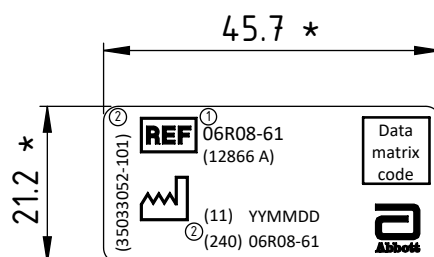


Fonts:

- 1) Calibri 8 normal
- 2) Calibri 7 normal

*: Deviating dimensions require the consent of Abbott /
 *: Abweichende Maße bedürfen der Zustimmung durch Abbott

Material requirements:
 self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C /
 Materialanforderungen:
 Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C


		General tolerances		Surface finish		Scale 1:1		Weight: 0.00 g	
		DIN ISO 2768 - mK		DIN ISO 1302		Material		Sale No. 12866	
		Date		Signature		Title		Revision A	
		Cre. Part				Component Label, Roundabout 3-entry HL			
		Cre. Drw.							
		Appv'd							
		Standard							
				 Sachsenkamp 5, 20097 Hamburg		Article No.		Sheet	
						35033052-101		1 / 1	
Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:		Replaced by:	

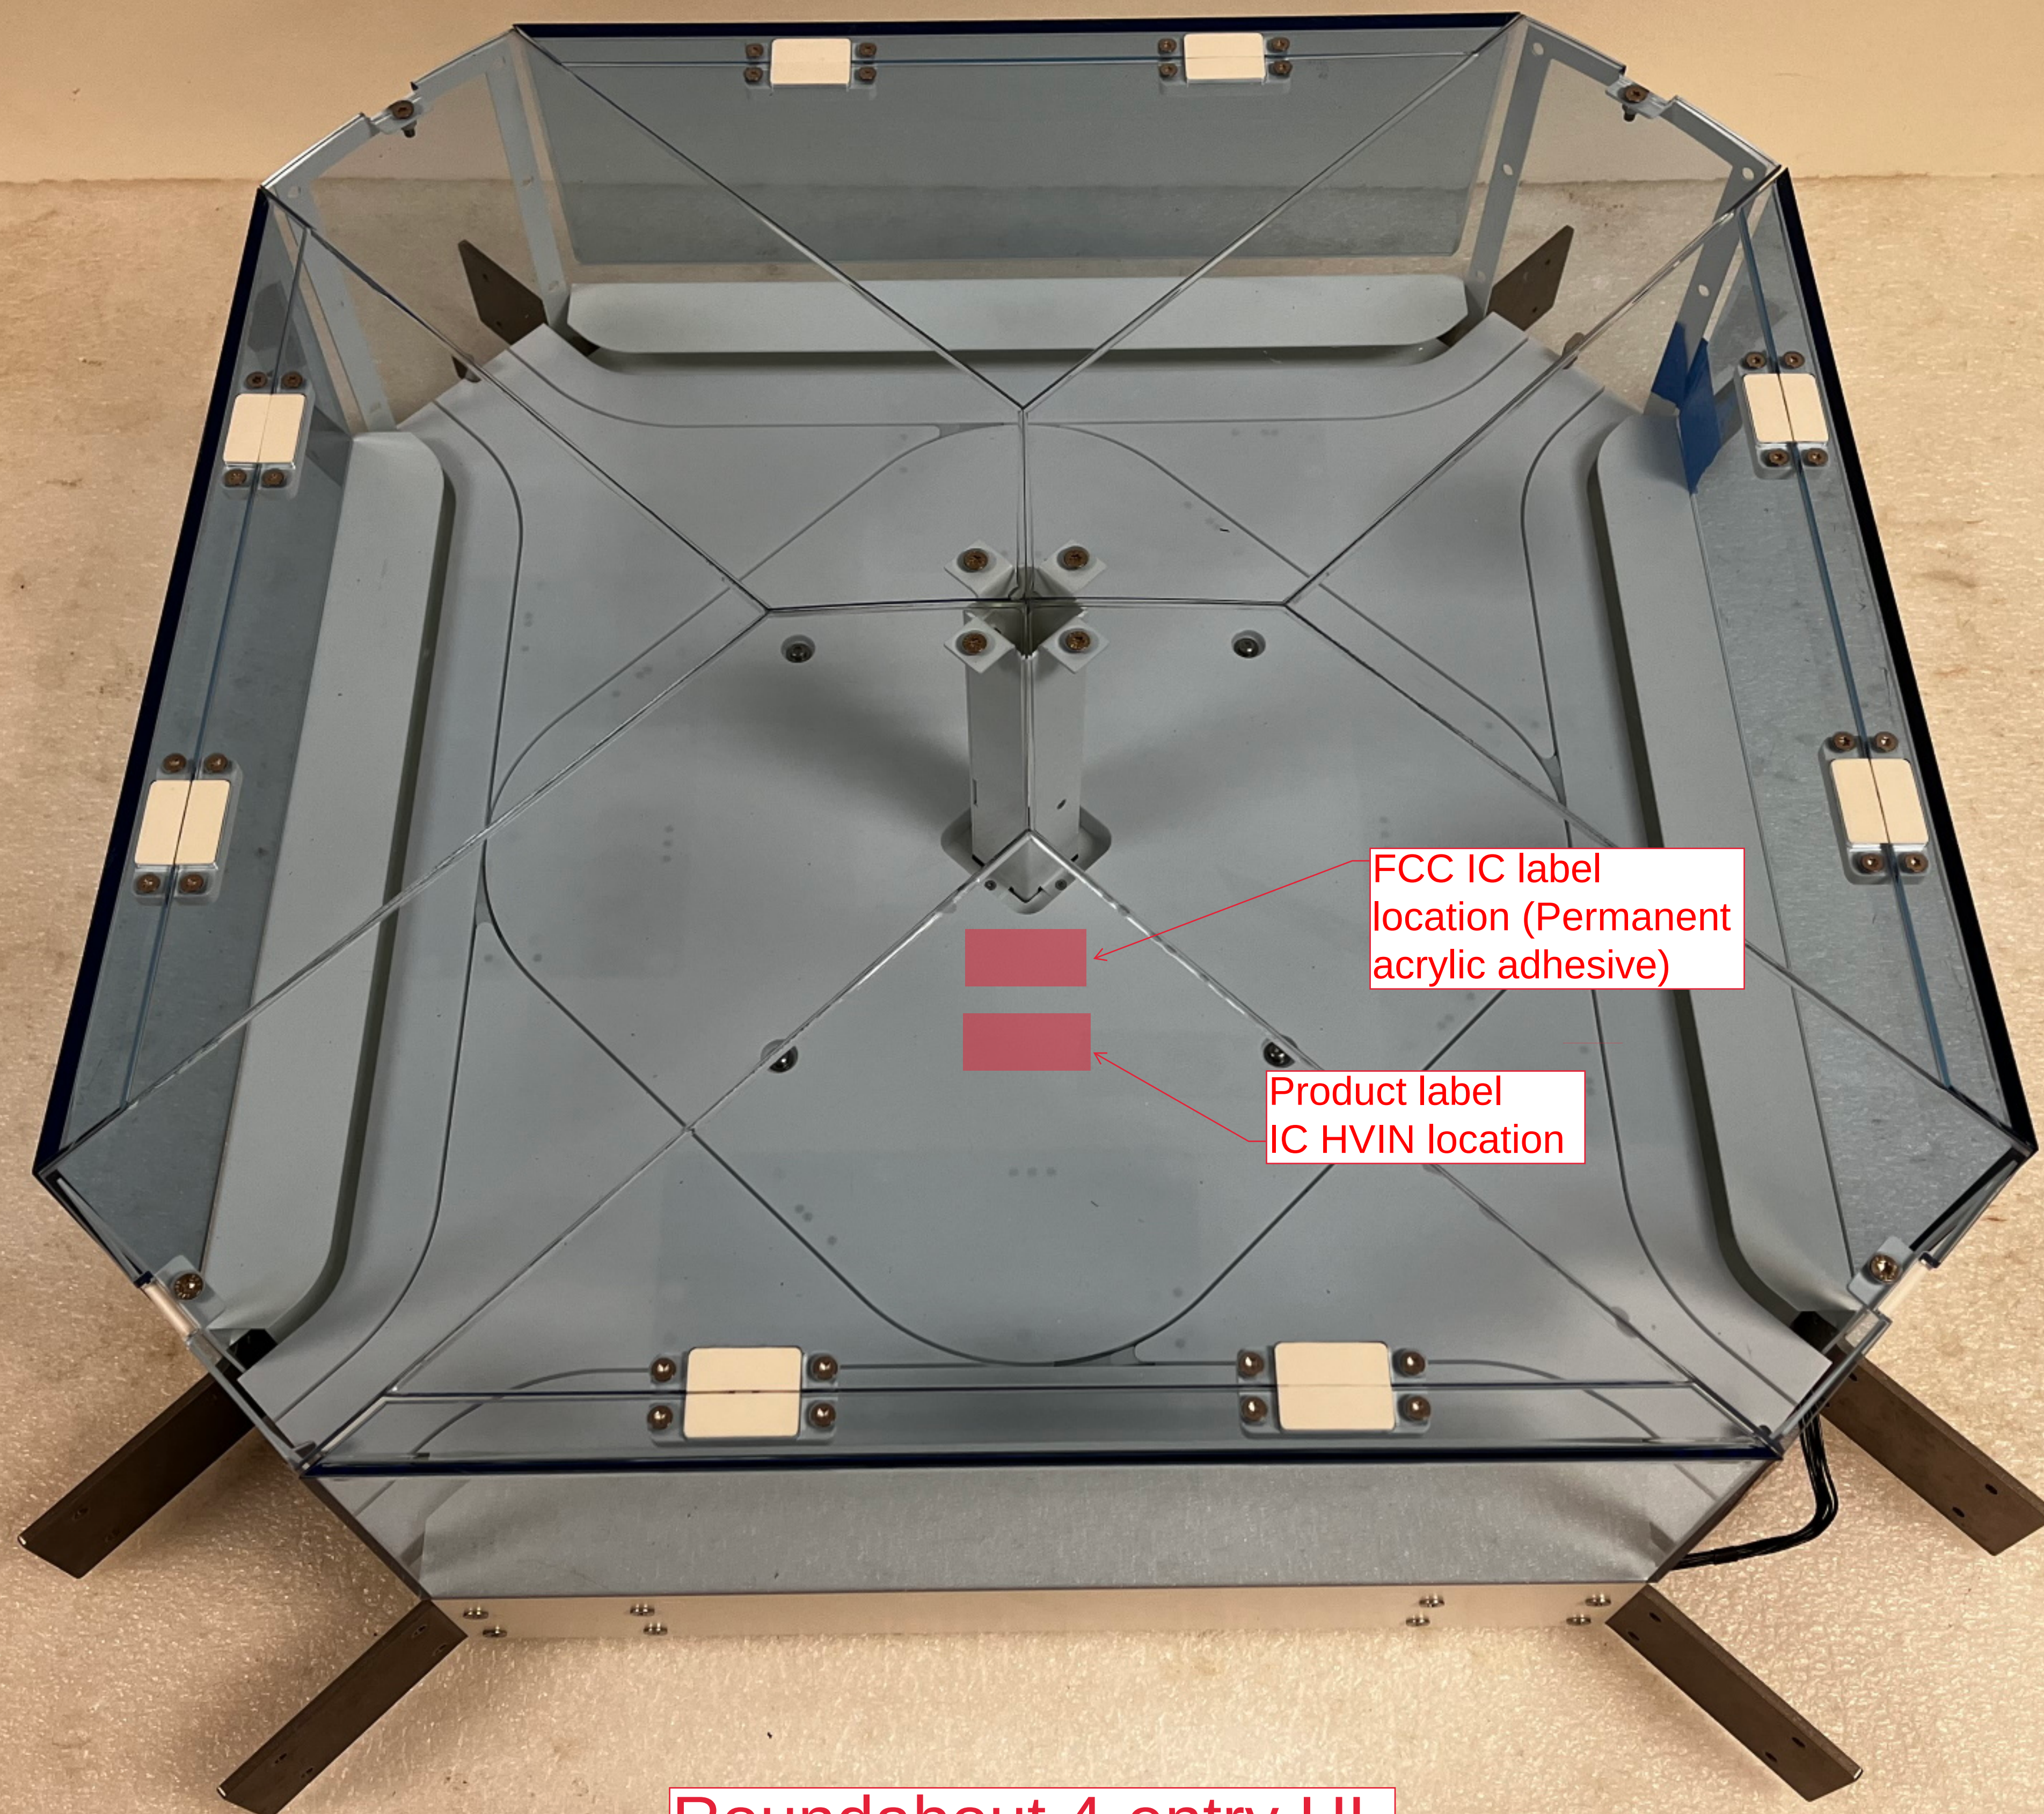

FCC IC label
location (Permanent
acrylic adhesive)

Product label
IC HVIN location

Roundabout 4-entry HL

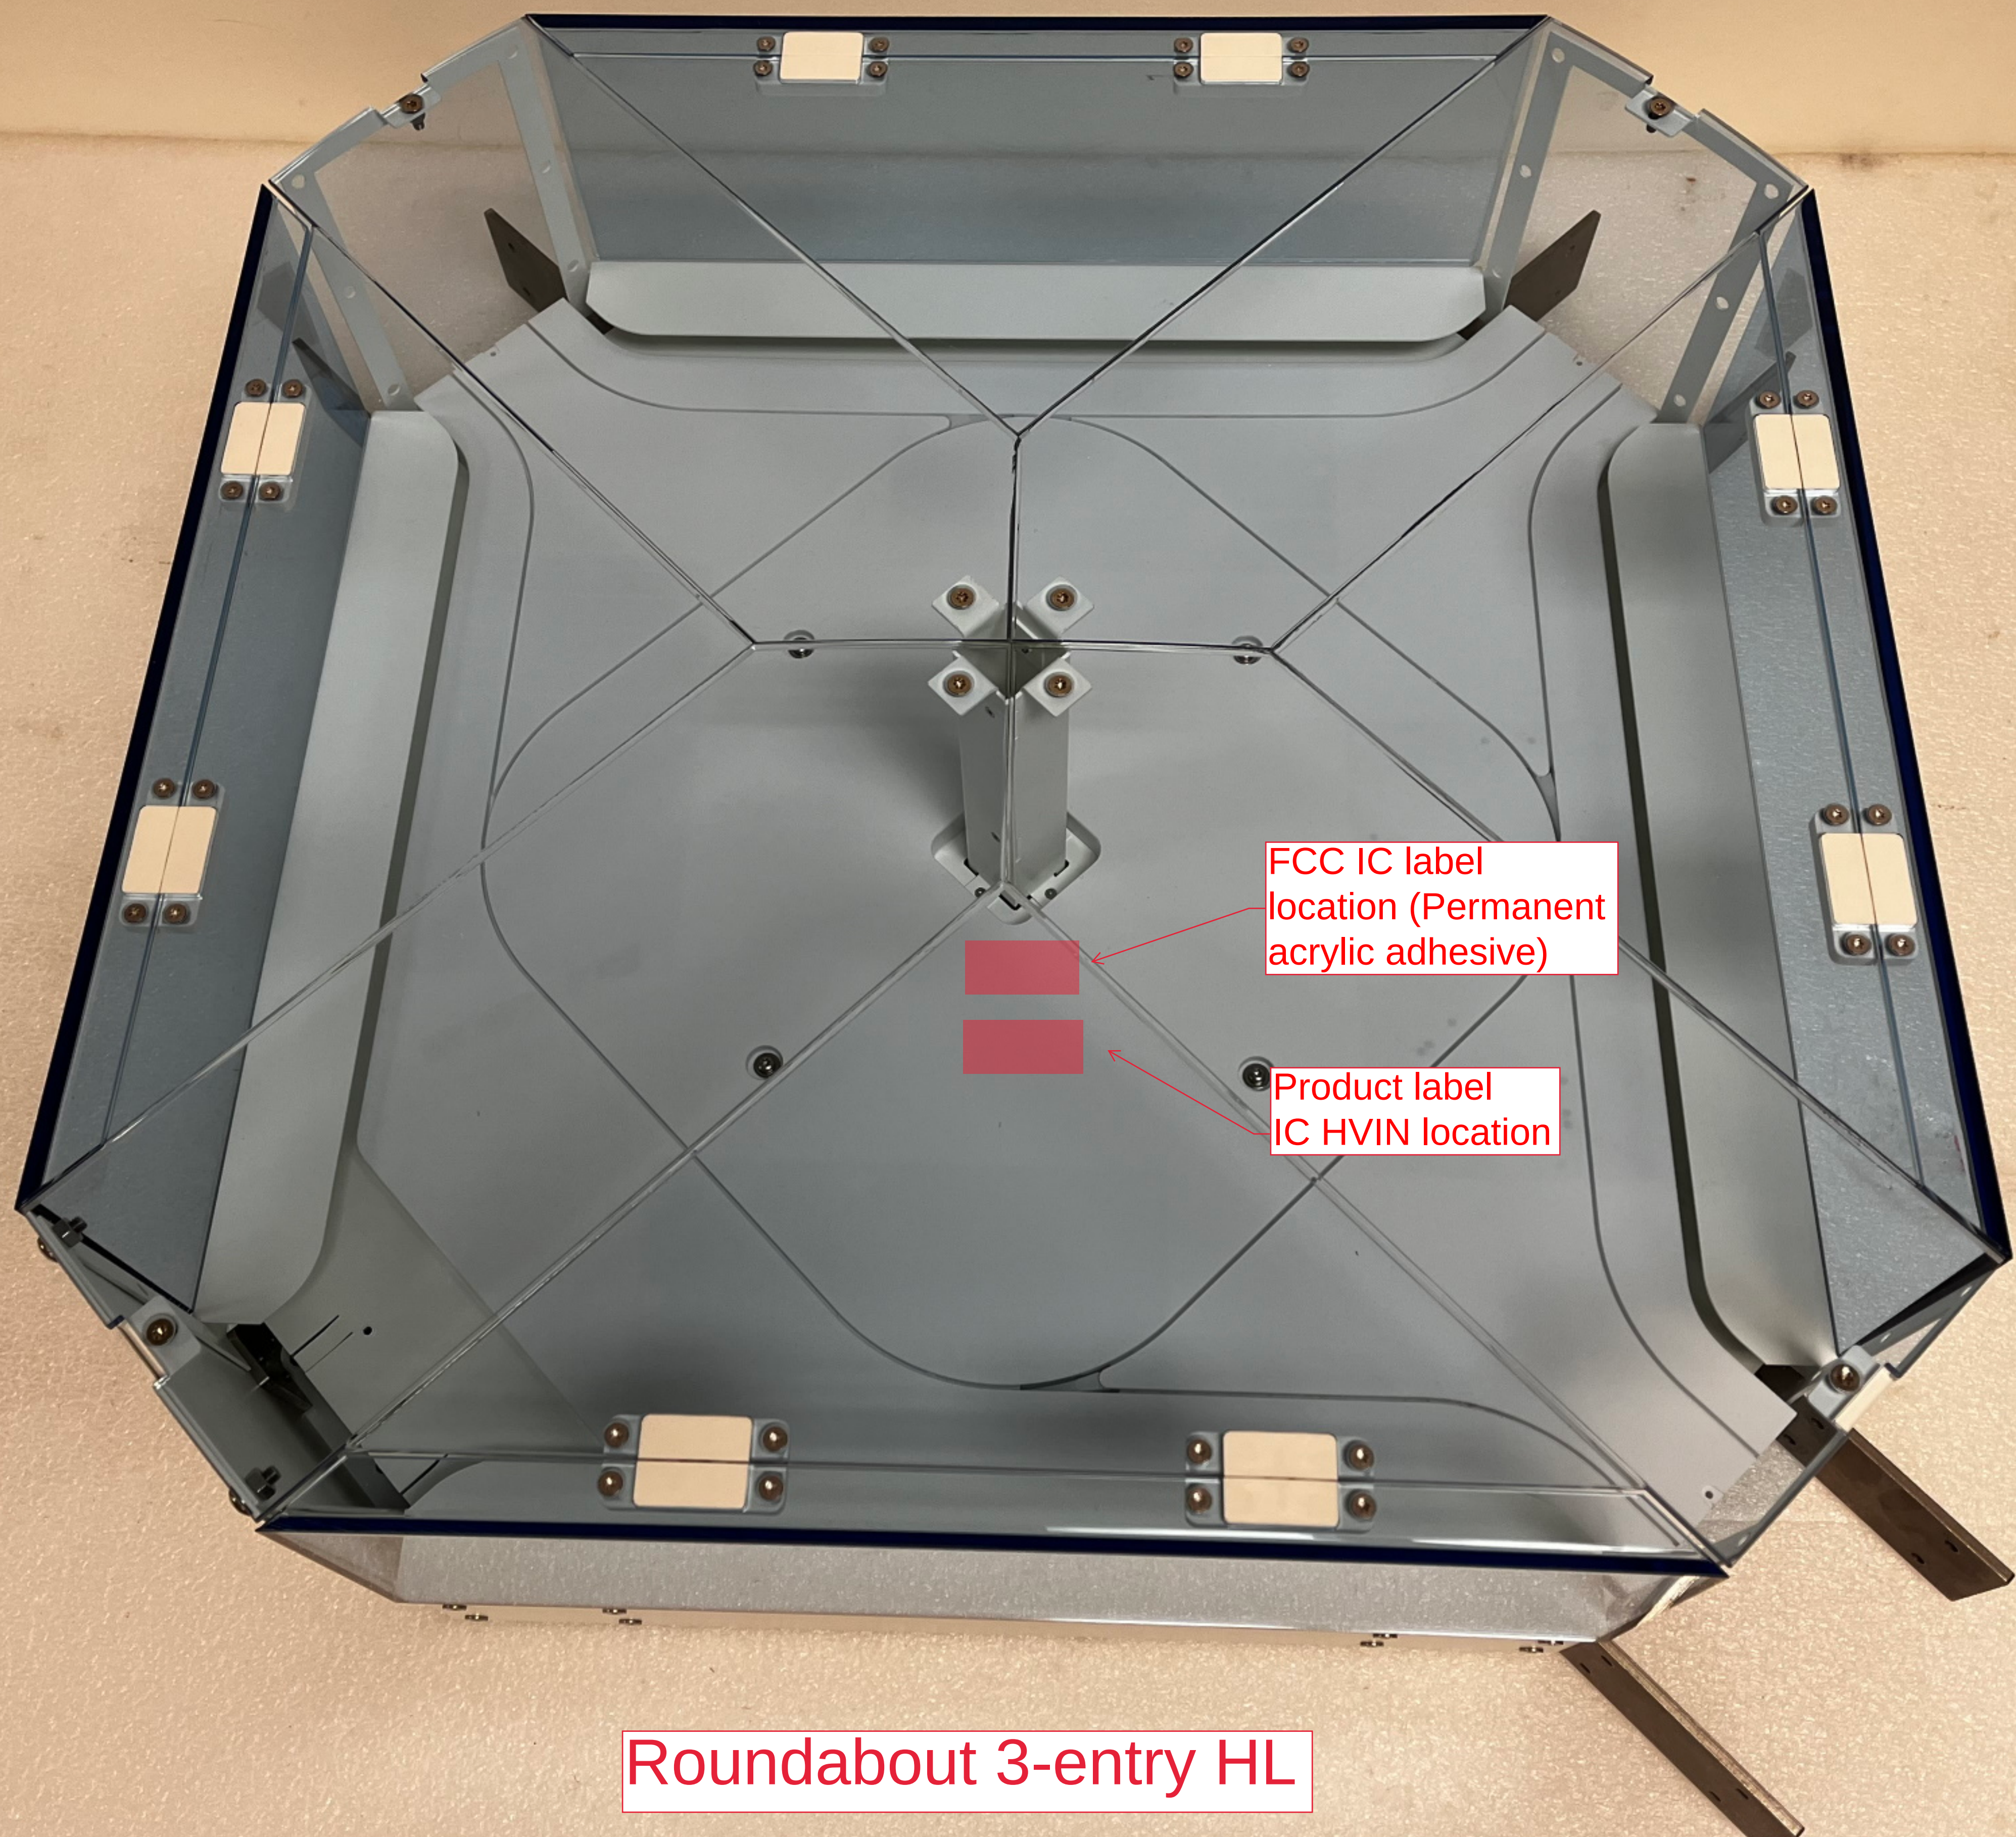

FCC IC label
location (Permanent
acrylic adhesive)

Product label
IC HVIN location

Roundabout 3-entry HL