

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.

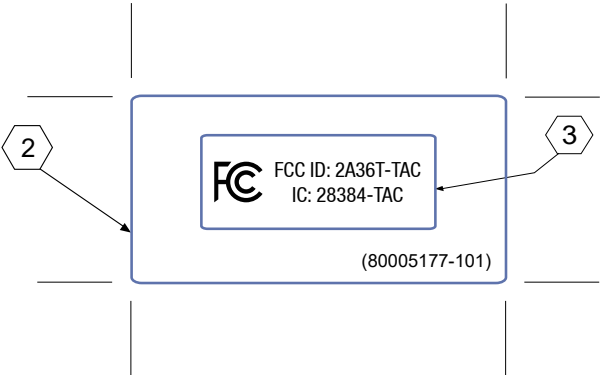
2 PRINTING SPECIFICATION:

INK COLOR - BLACK
BACKGROUND - WHITE
MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE - 2.0 x 1.0 ± .02
CORNER RADIUS - .05 ± .02
ROLL SIZE - 500, MAX

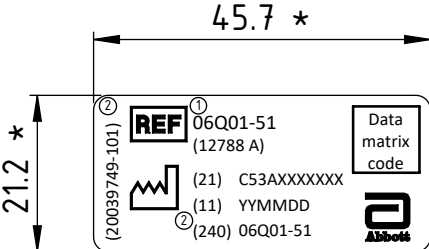

3 INNER DIE CUT: 1.25 x 0.5 ± .02

4. DIE CUT TO LINER.
PERFORATE LINER BETWEEN LABELS.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.
5. LABEL MUST CONFORM TO UL 969 AND CSA 22.2 NO. 0.15-95 AND
SHALL BE UL APPROVED MATERIAL, WITH SUPPLIER NAME AND
LABEL NAME OR DESIGNATION ON INSIDE OF ROLL CORE.
6. LABEL MUST BE PROCURED FROM UL AUTHORIZED
SUPPLIER.
7. REFERENCE S14913.
8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS PART
MUST BE REVIEWED BY EMC/SAFETY GROUP. LABEL TO BE U.L.
RECOGNIZED COMPONENT CATEGORY PGDQ2/PGDQ8.
EMC/SAFETY GROUP MUST REVIEW ALL SUPPLIERS.
9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE
LATEST REVISION OF ABBOTT SPECIFICATION S205053.



CONFIDENTIAL INFORMATION
CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61, DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 03/03/23	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA		
	MATERIAL:	2			
	APPLIED FINISH:	None	TITLE: LABEL, TAC FCC - IC ID		
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010 ANGULAR ± 2° 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.			SCALE 1/1	SIZE B	DWG NO. 80005177-101
			REV. A		
			DO NOT SCALE DRAWING		SHEET 1 OF 1

1	2	3	4
A			B
C			C
D			D
E	Fonts: 1) Calibri 8 normal 2) Calibri 7 normal		E
F	21.2 * 45.7 * 		F
*: Deviating dimensions require the consent of Abbott / *: Abweichende Maße bedürfen der Zustimmung durch Abbott			
Material requirements: self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C / Materialanforderungen: Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C			
		General tolerances DIN ISO 2768 - mK	Surface finish DIN ISO 1302
		Scale 1:1	Weight: 0.00 g
		Material	Sale No. 12788 Revision A
		Date Cre. Part 23.11.2022 Cre. Drw. 23.11.2022 Appv'd Standard	Signature wredekk wredekk
		Title Component Label Tube Assessment Center (TAC)	
		Article No. 20039749-101	Sheet 1 / 1
Rev.	Change	Date	Name
		Refer to protection notice ISO 16016	
		Replacement for: 20037093	Replaced by:
1	2	3	4

FCC IC label location
(Permanent acrylic
adhesive)

Component label
IC HVIN location

