

FCC Radio Test Report

FCC ID: 2AJN7-TP00143AL

Report No. : BTL-FCCP-15-2112T127
Equipment : Notebook Computer
Model Name : TP00143AL
Brand Name : Lenovo
Applicant : LC Future Center
Address : 7F., No. 780, Beian Rd., Zhongshan Dist., Taipei City 104, Taiwan
Manufacturer : Lenovo PC HK Limited
Address : 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R. China

Radio Function : LTE Band 26

FCC Rule Part(s) : FCC CFR Title 47, Part 90(S)
Measurement : ANSI C63.26-2015
Procedure(s) : ANSI/TIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

Date of Receipt : 2022/1/13
Date of Test : 2022/1/13 ~ 2022/3/11
Issued Date : 2022/3/31

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Eric Lee
Eric Lee, Engineer

Approved by : Jerry Chuang
Jerry Chuang, Supervisor

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	7
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4	SUPPORT UNITS	8
3	AC POWER LINE CONDUCTED EMISSIONS TEST	9
3.1	LIMIT	9
3.2	TEST PROCEDURE	9
3.3	DEVIATION FROM TEST STANDARD	9
3.4	TEST SETUP	10
3.5	TEST RESULT	10
4	EFFECTIVE RADIATED POWER MEASUREMENT	11
4.1	LIMIT	11
4.2	TEST PROCEDURE	11
4.3	DEVIATION FROM TEST STANDARD	11
4.4	TEST SETUP	12
4.5	EUT OPERATING CONDITIONS	12
4.6	TEST RESULT	12
5	RADIATED SPURIOUS EMISSIONS MEASUREMENT	13
5.1	LIMIT	13
5.2	TEST PROCEDURE	13
5.3	DEVIATION FROM TEST STANDARD	13
5.4	TEST SETUP	14
5.5	EUT OPERATING CONDITIONS	14
5.6	TEST RESULT	14
6	LIST OF MEASURING EQUIPMENTS	15
7	EUT TEST PHOTO	16
8	EUT PHOTOS	16
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	17
APPENDIX B	EFFECTIVE RADIATED POWER	22
APPENDIX C	RADIATED SPURIOUS EMISSIONS	29

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-15-2112T127	R00	Original Report.	2022/3/31	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
2.1046 90.635 (b)	Conducted Output Power Effective Radiated Power	APPENDIX B	Pass	-----
2.1049 90.209	Occupied Bandwidth	NOTE (3)	Pass	-----
2.1053 90.691	Mask Measurements	NOTE (3)	Pass	-----
2.1053 90.691	Radiated Spurious Emissions	APPENDIX C	Pass	-----
2.1055 90.213	Frequency Stability Temperature & Voltage	NOTE (3)	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This item is demonstrated to full compliance referring to the test report number FG003022 of the integrated module (model name: L860-GL-16, FCC ID: ZMOL860GL16), according to KDB 996369 D02 Q1 a) 2).
- (4) The ac power lines conducted emissions and radiated emissions are tested to demonstrate full compliance of both module integrated into the host and host itself.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

- C05 CB08 CB11 CB15 CB16
 SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Effective Radiated Power and Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	23 °C, 60 %	AC 120V	Angela Wang
Conducted Output Power	23.5 °C, 58.5 %	AC 120V	William Wei
Effective Radiated Power	Refer to data	AC 120V	Vincent Lee
Radiated Spurious Emissions	Refer to data	AC 120V	Vincent Lee Eddie Lee

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Notebook Computer				
Model Name	TP00143AL				
Brand Name	Lenovo				
Model Difference	N/A				
Power Source	DC voltage supplied from External Power Supply. (Lenovo/ ADL135SLC3A, ADL135SCC2A)				
Power Rating	I/P: 100-240V~ 2.5A 50-60Hz O/P: DC20.0V 6.75A 135.0W				
WWAN Module	Fibocom / L860-GL-16				
Operation Frequency	Band	UL Frequency (MHz)	DL Frequency (MHz)		
	LTE 26	814 ~ 824	859 ~ 869		
Maximum ERP	Band	BW (MHz)	Mode	Power (W)	
			1.4	QPSK	0.064
				16QAM	0.053
			3	QPSK	0.065
				16QAM	0.054
			5	QPSK	0.065
				16QAM	0.054
			10	QPSK	0.065
16QAM	0.051				
Test Model	TP00143AL				
Sample Status	Engineering Sample				
EUT Modification(s)	N/A				

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main	AWAN	DC33001WF00	PIFA	I-PEX	-2.05	LTE Band 26
Aux	AWAN	DC33001WF10	PIFA	I-PEX	-	RX only

2.2 TEST MODES

Test Items	Band	Test Mode	Note
AC Power Line Conducted Emissions	-	Normal/Idle	-
Conducted Output Power	LTE Band 26	Refer to APPENDIX B	-
Effective Radiated Power	LTE Band 26	TX Mode (CH 26765)	-
Radiated Spurious Emissions	LTE Band 26	TX Mode (CH 26765)	-

NOTE:


(1) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.

(2) For Radiated Spurious Emissions both QPSK and 16QAM are evaluated, but only the worst case (QPSK) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

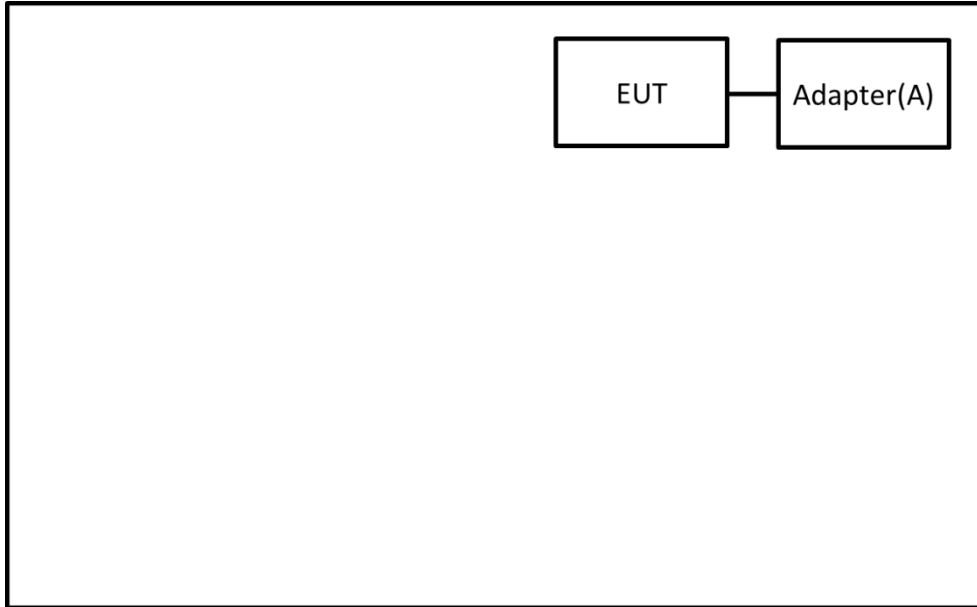

Radiated Emissions Test

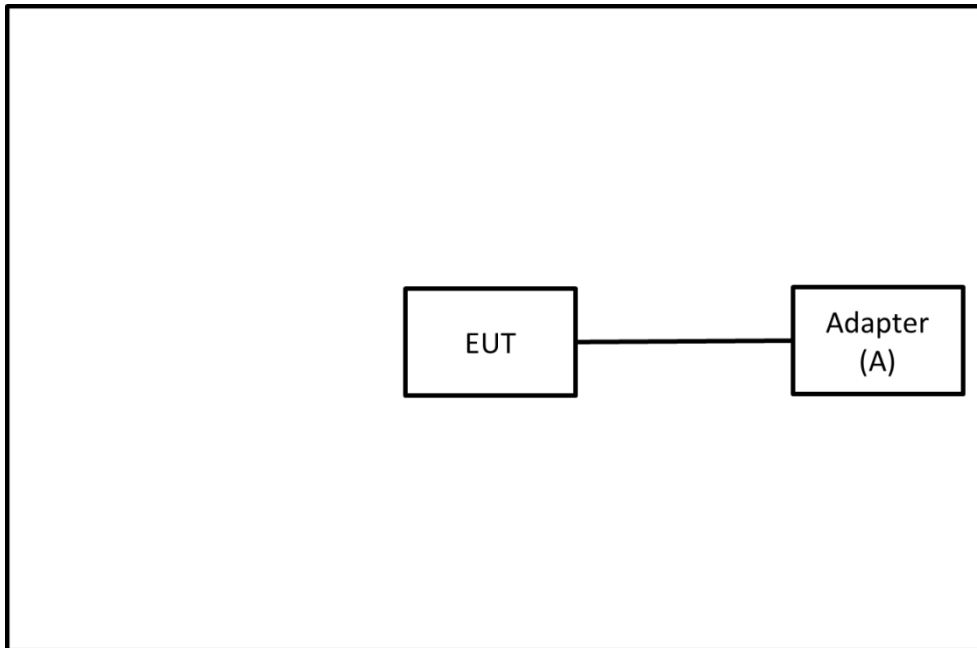

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	Lenovo	ADL135SLC3A	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
-	-	-	-	-	-

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

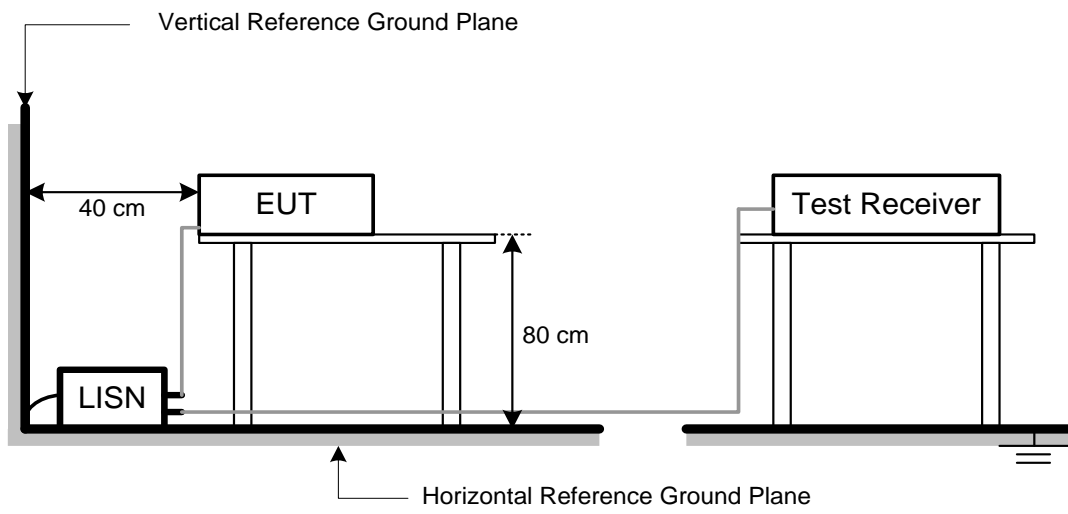

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 EFFECTIVE RADIATED POWER MEASUREMENT

4.1 LIMIT

Mobile / Portable station are limited to 100 watts e.r.p.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
-29.66	+	34.26	=	4.60

Measurement Value		Limit Value		Margin Level
4.60	-	38.45	=	-33.85

4.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15dBi.$
- e. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

Conducted Measurement:



Radiated Measurement:

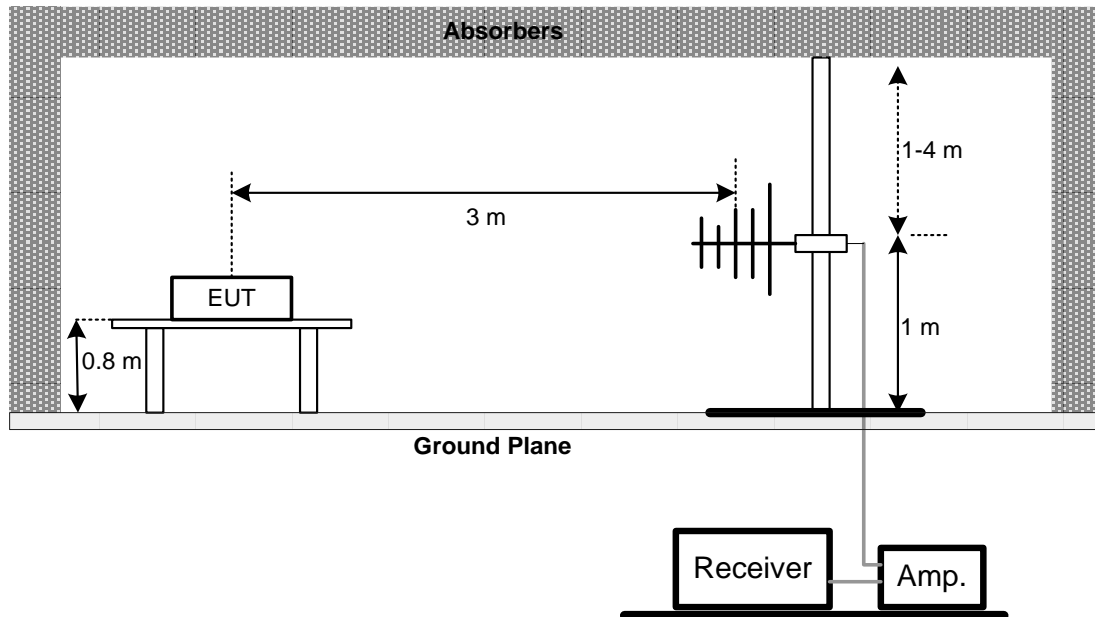

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B.

5 RADIATED SPURIOUS EMISSIONS MEASUREMENT

5.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

(1) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
-50.43	+	-2.11	=	-52.54

Measurement Value		Limit Value		Margin Level
-52.54	-	-13	=	-39.54

5.2 TEST PROCEDURE


The testing follows FCC KDB 971168 v03r01 Section 6.2.

- f. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- g. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- h. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- i. ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}$.
- j. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

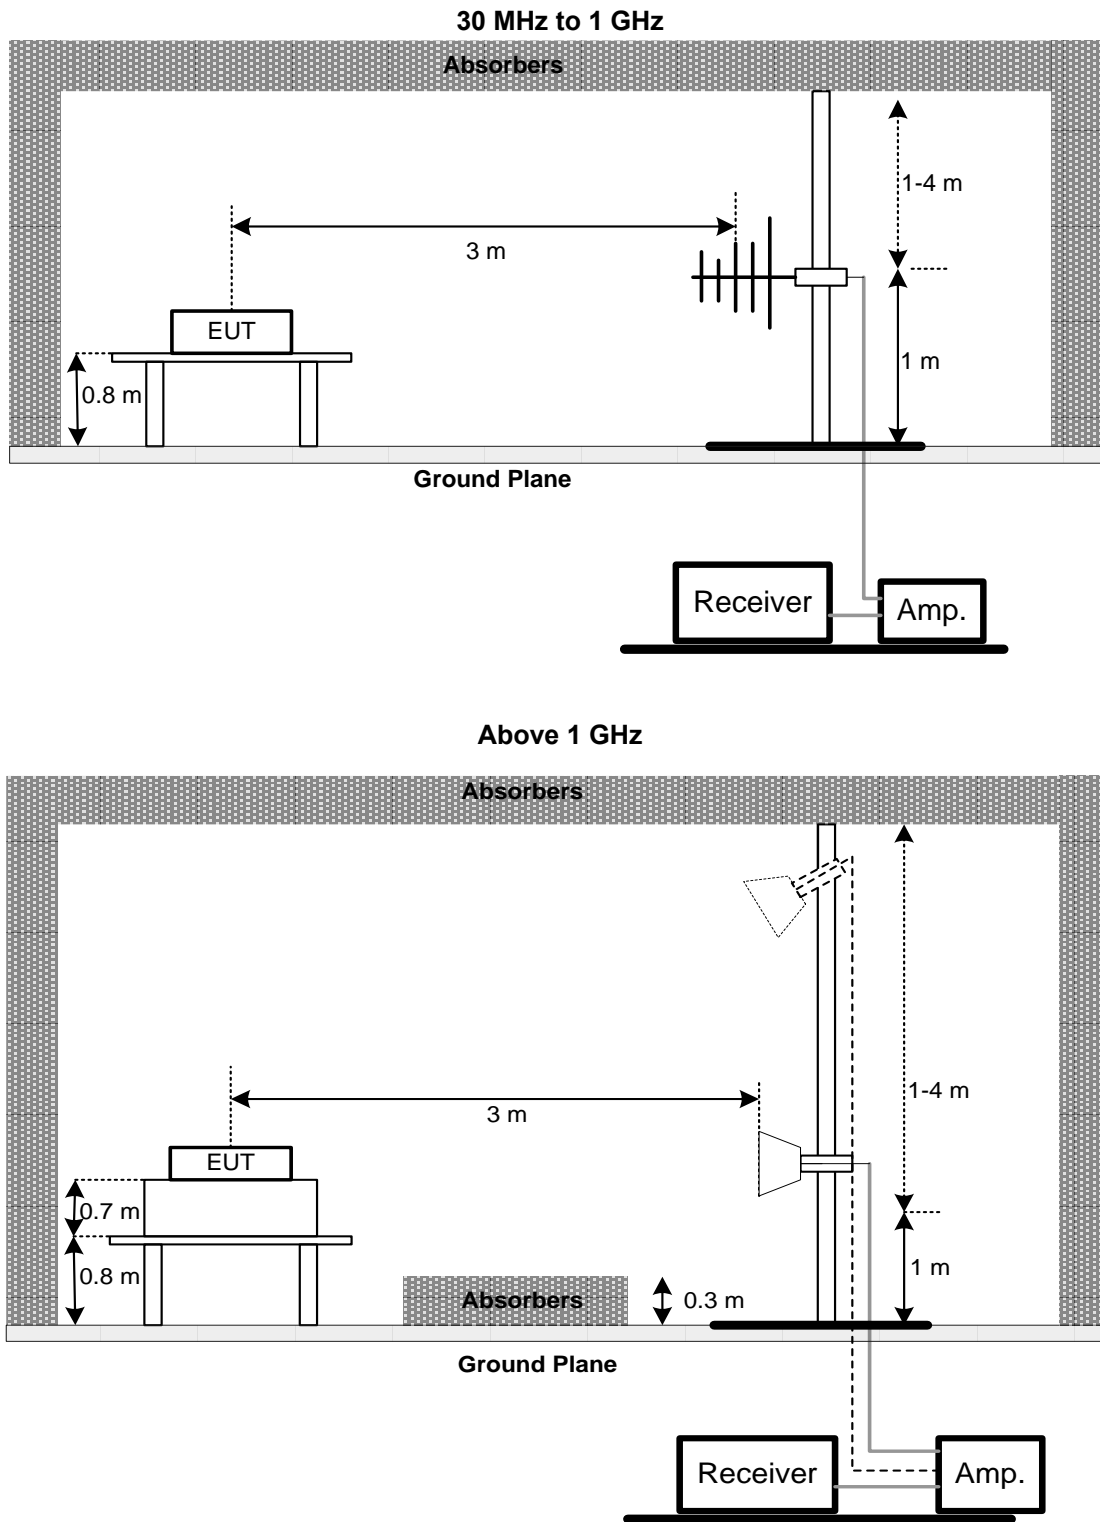

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX C.

6 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2021/3/10	2022/3/9
2	Test Cable	EMCI	EMCCFD300-BM-BMR-6000	170714	2021/6/7	2022/6/6
3	EMI Test Receiver	R&S	ESR 7	101433	2021/11/24	2022/11/23
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Conducted Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	8960 Series 10 Wireless Com Test Set	Agilent	E5515C	GB47390193	2021/7/23	2022/7/22
2	Radio Communication Analyzer	Anritsu	MT8820C	6201381608	2021/12/15	2022/12/14

Effective Radiated Power and Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980222	2021/4/8	2022/4/7
3	Test Cable	EMCI	EMC104-SM-1000	180809	2021/4/8	2022/4/7
4	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
6	MXE EMI Receiver	Agilent	N9038A	MY56400087	2021/5/27	2022/5/26
7	Signal Analyzer	Agilent	N9010A	MY56480554	2021/8/25	2022/8/24
8	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/2	2022/6/1
9	Horn Ant	Schwarzbeck	BBHA 9170	340	2021/7/9	2022/7/8
10	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-352	2021/8/11	2022/8/10
11	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2021/8/11	2022/8/10
12	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A
13	8960 Series 10 Wireless Com Test Set	Agilent	E5515C	GB47390193	2021/7/23	2022/7/22
14	Radio Communication Analyzer (LTE)	Anritsu	MT8821C	6262044728	2021/11/28	2022/11/27

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

7 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2112T127-1 (APPENDIX-TEST PHOTOS).

8 EUT PHOTOS

Please refer to document Appendix No.: EP-2112T127-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2022/2/16
Test Frequency	-	Phase	Line

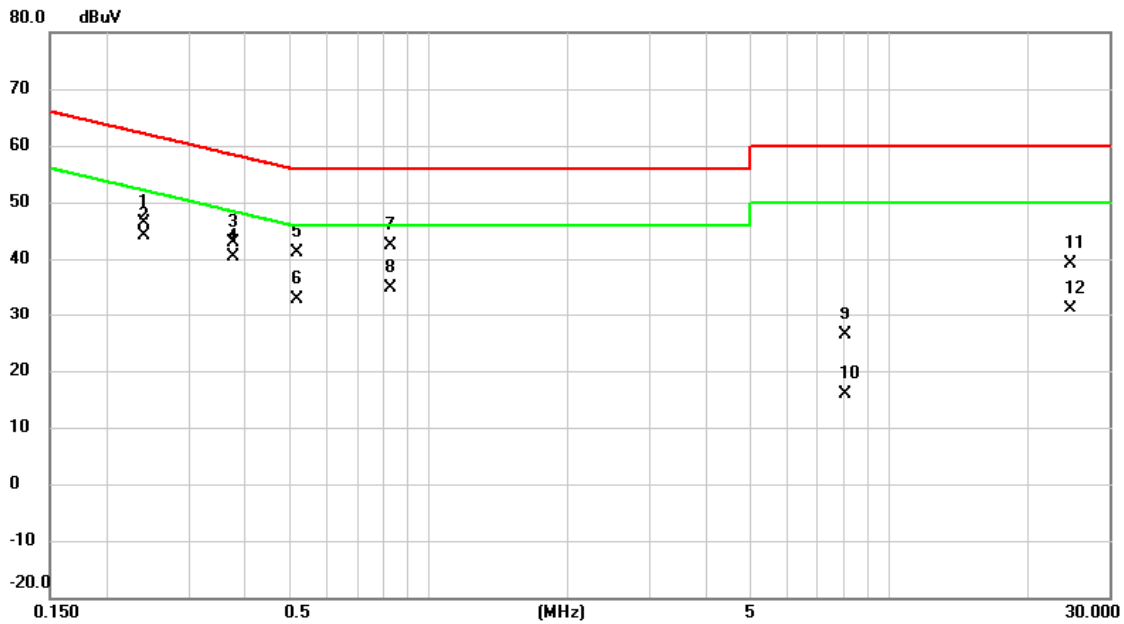


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2400	36.70	9.72	46.42	62.10	-15.68	QP	
2		0.2400	34.34	9.72	44.06	52.10	-8.04	AVG	
3		0.3772	33.21	9.72	42.93	58.34	-15.41	QP	
4	*	0.3772	30.69	9.72	40.41	48.34	-7.93	AVG	
5		0.5190	31.49	9.73	41.22	56.00	-14.78	QP	
6		0.5190	23.23	9.73	32.96	46.00	-13.04	AVG	
7		0.8272	32.56	9.74	42.30	56.00	-13.70	QP	
8		0.8272	25.06	9.74	34.80	46.00	-11.20	AVG	
9		8.0520	16.43	10.06	26.49	60.00	-33.51	QP	
10		8.0520	5.78	10.06	15.84	50.00	-34.16	AVG	
11		24.6525	28.97	10.24	39.21	60.00	-20.79	QP	
12		24.6525	20.84	10.24	31.08	50.00	-18.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2022/2/16
Test Frequency	-	Phase	Neutral

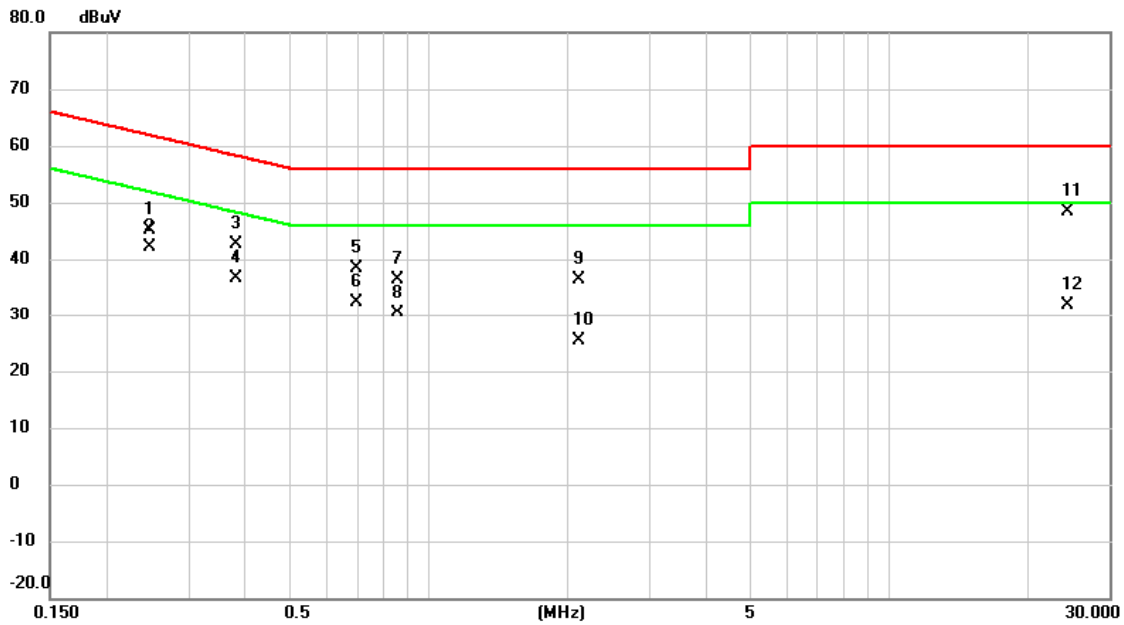


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2468	35.34	9.72	45.06	61.86	-16.80	QP	
2	*	0.2468	32.44	9.72	42.16	51.86	-9.70	AVG	
3		0.3817	32.96	9.73	42.69	58.24	-15.55	QP	
4		0.3817	26.99	9.73	36.72	48.24	-11.52	AVG	
5		0.6990	28.70	9.74	38.44	56.00	-17.56	QP	
6		0.6990	22.76	9.74	32.50	46.00	-13.50	AVG	
7		0.8587	26.55	9.75	36.30	56.00	-19.70	QP	
8		0.8587	20.65	9.75	30.40	46.00	-15.60	AVG	
9		2.1188	26.67	9.78	36.45	56.00	-19.55	QP	
10		2.1188	15.59	9.78	25.37	46.00	-20.63	AVG	
11		24.4298	38.03	10.41	48.44	60.00	-11.56	QP	
12		24.4298	21.56	10.41	31.97	50.00	-18.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2022/2/16
Test Frequency	-	Phase	Line

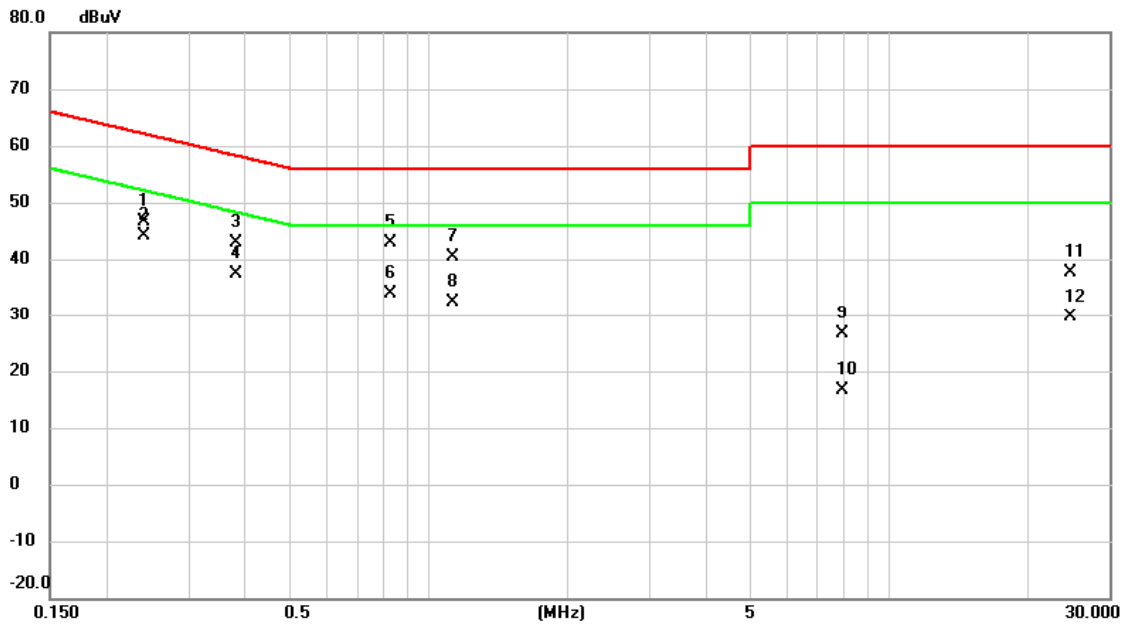


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2400	36.86	9.72	46.58	62.10	-15.52	QP	
2	*	0.2400	34.53	9.72	44.25	52.10	-7.85	AVG	
3		0.3817	33.21	9.72	42.93	58.24	-15.31	QP	
4		0.3817	27.63	9.72	37.35	48.24	-10.89	AVG	
5		0.8250	33.19	9.74	42.93	56.00	-13.07	QP	
6		0.8250	24.12	9.74	33.86	46.00	-12.14	AVG	
7		1.1242	30.66	9.74	40.40	56.00	-15.60	QP	
8		1.1242	22.63	9.74	32.37	46.00	-13.63	AVG	
9		7.9148	16.47	10.05	26.52	60.00	-33.48	QP	
10		7.9148	6.52	10.05	16.57	50.00	-33.43	AVG	
11		24.6480	27.37	10.24	37.61	60.00	-22.39	QP	
12		24.6480	19.51	10.24	29.75	50.00	-20.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2022/2/16
Test Frequency	-	Phase	Neutral

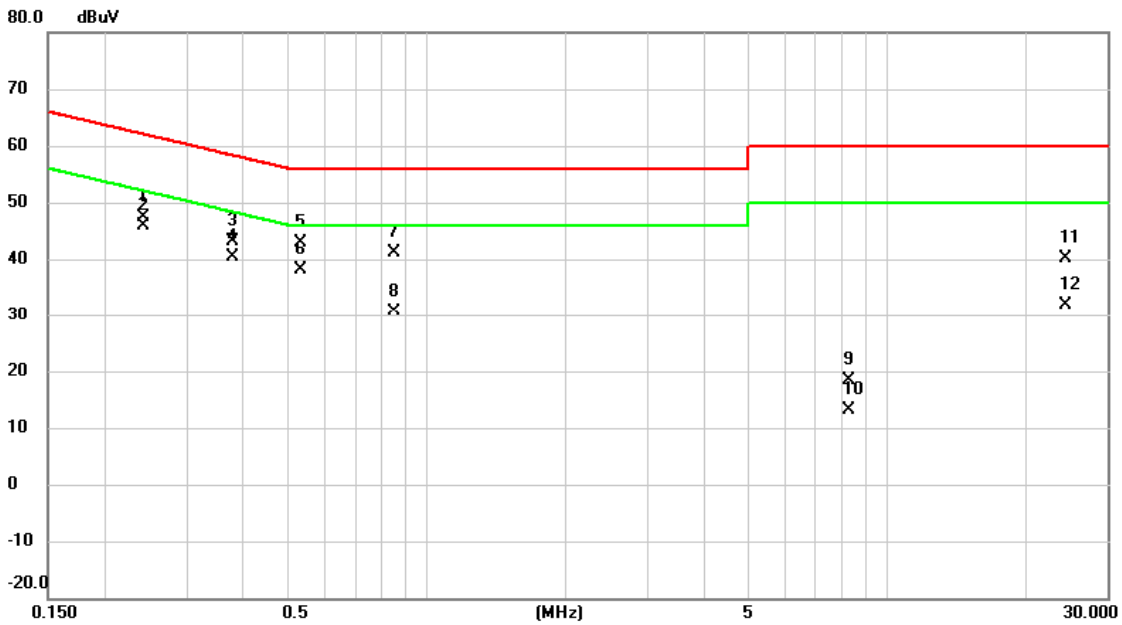

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2423	37.60	9.72	47.32	62.02	-14.70	QP	
2	*	0.2423	36.16	9.72	45.88	52.02	-6.14	AVG	
3		0.3795	33.46	9.73	43.19	58.29	-15.10	QP	
4		0.3795	30.71	9.73	40.44	48.29	-7.85	AVG	
5		0.5347	33.14	9.74	42.88	56.00	-13.12	QP	
6		0.5347	28.43	9.74	38.17	46.00	-7.83	AVG	
7		0.8475	31.31	9.75	41.06	56.00	-14.94	QP	
8		0.8475	20.86	9.75	30.61	46.00	-15.39	AVG	
9		8.2703	8.38	10.10	18.48	60.00	-41.52	QP	
10		8.2703	2.96	10.10	13.06	50.00	-36.94	AVG	
11		24.4410	29.74	10.41	40.15	60.00	-19.85	QP	
12		24.4410	21.53	10.41	31.94	50.00	-18.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B EFFECTIVE RADIATED POWER

Conducted Output Power and Calculated ERP:
LTE Band 26 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power	ERP power (dBm)	ERP power (W)			
Band 26	1.4M	26697	814.7	QPSK	1	0	0	22.21	18.01	0.063			
					1	2	0	22.23	18.03	0.064			
					1	5	0	21.97	17.77	0.060			
					3	0	1	21.32	17.12	0.052			
					3	1	1	21.27	17.07	0.051			
					3	3	1	21.15	16.95	0.050			
				16QAM	6	0	1	21.27	17.07	0.051			
					1	0	1	21.39	17.19	0.052			
					1	2	1	21.35	17.15	0.052			
					1	5	1	21.04	16.84	0.048			
					3	0	1	20.22	16.02	0.040			
					3	1	1	20.37	16.17	0.041			
		26740	819.0	QPSK	819.0	3	2	1	20.00	15.80	0.038		
						6	0	2	20.36	16.16	0.041		
						1	0	0	22.26	18.06	0.064		
						1	2	0	22.21	18.01	0.063		
						1	5	0	21.95	17.75	0.060		
						3	0	1	21.37	17.17	0.052		
				16QAM	3	1	1	21.25	17.05	0.051			
					3	3	1	21.13	16.93	0.049			
					6	0	1	21.32	17.12	0.052			
					1	0	1	21.44	17.24	0.053			
					1	2	1	21.40	17.20	0.052			
					1	5	1	21.02	16.82	0.048			
				26783	823.3	QPSK	823.3	3	0	1	20.27	16.07	0.040
								3	1	1	20.35	16.15	0.041
								3	2	1	19.98	15.78	0.038
								6	0	2	20.41	16.21	0.042
								1	0	0	22.21	18.01	0.063
								1	2	0	22.17	17.97	0.063
		16QAM	1			5	0	21.84	17.64	0.058			
			3			0	1	21.32	17.12	0.052			
			3			1	1	21.21	17.01	0.050			
			3			3	1	21.02	16.82	0.048			
			6			0	1	21.27	17.07	0.051			
			1			0	1	21.39	17.19	0.052			
		16QAM	1	2	1	21.35	17.15	0.052					
			1	5	1	20.91	16.71	0.047					
			3	0	1	20.22	16.02	0.040					
			3	1	1	20.31	16.11	0.041					
			3	2	1	19.87	15.67	0.037					
			6	0	2	20.36	16.16	0.041					

NOTE:

- (1) EIRP = Average power + Antenna gain.
- (2) ERP = EIRP - 2.15.
- (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power	ERP power (dBm)	ERP power (W)
Band 26	3M	26705	825.5	QPSK	1	0	0	22.26	18.06	0.064
					1	7	0	22.28	18.08	0.064
					1	14	0	22.02	17.82	0.061
					8	0	1	21.37	17.17	0.052
					8	3	1	21.32	17.12	0.052
					8	7	1	21.20	17.00	0.050
				15	0	1	21.32	17.12	0.052	
				16QAM	1	0	1	21.44	17.24	0.053
					1	7	1	21.40	17.20	0.052
					1	14	1	21.09	16.89	0.049
					8	0	2	20.27	16.07	0.040
					8	3	2	20.42	16.22	0.042
					8	7	2	20.05	15.85	0.038
				15	0	2	20.41	16.21	0.042	
				26740	836.5	QPSK	1	0	0	22.31
		1	7				0	22.26	18.06	0.064
		1	14				0	22.00	17.80	0.060
		8	0				1	21.42	17.22	0.053
		8	3				1	21.30	17.10	0.051
		8	7				1	21.18	16.98	0.050
		15	0			1	21.37	17.17	0.052	
		16QAM	1			0	1	21.49	17.29	0.054
			1			7	1	21.45	17.25	0.053
			1			14	1	21.07	16.87	0.049
			8			0	2	20.32	16.12	0.041
			8			3	2	20.40	16.20	0.042
			8			7	2	20.03	15.83	0.038
		15	0			2	20.46	16.26	0.042	
		26775	847.5			QPSK	1	0	0	22.26
				1	7		0	22.22	18.02	0.063
				1	14		0	21.89	17.69	0.059
				8	0		1	21.37	17.17	0.052
				8	3		1	21.26	17.06	0.051
				8	7		1	21.07	16.87	0.049
				15	0	1	21.32	17.12	0.052	
				16QAM	1	0	1	21.44	17.24	0.053
					1	7	1	21.40	17.20	0.052
					1	14	1	20.96	16.76	0.047
					8	0	2	20.27	16.07	0.040
					8	3	2	20.36	16.16	0.041
					8	7	2	19.92	15.72	0.037
				15	0	2	20.41	16.21	0.042	

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

 (3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10) / 1000}$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power	ERP power (dBm)	ERP power (W)				
Band 26	5M	26715	816.5	QPSK	1	0	0	22.31	18.11	0.065				
					1	12	0	22.33	18.13	0.065				
					1	24	0	22.07	17.87	0.061				
					12	0	1	21.42	17.22	0.053				
					12	6	1	21.37	17.17	0.052				
					12	13	1	21.25	17.05	0.051				
				16QAM	25	0	1	21.37	17.17	0.052				
					1	0	0	21.49	17.29	0.054				
					1	12	0	21.45	17.25	0.053				
					1	24	0	21.14	16.94	0.049				
					12	0	1	20.32	16.12	0.041				
					12	6	1	20.47	16.27	0.042				
		26740	819.0	QPSK	819.0	QPSK	12	13	1	20.10	15.90	0.039		
							25	0	1	20.46	16.26	0.042		
							1	0	0	22.36	18.16	0.065		
							1	12	0	22.31	18.11	0.065		
							1	24	0	22.05	17.85	0.061		
							12	0	1	21.47	17.27	0.053		
				16QAM	819.0	16QAM	819.0	16QAM	12	6	1	21.35	17.15	0.052
									12	13	1	21.23	17.03	0.050
									25	0	1	21.42	17.22	0.053
									1	0	0	21.54	17.34	0.054
									1	12	0	21.50	17.30	0.054
									1	24	0	21.12	16.92	0.049
		26765	821.5	QPSK	821.5	QPSK	12	0	1	20.37	16.17	0.041		
							12	6	1	20.45	16.25	0.042		
							12	13	1	20.08	15.88	0.039		
							25	0	1	20.51	16.31	0.043		
							1	0	0	22.31	18.11	0.065		
							1	12	0	22.27	18.07	0.064		
				16QAM	821.5	16QAM	821.5	16QAM	1	24	0	21.94	17.74	0.059
									12	0	1	21.42	17.22	0.053
									12	6	1	21.31	17.11	0.051
									12	13	1	21.12	16.92	0.049
									25	0	1	21.37	17.17	0.052
									1	0	0	21.49	17.29	0.054
16QAM	821.5	16QAM	821.5	16QAM	1	12	0	21.45	17.25	0.053				
					1	24	0	21.01	16.81	0.048				
					12	0	1	20.32	16.12	0.041				
					12	6	1	20.41	16.21	0.042				
					12	13	1	19.97	15.77	0.038				
					25	0	1	20.46	16.26	0.042				

NOTE:

- (1) EIRP = Average power + Antenna gain.
- (2) ERP = EIRP - 2.15.
- (3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power	ERP power (dBm)	ERP power (W)
Band 26	10M	26740	819.0	QPSK	1	0	0	22.47	18.27	0.067
					1	24	0	22.45	18.25	0.067
					1	49	0	22.33	18.13	0.065
					25	0	1	21.51	17.31	0.054
					25	12	1	21.44	17.24	0.053
					25	25	1	21.30	17.10	0.051
				16QAM	50	0	1	21.54	17.34	0.054
					1	0	1	21.56	17.36	0.054
					1	24	1	21.41	17.21	0.053
					1	49	1	21.27	17.07	0.051
					25	0	2	20.46	16.26	0.042
					25	12	2	20.45	16.25	0.042
					25	25	2	20.20	16.00	0.040
					50	0	2	20.47	16.27	0.042

NOTE:

- (1) EIRP = Average power + Antenna gain.
- (2) ERP = EIRP - 2.15.
- (3) P(W) = $1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Radiated ERP Power:

Test Mode	LTE Band 26	Test Date	2022/3/3
Test Channel	CH26765	Polarization	Vertical
Temp	21°C	Hum.	64%

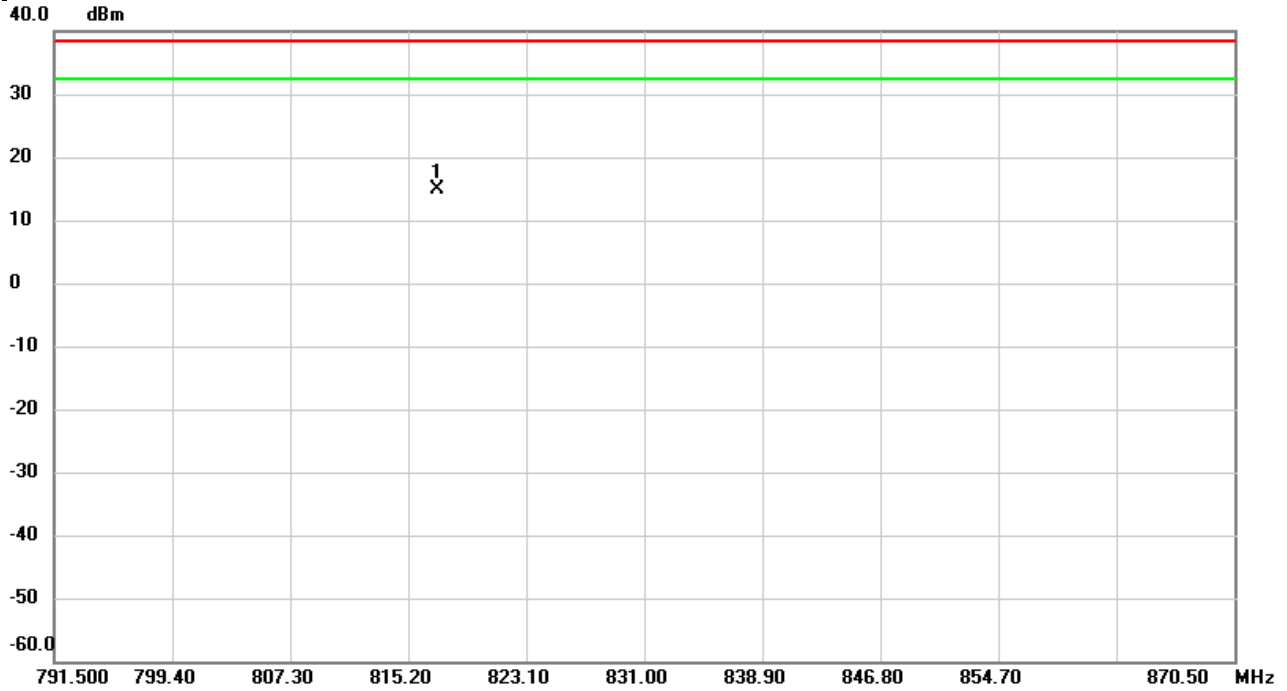


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	817.1092	-19.20	34.11	14.91	38.45	-23.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 26	Test Date	2022/3/3
Test Channel	CH26765	Polarization	Horizontal
Temp	21°C	Hum.	64%

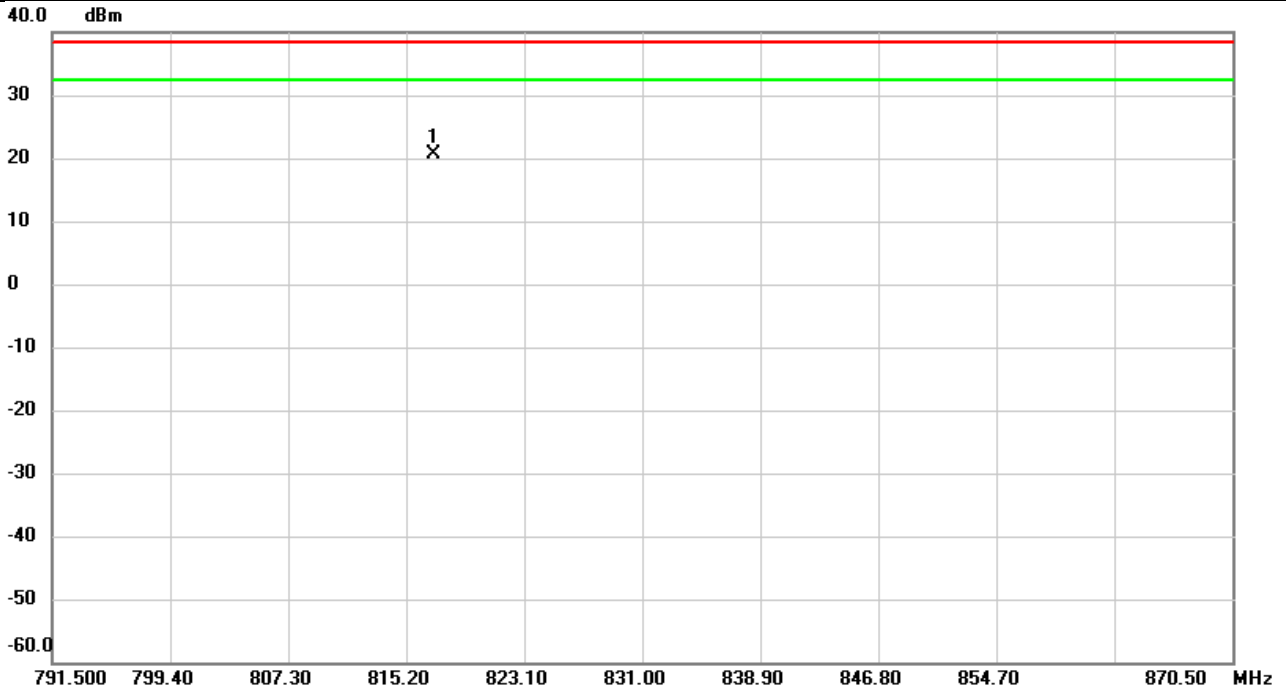


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	817.0934	-13.14	33.74	20.60	38.45	-17.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED SPURIOUS EMISSIONS

Test Mode	LTE Band 26	Test Date	2022/3/4
Test Channel	CH26865	Polarization	Horizontal
Temp	21°C	Hum.	64%

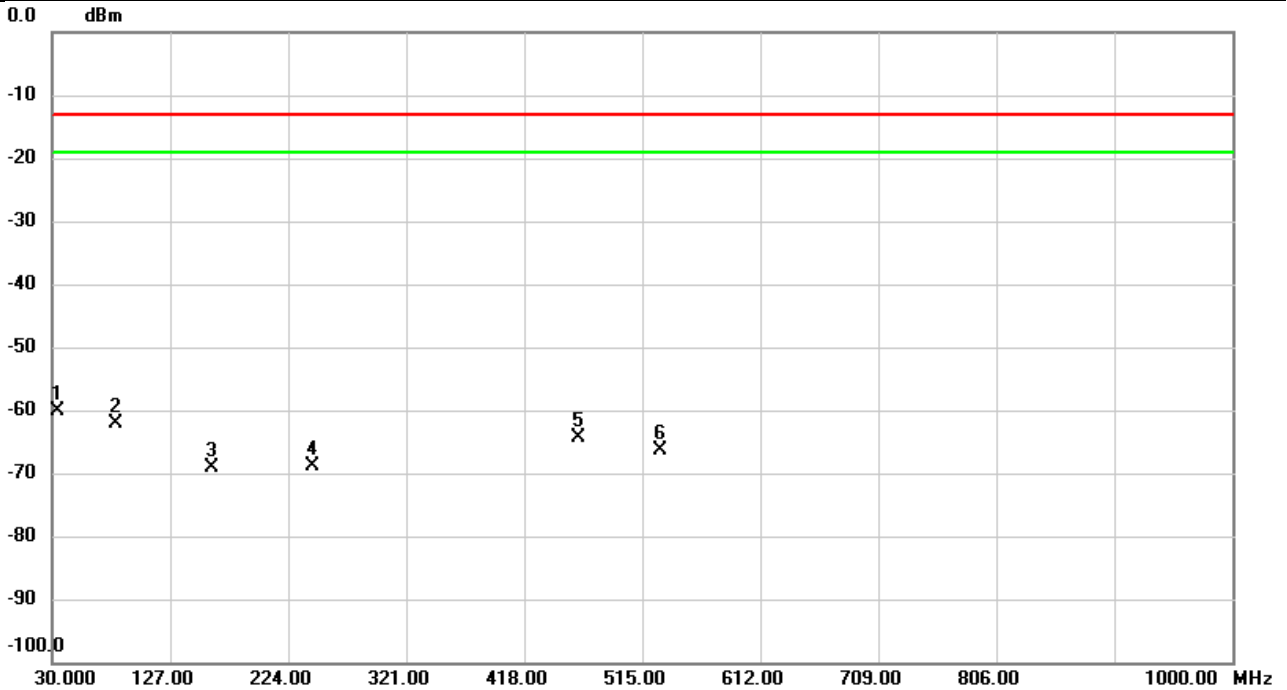


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	34.1385	-75.05	14.87	-60.18	-13.00	-47.18	peak	
2		81.8626	-67.39	5.36	-62.03	-13.00	-49.03	peak	
3		161.2733	-71.65	2.58	-69.07	-13.00	-56.07	peak	
4		244.1434	-68.32	-0.57	-68.89	-13.00	-55.89	peak	
5		462.9755	-76.82	12.43	-64.39	-13.00	-51.39	peak	
6		529.8410	-75.94	9.59	-66.35	-13.00	-53.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 26	Test Date	2022/3/4
Test Channel	CH26765	Polarization	Vertical
Temp	21°C	Hum.	64%

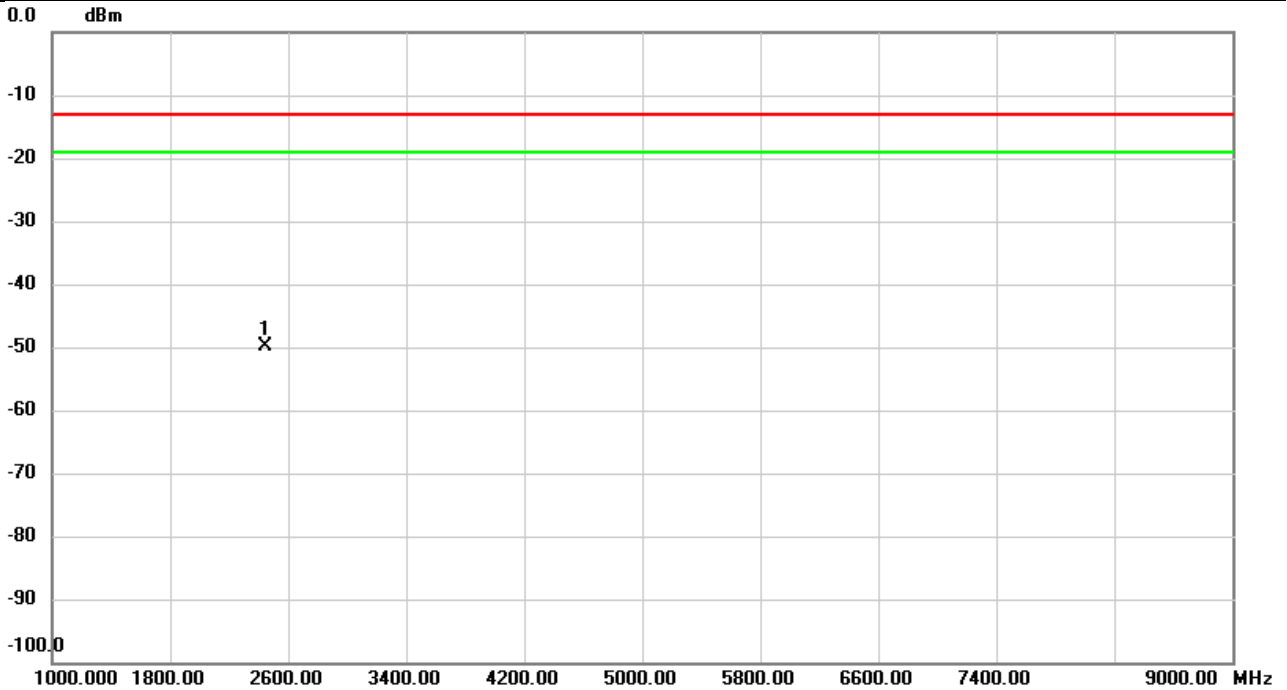


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	2444.533	-45.29	-4.51	-49.80	-13.00	-36.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 26	Test Date	2022/3/4
Test Channel	CH26765	Polarization	Horizontal
Temp	21°C	Hum.	64%

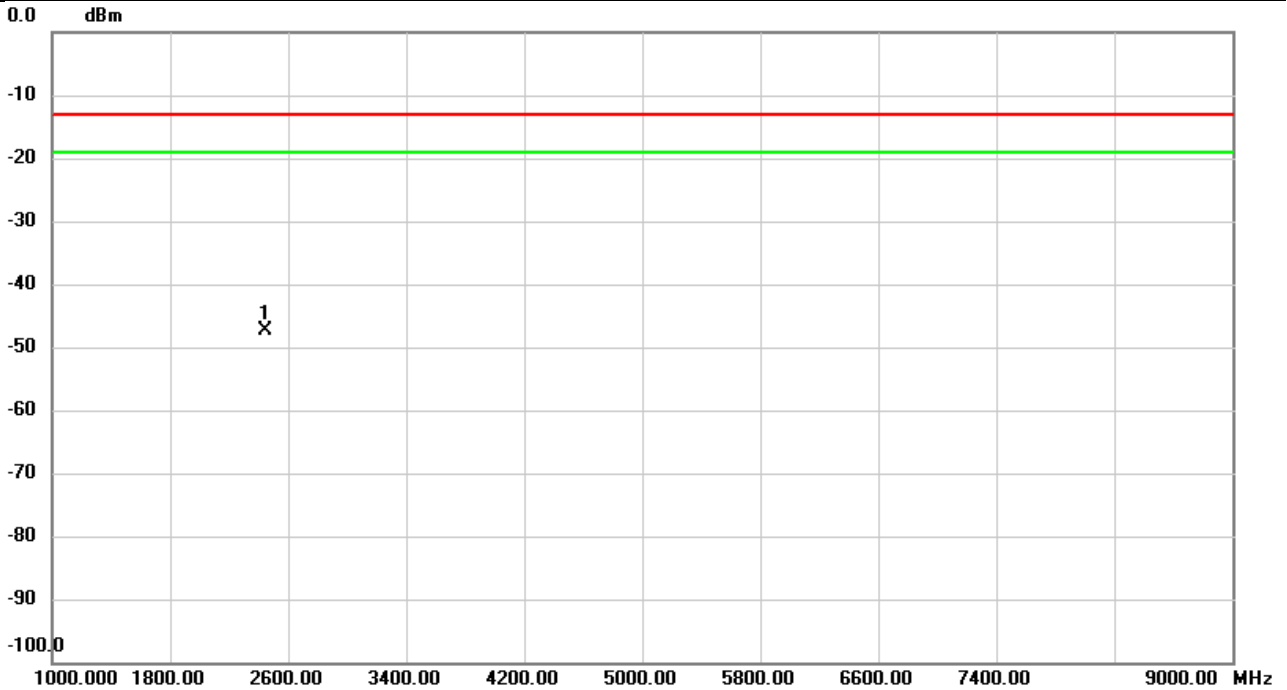

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	2444.800	-42.34	-5.11	-47.45	-13.00	-34.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report