



FCC RADIO TEST REPORT

FCC ID : 2AJN7-TP00152A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00152A, TP00152B
Marketing Name : ThinkPad T14s Gen 5, ThinkPad T14s Gen 6
Applicant : LC Future Center Limited Taiwan Branch
7F., No.780, Beian Rd., Zhongshan Dist., Taipei 104, Taiwan
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei
Economics & Technology Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27, Part 90(R), Part 90(S)

Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

The product was received on Nov. 23, 2023 and testing was performed from Nov. 30, 2023 to Jan. 03, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory



Table of Contents

History of this test report3

Summary of Test Result4

1 General Description7

 1.1 Product Feature of Equipment Under Test7

 1.2 Product Specification of Equipment Under Test..... 10

 1.3 Modification of EUT 12

 1.4 Testing Location 12

 1.5 Applicable Standards 12

2 Test Configuration of Equipment Under Test 13

 2.1 Test Mode 13

 2.2 Connection Diagram of Test System 14

 2.3 Support Unit used in test configuration and system 14

 2.4 Frequency List of Low/Middle/High Channels 15

3 Conducted Test Items26

 3.1 Measuring Instruments26

 3.2 Conducted Output Power and ERP/EIRP 27

4 Radiated Test Items 28

 4.1 Measuring Instruments28

 4.2 Radiated Spurious Emission Measurement 30

5 List of Measuring Equipment32

6 Measurement Uncertainty 33

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FG3N2403C	01	Initial issue of report	Feb. 01, 2024
FG3N2403C	02	Revise Antenna Information and Test Mode This report is an updated version, replacing the report issued on Feb. 01, 2024.	Feb. 19, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(5) §90.635	Effective Radiated Power (n5) (n26)	Pass	
	§27.50 (b)(10) §27.50 (c)(10)	Effective Radiated Power (n12) (n13) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
	§27.50 (a)(3)	Effective Isotropic Radiated Power (n30)		
	§90.542 (a)(7)	Effective Radiated Power (n14)		
	§27.50 (j)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
-	§24.232 (d) §27.50 (d)(5) §27.50 (j)(4) §27.50 (k)(4)	Peak-to-Average Ratio		-
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2)(4) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement (n30)		
	§2.1051 §90.543 (e)(2)	Conducted Band Edge Measurement (n14)		
	§2.1051 §27.53 (l)(2)	Conducted Band Edge Measurement (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)		
-	§2.1051 §90.210 (n)	Emission Mask (n14)	-	See Note
	§2.1051 §90.691	Emission masks (n26)		



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (g) §27.53 (h)§90.691	Conducted Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	-	See Note
-	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)	-	
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission (n30)	-	
-	§2.1051 §90.543 (e)(3)	Conducted Spurious Emission (n14)	-	
-	§2.1051 §27.53 (l)(2)	Conducted Spurious Emission (n77) (n78)	-	
-	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77)	-	
-	§2.1055 §22.355 §24.235 §27.54 §90.539 (e) §90.691	Frequency Stability Temperature & Voltage	-	See Note



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (c)(2) §27.53 (f) §27.53 (g) §27.53 (h) §90.691	Radiated Spurious Emission (n2) (n5) (n12) (n13) (n25) (n26) (n66) (n71)	Pass	10.13 dB under the limit at 1560.00 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		
	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission (n30)		
	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (n14)		
	§2.1051 §27.53 (l)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)		

Remark:

- For host device, Radiated Spurious Emission, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and comply with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: RM520N-GL)

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

- The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
- The purpose of different model name is for marketing segmentation.

Reviewed by: Sheng Kuo

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00152A, TP00152B
Marketing Name	ThinkPad T14s Gen 5, ThinkPad T14s Gen 6
FCC ID	2AJN7-TP00152A
Sample 1	EUT with Amphenol Taiwan Corporation Antenna
Sample 2	EUT with Luxshare-ICT Antenna
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W FCC ID: PD9AX211D2
Integrated WLAN Module	Brand Name: Intel Model Name: BE200D2W FCC ID: PD9BE200D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/ EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

Support band and evaluated information	
Supported band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Evaluated and Tested band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Band covered information	Wider operating frequency band range covers narrower one when the power is worse as follows: <ul style="list-style-type: none"> ■ n26 cover n5 (Part 22) ■ n25 cover n2 (Part 24) ■ n41 cover n38 (Part 27)
Main Antenna	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
MIMO2 Antenna	n38, n41, n77, n78



TDD band Power Class		
	PC3	PC2
n38	V	-
n41	V	V
n77	V	V
n78	V	V

WWAN Antenna Information for Host				
Main Antenna	Manufacturer	Amphenol Taiwan Corporation	Peak gain (dBi)	5G NR n2: -0.42 5G NR n5: 0.29 5G NR n7: 1.90 5G NR n12: -1.19 5G NR n13: -1.14 5G NR n14: -0.94 5G NR n25: -0.16 5G NR n26 : 0.29 5G NR n30: 0.48 5G NR n38: 1.90 5G NR n41: 1.80 5G NR n66: 1.30 5G NR n71: -1.09 5G NR n77: 0.92 5G NR n78: 0.92
	Part number	DC330022430 DC330022420	Type	PIFA
	Manufacturer	Luxshare-ICT	Peak gain (dBi)	5G NR n2: -0.42 5G NR n5: 0.29 5G NR n7: 1.90 5G NR n12: -1.19 5G NR n13: -1.14 5G NR n14: -0.94 5G NR n25: -0.16 5G NR n26 : 0.29 5G NR n30: 0.48 5G NR n38: 1.90 5G NR n41: 1.80 5G NR n66: 1.30 5G NR n71: -1.09 5G NR n77: 0.92 5G NR n78: 0.92
	Part number	DC330022530 DC330022520	Type	PIFA



WWAN Antenna Information for Host				
MIMO 2 Antenna	Manufacturer	Amphenol Taiwan Corporation	Peak gain (dBi)	5G NR n38: 1.47 5G NR n41: 1.94 5G NR n77: 0.94 5G NR n78: 0.63
	Part number	DC330022430	Type	PIFA
	Manufacturer	Luxshare-ICT	Peak gain (dBi)	5G NR n38: 1.47 5G NR n41: 1.94 5G NR n77: 0.94 5G NR n78: 0.63
	Part number	DC330022530	Type	PIFA

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.
2. SA Mode only perform in MIMO2 TX Antenna.



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n7: 2502.5 MHz ~ 2567.5 MHz 5G NR n12: 701.5 MHz ~ 713.5 MHz 5G NR n13: 779.5 MHz ~ 784.5 MHz 5G NR n14: 790.5 ~ 795.5 MHz 5G NR n25: 1852.5 MHz ~ 1912.5 MHz 5G NR n26 (Part22H): 826.5 MHz ~ 846.5 MHz 5G NR n26 (Part90S): 816.5 MHz ~ 821.5 MHz 5G NR n30: 2307.5 MHz ~ 2312.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2506.02 MHz ~ 2685.00 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5 MHz 5G NR n77 (Part27O): 3705 MHz ~ 3975 MHz 5G NR n78 (Part27O): 3705 MHz ~ 3795 MHz 5G NR n77 (Part27Q): 3455.01 MHz ~ 3544.98 MHz 5G NR n78 (Part27Q): 3455.01 MHz ~ 3544.98 MHz
Rx Frequency	5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n7: 2622.5 MHz ~ 2687.5 MHz 5G NR n12: 731.5 MHz ~ 743.5 MHz 5G NR n13: 748.5 MHz ~ 753.5 MHz 5G NR n14: 760.5 ~ 765.5 MHz 5G NR n25: 1932.5 MHz ~ 1992.5 MHz 5G NR n26 (Part22H): 861.5 MHz ~ 891.5 MHz 5G NR n26 (Part90S): 861.5 MHz ~ 866.5 MHz 5G NR n30: 2352.5 MHz ~ 2357.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2506.02 MHz ~ 2685.00 MHz 5G NR n66: 2112.5 MHz ~ 2197.5 MHz 5G NR n71: 619.5 MHz ~ 649.5 MHz 5G NR n77 (Part27O): 3705 MHz ~ 3975 MHz 5G NR n78 (Part27O): 3705 MHz ~ 3795 MHz 5G NR n77 (Part27Q): 3455.01 MHz ~ 3544.98 MHz 5G NR n78 (Part27Q): 3455.01 MHz ~ 3544.98 MHz



Product Specification is subject to this standard	
Bandwidth	5G NR n2: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz 5G NR n12: 5MHz / 10MHz / 15MHz 5G NR n13: 5MHz / 10MHz 5G NR n14: 5MHz / 10MHz 5G NR n25: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz 5G NR n26: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n30: 5MHz / 10MHz 5G NR n38: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz 5G NR n41: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz 5G NR n66: 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz 5G NR n71: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n77: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz 5G NR n78: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Maximum Output Power to Antenna	<SISO Mode> <Main Antenna>: 5G NR n2: 24.00 dBm 5G NR n5: 24.16 dBm 5G NR n7: 24.45 dBm 5G NR n12: 23.97 dBm 5G NR n13: 24.10 dBm 5G NR n14: 24.20 dBm 5G NR n25: 24.00 dBm 5G NR n26 : 24.42 dBm for Part22H 5G NR n26 : 24.10 dBm for Part90S 5G NR n30: 22.30 dBm 5G NR n38: 24.41 dBm 5G NR n41: 26.94 dBm for HPUE 5G NR n66: 24.11 dBm 5G NR n71: 24.41 dBm <MIMO2 Antenna>: 5G NR n77: 26.74 dBm for Part27O HPUE 5G NR n78: 26.73 dBm for Part27O HPUE 5G NR n77: 26.91 dBm for Part27Q HPUE 5G NR n78: 26.60 dBm for Part27Q HPUE <MIMO Mode> <Main/MIMO2 Antenna>: 5G NR n38: 23.24 dBm 5G NR n41: 25.47 dBm for HPUE 5G NR n77: 26.87 dBm for Part27O HPUE 5G NR n78: 26.86 dBm for Part27O HPUE 5G NR n77: 26.98 dBm for Part27Q HPUE 5G NR n78: 26.75 dBm for Part27Q HPUE
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM



1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Ivy Yeh
Temperature (°C)	20.4~22.9
Relative Humidity (%)	50.1~58.3

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH21HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Ray Lung and Sky Chang
Temperature (°C)	18~26
Relative Humidity (%)	50~70
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27, Part 90(R), Part 90(S)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Modulation Type	Modulation	Modulation Type	Modulation
A	DFT-s-OFDM pi/2 BPSK	N/A	N/A
B	DFT-s-OFDM QPSK	F	CP-OFDM QPSK
C	DFT-s-OFDM 16QAM	G	CP-OFDM 16QAM
D	DFT-s-OFDM 64QAM	H	CP-OFDM 64QAM
E	DFT-s-OFDM 256QAM	I	CP-OFDM 256QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, F, G	All	1RB	L, M, H
ERP/EIRP	A, B, C, F, G	All	1RB	L, M, H
RSE	A	20 MHz or less	Inner_1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. During the RSE preliminary test, the standalone mode and charging modes were verified. It is determined that the charging modes is the worst case for the official test.
4. For modulation of Pi/2 BPSK & QPSK & 16QAM, the maximum power of Pi/2 BPSK & QPSK & 16QAM is higher than other modulation(64QAM/256QAM), therefore, according to engineering evaluation , we choose higher power (Pi/2 BPSK & QPSK & 16QAM) to perform tests and show in the report.
5. For 5G NR EN-DC combination is EN-DC 13A_n66A, EN-DC 5A_n2A, EN-DC 14A_n2A, EN-DC 30A_n2A, EN-DC 2A_n5A, EN-DC 30A_n5A, EN-DC 66A_n5A, EN-DC 2A_n12A, EN-DC 66A_n12A, EN-DC 2A_n66A, EN-DC 5A_n66A, EN-DC 12A_n66A, EN-DC 14A_n66A, EN-DC 30A_n66A, EN-DC 12A_n2A, EN-DC 66A_n2A, EN-DC 71A_2A, EN-DC12A_n41A, EN-DC 71A_n66A, EN-DC 2A_n71A, EN-DC 66A_n71A, EN-DC 66A_n25A, EN-DC 25A_n41A, EN-DC 12A_n78A, EN-DC13A_n78A, EN-DC 25A_n78A, EN-DC 12A_n77A, EN-DC 13A_n77A, EN-DC 14A_n77A, EN-DC 26A_n78A, EN-DC 2A_n78A, EN-DC 26A_n41A, EN-DC EN-DC 2A_n41A, EN-DC 7A_n5A, EN-DC 38A_n78A, EN-DC 7A_n71A, EN-DC 41A_n78A, EN-DC 5A_n7A, EN-DC 12A_n7A, EN-DC 66A_n7A, EN-DC 13A_n2A, EN-DC 7A_n66A, EN-DC 4A_n78A, EN-DC 20A_n77A, EN-DC 5A_n78A, EN-DC 4A_n41A, EN-DC 66A_n38A, EN-DC 2A_n38A, EN-DC 12A_n38A, EN-DC 4A_n38A, EN-DC5A_n38A, EN-DC 66A_n78A, EN-DC 12A_n25A, EN-DC 25A_n77A, EN-DC 2A_n77A, EN-DC 71A_n78A, EN-DC 71A_n38A, EN-DC 13A_n7A, EN-DC 5A_n41A, EN-DC 66A_41A, EN-DC 2A_n7A, EN-DC 7A_n2A, EN-DC 5A_n40A, EN-DC 30A_n77A, EN-DC 41A_n77A, EN-DC 7A_n78A, EN-DC 66A_n28A, EN-DC 71A_n41A, EN-DC 28A_n66A, EN-DC 30A_n12A, EN-DC 2A_n14A, EN-DC 30A_n14A, EN-DC 66A_n14A, EN-DC 2A_n30A, EN-DC 5A_n30A, EN-DC 12A_n30A, EN-DC 14A_n30A, EN-DC 66A_n30A, EN-DC 71A_n7A, EN-DC 7A_n12A, EN-DC 5A_n77A, EN-DC 66A_n77A, EN-DC 71A_n77A, EN-DC 4A_n2A, EN-DC 7A_n25A, EN-DC 71A_n25A, EN-DC 5A_n25A, EN-DC 26A_n25A, EN-DC 4A_n7A, EN-DC 13A_n25A and EN-DC 7A_n77A.
6. For 5G NR UL CA combination is n25A-n41A, n41A-n66A, n41A-n71A, n7A-n78A, n5A-n78A, n66A-n78A, n7A-n77A, n2A-n77A, n5A-n77A, n66A-n77A, n30A-n77A, n71A-n77A, n71A-n78A, n25A-n78A, n38A-n66A, n25A-n77A, n25A-n38A, n13A-n77A and n2A-n41A.

2.2 Connection Diagram of Test System

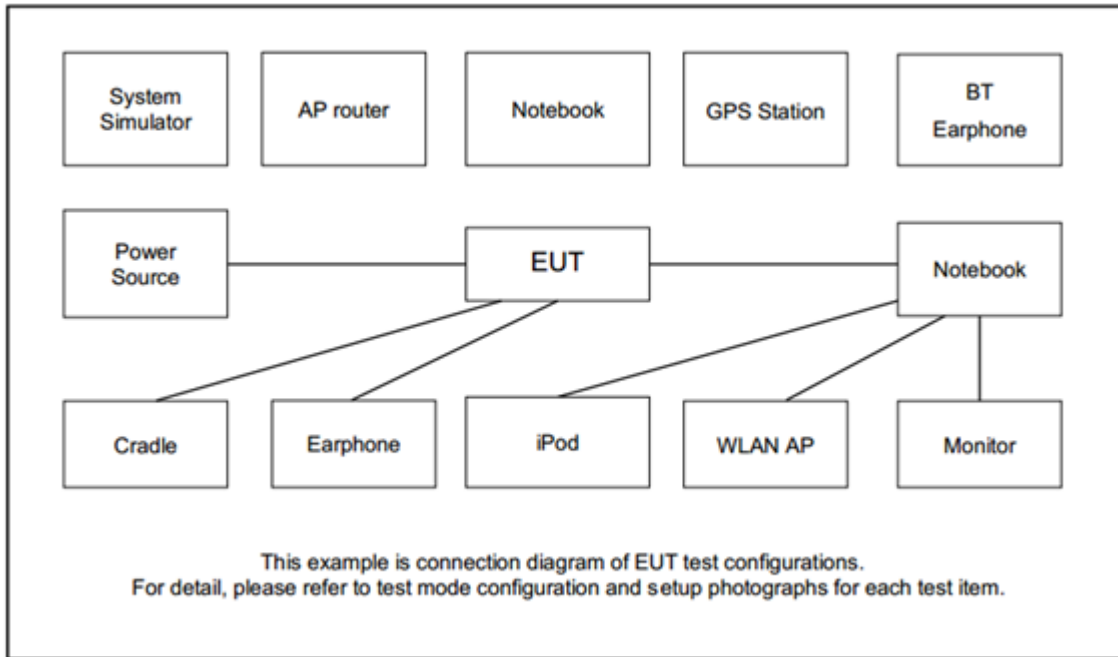

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A



2.4 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR n13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	156400	-
	Frequency	-	782	-
5	Channel	155900	156400	156900
	Frequency	779.5	782	784.5

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

Part22H 5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



Part 90S 5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

Part 90S 5G NR n26 Straddle Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-
5	Channel	-	164800	-
	Frequency	-	824	-

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5



5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506200	518598	531000
	Frequency	2531	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5



5G NR Band n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3965
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR n78 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	650000	-
	Frequency	-	3750	-
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	6750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795



5G NR Band n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

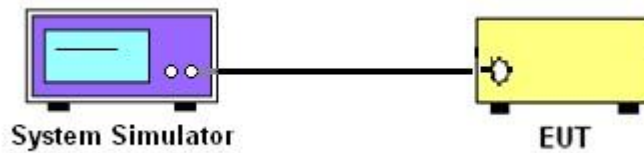

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26 (Part 22H)

The Conducted Power of mobile transmitters must not exceed 100 Watts for 5G NR n26 (Part 90S)

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n13, n14, n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25, n7, n38, n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n77, n78

The EIRP of mobile transmitters must not exceed 250mW/5MHz for 5G NR n30

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.
5. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

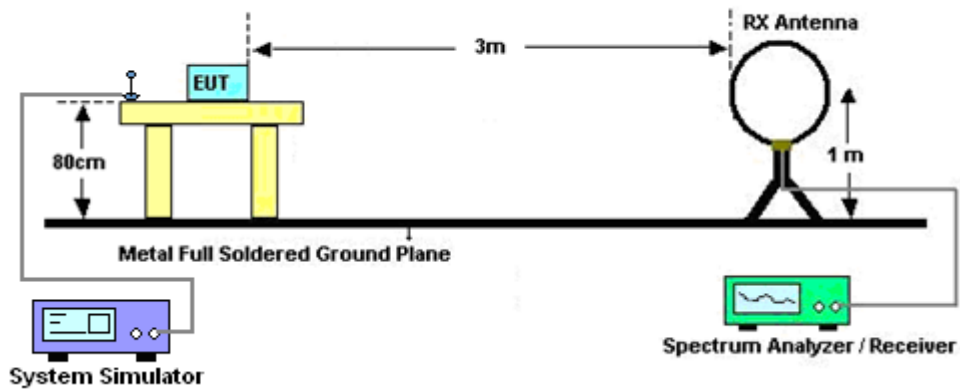


For radiated test from 30MHz to 1GHz

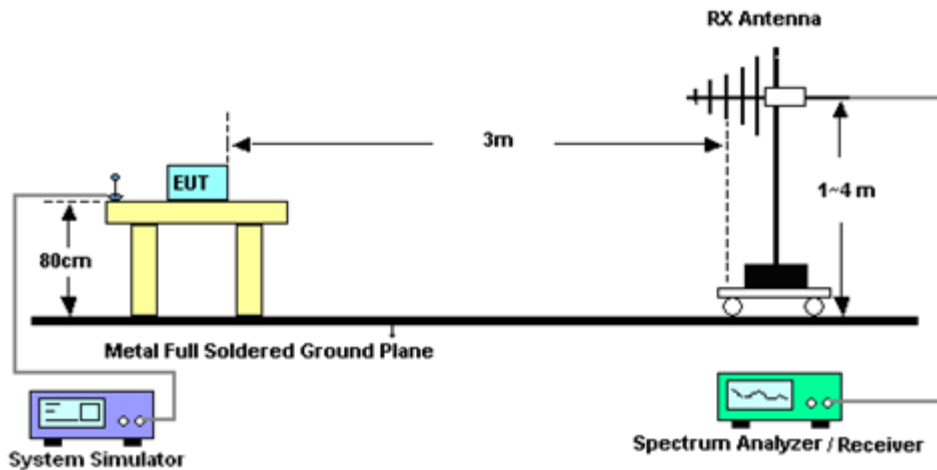

For radiated test from 1GHz to 18GHz

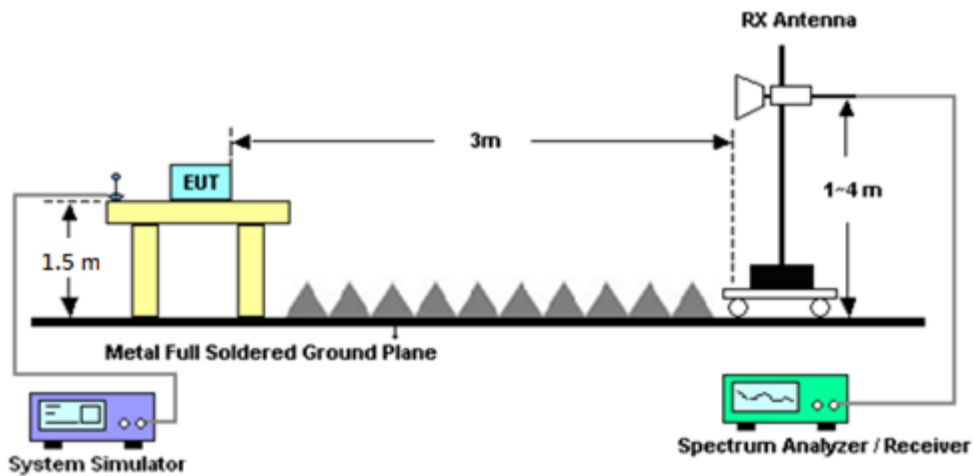

For radiated test above 18GHz

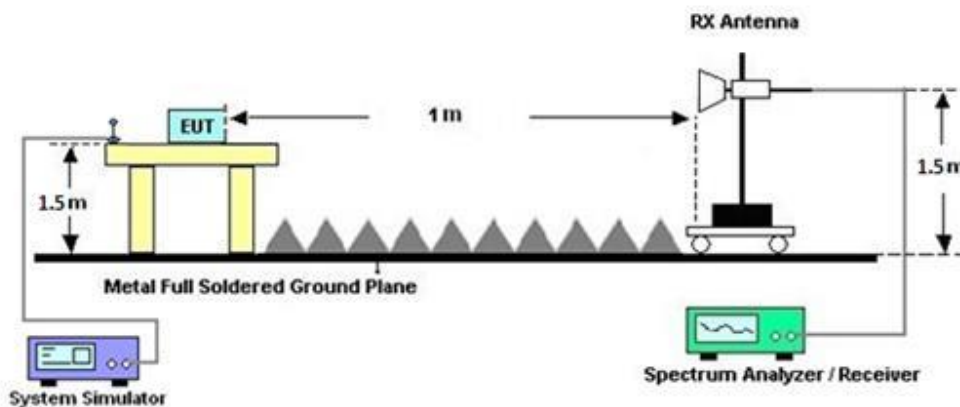

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For 5G NR n13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77$$
, where d is the distance at which field strength limit is specified in the rules.
7.
$$\text{Field Strength Level (dBm)} = \text{Spectrum Reading (dBm)} + \text{Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor}.$$
8.
$$\text{ERP (dBm)} = \text{EIRP (dBm)} - 2.15$$
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Dec. 20, 2023~Jan. 03, 2024	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N1D 01N-06	55606 & 08	30MHz~1GHz	Oct. 15, 2023	Dec. 20, 2023~Jan. 03, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 12, 2023	Dec. 20, 2023~Jan. 03, 2024	Jul. 11, 2024	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Dec. 20, 2023~Jan. 03, 2024	Jul. 09, 2024	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 15, 2023	Dec. 20, 2023~Jan. 03, 2024	Jul. 14, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Dec. 20, 2023~Jan. 03, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Dec. 20, 2023~Jan. 03, 2024	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Dec. 20, 2023~Jan. 03, 2024	Aug. 27, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Dec. 20, 2023~Jan. 03, 2024	Mar. 06, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,804614/2	30MHz~40GHz	Oct. 24, 2023	Dec. 20, 2023~Jan. 03, 2024	Oct. 23, 2024	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Dec. 20, 2023~Jan. 03, 2024	Oct. 29, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 20, 2023~Jan. 03, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Dec. 20, 2023~Jan. 03, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 20, 2023~Jan. 03, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Dec. 20, 2023~Jan. 03, 2024	N/A	Radiation (03CH21-HY)
Base Station (Measure)	Anritsu	MT8821C	6262116730	LTE	Jul. 10, 2023	Nov. 30, 2023~Jan. 02, 2024	Jul. 09, 2024	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jul. 10, 2023	Nov. 30, 2023~Jan. 02, 2024	Jul. 09, 2024	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.33 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.68 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

<SISO Mode>

NR n2 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.64	23.86	23.63	23.54	0.2259
5	1	1	QPSK	23.65	23.96	23.64		
5	1	1	16-QAM	22.71	22.80	22.65	22.38	0.1730
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.79	23.83	23.78	23.44	0.2208
10	1	1	QPSK	23.79	23.86	23.83		
10	1	1	16-QAM	22.76	22.80	22.78	22.38	0.1730
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.88	23.97	23.86	23.58	0.2280
15	1	1	QPSK	23.99	24.00	23.91		
15	1	1	16-QAM	22.85	22.96	22.85	22.54	0.1795
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.94	23.88	23.87	23.52	0.2249
20	1	1	QPSK	23.91	23.94	23.89		
20	1	1	16-QAM	22.82	22.95	22.83	22.53	0.1791
Limit	EIRP < 2W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	23.98	24.16	23.86	22.30	0.1698
5	1	1	QPSK	24.00	24.05	24.00		
5	1	1	16-QAM	22.87	23.01	23.07	21.21	0.1321
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	23.92	24.02	23.86	22.22	0.1667
10	1	1	QPSK	23.99	24.08	23.95		
10	1	1	16-QAM	22.81	22.91	23.05	21.19	0.1315
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.09	24.15	24.11	22.29	0.1694
15	1	1	QPSK	24.15	24.13	24.13		
15	1	1	16-QAM	23.01	23.05	23.18	21.32	0.1355
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.01	24.13	24.00	22.27	0.1687
20	1	1	QPSK	24.02	24.03	24.06		
20	1	1	16-QAM	22.96	22.91	22.96	21.10	0.1288
Limit	ERP < 7W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.06	24.11	24.02	26.06	0.4036
5	1	1	QPSK	24.16	24.05	24.01		
5	1	1	16-QAM	23.01	23.10	22.98		
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.91	23.96	24.00	25.94	0.3926
10	1	1	QPSK	24.00	23.99	24.04		
10	1	1	16-QAM	22.92	23.06	23.01	24.96	0.3133
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	24.22	24.23	24.34	26.24	0.4207
15	1	1	QPSK	24.32	24.24	24.27		
15	1	1	16-QAM	23.22	23.28	23.03	25.18	0.3296
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.36	24.23	24.29	26.28	0.4246
20	1	1	QPSK	24.38	24.25	24.32		
20	1	1	16-QAM	23.24	23.22	23.06	25.14	0.3266
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	24.30	24.23	24.32	26.35	0.4315
25	1	1	QPSK	24.45	24.22	24.25		
25	1	1	16-QAM	23.19	23.21	23.11	25.11	0.3243
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	24.11	24.15	24.23	26.13	0.4102
30	1	1	QPSK	24.21	24.15	24.22		
30	1	1	16-QAM	23.18	23.22	23.20	25.12	0.3251
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	24.38	24.17	24.34	26.28	0.4246
40	1	1	QPSK	24.35	24.22	24.29		
40	1	1	16-QAM	23.19	23.20	23.18	25.10	0.3236
Limit	EIRP < 2W			Result			Pass	



NR n12 Maximum Average Power [dBm] (GT - LC = -1.19 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	23.68	23.78	23.90	20.63	0.1156
5	1	1	QPSK	23.78	23.97	23.90		
5	1	1	16-QAM	22.82	22.84	22.69	19.50	0.0891
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = -1.19 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	23.80	23.82	23.81	20.57	0.1140
10	1	1	QPSK	23.78	23.91	23.87		
10	1	1	16-QAM	22.89	22.86	22.90	19.56	0.0904
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = -1.19 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	23.80	23.71	23.93	20.59	0.1146
15	1	1	QPSK	23.86	23.82	23.93		
15	1	1	16-QAM	22.89	22.87	22.93	19.59	0.0910
Limit	ERP < 3W			Result			Pass	



NR n13 Maximum Average Power [dBm] (GT - LC = -1.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.10	24.02	24.06	20.81	0.1205
5	1	1	QPSK	24.04	24.05	24.03		
5	1	1	16-QAM	22.78	22.98	23.01	19.72	0.0938
Limit	ERP < 3W			Result			Pass	

NR n13 Maximum Average Power [dBm] (GT - LC = -1.14 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	-	23.97	-	20.73	0.1183
10	1	1	QPSK	-	24.02	-		
10	1	1	16-QAM	-	22.75	-	19.46	0.0883
Limit	ERP < 3W			Result			Pass	

NR n14 Maximum Average Power [dBm] (GT - LC = -0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.10	23.95	24.02	21.11	0.1291
5	1	1	QPSK	24.20	23.94	24.04		
5	1	1	16-QAM	22.85	22.87	22.92	19.83	0.0962
Limit	ERP < 3W			Result			Pass	

NR n14 Maximum Average Power [dBm] (GT - LC = -0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	-	23.96	-	20.92	0.1236
10	1	1	QPSK	-	24.01	-		
10	1	1	16-QAM	-	22.76	-	19.67	0.0927
Limit	ERP < 3W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.55	23.81	23.44	23.65	0.2317
5	1	1	QPSK	23.63	23.78	23.50		
5	1	1	16-QAM	22.81	22.85	22.80	22.69	0.1858
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.25	23.43	23.12	23.27	0.2123
10	1	1	QPSK	23.35	23.38	23.14		
10	1	1	16-QAM	22.82	22.89	22.84	22.73	0.1875
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.55	23.58	23.35	23.47	0.2223
15	1	1	QPSK	23.58	23.63	23.40		
15	1	1	16-QAM	23.02	23.13	22.95	22.97	0.1982
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.43	23.47	23.36	23.53	0.2254
20	1	1	QPSK	23.45	23.69	23.47		
20	1	1	16-QAM	22.92	23.06	22.99	22.90	0.1950
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	23.41	23.51	23.48	23.41	0.2193
25	1	1	QPSK	23.57	23.53	23.42		
25	1	1	16-QAM	23.05	23.09	23.01	22.93	0.1963
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.53	23.53	23.48	23.41	0.2193
30	1	1	QPSK	23.49	23.54	23.57		
30	1	1	16-QAM	22.95	22.97	22.91	22.81	0.1910
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.16 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.64	23.79	24.00	23.84	0.2421
40	1	1	QPSK	23.79	23.86	23.99		
40	1	1	16-QAM	22.91	23.04	23.08	22.92	0.1959
Limit	EIRP < 2W			Result			Pass	



Part22H NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.19	24.11	24.15	22.36	0.1722
5	1	1	QPSK	24.11	24.22	24.12		
5	1	1	16-QAM	22.81	22.87	22.80	21.01	0.1262
Limit	ERP < 7W			Result			Pass	

Part22H NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.17	24.16	24.13	22.32	0.1706
10	1	1	QPSK	24.14	24.18	24.13		
10	1	1	16-QAM	22.75	22.82	22.95	21.09	0.1285
Limit	ERP < 7W			Result			Pass	

Part22H NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.25	24.31	24.31	22.49	0.1774
15	1	1	QPSK	24.31	24.35	24.34		
15	1	1	16-QAM	22.93	22.98	22.92	21.12	0.1294
Limit	ERP < 7W			Result			Pass	

Part22H NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.28	24.34	24.24	22.56	0.1803
20	1	1	QPSK	24.33	24.34	24.42		
20	1	1	16-QAM	22.85	22.91	22.89	21.05	0.1274
Limit	ERP < 7W			Result			Pass	

NR n30 Maximum Average Power [dBm] (GT - LC = 0.48 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.00	22.17	22.16	22.78	0.1897
5	1	1	QPSK	22.01	22.20	22.30		
5	1	1	16-QAM	20.51	20.59	20.57	21.07	0.1279
Limit	EIRP < 250 mW/5MHz			Result			Pass	

NR n30 Maximum Average Power [dBm] (GT - LC = 0.48 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	-	22.18	-	22.66	0.1845
10	1	1	QPSK	-	22.09	-		
10	1	1	16-QAM	-	20.69	-	21.17	0.1309
Limit	EIRP < 250 mW/5MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.



NR n38 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.08	24.13	24.08	26.04	0.4018
10	1	1	QPSK	24.03	24.14	24.11		
10	1	1	16-QAM	23.18	23.11	23.02		
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	24.33	24.21	24.41	26.31	0.4276
15	1	1	QPSK	24.38	24.20	24.38		
15	1	1	16-QAM	23.22	23.26	23.02	25.16	0.3281
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.39	24.20	24.25	26.29	0.4256
20	1	1	QPSK	24.30	24.23	24.23		
20	1	1	16-QAM	23.21	23.19	23.04	25.11	0.3243
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	24.19	24.26	24.23	26.25	0.4217
30	1	1	QPSK	24.18	24.35	24.21		
30	1	1	16-QAM	23.15	23.26	23.23	25.16	0.3281
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	24.41	24.29	24.35	26.31	0.4276
40	1	1	QPSK	24.26	24.28	24.37		
40	1	1	16-QAM	23.26	23.28	23.23	25.18	0.3296
Limit	EIRP < 2W			Result			Pass	



NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.81	26.85	26.60	28.68	0.7379
20	1	1	QPSK	26.88	26.82	26.58		
20	1	1	16-QAM	25.81	25.73	25.49	27.61	0.5768
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.94	26.77	26.82	28.74	0.7482
30	1	1	QPSK	26.88	26.87	26.86		
30	1	1	16-QAM	25.72	25.77	25.57	27.57	0.5715
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.93	26.84	26.78	28.73	0.7464
40	1	1	QPSK	26.85	26.86	26.78		
40	1	1	16-QAM	25.66	25.78	25.58	27.58	0.5728
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.79	26.73	26.58	28.59	0.7228
50	1	1	QPSK	26.75	26.68	26.52		
50	1	1	16-QAM	25.72	25.60	25.44	27.52	0.5649
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.67	26.77	26.47	28.57	0.7194
60	1	1	QPSK	26.63	26.66	26.48		
60	1	1	16-QAM	25.66	25.68	25.51	27.48	0.5598
Limit	EIRP < 2W			Result			Pass	



NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	26.59	26.48	26.33	28.39	0.6902
70	1	1	QPSK	26.49	26.47	26.26		
70	1	1	16-QAM	25.46	25.45	25.38	27.26	0.5321
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.37	26.53	26.42	28.33	0.6808
80	1	1	QPSK	26.40	26.46	26.41		
80	1	1	16-QAM	25.35	25.38	25.34	27.18	0.5224
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	26.53	26.53	26.49	28.33	0.6808
90	1	1	QPSK	26.42	26.46	26.49		
90	1	1	16-QAM	25.46	25.33	25.25	27.26	0.5321
Limit	EIRP < 2W			Result			Pass	

NR n41 HPUE Maximum Average Power [dBm] (GT - LC = 1.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	26.48	26.56	26.34	28.36	0.6855
100	1	1	QPSK	26.42	26.54	26.31		
100	1	1	16-QAM	25.51	25.34	25.28	27.31	0.5383
Limit	EIRP < 2W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.72	23.90	23.81	25.23	0.3334
5	1	1	QPSK	23.75	23.90	23.93		
5	1	1	16-QAM	22.72	22.71	22.76	24.06	0.2547
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.81	23.83	23.85	25.20	0.3311
10	1	1	QPSK	23.90	23.88	23.87		
10	1	1	16-QAM	22.73	22.70	22.68	24.03	0.2529
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.93	23.96	23.87	25.40	0.3467
15	1	1	QPSK	23.92	24.10	24.00		
15	1	1	16-QAM	22.79	22.84	22.87	24.17	0.2612
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.92	24.11	23.93	25.41	0.3475
20	1	1	QPSK	23.95	23.92	23.95		
20	1	1	16-QAM	22.85	22.92	22.91	24.22	0.2642
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	23.84	23.84	23.90	25.23	0.3334
30	1	1	QPSK	23.92	23.90	23.93		
30	1	1	16-QAM	22.89	22.91	22.97	24.27	0.2673
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = 1.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.86	23.87	23.81	25.23	0.3334
40	1	1	QPSK	23.91	23.93	23.89		
40	1	1	16-QAM	22.83	22.80	22.79	24.13	0.2588
Limit	EIRP < 1W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	23.93	23.81	23.78	20.85	0.1216
5	1	1	QPSK	24.09	24.04	23.85		
5	1	1	16-QAM	22.99	22.91	22.95	19.75	0.0944
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	23.94	24.13	23.72	20.94	0.1242
10	1	1	QPSK	24.18	24.13	23.77		
10	1	1	16-QAM	22.98	22.95	22.91	19.74	0.0942
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	23.91	24.30	24.08	21.09	0.1285
15	1	1	QPSK	24.12	24.33	24.07		
15	1	1	16-QAM	22.99	23.05	22.92	19.81	0.0957
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	23.91	24.11	24.24	21.17	0.1309
20	1	1	QPSK	23.77	24.24	24.41		
20	1	1	16-QAM	23.02	22.93	23.05	19.81	0.0957
Limit	ERP < 3W			Result			Pass	



Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.25	26.34	26.36	27.30	0.5370
10	1	1	QPSK	26.22	26.31	26.33		
10	1	1	16-QAM	25.18	25.19	25.16		
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.43	26.37	26.61	27.55	0.5689
15	1	1	QPSK	26.45	26.34	26.57		
15	1	1	16-QAM	25.33	25.28	25.18	26.27	0.4236
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.50	26.48	26.60	27.54	0.5675
20	1	1	QPSK	26.46	26.45	26.57		
20	1	1	16-QAM	25.39	25.40	25.24	26.34	0.4305
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.52	26.57	26.62	27.56	0.5702
30	1	1	QPSK	26.55	26.55	26.60		
30	1	1	16-QAM	25.31	25.38	25.22	26.32	0.4285
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.74	26.66	26.63	27.68	0.5861
40	1	1	QPSK	26.69	26.71	26.60		
40	1	1	16-QAM	25.44	25.46	25.28	26.40	0.4365
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.11	26.34	26.42	27.36	0.5445
50	1	1	QPSK	26.09	26.30	26.39		
50	1	1	16-QAM	25.06	25.16	24.92	26.10	0.4074
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.20	26.23	26.06	27.20	0.5248
60	1	1	QPSK	26.15	26.26	26.06		
60	1	1	16-QAM	25.05	25.09	24.76	26.03	0.4009
Limit	EIRP < 1W			Result			Pass	



Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.97	26.07	25.95	27.01	0.5023
70	1	1	QPSK	25.98	26.02	25.81		
70	1	1	16-QAM	24.96	25.06	24.94	26.00	0.3981
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.06	26.01	25.89	27.00	0.5012
80	1	1	QPSK	26.00	26.06	25.88		
80	1	1	16-QAM	25.05	24.95	24.81	25.99	0.3972
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.96	25.96	26.06	27.00	0.5012
90	1	1	QPSK	25.90	25.97	25.96		
90	1	1	16-QAM	24.91	24.96	24.84	25.90	0.3890
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	26.02	25.96	25.87	26.96	0.4966
100	1	1	QPSK	25.90	26.00	25.89		
100	1	1	16-QAM	24.98	25.05	24.76	25.99	0.3972
Limit	EIRP < 1W			Result			Pass	



Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.82	26.25	26.21	26.88	0.4875
10	1	1	QPSK	24.89	26.18	26.19		
10	1	1	16-QAM	24.78	25.16	25.13	25.79	0.3793
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.36	26.33	26.42	27.05	0.5070
15	1	1	QPSK	26.36	26.37	26.40		
15	1	1	16-QAM	25.29	25.22	25.31	25.94	0.3926
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.39	26.35	26.42	27.05	0.5070
20	1	1	QPSK	26.35	26.36	26.38		
20	1	1	16-QAM	25.35	25.18	25.27	25.98	0.3963
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.45	26.51	26.63	27.36	0.5445
30	1	1	QPSK	26.41	26.50	26.73		
30	1	1	16-QAM	25.44	25.33	25.35	26.07	0.4046
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.64	26.62	26.61	27.27	0.5333
40	1	1	QPSK	26.62	26.56	26.58		
40	1	1	16-QAM	25.46	25.48	25.43	26.11	0.4083
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.99	26.17	26.24	26.87	0.4864
50	1	1	QPSK	26.07	26.13	26.22		
50	1	1	16-QAM	25.03	25.08	24.92	25.71	0.3724
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.04	26.01	26.06	26.69	0.4667
60	1	1	QPSK	26.05	26.02	26.02		
60	1	1	16-QAM	24.89	24.90	24.91	25.54	0.3581
Limit	EIRP < 1W			Result			Pass	



Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	25.97	26.03	25.88	26.70	0.4677
70	1	1	QPSK	25.97	26.07	25.89		
70	1	1	16-QAM	24.89	24.90	24.91	25.54	0.3581
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.96	26.02	25.97	26.65	0.4624
80	1	1	QPSK	25.95	25.98	25.95		
80	1	1	16-QAM	24.95	24.88	24.91	25.58	0.3614
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	25.83	25.97	26.06	26.77	0.4753
90	1	1	QPSK	25.77	25.87	26.14		
90	1	1	16-QAM	25.01	24.85	24.93	25.64	0.3664
Limit	EIRP < 1W			Result			Pass	

Part 270 NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	25.88	-	26.51	0.4477
100	1	1	QPSK	-	25.88	-		
100	1	1	16-QAM	-	24.87	-	25.50	0.3548
Limit	EIRP < 1W			Result			Pass	



Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.37	26.52	26.62	27.57	0.5715
10	1	1	QPSK	26.33	26.53	26.63		
10	1	1	16-QAM	25.33	25.31	25.29		
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.56	26.61	26.71	27.65	0.5821
15	1	1	QPSK	26.63	26.60	26.62		
15	1	1	16-QAM	25.39	25.43	25.37	26.37	0.4335
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.62	26.58	26.59	27.56	0.5702
20	1	1	QPSK	26.59	26.60	26.53		
20	1	1	16-QAM	25.45	25.50	25.41	26.44	0.4406
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.67	26.81	26.82	27.76	0.5970
30	1	1	QPSK	26.62	26.78	26.81		
30	1	1	16-QAM	25.59	25.66	25.56	26.60	0.4571
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.85	26.87	26.66	27.85	0.6095
40	1	1	QPSK	26.81	26.91	26.73		
40	1	1	16-QAM	25.58	25.63	25.56	26.57	0.4539
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.41	26.41	26.34	27.41	0.5508
50	1	1	QPSK	26.40	26.47	26.36		
50	1	1	16-QAM	25.41	25.39	25.34	26.35	0.4315
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.42	26.42	26.41	27.42	0.5521
60	1	1	QPSK	26.48	26.46	26.38		
60	1	1	16-QAM	25.48	25.43	25.37	26.42	0.4385
Limit	EIRP < 1W			Result			Pass	



Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	26.27	26.31	26.40	27.34	0.5420
70	1	1	QPSK	26.21	26.30	26.35		
70	1	1	16-QAM	25.24	25.39	25.34	26.33	0.4295
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.27	26.22	26.20	27.21	0.5260
80	1	1	QPSK	26.22	26.27	26.25		
80	1	1	16-QAM	25.36	25.25	25.44	26.38	0.4345
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	26.18	26.32	26.28	27.26	0.5321
90	1	1	QPSK	26.17	26.19	26.25		
90	1	1	16-QAM	25.25	25.27	25.38	26.32	0.4285
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n77 HPUE Maximum Average Power [dBm] (GT - LC = 0.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	26.24	-	27.18	0.5224
100	1	1	QPSK	-	26.17	-		
100	1	1	16-QAM	-	25.29	-	26.23	0.4198
Limit	EIRP < 1W			Result			Pass	



Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.20	26.38	26.43	27.12	0.5152
10	1	1	QPSK	26.22	26.42	26.49		
10	1	1	16-QAM	25.24	25.38	25.28	26.01	0.3990
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.36	26.38	26.53	27.16	0.5200
15	1	1	QPSK	26.33	26.38	26.48		
15	1	1	16-QAM	25.48	25.33	25.41	26.11	0.4083
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.47	25.10	26.46	27.13	0.5164
20	1	1	QPSK	26.44	26.50	26.42		
20	1	1	16-QAM	25.43	24.48	25.30	26.06	0.4036
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.41	26.55	26.57	27.20	0.5248
30	1	1	QPSK	26.41	26.52	26.56		
30	1	1	16-QAM	25.53	25.56	25.43	26.19	0.4159
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.60	25.10	26.51	27.23	0.5284
40	1	1	QPSK	26.55	26.60	26.53		
40	1	1	16-QAM	25.61	25.70	25.50	26.33	0.4295
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.13	25.35	25.95	26.77	0.4753
50	1	1	QPSK	26.08	26.14	26.01		
50	1	1	16-QAM	25.31	25.29	25.15	25.94	0.3926
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.21	26.18	26.22	26.90	0.4898
60	1	1	QPSK	26.27	26.21	26.13		
60	1	1	16-QAM	25.37	25.39	25.23	26.02	0.3999
Limit	EIRP < 1W			Result			Pass	



Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
70	1	1	PI/2 BPSK	26.03	26.03	26.19	26.82	0.4808
70	1	1	QPSK	26.07	26.08	26.19		
70	1	1	16-QAM	25.31	25.23	25.39	26.02	0.3999
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.99	26.11	26.13	26.76	0.4742
80	1	1	QPSK	26.00	25.99	26.02		
80	1	1	16-QAM	25.28	25.21	25.30	25.93	0.3917
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	26.05	25.99	26.16	26.79	0.4775
90	1	1	QPSK	26.00	26.02	26.15		
90	1	1	16-QAM	25.21	25.26	25.22	25.89	0.3882
Limit	EIRP < 1W			Result			Pass	

Part 27Q NR n78 HPUE Maximum Average Power [dBm] (GT - LC = 0.63 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	26.04	-	26.67	0.4645
100	1	1	QPSK	-	26.03	-		
100	1	1	16-QAM	-	25.28	-	25.91	0.3899
Limit	EIRP < 1W			Result			Pass	



Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
5	1	1	PI/2 BPSK	24.01	24.06	24.08	22.24	0.1675
5	1	1	QPSK	23.96	24.07	24.10		
5	1	1	16-QAM	22.70	22.68	22.72	20.86	0.1219
Limit	ERP < 100W			Result			Pass	

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	23.97	-	22.11	0.1626
10	1	1	QPSK	-	23.94	-		
10	1	1	16-QAM	-	22.66	-	20.80	0.1202
Limit	ERP < 100W			Result			Pass	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
5	1	1	PI/2 BPSK	-	24.02	-	22.16	0.1644
5	1	1	QPSK	-	24.00	-		
5	1	1	16-QAM	-	22.67	-	20.81	0.1205
Limit	Reporting only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
10	1	1	PI/2 BPSK	-	24.02	-	22.16	0.1644
10	1	1	QPSK	-	23.99	-		
10	1	1	16-QAM	-	22.72	-	20.86	0.1219
Limit	Reporting only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
15	1	1	PI/2 BPSK	-	23.91	-	22.16	0.1644
15	1	1	QPSK	-	24.02	-		
15	1	1	16-QAM	-	22.65	-	20.79	0.1199
Limit	Reporting only			Result			N/A	

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = 0.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP
20	1	1	PI/2 BPSK	-	23.91	-	22.09	0.1618
20	1	1	QPSK	-	23.95	-		
20	1	1	16-QAM	-	22.64	-	20.78	0.1197
Limit	Reporting only			Result			N/A	



<MIMO Mode>

NR n38 Maximum Average Power [dBm], DG = 1.9 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	19.78	19.91	19.82	19.85	19.91	19.68	22.83	22.92	22.76	24.82	0.3034
10	1	1	16-QAM	19.12	19.24	19.17	19.49	19.49	19.27	22.32	22.38	22.23	24.28	0.2679
Limit	EIRP < 2W			Result									Pass	

NR n38 Maximum Average Power [dBm], DG = 1.9 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	19.94	20.07	20.04	20.01	20.03	20.09	22.99	23.06	23.08	24.98	0.3148
15	1	1	16-QAM	19.24	19.23	19.50	19.55	19.72	19.71	22.41	22.49	22.62	24.52	0.2831
Limit	EIRP < 2W			Result									Pass	

NR n38 Maximum Average Power [dBm], DG = 1.9 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	20.04	19.85	20.14	20.03	19.94	20.05	23.05	22.91	23.11	25.01	0.317
20	1	1	16-QAM	19.47	19.30	19.52	19.58	19.52	19.62	22.54	22.42	22.58	24.48	0.2805
Limit	EIRP < 2W			Result									Pass	

NR n38 Maximum Average Power [dBm], DG = 1.9 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	19.94	19.81	20.08	20.05	20.16	20.07	23.01	23.00	23.09	24.99	0.3155
30	1	1	16-QAM	19.47	19.27	19.75	19.60	19.85	19.40	22.55	22.58	22.59	24.49	0.2812
Limit	EIRP < 2W			Result									Pass	

NR n38 Maximum Average Power [dBm], DG = 1.9 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	20.09	20.04	20.19	20.12	20.06	20.26	23.12	23.06	23.24	25.14	0.3266
40	1	1	16-QAM	19.43	19.34	19.36	19.77	19.64	19.88	22.61	22.50	22.64	24.54	0.2844
Limit	EIRP < 2W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	22.32	22.27	21.96	22.48	22.49	22.24	25.41	25.39	25.11	27.35	0.5433
20	1	1	16-QAM	22.02	21.92	21.83	21.99	22.05	21.97	25.02	25.00	24.91	26.96	0.4966
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	22.29	22.27	22.35	22.48	22.57	22.47	25.40	25.43	25.42	27.37	0.5458
30	1	1	16-QAM	22.02	21.81	21.99	21.97	22.10	22.08	25.01	24.97	25.05	26.99	0.5000
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	22.28	22.42	22.20	22.40	22.50	22.51	25.35	25.47	25.37	27.41	0.5508
40	1	1	16-QAM	21.97	21.88	21.98	21.96	21.99	22.18	24.98	24.95	25.09	27.03	0.5047
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	22.19	22.24	22.11	22.32	22.49	22.45	25.27	25.38	25.29	27.32	0.5395
50	1	1	16-QAM	21.94	21.77	21.74	22.06	21.99	22.04	25.01	24.89	24.90	26.95	0.4955
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	22.01	22.19	22.00	22.20	22.33	22.35	25.12	25.27	25.19	27.21	0.5260
60	1	1	16-QAM	21.69	21.76	21.56	21.93	22.09	21.91	24.82	24.94	24.75	26.88	0.4875
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
70	1	1	QPSK	22.20	22.00	22.07	22.29	22.28	22.28	25.26	25.15	25.19	27.20	0.5248
70	1	1	16-QAM	21.71	21.71	21.55	21.68	21.84	21.62	24.71	24.79	24.60	26.73	0.4710
Limit	EIRP < 2W			Result									Pass	



NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	21.99	22.16	22.10	22.11	22.27	22.17	25.06	25.23	25.15	27.17	0.5212
80	1	1	16-QAM	21.64	21.70	21.58	21.62	21.86	21.56	24.64	24.79	24.58	26.73	0.4710
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	22.10	22.16	21.94	22.21	22.24	22.25	25.17	25.21	25.11	27.15	0.5188
90	1	1	16-QAM	21.64	21.65	21.58	21.63	21.77	21.88	24.65	24.72	24.74	26.68	0.4656
Limit	EIRP < 2W			Result									Pass	

NR n41 PC2 Maximum Average Power [dBm], DG = 1.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 2			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	22.07	22.03	21.96	22.15	22.28	22.25	25.12	25.17	25.12	27.11	0.5140
100	1	1	16-QAM	21.54	21.61	21.53	21.74	21.85	21.77	24.65	24.74	24.66	26.68	0.4656
Limit	EIRP < 2W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.30	23.21	23.15	23.61	23.58	23.71	26.47	26.41	26.45	27.41	0.5508
10	1	1	16-QAM	22.84	22.55	22.79	23.14	23.13	23.29	26.00	25.86	26.06	27.00	0.5012
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.53	23.39	23.45	23.89	23.71	23.96	26.72	26.56	26.72	27.66	0.5834
15	1	1	16-QAM	23.06	22.98	22.98	23.41	23.34	23.35	26.25	26.17	26.18	27.19	0.5236
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.52	23.51	23.48	23.79	23.59	23.75	26.67	26.56	26.63	27.61	0.5768
20	1	1	16-QAM	23.25	22.89	23.07	23.35	23.30	23.36	26.31	26.11	26.23	27.25	0.5309
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	23.39	23.41	23.70	23.65	23.73	23.90	26.53	26.58	26.81	27.75	0.5957
30	1	1	16-QAM	22.78	22.92	23.01	23.28	23.30	23.35	26.05	26.12	26.19	27.13	0.5164
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	23.66	23.63	23.48	24.05	23.92	23.84	26.87	26.79	26.67	27.81	0.6039
40	1	1	16-QAM	23.04	23.11	22.86	23.62	23.36	23.36	26.35	26.25	26.13	27.29	0.5358
Limit	EIRP < 1W			Result									Pass	



Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	23.06	23.29	23.40	23.39	23.47	23.59	26.24	26.39	26.51	27.45	0.5559
50	1	1	16-QAM	22.49	22.82	23.15	23.06	23.14	23.11	25.79	25.99	26.14	27.08	0.5105
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	23.21	23.38	23.16	23.57	23.53	23.41	26.40	26.47	26.30	27.41	0.5508
60	1	1	16-QAM	23.04	22.63	22.51	23.10	23.09	22.85	26.08	25.88	25.69	27.02	0.5035
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
70	1	1	QPSK	23.18	23.13	23.01	23.35	23.48	23.16	26.28	26.32	26.10	27.26	0.5321
70	1	1	16-QAM	22.56	22.58	22.35	22.83	22.93	22.68	25.71	25.77	25.53	26.71	0.4688
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	23.06	23.15	22.99	23.35	23.42	23.31	26.22	26.30	26.16	27.24	0.5297
80	1	1	16-QAM	22.64	22.50	22.46	22.85	22.79	22.75	25.76	25.66	25.62	26.70	0.4677
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	23.00	22.91	22.89	23.23	23.40	23.34	26.13	26.17	26.13	27.11	0.514
90	1	1	16-QAM	22.68	22.47	22.43	22.81	22.90	22.83	25.76	25.70	25.64	26.70	0.4677
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	23.06	22.81	22.97	23.37	23.22	23.19	26.23	26.03	26.09	27.17	0.5212
100	1	1	16-QAM	22.53	22.45	22.41	22.89	22.81	22.66	25.72	25.64	25.55	26.66	0.4634
Limit	EIRP < 1W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.43	23.43	23.28	23.60	23.60	23.67	26.53	26.53	26.49	27.45	0.5559
10	1	1	16-QAM	22.67	22.96	22.64	23.23	23.18	23.06	25.97	26.08	25.87	27.00	0.5012
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.35	23.35	23.63	23.73	23.75	23.80	26.55	26.56	26.73	27.65	0.5821
15	1	1	16-QAM	22.94	22.85	23.11	23.36	23.29	23.42	26.17	26.09	26.28	27.20	0.5248
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.40	23.37	23.42	23.71	23.81	23.71	26.57	26.61	26.58	27.53	0.5662
20	1	1	16-QAM	23.14	23.09	22.78	23.40	23.26	23.30	26.28	26.19	26.06	27.20	0.5248
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	23.40	23.57	23.59	23.94	23.74	23.90	26.69	26.67	26.76	27.68	0.5861
30	1	1	16-QAM	22.89	22.97	23.22	23.48	23.32	23.48	26.21	26.16	26.36	27.28	0.5346
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	23.58	23.45	23.63	24.01	23.87	24.06	26.81	26.68	26.86	27.78	0.5998
40	1	1	16-QAM	23.12	23.01	23.45	23.58	23.51	23.55	26.37	26.28	26.51	27.43	0.5534
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	23.01	23.22	23.35	23.41	23.55	23.62	26.22	26.40	26.50	27.42	0.5521
50	1	1	16-QAM	22.81	22.59	22.75	23.00	23.16	23.09	25.92	25.89	25.93	26.85	0.4842
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	23.03	22.97	23.05	23.43	23.38	23.39	26.24	26.19	26.23	27.16	0.5200
60	1	1	16-QAM	22.56	22.46	22.70	22.99	23.04	22.96	25.79	25.77	25.84	26.76	0.4742
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
70	1	1	QPSK	22.98	22.98	22.91	23.35	23.36	23.26	26.18	26.18	26.10	27.10	0.5129
70	1	1	16-QAM	22.39	22.50	22.47	22.82	22.87	22.86	25.62	25.70	25.68	26.62	0.4592
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	23.03	23.10	23.10	23.40	23.47	23.39	26.23	26.30	26.26	27.22	0.5272
80	1	1	16-QAM	22.81	22.59	22.87	22.96	22.91	22.89	25.90	25.76	25.89	26.82	0.4808
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	22.89	23.16	23.11	23.40	23.47	23.39	26.16	26.33	26.26	27.25	0.5309
90	1	1	16-QAM	22.66	22.46	22.64	22.84	22.90	22.90	25.76	25.70	25.78	26.70	0.4677
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	-	23.08	-	-	23.35	-	-	26.23	-	29.73	0.9397
100	1	1	16-QAM	-	22.35	-	-	22.80	-	-	25.59	-	29.09	0.8110
Limit	EIRP < 1W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.48	23.72	23.41	23.80	23.82	23.83	26.65	26.78	26.64	27.72	0.5916
10	1	1	16-QAM	23.14	22.98	22.90	23.32	23.36	23.40	26.24	26.18	26.17	27.18	0.5224
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.58	23.54	23.51	24.06	23.96	23.88	26.84	26.77	26.71	27.78	0.5998
15	1	1	16-QAM	23.06	22.97	23.13	23.49	23.45	23.56	26.29	26.23	26.36	27.30	0.5370
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.66	23.54	23.49	24.00	23.94	23.96	26.84	26.75	26.74	27.78	0.5998
20	1	1	16-QAM	23.01	23.14	23.36	23.58	23.44	23.47	26.31	26.30	26.43	27.37	0.5458
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	23.55	23.64	23.54	23.99	24.11	24.06	26.79	26.89	26.82	27.83	0.6067
30	1	1	16-QAM	23.09	23.06	23.15	23.57	23.62	23.62	26.35	26.36	26.40	27.34	0.542
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	23.75	23.74	23.83	24.09	24.19	24.11	26.93	26.98	26.98	27.92	0.6194
40	1	1	16-QAM	23.48	23.25	23.18	23.69	23.63	23.67	26.60	26.45	26.44	27.54	0.5675
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	23.39	23.40	23.33	23.82	23.88	23.70	26.62	26.66	26.53	27.60	0.5754
50	1	1	16-QAM	23.18	22.83	22.76	23.38	23.41	23.18	26.29	26.14	25.99	27.23	0.5284
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	23.44	23.21	23.42	23.85	23.85	23.86	26.66	26.55	26.66	27.60	0.5754
60	1	1	16-QAM	22.90	23.08	23.15	23.46	23.43	23.29	26.20	26.27	26.23	27.21	0.5260
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
70	1	1	QPSK	23.20	23.14	23.26	23.58	23.68	23.70	26.40	26.43	26.50	27.44	0.5546
70	1	1	16-QAM	22.87	22.54	22.87	23.08	23.17	23.37	25.99	25.88	26.14	27.08	0.5105
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	23.19	23.03	23.08	23.59	23.45	23.65	26.40	26.26	26.38	27.34	0.5420
80	1	1	16-QAM	22.69	22.50	22.63	23.16	23.14	23.23	25.94	25.84	25.95	26.89	0.4887
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	23.10	23.17	23.07	23.61	23.63	23.67	26.37	26.42	26.39	27.36	0.5445
90	1	1	16-QAM	22.63	22.69	22.54	23.22	23.12	23.14	25.95	25.92	25.86	26.89	0.4887
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 HPUE Maximum Average Power [dBm], DG = 0.94 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	-	23.19	-	-	23.41	-	-	26.31	-	27.25	0.5309
100	1	1	16-QAM	-	22.61	-	-	23.07	-	-	25.86	-	26.80	0.4786
Limit	EIRP < 1W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.37	23.46	23.58	23.57	23.61	23.84	26.48	26.55	26.72	27.64	0.5808
10	1	1	16-QAM	23.04	23.08	23.00	23.11	23.17	23.37	26.09	26.14	26.20	27.12	0.5152
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.43	23.68	23.35	23.43	23.68	23.35	26.44	26.69	26.36	27.61	0.5768
15	1	1	16-QAM	23.00	23.14	22.89	23.00	23.14	22.89	26.01	26.15	25.90	27.07	0.5093
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.50	23.39	23.23	23.50	23.39	23.23	26.51	26.40	26.24	27.43	0.5534
20	1	1	16-QAM	22.91	23.32	23.10	22.91	23.32	23.10	25.92	26.33	26.11	27.25	0.5309
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	23.39	23.47	23.45	23.65	23.79	23.77	26.53	26.64	26.62	27.56	0.5702
30	1	1	16-QAM	22.73	23.22	22.85	23.28	23.29	23.31	26.02	26.27	26.10	27.19	0.5236
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	23.38	23.61	23.26	23.83	23.87	23.54	26.62	26.75	26.41	27.67	0.5848
40	1	1	16-QAM	22.87	22.96	22.77	23.22	23.51	23.12	26.06	26.25	25.96	27.17	0.5212
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	23.02	22.93	22.91	23.39	23.46	23.16	26.22	26.21	26.05	27.14	0.5176
50	1	1	16-QAM	22.70	22.34	22.43	22.95	22.97	22.78	25.84	25.68	25.62	26.76	0.4742
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	23.04	22.93	23.15	23.38	23.31	23.41	26.22	26.13	26.29	27.21	0.5260
60	1	1	16-QAM	22.64	22.42	22.59	22.95	22.89	22.93	25.81	25.67	25.77	26.73	0.4710
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
70	1	1	QPSK	22.84	22.78	23.03	23.24	23.34	23.45	26.05	26.08	26.26	27.18	0.5224
70	1	1	16-QAM	22.59	22.29	22.56	22.75	22.83	22.81	25.68	25.58	25.70	26.62	0.4592
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	22.92	22.68	22.84	23.25	23.20	23.25	26.10	25.96	26.06	27.02	0.5035
80	1	1	16-QAM	22.21	22.29	22.17	22.81	22.77	22.71	25.53	25.55	25.46	26.47	0.4436
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	22.73	22.75	22.81	23.08	23.29	23.03	25.92	26.04	25.93	26.96	0.4966
90	1	1	16-QAM	22.20	22.20	22.17	22.59	22.71	22.74	25.41	25.47	25.47	26.39	0.4355
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 HPUE Maximum Average Power [dBm], DG = 0.92 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 0			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	-	22.77	-	-	23.10	-	-	25.95	-	26.87	0.4864
100	1	1	16-QAM	-	22.37	-	-	22.62	-	-	25.51	-	26.43	0.4395
Limit	EIRP < 1W			Result									Pass	

Remark : All transmit signals are completely uncorrelated with each other.



Appendix B. Test Results of Radiated Test


B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	Amp\Cbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 24E	NR SA n25	H	3793	-55.54	RMS	30.37	-23.09	0.83	-95.23	31.58	-13.00	-42.54	H	Main
1	Part 27F	NR SA n13	M	1560	-52.28	RMS	24.40	-25.32	0.65	-95.23	43.22	-42.15	-10.13	H	Main
2	Part 27F	NR SA n13	M	2333	-42.88	RMS	27.07	-24.30	0.39	-95.23	49.19	-13.00	-29.88	H	Main
1	Part 27D	NR SA n30	L	9222	-55.35	RMS	37.06	-21.59	0.45	-95.23	23.96	-40.00	-15.35	V	Main
2	Part 27D	NR SA n30	M	9223	-55.69	RMS	37.05	-21.59	0.45	-95.23	23.63	-40.00	-15.69	H	Main
1	Part 27M	NR SA n41	M	5169	-45.68	RMS	32.60	-21.74	0.39	-95.23	38.30	-25.00	-20.68	V	Main
1	Part 27Q	EN-DC B5+n77	M	10474	-41.99	RMS	37.10	-21.69	0.51	-95.23	37.32	-13.00	-28.99	V	LTE: MIMO2 + 5GNR: Main
2	Part 27Q	EN-DC B5+n78	H	7063	-47.79	RMS	36.47	-21.46	1.14	-95.23	31.29	-13.00	-34.79	H	LTE: MIMO2 + 5GNR: Main
1	Part 27O	NR SA n77	H	7923	-41.02	RMS	36.60	-21.50	0.84	-95.23	38.27	-13.00	-28.02	V	MIMO2
2	Part 27O	NR SA n78	M	11224	-48.04	RMS	38.35	-21.59	0.44	-95.23	29.99	-13.00	-35.04	V	MIMO2




Main

Part 24E Mode 1
NR SA n25 20M Ch372000 1RB1 BPSK
L

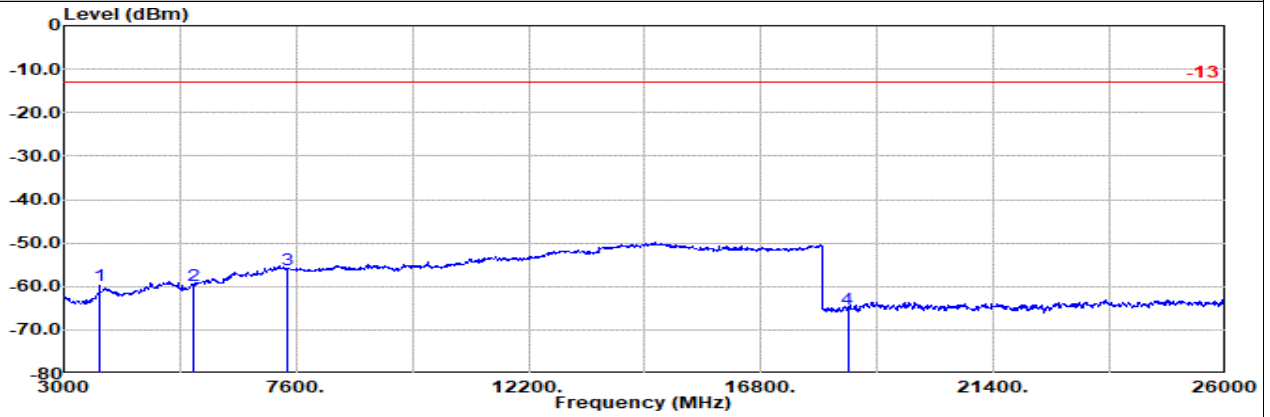

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n25 20M Ch372000 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF		Readin Limit		Margin Pol	
				Factor	1	dB	dB	dBuV	dBm	dB	
1	3703.00	-59.70	RMS	29.82	-23.21	0.85	-95.23	28.07	-13.00	-46.70	Horizontal
2	5554.00	-59.65	RMS	33.00	-21.86	0.73	-95.23	23.71	-13.00	-46.65	Horizontal
3	7405.00	-56.15	RMS	36.90	-21.26	0.42	-95.23	23.02	-13.00	-43.15	Horizontal
4	18513.00	-65.25	RMS	38.13	-39.29	-9.54	-95.23	40.68	-13.00	-52.25	Horizontal

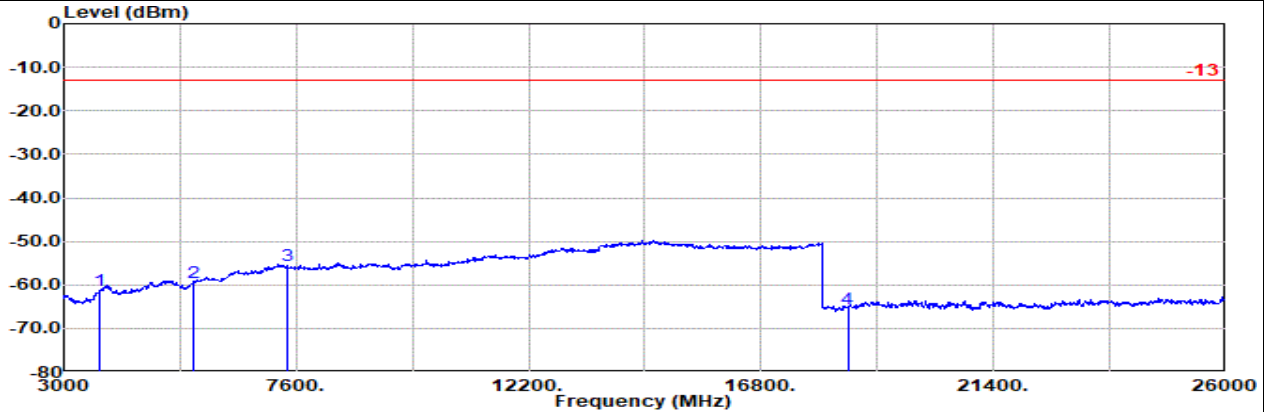


Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n25 20M Ch372000 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF		Readin Limit		Margin Pol	
				Factor	1	dB	dB	dBuV	dBm	dB	
1	3703.00	-61.22	RMS	29.82	-23.21	0.85	-95.23	26.55	-13.00	-48.22	Vertical
2	5554.00	-59.49	RMS	33.00	-21.86	0.73	-95.23	23.87	-13.00	-46.49	Vertical
3	7405.00	-55.66	RMS	36.90	-21.26	0.42	-95.23	23.51	-13.00	-42.66	Vertical
4	18513.00	-65.55	RMS	38.13	-39.29	-9.54	-95.23	40.38	-13.00	-52.55	Vertical




Main

Part 24E Mode 1
NR SA n25 20M Ch376500 1RB1 BPSK
M

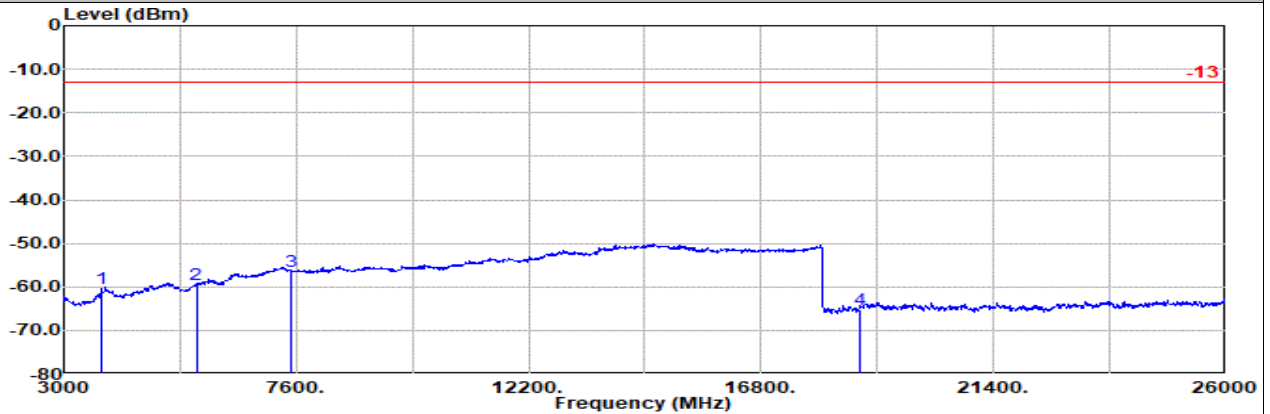

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n25 20M Ch376500 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 3748.00	-60.43	RMS	30.18	-23.15	0.84	-95.23	26.93	-13.00	-47.43	Horizontal	
2 5621.00	-59.42	RMS	33.13	-21.84	0.74	-95.23	23.78	-13.00	-46.42	Horizontal	
3 7495.00	-56.37	RMS	36.81	-21.20	0.39	-95.23	22.86	-13.00	-43.37	Horizontal	
4 18738.00	-65.34	RMS	37.95	-39.07	-9.54	-95.23	40.55	-13.00	-52.34	Horizontal	

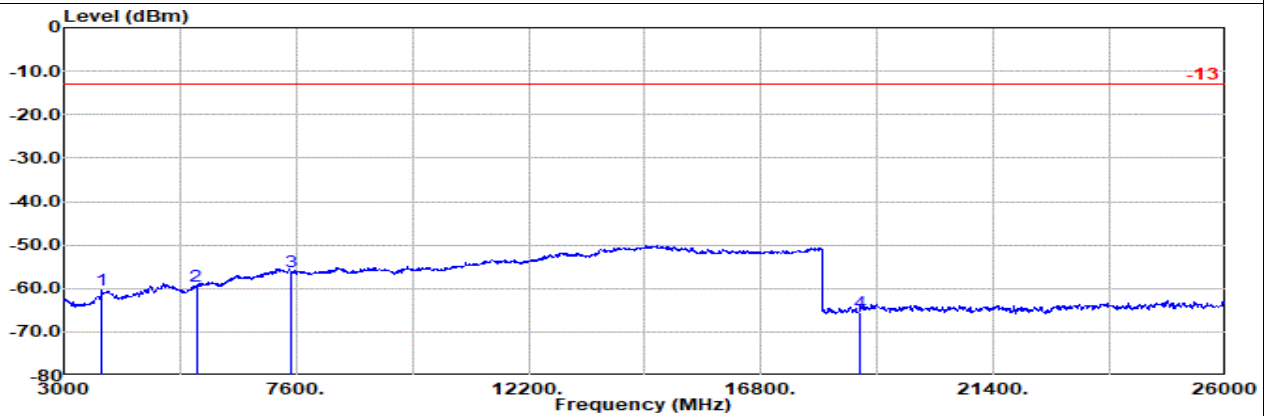


Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n25 20M Ch376500 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 3748.00	-60.51	RMS	30.18	-23.15	0.84	-95.23	26.85	-13.00	-47.51	Vertical	
2 5621.00	-59.49	RMS	33.13	-21.84	0.74	-95.23	23.71	-13.00	-46.49	Vertical	
3 7495.00	-56.04	RMS	36.81	-21.20	0.39	-95.23	23.19	-13.00	-43.04	Vertical	
4 18738.00	-65.52	RMS	37.95	-39.07	-9.54	-95.23	40.37	-13.00	-52.52	Vertical	




Main

Part 24E Mode 1
NR SA n25 20M Ch381000 1RB1 BPSK
H

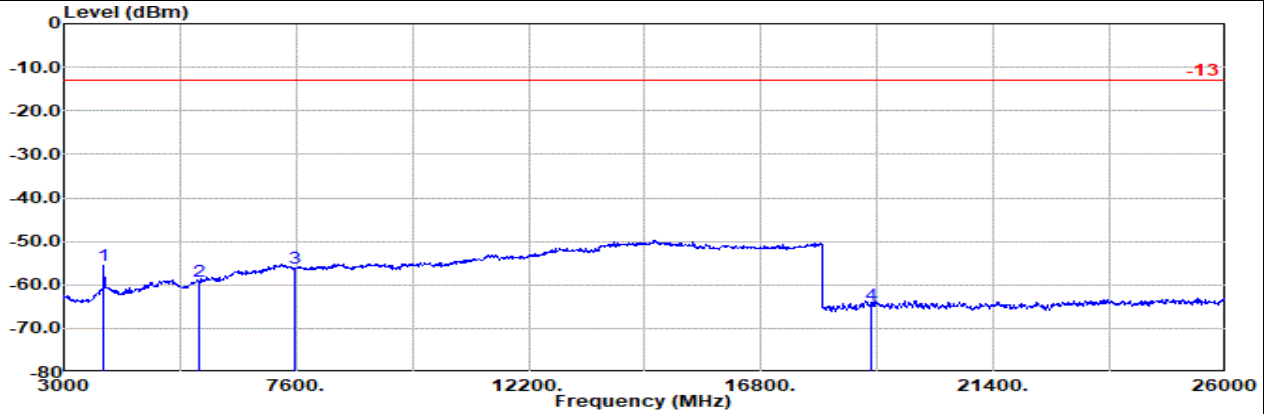

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n25 20M Ch381000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 3793.00	-55.54	RMS	30.37	-23.09	0.83	-95.23	31.58	-13.00	-42.54	Horizontal	
2 5689.00	-59.12	RMS	33.53	-21.80	0.70	-95.23	23.68	-13.00	-46.12	Horizontal	
3 7585.00	-56.13	RMS	36.77	-21.24	0.36	-95.23	23.21	-13.00	-43.13	Horizontal	
4 18963.00	-64.75	RMS	38.33	-38.86	-9.54	-95.23	40.55	-13.00	-51.75	Horizontal	

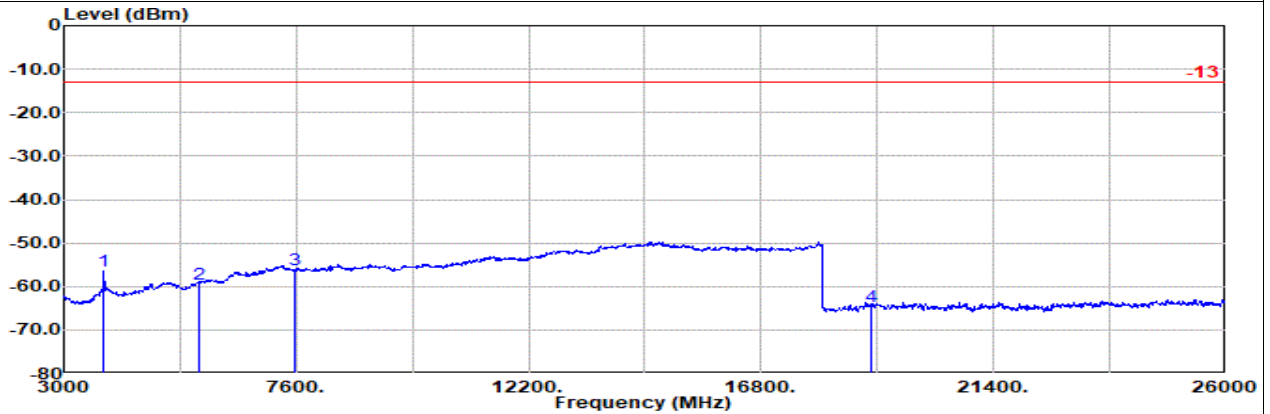


Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n25 20M Ch381000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 3793.00	-56.41	RMS	30.37	-23.09	0.83	-95.23	30.71	-13.00	-43.41	Vertical	
2 5689.00	-59.35	RMS	33.53	-21.80	0.70	-95.23	23.45	-13.00	-46.35	Vertical	
3 7585.00	-56.04	RMS	36.77	-21.24	0.36	-95.23	23.30	-13.00	-43.04	Vertical	
4 18963.00	-64.53	RMS	38.33	-38.86	-9.54	-95.23	40.77	-13.00	-51.53	Vertical	




Main

Part 27F Mode 1
NR SA n13 5M Ch155900 1RB1 BPSK
L

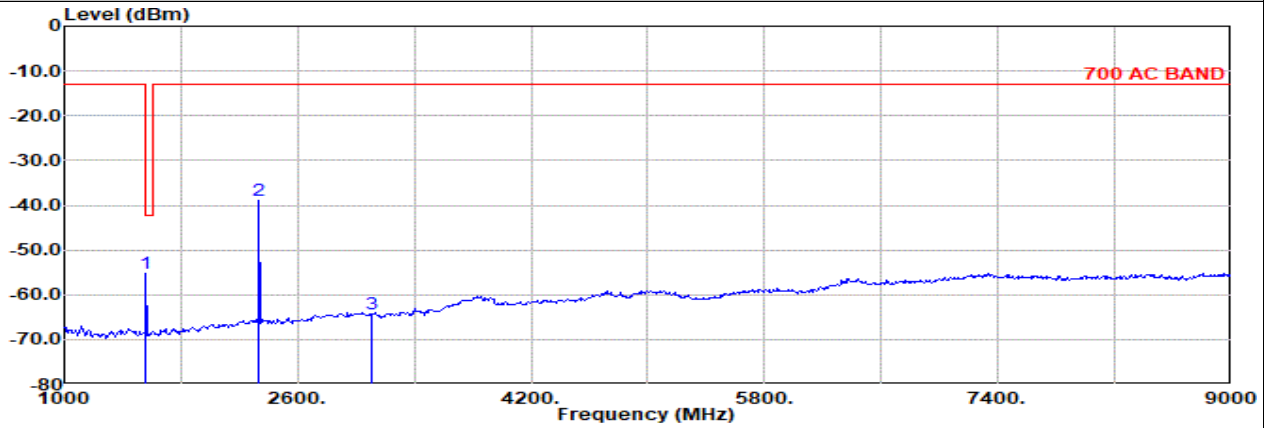

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n13 5M Ch155900 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 1555.00	-55.13	RMS	24.35	-25.32	0.65	-95.23	40.42	-13.00	-42.13	Horizontal	
2 2333.00	-38.84	RMS	27.07	-24.30	0.39	-95.23	53.23	-13.00	-25.84	Horizontal	
3 3110.00	-64.36	RMS	28.08	-23.30	0.36	-95.23	25.73	-13.00	-51.36	Horizontal	

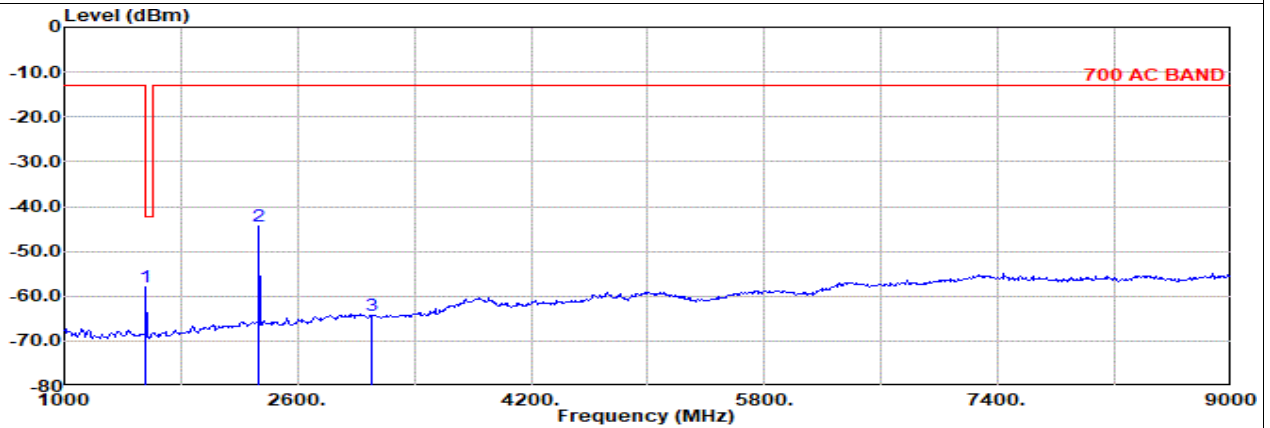

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n13 5M Ch155900 1RB1 BPSK


Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1 1555.00	-57.87	RMS	24.35	-25.32	0.65	-95.23	37.68	-13.00	-44.87	Vertical	
2 2333.00	-44.49	RMS	27.07	-24.30	0.39	-95.23	47.58	-13.00	-31.49	Vertical	
3 3110.00	-64.42	RMS	28.08	-23.30	0.36	-95.23	25.67	-13.00	-51.42	Vertical	



Main


Part 27F Mode 1
NR SA n13 5M Ch156400 1RB1 BPSK

M

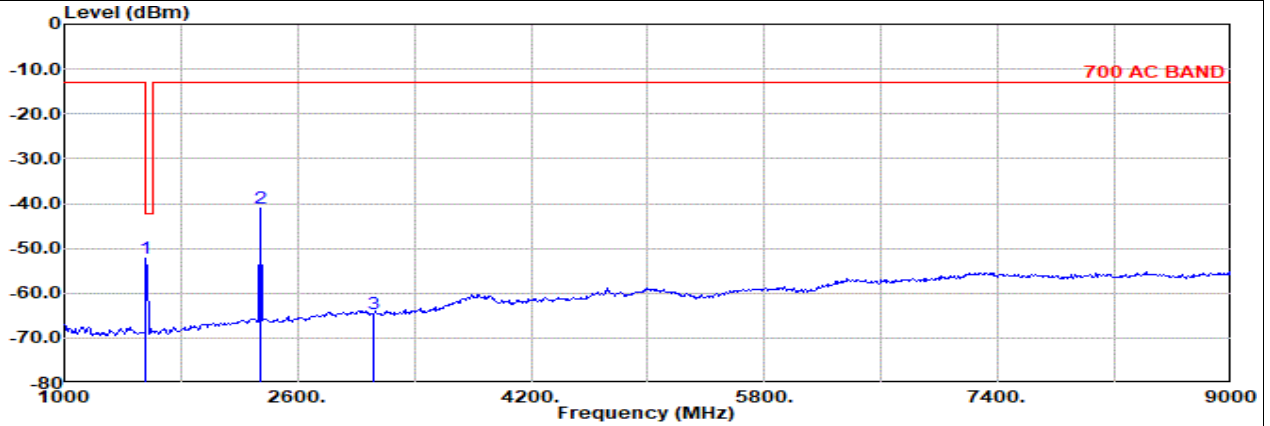

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n13 5M Ch156400 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Reading	Limit	Margin		Pol	
			Factor	1				dB	dB		dB
1	1560.00	-52.28	RMS	24.40	-25.32	0.65	-95.23	43.22	-42.15	-10.13	Horizontal
2	2340.00	-41.06	RMS	27.00	-24.29	0.38	-95.23	51.08	-13.00	-28.06	Horizontal
3	3120.00	-64.53	RMS	28.06	-23.30	0.36	-95.23	25.58	-13.00	-51.53	Horizontal

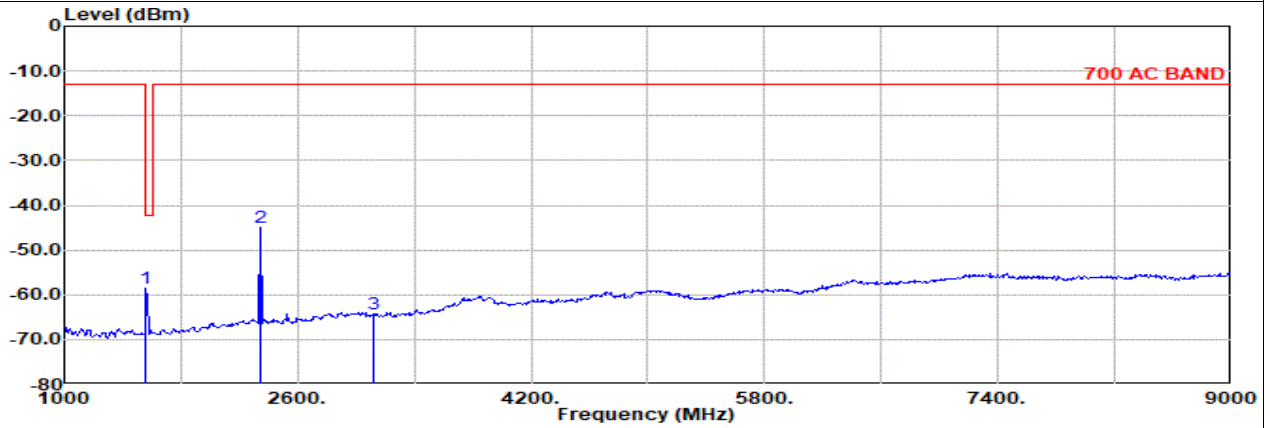


Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n13 5M Ch156400 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Reading	Limit	Margin		Pol	
			Factor	1				dB	dB		dB
1	1560.00	-58.55	RMS	24.40	-25.32	0.65	-95.23	36.95	-42.15	-16.40	Vertical
2	2340.00	-45.06	RMS	27.00	-24.29	0.38	-95.23	47.08	-13.00	-32.06	Vertical
3	3120.00	-64.32	RMS	28.06	-23.30	0.36	-95.23	25.79	-13.00	-51.32	Vertical




Main

Part 27F Mode 1
NR SA n13 5M Ch156900 1RB1 BPSK
H

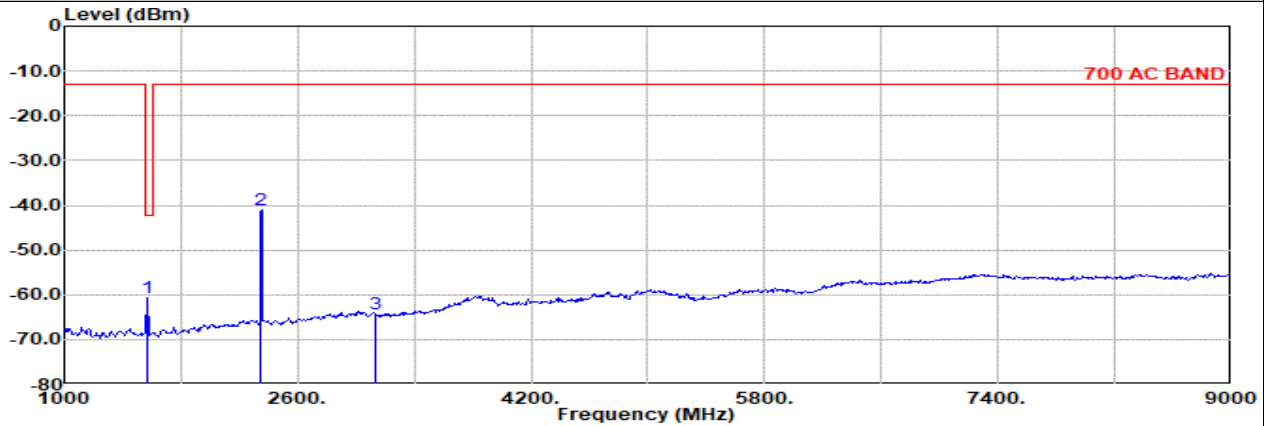

Site : 03CH21-HY
 Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n13 5M Ch156900 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	1565.00	-60.71	RMS	24.40	-25.31	0.65	-95.23	34.78	-42.15	-18.56	Horizontal	
2	2348.00	-41.14	RMS	27.00	-24.28	0.38	-95.23	50.99	-13.00	-28.14	Horizontal	
3	3130.00	-64.26	RMS	28.04	-23.29	0.36	-95.23	25.86	-13.00	-51.26	Horizontal	

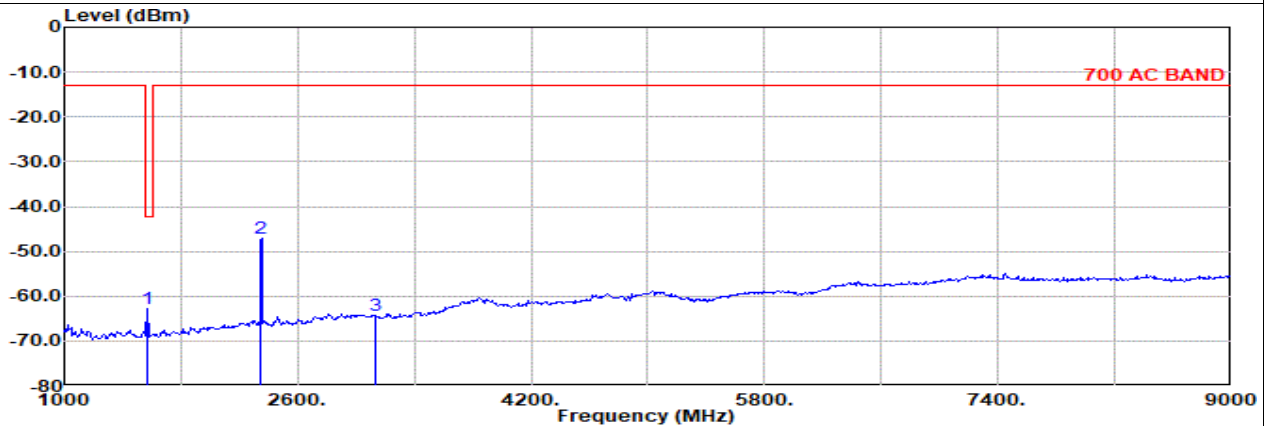


Site : 03CH21-HY
 Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n13 5M Ch156900 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	1565.00	-62.70	RMS	24.40	-25.31	0.65	-95.23	32.79	-42.15	-20.55	Vertical	
2	2348.00	-47.13	RMS	27.00	-24.28	0.38	-95.23	45.00	-13.00	-34.13	Vertical	
3	3130.00	-64.18	RMS	28.04	-23.29	0.36	-95.23	25.94	-13.00	-51.18	Vertical	




Main

Part 27F Mode 2
NR SA n13 10M Ch156400 1RB1 BPSK
M

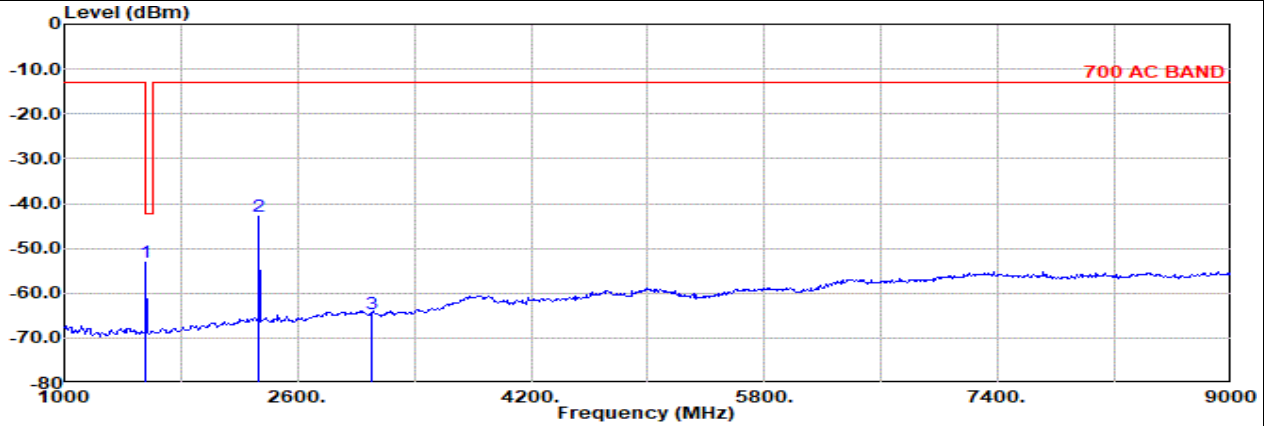

Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n13 10M Ch156400 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Reading	Limit	Margin Pol			
			Factor	1				dB	dB	dB	dB
1	1556.00	-53.09	RMS	24.36	-25.32	0.65	-95.23	42.45	-13.00	-40.09	Horizontal
2	2333.00	-42.88	RMS	27.07	-24.30	0.39	-95.23	49.19	-13.00	-29.88	Horizontal
3	3111.00	-64.49	RMS	28.08	-23.30	0.36	-95.23	25.60	-13.00	-51.49	Horizontal

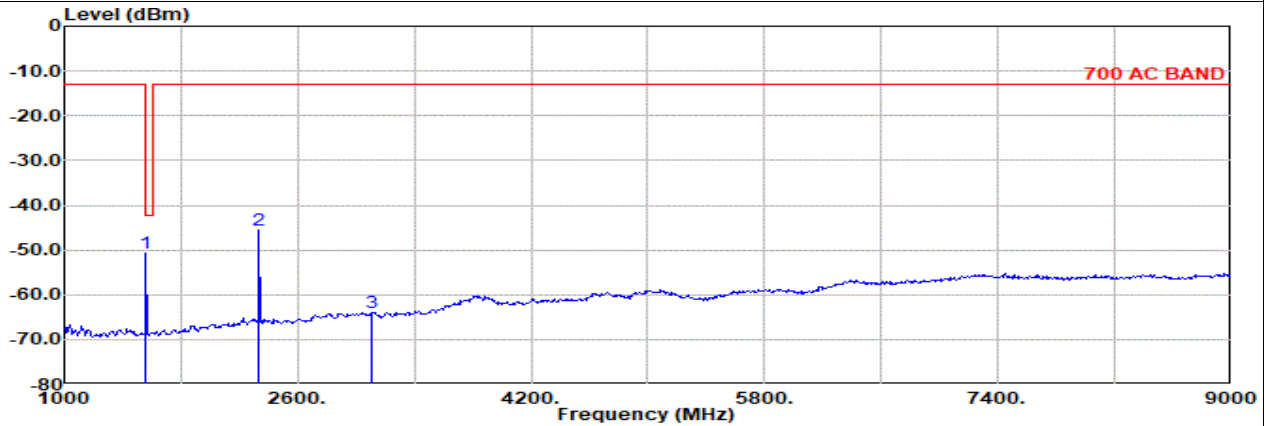


Site : 03CH21-HY
Condition: 700 AC BAND 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n13 10M Ch156400 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Reading	Limit	Margin Pol			
			Factor	1				dB	dB	dB	dB
1	1556.00	-50.83	RMS	24.36	-25.32	0.65	-95.23	44.71	-13.00	-37.83	Vertical
2	2333.00	-45.69	RMS	27.07	-24.30	0.39	-95.23	46.38	-13.00	-32.69	Vertical
3	3111.00	-63.87	RMS	28.08	-23.30	0.36	-95.23	26.22	-13.00	-50.87	Vertical




Main

Part 27D Mode 1
NR SA n30 5M Ch461500 1RB1 BPSK
L

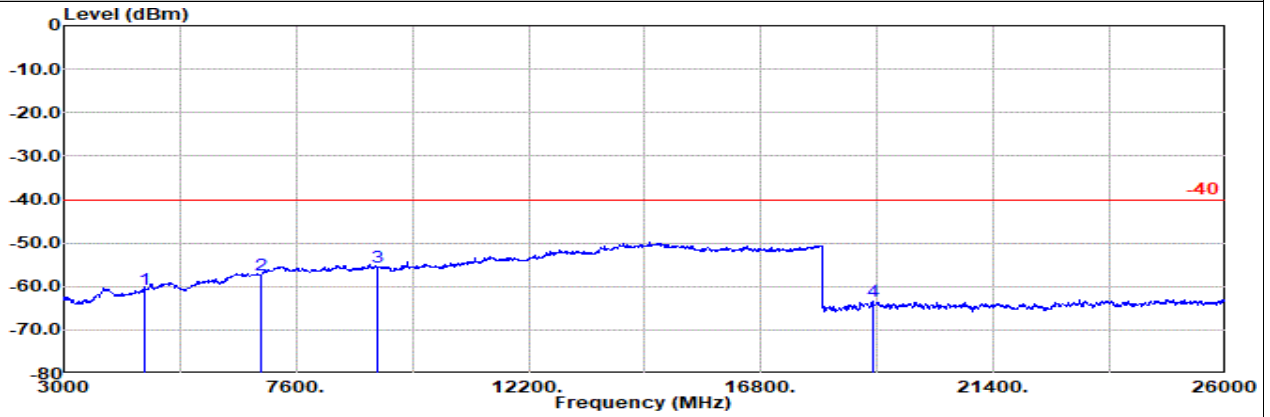

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
NR n30 5M Ch461500 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	1					g	dB	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 4611.00	-60.70	RMS	31.84	-22.73	0.64	-95.23	24.78	-40.00	-20.70	Horizontal	
2 6917.00	-57.23	RMS	36.33	-21.50	0.45	-95.23	22.72	-40.00	-17.23	Horizontal	
3 9222.00	-55.45	RMS	37.06	-21.59	0.45	-95.23	23.86	-40.00	-15.45	Horizontal	
4 19000.00	-63.52	RMS	38.40	-38.82	-9.54	-95.23	41.67	-40.00	-23.52	Horizontal	

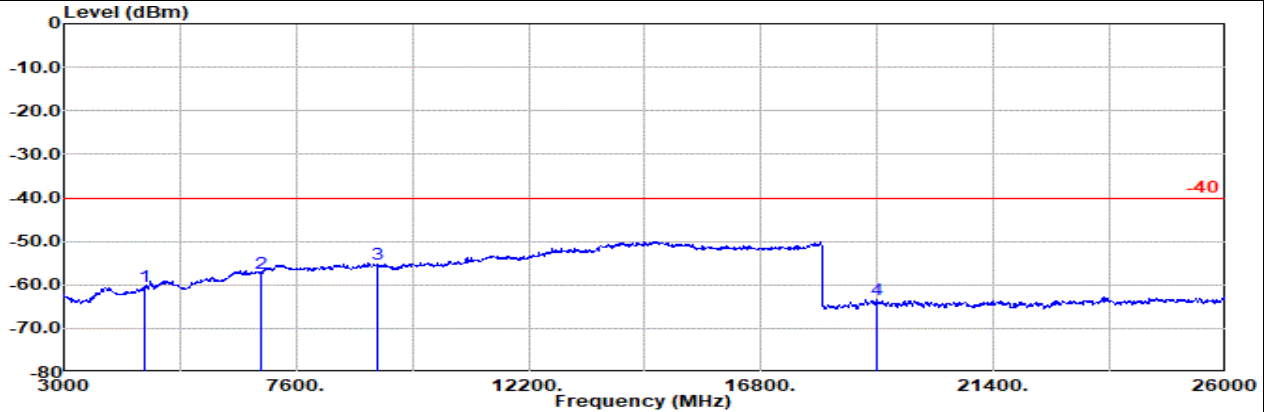


Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
NR n30 5M Ch461500 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	1					g	dB	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 4611.00	-60.38	RMS	31.84	-22.73	0.64	-95.23	25.10	-40.00	-20.38	Vertical	
2 6917.00	-57.26	RMS	36.33	-21.50	0.45	-95.23	22.69	-40.00	-17.26	Vertical	
3 9222.00	-55.35	RMS	37.06	-21.59	0.45	-95.23	23.96	-40.00	-15.35	Vertical	
4 19104.00	-63.45	RMS	38.59	-38.65	-9.54	-95.23	41.38	-40.00	-23.45	Vertical	




Main

Part 27D Mode 1
NR SA n30 5M Ch462000 1RB1 BPSK
M

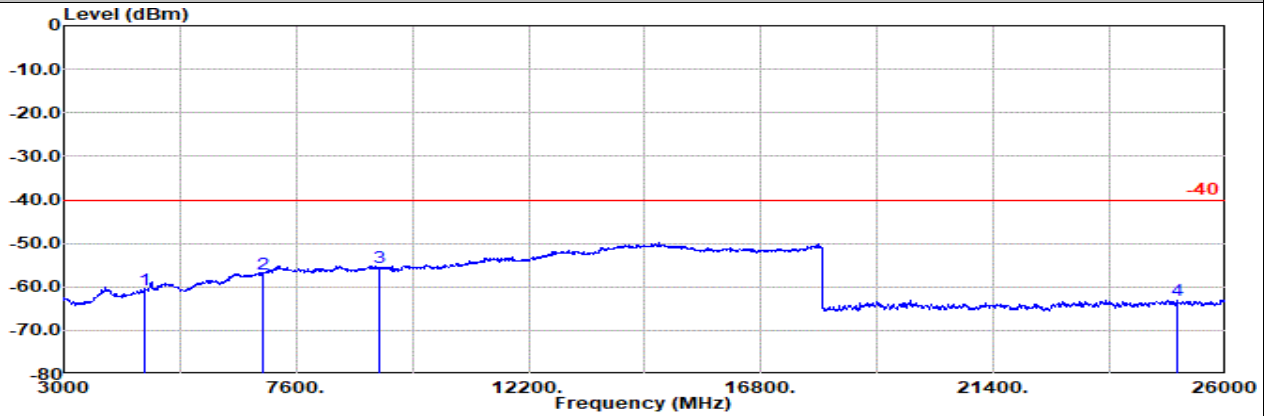

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: NR n30 5M Ch462000 1RB1 BPSK

1	2	3	4								
Freq	Level	Detector	Ant Amp\Cb Filter	EIRPCF	Readin	Limit	Margin	Pol			
MHz	dBm		Factor	1	g	dBm	dB				
			dB/m	dB	dB	dB	dB	dB			
1	4616.00	-60.59	RMS	31.86	-22.70	0.64	-95.23	24.84	-40.00	-20.59	Horizontal
2	6924.00	-56.99	RMS	36.35	-21.50	0.45	-95.23	22.94	-40.00	-16.99	Horizontal
3	9232.00	-55.69	RMS	37.04	-21.59	0.45	-95.23	23.64	-40.00	-15.69	Horizontal
4	25048.00	-62.97	RMS	39.40	-31.40	-9.54	-95.23	33.80	-40.00	-22.97	Horizontal

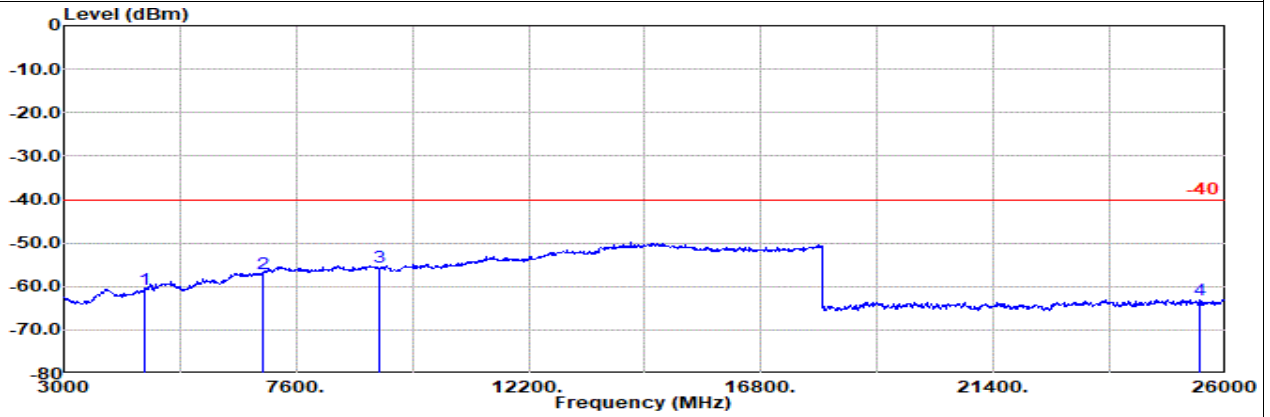


Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
: NR n30 5M Ch462000 1RB1 BPSK

1	2	3	4								
Freq	Level	Detector	Ant Amp\Cb Filter	EIRPCF	Readin	Limit	Margin	Pol			
MHz	dBm		Factor	1	dB	dB	dB	dB			
			dB/m	dB	dB	dB	dB	dB			
1	4616.00	-60.73	RMS	31.86	-22.70	0.64	-95.23	24.70	-40.00	-20.73	Vertical
2	6924.00	-56.92	RMS	36.35	-21.50	0.45	-95.23	23.01	-40.00	-16.92	Vertical
3	9232.00	-55.46	RMS	37.04	-21.59	0.45	-95.23	23.87	-40.00	-15.46	Vertical
4	25496.00	-62.96	RMS	39.09	-31.29	-9.54	-95.23	34.01	-40.00	-22.96	Vertical




Main

Part 27D Mode 1
NR SA n30 5M Ch462500 1RB1 BPSK
H

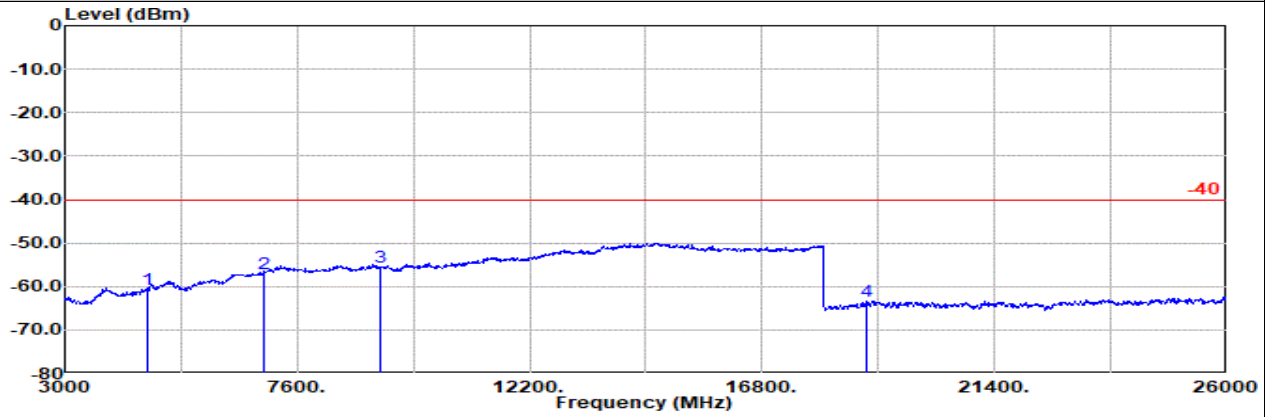

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
NR n30 5M Ch462500 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	l					g	dBm	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 4621.00	-60.58	RMS	31.88	-22.67	0.64	-95.23	24.80	-40.00	-20.58	Horizontal	
2 6932.00	-56.93	RMS	36.36	-21.50	0.45	-95.23	22.99	-40.00	-16.93	Horizontal	
3 9242.00	-55.51	RMS	37.02	-21.59	0.44	-95.23	23.85	-40.00	-15.51	Horizontal	
4 18872.00	-63.34	RMS	38.29	-38.94	-9.54	-95.23	42.08	-40.00	-23.34	Horizontal	

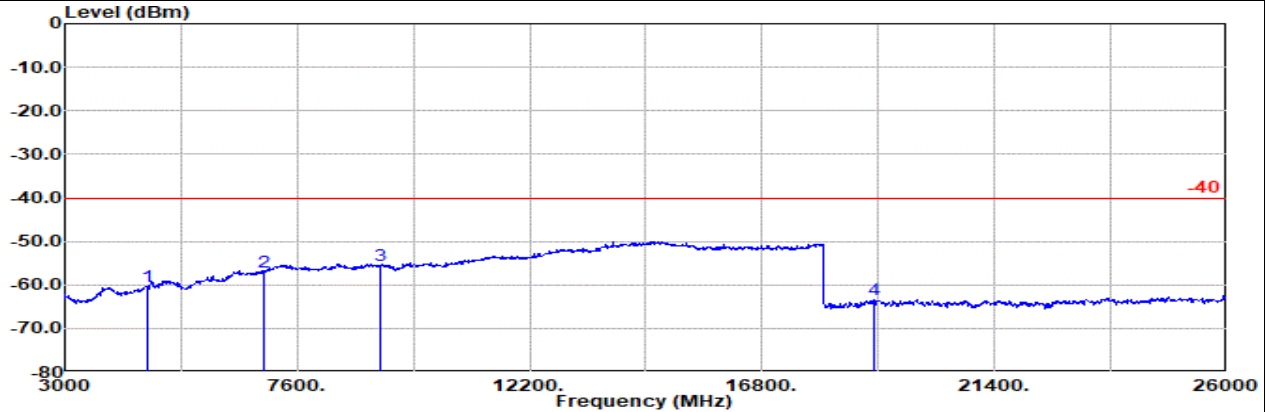


Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
NR n30 5M Ch462500 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	l					g	dBm	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 4621.00	-60.30	RMS	31.88	-22.67	0.64	-95.23	25.08	-40.00	-20.30	Vertical	
2 6932.00	-57.15	RMS	36.36	-21.50	0.45	-95.23	22.77	-40.00	-17.15	Vertical	
3 9242.00	-55.56	RMS	37.02	-21.59	0.44	-95.23	23.80	-40.00	-15.56	Vertical	
4 19000.00	-63.54	RMS	38.40	-38.82	-9.54	-95.23	41.65	-40.00	-23.54	Vertical	




Main

Part 27D Mode 2
NR SA n30 10M Ch462000 1RB1 BPSK
M

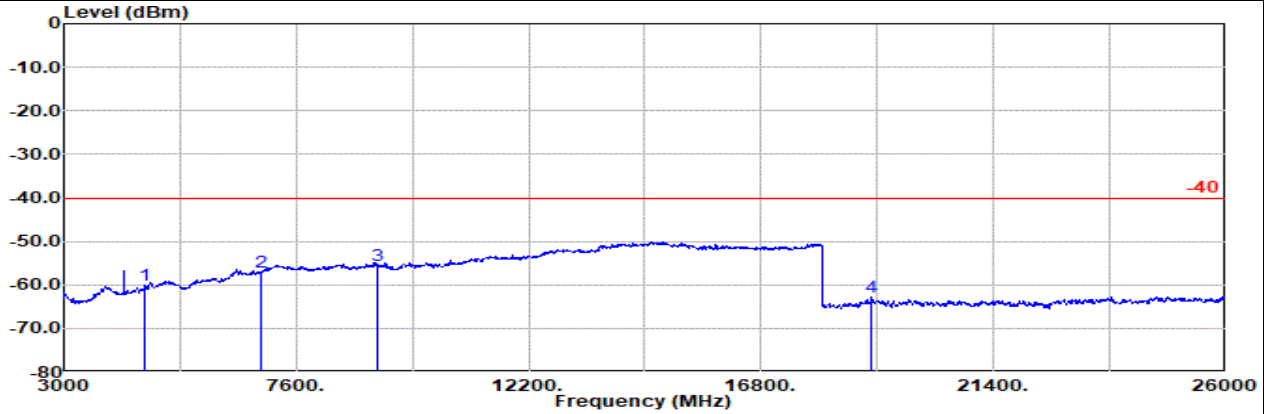

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal
NR n30 10M Ch462000 1RB1 BPSK

1	2	3	4							
Freq	Level	Detector	Ant Amp\Cb Filter	EIRPCF	Readin	Limit	Margin	Pol		
MHz	dBm		Factor	1	g	dBm	dB			
4612.00	-60.02	RMS	31.85	-22.72	0.64	-95.23	25.44	-40.00	-20.02	Horizontal
6917.00	-57.12	RMS	36.33	-21.50	0.45	-95.23	22.83	-40.00	-17.12	Horizontal
9223.00	-55.69	RMS	37.05	-21.59	0.45	-95.23	23.63	-40.00	-15.69	Horizontal
18984.00	-62.73	RMS	38.37	-38.84	-9.54	-95.23	42.51	-40.00	-22.73	Horizontal

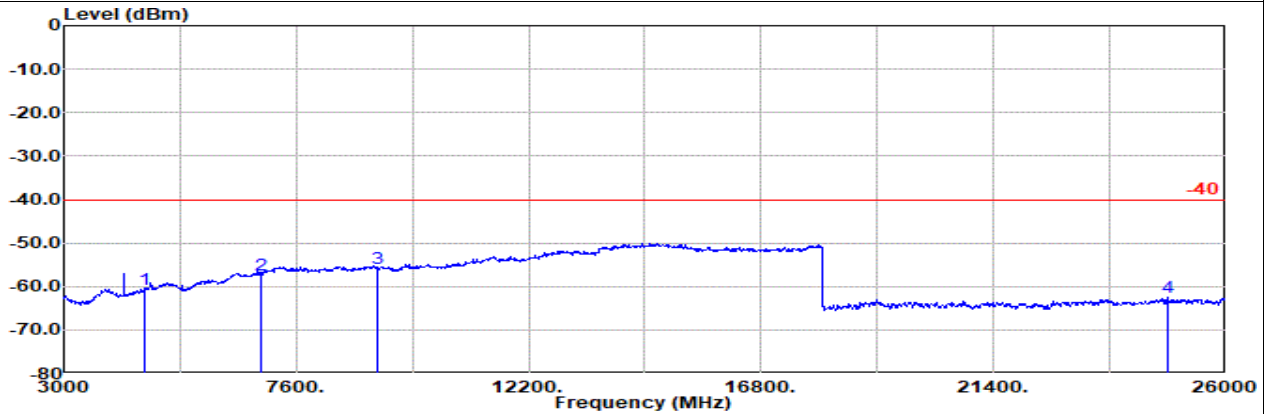

Site : 03CH21-HY
Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical
NR n30 10M Ch462000 1RB1 BPSK

1	2	3	4							
Freq	Level	Detector	Ant Amp\Cb Filter	EIRPCF	Readin	Limit	Margin	Pol		
MHz	dBm		Factor	1	g	dBm	dB			
4612.00	-60.58	RMS	31.85	-22.72	0.64	-95.23	24.88	-40.00	-20.58	Vertical
6917.00	-57.50	RMS	36.33	-21.50	0.45	-95.23	22.45	-40.00	-17.50	Vertical
9223.00	-55.71	RMS	37.05	-21.59	0.45	-95.23	23.61	-40.00	-15.71	Vertical
24832.00	-62.39	RMS	39.66	-31.53	-9.54	-95.23	34.25	-40.00	-22.39	Vertical




Main

Part 27M Mode 1


NR SA n41 20M Ch501204 1RB1 BPSK

L

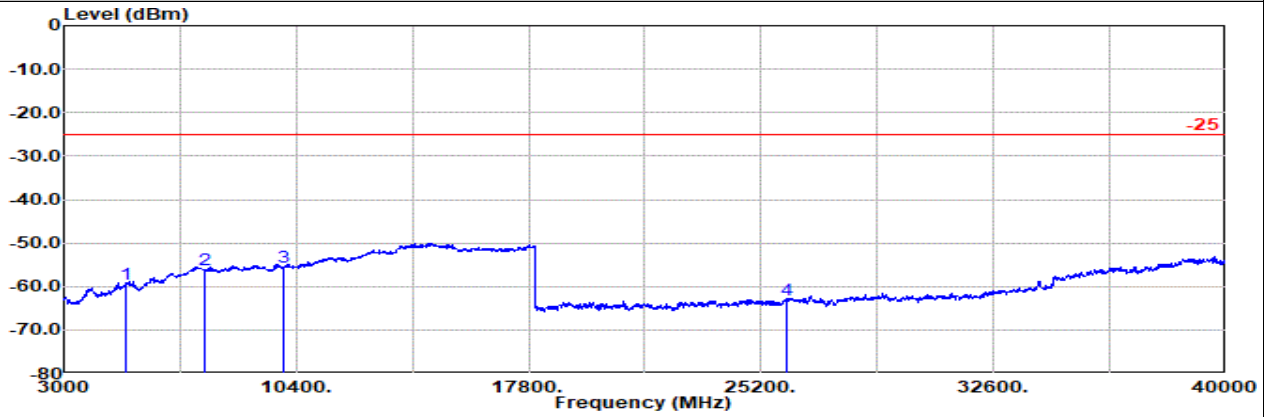

Site : 03CH21-HY
 Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n41 20M Ch501204 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4995.00	-59.47	RMS	32.70	-21.71	0.41	-95.23	24.36	-25.00	-34.47	Horizontal
2	7492.00	-56.30	RMS	36.82	-21.21	0.39	-95.23	22.93	-25.00	-31.30	Horizontal
3	9989.00	-55.66	RMS	37.30	-21.41	0.41	-95.23	23.27	-25.00	-30.66	Horizontal
4	26000.00	-63.10	RMS	39.10	-30.86	-9.54	-95.23	33.43	-25.00	-38.10	Horizontal

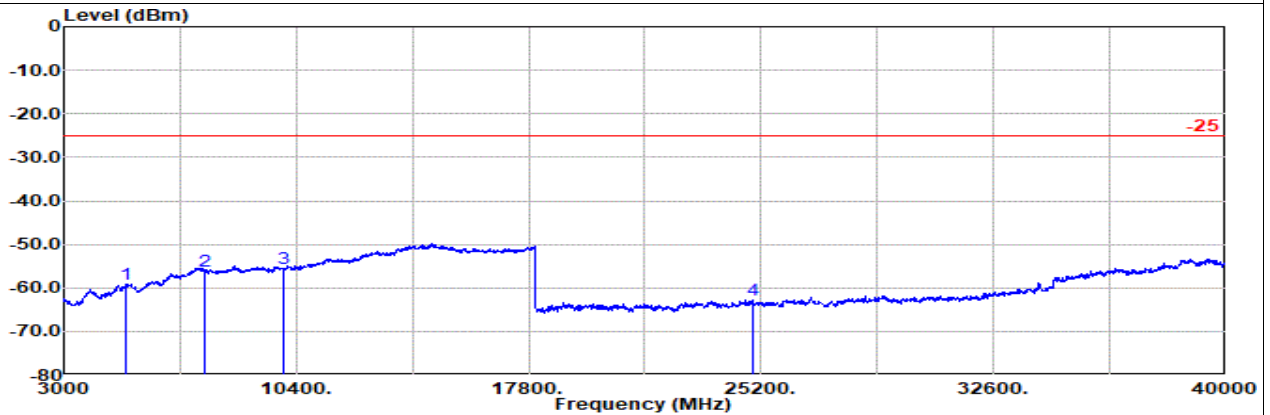


Site : 03CH21-HY
 Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n41 20M Ch501204 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4995.00	-59.16	RMS	32.70	-21.71	0.41	-95.23	24.67	-25.00	-34.16	Vertical
2	7492.00	-56.16	RMS	36.82	-21.21	0.39	-95.23	23.07	-25.00	-31.16	Vertical
3	9989.00	-55.56	RMS	37.30	-21.41	0.41	-95.23	23.37	-25.00	-30.56	Vertical
4	24936.00	-62.77	RMS	39.43	-31.46	-9.54	-95.23	34.03	-25.00	-37.77	Vertical




Main

Part 27M Mode 1
NR SA n41 20M Ch518598 1RB1 BPSK
M

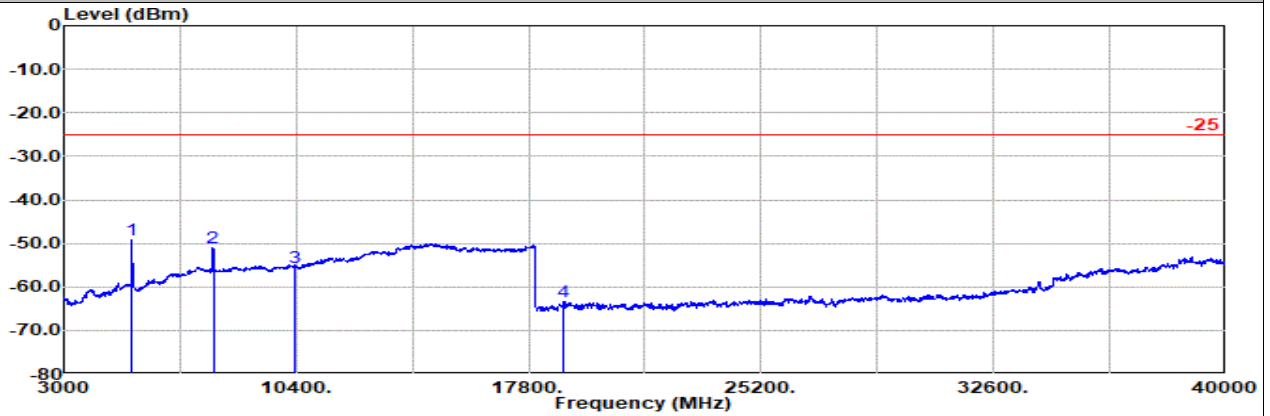

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n41 20M Ch518598 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 5169.00	-49.18	RMS	32.60	-21.74	0.39	-95.23	34.80	-25.00	-24.18	Horizontal
2 7753.00	-51.06	RMS	36.60	-21.35	0.40	-95.23	28.52	-25.00	-26.06	Horizontal
3 10337.00	-55.50	RMS	37.35	-21.61	0.45	-95.23	23.54	-25.00	-30.50	Horizontal
4 18896.00	-63.34	RMS	38.38	-38.92	-9.54	-95.23	41.97	-25.00	-38.34	Horizontal

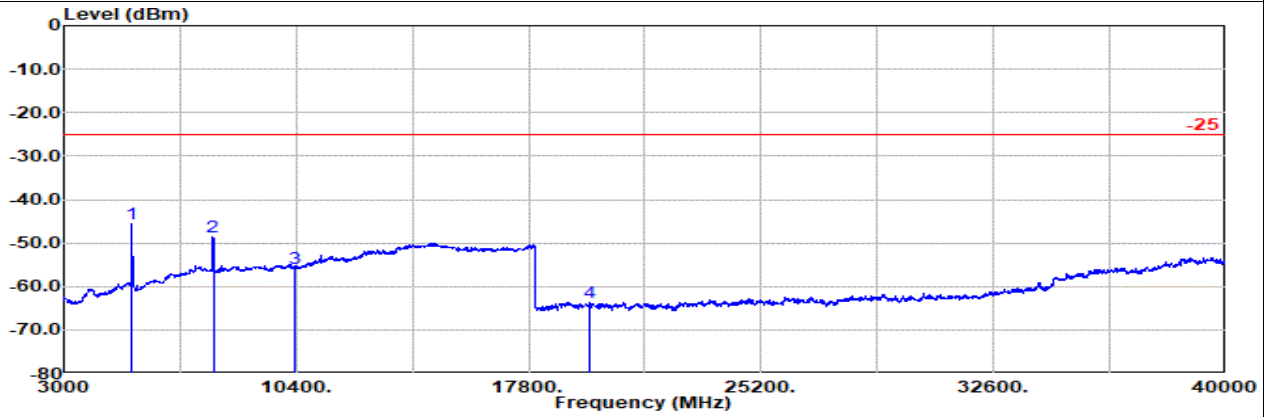


Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n41 20M Ch518598 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 5169.00	-45.68	RMS	32.60	-21.74	0.39	-95.23	38.30	-25.00	-20.68	Vertical
2 7753.00	-48.46	RMS	36.60	-21.35	0.40	-95.23	31.12	-25.00	-23.46	Vertical
3 10337.00	-55.70	RMS	37.35	-21.61	0.45	-95.23	23.34	-25.00	-30.70	Vertical
4 19736.00	-63.69	RMS	37.98	-37.59	-9.54	-95.23	40.69	-25.00	-38.69	Vertical




Main

Part 27M Mode 1
NR SA n41 20M NR SA n41 20M Ch535998 1RB1 BPSK
H

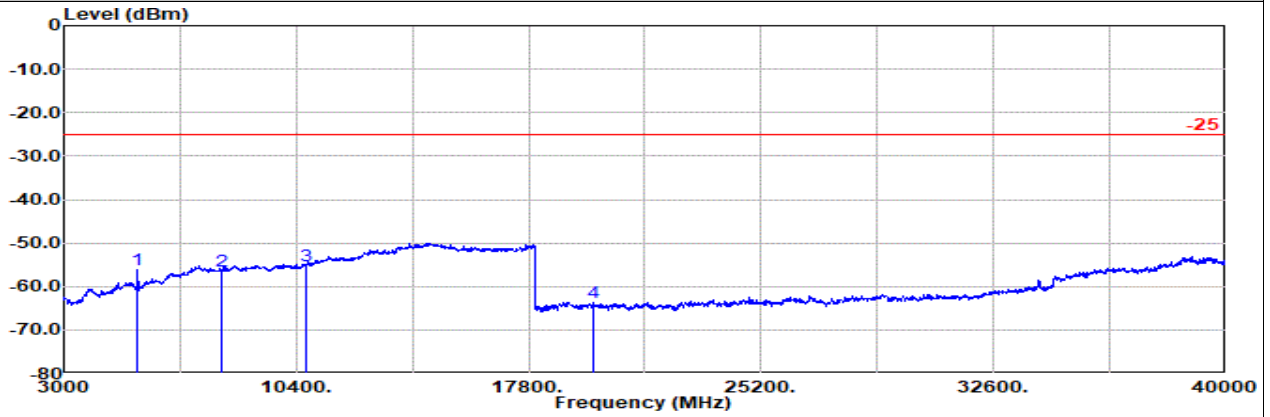

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n41 20M Ch535998 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	1						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 5343.00	-56.16	RMS	32.41	-21.78	0.58	-95.23	27.86	-25.00	-31.16	Horizontal
2 8014.00	-56.45	RMS	36.67	-21.57	0.38	-95.23	23.30	-25.00	-31.45	Horizontal
3 10685.00	-55.39	RMS	37.50	-21.68	0.50	-95.23	23.52	-25.00	-30.39	Horizontal
4 19856.00	-63.63	RMS	38.10	-37.39	-9.54	-95.23	40.43	-25.00	-38.63	Horizontal

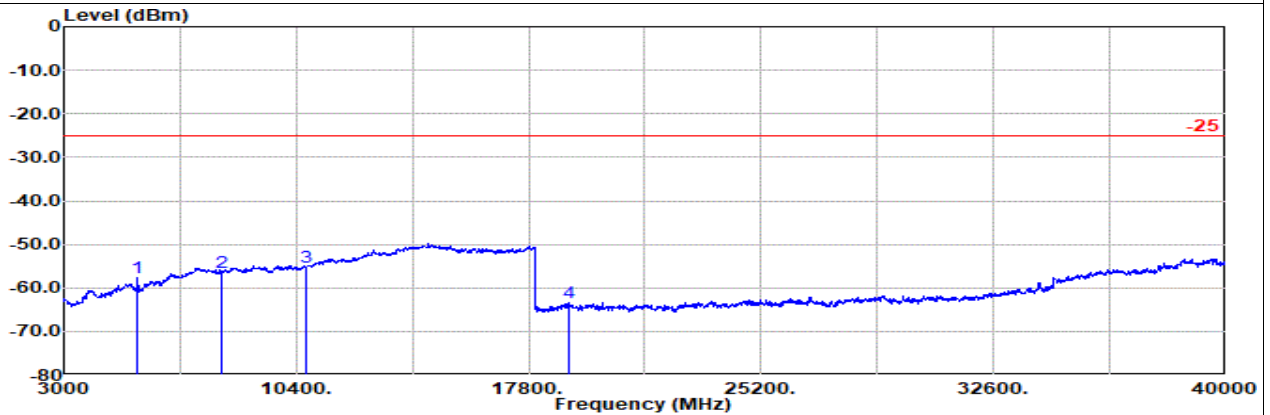

Site : 03CH21-HY
Condition: -25 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n41 20M Ch535998 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	1						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 5343.00	-57.53	RMS	32.41	-21.78	0.58	-95.23	26.49	-25.00	-32.53	Vertical
2 8014.00	-56.37	RMS	36.67	-21.57	0.38	-95.23	23.38	-25.00	-31.37	Vertical
3 10685.00	-55.19	RMS	37.50	-21.68	0.50	-95.23	23.72	-25.00	-30.19	Vertical
4 19096.00	-63.46	RMS	38.59	-38.66	-9.54	-95.23	41.38	-25.00	-38.46	Vertical




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 1


EN-DC B5+n77 10M + 20M Ch20525 1RB0 QPSK + Ch630668 1RB1 BPSK

L

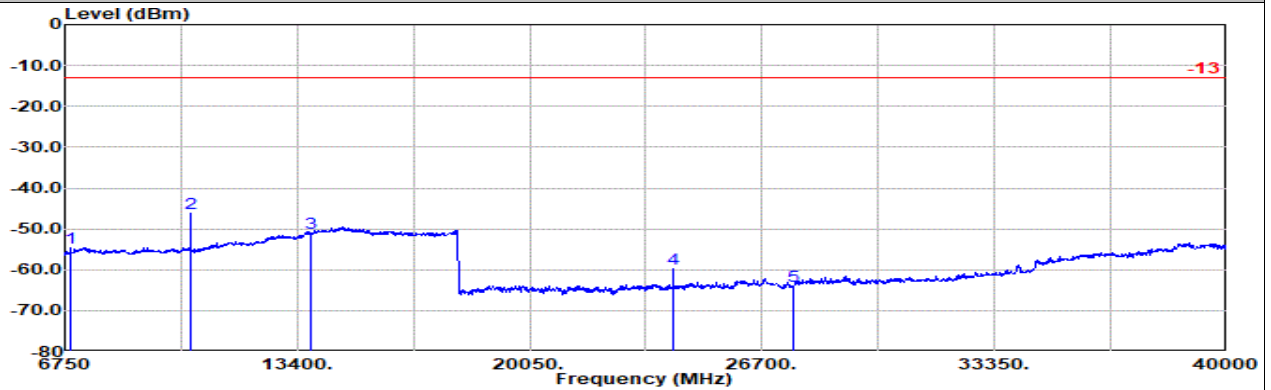

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch630668 1RB1 BPSK

1	2	3	4	5	Ant Amp\Cb		Filter		EIRPCF		Readin Limit		Margin	Pol
					Factor	1	dB	dB	dB	dB	dBuV	dBm		
Freq	Level	Detector	Factor	1	Filter	EIRPCF	Readin	Limit	Margin	Pol				
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB					
6903.00	-54.66	RMS	36.31	-21.50	1.25	-95.23	24.51	-13.00	-41.66	Horizontal				
10354.00	-46.22	RMS	37.39	-21.62	0.50	-95.23	32.74	-13.00	-33.22	Horizontal				
13805.00	-51.13	RMS	40.32	-21.94	0.46	-95.23	25.26	-13.00	-38.13	Horizontal				
24160.00	-59.72	RMS	38.72	-31.83	-9.54	-95.23	38.16	-13.00	-46.72	Horizontal				
27610.00	-63.89	RMS	39.22	-31.15	-9.54	-95.23	32.81	-13.00	-50.89	Horizontal				

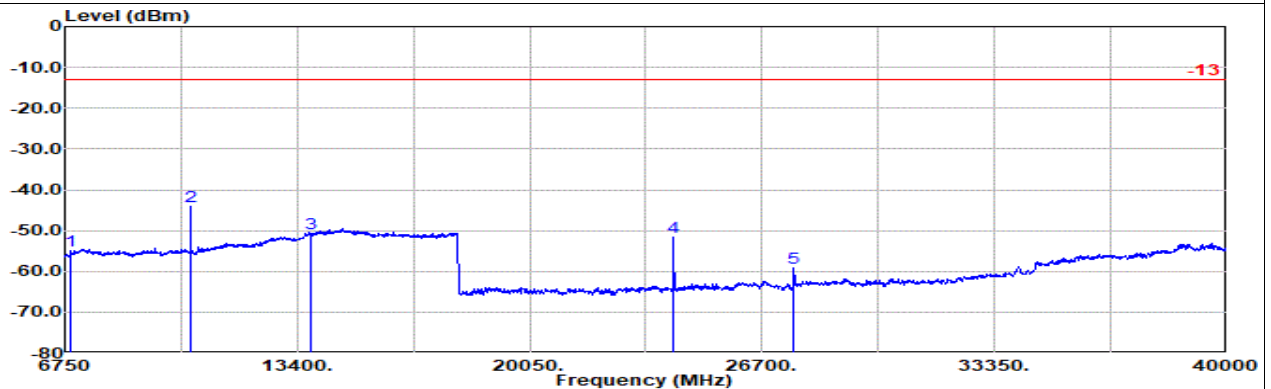

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch630668 1RB1 BPSK

1	2	3	4	5	Ant Amp\Cb		Filter		EIRPCF		Readin Limit		Margin	Pol
					Factor	1	dB	dB	dB	dB	dBuV	dBm		
Freq	Level	Detector	Factor	1	Filter	EIRPCF	Readin	Limit	Margin	Pol				
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB					
6903.00	-55.05	RMS	36.31	-21.50	1.25	-95.23	24.12	-13.00	-42.05	Vertical				
10354.00	-44.15	RMS	37.39	-21.62	0.50	-95.23	34.81	-13.00	-31.15	Vertical				
13805.00	-50.69	RMS	40.32	-21.94	0.46	-95.23	25.70	-13.00	-37.69	Vertical				
24160.00	-51.54	RMS	38.72	-31.83	-9.54	-95.23	46.34	-13.00	-38.54	Vertical				
27610.00	-59.26	RMS	39.22	-31.15	-9.54	-95.23	37.44	-13.00	-46.26	Vertical				




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 1


EN-DC B5+n77 10M + 20M Ch20525 1RB0 QPSK + Ch633334 1RB1 BPSK

M

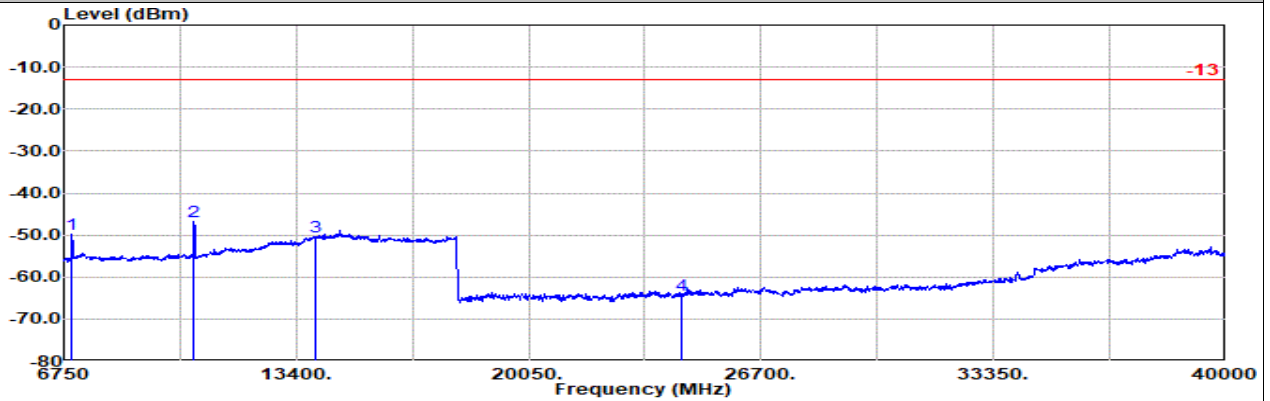

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch633334 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 6983.00	-49.91	RMS	36.47	-21.51	1.22	-95.23	29.14	-13.00	-36.91	Horizontal
2 10474.00	-46.85	RMS	37.10	-21.69	0.51	-95.23	32.46	-13.00	-33.85	Horizontal
3 13965.00	-50.46	RMS	40.76	-22.02	0.45	-95.23	25.58	-13.00	-37.46	Horizontal
4 24439.00	-64.20	RMS	38.90	-31.79	-9.54	-95.23	33.46	-13.00	-51.20	Horizontal

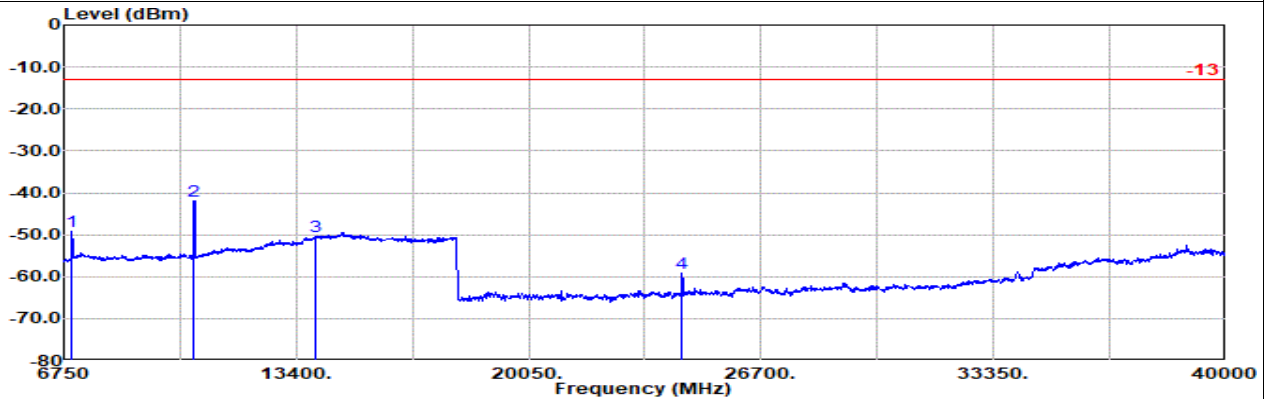

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch633334 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 6983.00	-49.12	RMS	36.47	-21.51	1.22	-95.23	29.93	-13.00	-36.12	Vertical
2 10474.00	-41.99	RMS	37.10	-21.69	0.51	-95.23	37.32	-13.00	-28.99	Vertical
3 13965.00	-50.53	RMS	40.76	-22.02	0.45	-95.23	25.51	-13.00	-37.53	Vertical
4 24439.00	-59.09	RMS	38.90	-31.79	-9.54	-95.23	38.57	-13.00	-46.09	Vertical




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 1


EN-DC B5+n77 10M + 20M Ch20525 1RB0 QPSK + Ch636000 1RB1 BPSK

H

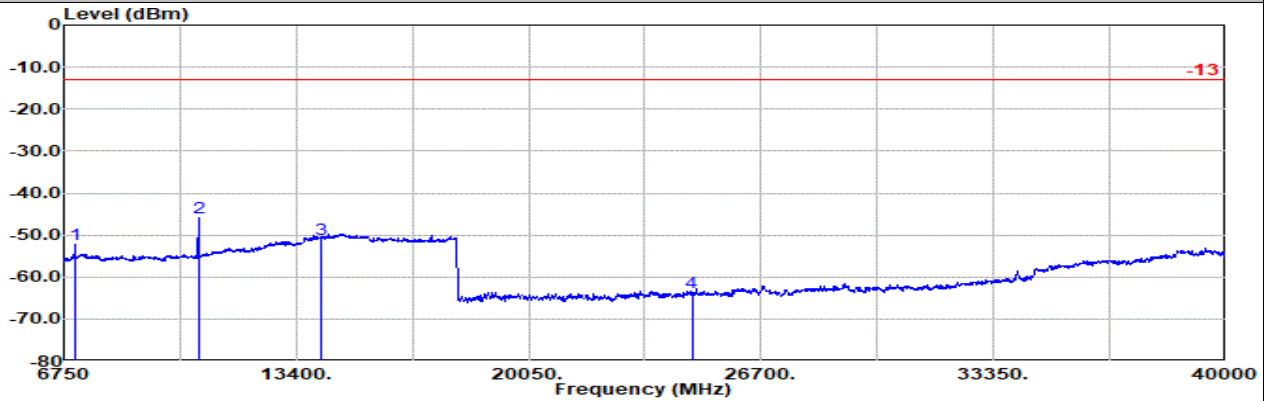

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch636000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7063.00	-52.37	RMS	36.47	-21.46	1.14	-95.23	26.71	-13.00	-39.37	Horizontal
2 10594.00	-45.98	RMS	37.39	-21.69	0.51	-95.23	33.04	-13.00	-32.98	Horizontal
3 14125.00	-50.92	RMS	40.95	-22.23	0.46	-95.23	25.13	-13.00	-37.92	Horizontal
4 24719.00	-63.82	RMS	39.36	-31.62	-9.54	-95.23	33.21	-13.00	-50.82	Horizontal

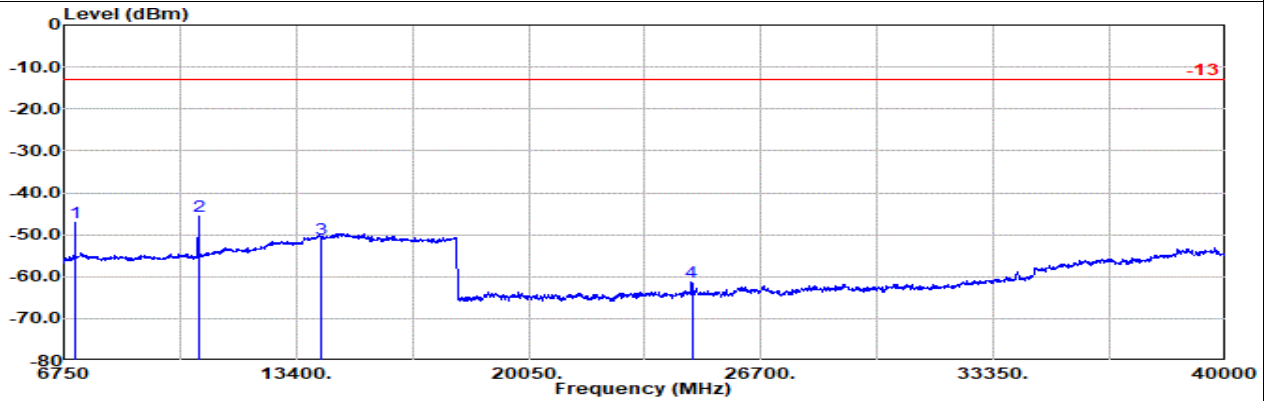

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n77 20M Ch636000 1RB1 BPSK

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7063.00	-47.18	RMS	36.47	-21.46	1.14	-95.23	31.90	-13.00	-34.18	Vertical
2 10594.00	-45.64	RMS	37.39	-21.69	0.51	-95.23	33.38	-13.00	-32.64	Vertical
3 14125.00	-50.89	RMS	40.95	-22.23	0.46	-95.23	25.16	-13.00	-37.89	Vertical
4 24719.00	-61.23	RMS	39.36	-31.62	-9.54	-95.23	35.80	-13.00	-48.23	Vertical




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 2


EN-DC B5+n78 10M + 20M Ch20525 1RB0 QPSK + Ch630668 1RB1 BPSK

L

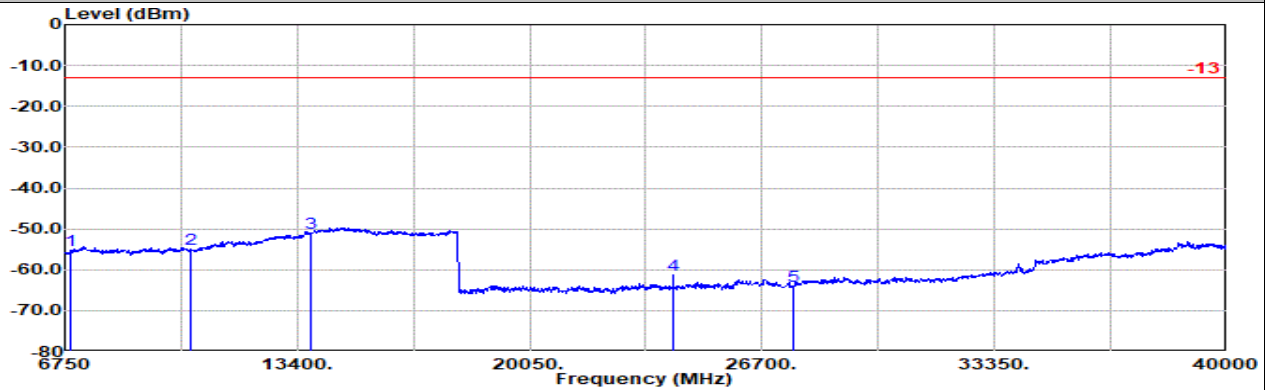

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch630668 1RB1 BPSK

1	2	3	4	5	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin g	Limit dBm	Margin dB	Pol
								Factor	l						
					6903.00	-55.12	RMS	36.31	-21.50	1.25	-95.23	24.05	-13.00	-42.12	Horizontal
					10354.00	-55.02	RMS	37.39	-21.62	0.50	-95.23	23.94	-13.00	-42.02	Horizontal
					13805.00	-50.94	RMS	40.32	-21.94	0.46	-95.23	25.45	-13.00	-37.94	Horizontal
					24159.00	-61.41	RMS	38.72	-31.83	-9.54	-95.23	36.47	-13.00	-48.41	Horizontal
					27610.00	-63.99	RMS	39.22	-31.15	-9.54	-95.23	32.71	-13.00	-50.99	Horizontal

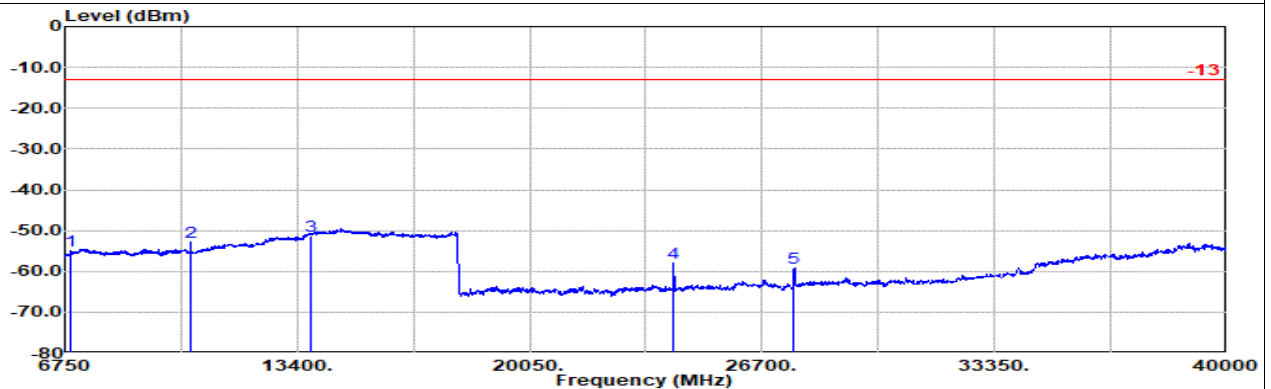

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch630668 1RB1 BPSK

1	2	3	4	5	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin g	Limit dBm	Margin dB	Pol
								Factor	l						
					6903.00	-55.06	RMS	36.31	-21.50	1.25	-95.23	24.11	-13.00	-42.06	Vertical
					10354.00	-52.84	RMS	37.39	-21.62	0.50	-95.23	26.12	-13.00	-39.84	Vertical
					13805.00	-51.30	RMS	40.32	-21.94	0.46	-95.23	25.09	-13.00	-38.30	Vertical
					24159.00	-57.97	RMS	38.72	-31.83	-9.54	-95.23	39.91	-13.00	-44.97	Vertical
					27610.00	-59.17	RMS	39.22	-31.15	-9.54	-95.23	37.53	-13.00	-46.17	Vertical




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 2


EN-DC B5+n78 10M + 20M Ch20525 1RB0 QPSK + Ch633334 1RB1 BPSK

M

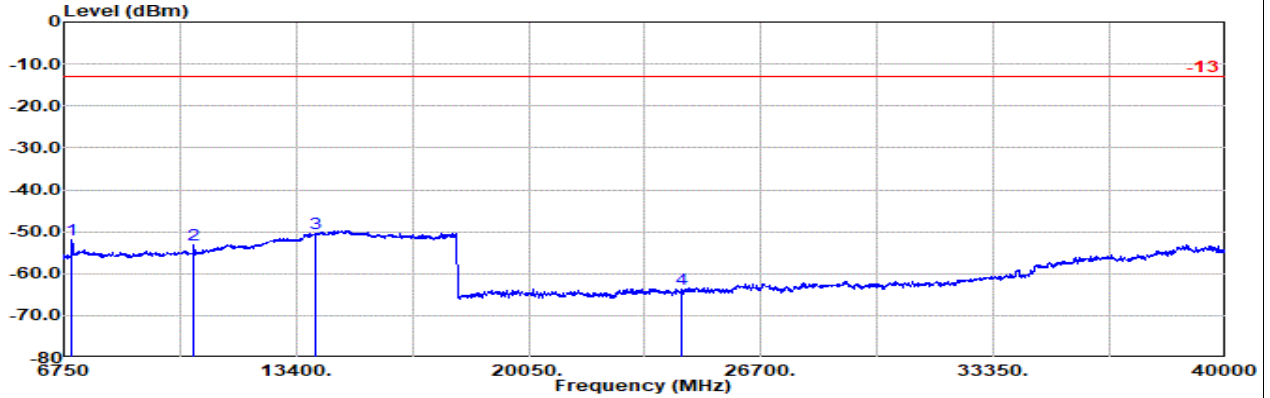

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	6983.00	-51.79	RMS	36.47	-21.51	1.22	-95.23	27.26	-13.00	-38.79	Horizontal
2	10474.00	-53.12	RMS	37.10	-21.69	0.51	-95.23	26.19	-13.00	-40.12	Horizontal
3	13965.00	-50.47	RMS	40.76	-22.02	0.45	-95.23	25.57	-13.00	-37.47	Horizontal
4	24439.00	-63.81	RMS	38.90	-31.79	-9.54	-95.23	33.85	-13.00	-50.81	Horizontal

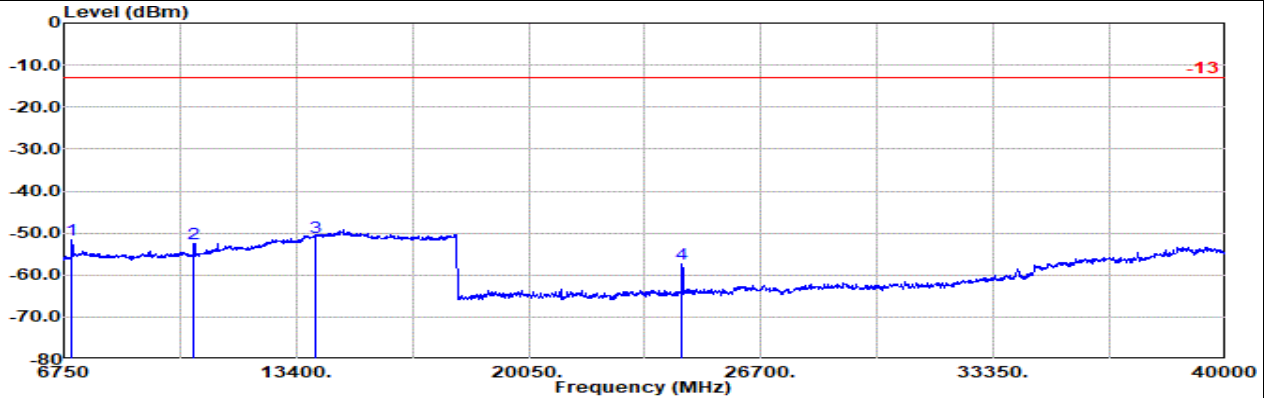

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch633334 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	6983.00	-51.67	RMS	36.47	-21.51	1.22	-95.23	27.38	-13.00	-38.67	Vertical
2	10474.00	-52.51	RMS	37.10	-21.69	0.51	-95.23	26.80	-13.00	-39.51	Vertical
3	13965.00	-50.89	RMS	40.76	-22.02	0.45	-95.23	25.15	-13.00	-37.89	Vertical
4	24439.00	-57.48	RMS	38.90	-31.79	-9.54	-95.23	40.18	-13.00	-44.48	Vertical




LTE : MIMO2 + 5GNR : Main

Part 27Q Mode 2


EN-DC B5+n78 10M + 20M Ch20525 1RB0 QPSK + Ch636000 1RB1 BPSK

H

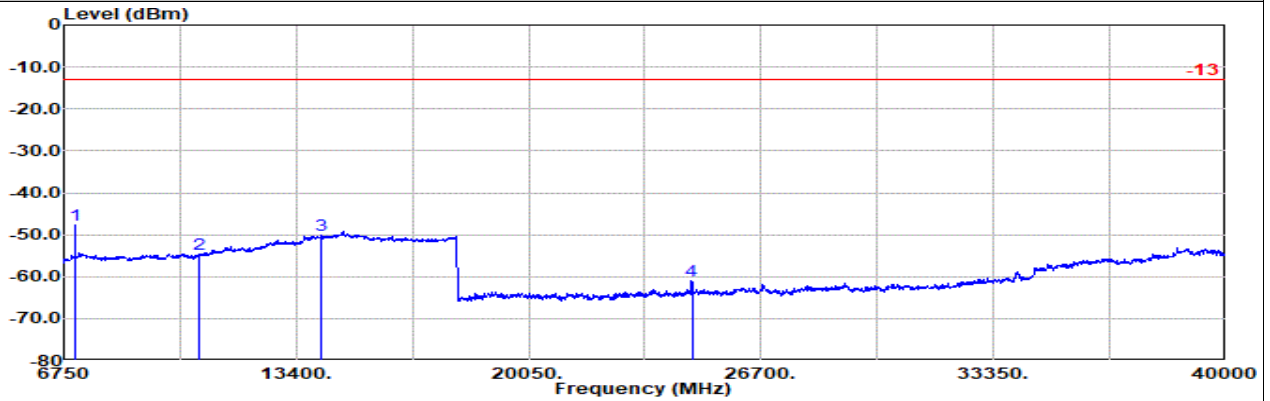

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch636000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7063.00	-47.79	RMS	36.47	-21.46	1.14	-95.23	31.29	-13.00	-34.79	Horizontal
2	10594.00	-54.58	RMS	37.39	-21.69	0.51	-95.23	24.44	-13.00	-41.58	Horizontal
3	14125.00	-50.14	RMS	40.95	-22.23	0.46	-95.23	25.91	-13.00	-37.14	Horizontal
4	24719.00	-60.91	RMS	39.36	-31.62	-9.54	-95.23	36.12	-13.00	-47.91	Horizontal

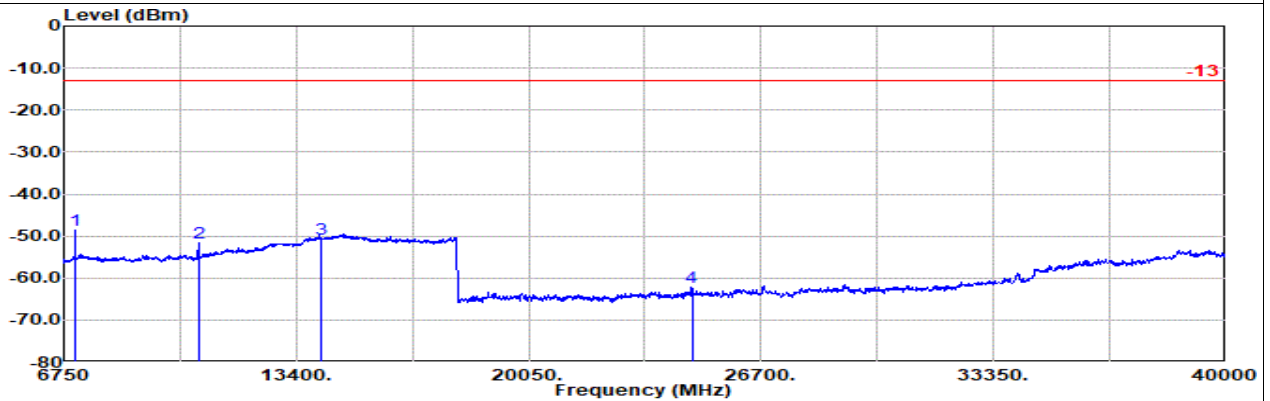

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : LTE Band 5 10M Ch20525 1RB0 QPSK
 : SA n78 20M Ch636000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7063.00	-48.73	RMS	36.47	-21.46	1.14	-95.23	30.35	-13.00	-35.73	Vertical
2	10594.00	-51.48	RMS	37.39	-21.69	0.51	-95.23	27.54	-13.00	-38.48	Vertical
3	14125.00	-50.81	RMS	40.95	-22.23	0.46	-95.23	25.24	-13.00	-37.81	Vertical
4	24719.00	-62.31	RMS	39.36	-31.62	-9.54	-95.23	34.72	-13.00	-49.31	Vertical




MIMO2

Part 270 Mode 1


NR SA n77 20M Ch647334 1RB1 BPSK

L

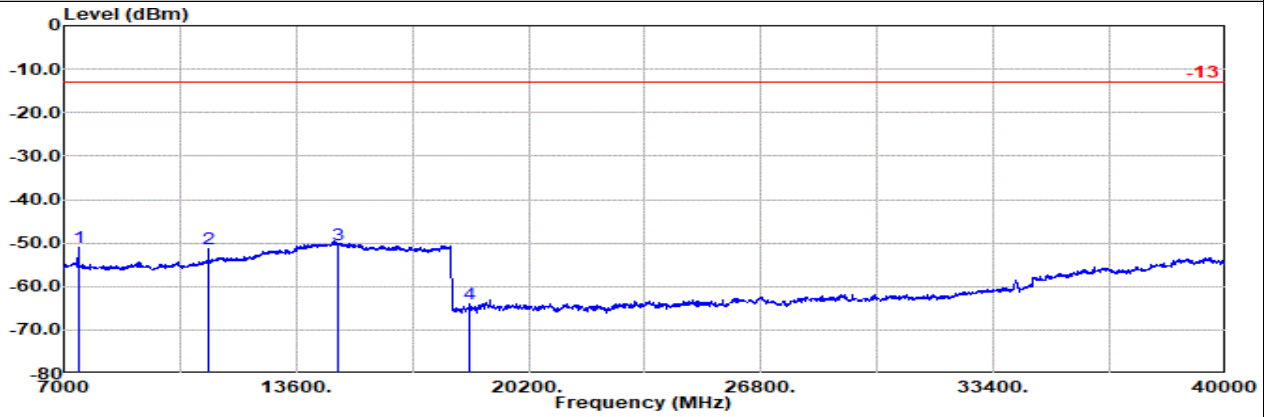

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n77 20M Ch647334 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	l					g	dB	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 7403.00	-50.93	RMS	36.90	-21.26	1.03	-95.23	27.63	-13.00	-37.93	Horizontal	
2 11104.00	-51.47	RMS	38.11	-21.61	0.44	-95.23	26.82	-13.00	-38.47	Horizontal	
3 14805.00	-50.27	RMS	41.60	-23.08	0.42	-95.23	26.02	-13.00	-37.27	Horizontal	
4 18506.00	-63.88	RMS	38.11	-39.29	-9.54	-95.23	42.07	-13.00	-50.88	Horizontal	

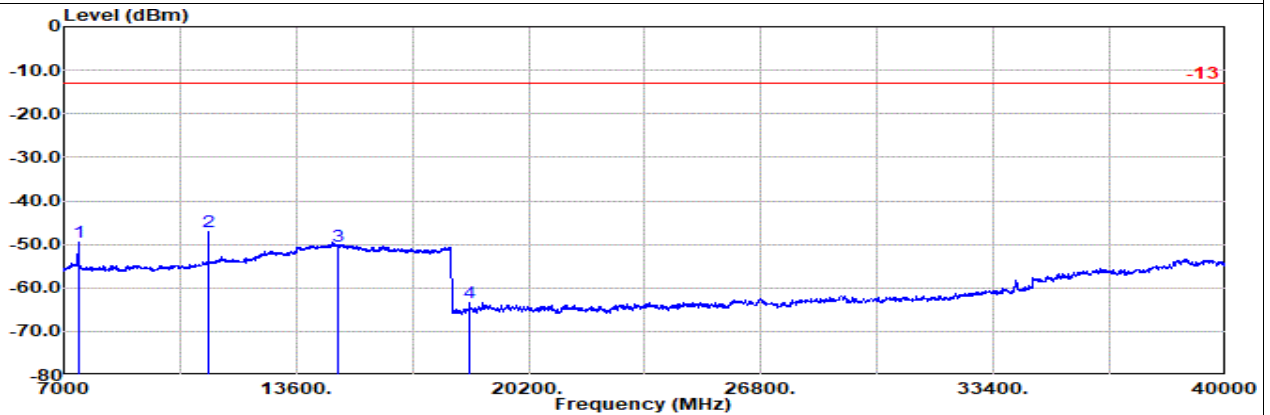

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n77 20M Ch647334 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin		Pol
			Factor	l					g	dB	
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB		
1 7403.00	-49.41	RMS	36.90	-21.26	1.03	-95.23	29.15	-13.00	-36.41	Vertical	
2 11104.00	-46.99	RMS	38.11	-21.61	0.44	-95.23	31.30	-13.00	-33.99	Vertical	
3 14805.00	-50.50	RMS	41.60	-23.08	0.42	-95.23	25.79	-13.00	-37.50	Vertical	
4 18506.00	-63.41	RMS	38.11	-39.29	-9.54	-95.23	42.54	-13.00	-50.41	Vertical	




MIMO2

Part 270 Mode 1


NR SA n77 20M Ch656000 1RB1 BPSK

M

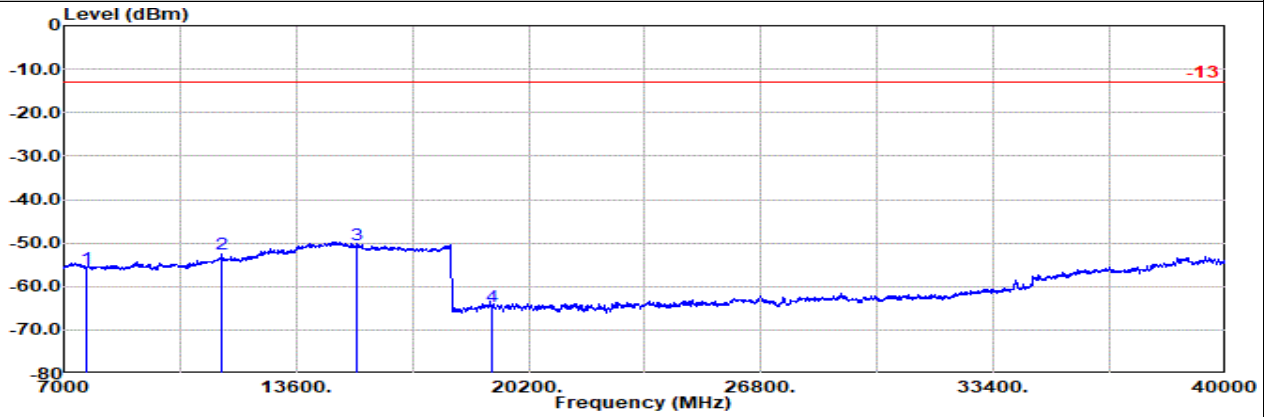

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n77 20M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7663.00	-55.76	RMS	36.67	-21.29	0.80	-95.23	23.29	-13.00	-42.76	Horizontal
2 11494.00	-52.59	RMS	38.70	-21.55	0.44	-95.23	25.05	-13.00	-39.59	Horizontal
3 15325.00	-50.44	RMS	40.90	-23.17	0.43	-95.23	26.63	-13.00	-37.44	Horizontal
4 19156.00	-64.67	RMS	38.44	-38.56	-9.54	-95.23	40.22	-13.00	-51.67	Horizontal

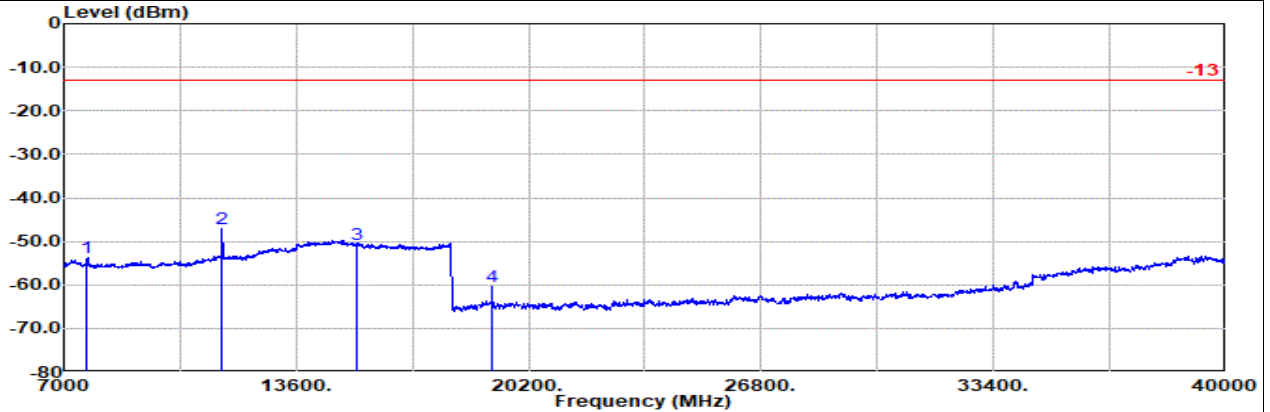

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n77 20M Ch656000 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7663.00	-53.71	RMS	36.67	-21.29	0.80	-95.23	25.34	-13.00	-40.71	Vertical
2 11494.00	-47.17	RMS	38.70	-21.55	0.44	-95.23	30.47	-13.00	-34.17	Vertical
3 15325.00	-50.76	RMS	40.90	-23.17	0.43	-95.23	26.31	-13.00	-37.76	Vertical
4 19156.00	-60.45	RMS	38.44	-38.56	-9.54	-95.23	44.44	-13.00	-47.45	Vertical




MIMO2

Part 270 Mode 1


NR SA n77 20M Ch664666 1RB1 BPSK

H

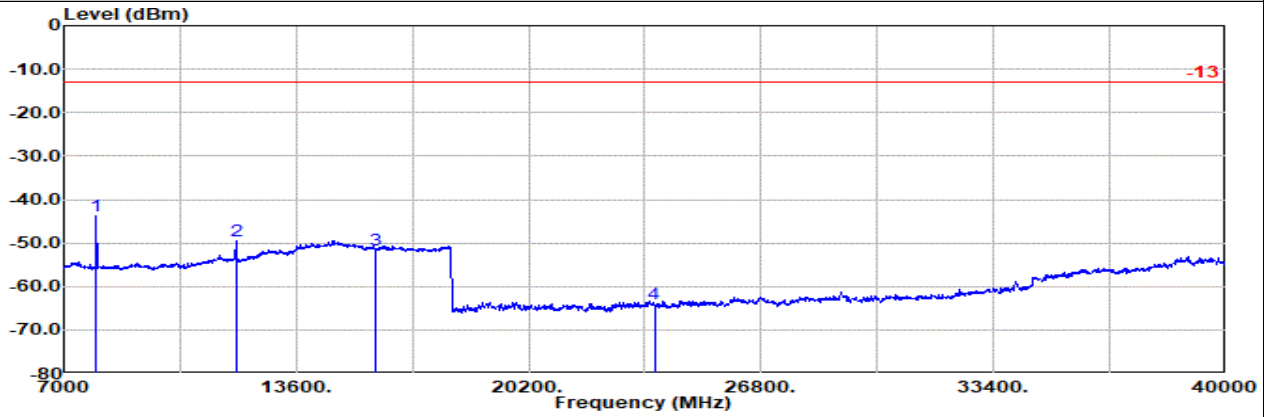

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n77 20M Ch664666 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7923.00	-43.84	RMS	36.60	-21.50	0.84	-95.23	35.45	-13.00	-30.84	Horizontal
2 11884.00	-49.56	RMS	38.53	-21.78	0.43	-95.23	28.49	-13.00	-36.56	Horizontal
3 15845.00	-51.58	RMS	40.71	-23.40	0.44	-95.23	25.90	-13.00	-38.58	Horizontal
4 23768.00	-63.90	RMS	38.59	-31.89	-9.54	-95.23	34.17	-13.00	-50.90	Horizontal

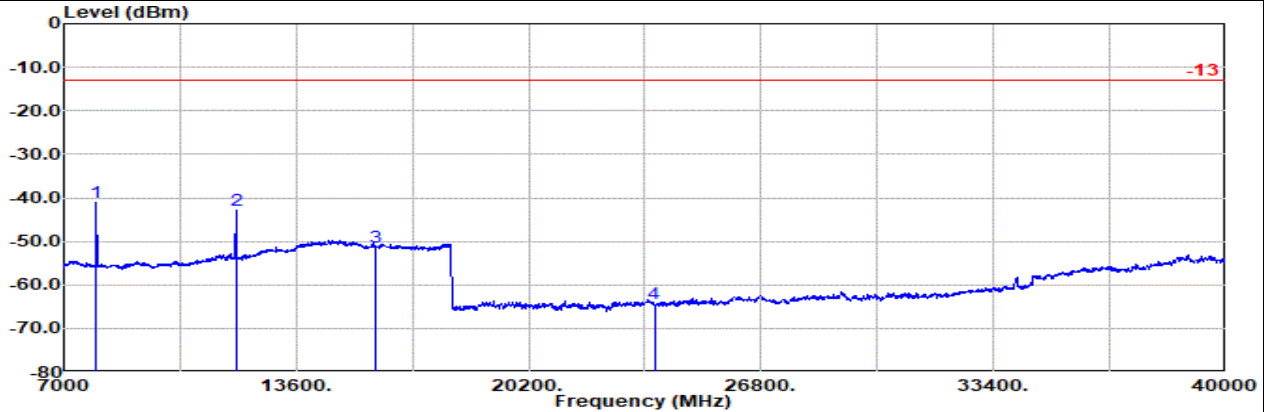

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n77 20M Ch664666 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7923.00	-41.02	RMS	36.60	-21.50	0.84	-95.23	38.27	-13.00	-28.02	Vertical
2 11884.00	-42.85	RMS	38.53	-21.78	0.43	-95.23	35.20	-13.00	-29.85	Vertical
3 15845.00	-51.41	RMS	40.71	-23.40	0.44	-95.23	26.07	-13.00	-38.41	Vertical
4 23768.00	-64.19	RMS	38.59	-31.89	-9.54	-95.23	33.88	-13.00	-51.19	Vertical




MIMO2

Part 270 Mode 2


NR SA n78 20M Ch647334 1RB1 BPSK

L

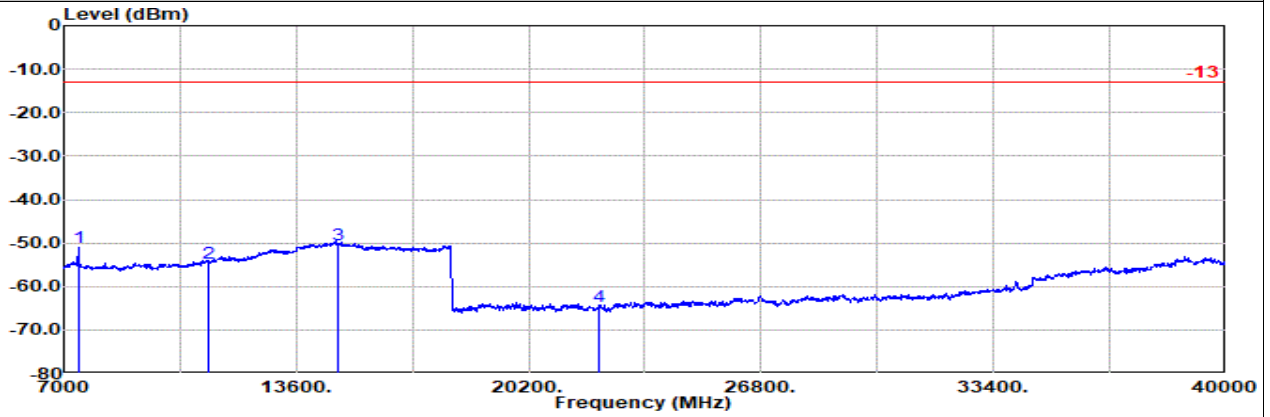

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n78 20M Ch647334 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7403.00	-50.94	RMS	36.90	-21.26	1.03	-95.23	27.62	-13.00	-37.94	Horizontal
2 11104.00	-54.60	RMS	38.11	-21.61	0.44	-95.23	23.69	-13.00	-41.60	Horizontal
3 14805.00	-50.50	RMS	41.60	-23.08	0.42	-95.23	25.79	-13.00	-37.50	Horizontal
4 22208.00	-64.73	RMS	38.47	-33.63	-9.54	-95.23	35.20	-13.00	-51.73	Horizontal

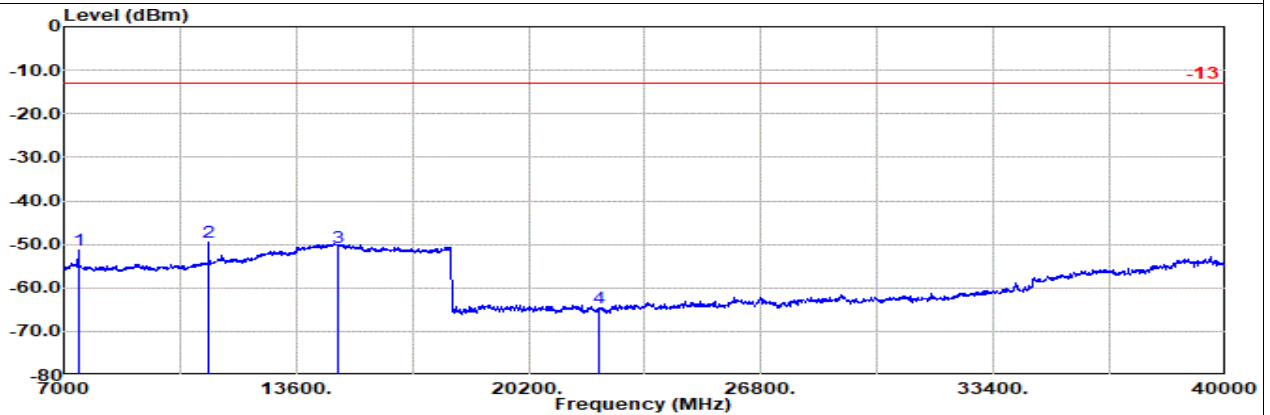

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n78 20M Ch647334 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7403.00	-51.42	RMS	36.90	-21.26	1.03	-95.23	27.14	-13.00	-38.42	Vertical
2 11104.00	-49.36	RMS	38.11	-21.61	0.44	-95.23	28.93	-13.00	-36.36	Vertical
3 14805.00	-50.57	RMS	41.60	-23.08	0.42	-95.23	25.72	-13.00	-37.57	Vertical
4 22208.00	-64.68	RMS	38.47	-33.63	-9.54	-95.23	35.25	-13.00	-51.68	Vertical




MIMO2

Part 270 Mode 2


NR SA n78 20M Ch650000 1RB1 BPSK

M

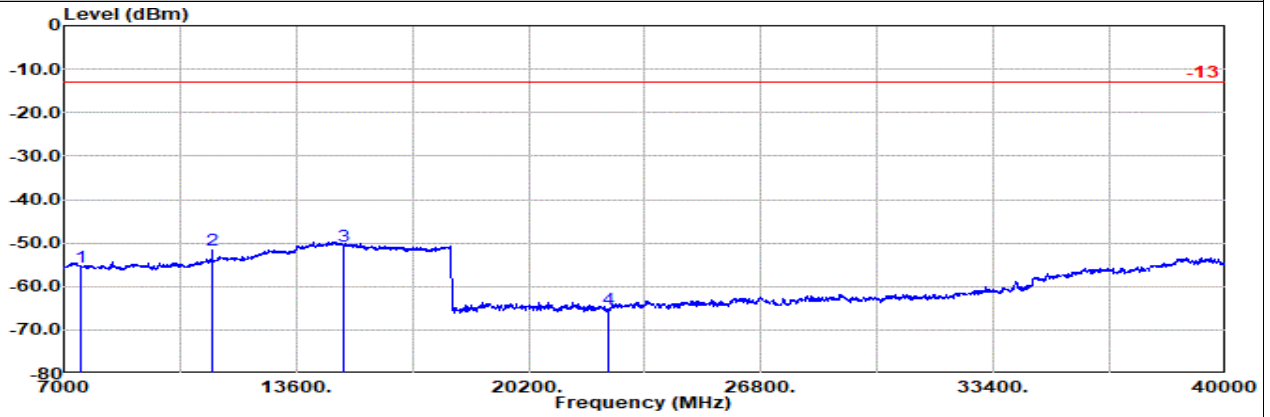

Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
 : SA n78 20M Ch650000 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7483.00	-55.54	RMS	36.83	-21.21	0.92	-95.23	23.15	-13.00	-42.54	Horizontal
2 11224.00	-51.77	RMS	38.35	-21.59	0.44	-95.23	26.26	-13.00	-38.77	Horizontal
3 14965.00	-50.66	RMS	41.50	-23.24	0.42	-95.23	25.89	-13.00	-37.66	Horizontal
4 22448.00	-65.14	RMS	38.49	-33.26	-9.54	-95.23	34.40	-13.00	-52.14	Horizontal

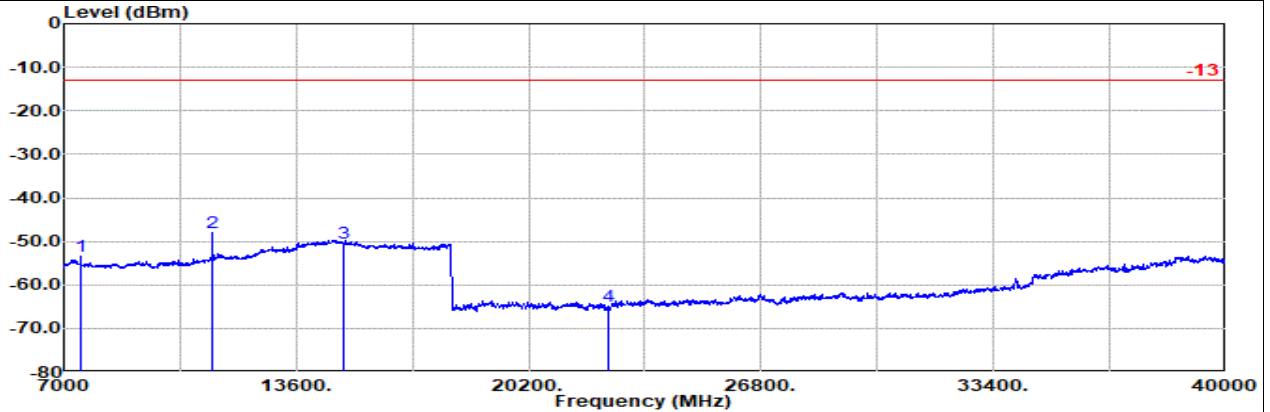


Site : 03CH21-HY
 Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
 : SA n78 20M Ch650000 1RB1 BPSK

Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
			Factor	l						
MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1 7483.00	-53.39	RMS	36.83	-21.21	0.92	-95.23	25.30	-13.00	-40.39	Vertical
2 11224.00	-48.04	RMS	38.35	-21.59	0.44	-95.23	29.99	-13.00	-35.04	Vertical
3 14965.00	-50.29	RMS	41.50	-23.24	0.42	-95.23	26.26	-13.00	-37.29	Vertical
4 22448.00	-64.92	RMS	38.49	-33.26	-9.54	-95.23	34.62	-13.00	-51.92	Vertical




MIMO2

Part 270 Mode 2
NR SA n78 20M Ch652666 1RB1 BPSK
H

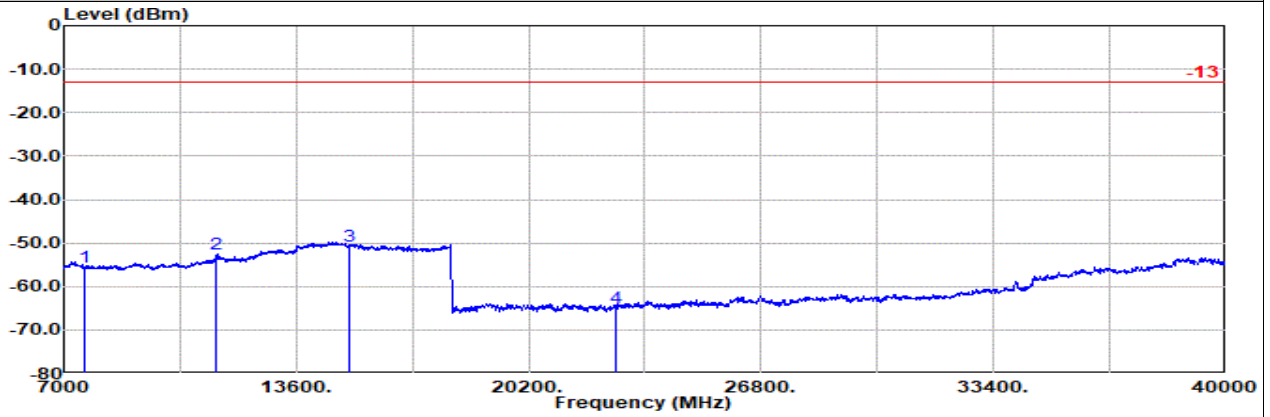

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Horizontal
: SA n78 20M Ch652666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7563.00	-55.55	RMS	36.73	-21.23	0.82	-95.23	23.36	-13.00	-42.55	Horizontal
2	11344.00	-52.51	RMS	38.69	-21.57	0.44	-95.23	25.16	-13.00	-39.51	Horizontal
3	15125.00	-50.75	RMS	41.35	-23.23	0.43	-95.23	25.93	-13.00	-37.75	Horizontal
4	22688.00	-64.78	RMS	38.85	-33.00	-9.54	-95.23	34.14	-13.00	-51.78	Horizontal

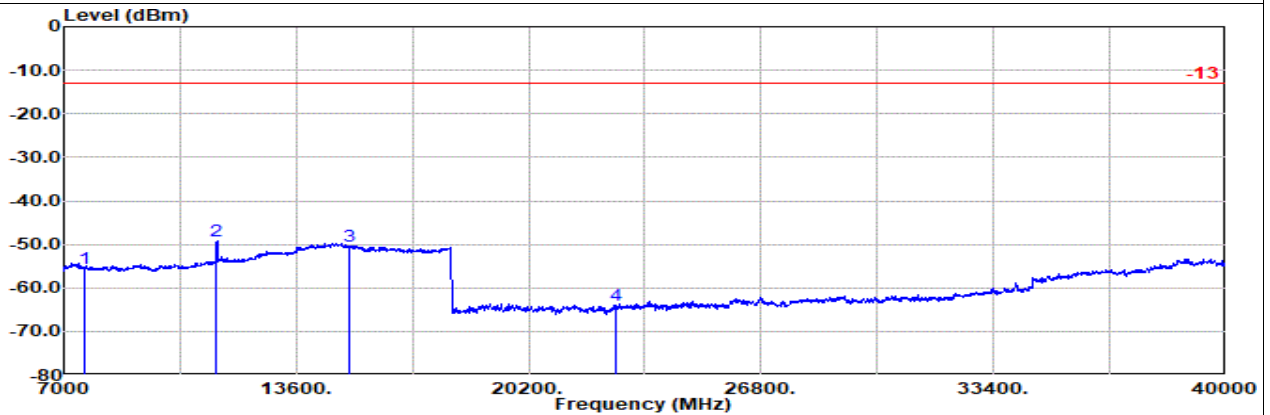

Site : 03CH21-HY
Condition: -13 3m DRH18-E_LE2C03A18EN_230712 Vertical
: SA n78 20M Ch652666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	l						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7563.00	-55.64	RMS	36.73	-21.23	0.82	-95.23	23.27	-13.00	-42.64	Vertical
2	11344.00	-49.22	RMS	38.69	-21.57	0.44	-95.23	28.45	-13.00	-36.22	Vertical
3	15125.00	-50.34	RMS	41.35	-23.23	0.43	-95.23	26.34	-13.00	-37.34	Vertical
4	22688.00	-64.14	RMS	38.85	-33.00	-9.54	-95.23	34.78	-13.00	-51.14	Vertical




Main

Part 27F Mode 1


NR SA n13 5M Ch156400 1RB1 BPSK

M

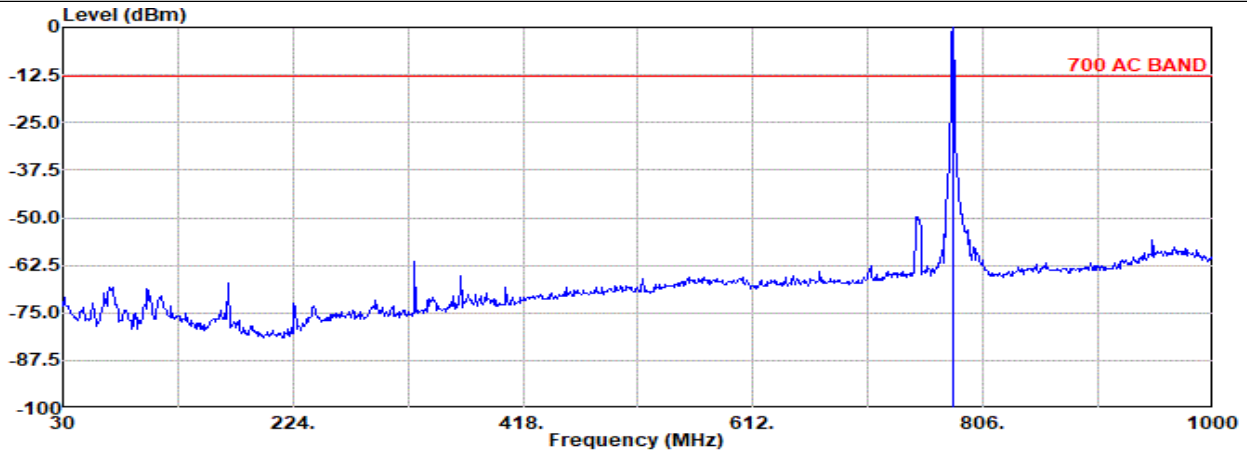

Site : 03CH21-HY
 Condition: 700 AC BAND 3m CBL 6111D & 00802N1D-06_63303&001_231015 Horizontal
 : SA n13 5M Ch156400 1RB1 BPSK

1	MHz	dBm	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	780.78	0.57	RMS	28.10	-27.99	0.16	-95.23	95.53	-13.00	13.57	Horizontal	

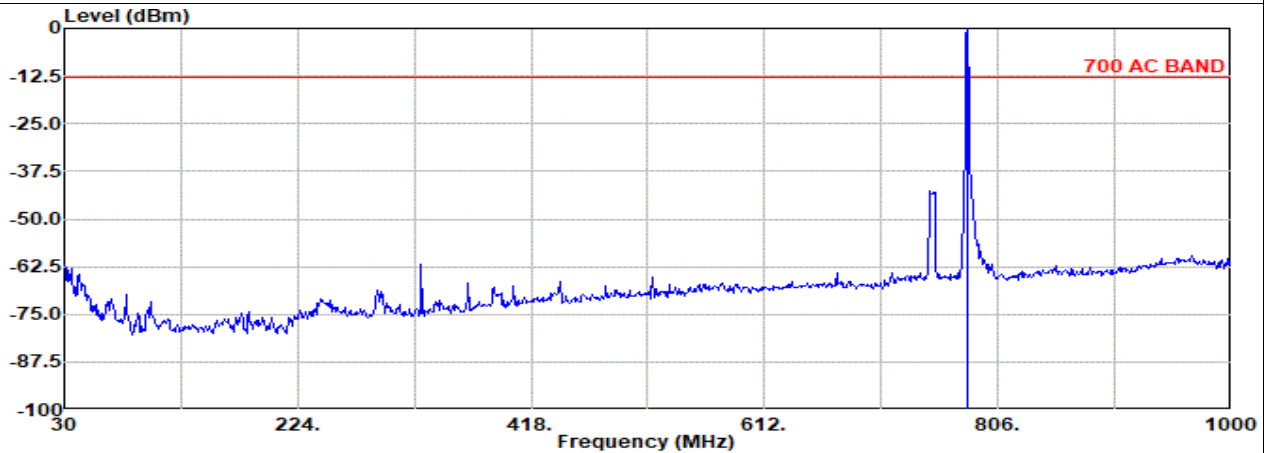

Site : 03CH21-HY
 Condition: 700 AC BAND 3m CBL 6111D & 00802N1D-06_63303&001_231015 Vertical
 : SA n13 5M Ch156400 1RB1 BPSK

1	MHz	dBm	Detector	Ant Factor	Amp	\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	780.78	0.56	RMS	28.10	-27.99	0.16	-95.23	95.52	-13.00	13.56	Vertical	

Remark: #1 is fundamental signal which can be ignored.