



FCC RADIO TEST REPORT

FCC ID : 2AJOTTA-1257
Equipment : Smart Phone
Brand Name : NOKIA
Model Name : TA-1257
Applicant : HMD Global Oy
Bertel Jungin aukio 9, 02600 Espoo, Finland
Manufacturer : HMD Global Oy
Bertel Jungin aukio 9, 02600 Espoo, Finland
Standard : FCC 47 CFR Part 2, and 30

The product was received on Jul. 07, 2020 and testing was started from Aug. 20, 2020 and completed on Sep. 09, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test 5

 1.3 Modification of EUT 6

 1.4 Testing Location 6

 1.5 Applied Standards 6

2 Test Configuration of Equipment Under Test 7

 2.1 Test Mode..... 7

 2.2 Connection Diagram of Test System 8

 2.3 Support Unit used in test configuration 8

 2.4 Measurement Results Explanation Example 8

 2.5 Far Field Condition for Frequency above 18GHz..... 9

 2.6 Frequency List of Low/Middle/High Channels..... 9

3 Radiated Test Items 10

 3.1 Measuring Instruments..... 10

 3.2 Test Setup 10

 3.3 Test Result of Radiated Test..... 12

 3.4 EIRP Measurement 13

 3.5 Occupied Bandwidth 14

 3.6 Radiated Spurious Emission Measurement..... 15

 3.7 Frequency Stability Measurement..... 16

4 List of Measuring Equipment..... 17

5 Uncertainty of Evaluation..... 19

Appendix A. Test Results of EIRP and Radiated Test

Appendix B. Test Setup Photos

Appendix C. R&S Mixer Certificate



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FG060302C | 01 | Initial issue of report | Sep. 10, 2020 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Limit | Result (PASS/FAIL) | Remark |
|---------------|--------------------|---|-------------------------|--------------------|--------|
| 3.4 | §2.1046 §30.202 | EIRP Measurement | +43dBm | Pass | - |
| 3.5 | §2.1049 | Occupied Bandwidth | Not Applicable | Reporting only | - |
| 3.6 | §2.1053 §30.203 | Radiated Spurious Emission | -5dBm/MHz -13dBm/MHz | Pass | - |
| 3.7 | §2.1055 | Frequency Stability for Temperature & Voltage | Within the band | Pass | - |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Dara Chiu



1 General Description

1.1 Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, GNSS, NFC and FM Receiver.

| Product Specification subjective to this standard | |
|---|---|
| Antenna Type | WWAN: PIFA Antenna WLAN: <Ant. 1> PIFA Antenna <Ant. 2> PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS:PIFA Antenna NFC: Loop Antenna FM Receiver: Using earphone as antenna |

1.2 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | |
|---|---|
| Device Category in Part 30 | Mobile station |
| Tx Frequency | NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz |
| Rx Frequency | NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz |
| Support Bandwidth | NR band n260: 50 MHz and 100 MHz NR band n261: 50 MHz and 100 MHz |
| Maximum Number of contiguous CC | 4 |
| Maximum Aggregated Bandwidth | 400MHz |
| Maximum Output Power (EIRP) | NR band n260: Module 0: 26.59 dBm Module 1: 22.74 dBm Module 2: 22.82 dBm NR band n261: Module 0: 23.13 dBm Module 1: 23.13 dBm Module 2: 21.89 dBm |
| Type of Modulation | CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: QPSK / 16QAM / 64QAM |

Note 1: Highest EIRP was measured on Module 0, dual beam case for n260 band.

Note 2: Highest EIRP was measured on Module 0, dual beam case for n261 band.



1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

| | | | | |
|------------------------------|---|-----------|-------------|-------------|
| Test Site | SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory | | | |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 | | | |
| Test Site Information | Site No. | Engineer | Temperature | Humidity |
| | TH05-HY | Eric Jeng | 21.2~24.5°C | 50.2~56.6 % |
| Test Site | SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory | | | |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 | | | |
| Test Site Information | Site No. | Engineer | Temperature | Humidity |
| | 03CH10-HY | Eric Jeng | 20.2~23.8°C | 45~51 % |
| | 03CH18-HY | Leo Liu | 21.2~23.6°C | 42~47 % |

FCC Designation No. TW1190 and TW0007

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EUT configured to transmit a single beam at a time and combine the measured value together for both beams by math calculation in linear form method.

The NR radio operation is controlled via software tool QRCT FTM mode (Factory mode).


The EUT is forced to operate continuously (100% duty cycle) with maximum output power during the test.

2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

| Test Items | Band | Bandwidth (MHz) | | | | Modulation | | | RB # | | | Test Channel | | |
|------------------------|--|-----------------|-----|-----|-----|------------|-------|-------|------|---|------|--------------|---|---|
| | | 50 | 100 | 200 | 400 | QPSK | 16QAM | 64QAM | 1 | - | Full | L | M | H |
| EIRP | n260 n261 | v | v | | v | v | v | v | v | | v | v | v | v |
| 99% Occupied Bandwidth | n260 n261 | v | v | | v | v | v | v | | | v | v | v | v |
| Out of Band Emission | n260 n261 | v | v | | v | v | | | v | | v | v | | v |
| Spurious Emission | n260 n261 | v | v | | v | v | | | v | | | v | v | v |
| Frequency Stability | n260 n261 | CW tone | | | | | | | | | | | v | |
| Remark | <ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing. The device is investigated from 30MHz to 200GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Both modulation type DFT-s OFDM and CP-OFDM are evaluated and reported. All the radiated test cases were performed with built-in battery. The out of band emission and spurious emissions were measured radiated EIRP. | | | | | | | | | | | | | |

2.2 Connection Diagram of Test System

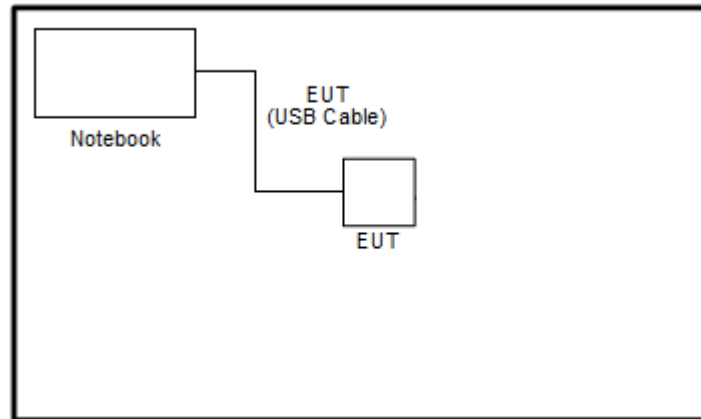

2.3 Support Unit used in test configuration

| Item | Equipment | Trade Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|-----------|------------|-----------|--------|------------|--|
| 1. | Notebook | Dell | P111G | N/A | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |

2.4 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$EIRP \text{ (dBm)} = E \text{ (dBuV/m)} + 20\log(D) - 104.8$$

where D is the measurement distance (in the far field region) in m.

$$E \text{ (dBuV/m)} = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 42.3 + 3.0 + 107 + 20\log(1) - 104.8 \\ &= 47.5 \text{ (dB)} \end{aligned}$$



2.5 Far Field Condition for Frequency above 18GHz

| Horn Antenna | Frequency (GHz) | Antenna Dimension A (mm) | Wavelength (λ) (m) | Far field R (m) $\geq 2A^2 / \lambda$ | Measurement Distance (D) (m) | Distance Factor $20\log(D)$ (dB) |
|--------------|-----------------|--------------------------|--------------------|---------------------------------------|------------------------------|----------------------------------|
| BBHA 9170 | 18 | 60 | 0.0167 | 0.43 | 1 | 0.00 |
| | 40 | 60 | 0.0075 | 0.96 | | |
| QWH-UPRR00 | 40 | 48 | 0.0075 | 0.61 | 1 | 0.00 |
| | 60 | 48 | 0.0050 | 0.92 | | |
| QWH-EPRR00 | 60 | 31 | 0.0050 | 0.38 | 1 | 0.00 |
| | 90 | 31 | 0.0033 | 0.58 | | |
| QWH-FPRR00 | 90 | 21 | 0.0033 | 0.26 | 1 | 0.00 |
| | 140 | 21 | 0.0021 | 0.41 | | |
| QWH-GPRR00 | 140 | 15 | 0.0021 | 0.21 | 0.5 | -6.02 |
| | 220 | 15 | 0.0014 | 0.33 | | |

2.6 Frequency List of Low/Middle/High Channels

| NR Band n260 Channel and Frequency List | | | | |
|---|------------------------|--------|--------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 50 | Frequency | 37025 | 38500 | 39975 |
| 100 | Frequency | 37050 | 38500 | 39950 |
| 400 | Frequency 1 | 37050 | 38350 | 39650 |
| | Frequency 2 | 37150 | 38450 | 39750 |
| | Frequency 3 | 37250 | 38550 | 39850 |
| | Frequency 4 | 37350 | 38650 | 39950 |

| NR Band n261 Channel and Frequency List | | | | |
|---|------------------------|--------|--------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 50 | Frequency | 27525 | 27925 | 28325 |
| 100 | Frequency | 27550 | 27925 | 28300 |
| 400 | Frequency 1 | 27550 | 27775 | 28000 |
| | Frequency 2 | 27650 | 27875 | 28100 |
| | Frequency 3 | 27750 | 27975 | 28200 |
| | Frequency 4 | 27850 | 28075 | 28300 |


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions from 30MHz to 1GHz

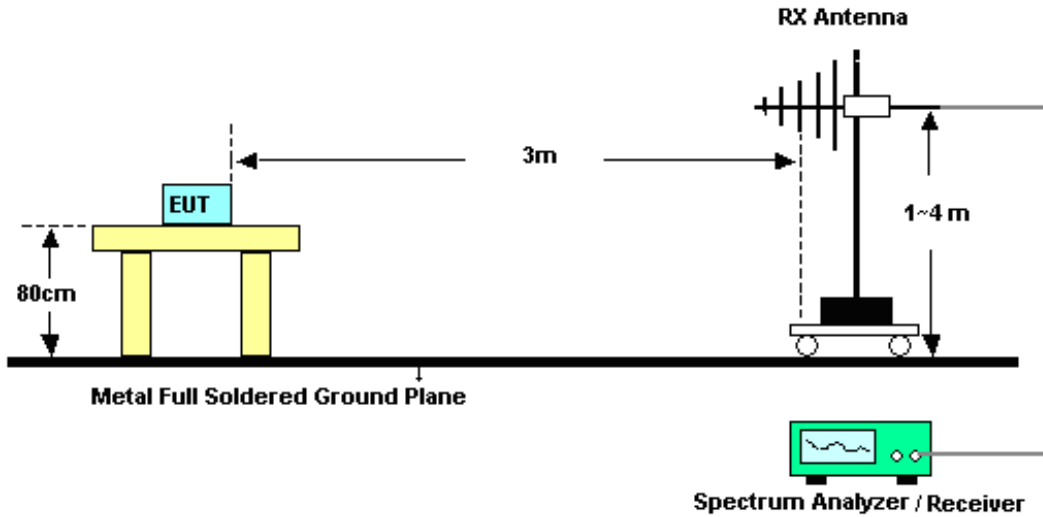


For radiated emissions 1GHz to 18GHz

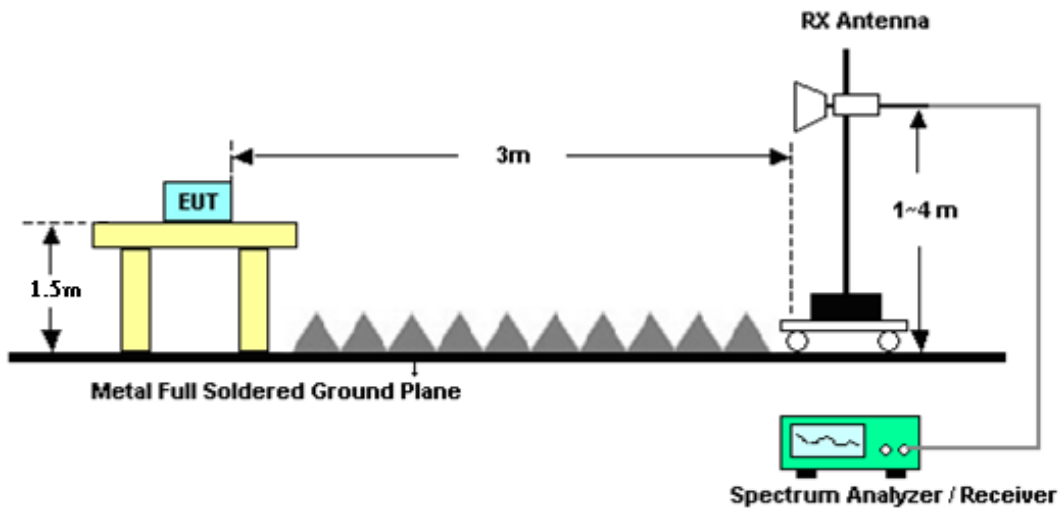


For radiated emissions above 18GHz up to 40GHz

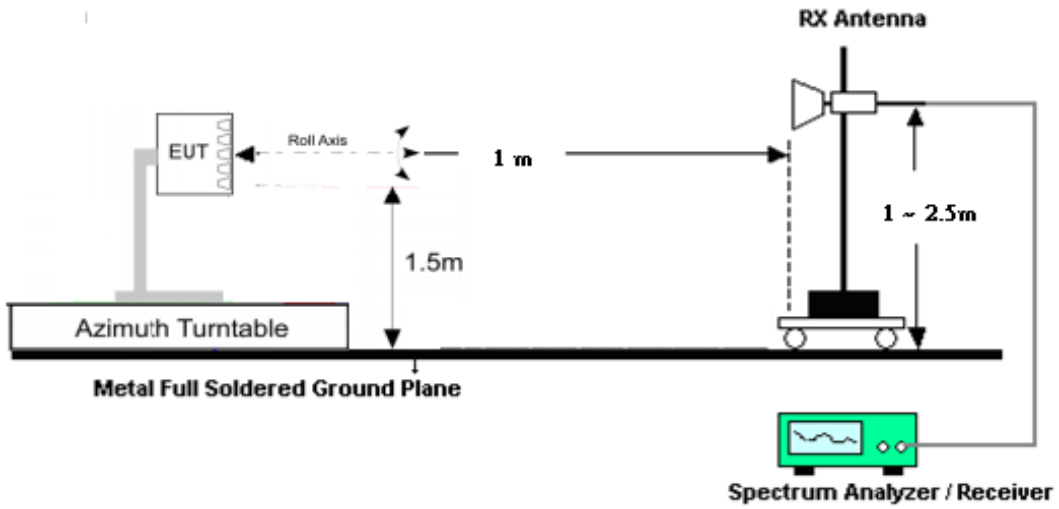

For radiated emissions above 40GHz up to 140GHz

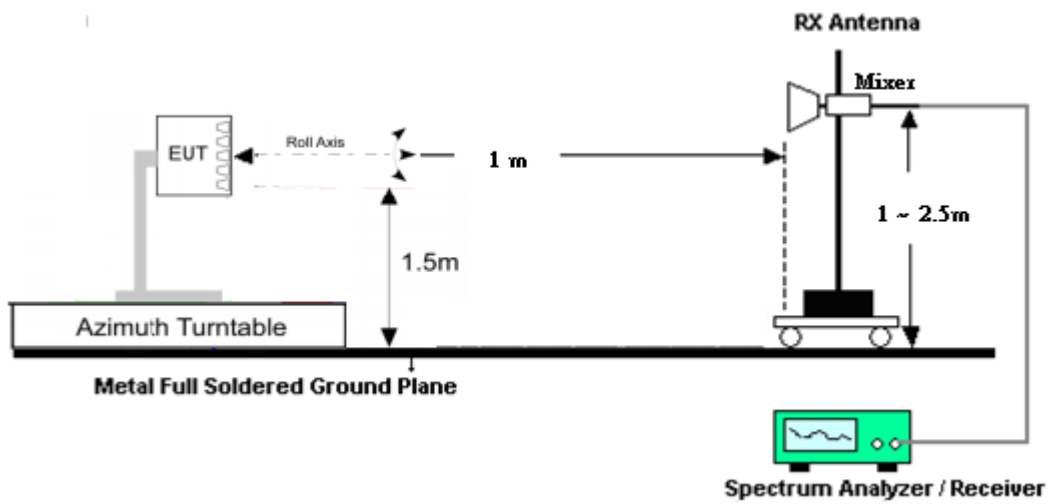

For radiated emissions above 140GHz up to 200GHz

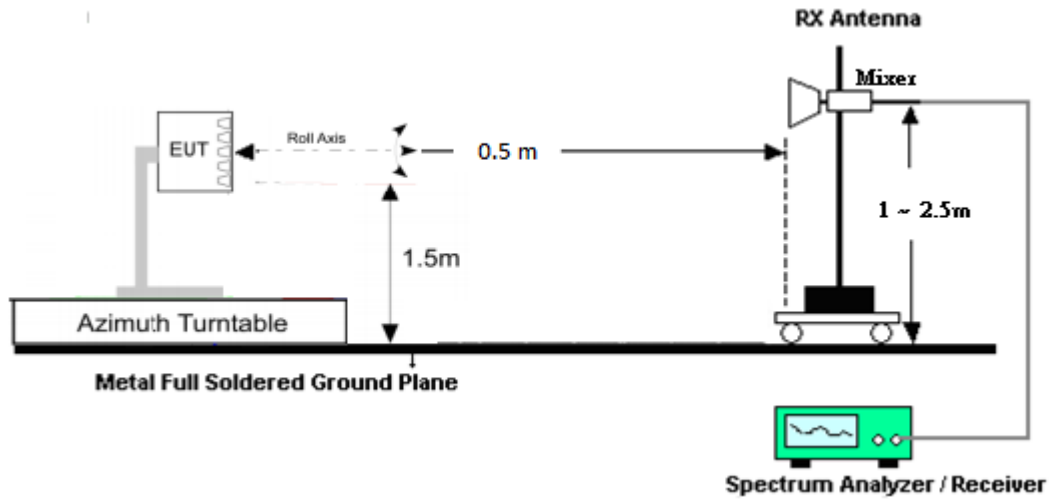

3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 EIRP Measurement

3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Radiated Spurious Emission Measurement

3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS, Trace mode = trace average, sweep time = auto couple
6. Set sweep points $\geq 2 \times \text{Span}/\text{RBW}$, sweep count 100 and wait until the trace to be stabilized.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. For measurement frequency from 30MHz to 18GHz,
An antenna was substituted in place of the EUT and was driven by a signal generator.
Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
9. For measurement frequency above 18GHz, the test result is calculated according to ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
10. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



4 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|----------------------|-----------------|----------------------------|------------------------------------|-------------------------------|------------------|-------------------------------|---------------|-----------------------|
| Amplifier | SONOMA | 310N | 187311 | 9kHz~1GHz | Oct. 22, 2019 | Sep. 03, 2020 | Oct. 21, 2020 | Radiation (03CH10-HY) |
| Bilog Antenna | TESEQ | CBL 6111D & 00800N1D01N-06 | 35413 & 02 | 30MHz~1GHz | Feb. 11, 2020 | Sep. 03, 2020 | Feb. 10, 2021 | Radiation (03CH10-HY) |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | 9120D-1325 | 1GHz~18GHz | Oct. 09, 2019 | Sep. 03, 2020 | Oct. 08, 2020 | Radiation (03CH10-HY) |
| Preamplifier | Jet-Power | JAP00101800-30-10P | 160118550004 | 1GHz~18GHz | Mar. 02, 2020 | Sep. 03, 2020 | Mar. 01, 2021 | Radiation (03CH10-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY54200485 | 10Hz~44GHz | Feb. 10, 2020 | Sep. 03, 2020 | Feb. 09, 2021 | Radiation (03CH10-HY) |
| Controller | EMEC | EM 1000 | N/A | Control Turn table & Ant Mast | N/A | Sep. 03, 2020 | N/A | Radiation (03CH10-HY) |
| Antenna Mast | EMEC | AM-BS-4500-B | N/A | 1~4m | N/A | Sep. 03, 2020 | N/A | Radiation (03CH10-HY) |
| Turn Table | EMEC | TT 2200 | N/A | 0~360 Degree | N/A | Sep. 03, 2020 | N/A | Radiation (03CH10-HY) |
| Software | Audix | E3 6.2009-8-24 | RK-001042 | N/A | N/A | Sep. 03, 2020 | N/A | Radiation (03CH10-HY) |
| EMI Test Receiver | Agilent | N9038A(MXE) | MY53290045 | 20MHz~8.4GHz | Jan. 18, 2020 | Sep. 03, 2020 | Jan. 17, 2021 | Radiation (03CH10-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 / 102 | MY11692/4P E,MY11693/4 PE,MY2855/2 | 30MHz~1GHz | Nov. 07, 2019 | Sep. 03, 2020 | Nov. 06, 2020 | Radiation (03CH10-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 / 102 | MY11692/4P E,MY11693/4 PE,MY2855/2 | 1GHz~18GHz | Nov. 07, 2019 | Sep. 03, 2020 | Nov. 06, 2020 | Radiation (03CH10-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170251 | 18GHz~40GHz | Nov. 26, 2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Nov. 25, 2020 | Radiation (03CH18-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170584 | 18GHz~40GHz | Dec. 10, 2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Dec. 09, 2020 | Radiation (03CH18-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101408 | 10Hz~40GHz | Aug. 12, 2020 | Aug. 20, 2020 ~ Sep. 09, 2020 | Aug. 11, 2021 | Radiation (03CH18-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101756 | 10Hz~40GHz | Dec. 24, 2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Dec. 23, 2020 | Radiation (03CH18-HY) |
| Signal Analyzer | R&S | FSV3044 | 101010 | 10Hz~44GHz | Nov. 11,2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Nov. 10, 2020 | Radiation (03CH18-HY) |
| Signal Analyzer | R&S | FSV3044 | 101009 | 10Hz~44GHz | Nov. 11,2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Nov. 10, 2020 | Radiation (03CH18-HY) |
| RF Cable | HUBER + SUHNER | SF102/2*11SK 252 | MY4278/2 | 9kHz~40GHz | Jul. 03, 2020 | Aug. 20, 2020 ~ Sep. 09, 2020 | Jul. 02, 2021 | Radiation (03CH18-HY) |
| RF Cable | HUBER + SUHNER | SF102/2*11SK 252 | 801589/2 | 9kHz~40GHz | Dec. 23, 2019 | Aug. 20, 2020 ~ Sep. 09, 2020 | Dec. 22, 2020 | Radiation (03CH18-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSV30 | 103738 | 9kHz to 30GHz | May 14, 2020 | Sep. 03, 2020 | May 13, 2021 | Radiation (03CH18-HY) |
| Harmonic Mixer (*) | Rohde & Schwarz | RPG FS-Z140 | 101128 | 90 ~ 140 GHz | Sep. 03, 2018 | Sep. 03, 2020 | Sep. 02, 2021 | Radiation (03CH18-HY) |
| Harmonic Mixer (*) | Rohde & Schwarz | RPG FS-Z60 | 100986 | 40 ~ 60 GHz | Oct. 31, 2018 | Sep. 03, 2020 | Oct. 30, 2021 | Radiation (03CH18-HY) |
| Harmonic Mixer (*) | Rohde & Schwarz | FS-Z90 | 101811 | 60 ~ 90 GHz | Jul. 16, 2018 | Sep. 03, 2020 | Jul. 15, 2021 | Radiation (03CH18-HY) |
| Harmonic Mixer (*) | Rohde & Schwarz | RPG FS-Z220 | 101014 | 140 ~ 220 GHz | Aug. 27, 2018 | Sep. 03, 2020 | Aug. 26, 2021 | Radiation (03CH18-HY) |



| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--|-----------------|-----------------|-------------|-----------------|------------------|---------------|---------------|-----------------------|
| Standard Horn Antenna | Quinstar | QWH-EPRR00 | 784600034 | 60 ~ 90 GHz | Aug. 17, 2018 | Sep. 03, 2020 | Aug. 16, 2021 | Radiation (03CH18-HY) |
| Standard Horn Antenna | Quinstar | QWH-GPRR00 | 923900001 | 140 ~ 220 GHz | Aug. 17, 2018 | Sep. 03, 2020 | Aug. 16, 2021 | Radiation (03CH18-HY) |
| Standard Horn Antenna | Quinstar | QWH-FPRR00 | 923800008 | 90 ~ 140 GHz | Aug. 17, 2018 | Sep. 03, 2020 | Aug. 16, 2021 | Radiation (03CH18-HY) |
| Standard Horn Antenna | Quinstar | QWH-UPRR00 | 923600007 | 40 ~ 60 GHz | Aug. 17, 2018 | Sep. 03, 2020 | Aug. 16, 2021 | Radiation (03CH18-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170251 | 18GHz~40GHz | Nov. 26, 2019 | Sep. 03, 2020 | Nov. 25, 2020 | Conducted (TH05-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101756 | 10Hz~40GHz | Dec. 24, 2019 | Sep. 03, 2020 | Dec. 23, 2020 | Conducted (TH05-HY) |
| RF Cable | HUBER + SUHNER | SF102/2*11SK252 | MY4278/2 | 9kHz~40GHz | Jul. 03, 2020 | Sep. 03, 2020 | Jul. 02, 2021 | Conducted (TH05-HY) |
| Temperature & Humidity Cabinet Chamber | ESPEC | LHU-113 | 1012005860 | N/A | Dec. 12, 2019 | Sep. 03, 2020 | Dec. 11, 2020 | Conducted (TH05-HY) |

Note: (*) Equipment manufacturer's Calibration Certificate.



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.26 |
|---|------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.77 |
|---|------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.03 |
|---|------|

Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.80 |
|---|------|

Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 6.80 |
|---|------|



Appendix A. Test Results of EIRP and Radiated Test

EIRP Power(Average power)

NR Band n260 Module 0

| NR Band n260 Module 0 AG0 (Beam ID: 41) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.96 | 20.19 | 22.45 | 22.49 |
| | 50 | DFT-S | 16QAM | 18.43 | 18.56 | 20.57 | 20.39 |
| | 50 | DFT-S | 64QAM | 15.83 | 16.3 | 17.75 | 17.73 |
| | 50 | CP | QPSK | 17.37 | 17.71 | 18.7 | 19.1 |
| | 50 | CP | 16QAM | 16.01 | 16.81 | 17.52 | 17.68 |
| | 50 | CP | 64QAM | 13.36 | 13.92 | 15.4 | 15.9 |
| | 100 | DFT-S | QPSK | 19.92 | 19.88 | 22.73 | 22.32 |
| | 100 | DFT-S | 16QAM | 18.16 | 18.23 | 20.68 | 19.99 |
| | 100 | DFT-S | 64QAM | 15.83 | 15.97 | 18.11 | 17.64 |
| | 100 | CP | QPSK | 17.36 | 17.45 | 18.96 | 18.95 |
| | 100 | CP | 16QAM | 15.65 | 16.46 | 17.13 | 18.09 |
| | 100 | CP | 64QAM | 13.53 | 13.78 | 15.79 | 15.41 |
| | 400 | DFT-S | QPSK | 13.58 | 16.51 | 13.21 | 16.34 |
| | 400 | DFT-S | 16QAM | 13.93 | 14.5 | 13.62 | 14.76 |
| | 400 | DFT-S | 64QAM | 11.98 | 12.24 | 11.56 | 12.45 |
| | 400 | CP | QPSK | 13.76 | 14.54 | 13.24 | 14.47 |
| | 400 | CP | 16QAM | 14.07 | 13.27 | 13.57 | 13.3 |
| | 400 | CP | 64QAM | 11.71 | 15.19 | 11.57 | 11.54 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 0 AG0 (Beam ID: 41) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 20.23 | 19.67 | 22.41 | 21.92 |
| | 50 | DFT-S | 16QAM | 17.97 | 18.06 | 19.81 | 19.75 |
| | 50 | DFT-S | 64QAM | 15.82 | 15.79 | 17.42 | 17.57 |
| | 50 | CP | QPSK | 17.46 | 17.53 | 18.67 | 18.61 |
| | 50 | CP | 16QAM | 15.49 | 16.34 | 16.66 | 17.44 |
| | 50 | CP | 64QAM | 12.89 | 13.54 | 14.74 | 15.1 |
| | 100 | DFT-S | QPSK | 21.06 | 20.26 | 23.64 | 23 |
| | 100 | DFT-S | 16QAM | 18.82 | 18.8 | 20.88 | 20.85 |
| | 100 | DFT-S | 64QAM | 16.59 | 16.68 | 18.57 | 18.65 |
| | 100 | CP | QPSK | 17.11 | 17.05 | 18.54 | 18.51 |
| | 100 | CP | 16QAM | 15.03 | 16 | 16.57 | 17.81 |
| | 100 | CP | 64QAM | 12.6 | 13.33 | 14.73 | 15.31 |
| | 400 | DFT-S | QPSK | 12.59 | 17.17 | 12.66 | 16.17 |
| | 400 | DFT-S | 16QAM | 12.73 | 15.56 | 12.81 | 15.71 |
| | 400 | DFT-S | 64QAM | 12.12 | 13.13 | 12.12 | 13.01 |
| | 400 | CP | QPSK | 13.2 | 15.14 | 13.23 | 15.03 |
| | 400 | CP | 16QAM | 12.4 | 13.05 | 12,17 | 12.69 |
| | 400 | CP | 64QAM | 7.92 | 10.47 | 10.5 | 10.21 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 0 AG0 (Beam ID: 41) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 21.5 | 20.58 | 23.36 | 23.17 |
| | 50 | DFT-S | 16QAM | 19.89 | 18.96 | 21.61 | 21.18 |
| | 50 | DFT-S | 64QAM | 17.29 | 16.6 | 18.88 | 18.68 |
| | 50 | CP | QPSK | 18.12 | 18.24 | 19.12 | 19.27 |
| | 50 | CP | 16QAM | 16.74 | 17.33 | 17.96 | 17.94 |
| | 50 | CP | 64QAM | 14.93 | 14.66 | 16.55 | 16.31 |
| | 100 | DFT-S | QPSK | 21.29 | 20.6 | 22.85 | 22.59 |
| | 100 | DFT-S | 16QAM | 19.86 | 19.09 | 20.99 | 20.35 |
| | 100 | DFT-S | 64QAM | 17.3 | 16.9 | 18.33 | 18.23 |
| | 100 | CP | QPSK | 18.82 | 18.61 | 19.35 | 19.62 |
| | 100 | CP | 16QAM | 16.92 | 17.64 | 17.58 | 18.78 |
| | 100 | CP | 64QAM | 15.63 | 15.07 | 16.93 | 16.33 |
| | 400 | DFT-S | QPSK | 13.86 | 17.48 | 14.24 | 16.96 |
| | 400 | DFT-S | 16QAM | 13.61 | 16.17 | 14.07 | 16.41 |
| | 400 | DFT-S | 64QAM | 14.38 | 14.3 | 15.04 | 14.36 |
| | 400 | CP | QPSK | 13.63 | 15.8 | 13.88 | 16.18 |
| | 400 | CP | 16QAM | 14.83 | 14.35 | 15.09 | 14.79 |
| | 400 | CP | 64QAM | 11.02 | 14.68 | 15.26 | 15.6 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 20.84 | 20.98 | 23.12 | 23.27 |
| | 50 | DFT-S | 16QAM | 19.95 | 19.27 | 22.01 | 21.01 |
| | 50 | DFT-S | 64QAM | 16.97 | 16.93 | 18.86 | 18.74 |
| | 50 | CP | QPSK | 19.37 | 18.69 | 20.82 | 20 |
| | 50 | CP | 16QAM | 17.73 | 17.91 | 19.22 | 18.55 |
| | 50 | CP | 64QAM | 14.94 | 14.89 | 17.21 | 16.76 |
| | 100 | DFT-S | QPSK | 20.92 | 21.08 | 23.44 | 23.43 |
| | 100 | DFT-S | 16QAM | 19.78 | 19.35 | 21.94 | 21.3 |
| | 100 | DFT-S | 64QAM | 17.01 | 17.01 | 19.16 | 18.6 |
| | 100 | CP | QPSK | 18.35 | 18.74 | 20 | 20.15 |
| | 100 | CP | 16QAM | 17.57 | 17.6 | 19.14 | 18.89 |
| | 100 | CP | 64QAM | 14.76 | 14.81 | 16.86 | 16.69 |
| | 400 | DFT-S | QPSK | 13.73 | 17.37 | 14.16 | 16.45 |
| | 400 | DFT-S | 16QAM | 13.95 | 15.48 | 14.15 | 15.58 |
| | 400 | DFT-S | 64QAM | 13.72 | 13.33 | 13.09 | 13.56 |
| | 400 | CP | QPSK | 13.99 | 15.18 | 13.87 | 14.06 |
| | 400 | CP | 16QAM | 14.62 | 14.07 | 14.21 | 14.67 |
| | 400 | CP | 64QAM | 12.75 | 16.61 | 12.58 | 12.53 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 23 | 22.3 | 25.07 | 24.45 |
| | 50 | DFT-S | 16QAM | 20.92 | 20.76 | 22.59 | 22.36 |
| | 50 | DFT-S | 64QAM | 18.55 | 18.49 | 20.12 | 20.2 |
| | 50 | CP | QPSK | 20.47 | 20.32 | 21.59 | 21.17 |
| | 50 | CP | 16QAM | 19.23 | 18.92 | 20.38 | 20.32 |
| | 50 | CP | 64QAM | 15.6 | 16.4 | 17.1 | 17.84 |
| | 100 | DFT-S | QPSK | 22.42 | 22.11 | 25 | 24.51 |
| | 100 | DFT-S | 16QAM | 20.63 | 20.49 | 22.52 | 22.29 |
| | 100 | DFT-S | 64QAM | 18.35 | 18.35 | 20.23 | 20.03 |
| | 100 | CP | QPSK | 19.7 | 19.85 | 21.18 | 21 |
| | 100 | CP | 16QAM | 18.16 | 18.8 | 19.55 | 20.36 |
| | 100 | CP | 64QAM | 15.59 | 16.18 | 17.49 | 17.96 |
| | 400 | DFT-S | QPSK | 16.47 | 19.63 | 16.19 | 18.68 |
| | 400 | DFT-S | 16QAM | 15.31 | 18.22 | 16.08 | 18.26 |
| | 400 | DFT-S | 64QAM | 14.8 | 15.99 | 15.1 | 16.19 |
| | 400 | CP | QPSK | 16.35 | 17.78 | 16.42 | 16.4 |
| | 400 | CP | 16QAM | 15.88 | 14.75 | 15.68 | 15.16 |
| | 400 | CP | 64QAM | 13.72 | 13.98 | 13.39 | 12.95 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 23.87 | 23.89 | 26 | 25.95 |
| | 50 | DFT-S | 16QAM | 23.05 | 22.04 | 24.62 | 23.77 |
| | 50 | DFT-S | 64QAM | 20.31 | 19.84 | 21.81 | 21.49 |
| | 50 | CP | QPSK | 21.28 | 21.6 | 22.24 | 22.53 |
| | 50 | CP | 16QAM | 20.72 | 20.58 | 21.63 | 21.34 |
| | 50 | CP | 64QAM | 18.27 | 17.92 | 19.66 | 19.49 |
| | 100 | DFT-S | QPSK | 23.7 | 23.52 | 25.77 | 25.83 |
| | 100 | DFT-S | 16QAM | 22.92 | 21.91 | 24.25 | 23.82 |
| | 100 | DFT-S | 64QAM | 20.35 | 19.71 | 21.66 | 21.41 |
| | 100 | CP | QPSK | 21.38 | 21.42 | 22.31 | 22.69 |
| | 100 | CP | 16QAM | 20.95 | 20.3 | 21.86 | 21.6 |
| | 100 | CP | 64QAM | 18.21 | 17.67 | 19.67 | 19.42 |
| | 400 | DFT-S | QPSK | 13.85 | 16.86 | 14.36 | 17.7 |
| | 400 | DFT-S | 16QAM | 13.97 | 16.78 | 14.78 | 17.22 |
| | 400 | DFT-S | 64QAM | 14.2 | 14.45 | 15.08 | 14.96 |
| | 400 | CP | QPSK | 13.8 | 16.23 | 14.38 | 16.73 |
| | 400 | CP | 16QAM | 14.11 | 14.31 | 14.46 | 14.9 |
| | 400 | CP | 64QAM | 12.7 | 16.29 | 13.07 | 12.79 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n260 Module 0 AG0+1 (Beam ID: 26+154) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.1 | 17.99 | 20.23 | 20.8 |
| | 50 | DFT-S | 16QAM | 16.79 | 16.27 | 18.46 | 17.96 |
| | 50 | DFT-S | 64QAM | 13.67 | 14.01 | 15.55 | 15.51 |
| | 50 | CP | QPSK | 14.14 | 13.65 | 15.46 | 14.56 |
| | 50 | CP | 16QAM | 12.65 | 12.42 | 14.14 | 13.95 |
| | 50 | CP | 64QAM | 10.29 | 9.87 | 11.96 | 11.16 |
| | 100 | DFT-S | QPSK | 17.06 | 18.64 | 21.36 | 21.16 |
| | 100 | DFT-S | 16QAM | 15.67 | 17.08 | 19.44 | 18.86 |
| | 100 | DFT-S | 64QAM | 12.94 | 14.6 | 16.43 | 16.49 |
| | 100 | CP | QPSK | 13.75 | 14.54 | 15.05 | 15.66 |
| | 100 | CP | 16QAM | 12.34 | 13.47 | 15.47 | 14.82 |
| | 100 | CP | 64QAM | 10.05 | 10.59 | 11.96 | 12.66 |

| NR Band n260 Module 0 AG0+1 (Beam ID: 26+154) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|--------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 23.61 | 23.69 | 25.93 | 25.7 |
| | 50 | DFT-S | 16QAM | 22.32 | 22.09 | 23.72 | 23.63 |
| | 50 | DFT-S | 64QAM | 19.93 | 19.83 | 21.49 | 21.49 |
| | 50 | CP | QPSK | 20.31 | 19.64 | 21.23 | 20.41 |
| | 50 | CP | 16QAM | 18.08 | 18.3 | 19.31 | 19.04 |
| | 50 | CP | 64QAM | 15.35 | 15.76 | 16.6 | 17.58 |
| | 100 | DFT-S | QPSK | 24.08 | 24.25 | 26.33 | 26.59 |
| | 100 | DFT-S | 16QAM | 22.53 | 22.59 | 24.42 | 24.37 |
| | 100 | DFT-S | 64QAM | 19.96 | 20.36 | 21.96 | 21.72 |
| | 100 | CP | QPSK | 19.97 | 19.88 | 21.7 | 20.9 |
| | 100 | CP | 16QAM | 18.49 | 18.9 | 19.75 | 19.75 |
| | 100 | CP | 64QAM | 15.43 | 16.24 | 16.87 | 17.61 |



| NR Band n260 Module 0 AG0+1 (Beam ID: 26+154) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 23.72 | 23.89 | 25.96 | 25.9 |
| | 50 | DFT-S | 16QAM | 22.61 | 22.19 | 24.15 | 23.63 |
| | 50 | DFT-S | 64QAM | 19.43 | 19.94 | 20.89 | 21.53 |
| | 50 | CP | QPSK | 21.53 | 20.61 | 22.54 | 22.03 |
| | 50 | CP | 16QAM | 20.31 | 19.29 | 21.39 | 20.81 |
| | 50 | CP | 64QAM | 17.34 | 16.84 | 18.99 | 18.32 |
| | 100 | DFT-S | QPSK | 23.32 | 23.44 | 25.65 | 25.68 |
| | 100 | DFT-S | 16QAM | 21.78 | 21.82 | 23.94 | 23.59 |
| | 100 | DFT-S | 64QAM | 19.61 | 19.62 | 20.99 | 21.15 |
| | 100 | CP | QPSK | 19.84 | 20.2 | 22.03 | 21.53 |
| | 100 | CP | 16QAM | 19.08 | 19.02 | 21.02 | 20.16 |
| | 100 | CP | 64QAM | 16.6 | 16.49 | 18.47 | 18.41 |

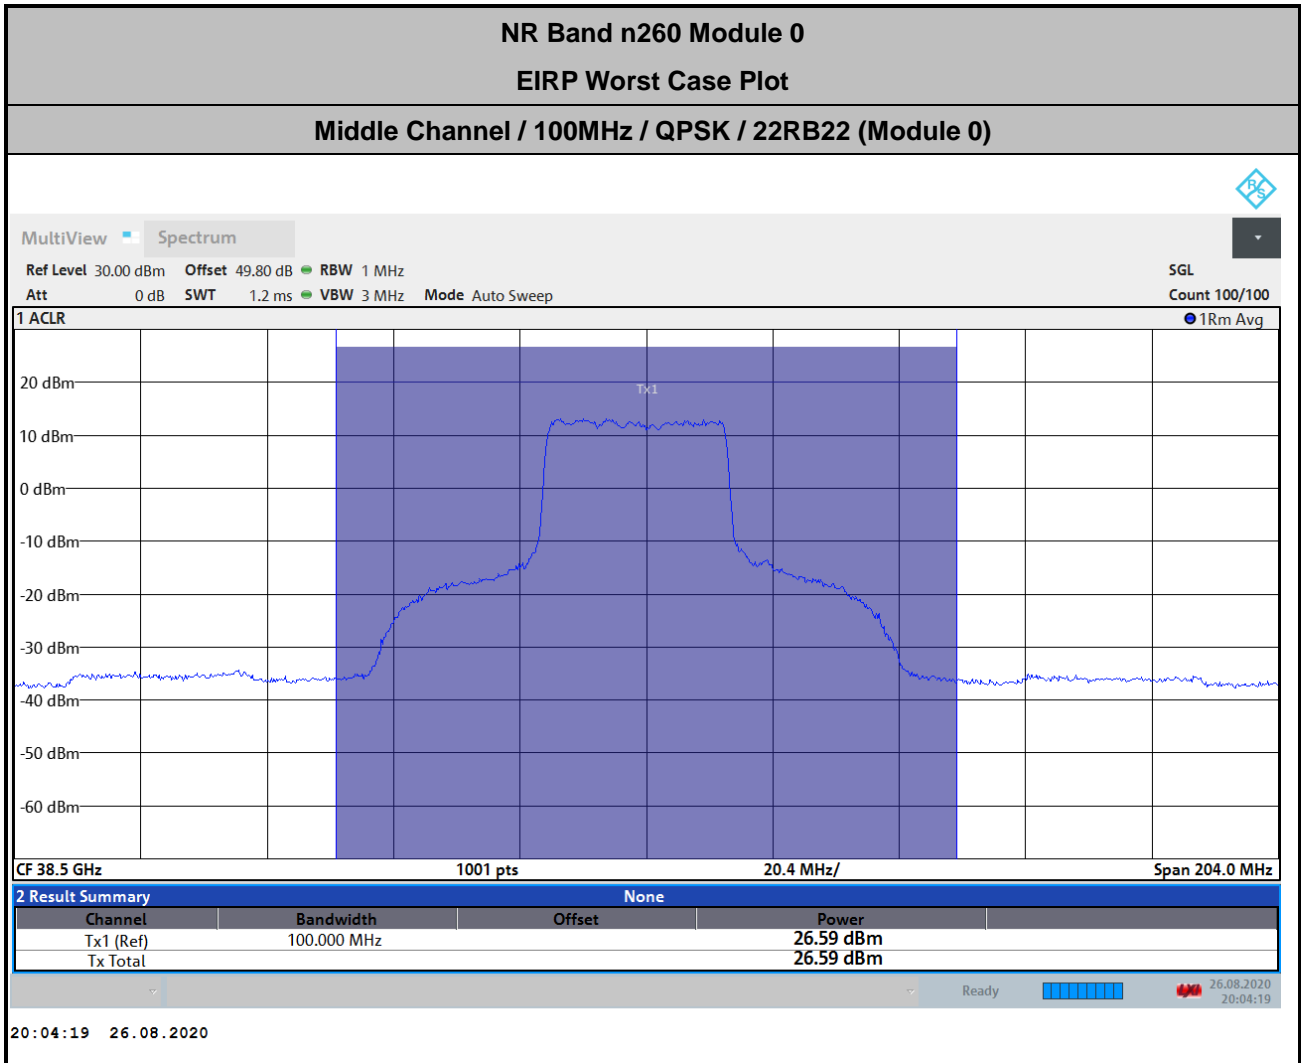

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 45.1 + 2.5 + 107 + 20\log(1) - 104.8 \\
 &= 49.8 \text{ (dB)}
 \end{aligned}$$



NR Band n260 Module 1

| NR Band n260 Module 1 AG0 (Beam ID: 24) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|--------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.9 | 19.86 | 22.33 | 22.13 |
| | 50 | DFT-S | 16QAM | 18.77 | 18.28 | 20.43 | 19.88 |
| | 50 | DFT-S | 64QAM | 15.41 | 15.83 | 17.22 | 17.39 |
| | 50 | CP | QPSK | 16.83 | 17.97 | 18.01 | 18.65 |
| | 50 | CP | 16QAM | 16.59 | 16.6 | 17.79 | 17.44 |
| | 50 | CP | 64QAM | 13.34 | 13.91 | 14.96 | 15.55 |
| | 100 | DFT-S | QPSK | 19.7 | 20.07 | 22.64 | 22.74 |
| | 100 | DFT-S | 16QAM | 18.69 | 18.51 | 20.72 | 20.51 |
| | 100 | DFT-S | 64QAM | 15.34 | 16.09 | 17.44 | 17.96 |
| | 100 | CP | QPSK | 16.74 | 17.94 | 18.3 | 19.16 |
| | 100 | CP | 16QAM | 16 | 16.68 | 17.7 | 18.33 |
| | 100 | CP | 64QAM | 12.84 | 14 | 15.1 | 15.76 |
| | 400 | DFT-S | QPSK | 14.01 | 16.61 | 13.75 | 16.82 |
| | 400 | DFT-S | 16QAM | 14.66 | 14.98 | 14.38 | 15.12 |
| | 400 | DFT-S | 64QAM | 13.03 | 13.04 | 12.86 | 13.41 |
| | 400 | CP | QPSK | 12.8 | 14.78 | 12.46 | 14.69 |
| | 400 | CP | 16QAM | 14.57 | 13.72 | 14.3 | 13.84 |
| | 400 | CP | 64QAM | 8.34 | 11.95 | 11.99 | 11.94 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 1 AG0 (Beam ID: 24) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 19.79 | 20.01 | 21.8 | 22.05 |
| | 50 | DFT-S | 16QAM | 18 | 18.26 | 19.46 | 20.11 |
| | 50 | DFT-S | 64QAM | 15.74 | 16.15 | 17.06 | 17.96 |
| | 50 | CP | QPSK | 18.05 | 17.85 | 19.15 | 18.71 |
| | 50 | CP | 16QAM | 16.63 | 16.81 | 17.69 | 18.09 |
| | 50 | CP | 64QAM | 14.17 | 14.33 | 15.54 | 15.19 |
| | 100 | DFT-S | QPSK | 20.4 | 20.28 | 22.11 | 22.36 |
| | 100 | DFT-S | 16QAM | 18.46 | 18.7 | 19.64 | 19.96 |
| | 100 | DFT-S | 64QAM | 16.21 | 16.46 | 17.61 | 17.93 |
| | 100 | CP | QPSK | 18.29 | 18.1 | 19.04 | 19.2 |
| | 100 | CP | 16QAM | 17.18 | 17 | 17.64 | 18.12 |
| | 100 | CP | 64QAM | 14.46 | 14.42 | 15.81 | 16.25 |
| | 400 | DFT-S | QPSK | 12.95 | 17.64 | 12.98 | 16.42 |
| | 400 | DFT-S | 16QAM | 13.95 | 16.1 | 13.66 | 16.11 |
| | 400 | DFT-S | 64QAM | 13.99 | 13.81 | 13.92 | 13.89 |
| | 400 | CP | QPSK | 14.01 | 15.55 | 13.81 | 15.6 |
| | 400 | CP | 16QAM | 13.45 | 13.73 | 13.2 | 13.49 |
| 400 | CP | 64QAM | 7.88 | 11.34 | 11.87 | 11.35 | |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 1 AG0 (Beam ID: 24) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 19.2 | 18.93 | 21.23 | 21.06 |
| | 50 | DFT-S | 16QAM | 17.43 | 17.3 | 18.84 | 18.94 |
| | 50 | DFT-S | 64QAM | 15.5 | 15.07 | 16.86 | 16.68 |
| | 50 | CP | QPSK | 17.43 | 17.01 | 18.41 | 17.77 |
| | 50 | CP | 16QAM | 16.05 | 15.81 | 17.14 | 16.65 |
| | 50 | CP | 64QAM | 13.65 | 13.05 | 15.19 | 14.79 |
| | 100 | DFT-S | QPSK | 19.51 | 18.79 | 21.34 | 21.03 |
| | 100 | DFT-S | 16QAM | 17.46 | 17.2 | 18.79 | 18.95 |
| | 100 | DFT-S | 64QAM | 15.49 | 15.05 | 16.88 | 16.56 |
| | 100 | CP | QPSK | 17.08 | 16.75 | 17.97 | 17.95 |
| | 100 | CP | 16QAM | 15.66 | 15.54 | 16.44 | 16.93 |
| | 100 | CP | 64QAM | 13.33 | 13.01 | 14.77 | 14.55 |
| | 400 | DFT-S | QPSK | 13.76 | 17.72 | 14.08 | 17.04 |
| | 400 | DFT-S | 16QAM | 14.27 | 16.38 | 14.52 | 16.43 |
| | 400 | DFT-S | 64QAM | 15.19 | 14.31 | 15.31 | 14.37 |
| | 400 | CP | QPSK | 14.89 | 15.81 | 15.03 | 16.21 |
| | 400 | CP | 16QAM | 14.39 | 14.15 | 14.41 | 14.64 |
| | 400 | CP | 64QAM | 12.21 | 12.25 | 12.51 | 12.05 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID: 151) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 17.91 | 17.98 | 19.92 | 20.11 |
| | 50 | DFT-S | 16QAM | 17.21 | 16.4 | 18.72 | 17.71 |
| | 50 | DFT-S | 64QAM | 14.03 | 13.97 | 15.42 | 15.42 |
| | 50 | CP | QPSK | 15.23 | 15.62 | 15.95 | 16.65 |
| | 50 | CP | 16QAM | 15.13 | 14.46 | 15.83 | 15.17 |
| | 50 | CP | 64QAM | 11.9 | 11.68 | 13.26 | 12.78 |
| | 100 | DFT-S | QPSK | 17.61 | 18.18 | 19.66 | 20.36 |
| | 100 | DFT-S | 16QAM | 16.81 | 16.42 | 18.25 | 18.14 |
| | 100 | DFT-S | 64QAM | 14.11 | 14.2 | 15.67 | 16 |
| | 100 | CP | QPSK | 15.18 | 15.89 | 15.91 | 16.82 |
| | 100 | CP | 16QAM | 14.88 | 14.69 | 15.86 | 15.92 |
| | 100 | CP | 64QAM | 12.09 | 11.84 | 13.46 | 13.57 |
| | 400 | DFT-S | QPSK | 13.66 | 16.91 | 13.48 | 16.95 |
| | 400 | DFT-S | 16QAM | 14.14 | 14.99 | 13.61 | 14.98 |
| | 400 | DFT-S | 64QAM | 12.46 | 12.79 | 12.36 | 12.89 |
| | 400 | CP | QPSK | 12.94 | 15.01 | 12.68 | 14.79 |
| | 400 | CP | 16QAM | 14.18 | 13.62 | 14.16 | 13.75 |
| | 400 | CP | 64QAM | 8.04 | 11.95 | 11.98 | 11.87 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID: 151) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 17.67 | 18.35 | 19.98 | 20.52 |
| | 50 | DFT-S | 16QAM | 16.12 | 16.85 | 17.77 | 18.36 |
| | 50 | DFT-S | 64QAM | 15.09 | 14.59 | 16.99 | 16.34 |
| | 50 | CP | QPSK | 16.22 | 16.42 | 17.3 | 17.42 |
| | 50 | CP | 16QAM | 15.12 | 15.05 | 16.02 | 16.21 |
| | 50 | CP | 64QAM | 13.03 | 12.56 | 14.6 | 14.27 |
| | 100 | DFT-S | QPSK | 18.29 | 18.04 | 20.3 | 20.16 |
| | 100 | DFT-S | 16QAM | 16.78 | 16.3 | 18.16 | 18.05 |
| | 100 | DFT-S | 64QAM | 14.36 | 14.3 | 15.71 | 15.79 |
| | 100 | CP | QPSK | 16.12 | 15.81 | 17.02 | 16.94 |
| | 100 | CP | 16QAM | 14.72 | 14.72 | 15.68 | 15.62 |
| | 100 | CP | 64QAM | 12.84 | 12.19 | 14.4 | 14.36 |
| | 400 | DFT-S | QPSK | 14.34 | 18.18 | 14.24 | 17.23 |
| | 400 | DFT-S | 16QAM | 13.5 | 16.65 | 13.24 | 16.64 |
| | 400 | DFT-S | 64QAM | 14.43 | 14.4 | 13.89 | 14.33 |
| | 400 | CP | QPSK | 15.37 | 16.2 | 15.15 | 16.39 |
| | 400 | CP | 16QAM | 14.36 | 14.43 | 14.07 | 14.14 |
| | 400 | CP | 64QAM | 8.36 | 12.12 | 12.2 | 12.19 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID: 151) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.56 | 18.93 | 20.67 | 20.86 |
| | 50 | DFT-S | 16QAM | 17.92 | 17.36 | 19.59 | 18.62 |
| | 50 | DFT-S | 64QAM | 14.81 | 14.95 | 16.39 | 16.55 |
| | 50 | CP | QPSK | 16.08 | 16.72 | 17.06 | 17.75 |
| | 50 | CP | 16QAM | 16.03 | 15.61 | 16.89 | 16.34 |
| | 50 | CP | 64QAM | 13.08 | 13.03 | 14.47 | 14.08 |
| | 100 | DFT-S | QPSK | 18.18 | 18.56 | 20.1 | 20.2 |
| | 100 | DFT-S | 16QAM | 17.42 | 16.85 | 18.97 | 18.15 |
| | 100 | DFT-S | 64QAM | 14.55 | 14.63 | 16.07 | 16.11 |
| | 100 | CP | QPSK | 16.02 | 16.37 | 16.67 | 17.09 |
| | 100 | CP | 16QAM | 15.99 | 15.24 | 16.52 | 16.15 |
| | 100 | CP | 64QAM | 13.05 | 12.61 | 14.22 | 14.05 |
| | 400 | DFT-S | QPSK | 13.85 | 18.47 | 14.13 | 17.68 |
| | 400 | DFT-S | 16QAM | 14.36 | 16.96 | 14.93 | 17.29 |
| | 400 | DFT-S | 64QAM | 14.94 | 14.88 | 15.34 | 15.2 |
| | 400 | CP | QPSK | 14.02 | 16.53 | 14.21 | 16.73 |
| | 400 | CP | 16QAM | 14.36 | 14.62 | 14.5 | 15.06 |
| | 400 | CP | 64QAM | 11.85 | 15.94 | 12.04 | 12.11 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n260 Module 1 AG0+1 (Beam ID: 24+152) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.48 | 19.25 | 21.39 | 21.25 |
| | 50 | DFT-S | 16QAM | 18.84 | 17.69 | 20.25 | 18.99 |
| | 50 | DFT-S | 64QAM | 15.15 | 15.5 | 16.62 | 16.68 |
| | 50 | CP | QPSK | 18.34 | 18.64 | 19.29 | 19.32 |
| | 50 | CP | 16QAM | 17.66 | 17.61 | 18.41 | 18.28 |
| | 50 | CP | 64QAM | 14.74 | 14.61 | 16.03 | 15.96 |
| | 100 | DFT-S | QPSK | 18.9 | 18.9 | 20.48 | 21.08 |
| | 100 | DFT-S | 16QAM | 17.99 | 17.15 | 19.09 | 18.87 |
| | 100 | DFT-S | 64QAM | 15.15 | 15.4 | 16.37 | 16.77 |
| | 100 | CP | QPSK | 19.12 | 18.88 | 19.58 | 19.88 |
| | 100 | CP | 16QAM | 17.93 | 17.65 | 18.67 | 18.8 |
| | 100 | CP | 64QAM | 15.2 | 14.79 | 16.69 | 16.73 |

| NR Band n260 Module 1 AG0+1 (Beam ID: 24+152) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 19.04 | 19.37 | 21.09 | 21.47 |
| | 50 | DFT-S | 16QAM | 17.53 | 17.75 | 19.4 | 19.66 |
| | 50 | DFT-S | 64QAM | 15.28 | 15.8 | 16.98 | 17.33 |
| | 50 | CP | QPSK | 18.63 | 18.62 | 19.81 | 19.74 |
| | 50 | CP | 16QAM | 18.36 | 17.47 | 19.39 | 18.63 |
| | 50 | CP | 64QAM | 13.67 | 14.91 | 15.39 | 16.28 |
| | 100 | DFT-S | QPSK | 20.11 | 20.44 | 22.26 | 21.69 |
| | 100 | DFT-S | 16QAM | 18.62 | 19 | 20.02 | 19.57 |
| | 100 | DFT-S | 64QAM | 16.51 | 16.99 | 18.13 | 17.58 |
| | 100 | CP | QPSK | 18.39 | 18.51 | 19.27 | 19.9 |
| | 100 | CP | 16QAM | 17.2 | 17.38 | 18.52 | 18.57 |
| | 100 | CP | 64QAM | 14.85 | 14.7 | 16.26 | 16.3 |



| NR Band n260 Module 1 AG0+1 (Beam ID: 24+152) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.29 | 18.08 | 20.35 | 20.22 |
| | 50 | DFT-S | 16QAM | 16.4 | 16.49 | 18.22 | 18.26 |
| | 50 | DFT-S | 64QAM | 14.56 | 14.09 | 16.22 | 16 |
| | 50 | CP | QPSK | 16.21 | 16.54 | 17.32 | 17.72 |
| | 50 | CP | 16QAM | 15.51 | 15.24 | 16.62 | 16.84 |
| | 50 | CP | 64QAM | 12.49 | 12.65 | 14.22 | 14.43 |
| | 100 | DFT-S | QPSK | 18.39 | 18.01 | 20.36 | 20.24 |
| | 100 | DFT-S | 16QAM | 17.57 | 16.32 | 18.88 | 17.97 |
| | 100 | DFT-S | 64QAM | 14.45 | 13.99 | 16.22 | 15.93 |
| | 100 | CP | QPSK | 16.32 | 16.19 | 17.27 | 17.1 |
| | 100 | CP | 16QAM | 15.4 | 15.1 | 16.48 | 16.19 |
| | 100 | CP | 64QAM | 12.48 | 12.39 | 14.15 | 13.87 |

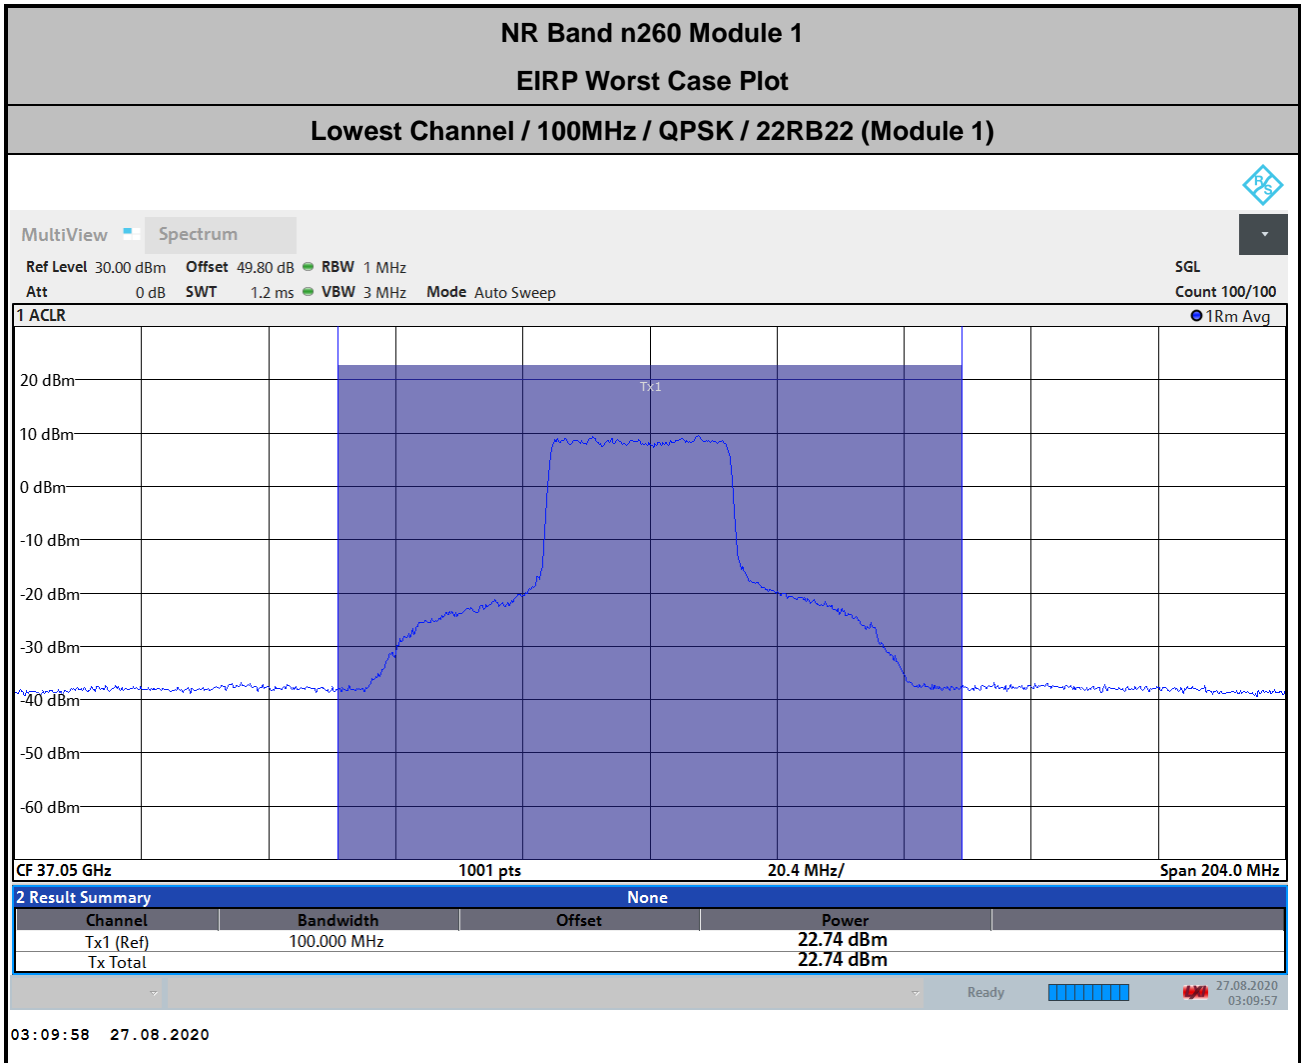

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 45.1 + 2.5 + 107 + 20\log(1) - 104.8 \\
 &= 49.8 \text{ (dB)}
 \end{aligned}$$



NR Band n260 Module 2

| NR Band n260 Module 2 AG0 (Beam ID: 33) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.13 | 18.59 | 20.85 | 20.8 |
| | 50 | DFT-S | 16QAM | 16.89 | 17.03 | 18.31 | 18.72 |
| | 50 | DFT-S | 64QAM | 15.1 | 14.51 | 16.57 | 16.28 |
| | 50 | CP | QPSK | 17.43 | 16.42 | 18.34 | 17.63 |
| | 50 | CP | 16QAM | 15.35 | 15.31 | 16.44 | 16.69 |
| | 50 | CP | 64QAM | 13.14 | 12.57 | 14.75 | 14.26 |
| | 100 | DFT-S | QPSK | 19.25 | 19.08 | 21.01 | 21.59 |
| | 100 | DFT-S | 16QAM | 17.2 | 17.42 | 18.61 | 19.3 |
| | 100 | DFT-S | 64QAM | 15.48 | 15.06 | 16.89 | 17.18 |
| | 100 | CP | QPSK | 17.18 | 16.83 | 18.06 | 18.27 |
| | 100 | CP | 16QAM | 15.38 | 15.73 | 16.33 | 16.86 |
| | 100 | CP | 64QAM | 13.29 | 12.81 | 14.83 | 14.71 |
| | 400 | DFT-S | QPSK | 13.55 | 16.33 | 13.16 | 16.23 |
| | 400 | DFT-S | 16QAM | 13.29 | 14.63 | 12.99 | 14.7 |
| | 400 | DFT-S | 64QAM | 12.7 | 12.41 | 12.37 | 12.61 |
| | 400 | CP | QPSK | 14.06 | 14.41 | 13.49 | 14.56 |
| | 400 | CP | 16QAM | 13.47 | 13.47 | 12.92 | 13.32 |
| | 400 | CP | 64QAM | 11.9 | 15.76 | 11.32 | 11.42 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 2 AG0 (Beam ID: 33) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 17.79 | 17.51 | 20.1 | 19.66 |
| | 50 | DFT-S | 16QAM | 16.23 | 15.93 | 17.85 | 17.4 |
| | 50 | DFT-S | 64QAM | 13.44 | 13.9 | 14.95 | 15.4 |
| | 50 | CP | QPSK | 14.44 | 14.14 | 15.53 | 16.41 |
| | 50 | CP | 16QAM | 14.75 | 14.24 | 15.91 | 15.37 |
| | 50 | CP | 64QAM | 11.77 | 11.36 | 13.57 | 13.59 |
| | 100 | DFT-S | QPSK | 18.23 | 18.58 | 20.51 | 20.91 |
| | 100 | DFT-S | 16QAM | 17.46 | 16.98 | 19 | 18.82 |
| | 100 | DFT-S | 64QAM | 15.13 | 15 | 16.64 | 16.67 |
| | 100 | CP | QPSK | 15.63 | 16.04 | 16.6 | 16.62 |
| | 100 | CP | 16QAM | 14.36 | 14.94 | 15.07 | 15.6 |
| | 100 | CP | 64QAM | 13.2 | 12.48 | 14.6 | 14.01 |
| | 400 | DFT-S | QPSK | 12.32 | 16.29 | 12.18 | 15.38 |
| | 400 | DFT-S | 16QAM | 12.17 | 14.76 | 11.83 | 14.79 |
| | 400 | DFT-S | 64QAM | 12.47 | 12.34 | 12.25 | 12.41 |
| | 400 | CP | QPSK | 11.08 | 14.22 | 10.79 | 14.14 |
| | 400 | CP | 16QAM | 12.04 | 12.18 | 11.69 | 12.04 |
| | 400 | CP | 64QAM | 7.07 | 10.35 | 10.47 | 10.39 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 2 AG0 (Beam ID: 33) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.99 | 18.78 | 20.82 | 20.91 |
| | 50 | DFT-S | 16QAM | 16.8 | 17.02 | 18.46 | 18.82 |
| | 50 | DFT-S | 64QAM | 14.81 | 14.8 | 16.55 | 16.63 |
| | 50 | CP | QPSK | 16.15 | 16.25 | 17.1 | 17.64 |
| | 50 | CP | 16QAM | 15.81 | 15.32 | 16.67 | 16.66 |
| | 50 | CP | 64QAM | 12.81 | 12.56 | 14.55 | 14.1 |
| | 100 | DFT-S | QPSK | 17.99 | 18.1 | 20.03 | 20.15 |
| | 100 | DFT-S | 16QAM | 16.23 | 16.51 | 17.92 | 17.97 |
| | 100 | DFT-S | 64QAM | 14.22 | 14.19 | 15.79 | 15.77 |
| | 100 | CP | QPSK | 15.16 | 15.99 | 16.11 | 17.02 |
| | 100 | CP | 16QAM | 15.34 | 14.7 | 16.18 | 15.77 |
| | 100 | CP | 64QAM | 13.45 | 12.14 | 14.78 | 13.58 |
| | 400 | DFT-S | QPSK | 13.49 | 17.65 | 14.01 | 17.21 |
| | 400 | DFT-S | 16QAM | 14.02 | 16.26 | 14.64 | 16.69 |
| | 400 | DFT-S | 64QAM | 14.81 | 14.21 | 15.19 | 14.32 |
| | 400 | CP | QPSK | 14.08 | 15.53 | 14.24 | 15.62 |
| | 400 | CP | 16QAM | 13.47 | 13.67 | 13.7 | 14.25 |
| | 400 | CP | 64QAM | 11.94 | 15.77 | 16.32 | 16.05 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 2 AG1 (Beam ID: 175) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.17 | 19.35 | 21.24 | 21.44 |
| | 50 | DFT-S | 16QAM | 17.91 | 17.62 | 19.15 | 19.11 |
| | 50 | DFT-S | 64QAM | 15.73 | 15.36 | 17.16 | 16.84 |
| | 50 | CP | QPSK | 17.47 | 17.08 | 18.16 | 18.42 |
| | 50 | CP | 16QAM | 16.15 | 15.94 | 16.98 | 16.76 |
| | 50 | CP | 64QAM | 13.93 | 13.15 | 15.2 | 14.32 |
| | 100 | DFT-S | QPSK | 19.82 | 20.07 | 21.59 | 22.25 |
| | 100 | DFT-S | 16QAM | 18.24 | 18.41 | 19.65 | 19.86 |
| | 100 | DFT-S | 64QAM | 16.44 | 16.14 | 17.61 | 17.79 |
| | 100 | CP | QPSK | 18.16 | 17.85 | 18.64 | 19.18 |
| | 100 | CP | 16QAM | 17.03 | 16.55 | 17.44 | 17.8 |
| | 100 | CP | 64QAM | 14.67 | 13.92 | 15.9 | 15.55 |
| | 400 | DFT-S | QPSK | 15.23 | 18.05 | 14.91 | 17.94 |
| | 400 | DFT-S | 16QAM | 14.95 | 16.39 | 14.67 | 16.28 |
| | 400 | DFT-S | 64QAM | 15.04 | 14.24 | 14.79 | 14.3 |
| | 400 | CP | QPSK | 15.03 | 16.35 | 14.61 | 16.13 |
| | 400 | CP | 16QAM | 16.57 | 15.34 | 16.15 | 15.32 |
| | 400 | CP | 64QAM | 9.72 | 13.43 | 13.52 | 13.25 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 2 AG1 (Beam ID: 175) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 18.01 | 17.98 | 20.42 | 20.18 |
| | 50 | DFT-S | 16QAM | 17.01 | 16.21 | 18.92 | 18.04 |
| | 50 | DFT-S | 64QAM | 14.3 | 14.41 | 15.89 | 15.71 |
| | 50 | CP | QPSK | 16.45 | 15.7 | 17.26 | 16.27 |
| | 50 | CP | 16QAM | 14.69 | 14.51 | 15.69 | 15.42 |
| | 50 | CP | 64QAM | 12.31 | 11.83 | 13.72 | 13.74 |
| | 100 | DFT-S | QPSK | 17.54 | 17.9 | 20.15 | 20.16 |
| | 100 | DFT-S | 16QAM | 16.47 | 16.39 | 18.36 | 18.13 |
| | 100 | DFT-S | 64QAM | 14.07 | 14.14 | 15.77 | 15.88 |
| | 100 | CP | QPSK | 15.12 | 15.25 | 15.92 | 16.17 |
| | 100 | CP | 16QAM | 14.63 | 14.07 | 15.4 | 15.27 |
| | 100 | CP | 64QAM | 11.35 | 11.42 | 12.72 | 13.46 |
| | 400 | DFT-S | QPSK | 14.65 | 18.37 | 14.47 | 17.46 |
| | 400 | DFT-S | 16QAM | 13.84 | 16.96 | 13.89 | 17.02 |
| | 400 | DFT-S | 64QAM | 14.76 | 14.75 | 14.44 | 14.86 |
| | 400 | CP | QPSK | 14.43 | 16.38 | 14.06 | 16.54 |
| | 400 | CP | 16QAM | 14.25 | 14.61 | 13.67 | 14.42 |
| | 400 | CP | 64QAM | 8.81 | 12.06 | 12.67 | 12.08 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n260 Module 2 AG1 (Beam ID: 175) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.12 | 18.32 | 20.26 | 20.46 |
| | 50 | DFT-S | 16QAM | 16.75 | 16.68 | 18.23 | 18.29 |
| | 50 | DFT-S | 64QAM | 14.82 | 14.53 | 16.34 | 16.09 |
| | 50 | CP | QPSK | 16.25 | 16.14 | 17.14 | 17.47 |
| | 50 | CP | 16QAM | 14.93 | 15.08 | 16.26 | 15.9 |
| | 50 | CP | 64QAM | 12.8 | 12.33 | 14.5 | 13.58 |
| | 100 | DFT-S | QPSK | 18.12 | 18.03 | 20.06 | 20.35 |
| | 100 | DFT-S | 16QAM | 16.39 | 16.53 | 18.13 | 18.23 |
| | 100 | DFT-S | 64QAM | 14.65 | 14.24 | 16.17 | 16.18 |
| | 100 | CP | QPSK | 15.91 | 15.49 | 16.86 | 16.95 |
| | 100 | CP | 16QAM | 14.73 | 14.19 | 15.95 | 15.56 |
| | 100 | CP | 64QAM | 12.51 | 11.79 | 14.15 | 13.45 |
| | 400 | DFT-S | QPSK | 13.04 | 14.92 | 15.88 | 16.96 |
| | 400 | DFT-S | 16QAM | 11.03 | 13.47 | 14.28 | 16.48 |
| | 400 | DFT-S | 64QAM | 11.51 | 11.4 | 14.89 | 14.19 |
| | 400 | CP | QPSK | 12.92 | 11.08 | 12.28 | 14.68 |
| | 400 | CP | 16QAM | 13.29 | 12.37 | 12.8 | 13.09 |
| | 400 | CP | 64QAM | 10.04 | 9.76 | 10.08 | 10.01 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n260 Module 2 AG0+1 (Beam ID: 45+173) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 16.66 | 19.1 | 21.52 | 21.14 |
| | 50 | DFT-S | 16QAM | 15.2 | 17.56 | 20.03 | 19.5 |
| | 50 | DFT-S | 64QAM | 12.86 | 15.54 | 17.62 | 17.44 |
| | 50 | CP | QPSK | 14.48 | 16.84 | 18.47 | 18.1 |
| | 50 | CP | 16QAM | 13.77 | 15.93 | 17.93 | 17.22 |
| | 50 | CP | 64QAM | 11.09 | 13.32 | 15.7 | 15.16 |
| | 100 | DFT-S | QPSK | 18.94 | 19.24 | 21.18 | 21.46 |
| | 100 | DFT-S | 16QAM | 17.41 | 17.5 | 19.1 | 19.05 |
| | 100 | DFT-S | 64QAM | 14.81 | 14.97 | 16.55 | 17.09 |
| | 100 | CP | QPSK | 14.1 | 14.59 | 15.23 | 15.48 |
| | 100 | CP | 16QAM | 13.69 | 13.47 | 14.6 | 14.59 |
| | 100 | CP | 64QAM | 10.85 | 10.41 | 12.12 | 12.06 |

| NR Band n260 Module 2 AG0+1 (Beam ID: 45+173) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|--------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 20.19 | 19.87 | 22.01 | 21.95 |
| | 50 | DFT-S | 16QAM | 17.73 | 18.37 | 19.14 | 20.03 |
| | 50 | DFT-S | 64QAM | 15.99 | 16.19 | 17.5 | 17.86 |
| | 50 | CP | QPSK | 14.84 | 14.74 | 15.03 | 16.22 |
| | 50 | CP | 16QAM | 14.42 | 13.76 | 14.64 | 14.72 |
| | 50 | CP | 64QAM | 10.63 | 12.35 | 11.96 | 12.73 |
| | 100 | DFT-S | QPSK | 21.07 | 20.62 | 22.59 | 22.82 |
| | 100 | DFT-S | 16QAM | 18.66 | 19.08 | 20.71 | 21.17 |
| | 100 | DFT-S | 64QAM | 17.46 | 16.99 | 19.11 | 19.2 |
| | 100 | CP | QPSK | 20.71 | 19.78 | 21.58 | 20.93 |
| | 100 | CP | 16QAM | 18.2 | 18.4 | 19.09 | 19.66 |
| | 100 | CP | 64QAM | 15.66 | 15.99 | 17.12 | 17.5 |



| NR Band n260 Module 2 AG0+1 (Beam ID: 45+173) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 20.51 | 19.64 | 22.31 | 21.9 |
| | 50 | DFT-S | 16QAM | 18.03 | 18.05 | 19.52 | 19.79 |
| | 50 | DFT-S | 64QAM | 16.49 | 15.91 | 17.82 | 17.71 |
| | 50 | CP | QPSK | 13.93 | 14.69 | 14.99 | 15.54 |
| | 50 | CP | 16QAM | 13.55 | 13.45 | 14.8 | 14.4 |
| | 50 | CP | 64QAM | 10.15 | 10.91 | 11.9 | 12.61 |
| | 100 | DFT-S | QPSK | 19.78 | 19.73 | 21.92 | 21.69 |
| | 100 | DFT-S | 16QAM | 18.45 | 18.21 | 19.9 | 19.58 |
| | 100 | DFT-S | 64QAM | 16.49 | 15.99 | 18.08 | 17.45 |
| | 100 | CP | QPSK | 15.26 | 15.51 | 16.08 | 16.46 |
| | 100 | CP | 16QAM | 14.41 | 14.33 | 15.19 | 15.37 |
| | 100 | CP | 64QAM | 11.72 | 11.58 | 13.22 | 13.27 |

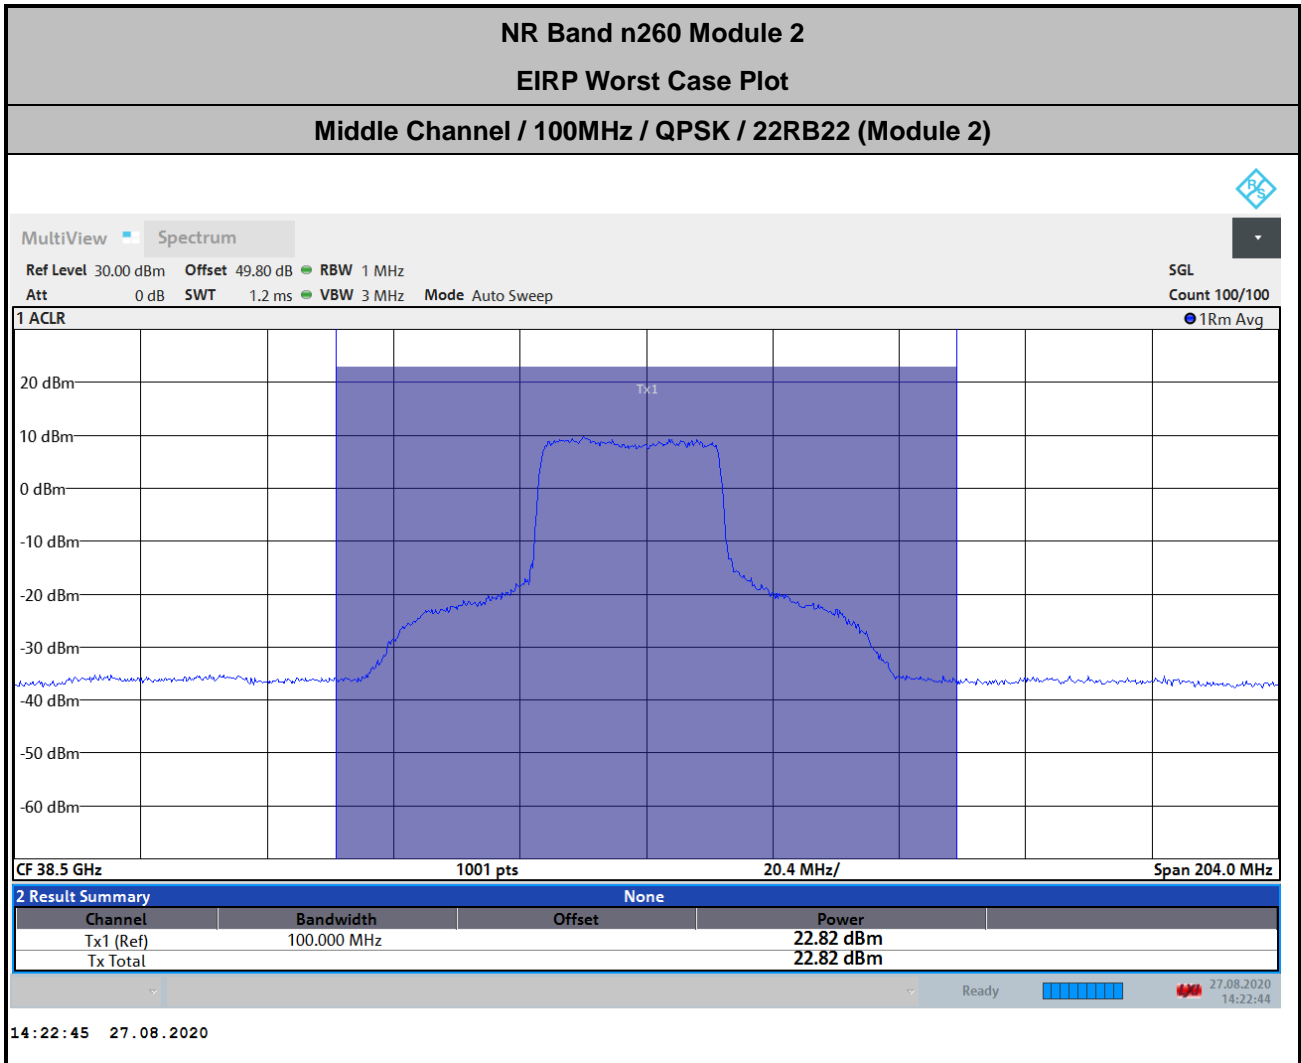

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 45.1 + 2.5 + 107 + 20\log(1) - 104.8 \\
 &= 49.8 \text{ (dB)}
 \end{aligned}$$



NR Band n261 Module 0

| NR Band n261 Module 0 AG0 (Beam ID: 27) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.17 | 18.75 | 21.43 | 20.81 |
| | 50 | DFT-S | 16QAM | 17.65 | 17.05 | 19.24 | 18.6 |
| | 50 | DFT-S | 64QAM | 14.86 | 14.87 | 16.51 | 16.48 |
| | 50 | CP | QPSK | 17.15 | 16.71 | 18.1 | 17.63 |
| | 50 | CP | 16QAM | 16.06 | 15.54 | 17.07 | 16.31 |
| | 50 | CP | 64QAM | 12.82 | 13.1 | 14.31 | 14.65 |
| | 100 | DFT-S | QPSK | 20.02 | 19.03 | 21.8 | 21.11 |
| | 100 | DFT-S | 16QAM | 18.19 | 17.5 | 19.7 | 19.01 |
| | 100 | DFT-S | 64QAM | 15.45 | 15.24 | 16.99 | 16.64 |
| | 100 | CP | QPSK | 17.7 | 16.89 | 18.36 | 17.68 |
| | 100 | CP | 16QAM | 16.13 | 15.83 | 16.8 | 16.62 |
| | 100 | CP | 64QAM | 13.84 | 13.41 | 15.1 | 14.48 |
| | 400 | DFT-S | QPSK | 14 | 18.16 | 14.16 | 17.18 |
| | 400 | DFT-S | 16QAM | 14.03 | 16.44 | 14.18 | 16.83 |
| | 400 | DFT-S | 64QAM | 14.56 | 14.37 | 14.78 | 14.48 |
| | 400 | CP | QPSK | 13.87 | 16.18 | 13.91 | 16.27 |
| | 400 | CP | 16QAM | 13.32 | 14.22 | 13.69 | 14.49 |
| | 400 | CP | 64QAM | 11.76 | 11.72 | 12.04 | 11.92 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 0 AG0 (Beam ID: 27) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 19.06 | 18.62 | 20.92 | 20.65 |
| | 50 | DFT-S | 16QAM | 17.78 | 16.89 | 19.2 | 18.55 |
| | 50 | DFT-S | 64QAM | 14.79 | 14.73 | 15.95 | 16.64 |
| | 50 | CP | QPSK | 17.2 | 16.39 | 18.2 | 17.36 |
| | 50 | CP | 16QAM | 15.34 | 15.42 | 16.19 | 16.76 |
| | 50 | CP | 64QAM | 13.53 | 12.63 | 14.93 | 13.94 |
| | 100 | DFT-S | QPSK | 20.05 | 19.36 | 21.91 | 21.31 |
| | 100 | DFT-S | 16QAM | 18.78 | 17.76 | 20.09 | 19.38 |
| | 100 | DFT-S | 64QAM | 15.61 | 15.55 | 16.92 | 17.1 |
| | 100 | CP | QPSK | 18.21 | 17.19 | 19.04 | 18.16 |
| | 100 | CP | 16QAM | 16.31 | 15.95 | 17.1 | 17.17 |
| | 100 | CP | 64QAM | 14.04 | 13.49 | 15.49 | 14.78 |
| | 400 | DFT-S | QPSK | 14.86 | 16.82 | 14.92 | 16.77 |
| | 400 | DFT-S | 16QAM | 15.26 | 15.42 | 15.34 | 15.18 |
| | 400 | DFT-S | 64QAM | 13.46 | 12.08 | 13.41 | 13.16 |
| | 400 | CP | QPSK | 13.74 | 15.24 | 13.69 | 15.32 |
| | 400 | CP | 16QAM | 12.92 | 14.1 | 13.07 | 14.28 |
| | 400 | CP | 64QAM | 12.72 | 12.02 | 12.75 | 12.03 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 0 AG0 (Beam ID: 27) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.62 | 18.35 | 20.74 | 20.46 |
| | 50 | DFT-S | 16QAM | 17.63 | 16.77 | 19.16 | 18.1 |
| | 50 | DFT-S | 64QAM | 14.64 | 14.61 | 16.27 | 16.33 |
| | 50 | CP | QPSK | 16.51 | 16 | 17.47 | 16.92 |
| | 50 | CP | 16QAM | 14.47 | 15.02 | 15.48 | 15.67 |
| | 50 | CP | 64QAM | 12.44 | 12.09 | 14.08 | 13.75 |
| | 100 | DFT-S | QPSK | 21.03 | 19.96 | 22.81 | 21.96 |
| | 100 | DFT-S | 16QAM | 20.03 | 18.24 | 21.35 | 19.85 |
| | 100 | DFT-S | 64QAM | 17.22 | 16.17 | 18.4 | 17.77 |
| | 100 | CP | QPSK | 19.21 | 17.78 | 19.84 | 18.68 |
| | 100 | CP | 16QAM | 17.12 | 16.58 | 17.75 | 17.64 |
| | 100 | CP | 64QAM | 14.66 | 13.93 | 16 | 15.19 |
| | 400 | DFT-S | QPSK | 15.37 | 18.05 | 15.41 | 17.12 |
| | 400 | DFT-S | 16QAM | 15.9 | 16.71 | 15.53 | 16.64 |
| | 400 | DFT-S | 64QAM | 15.01 | 14.61 | 15.15 | 14.82 |
| | 400 | CP | QPSK | 14.36 | 16.15 | 14.38 | 16.51 |
| | 400 | CP | 16QAM | 13.85 | 14.59 | 13.84 | 15.04 |
| | 400 | CP | 64QAM | 13.03 | 11.99 | 13 | 14.86 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.89 | 18.35 | 21 | 20.69 |
| | 50 | DFT-S | 16QAM | 17.66 | 16.9 | 19.32 | 18.23 |
| | 50 | DFT-S | 64QAM | 14.8 | 14.51 | 16.45 | 16.46 |
| | 50 | CP | QPSK | 16.51 | 16.29 | 17.81 | 17.04 |
| | 50 | CP | 16QAM | 15.89 | 15.28 | 16.88 | 15.81 |
| | 50 | CP | 64QAM | 13.17 | 12.69 | 14.72 | 14.17 |
| | 100 | DFT-S | QPSK | 19.71 | 18.62 | 21.37 | 20.66 |
| | 100 | DFT-S | 16QAM | 18.44 | 17.19 | 19.55 | 18.67 |
| | 100 | DFT-S | 64QAM | 15.62 | 15.11 | 16.65 | 16.55 |
| | 100 | CP | QPSK | 16.82 | 16.34 | 17.68 | 17.21 |
| | 100 | CP | 16QAM | 16.18 | 15.21 | 16.96 | 16.38 |
| | 100 | CP | 64QAM | 13.38 | 12.76 | 14.63 | 13.88 |
| | 400 | DFT-S | QPSK | 14.32 | 17.94 | 14.43 | 17.09 |
| | 400 | DFT-S | 16QAM | 14.6 | 16.36 | 14.6 | 16.77 |
| | 400 | DFT-S | 64QAM | 14.94 | 14.37 | 15.01 | 14.54 |
| | 400 | CP | QPSK | 14.33 | 15.99 | 14.6 | 15.78 |
| | 400 | CP | 16QAM | 13.85 | 14.22 | 13.9 | 14.52 |
| | 400 | CP | 64QAM | 11.24 | 11.9 | 11.4 | 11.96 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 18.95 | 18.67 | 20.97 | 20.71 |
| | 50 | DFT-S | 16QAM | 17.57 | 17.11 | 19.11 | 18.77 |
| | 50 | DFT-S | 64QAM | 14.9 | 14.99 | 16.34 | 16.74 |
| | 50 | CP | QPSK | 16.43 | 16.53 | 17.29 | 17.57 |
| | 50 | CP | 16QAM | 15.26 | 15.47 | 16.02 | 16.32 |
| | 50 | CP | 64QAM | 11.8 | 12.79 | 13.15 | 14.33 |
| | 100 | DFT-S | QPSK | 19.78 | 19.39 | 21.9 | 21.43 |
| | 100 | DFT-S | 16QAM | 18.17 | 17.8 | 19.96 | 19.3 |
| | 100 | DFT-S | 64QAM | 15.59 | 15.57 | 17.32 | 17.21 |
| | 100 | CP | QPSK | 16.91 | 17.58 | 17.9 | 18.19 |
| | 100 | CP | 16QAM | 16.23 | 16.21 | 17.19 | 17.18 |
| | 100 | CP | 64QAM | 12.77 | 13.61 | 14.32 | 15.13 |
| | 400 | DFT-S | QPSK | 14.8 | 16.68 | 14.83 | 16.55 |
| | 400 | DFT-S | 16QAM | 14.49 | 15.34 | 14.51 | 15.15 |
| | 400 | DFT-S | 64QAM | 12.99 | 13.16 | 12.99 | 12.95 |
| | 400 | CP | QPSK | 14.62 | 15.33 | 14.75 | 15.08 |
| | 400 | CP | 16QAM | 13.55 | 13.97 | 13.62 | 13.95 |
| | 400 | CP | 64QAM | 11.65 | 11.94 | 11.76 | 11.88 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID: 154) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 19.04 | 19.18 | 21.51 | 21.28 |
| | 50 | DFT-S | 16QAM | 17.56 | 17.49 | 19.6 | 19.28 |
| | 50 | DFT-S | 64QAM | 14.85 | 15.47 | 16.82 | 17.39 |
| | 50 | CP | QPSK | 16.48 | 17.01 | 17.72 | 18.27 |
| | 50 | CP | 16QAM | 15.39 | 15.89 | 16.64 | 17.05 |
| | 50 | CP | 64QAM | 11.89 | 13.18 | 13.78 | 15.02 |
| | 100 | DFT-S | QPSK | 19.79 | 19.25 | 21.44 | 21.2 |
| | 100 | DFT-S | 16QAM | 18.15 | 17.64 | 19.41 | 19.15 |
| | 100 | DFT-S | 64QAM | 15.5 | 15.55 | 16.8 | 16.97 |
| | 100 | CP | QPSK | 16.73 | 17.32 | 17.27 | 17.85 |
| | 100 | CP | 16QAM | 16.06 | 15.95 | 16.51 | 16.86 |
| | 100 | CP | 64QAM | 12.6 | 13.25 | 13.65 | 14.76 |
| | 400 | DFT-S | QPSK | 14.56 | 18.04 | 14.58 | 17.11 |
| | 400 | DFT-S | 16QAM | 15.18 | 16.55 | 14.98 | 16.57 |
| | 400 | DFT-S | 64QAM | 14.62 | 14.46 | 14.59 | 14.62 |
| | 400 | CP | QPSK | 13.63 | 16.07 | 13.56 | 16.09 |
| | 400 | CP | 16QAM | 13.39 | 14.49 | 13.69 | 14.41 |
| | 400 | CP | 64QAM | 11.48 | 11.93 | 11.51 | 11.55 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n261 Module 0 AG0+1 (Beam ID: 30+158) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.5 | 19.27 | 21.83 | 21.72 |
| | 50 | DFT-S | 16QAM | 18.3 | 17.97 | 19.98 | 19.81 |
| | 50 | DFT-S | 64QAM | 15.94 | 15.98 | 17.55 | 17.2 |
| | 50 | CP | QPSK | 15.83 | 15.13 | 17.07 | 16.21 |
| | 50 | CP | 16QAM | 14.02 | 13.97 | 15.32 | 15.02 |
| | 50 | CP | 64QAM | 11.59 | 11.35 | 13.43 | 13.04 |
| | 100 | DFT-S | QPSK | 20.23 | 19.99 | 22.48 | 22.27 |
| | 100 | DFT-S | 16QAM | 18.89 | 18.39 | 20.7 | 20.4 |
| | 100 | DFT-S | 64QAM | 16.62 | 16.25 | 18.46 | 17.99 |
| | 100 | CP | QPSK | 16.38 | 15.48 | 17.54 | 16.4 |
| | 100 | CP | 16QAM | 14.75 | 14.45 | 15.96 | 15.62 |
| | 100 | CP | 64QAM | 12.31 | 11.64 | 14 | 13.4 |

| NR Band n261 Module 0 AG0+1 (Beam ID: 30+158) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|--------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 19.76 | 19.82 | 22.04 | 21.89 |
| | 50 | DFT-S | 16QAM | 18.67 | 18.12 | 20.29 | 19.85 |
| | 50 | DFT-S | 64QAM | 15.73 | 16.12 | 17.36 | 17.52 |
| | 50 | CP | QPSK | 15.39 | 14.75 | 16.47 | 15.85 |
| | 50 | CP | 16QAM | 13.49 | 13.34 | 14.8 | 14.96 |
| | 50 | CP | 64QAM | 10.86 | 10.78 | 12.65 | 12.46 |
| | 100 | DFT-S | QPSK | 20.84 | 20.76 | 22.96 | 23.13 |
| | 100 | DFT-S | 16QAM | 19.98 | 19.15 | 21.51 | 21.04 |
| | 100 | DFT-S | 64QAM | 17.14 | 17.03 | 18.73 | 18.82 |
| | 100 | CP | QPSK | 16.6 | 15.6 | 17.49 | 16.91 |
| | 100 | CP | 16QAM | 14.71 | 14.5 | 15.78 | 15.82 |
| | 100 | CP | 64QAM | 12.03 | 11.76 | 13.54 | 13.69 |



| NR Band n261 Module 0 AG0+1 (Beam ID: 30+158) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 19.02 | 19.05 | 21.46 | 21.33 |
| | 50 | DFT-S | 16QAM | 17.41 | 17.63 | 19.73 | 19.39 |
| | 50 | DFT-S | 64QAM | 14.7 | 15.64 | 16.92 | 17.43 |
| | 50 | CP | QPSK | 16.13 | 16.63 | 17.52 | 17.44 |
| | 50 | CP | 16QAM | 14.89 | 15.39 | 16.65 | 16.5 |
| | 50 | CP | 64QAM | 11.26 | 12.87 | 12.57 | 14.16 |
| | 100 | DFT-S | QPSK | 20.67 | 20.38 | 22.27 | 22.04 |
| | 100 | DFT-S | 16QAM | 19.15 | 18.81 | 20.46 | 19.97 |
| | 100 | DFT-S | 64QAM | 16.68 | 16.73 | 17.69 | 17.87 |
| | 100 | CP | QPSK | 16.17 | 16.12 | 17.01 | 17.27 |
| | 100 | CP | 16QAM | 15.55 | 15.23 | 16.21 | 16.3 |
| | 100 | CP | 64QAM | 10.82 | 12.53 | 12.35 | 13.92 |

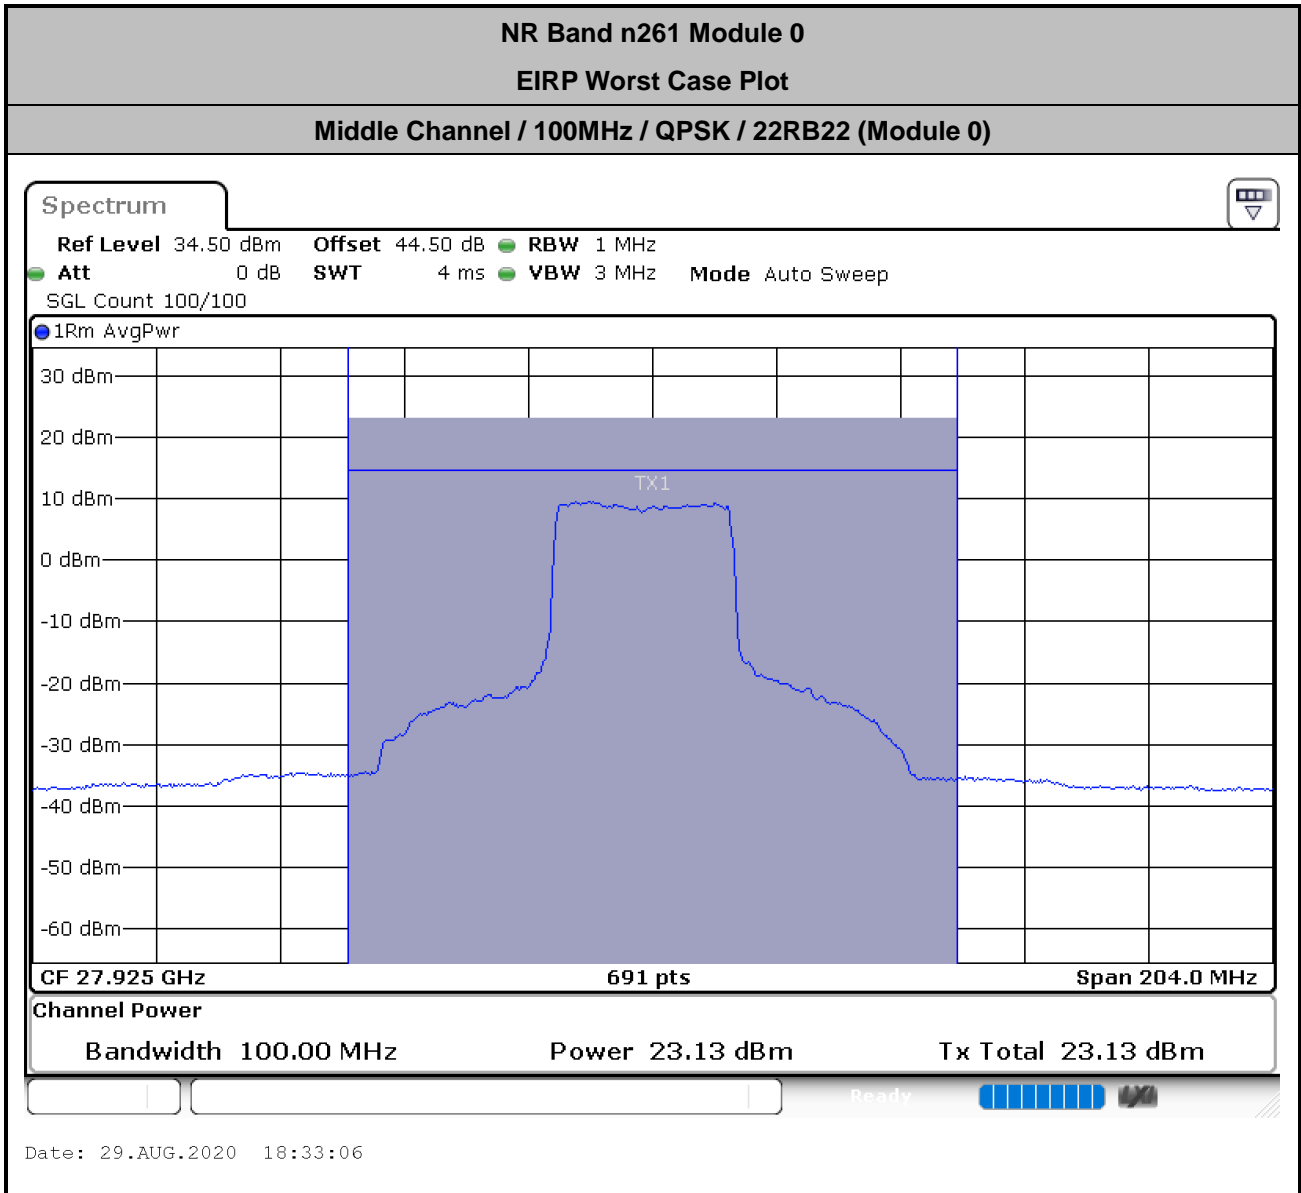

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 40.5 + 1.8 + 107 + 20\log(1) - 104.8 \\
 &= 44.5 \text{ (dB)}
 \end{aligned}$$



NR Band n261 Module 1

| NR Band n261 Module 1 AG0 (Beam ID: 23) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.79 | 18.76 | 21.07 | 20.91 |
| | 50 | DFT-S | 16QAM | 18.08 | 17.13 | 19.8 | 18.8 |
| | 50 | DFT-S | 64QAM | 14.81 | 14.76 | 16.64 | 16.72 |
| | 50 | CP | QPSK | 16.13 | 16.49 | 17.48 | 17.79 |
| | 50 | CP | 16QAM | 15.69 | 15.59 | 17.16 | 16.36 |
| | 50 | CP | 64QAM | 12.76 | 12.97 | 14.69 | 15.01 |
| | 100 | DFT-S | QPSK | 19.34 | 18.94 | 21.47 | 21.17 |
| | 100 | DFT-S | 16QAM | 18.1 | 17.3 | 19.73 | 18.99 |
| | 100 | DFT-S | 64QAM | 15.27 | 15.23 | 16.98 | 16.71 |
| | 100 | CP | QPSK | 16.16 | 16.87 | 17.48 | 18.19 |
| | 100 | CP | 16QAM | 15.96 | 15.45 | 17.22 | 17.09 |
| | 100 | CP | 64QAM | 13.56 | 13.06 | 15.31 | 14.73 |
| | 400 | DFT-S | QPSK | 13.64 | 17.59 | 13.66 | 16.56 |
| | 400 | DFT-S | 16QAM | 14.09 | 15.98 | 14.29 | 16.24 |
| | 400 | DFT-S | 64QAM | 14.16 | 13.74 | 14.47 | 16.39 |
| | 400 | CP | QPSK | 13.9 | 15.43 | 14.29 | 15.58 |
| | 400 | CP | 16QAM | 13.84 | 13.82 | 13.99 | 14.02 |
| | 400 | CP | 64QAM | 11.53 | 11.06 | 11.76 | 11.37 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 1 AG0 (Beam ID: 23) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 17.98 | 18.28 | 20.29 | 20.49 |
| | 50 | DFT-S | 16QAM | 16.75 | 16.68 | 18.62 | 18.4 |
| | 50 | DFT-S | 64QAM | 14.09 | 14.58 | 16.07 | 16.09 |
| | 50 | CP | QPSK | 15.59 | 16.15 | 16.9 | 17.36 |
| | 50 | CP | 16QAM | 14.7 | 15.25 | 16.08 | 16.35 |
| | 50 | CP | 64QAM | 12.71 | 12.4 | 14.75 | 13.99 |
| | 100 | DFT-S | QPSK | 18.99 | 18.97 | 21.2 | 21.21 |
| | 100 | DFT-S | 16QAM | 17.77 | 17.49 | 19.59 | 19.2 |
| | 100 | DFT-S | 64QAM | 15.31 | 15.2 | 17.01 | 16.9 |
| | 100 | CP | QPSK | 16.47 | 16.97 | 17.67 | 17.98 |
| | 100 | CP | 16QAM | 15.43 | 15.65 | 16.65 | 16.92 |
| | 100 | CP | 64QAM | 13.59 | 13.04 | 15.3 | 14.84 |
| | 400 | DFT-S | QPSK | 13.96 | 16.35 | 13.96 | 16.31 |
| | 400 | DFT-S | 16QAM | 14.66 | 14.97 | 14.68 | 14.76 |
| | 400 | DFT-S | 64QAM | 12.74 | 12.83 | 12.8 | 12.77 |
| | 400 | CP | QPSK | 12.85 | 11.44 | 13.05 | 14.61 |
| | 400 | CP | 16QAM | 12.94 | 13.55 | 13.23 | 13.97 |
| | 400 | CP | 64QAM | 10.67 | 11.41 | 10.96 | 11.5 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 1 AG0 (Beam ID: 23) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.53 | 18.63 | 20.8 | 20.79 |
| | 50 | DFT-S | 16QAM | 17.82 | 17.04 | 19.21 | 18.66 |
| | 50 | DFT-S | 64QAM | 15.02 | 15.02 | 16.42 | 16.67 |
| | 50 | CP | QPSK | 15.85 | 16.55 | 17.28 | 17.14 |
| | 50 | CP | 16QAM | 15.06 | 15.52 | 16.61 | 16.5 |
| | 50 | CP | 64QAM | 12.36 | 12.77 | 14.4 | 14.12 |
| | 100 | DFT-S | QPSK | 18.57 | 18.97 | 21.1 | 21.19 |
| | 100 | DFT-S | 16QAM | 17.44 | 17.49 | 19.5 | 19.12 |
| | 100 | DFT-S | 64QAM | 14.95 | 15.32 | 16.88 | 16.96 |
| | 100 | CP | QPSK | 15.9 | 16.85 | 17.48 | 18.2 |
| | 100 | CP | 16QAM | 15.22 | 15.75 | 16.81 | 16.87 |
| | 100 | CP | 64QAM | 12.46 | 13.03 | 14.59 | 14.7 |
| | 400 | DFT-S | QPSK | 14.4 | 17.63 | 14.44 | 16.71 |
| | 400 | DFT-S | 16QAM | 13.95 | 16.13 | 13.95 | 16.18 |
| | 400 | DFT-S | 64QAM | 13.91 | 14.17 | 13.88 | 14.35 |
| | 400 | CP | QPSK | 14.7 | 15.8 | 14.83 | 15.71 |
| | 400 | CP | 16QAM | 14 | 14.13 | 14.18 | 14.47 |
| | 400 | CP | 64QAM | 11.63 | 11.54 | 11.74 | 11.56 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID: 149) | | | | | | | |
|--|----------|----------|------------|-----------|------------|--------------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 19.86 | 19.86 | 22.08 | 22.07 |
| | 50 | DFT-S | 16QAM | 19.03 | 18.29 | 20.74 | 19.88 |
| | 50 | DFT-S | 64QAM | 15.67 | 16.05 | 17.56 | 17.81 |
| | 50 | CP | QPSK | 17.23 | 17.69 | 18.58 | 17.62 |
| | 50 | CP | 16QAM | 16.84 | 16.75 | 18.16 | 17.62 |
| | 50 | CP | 64QAM | 13.88 | 14.05 | 15.76 | 16.14 |
| | 100 | DFT-S | QPSK | 20.89 | 20.67 | 23.13 | 22.91 |
| | 100 | DFT-S | 16QAM | 20.2 | 19.2 | 21.9 | 20.9 |
| | 100 | DFT-S | 64QAM | 16.92 | 16.94 | 18.67 | 18.66 |
| | 100 | CP | QPSK | 18.38 | 18.48 | 19.59 | 19.82 |
| | 100 | CP | 16QAM | 17.63 | 17.32 | 19.11 | 18.68 |
| | 100 | CP | 64QAM | 14.81 | 14.79 | 16.79 | 16.44 |
| | 400 | DFT-S | QPSK | 14.31 | 18.22 | 14.68 | 17.36 |
| | 400 | DFT-S | 16QAM | 14.21 | 16.52 | 14.57 | 16.92 |
| | 400 | DFT-S | 64QAM | 14.64 | 14.45 | 14.86 | 14.57 |
| | 400 | CP | QPSK | 15.22 | 15.96 | 15.34 | 16.17 |
| | 400 | CP | 16QAM | 14.07 | 14.23 | 14.4 | 14.65 |
| | 400 | CP | 64QAM | 11.54 | 11.89 | 11.96 | 12.15 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID: 149) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 19.07 | 19.17 | 21.27 | 21.4 |
| | 50 | DFT-S | 16QAM | 17.79 | 17.49 | 19.53 | 19.15 |
| | 50 | DFT-S | 64QAM | 15.17 | 15.5 | 16.86 | 17.21 |
| | 50 | CP | QPSK | 16.46 | 16.94 | 17.56 | 17.68 |
| | 50 | CP | 16QAM | 15.74 | 15.85 | 17 | 17.01 |
| | 50 | CP | 64QAM | 12.91 | 13.11 | 14.78 | 14.68 |
| | 100 | DFT-S | QPSK | 19.68 | 19.81 | 21.83 | 22.01 |
| | 100 | DFT-S | 16QAM | 18.5 | 18.2 | 20.12 | 19.95 |
| | 100 | DFT-S | 64QAM | 16.1 | 16.07 | 17.65 | 17.72 |
| | 100 | CP | QPSK | 17.12 | 17.7 | 18.29 | 18.99 |
| | 100 | CP | 16QAM | 16.55 | 16.55 | 17.65 | 17.56 |
| | 100 | CP | 64QAM | 13.61 | 13.79 | 15.46 | 15.44 |
| | 400 | DFT-S | QPSK | 15.09 | 17 | 14.92 | 16.87 |
| | 400 | DFT-S | 16QAM | 14.36 | 15.72 | 14.52 | 15.57 |
| | 400 | DFT-S | 64QAM | 13.33 | 13.83 | 13.39 | 13.84 |
| | 400 | CP | QPSK | 15.35 | 15.62 | 15.17 | 15.34 |
| | 400 | CP | 16QAM | 14.54 | 14.46 | 14.47 | 14.63 |
| | 400 | CP | 64QAM | 12.25 | 12.29 | 12.46 | 12.17 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID: 149) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.86 | 18.99 | 21.03 | 21.11 |
| | 50 | DFT-S | 16QAM | 17.73 | 17.38 | 19.51 | 18.93 |
| | 50 | DFT-S | 64QAM | 15.01 | 15.33 | 16.67 | 17.03 |
| | 50 | CP | QPSK | 16.23 | 16.78 | 14.71 | 17.4 |
| | 50 | CP | 16QAM | 15.46 | 15.76 | 16.68 | 16.81 |
| | 50 | CP | 64QAM | 12.85 | 12.97 | 14.64 | 14.44 |
| | 100 | DFT-S | QPSK | 19.43 | 20.16 | 22.21 | 22.37 |
| | 100 | DFT-S | 16QAM | 18.41 | 18.56 | 20.6 | 20.3 |
| | 100 | DFT-S | 64QAM | 15.81 | 16.42 | 18.18 | 18.19 |
| | 100 | CP | QPSK | 17 | 18.07 | 18.8 | 19.41 |
| | 100 | CP | 16QAM | 16.33 | 16.98 | 18.1 | 18.05 |
| | 100 | CP | 64QAM | 13.42 | 14.19 | 15.81 | 15.87 |
| | 400 | DFT-S | QPSK | 13.94 | 17.75 | 14.09 | 17.2 |
| | 400 | DFT-S | 16QAM | 14.66 | 16.29 | 14.8 | 16.71 |
| | 400 | DFT-S | 64QAM | 14.47 | 14.15 | 14.67 | 14.8 |
| | 400 | CP | QPSK | 13.84 | 15.75 | 14.26 | 16.32 |
| | 400 | CP | 16QAM | 14.73 | 14.09 | 15.4 | 14.86 |
| | 400 | CP | 64QAM | 11.86 | 11.67 | 12.15 | 12.23 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n261 Module 1 AG0+1 (Beam ID: 21+149) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.29 | 18.29 | 20.72 | 20.58 |
| | 50 | DFT-S | 16QAM | 17.73 | 16.56 | 19.37 | 18.31 |
| | 50 | DFT-S | 64QAM | 14.32 | 14.4 | 16.15 | 16.18 |
| | 50 | CP | QPSK | 17.24 | 16.91 | 18.37 | 18.23 |
| | 50 | CP | 16QAM | 16.09 | 15.63 | 17.59 | 17.24 |
| | 50 | CP | 64QAM | 13.06 | 13.18 | 14.99 | 14.81 |
| | 100 | DFT-S | QPSK | 20.52 | 19.08 | 21.92 | 21.27 |
| | 100 | DFT-S | 16QAM | 19.82 | 17.7 | 20.81 | 19.28 |
| | 100 | DFT-S | 64QAM | 16.62 | 15.43 | 17.57 | 16.86 |
| | 100 | CP | QPSK | 18.25 | 17.68 | 19.46 | 18.71 |
| | 100 | CP | 16QAM | 17.31 | 16.66 | 18.55 | 17.85 |
| | 100 | CP | 64QAM | 14.14 | 13.82 | 16.14 | 15.86 |

| NR Band n261 Module 1 AG0+1 (Beam ID: 21+149) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 18.65 | 18.82 | 20.64 | 20.58 |
| | 50 | DFT-S | 16QAM | 17.54 | 17.14 | 19.25 | 18.34 |
| | 50 | DFT-S | 64QAM | 14.5 | 15.08 | 16.27 | 16.23 |
| | 50 | CP | QPSK | 15.98 | 17.07 | 16.26 | 17.42 |
| | 50 | CP | 16QAM | 14.47 | 15.83 | 15.7 | 15.92 |
| | 50 | CP | 64QAM | 12.25 | 13.1 | 14.08 | 14.44 |
| | 100 | DFT-S | QPSK | 20 | 20.03 | 22.22 | 22.19 |
| | 100 | DFT-S | 16QAM | 18.74 | 18.45 | 20.68 | 20 |
| | 100 | DFT-S | 64QAM | 16.06 | 16.26 | 17.85 | 17.94 |
| | 100 | CP | QPSK | 18.96 | 18.11 | 20.03 | 19.38 |
| | 100 | CP | 16QAM | 16.4 | 17.26 | 17.43 | 18 |
| | 100 | CP | 64QAM | 14.24 | 14.48 | 15.83 | 16.13 |



| NR Band n261 Module 1 AG0+1 (Beam ID: 21+149) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.55 | 18.62 | 21.16 | 20.72 |
| | 50 | DFT-S | 16QAM | 17.01 | 16.98 | 18.88 | 18.55 |
| | 50 | DFT-S | 64QAM | 14.26 | 14.83 | 16.2 | 16.42 |
| | 50 | CP | QPSK | 17.232 | 16.76 | 18.41 | 17.52 |
| | 50 | CP | 16QAM | 14.35 | 15.87 | 16.03 | 16.47 |
| | 50 | CP | 64QAM | 12.39 | 12.97 | 14.5 | 14.75 |
| | 100 | DFT-S | QPSK | 18.87 | 19.11 | 21.43 | 21.4 |
| | 100 | DFT-S | 16QAM | 17 | 17.51 | 19.01 | 19.07 |
| | 100 | DFT-S | 64QAM | 15.32 | 15.2 | 17.26 | 17.01 |
| | 100 | CP | QPSK | 16.1 | 17.03 | 17.32 | 18.43 |
| | 100 | CP | 16QAM | 16.01 | 15.82 | 17.32 | 17.19 |
| | 100 | CP | 64QAM | 13.84 | 13.2 | 15.55 | 14.85 |

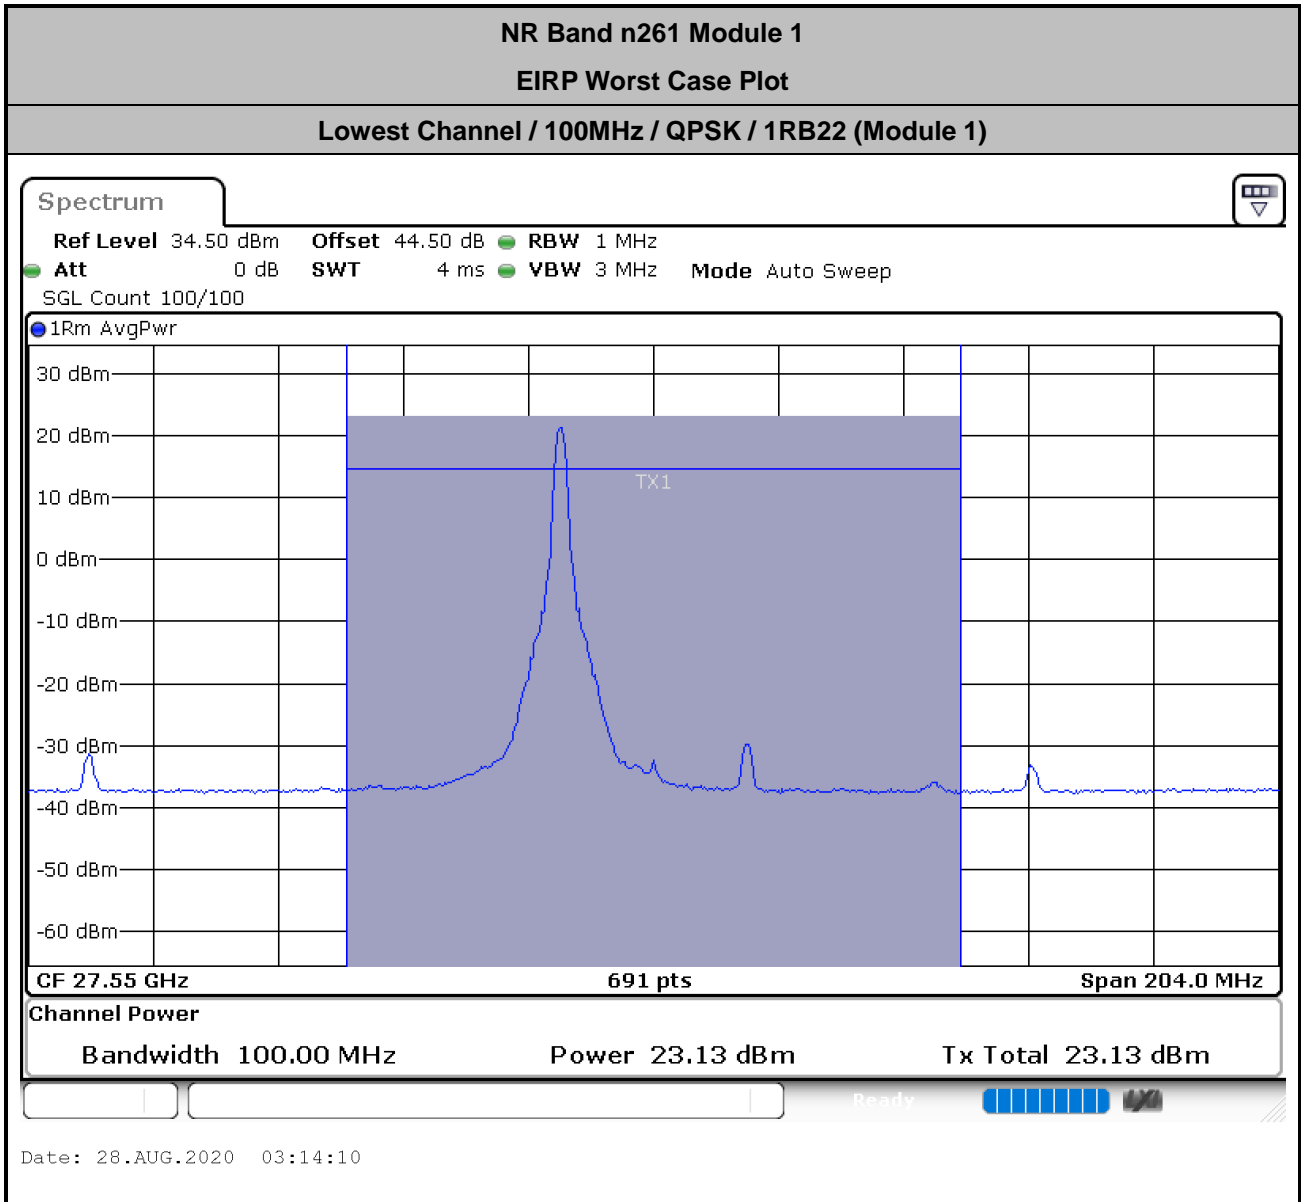

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 40.5 + 1.8 + 107 + 20\log(1) - 104.8 \\
 &= 44.5 \text{ (dB)}
 \end{aligned}$$



NR Band n261 Module 2

| NR Band n261 Module 2 AG0 (Beam ID: 45) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.55 | 18.58 | 20.78 | 20.87 |
| | 50 | DFT-S | 16QAM | 16.66 | 16.9 | 18.64 | 18.58 |
| | 50 | DFT-S | 64QAM | 14.23 | 14.65 | 16.17 | 16.33 |
| | 50 | CP | QPSK | 15.73 | 16.54 | 17.03 | 17.63 |
| | 50 | CP | 16QAM | 15.69 | 15.38 | 17.24 | 16.36 |
| | 50 | CP | 64QAM | 12.61 | 12.56 | 14.51 | 14.48 |
| | 100 | DFT-S | QPSK | 19.37 | 18.84 | 21.67 | 21.2 |
| | 100 | DFT-S | 16QAM | 17.62 | 17.21 | 19.34 | 19.09 |
| | 100 | DFT-S | 64QAM | 15.24 | 15.15 | 16.99 | 16.73 |
| | 100 | CP | QPSK | 16.76 | 16.79 | 17.95 | 17.86 |
| | 100 | CP | 16QAM | 16.38 | 15.56 | 17.68 | 16.93 |
| | 100 | CP | 64QAM | 13.67 | 13 | 15.39 | 14.67 |
| | 400 | DFT-S | QPSK | 13.45 | 17.36 | 13.63 | 17.65 |
| | 400 | DFT-S | 16QAM | 13.52 | 15.73 | 13.63 | 17.22 |
| | 400 | DFT-S | 64QAM | 14.64 | 15.72 | 14.74 | 14.75 |
| | 400 | CP | QPSK | 13.31 | 15.43 | 14.18 | 15.98 |
| | 400 | CP | 16QAM | 13.89 | 13.59 | 14.16 | 14.17 |
| | 400 | CP | 64QAM | 10.77 | 11.07 | 11.32 | 11.53 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 2 AG0 (Beam ID: 45) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 17.61 | 18.15 | 19.9 | 20.15 |
| | 50 | DFT-S | 16QAM | 15.65 | 16.38 | 17.87 | 18.01 |
| | 50 | DFT-S | 64QAM | 13.03 | 13.96 | 15.34 | 15.93 |
| | 50 | CP | QPSK | 15.19 | 15.91 | 16.53 | 17.24 |
| | 50 | CP | 16QAM | 14.91 | 15.04 | 16.3 | 16.19 |
| | 50 | CP | 64QAM | 11.36 | 12.06 | 13.46 | 13.75 |
| | 100 | DFT-S | QPSK | 18.83 | 19.01 | 21.02 | 21.23 |
| | 100 | DFT-S | 16QAM | 17.72 | 17.43 | 19.36 | 18.94 |
| | 100 | DFT-S | 64QAM | 15.32 | 15.16 | 16.93 | 16.98 |
| | 100 | CP | QPSK | 16.98 | 16.72 | 18.07 | 17.77 |
| | 100 | CP | 16QAM | 16.23 | 15.68 | 17.35 | 17.04 |
| | 100 | CP | 64QAM | 12.64 | 13.05 | 14.37 | 14.57 |
| | 400 | DFT-S | QPSK | 14.72 | 16.52 | 14.67 | 14.57 |
| | 400 | DFT-S | 16QAM | 14.96 | 15.29 | 14.87 | 15.08 |
| | 400 | DFT-S | 64QAM | 13.45 | 12.87 | 13.13 | 12.84 |
| | 400 | CP | QPSK | 13.57 | 15.25 | 13.55 | 14.92 |
| | 400 | CP | 16QAM | 14.55 | 14.05 | 14.36 | 14.39 |
| | 400 | CP | 64QAM | 11.42 | 11.93 | 11.45 | 11.72 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 2 AG0 (Beam ID: 45) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 16.61 | 17.12 | 18.88 | 19.4 |
| | 50 | DFT-S | 16QAM | 16.07 | 15.47 | 17.69 | 17.08 |
| | 50 | DFT-S | 64QAM | 13.51 | 13.49 | 15.17 | 14.95 |
| | 50 | CP | QPSK | 15.31 | 14.97 | 16.5 | 15.92 |
| | 50 | CP | 16QAM | 14.26 | 14.06 | 15.74 | 14.98 |
| | 50 | CP | 64QAM | 11.72 | 11.2 | 13.61 | 12.69 |
| | 100 | DFT-S | QPSK | 17.3 | 17.65 | 19.77 | 19.75 |
| | 100 | DFT-S | 16QAM | 15.93 | 16.05 | 17.9 | 17.73 |
| | 100 | DFT-S | 64QAM | 13.27 | 13.93 | 15.29 | 15.76 |
| | 100 | CP | QPSK | 14.76 | 15.64 | 16.24 | 16.68 |
| | 100 | CP | 16QAM | 14.71 | 14.39 | 16.25 | 15.71 |
| | 100 | CP | 64QAM | 10.73 | 11.68 | 12.86 | 13.38 |
| | 400 | DFT-S | QPSK | 14.7 | 18.26 | 14.94 | 17.36 |
| | 400 | DFT-S | 16QAM | 15.77 | 16.6 | 16.05 | 16.89 |
| | 400 | DFT-S | 64QAM | 14.46 | 14.64 | 14.51 | 14.82 |
| | 400 | CP | QPSK | 14.06 | 16.23 | 14.18 | 16.32 |
| | 400 | CP | 16QAM | 14.04 | 14.39 | 14.21 | 14.65 |
| | 400 | CP | 64QAM | 11.83 | 11.99 | 11.98 | 12.05 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 2 AG1 (Beam ID: 163) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|--------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 18.61 | 18.82 | 20.73 | 21.1 |
| | 50 | DFT-S | 16QAM | 17.87 | 17.12 | 19.36 | 18.84 |
| | 50 | DFT-S | 64QAM | 15.37 | 15.05 | 17.02 | 16.61 |
| | 50 | CP | QPSK | 16.37 | 16.68 | 17.63 | 17.87 |
| | 50 | CP | 16QAM | 15.76 | 15.67 | 16.93 | 16.59 |
| | 50 | CP | 64QAM | 13.18 | 12.74 | 14.86 | 14.87 |
| | 100 | DFT-S | QPSK | 19.75 | 19.54 | 21.81 | 21.89 |
| | 100 | DFT-S | 16QAM | 18.9 | 17.96 | 20.39 | 19.85 |
| | 100 | DFT-S | 64QAM | 16.59 | 15.84 | 18.03 | 17.58 |
| | 100 | CP | QPSK | 17.49 | 17.23 | 18.7 | 18.67 |
| | 100 | CP | 16QAM | 16.77 | 16.36 | 18.04 | 17.75 |
| | 100 | CP | 64QAM | 14.28 | 13.79 | 15.95 | 15.31 |
| | 400 | DFT-S | QPSK | 13.47 | 18.09 | 13.92 | 17.14 |
| | 400 | DFT-S | 16QAM | 14.49 | 16.43 | 14.69 | 16.62 |
| | 400 | DFT-S | 64QAM | 14.68 | 14.05 | 14.97 | 14.14 |
| | 400 | CP | QPSK | 14.21 | 15.87 | 14.43 | 15.8 |
| | 400 | CP | 16QAM | 13.79 | 14.14 | 14.02 | 14.36 |
| | 400 | CP | 64QAM | 11.83 | 11.66 | 12.03 | 11.74 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 2 AG1 (Beam ID: 163) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 18.29 | 18.43 | 20.49 | 20.57 |
| | 50 | DFT-S | 16QAM | 17.2 | 16.73 | 19 | 18.42 |
| | 50 | DFT-S | 64QAM | 14.56 | 14.73 | 16.41 | 16.31 |
| | 50 | CP | QPSK | 16.06 | 16.36 | 17.38 | 17.03 |
| | 50 | CP | 16QAM | 14.17 | 15.45 | 15.89 | 16.57 |
| | 50 | CP | 64QAM | 13.35 | 12.4 | 15.36 | 14.16 |
| | 100 | DFT-S | QPSK | 17.92 | 18.16 | 20.01 | 20.29 |
| | 100 | DFT-S | 16QAM | 17.19 | 16.56 | 18.87 | 18.11 |
| | 100 | DFT-S | 64QAM | 14.56 | 14.39 | 16.1 | 16 |
| | 100 | CP | QPSK | 15.61 | 16.13 | 16.64 | 17.06 |
| | 100 | CP | 16QAM | 14.27 | 14.8 | 15.42 | 16.01 |
| | 100 | CP | 64QAM | 12.76 | 12.29 | 14.38 | 13.61 |
| | 400 | DFT-S | QPSK | 14.85 | 16.68 | 14.95 | 16.64 |
| | 400 | DFT-S | 16QAM | 14.69 | 15.24 | 14.72 | 15.24 |
| | 400 | DFT-S | 64QAM | 12.91 | 13.03 | 13.1 | 13.34 |
| | 400 | CP | QPSK | 13.86 | 15.21 | 13.96 | 14.87 |
| | 400 | CP | 16QAM | 13.59 | 13.86 | 13.79 | 13.9 |
| | 400 | CP | 64QAM | 11.43 | 11.98 | 11.51 | 11.69 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.



| NR Band n261 Module 2 AG1 (Beam ID: 163) | | | | | | | |
|--|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 18.35 | 18.23 | 20.49 | 20.46 |
| | 50 | DFT-S | 16QAM | 16.53 | 16.58 | 18.55 | 18.59 |
| | 50 | DFT-S | 64QAM | 13.88 | 14.61 | 15.69 | 16.31 |
| | 50 | CP | QPSK | 16.23 | 16.18 | 17.37 | 17.35 |
| | 50 | CP | 16QAM | 15.18 | 15.12 | 16.36 | 16.65 |
| | 50 | CP | 64QAM | 12.32 | 12.4 | 14.13 | 13.91 |
| | 100 | DFT-S | QPSK | 18.24 | 18.63 | 20.34 | 20.5 |
| | 100 | DFT-S | 16QAM | 17.07 | 17.11 | 18.62 | 18.43 |
| | 100 | DFT-S | 64QAM | 14.26 | 15.01 | 15.77 | 16.36 |
| | 100 | CP | QPSK | 16.35 | 16.69 | 17.66 | 17.33 |
| | 100 | CP | 16QAM | 15.34 | 15.44 | 16.13 | 16.23 |
| | 100 | CP | 64QAM | 12.26 | 12.9 | 13.99 | 13.96 |
| | 400 | DFT-S | QPSK | 14.98 | 18.28 | 15.16 | 17.39 |
| | 400 | DFT-S | 16QAM | 14.66 | 16.78 | 14.86 | 16.83 |
| | 400 | DFT-S | 64QAM | 14.47 | 14.8 | 14.85 | 15.07 |
| | 400 | CP | QPSK | 14.59 | 16.49 | 14.92 | 16.43 |
| | 400 | CP | 16QAM | 14.38 | 14.72 | 14.7 | 14.99 |
| | 400 | CP | 64QAM | 11.82 | 12.3 | 11.92 | 12.24 |

Note :The 400MHz BW is carrier aggregation by 4CC of 100MHz.




| NR Band n261 Module 2 AG0+1 (Beam ID: 34+162) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | QPSK | 17.17 | 17.31 | 19.64 | 19.42 |
| | 50 | DFT-S | 16QAM | 15.73 | 15.49 | 17.6 | 17.13 |
| | 50 | DFT-S | 64QAM | 13.24 | 13.43 | 15.27 | 15.09 |
| | 50 | CP | QPSK | 14.66 | 14.56 | 15.97 | 16.02 |
| | 50 | CP | 16QAM | 12.77 | 13.53 | 14.34 | 15.06 |
| | 50 | CP | 64QAM | 11.64 | 10.82 | 13.45 | 12.54 |
| | 100 | DFT-S | QPSK | 16.95 | 16.91 | 16.97 | 19.25 |
| | 100 | DFT-S | 16QAM | 16.91 | 15.32 | 17.04 | 17.23 |
| | 100 | DFT-S | 64QAM | 13.41 | 13.18 | 15.21 | 14.74 |
| | 100 | CP | QPSK | 14.52 | 14.56 | 15.77 | 16.37 |
| | 100 | CP | 16QAM | 13.21 | 13.59 | 15.51 | 15.2 |
| | 100 | CP | 64QAM | 11.68 | 10.95 | 13.96 | 12.98 |

| NR Band n261 Module 2 AG0+1 (Beam ID: 34+162) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | QPSK | 17.01 | 17 | 19.3 | 19.41 |
| | 50 | DFT-S | 16QAM | 15.23 | 15.16 | 17.23 | 17 |
| | 50 | DFT-S | 64QAM | 12.89 | 13.16 | 14.82 | 15.34 |
| | 50 | CP | QPSK | 13.54 | 15.05 | 14.91 | 15.9 |
| | 50 | CP | 16QAM | 13.71 | 13.81 | 15.16 | 15.27 |
| | 50 | CP | 64QAM | 11.14 | 11.07 | 12.88 | 12.79 |
| | 100 | DFT-S | QPSK | 18.17 | 18.08 | 20.46 | 20.39 |
| | 100 | DFT-S | 16QAM | 16.38 | 16.43 | 18.39 | 18.44 |
| | 100 | DFT-S | 64QAM | 14.03 | 14.13 | 15.86 | 16.13 |
| | 100 | CP | QPSK | 14.57 | 15.77 | 15.79 | 17.02 |
| | 100 | CP | 16QAM | 14.82 | 14.62 | 16.1 | 16.34 |
| | 100 | CP | 64QAM | 12.04 | 11.91 | 13.97 | 13.73 |



| NR Band n261 Module 2 AG0+1 (Beam ID: 34+162) | | | | | | | |
|---|----------|----------|------------|-----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | | | |
| | BW [MHz] | Waveform | Modulation | Outer 1RB | Outer Full | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | QPSK | 16.49 | 16.52 | 18.56 | 18.66 |
| | 50 | DFT-S | 16QAM | 14.97 | 14.84 | 16.77 | 16.53 |
| | 50 | DFT-S | 64QAM | 12.44 | 12.78 | 14.16 | 14.31 |
| | 50 | CP | QPSK | 14.3 | 13.56 | 15.59 | 15.1 |
| | 50 | CP | 16QAM | 12.76 | 12.44 | 14.05 | 13.66 |
| | 50 | CP | 64QAM | 9.92 | 9.96 | 11.81 | 11.35 |
| | 100 | DFT-S | QPSK | 17.14 | 17.58 | 19.88 | 19.98 |
| | 100 | DFT-S | 16QAM | 15.71 | 16.07 | 17.94 | 17.98 |
| | 100 | DFT-S | 64QAM | 13.1 | 13.78 | 15.39 | 15.69 |
| | 100 | CP | QPSK | 15.11 | 14.83 | 16.8 | 16.09 |
| | 100 | CP | 16QAM | 13.33 | 13.65 | 15.19 | 14.93 |
| | 100 | CP | 64QAM | 10.46 | 10.84 | 12.95 | 13 |

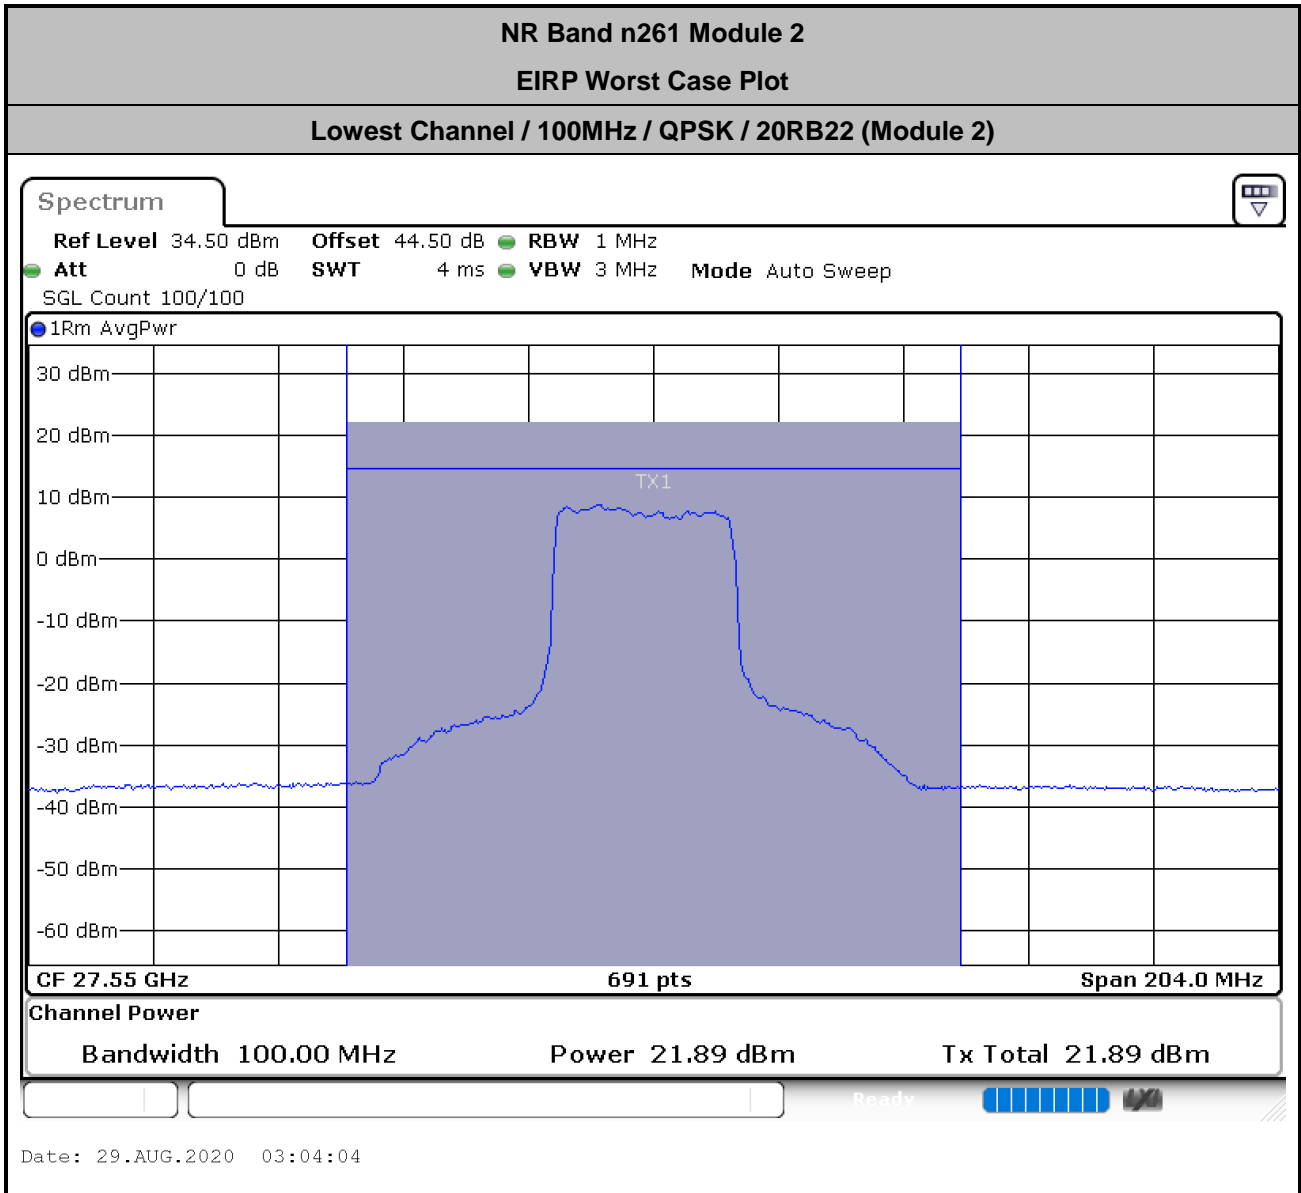

$$\begin{aligned}
 \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\
 &= 40.5 + 1.8 + 107 + 20\log(1) - 104.8 \\
 &= 44.5 \text{ (dB)}
 \end{aligned}$$



NR Band n260 Module 0 AG0

Occupied Bandwidth

| Mode | DFT-s-OFDM Module 0 NR Band n260 : 99%OBW(MHz) | | | | | | | | |
|------------|--|-------|-------|--------|-------|-------|--------|--------|--------|
| BW | 50MHz | | | 100MHz | | | 400MHz | | |
| Mod. | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| Lowest CH | 45.62 | - | - | 91.01 | - | - | 388.69 | - | - |
| Middle CH | 45.50 | 45.49 | 45.11 | 90.91 | 90.75 | 90.51 | 388.58 | 387.66 | 385.17 |
| Highest CH | 45.59 | - | - | 91.00 | - | - | 387.71 | - | - |


| Mode | CP-OFDM Module 0 NR Band n260 : 99%OBW(MHz) | | | | | | | | |
|------------|---|-------|-------|--------|-------|-------|--------|--------|--------|
| BW | 50MHz | | | 100MHz | | | 400MHz | | |
| od. | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| Lowest CH | 45.26 | - | - | 93.41 | - | - | 389.14 | - | - |
| Middle CH | 45.29 | 45.26 | 45.21 | 92.92 | 92.78 | 92.79 | 389.34 | 384.55 | 387.37 |
| Highest CH | 45.34 | - | - | 93.38 | - | - | 389.57 | - | - |




DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / QPSK

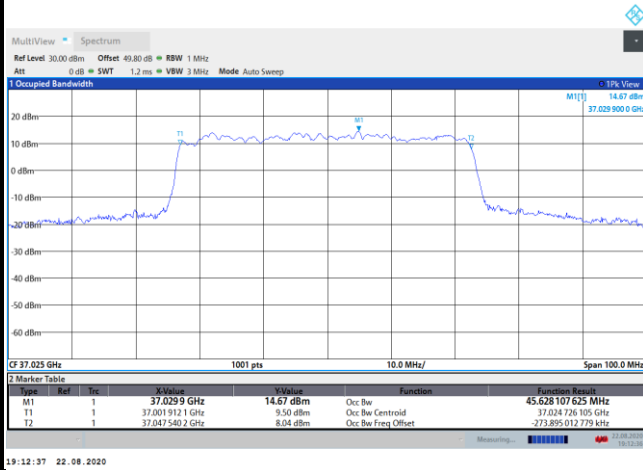


Middle Channel / 50MHz / QPSK

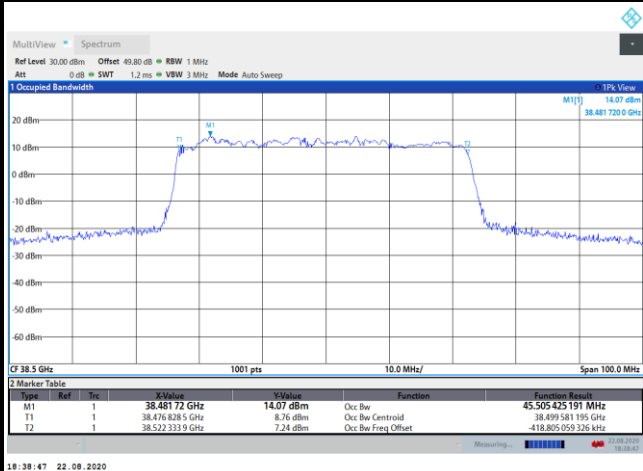

Middle Channel / 50MHz / 16QAM

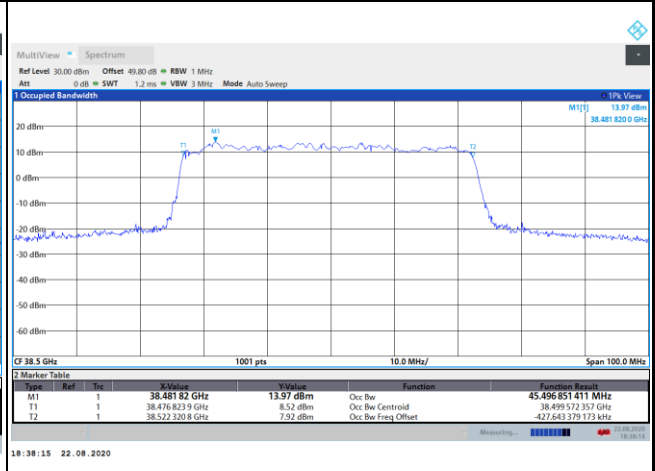


Highest Channel / 50MHz / QPSK

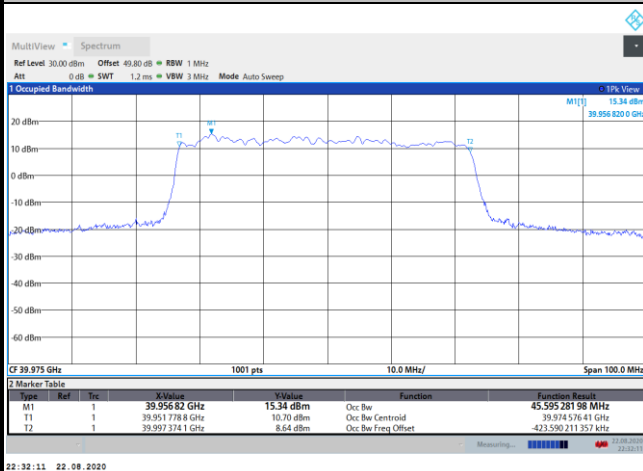



DFT-s-OFDM Module 0

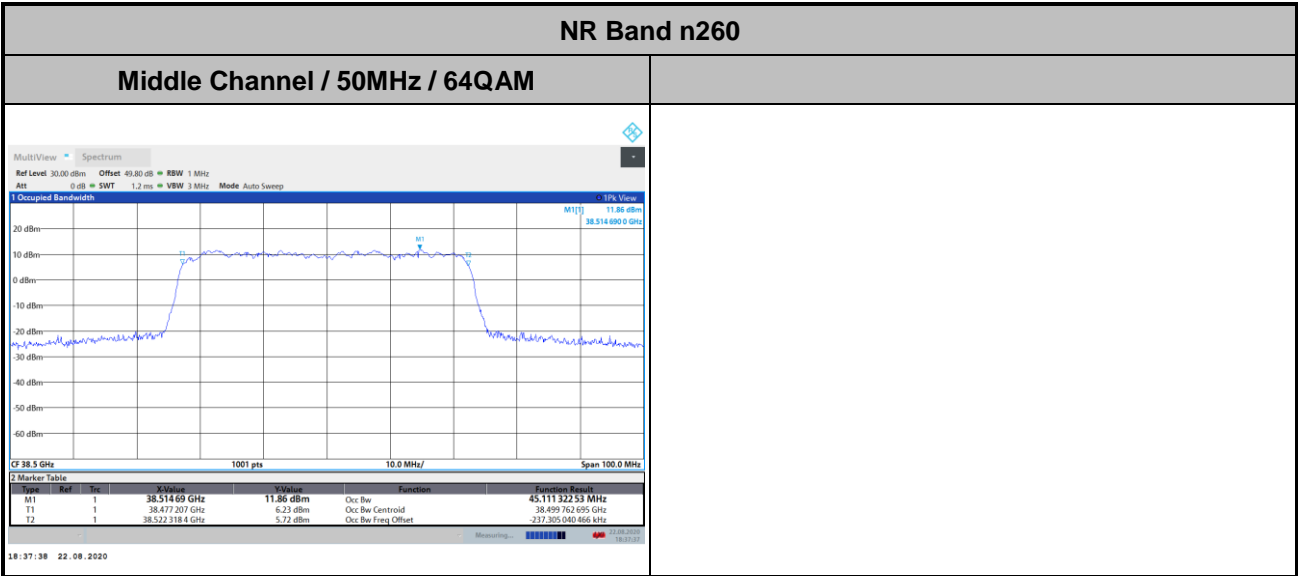





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / QPSK

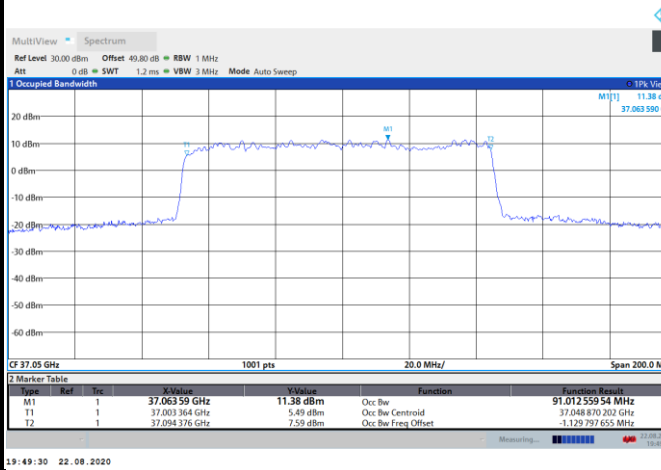


Middle Channel / 100MHz / QPSK

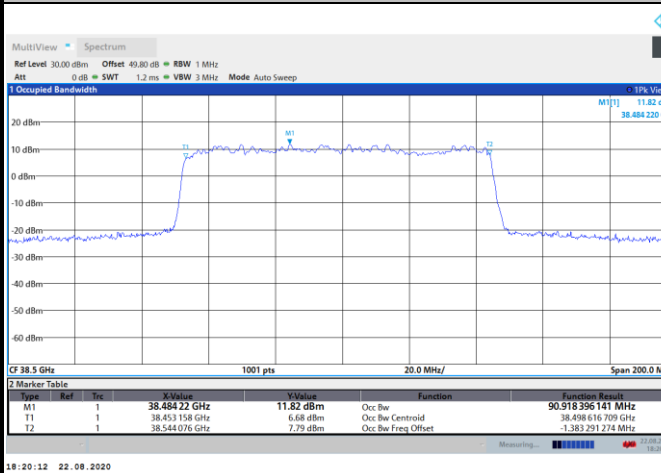

Middle Channel / 100MHz / 16QAM

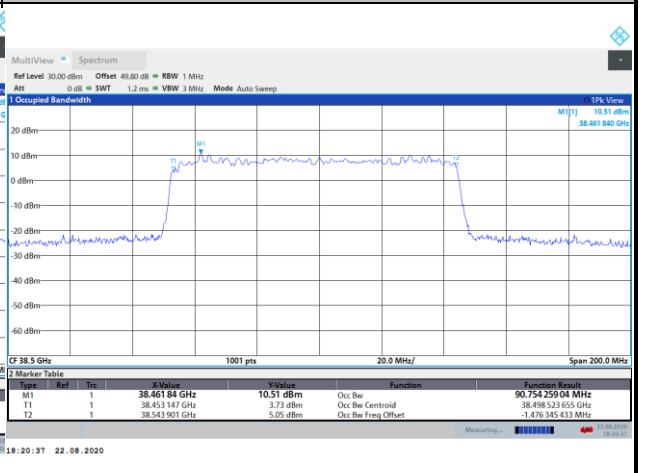


Highest Channel / 100MHz / QPSK

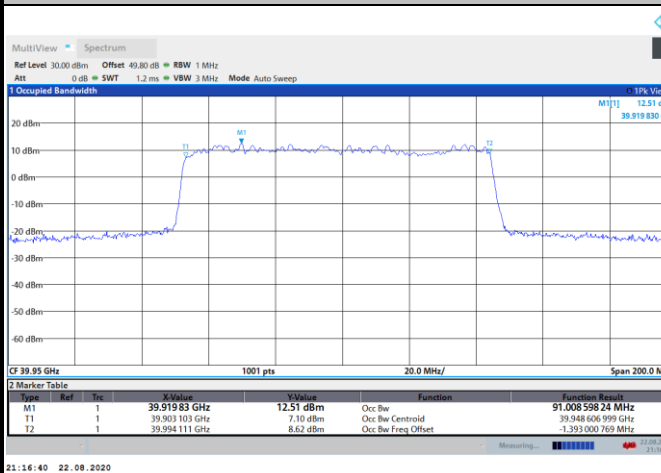



DFT-s-OFDM Module 0

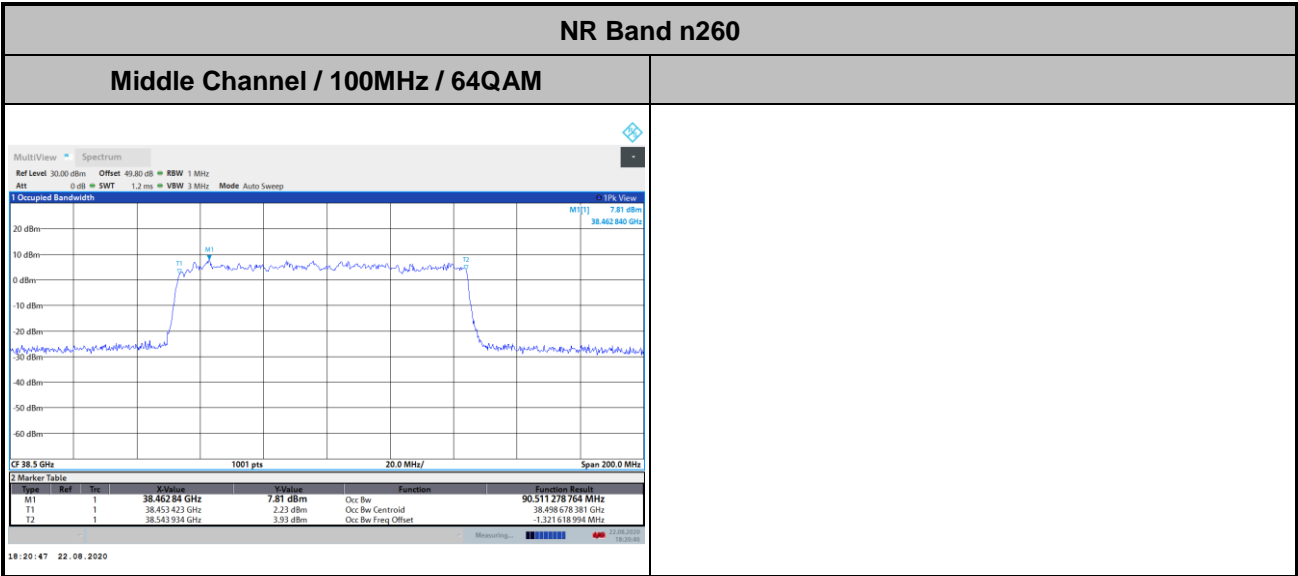





DFT-s-OFDM Module 0

NR Band n260

Lowest Channel / 400MHz / QPSK

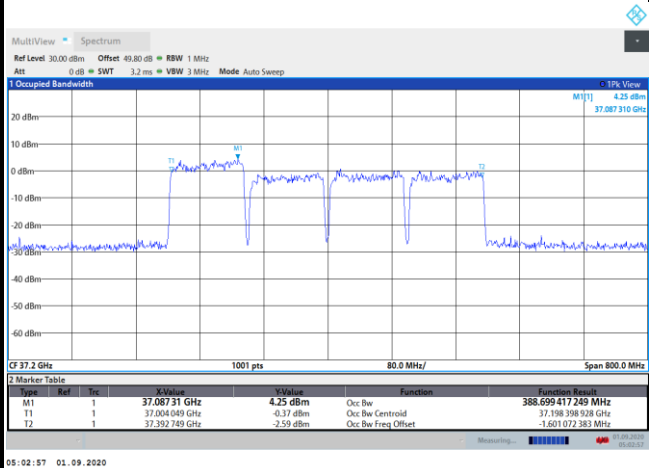


Middle Channel / 400MHz / QPSK

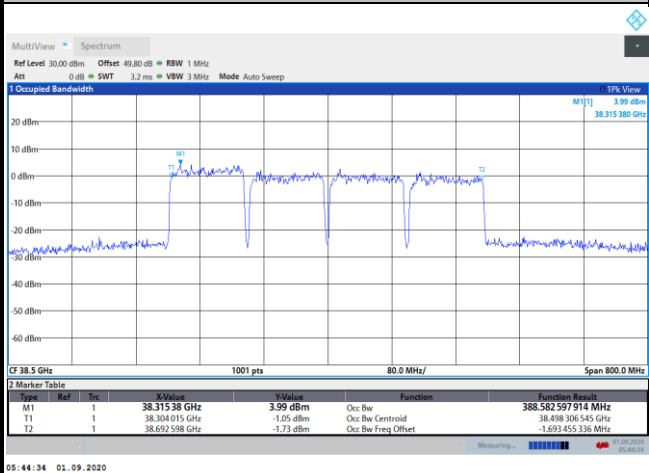

Middle Channel / 400MHz / 16QAM




Highest Channel / 400MHz / QPSK

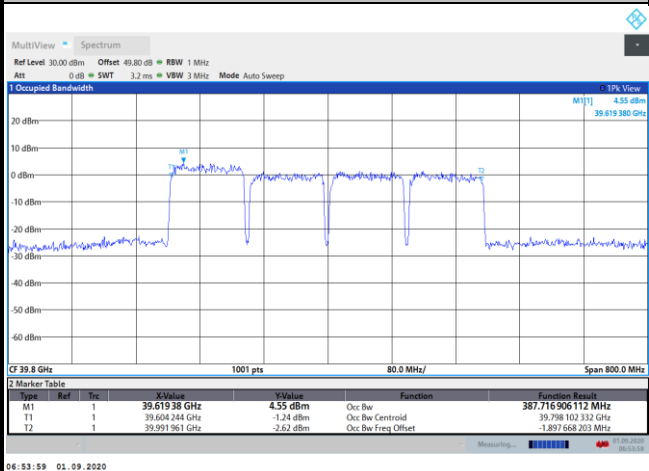



DFT-s-OFDM Module 0

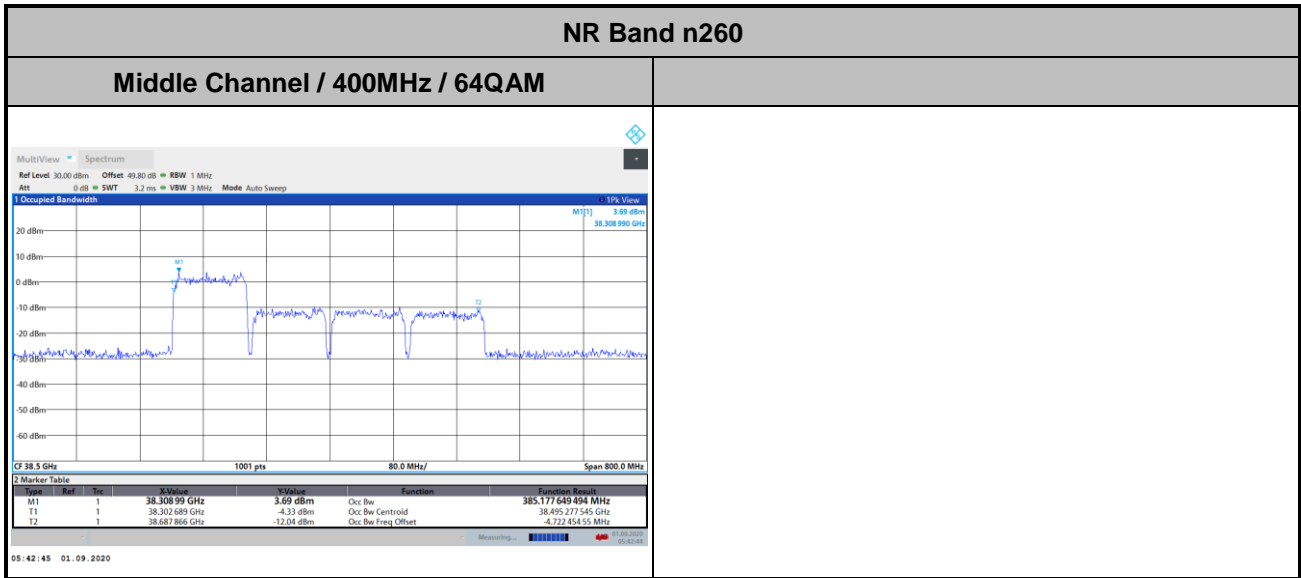





CP-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / QPSK

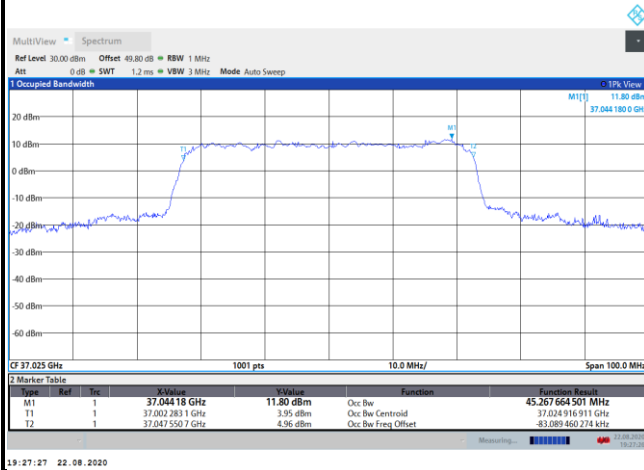


Middle Channel / 50MHz / QPSK

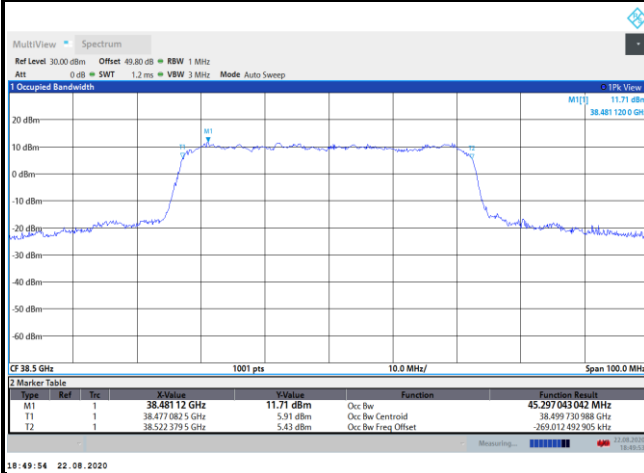

Middle Channel / 50MHz / 16QAM

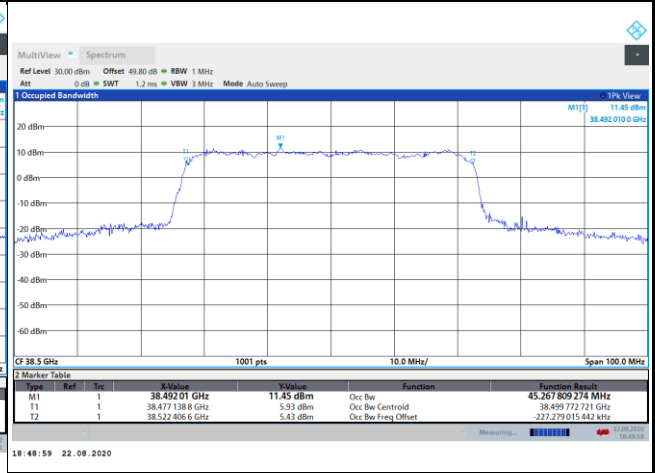


Highest Channel / 50MHz / QPSK

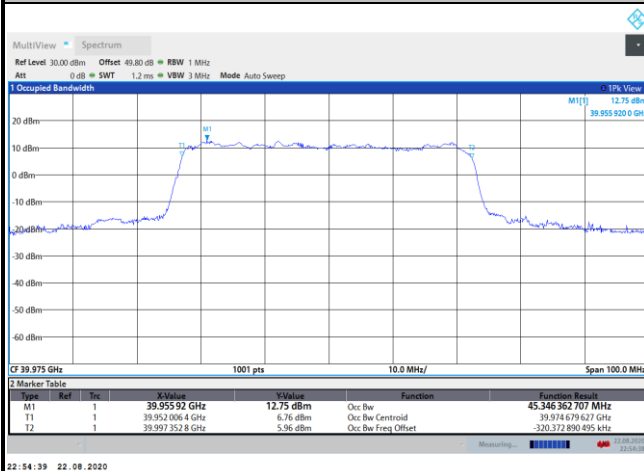



CP-OFDM Module 0

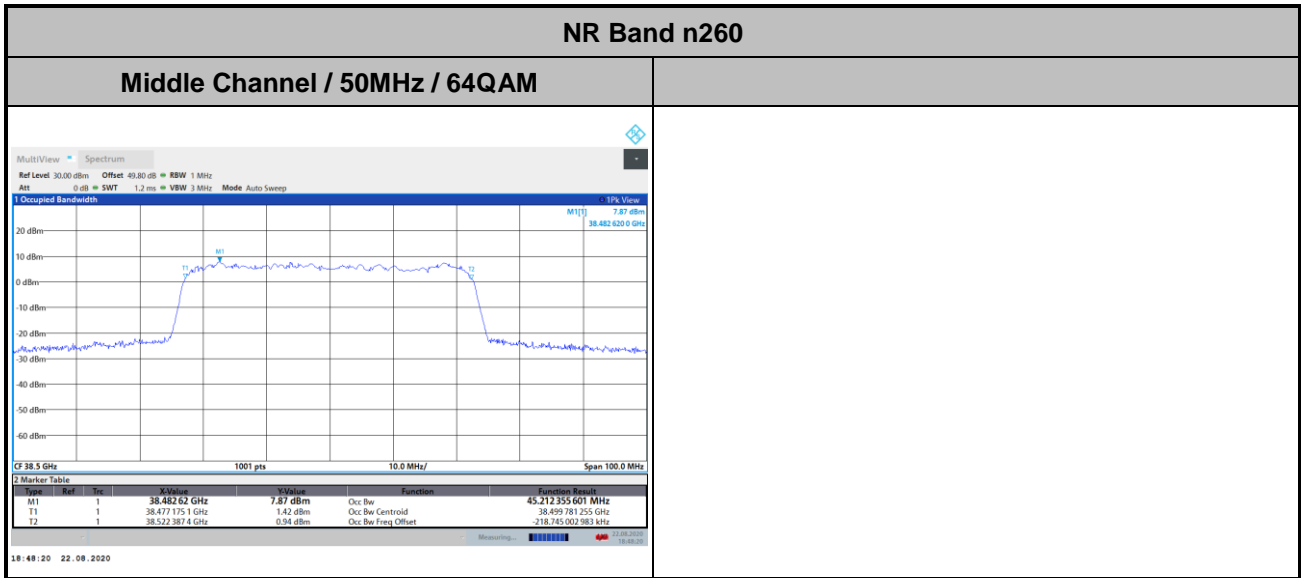





CP-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / QPSK

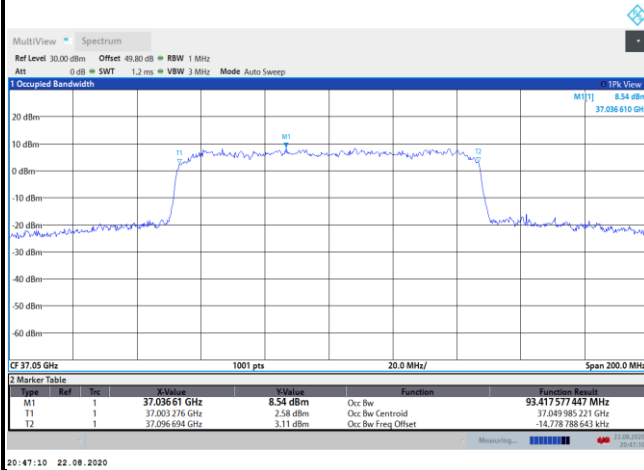


Middle Channel / 100MHz / QPSK

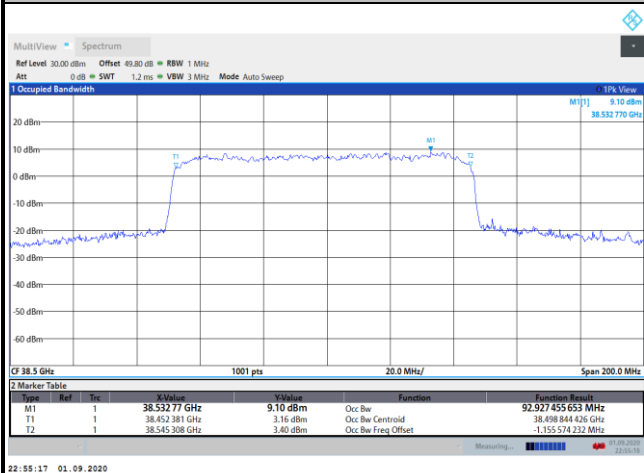

Middle Channel / 100MHz / 16QAM

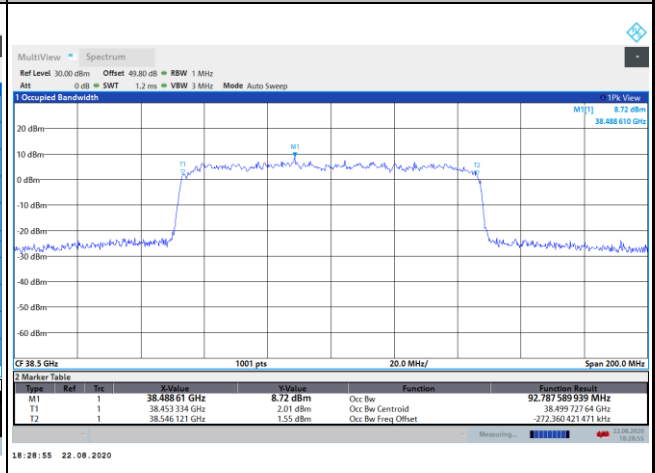


Highest Channel / 50MHz / QPSK

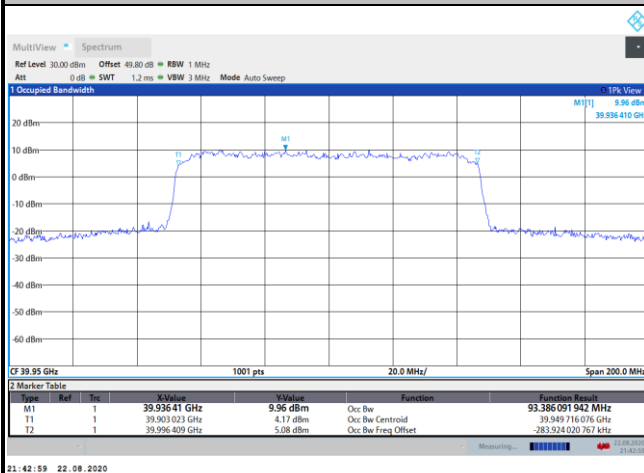



CP-OFDM Module 0

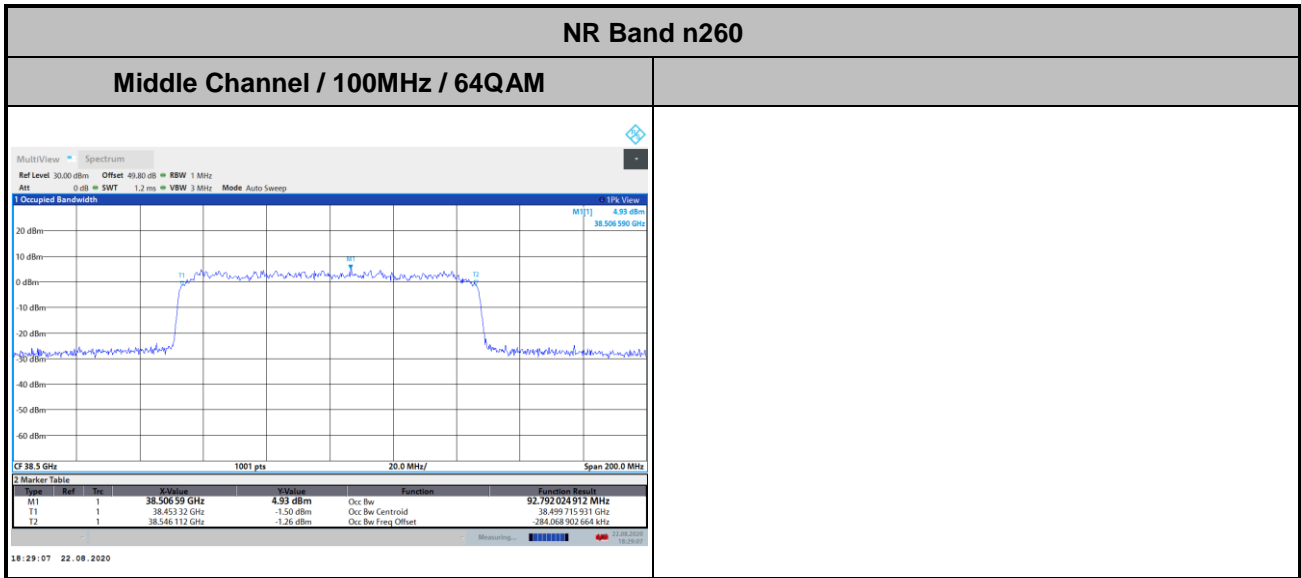





CP-OFDM Module 0

NR Band n260


Lowest Channel / 400MHz / QPSK

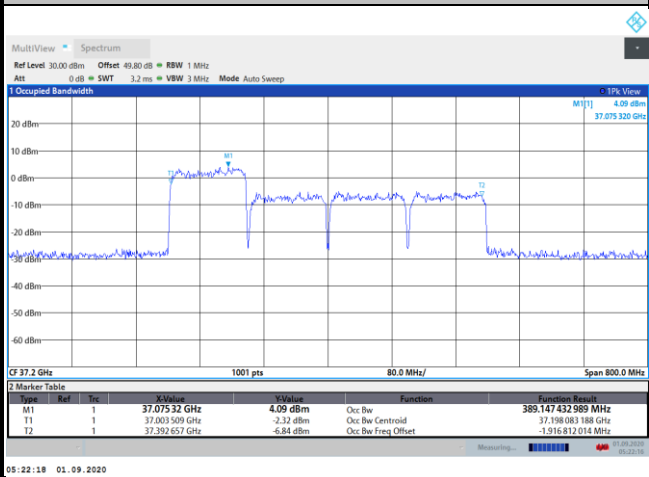


Middle Channel / 400MHz / QPSK

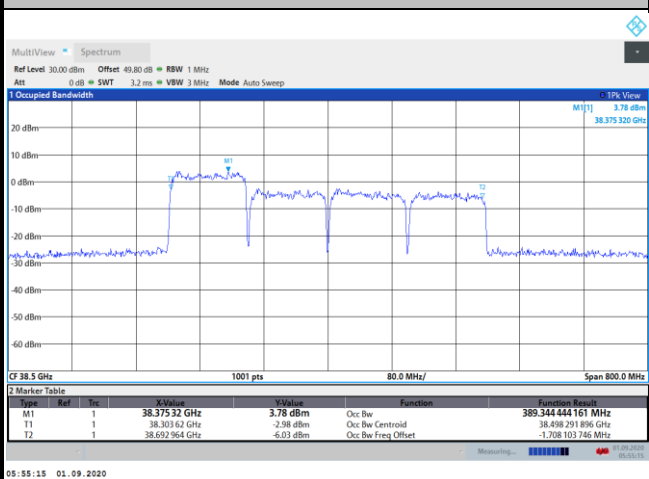

Middle Channel / 400MHz / 16QAM

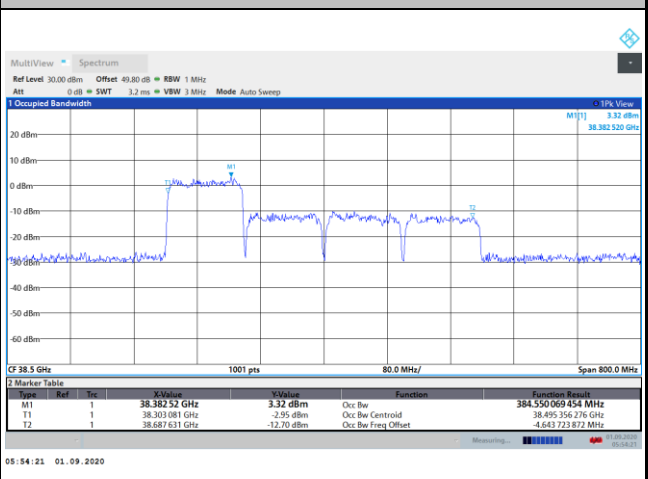


Highest Channel / 400MHz / QPSK

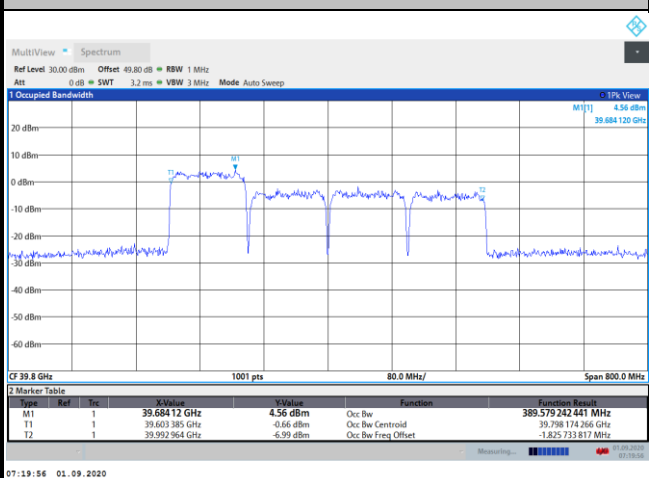



CP-OFDM Module 0

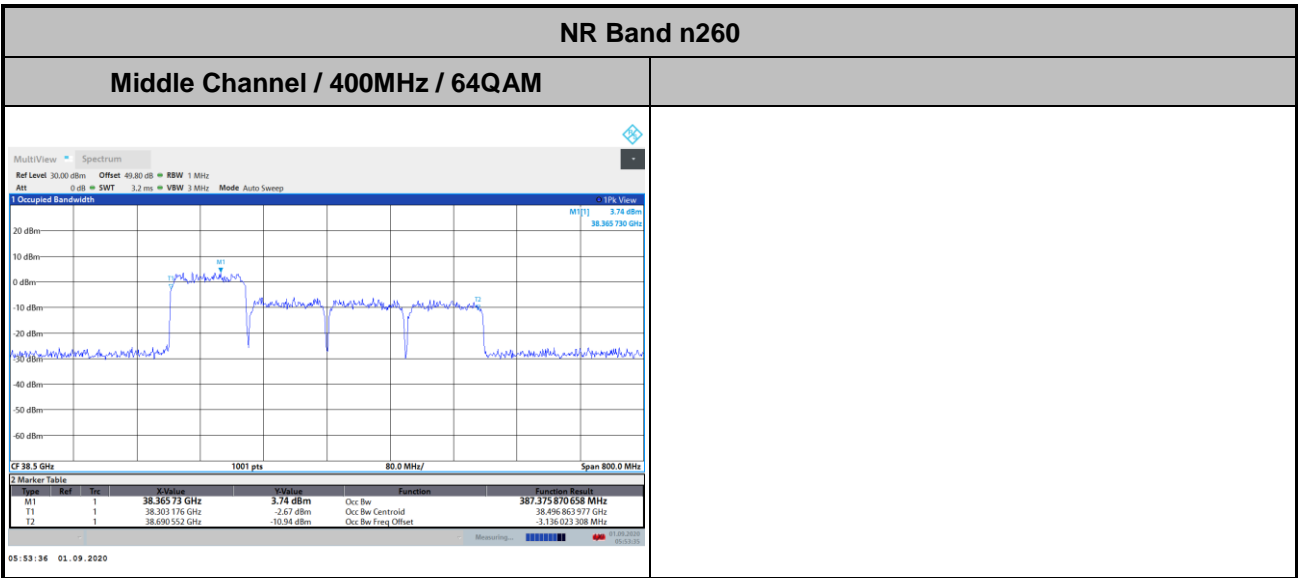



Radiated Out of Band Emissions

| Mode | | | DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB | | |
|-------------|---------|-------|--|--------|--------|
| BW | | | 50MHz | 100MHz | 400MHz |
| Limit (dBm) | | | QPSK | QPSK | QPSK |
| Low CH | 0~10%OB | ≤ -5 | -13.17 | -14.18 | -19.85 |
| | >10%OB | ≤ -13 | -29.04 | -32.69 | -35.93 |
| High CH | 0~10%OB | ≤ -5 | -14.68 | -14.86 | -34.47 |
| | >10%OB | ≤ -13 | -27.12 | -30.63 | -33.24 |
| Result | | | Compliance | | |


| Mode | | | CP-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB | | |
|-------------|---------|-------|---|--------|--------|
| BW | | | 50MHz | 100MHz | 400MHz |
| Limit (dBm) | | | QPSK | QPSK | QPSK |
| Low CH | 0~10%OB | ≤ -5 | -14.88 | -16.52 | -22.37 |
| | >10%OB | ≤ -13 | -31.38 | -34.03 | -32.76 |
| High CH | 0~10%OB | ≤ -5 | -17.55 | -18.63 | -34.58 |
| | >10%OB | ≤ -13 | -28.88 | -32.46 | -33.84 |
| Result | | | Compliance | | |

| Mode | | | DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) Full RB | | |
|-------------|---------|-------|---|--------|--------|
| BW | | | 50MHz | 100MHz | 400MHz |
| Limit (dBm) | | | QPSK | QPSK | QPSK |
| Low CH | 0~10%OB | ≤ -5 | -23.03 | -26.54 | -34.77 |
| | >10%OB | ≤ -13 | -24.78 | -28.56 | -35.58 |
| High CH | 0~10%OB | ≤ -5 | -25.76 | -29.89 | -33 |
| | >10%OB | ≤ -13 | -27.97 | -30.74 | -32.7 |
| Result | | | Compliance | | |


| Mode | | | CP-OFDM Module 0 NR Band n260 : BE (dBm) Full RB | | |
|-------------|---------|-------|--|--------|--------|
| BW | | | 50MHz | 100MHz | 400MHz |
| Limit (dBm) | | | QPSK | QPSK | QPSK |
| Low CH | 0~10%OB | ≤ -5 | -24.68 | -27.94 | -34.24 |
| | >10%OB | ≤ -13 | -27.47 | -29.53 | -35.93 |
| High CH | 0~10%OB | ≤ -5 | -26.19 | -28.72 | -34.17 |
| | >10%OB | ≤ -13 | -28.63 | -30.28 | -33.76 |
| Result | | | Compliance | | |



DFT-s-OFDM Module 0

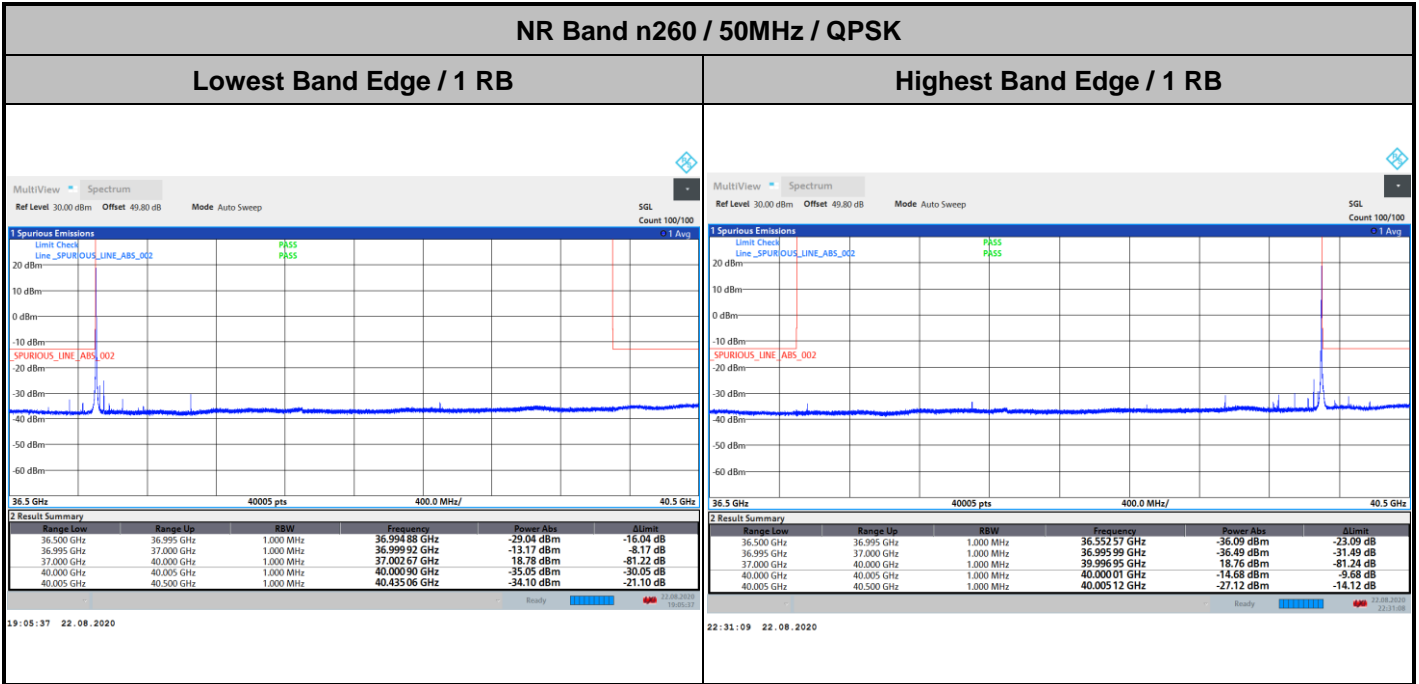


DFT-s-OFDM Module 0

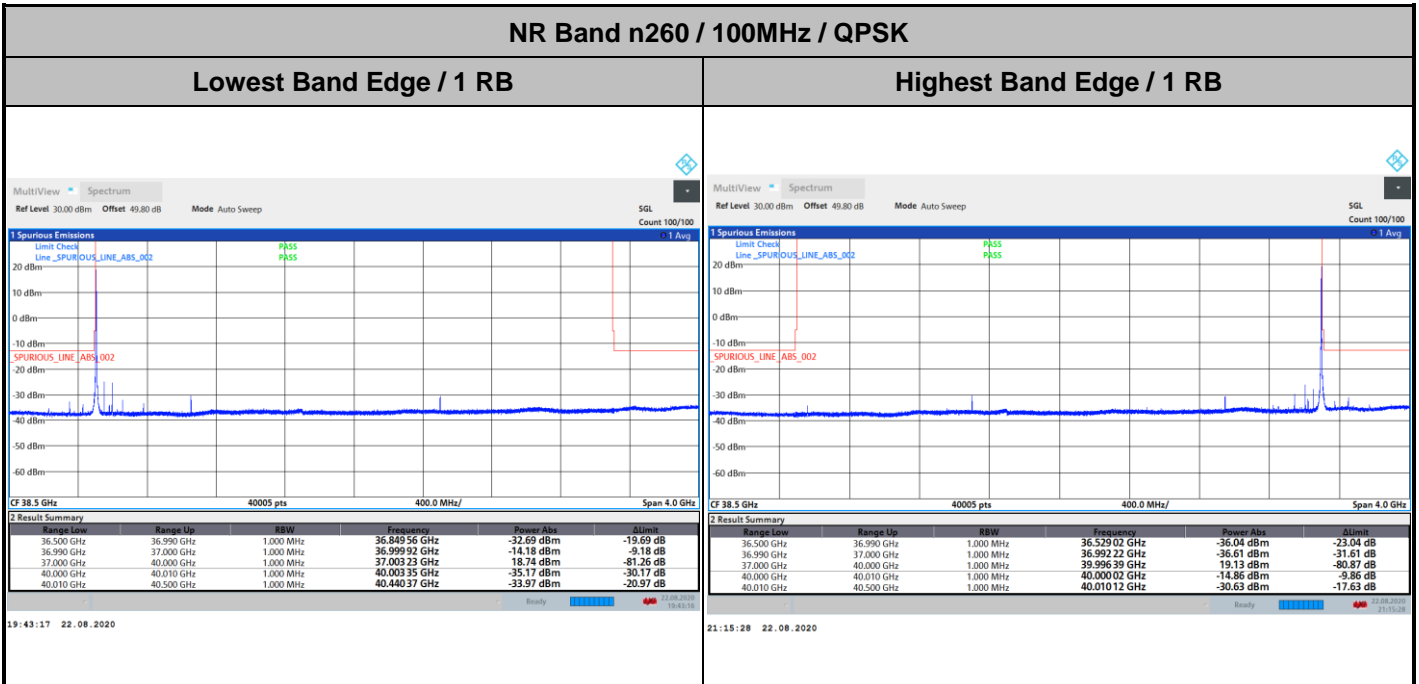




DFT-s-OFDM Module 0

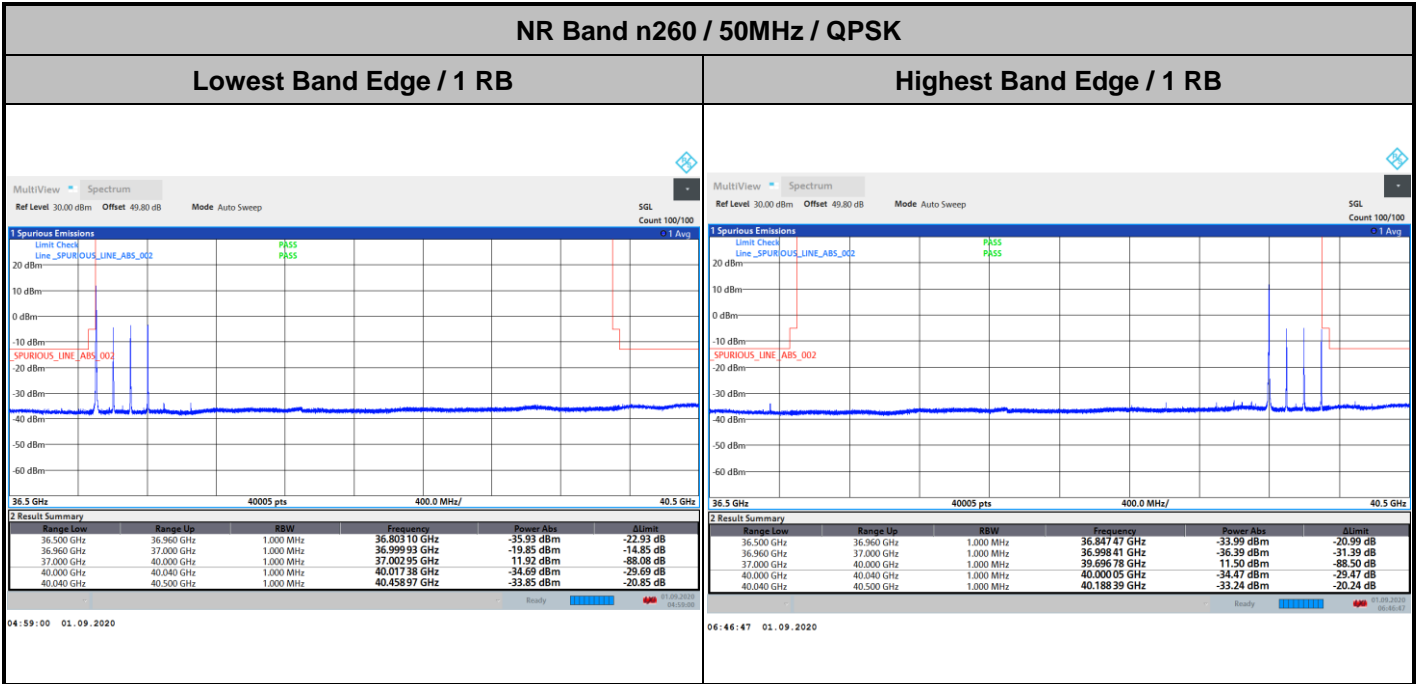


CP-OFDM Module 0

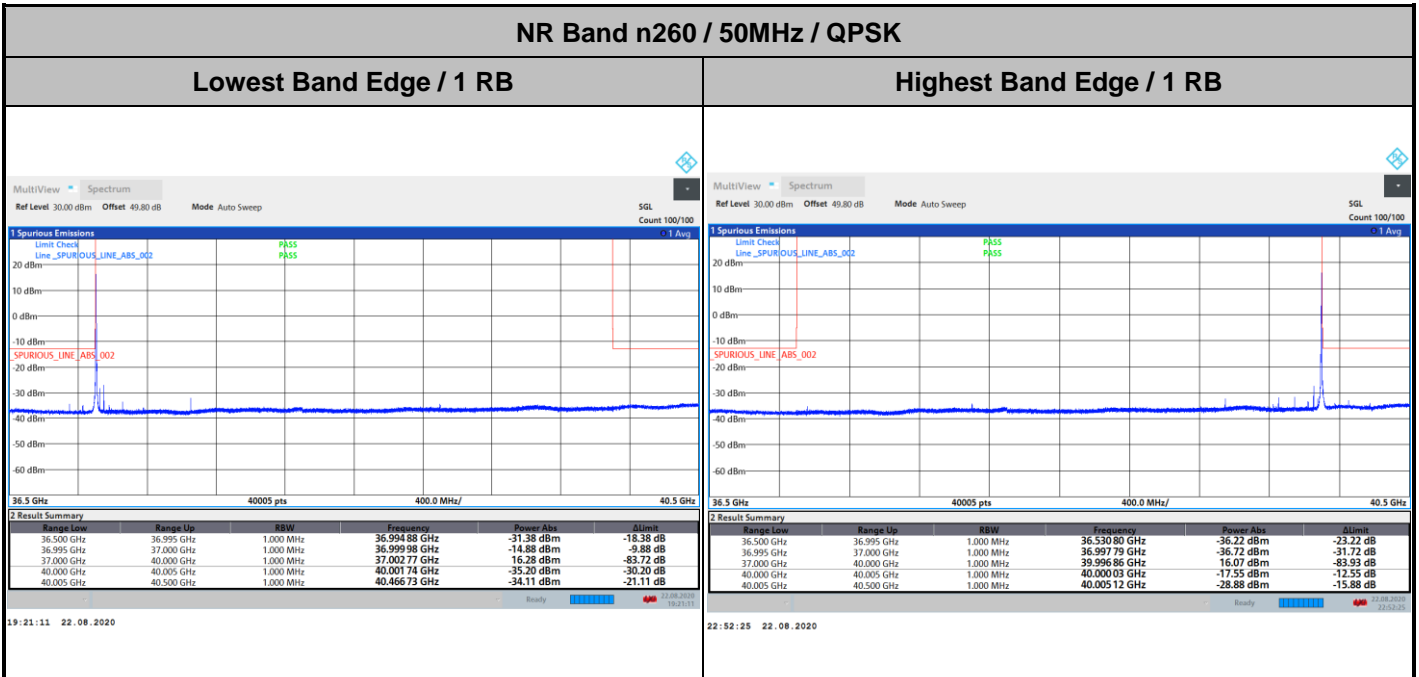




CP-OFDM Module 0

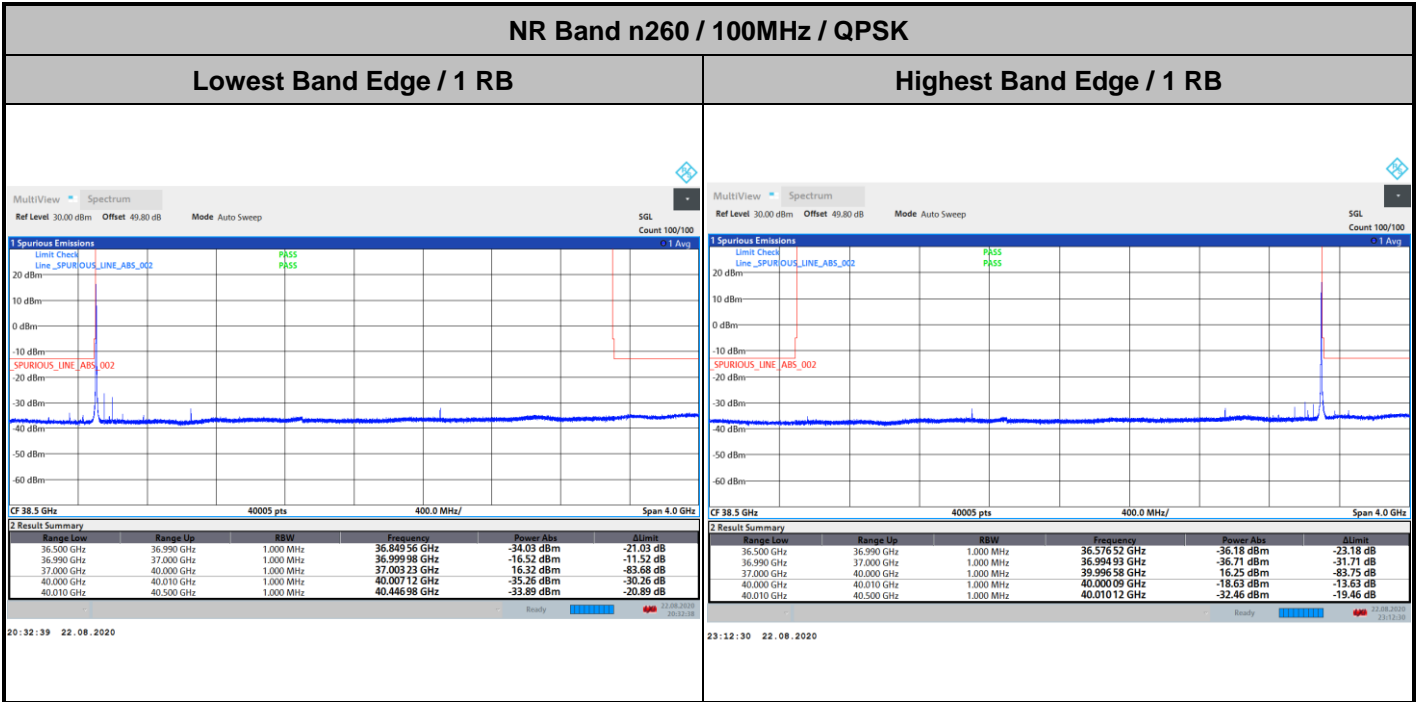


CP-OFDM Module 0

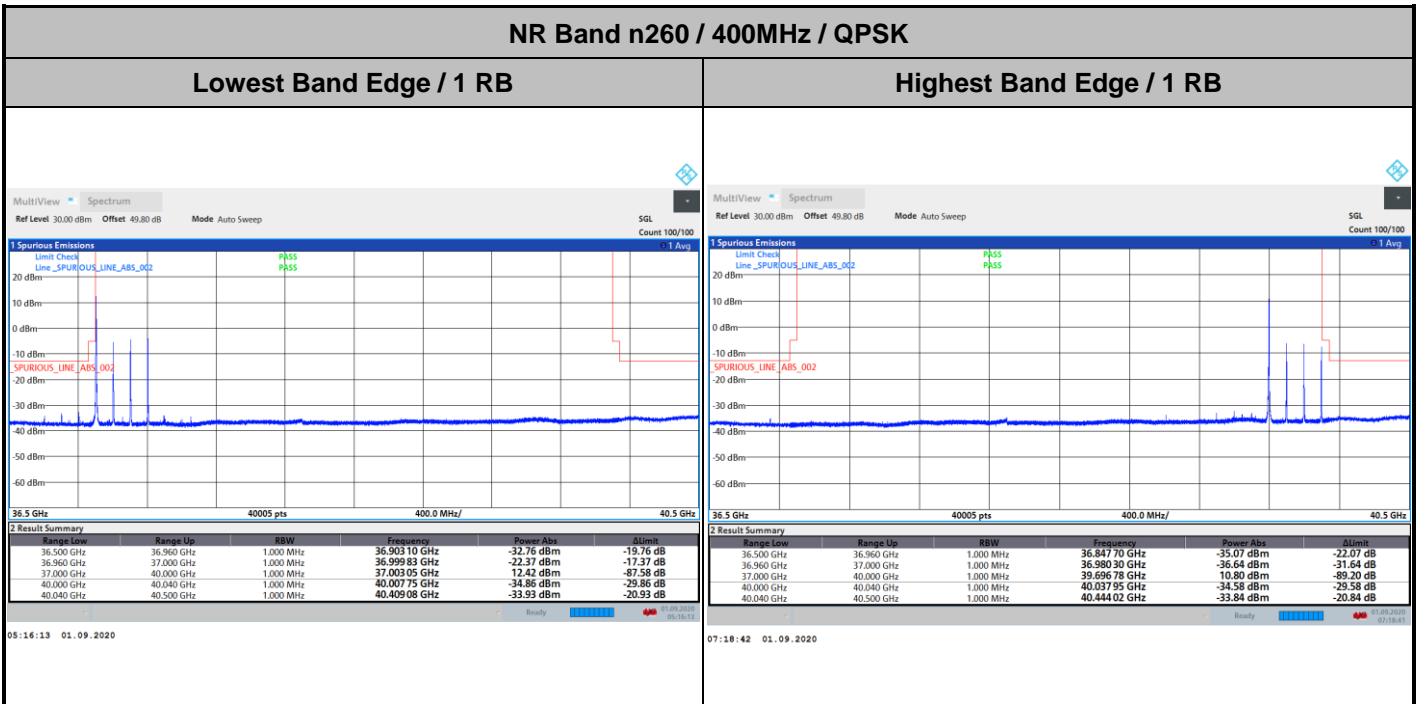




DFT-s-OFDM Module 0

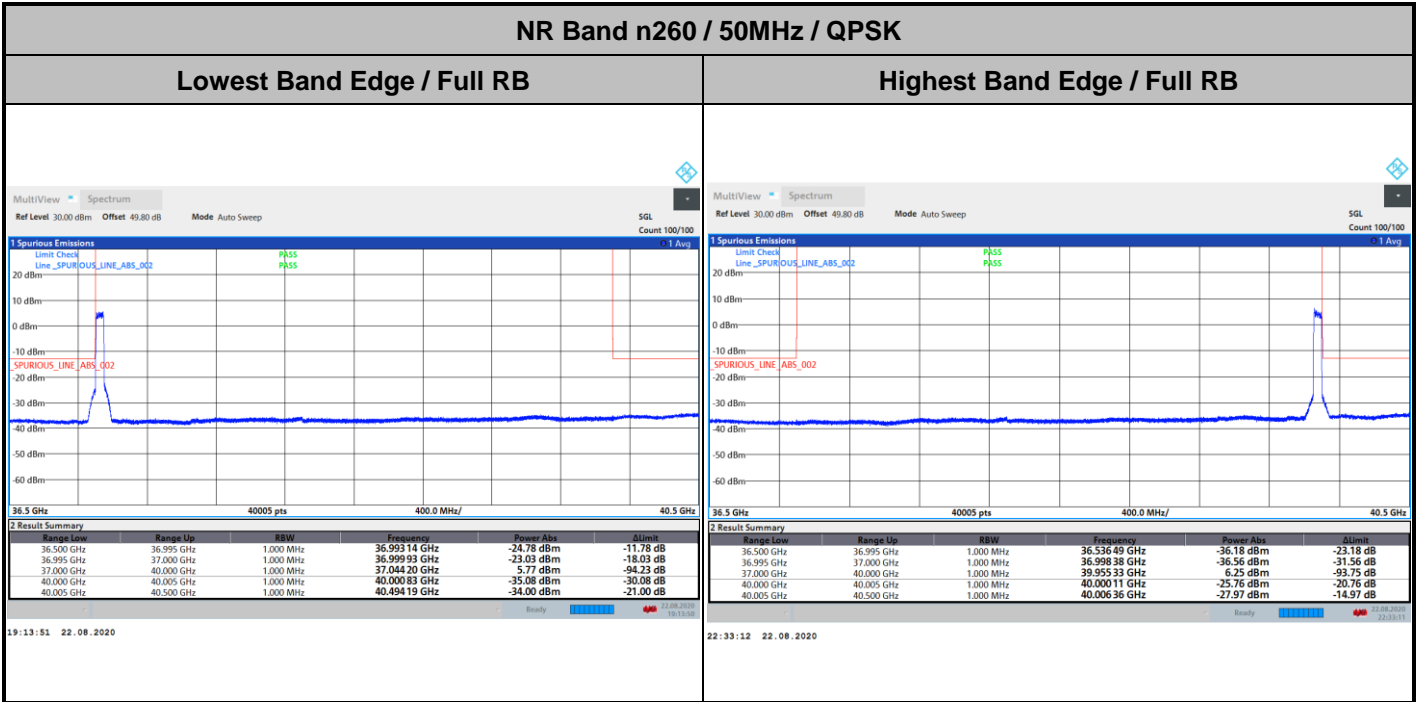


DFT-s-OFDM Module 0

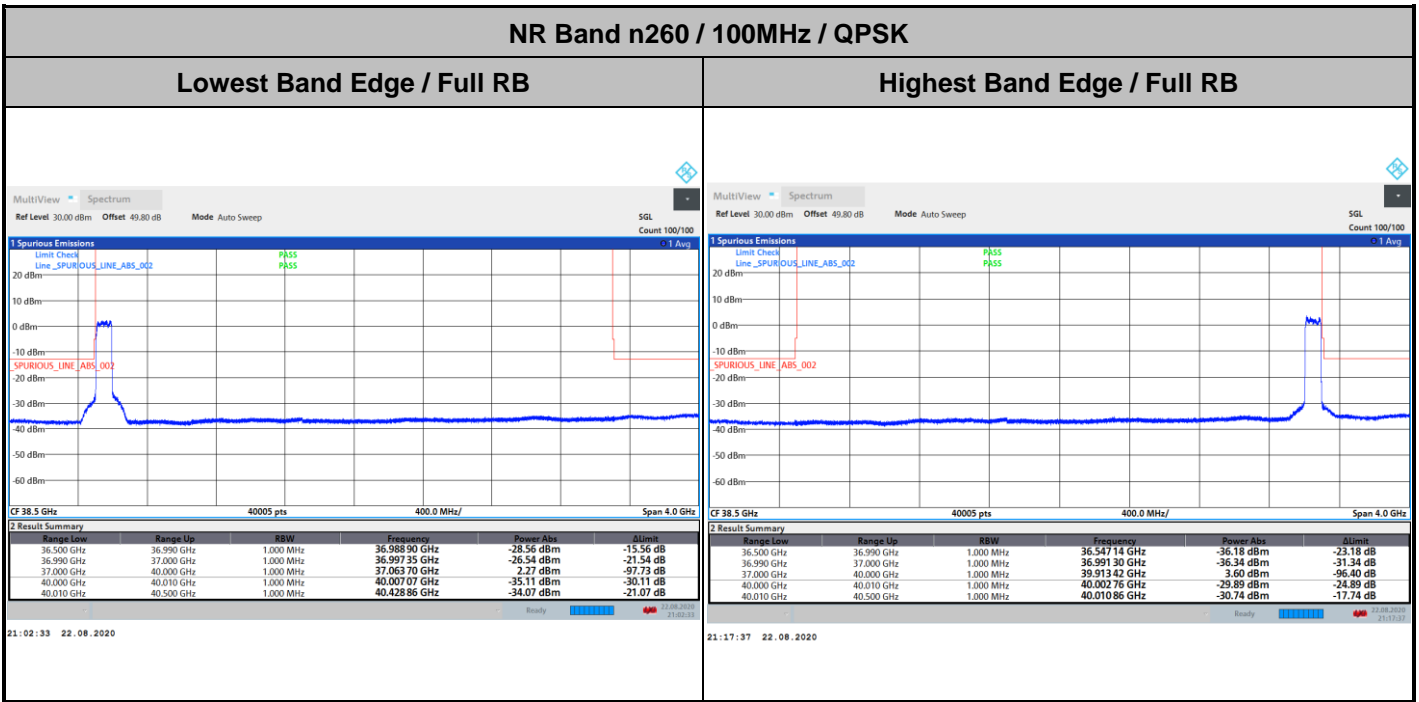




DFT-s-OFDM Module 0

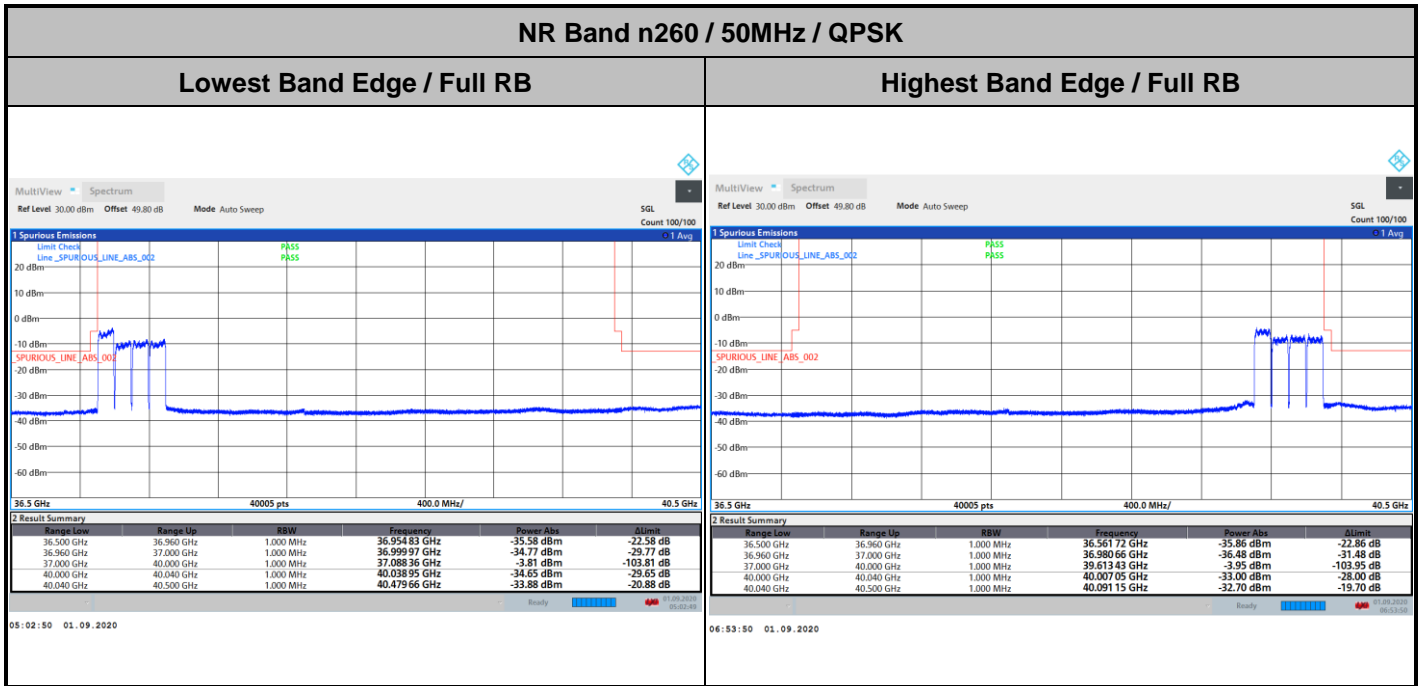


CP-OFDM Module 0

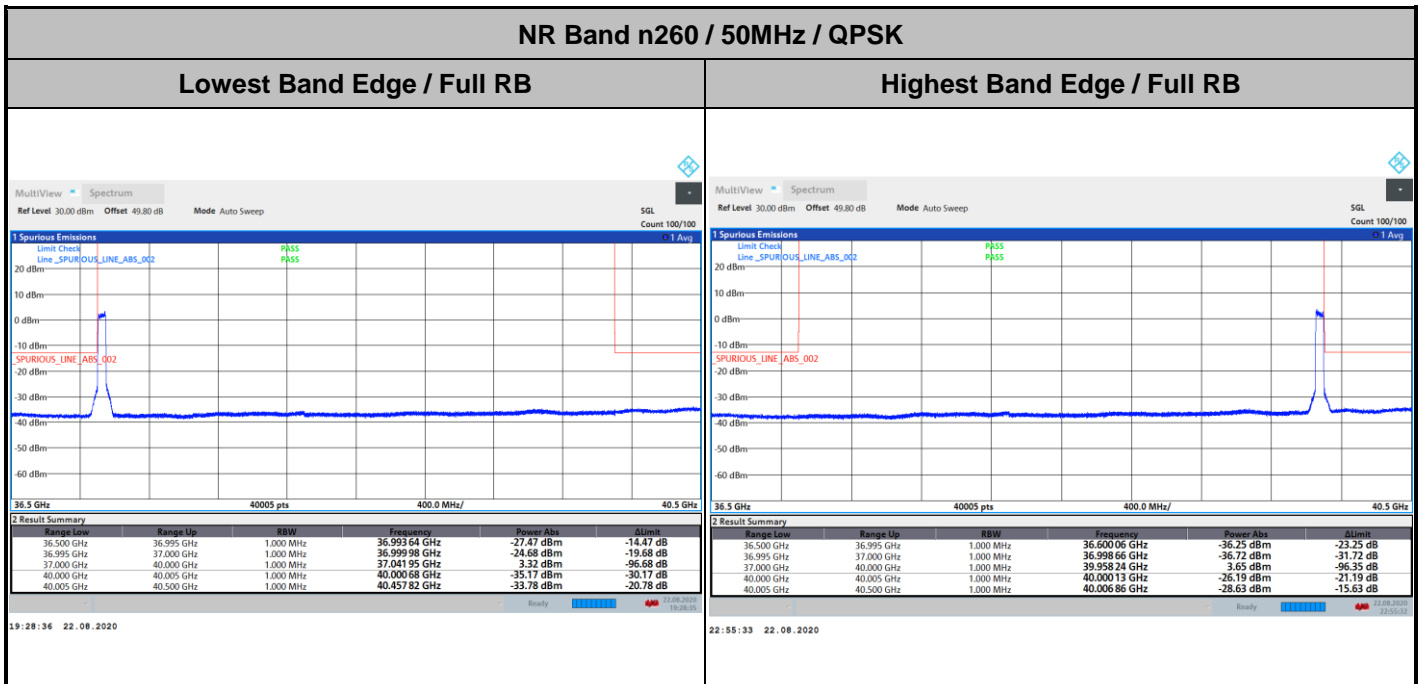




CP-OFDM Module 0

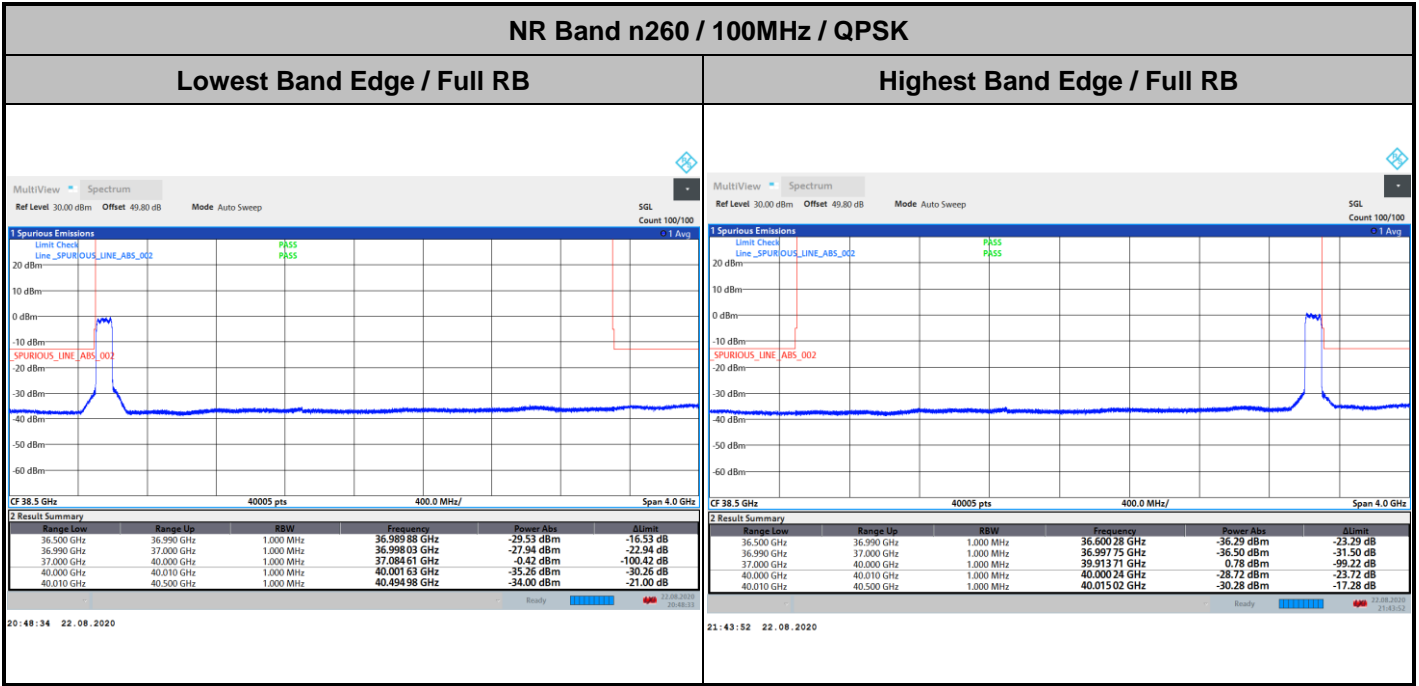



CP-OFDM Module 0

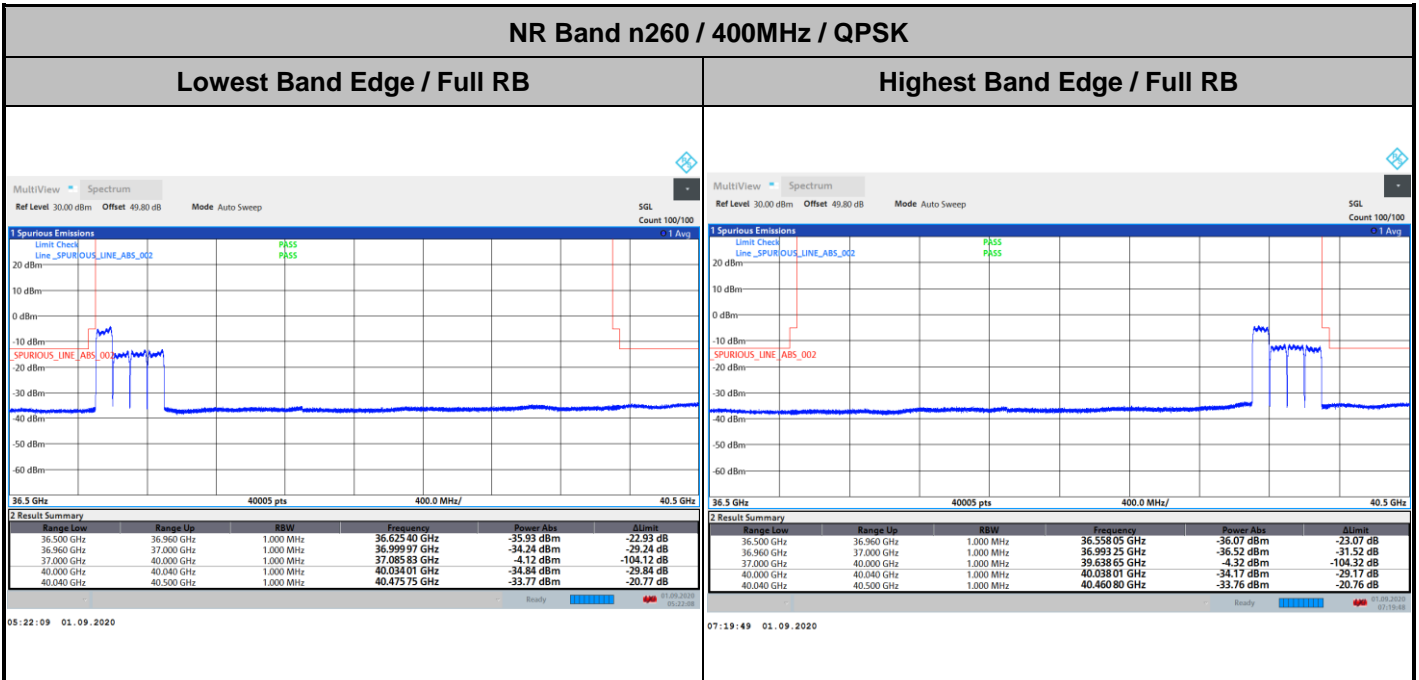



Spurious Emission


There is no significant spurious emission signal found for frequency started from 30MHz up to 18GHz. Only the noise floor is reported.

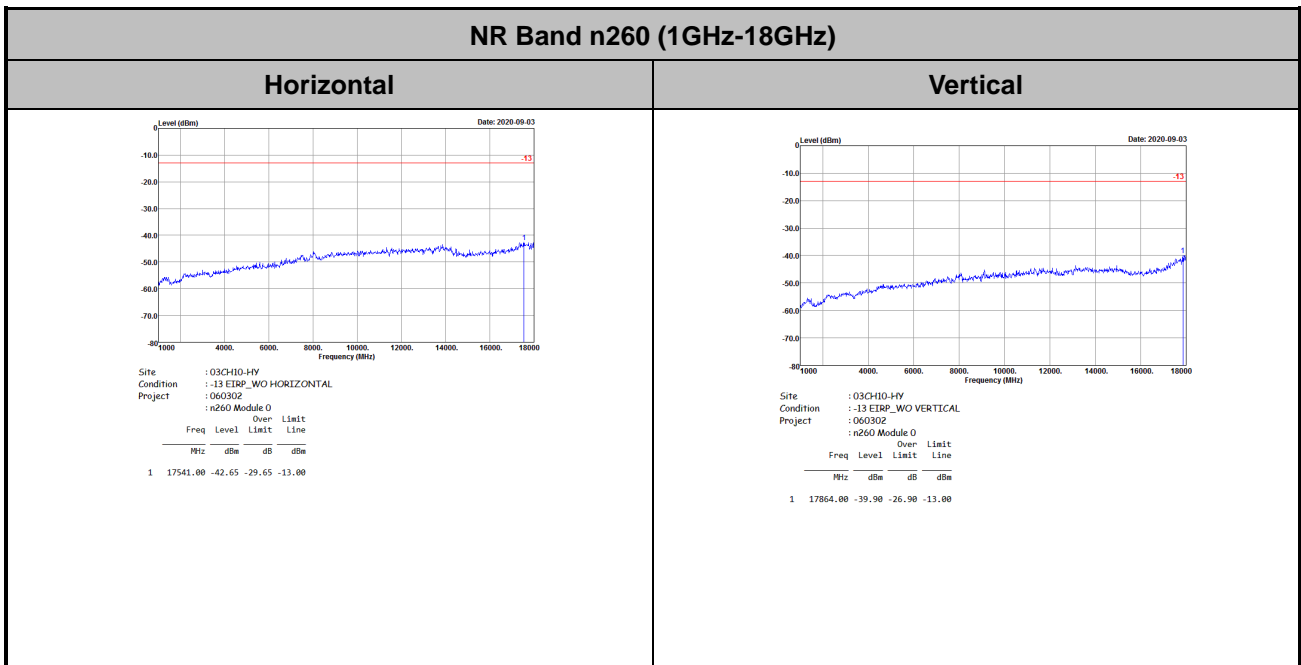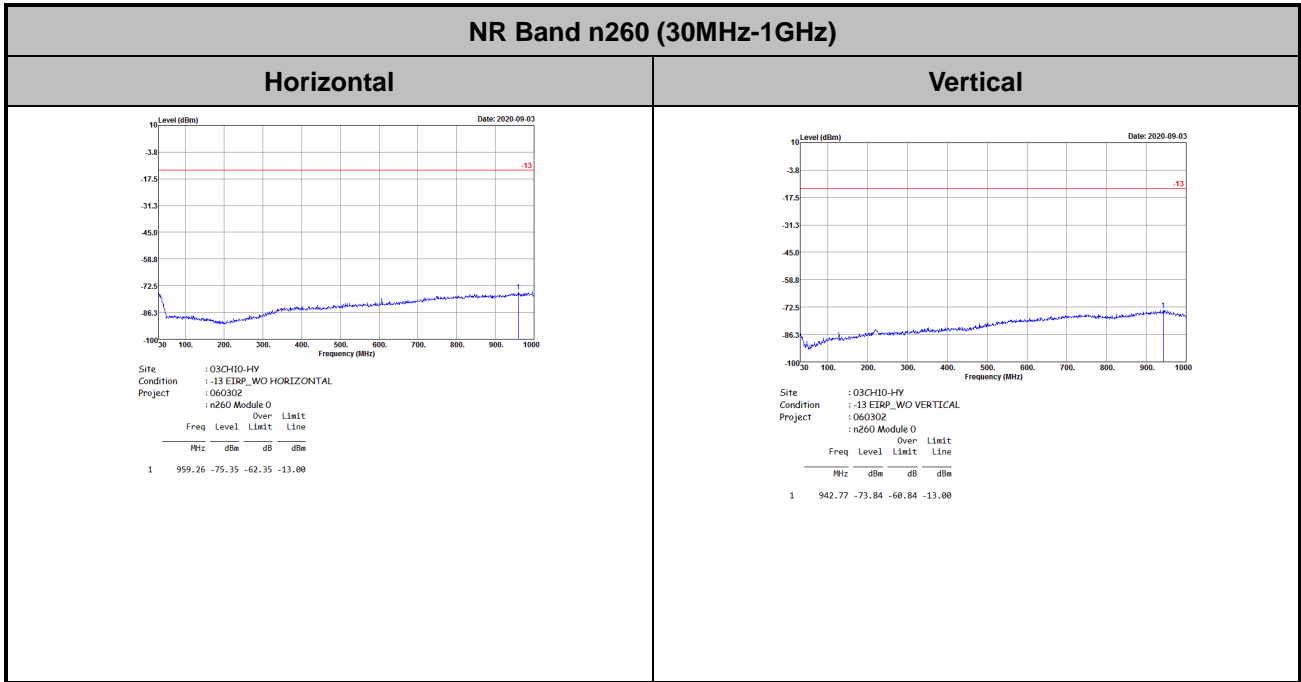




Spurious emission between 18GHz to 40GHz worst case plot is reported as following.

DFT-s-OFDM Module 0

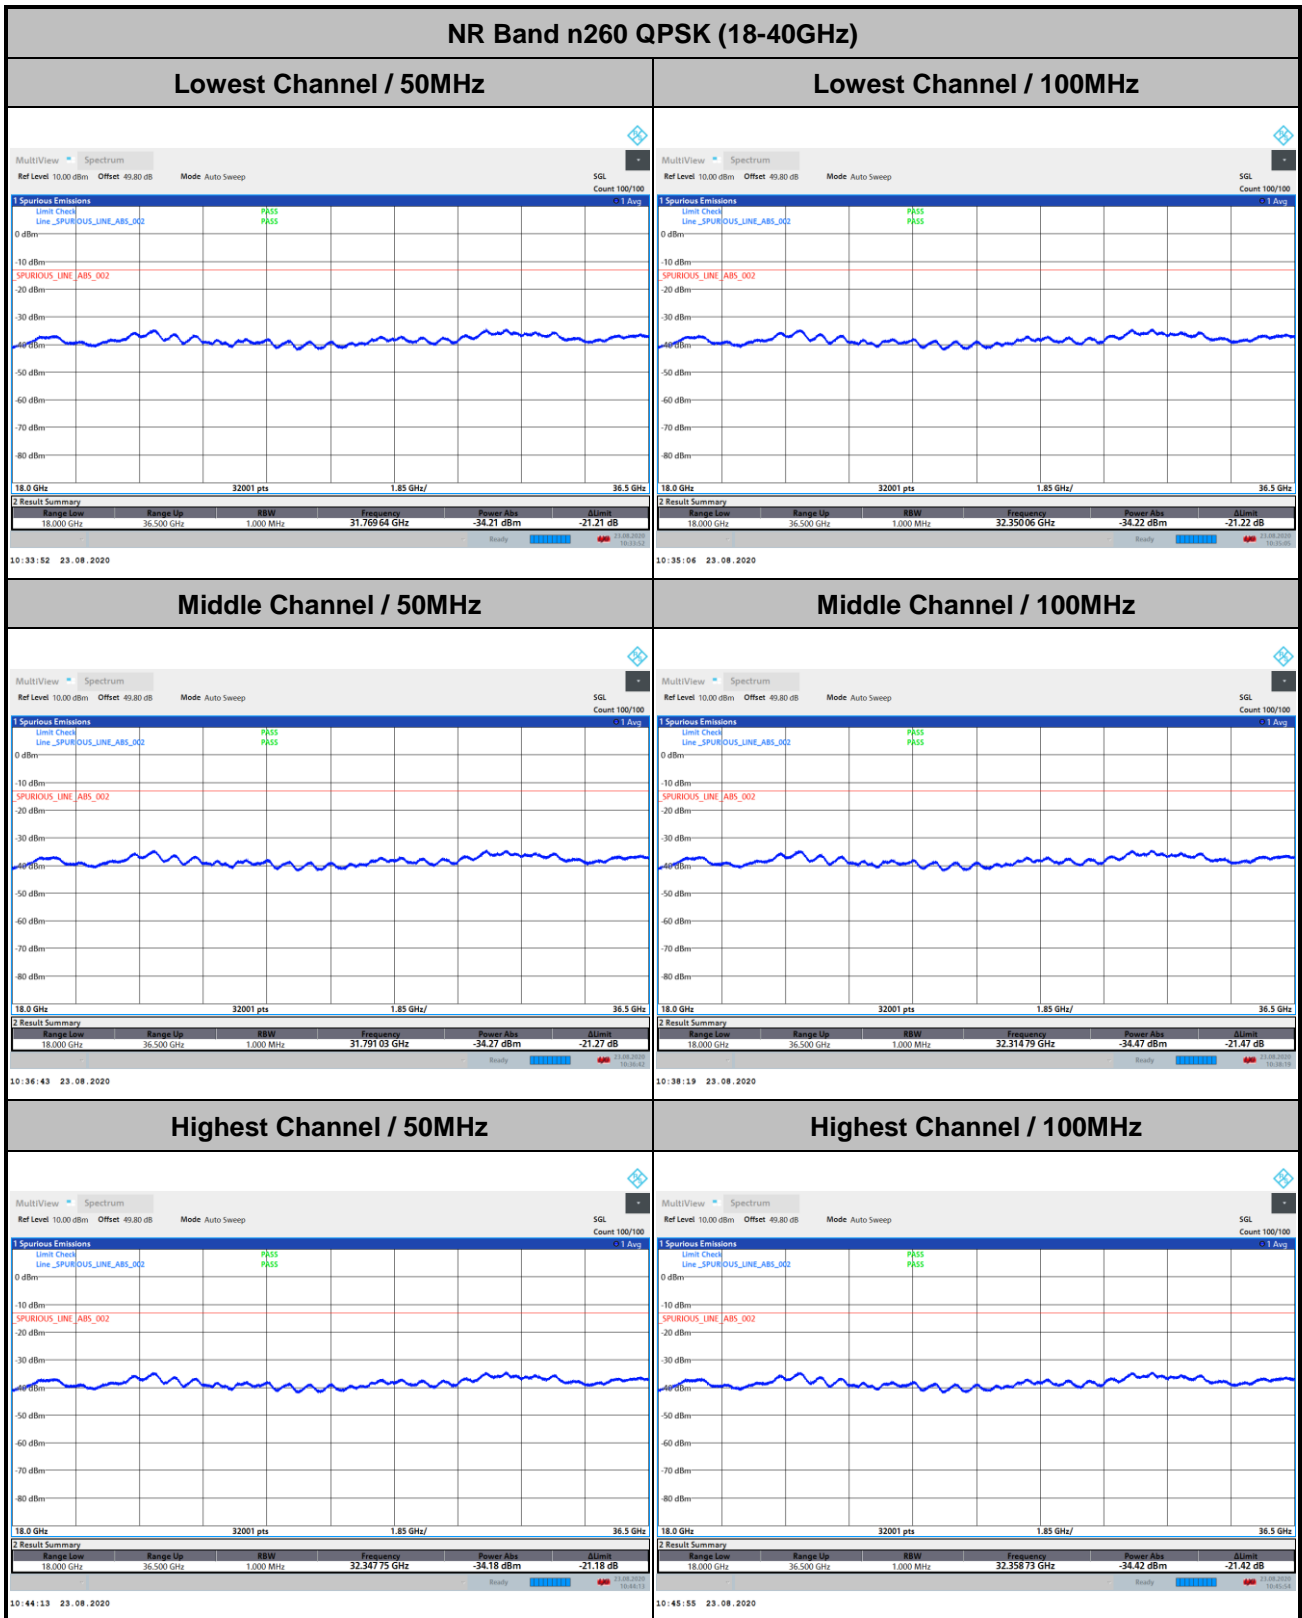



DFT-s-OFDM Module 0

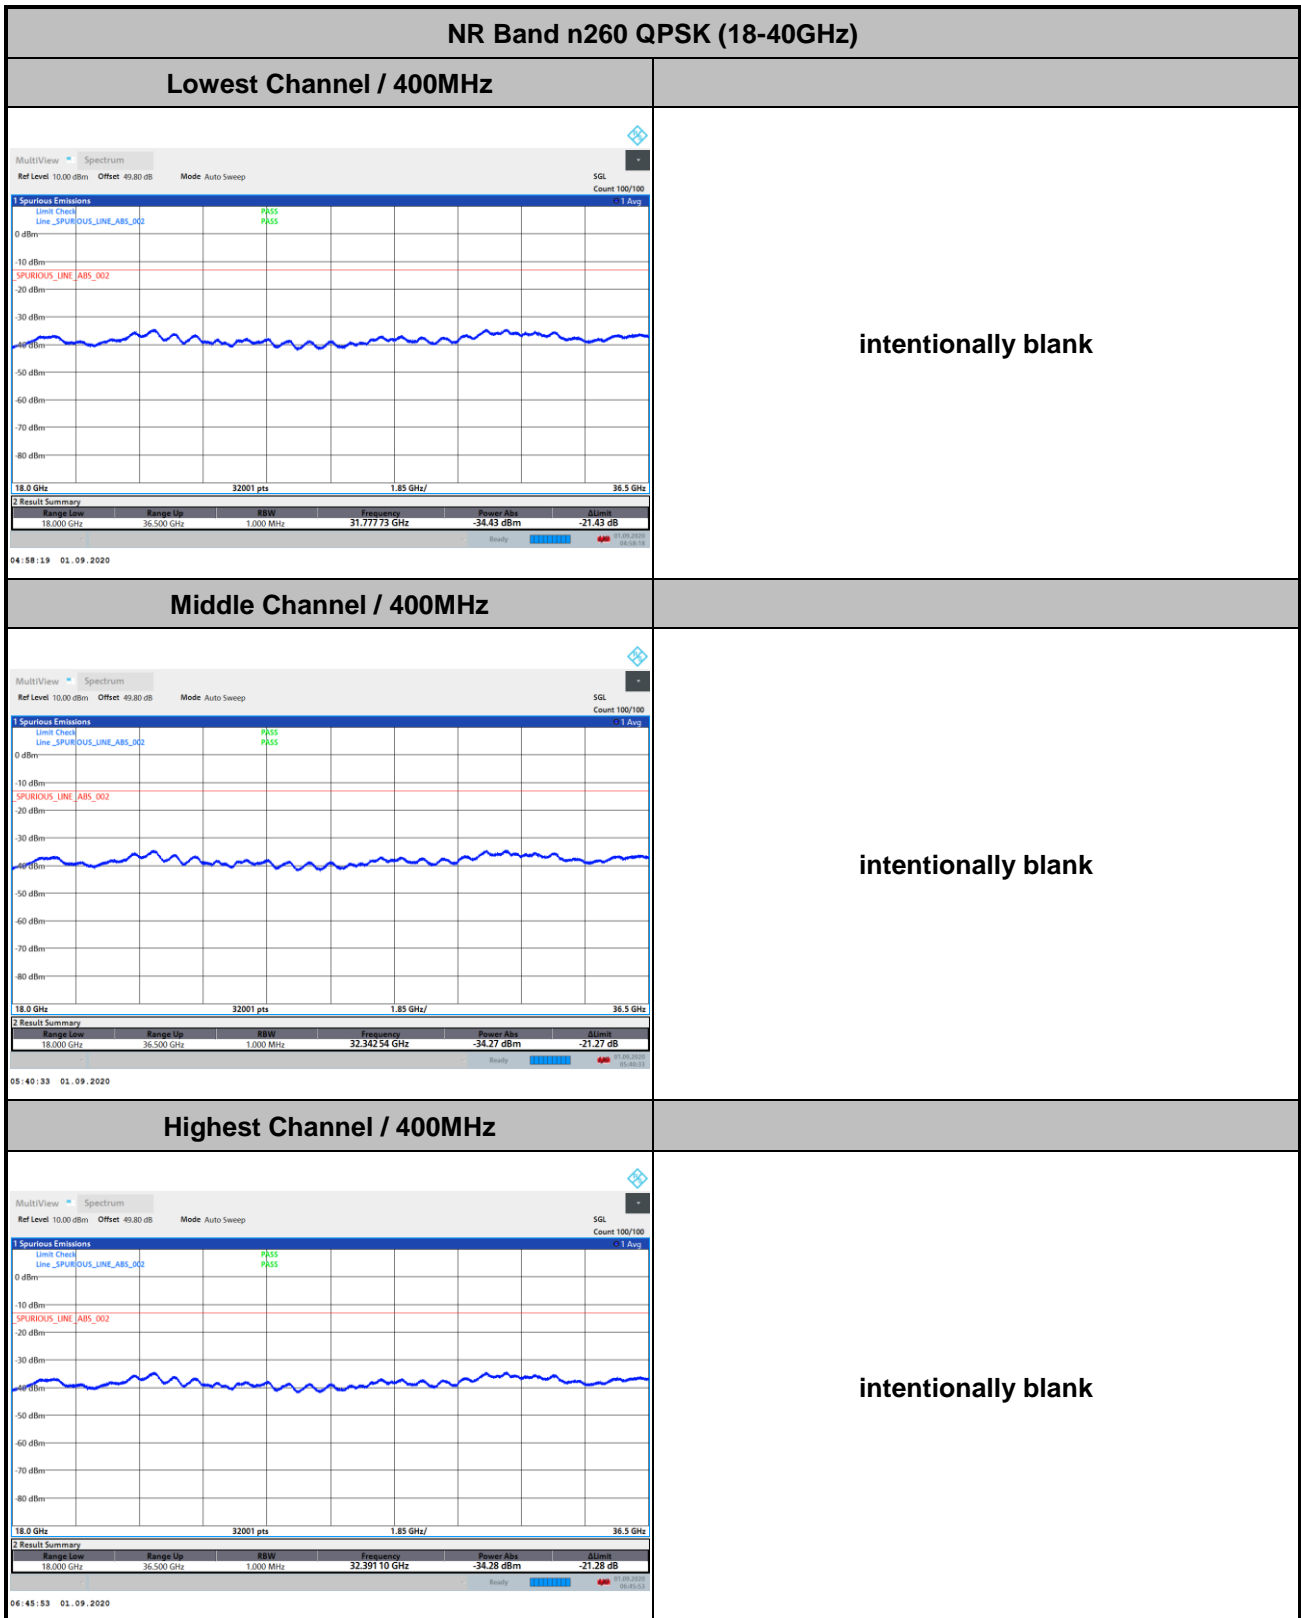





CP-OFDM Module 0

NR Band n260 QPSK (18-40GHz)


Lowest Channel / 50MHz

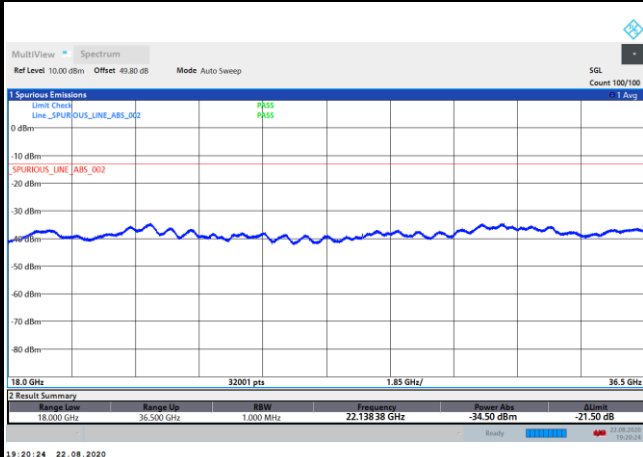


Lowest Channel / 100MHz

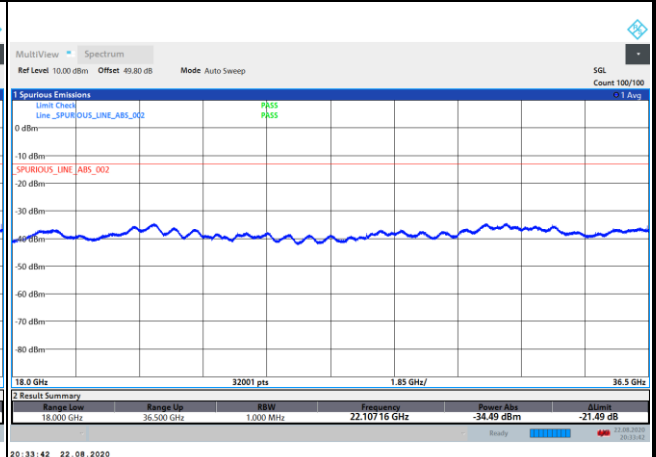


Middle Channel / 50MHz

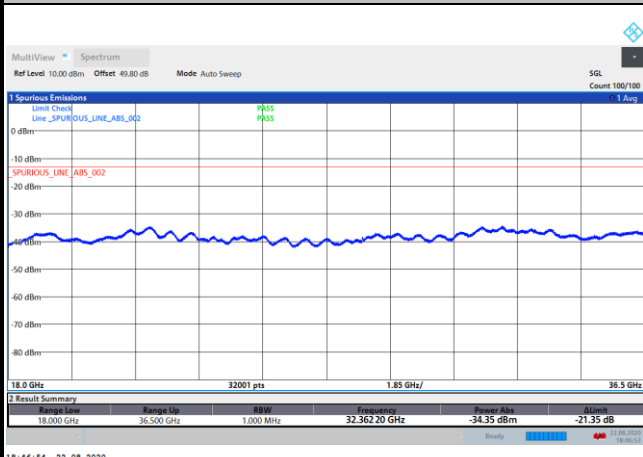


Middle Channel / 100MHz

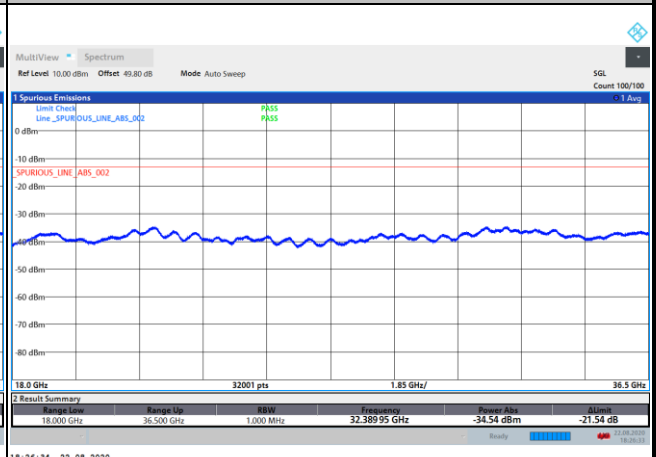

Highest Channel / 50MHz

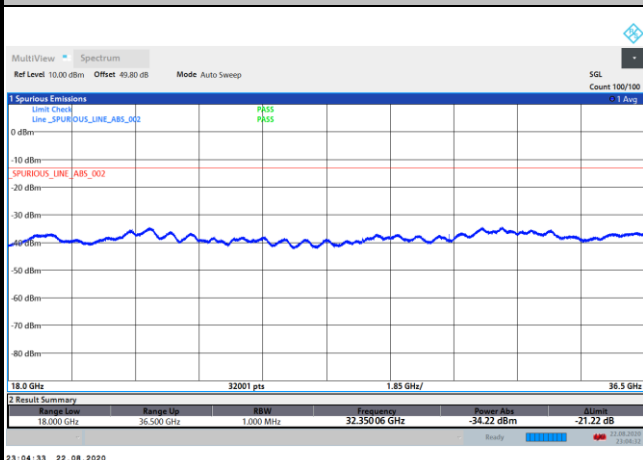

Highest Channel / 100MHz

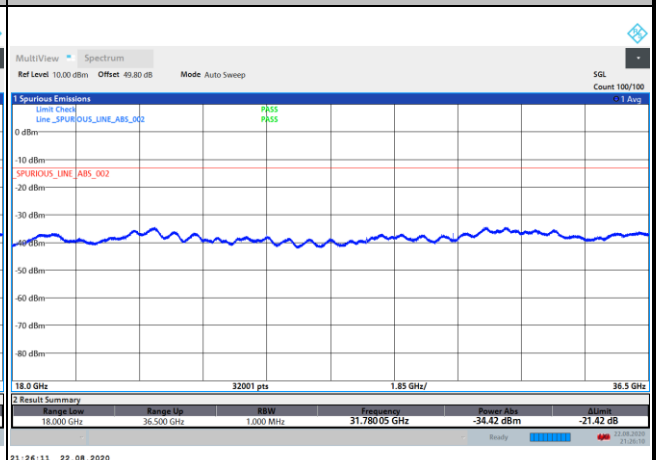



CP-OFDM Module 0

