



FCC SAR TEST REPORT

Application No.: ZR/2021/30022
Applicant: HMD Global Oy
Manufacturer: HMD Global Oy
Product Name: smart phone
Model No.(EUT): TA-1371
Trade Mark: Nokia
FCC ID: 2AJOTTA-1371
Standards: FCC 47CFR §2.1093
Date of Receipt: 2021-04-10
Date of Test: 2021-04-13 to 2021-06-03
Date of Issue: 2021-08-10
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

REVISION HISTORY

Report Number	Revision	Description	Issue Date
ZR/2021/3002206	01	Original	2021-06-26
ZR/2021/3002207	02	Update the report No.	2021-08-10



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Product specific 10g SAR
GSM850	0.59	0.52	0.45	/
GSM1900	1.04	0.30	0.76	/
WCDMA Band II	1.02	0.41	1.18	/
WCDMA Band IV	0.87	0.45	1.10	/
WCDMA Band V	0.50	0.54	0.54	/
CDMA BC0	1.14	0.48	0.57	/
CDMA BC1	1.38	0.40	1.15	/
CDMA BC10	0.77	0.42	0.42	/
LTE Band 2	1.28	0.67	1.38	2.86
LTE Band 4	1.43	0.51	1.09	/
LTE Band 5	0.49	0.30	0.32	/
LTE Band 7	1.04	0.84	1.36	1.99
LTE Band 12	0.79	0.24	0.55	/
LTE Band 13	0.27	0.25	0.25	/
LTE Band 14	0.25	0.25	0.25	/
LTE Band 25	0.93	0.57	1.23	2.53
LTE Band 26	0.54	0.41	0.41	/
LTE Band 30	1.32	0.89	1.19	1.54
LTE Band 38	1.40	0.96	1.04	/
LTE Band 41	1.32	0.69	0.91	/
LTE Band 48	1.27	0.58	0.87	/
LTE Band 66	1.20	0.43	0.74	/
LTE Band 71	0.57	0.29	0.41	/
NR Band n2	0.71	0.62	1.31	1.68
NR Band n5	0.64	0.48	0.48	/
NR Band n25	0.91	0.69	1.31	2.47
NR Band n38	1.17	0.30	0.32	/
NR Band n41	1.31	0.54	0.54	/
NR Band n66	0.60	0.37	0.78	/
NR Band n71	0.63	0.29	0.42	/
NR Band n77	0.66	0.08	0.19	/
NR Band n78	1.36	0.28	0.42	/
WiFi 2.4G	0.97	0.24	0.24	/
WiFi 5G	0.77	0.28	0.64	1.15
BT	0.12	0.02	0.02	/
SAR Limited(W/kg)	1.6			4.0
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Product specific 10g SAR
Sum SAR	1.43	1.27	1.43	2.95
SPLSR	N/A	N/A	N/A	N/A
SPLSR Limited	0.04			0.1

Note:

The Simultaneous transmission SAR is the same test position of the WWAN antenna + WiFi/BT antenna.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Reviewed by

Jackson Li

Jackson Li

Prepared by

Roman Pan

Roman Pan



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

CONTENTS

1	GENERAL INFORMATION	8
1.1	DETAILS OF CLIENT.....	8
1.2	TEST LOCATION.....	8
1.3	TEST FACILITY.....	9
1.4	GENERAL DESCRIPTION OF EUT.....	10
1.4.1	DUT Antenna Locations(Back View).....	12
1.4.2	LTE CA additional specification.....	13
1.4.3	Power reduction specification.....	14
1.5	TEST SPECIFICATION.....	15
1.6	RF EXPOSURE LIMITS.....	16
2	LABORATORY ENVIRONMENT	17
3	SAR MEASUREMENTS SYSTEM CONFIGURATION	18
3.1	THE SAR MEASUREMENT SYSTEM.....	18
3.2	ISOTROPIC E-FIELD PROBE EX3DV4.....	19
3.3	DATA ACQUISITION ELECTRONICS (DAE).....	20
3.4	SAM TWIN PHANTOM.....	20
3.5	ELI PHANTOM.....	21
3.6	DEVICE HOLDER FOR TRANSMITTERS.....	22
3.7	MEASUREMENT PROCEDURE.....	23
3.7.1	Scanning procedure.....	23
3.7.2	Data Storage.....	25
3.7.3	Data Evaluation by SEMCAD.....	25
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	27
4.1	SAR MEASUREMENT VARIABILITY.....	27
4.2	SAR MEASUREMENT UNCERTAINTY.....	27
5	DESCRIPTION OF TEST POSITION	28
5.1	HEAD EXPOSURE CONDITION.....	28
5.1.1	SAM Phantom Shape.....	28
5.1.2	EUT constructions.....	29
5.1.3	Definition of the "cheek" position.....	29
5.1.4	Definition of the "tilted" position.....	30
5.2	BODY EXPOSURE CONDITION.....	31
5.2.1	Body-worn accessory exposure conditions.....	31
5.2.2	Wireless Router exposure conditions.....	32
5.3	EXTREMITY EXPOSURE CONDITIONS.....	32
5.1	PROXIMITY SENSOR TRIGGERING TEST.....	37
6	SAR SYSTEM VERIFICATION PROCEDURE	45
6.1	TISSUE SIMULATE LIQUID.....	45
6.1.1	Recipes for Tissue Simulate Liquid.....	45
6.1.2	Measurement for Tissue Simulate Liquid.....	46
6.2	SAR SYSTEM CHECK.....	47



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.2.1	Justification for Extended SAR Dipole Calibrations	48
6.2.2	Summary System Check Result(s).....	49
6.2.3	Detailed System Check Results.....	50
7	TEST CONFIGURATION	51
7.1	3G SAR TEST REDUCTION PROCEDURE	51
7.2	OPERATION CONFIGURATIONS	51
7.2.1	GSM Test Configuration.....	51
7.2.2	WCDMA Test Configuration	52
7.2.3	WiFi Test Configuration.....	59
7.2.4	LTE Test Configuration	66
7.2.5	NR Band Test Configuration.....	69
8	TEST RESULT	73
8.1	MEASUREMENT OF RF CONDUCTED POWER	73
8.1.1	Conducted Power of GSM.....	73
8.1.2	Conducted Power of WCDMA.....	73
8.1.3	Conducted Power of LTE.....	74
8.1.4	Conducted Power of Uplink & Downlink LTE CA	74
8.1.5	Conducted Power of NR	75
8.1.6	Conducted Power of WIFI.....	75
8.1.7	Conducted Power of BT.....	75
8.2	MEASUREMENT OF SAR DATA.....	76
8.2.1	SAR Result of GSM850.....	77
8.2.2	SAR Result of GSM1900	78
8.2.3	SAR Result of WCDMA Band II.....	79
8.2.4	SAR Result of WCDMA Band IV.....	81
8.2.5	SAR Result of WCDMA Band V.....	83
8.2.6	SAR Result of CDMA BC0.....	84
8.2.7	SAR Result of CDMA BC1.....	86
8.2.8	SAR Result of CDMA BC10.....	88
8.2.9	SAR Result of LTE Band 2	89
8.2.10	SAR Result of LTE Band 4	93
8.2.11	SAR Result of LTE Band 5	96
8.2.12	SAR Result of LTE Band 7	98
8.2.13	SAR Result of LTE Band 12	102
8.2.14	SAR Result of LTE Band 13.....	104
8.2.15	SAR Result of LTE Band 14.....	106
8.2.16	SAR Result of LTE Band 25.....	108
8.2.17	SAR Result of LTE Band 26.....	110
8.2.18	SAR Result of LTE Band 30.....	113
8.2.19	SAR Result of LTE Band 38.....	116
8.2.20	SAR Result of LTE Band 41.....	118
8.2.21	SAR Result of LTE Band 48.....	121
8.2.22	SAR Result of LTE Band 66.....	124
8.2.23	SAR Result of LTE Band 71	126
8.2.24	SAR Result of 5G NR n2.....	128
8.2.1	SAR Result of 5G NR n5.....	131
8.2.2	SAR Result of 5G NR n25	133
8.2.3	SAR Result of 5G NR n38	137
8.2.4	SAR Result of 5G NR n41	139



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.2.5	SAR Result of 5G NR n66	144
8.2.6	SAR Result of 5G NR n71	146
8.2.1	SAR Result of 5G NR n77	148
8.2.2	SAR Result of 5G NR n78	151
8.2.3	SAR Result of WIFI 2.4G	153
8.2.4	SAR Result of WIFI 5G	156
8.2.5	SAR Result of BT	161
8.3	MULTIPLE TRANSMITTER EVALUATION	162
8.3.1	Simultaneous SAR SAR test evaluation	162
8.3.2	Simultaneous Transmission SAR Summation Scenario	163
9	EQUIPMENT LIST	189
10	CALIBRATION CERTIFICATE	191
11	PHOTOGRAPHS	191
	APPENDIX A: DETAILED SYSTEM CHECK RESULTS	191
	APPENDIX B: DETAILED TEST RESULTS	191
	APPENDIX C: CALIBRATION CERTIFICATE	191
	APPENDIX D: PHOTOGRAPHS	191
	APPENDIX E: CONDUCTED RF OUTPUT POWER TABLE	191



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1 General Information

1.1 Details of Client

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Manufacturer:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

1.2 Test Location

Company: SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
 Address: No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
 Post code: 518057
 Telephone: +86 (0) 755 2601 2053
 Fax: +86 (0) 755 2671 0594
 E-mail: ee.shenzhen@sgs.com



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006

IC#: 4620C.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



1.4 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	smart phone		
Model No.(EUT):	TA-1371		
FCC ID:	2AJOTTA-1371		
Trade Mark:	Nokia		
Product Phase:	Identical Prototype		
Serial:	99e6b9f2/900a32a1/76850d9/94024493/b9252293		
Hardware Version:	V1.00		
Software Version:	00WW_1_01A		
Antenna Type:	Integrated		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK, 16QAM(HSPA+); CDMA: QPSK LTE: QPSK,16QAM,64QAM, 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM), CP-OFDM (QPSK, 16QAM, 64QAM, 256QAM) WIFI: DSSS, OFDM, OFDMA; BT: GFSK, π/4DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	33	EGPRS Multi-slots Class:	33
HSDPA UE Category:	24	HSUPA UE Category	7
DC-HSDPA UE Category:	24		
Power Class	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Bands)		
	3, tested with power control "all up"(CDMA Bands)		
	3, tested with power control Max Power(LTE Bands)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band IV	1710~1755	2110~2155
	WCDMA Band V	824~849	869~894
	CDMA BC0	824~849	869~894
	CDMA BC1	1850~1910	1930~1990
	CDMA BC10	817~824	862~869
	LTE Band 2	1850 ~1910	1930 ~1990
	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 13	777~787	746~756
LTE Band 14	788~798	758~768	
LTE Band 25	1850~1915	1930~1995	
LTE Band 26	814~849	859~894	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

	LTE Band 30	2305~2315	2350~2360
	LTE Band 38	2570~2620	2570~2620
	LTE Band 41	2496~2690	2496~2690
	LTE Band 48	3550~3700	3550~3700
	LTE Band 66	1710~1780	2110~2200
	LTE Band 71	663~698	617~652
	NR Band n2	1850~1910	1930~1990
	NR Band n5	824~849	869~894
	NR Band n25	2500~2570	2620~2690
	NR Band n38	2570~2620	2570~2620
	NR Band n41	2496~2690	2496~2690
	NR Band n66	1710~1780	2110~2180
	NR Band n71	663~698	617~652
	NR Band n77	3700~3980	3700~3980
	NR Band n78	3700~3800	3700~3800
	Bluetooth	2400~2483.5	2400~2483.5
	Wi-Fi 2.4G	2402~2472	2402~2472
	Wi-Fi 5G	5150~5250	5150~5250
		5250~5350	5250~5350
		5470~5725	5470~5725
Battery Information:	Model:	LPN387450	
	Normal Voltage:	3.87V	
	Rated capacity:	4500mAh	
	Manufacturer:	Ningbo Veken Battery Co., Ltd	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.4.1 DUT Antenna Locations(Back View)

Refer to Appendix D Photographs

Note:

- 1) The test device is a smart phone. The overall diagonal dimension of this device is 182 mm. Per KDB 648474 D04, because the diagonal distance of this device is $\geq 160\text{mm}$, so it is a phablet.

According to the distance between 5G NR/LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
Ant0	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	No	Yes
Ant1	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	Yes	No
Ant2	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	Yes	No
Ant3	Hotspot/Product specific 10g SAR	Yes	Yes	Yes	Yes	Yes	No
Ant4	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	No
Ant7	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	No	Yes
WIFI MIMO (Ant4+Ant7)	Hotspot/Product specific 10g SAR	Yes	Yes	No	Yes	Yes	Yes

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.4.2 LTE CA additional specification

The device supports downlink and intra-band contiguous uplink LTE Carrier Aggregation (CA). When carrier aggregation applies, implementation and measurement details for the following are necessary.

- a) Intra-band and inter-band carrier aggregation requirements for downlink.
- b) The device supports Inter-band uplink LTE CA for CA_2A-12A, CA_4A-12A with two component carriers in the uplink.

The possible downlink and uplink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The conducted power measurement results of downlink and uplink LTE CA are provided in Section 8 of this report per 3GPP TS 36.521-1 V14.4.0. The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.4.3 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation

- 1) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction
- 2) A fixed level power reduction is applied for some frequency bands when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.
- 3) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance (Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217).

The detailed power reduction information can refer to Conducted Power Appendix E.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 f (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

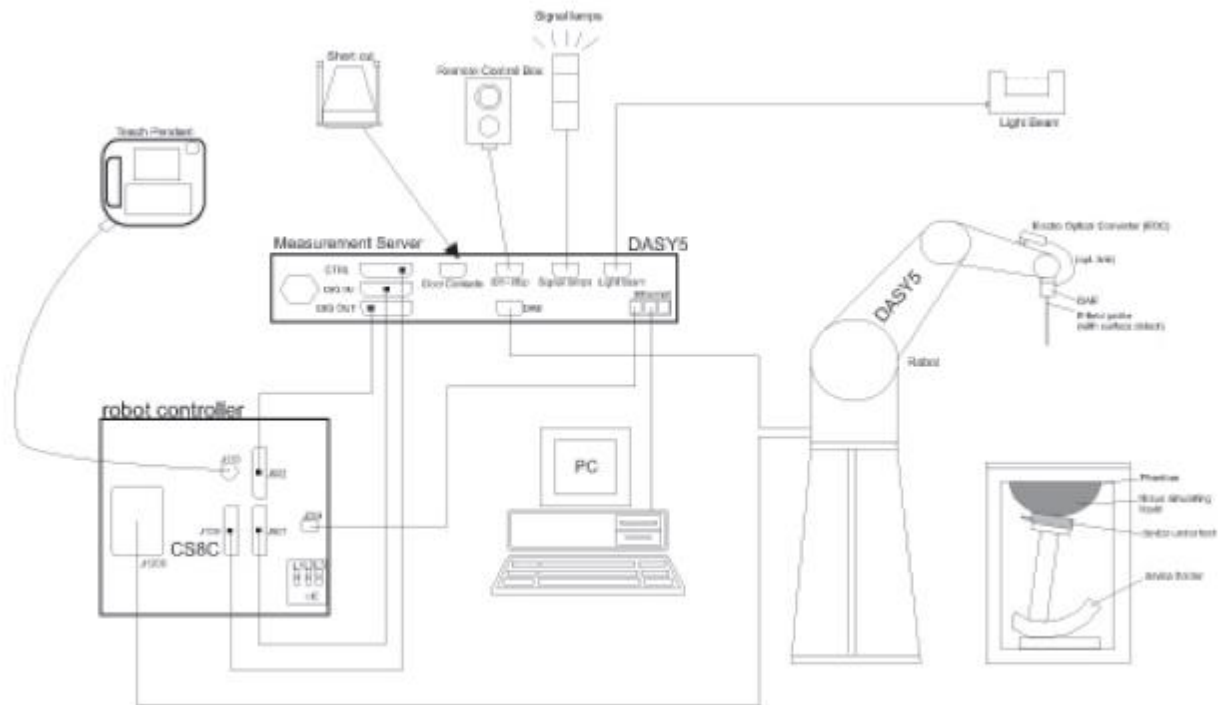

F-1. SAR Measurement System Configuration




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

3.2 Isotropic E-field Probe EX3DV4


	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.3 Data Acquisition Electronics (DAE)

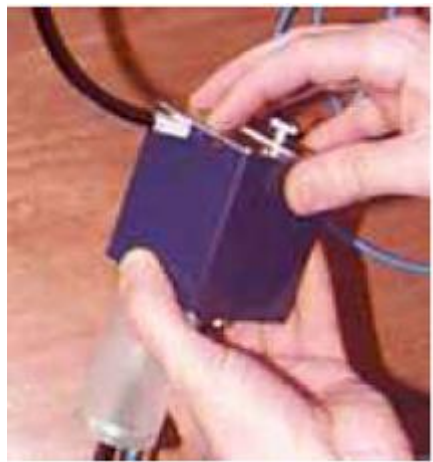Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	


The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 f (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 Normi = sensor sensitivity of channel i ($i = x, y, z$)
 [mV/(V/m)²] for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
 - 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
 - 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
 - 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Description of Test Position


5.1 Head Exposure Condition

5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

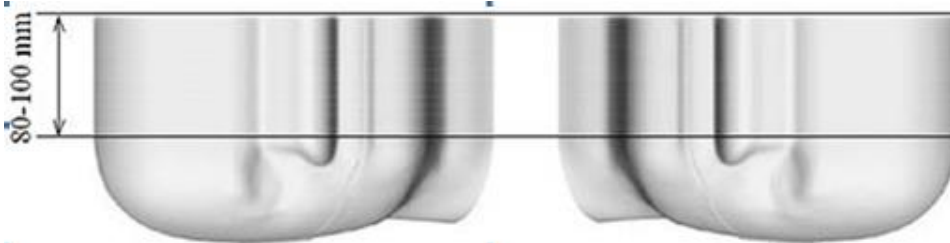

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

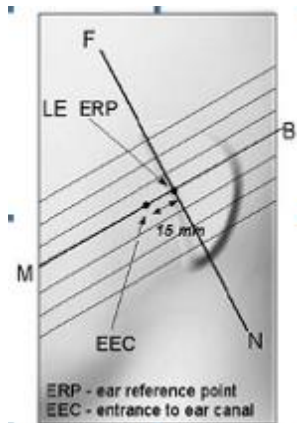


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

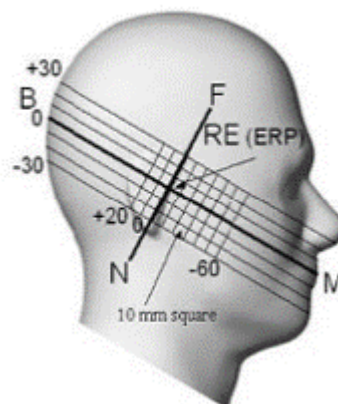


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

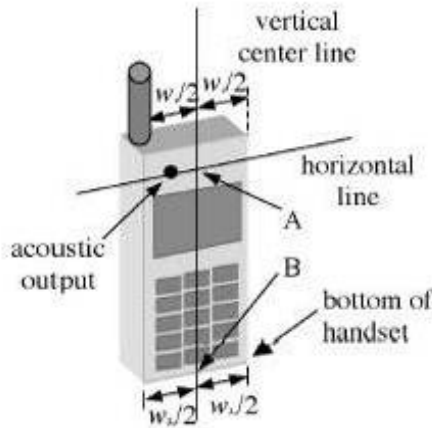

F-7. Handset vertical and horizontal reference lines-“fixed case”

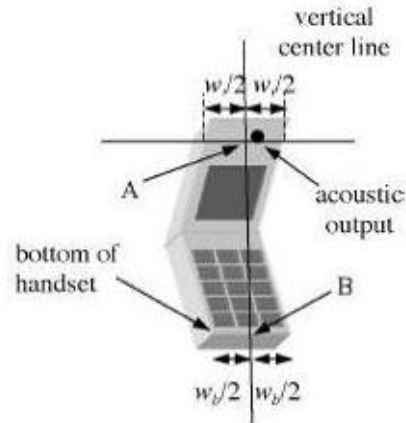

F-8. Handset vertical and horizontal reference lines-“clam-shell case”

5.1.3 Definition of the “cheek” position

- Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom (“initial position”). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.1.4 Definition of the “tilted” position

- a) Position the device in the “cheek” position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

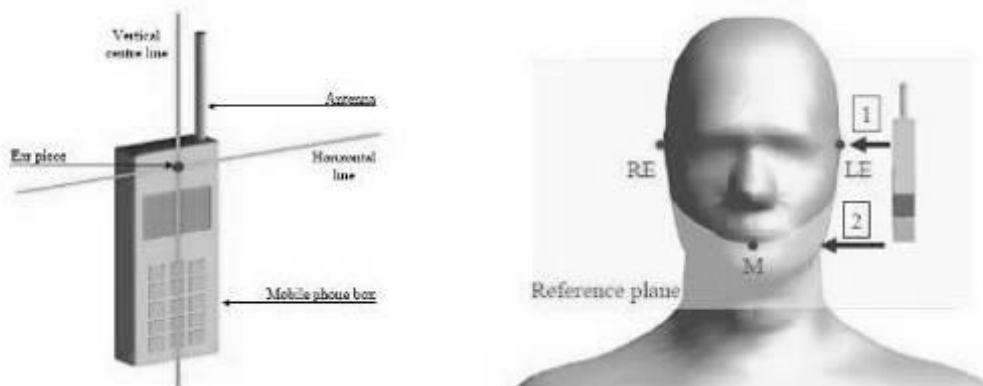

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

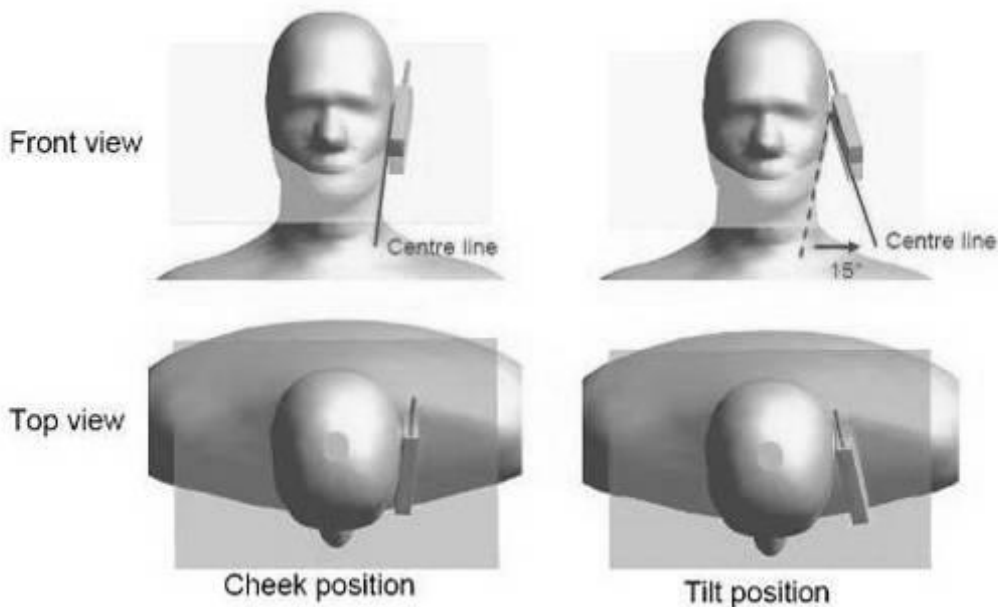

F-10. “Cheek” and “tilt” positions of the mobile phone on the left side



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

5.2 Body Exposure Condition


5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

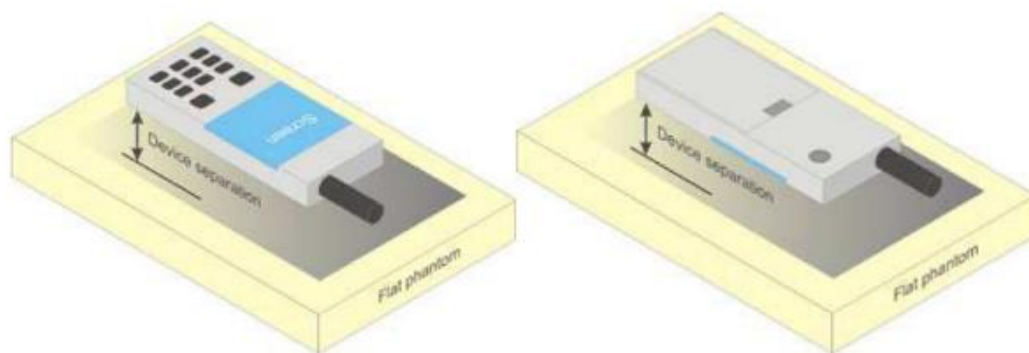

F-11. Test positions for body-worn devices



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

5.3 Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the following frequency bands need to test with 0mm for the Product Specific 10-g SAR, the others are not required.

LTE B2(Ant0):

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	20	QPSK 1RB_0	18700/1860	1:1	0.487	0.07	21.70	24.00	1.698	0.827	Yes
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.387	0.03	21.70	24.00	1.698	0.657	Yes
Left side	20	QPSK 1RB_0	18700/1860	1:1	0.021	0.04	21.70	24.00	1.698	0.036	Yes
Right side	20	QPSK 1RB_0	18700/1860	1:1	0.035	-0.03	21.70	24.00	1.698	0.059	Yes
Bottom side	20	QPSK 1RB_0	18700/1860	1:1	0.946	0.01	21.70	24.00	1.698	1.607	No
Bottom side	20	QPSK 1RB_50	18900/1880	1:1	1.000	-0.03	21.69	24.00	1.702	1.702	No
Bottom side	20	QPSK 1RB_0	19100/1900	1:1	0.995	-0.02	21.63	24.00	1.726	1.717	No
Hotspot Test data (Separate 10mm 50%RB)Sensor on											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.478	0.08	21.54	23.00	1.400	0.669	Yes
Back side	20	QPSK 50RB_0	18700/1860	1:1	0.382	0.04	21.54	23.00	1.400	0.535	Yes
Left side	20	QPSK 50RB_0	18700/1860	1:1	0.019	0.08	21.54	23.00	1.400	0.026	Yes
Right side	20	QPSK 50RB_0	18700/1860	1:1	0.035	0.12	21.54	23.00	1.400	0.048	Yes
Bottom side	20	QPSK 50RB_0	18700/1860	1:1	0.929	0.00	21.54	23.00	1.400	1.300	No
Bottom side	20	QPSK 50RB_50	18900/1880	1:1	0.982	-0.01	21.52	23.00	1.406	1.381	No
Bottom side-repeat	20	QPSK 50RB_50	18900/1880	1:1	0.975	-0.13	21.52	23.00	1.406	1.371	No
Bottom side	20	QPSK 50RB_50	19100/1900	1:1	0.922	-0.02	21.53	23.00	1.403	1.293	No
Hotspot Test data (Separate 10mm 100%RB)Sensor on											
Bottom side	20	QPSK 100RB_0	18900/1880	1:1	0.968	-0.03	21.58	23.00	1.387	1.342	No
Hotspot Test data(Separate 10mm 1RB)Sensor off											
Front side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.309	0.04	22.41	24.00	1.442	0.446	Yes
Back side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.242	-0.11	22.41	24.00	1.442	0.349	Yes
Left side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.013	0.01	22.41	24.00	1.442	0.018	Yes
Right side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.031	0.03	22.41	24.00	1.442	0.044	Yes
Bottom side-	20	QPSK 1RB_0	18700/1860	1:1	0.357	0.04	22.41	24.00	1.442	0.515	Yes



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



19mm											
Hotspot Test data (Separate 10mm 50%RB)Sensor off											
Front side-15mm	20	QPSK 50RB_25	18700/1860	1:1	0.205	0.18	21.67	23.00	1.358	0.278	Yes
Back side-17mm	20	QPSK 50RB_25	18700/1860	1:1	0.193	-0.10	21.67	23.00	1.358	0.262	Yes
Left side-17mm	20	QPSK 50RB_25	18700/1860	1:1	0.009	0.06	21.67	23.00	1.358	0.013	Yes
Right side-15mm	20	QPSK 50RB_25	18700/1860	1:1	0.025	0.14	21.67	23.00	1.358	0.034	Yes
Bottom side-19mm	20	QPSK 50RB_25	18700/1860	1:1	0.292	0.03	21.67	23.00	1.358	0.397	Yes

LTE B7(Ant0 & Ant1):

ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	20	QPSK 1RB_99	21100/2535.5	1:1	0.726	-0.02	22.61	24.00	1.377	1.000	Yes
Back side	20	QPSK 1RB_99	21100/2535.5	1:1	0.707	0.01	22.61	24.00	1.377	0.974	Yes
Left side	20	QPSK 1RB_99	21100/2535.5	1:1	0.942	-0.05	22.61	24.00	1.377	1.297	No
Right side	20	QPSK 1RB_99	21100/2535.5	1:1	0.026	0.02	22.61	24.00	1.377	0.036	Yes
Top side	20	QPSK 1RB_99	21100/2535.5	1:1	0.164	0.04	22.61	24.00	1.377	0.226	Yes
Left side	20	QPSK 1RB_99	20850/2510	1:1	0.974	0.09	22.60	24.00	1.380	1.344	No
Left side	20	QPSK 1RB_99	21350/2560	1:1	0.881	0.09	22.51	24.00	1.409	1.242	No
Hotspot Test data(Separate 10mm 50%RB)Sensor on											
Front side	20	QPSK 50RB_25	20850/2510	1:1	0.732	-0.02	22.38	23.00	1.153	0.844	Yes
Back side	20	QPSK 50RB_25	20850/2510	1:1	0.706	-0.02	22.38	23.00	1.153	0.814	Yes
Left side	20	QPSK 50RB_25	20850/2510	1:1	0.982	0.05	22.38	23.00	1.153	1.133	Yes
Left side-repeat	20	QPSK 50RB_25	20850/2510	1:1	0.959	0.04	22.38	23.00	1.153	1.106	Yes
Right side	20	QPSK 50RB_25	20850/2510	1:1	0.234	0.08	22.38	23.00	1.153	0.270	Yes
Top side	20	QPSK 50RB_25	20850/2510	1:1	0.156	0.18	22.38	23.00	1.153	0.180	Yes
Front side	20	QPSK 50RB_25	21100/2535.5	1:1	0.723	0.04	22.35	23.00	1.161	0.840	Yes
Front side	20	QPSK 50RB_25	21350/2560	1:1	0.697	0.08	22.34	23.00	1.164	0.811	Yes
Back side	20	QPSK 50RB_25	21100/2535.5	1:1	0.702	0.06	22.35	23.00	1.161	0.815	Yes
Back side	20	QPSK 50RB_25	21350/2560	1:1	0.671	0.00	22.34	23.00	1.164	0.781	Yes
Left side	20	QPSK 50RB_25	21100/2535.5	1:1	0.928	0.10	22.35	23.00	1.161	1.078	Yes
Left side	20	QPSK 50RB_25	21350/2560	1:1	0.900	0.12	22.34	23.00	1.164	1.048	Yes
Hotspot Test data(Separate 10mm 100%RB)Sensor on											
Front side	20	QPSK 100RB_0	21350/2560	1:1	0.713	0.07	22.43	23.00	1.140	0.813	Yes
Back side	20	QPSK 100RB_0	21350/2560	1:1	0.674	-0.05	22.43	23.00	1.140	0.769	Yes
Left side	20	QPSK 100RB_0	21350/2560	1:1	0.906	0.10	22.43	23.00	1.140	1.033	Yes
Hotspot Test data(Separate 10mm 1RB)Sensor off											
Front side-15mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.586	0.18	23.40	24.00	1.148	0.673	Yes
Back side-17mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.301	0.04	23.40	24.00	1.148	0.346	Yes
Left side-17mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.477	0.08	23.40	24.00	1.148	0.548	Yes
Right side-15mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.021	0.06	23.40	24.00	1.148	0.024	Yes
Top side-14mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.130	0.06	23.40	24.00	1.148	0.149	Yes
Hotspot Test data (Separate 10mm 50%RB)Sensor off											
Front side-15mm	20	QPSK 50RB_25	20850/2510	1:1	0.502	-0.01	22.38	23.00	1.153	0.579	Yes
Back side-17mm	20	QPSK 50RB_25	20850/2510	1:1	0.213	0.02	22.38	23.00	1.153	0.246	Yes
Left side-17mm	20	QPSK 50RB_25	20850/2510	1:1	0.400	0.03	22.38	23.00	1.153	0.461	Yes
Right side-15mm	20	QPSK 50RB_25	20850/2510	1:1	0.025	-0.07	22.38	23.00	1.153	0.029	Yes
Top side-14mm	20	QPSK 50RB_25	20850/2510	1:1	0.104	0.01	22.38	23.00	1.153	0.120	Yes
ANT0											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data(Separate 10mm 1RB) Sensor on											
Front side	20	QPSK 1RB_99	21100/2535.5	1:1	0.384	-0.08	20.71	24.00	2.133	0.819	Yes
Back side	20	QPSK 1RB_99	21100/2535.5	1:1	0.455	0.09	20.71	24.00	2.133	0.971	Yes
Left side	20	QPSK 1RB_99	21100/2535.5	1:1	0.034	-0.13	20.71	24.00	2.133	0.073	Yes
Right side	20	QPSK 1RB_99	21100/2535.5	1:1	0.115	0.19	20.71	24.00	2.133	0.245	Yes



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
Shenzhen Branch 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Bottom side	20	QPSK 1RB_99	21100/2535.5	1:1	0.922	0.02	20.71	24.00	2.133	1.967	Yes
Bottom side	20	QPSK 1RB_99	20850/2510	1:1	0.980	0.01	20.68	24.00	2.148	2.105	No
Bottom side	20	QPSK 1RB_99	21350/2560	1:1	0.807	-0.12	20.70	24.00	2.138	1.725	Yes
Hotspot Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK 50RB_25	20850/2510	1:1	0.430	-0.06	20.81	23.00	1.656	0.712	Yes
Back side	20	QPSK 50RB_25	20850/2510	1:1	0.481	0.00	20.81	23.00	1.656	0.796	Yes
Left side	20	QPSK 50RB_25	20850/2510	1:1	0.027	-0.04	20.81	23.00	1.656	0.045	Yes
Right side	20	QPSK 50RB_25	20850/2510	1:1	0.108	0.07	20.81	23.00	1.656	0.179	Yes
Bottom side	20	QPSK 50RB_25	20850/2510	1:1	1.030	0.01	20.81	23.00	1.656	1.705	No
Bottom side-repeat	20	QPSK 50RB_25	20850/2510	1:1	1.010	0.05	20.81	23.00	1.656	1.672	No
Bottom side	20	QPSK 50RB_50	21100/2535.5	1:1	0.996	-0.04	20.74	23.00	1.683	1.676	No
Bottom side	20	QPSK 50RB_50	21350/2560	1:1	0.859	-0.10	20.79	23.00	1.663	1.429	No
Hotspot Test data (Separate 10mm 100%RB) Sensor on											
Bottom side	20	QPSK 100RB_0	20850/2510	1:1	1.020	-0.11	20.80	22.00	1.318	1.345	No
Hotspot Test data (Separate 10mm 1RB) Sensor off											
Front side-15mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.213	-0.09	22.55	24.00	1.396	0.297	Yes
Back side-17mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.214	0.08	22.55	24.00	1.396	0.299	Yes
Left side-17mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.035	-0.01	22.55	24.00	1.396	0.049	Yes
Right side-15mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.103	-0.06	22.55	24.00	1.396	0.144	Yes
Bottom side-19mm	20	QPSK 1RB_99	21100/2535.5	1:1	0.291	-0.02	22.55	24.00	1.396	0.406	Yes
Hotspot Test data (Separate 10mm 50%RB) Sensor off											
Front side-15mm	20	QPSK 50RB_25	20850/2510	1:1	0.244	-0.08	21.67	23.00	1.358	0.331	Yes
Back side-17mm	20	QPSK 50RB_25	20850/2510	1:1	0.227	-0.03	21.67	23.00	1.358	0.308	Yes
Left side-17mm	20	QPSK 50RB_25	20850/2510	1:1	0.015	0.00	21.67	23.00	1.358	0.020	Yes
Right side-15mm	20	QPSK 50RB_25	20850/2510	1:1	0.083	0.05	21.67	23.00	1.358	0.113	Yes
Bottom side-19mm	20	QPSK 50RB_25	20850/2510	1:1	0.343	0.03	21.67	23.00	1.358	0.466	Yes

LTE B25(Ant0):

ANT0											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data (Separate 10mm 1RB) Sensor on											
Front side	20	QPSK 1RB_0	26140/1860	1:1	0.489	0.09	21.81	23.50	1.476	0.722	Yes
Back side	20	QPSK 1RB_0	26140/1860	1:1	0.390	0.03	21.81	23.50	1.476	0.576	Yes
Left side	20	QPSK 1RB_0	26140/1860	1:1	0.021	0.08	21.81	23.50	1.476	0.031	Yes
Right side	20	QPSK 1RB_0	26140/1860	1:1	0.036	0.08	21.81	23.50	1.476	0.053	Yes
Bottom side	20	QPSK 1RB_0	26140/1860	1:1	0.934	0.02	21.81	23.50	1.476	1.378	No
Bottom side	20	QPSK 1RB_0	26365/1882.5	1:1	1.010	0.17	21.69	23.50	1.517	1.532	No
Bottom side	20	QPSK 1RB_0	26590/1905	1:1	0.975	0.04	21.77	23.50	1.489	1.452	No
Hotspot Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK 50RB_50	26140/1860	1:1	0.463	0.02	21.72	23.00	1.343	0.622	Yes
Back side	20	QPSK 50RB_50	26140/1860	1:1	0.382	0.05	21.72	23.00	1.343	0.513	Yes
Left side	20	QPSK 50RB_50	26140/1860	1:1	0.017	0.04	21.72	23.00	1.343	0.022	Yes
Right side	20	QPSK 50RB_50	26140/1860	1:1	0.035	0.07	21.72	23.00	1.343	0.047	Yes
Bottom side	20	QPSK 50RB_50	26140/1860	1:1	0.951	-0.04	21.72	23.00	1.343	1.277	No
Bottom side	20	QPSK 50RB_50	26365/1882.5	1:1	0.977	-0.03	21.57	23.00	1.390	1.358	No
Bottom side	20	QPSK 50RB_50	26590/1905	1:1	0.918	0.00	21.70	23.00	1.349	1.238	No
Hotspot Test data (Separate 10mm 100%RB) Sensor on											
Bottom side	20	QPSK 100RB_0	26365/1882.5	1:1	0.991	0.02	21.58	23.00	1.387	1.374	No
Bottom side-repeat	20	QPSK 100RB_0	26365/1882.5	1:1	0.985	0.17	21.58	23.00	1.387	1.366	No
Hotspot Test data (Separate 10mm 1RB) Sensor off											
Front side-15mm	20	QPSK 1RB_0	26140/1860	1:1	0.299	0.02	22.51	23.50	1.256	0.376	Yes
Back side-17mm	20	QPSK 1RB_0	26140/1860	1:1	0.227	0.04	22.51	23.50	1.256	0.285	Yes
Left side-17mm	20	QPSK 1RB_0	26140/1860	1:1	0.012	0.07	22.51	23.50	1.256	0.015	Yes
Right side-15mm	20	QPSK 1RB_0	26140/1860	1:1	0.031	0.01	22.51	23.50	1.256	0.039	Yes
Bottom side-19mm	20	QPSK 1RB_0	26140/1860	1:1	0.345	0.11	22.51	23.50	1.256	0.433	Yes
Hotspot Test data (Separate 10mm 50%RB) Sensor off											



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Front side-15mm	20	QPSK 50RB_50	26140/1860	1:1	0.210	-0.15	21.59	23.00	1.384	0.291	Yes
Back side-17mm	20	QPSK 50RB_50	26140/1860	1:1	0.189	0.01	21.59	23.00	1.384	0.261	Yes
Left side-17mm	20	QPSK 50RB_50	26140/1860	1:1	0.008	0.16	21.59	23.00	1.384	0.011	Yes
Right side-15mm	20	QPSK 50RB_50	26140/1860	1:1	0.025	0.08	21.59	23.00	1.384	0.034	Yes
Bottom side-19mm	20	QPSK 50RB_50	26140/1860	1:1	0.300	0.02	21.59	23.00	1.384	0.415	Yes

LTE B30(Ant1):

ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Product Specific 10-g SAR SAR Exclusion
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	10	QPSK 1RB_0	27710/2310	1:1	0.731	0.14	22.80	24.00	1.318	0.964	Yes
Back side	10	QPSK 1RB_0	27710/2310	1:1	0.848	-0.10	22.80	24.00	1.318	1.118	Yes
Left side	10	QPSK 1RB_0	27710/2310	1:1	1.090	0.08	22.80	24.00	1.318	1.437	No
Right side	10	QPSK 1RB_0	27710/2310	1:1	0.024	0.04	22.80	24.00	1.318	0.032	Yes
Top side	10	QPSK 1RB_0	27710/2310	1:1	0.127	0.02	22.80	24.00	1.318	0.167	Yes
Hotspot Test data(Separate 10mm 50%RB)Sensor on											
Front side	10	QPSK 25RB_13	27710/2310	1:1	0.703	0.14	22.67	23.00	1.079	0.758	Yes
Back side	10	QPSK 25RB_13	27710/2310	1:1	0.709	0.03	22.67	23.00	1.079	0.765	Yes
Left side	10	QPSK 25RB_13	27710/2310	1:1	1.030	0.09	22.67	23.00	1.079	1.111	Yes
Right side	10	QPSK 25RB_13	27710/2310	1:1	0.023	0.02	22.67	23.00	1.079	0.025	Yes
Top side	10	QPSK 25RB_13	27710/2310	1:1	0.132	-0.04	22.67	23.00	1.079	0.142	Yes
Hotspot Test data(Separate 10mm 100%RB)Sensor on											
Back side	10	QPSK 50RB_0	27710/2310	1:1	0.690	0.01	22.53	23.00	1.114	0.769	Yes
Left side	10	QPSK 50RB_0	27710/2310	1:1	1.070	-0.01	22.53	23.00	1.114	1.192	Yes
Left side -repeat	10	QPSK 50RB_0	27710/2310	1:1	1.050	-0.05	22.53	23.00	1.114	1.170	Yes
Hotspot Test data(1RB) Sensor off											
Front side-15mm	10	QPSK 1RB_0	27710/2310	1:1	0.430	0.19	23.62	24.00	1.091	0.469	Yes
Back side-17mm	10	QPSK 1RB_0	27710/2310	1:1	0.339	-0.08	23.62	24.00	1.091	0.370	Yes
Left side-17mm	10	QPSK 1RB_0	27710/2310	1:1	0.478	0.00	23.62	24.00	1.091	0.522	Yes
Right side-15mm	10	QPSK 1RB_0	27710/2310	1:1	0.015	-0.08	23.62	24.00	1.091	0.017	Yes
Top side-14mm	10	QPSK 1RB_0	27710/2310	1:1	0.073	0.04	23.62	24.00	1.091	0.080	Yes
Hotspot Test data(50%RB) Sensor off											
Front side-15mm	10	QPSK 25RB_13	27710/2310	1:1	0.331	0.00	22.67	23.00	1.079	0.357	Yes
Back side-17mm	10	QPSK 25RB_13	27710/2310	1:1	0.277	0.12	22.67	23.00	1.079	0.299	Yes
Left side-17mm	10	QPSK 25RB_13	27710/2310	1:1	0.402	0.06	22.67	23.00	1.079	0.434	Yes
Right side-15mm	10	QPSK 25RB_13	27710/2310	1:1	0.013	0.01	22.67	23.00	1.079	0.014	Yes
Top side-14mm	10	QPSK 25RB_13	27710/2310	1:1	0.073	0.00	22.67	23.00	1.079	0.079	Yes

n2(Ant0):

Ant0 Test Record											
Test position	Test mode			Test ch./Freq.	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Product Specific 10-g SAR SAR Exclusion
	BW.	Modulation	RB Size_RB offset								
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	20	QPSK	1_53	376000/1880	0.480	0.02	21.41	23.50	1.618	0.777	Yes
Back side	20	QPSK	1_53	376000/1880	0.380	-0.08	21.41	23.50	1.618	0.615	Yes
Left side	20	QPSK	1_53	376000/1880	0.027	-0.07	21.41	23.50	1.618	0.044	Yes
Right side	20	QPSK	1_53	376000/1880	0.033	0.08	21.41	23.50	1.618	0.054	Yes
Bottom side	20	QPSK	1_53	376000/1880	1.160	-0.08	21.41	23.50	1.618	1.877	No
Bottom side	20	QPSK	1_104	372000/1860	1.160	-0.04	21.36	23.50	1.637	1.899	No
Bottom side	20	QPSK	1_1	380000/1900	1.130	-0.08	21.37	23.50	1.633	1.845	No
Hotspot Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK	50_28	376000/1880	0.482	0.08	21.27	23.50	1.671	0.805	Yes
Back side	20	QPSK	50_28	376000/1880	0.394	0.02	21.27	23.50	1.671	0.658	Yes
Left side	20	QPSK	50_28	376000/1880	0.029	0.08	21.27	23.50	1.671	0.048	Yes
Right side	20	QPSK	50_28	376000/1880	0.036	0.13	21.27	23.50	1.671	0.060	Yes
Bottom side	20	QPSK	50_28	376000/1880	1.240	0.01	21.27	23.50	1.671	2.072	No
Bottom side-repeat	20	QPSK	50_28	376000/1880	1.190	0.01	21.27	23.50	1.671	1.989	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bottom side	20	QPSK	50_28	372000/1860	1.120	-0.02	21.24	23.50	1.683	1.885	No
Bottom side	20	QPSK	50_28	380000/1900	1.090	-0.04	21.25	23.50	1.679	1.830	No
Hotspot Test data(Separate 10mm 100%RB)Sensor on											
Bottom side	20	QPSK	100_0	376000/1880	0.727	-0.10	20.34	21.50	1.306	0.950	Yes
Hotspot Test data(Separate 1RB)Sensor off											
Front side-15mm	20	QPSK	1_1	376000/1880	0.362	-0.04	23.17	23.50	1.079	0.391	Yes
Back side-17mm	20	QPSK	1_1	376000/1880	0.227	0.08	23.17	23.50	1.079	0.245	Yes
Left side-17mm	20	QPSK	1_1	376000/1880	0.022	-0.02	23.17	23.50	1.079	0.024	Yes
Right side-15mm	20	QPSK	1_1	376000/1880	0.039	-0.19	23.17	23.50	1.079	0.042	Yes
Bottom side-19mm	20	QPSK	1_1	376000/1880	0.423	-0.08	23.17	23.50	1.079	0.456	Yes
Hotspot Test data (Separate 50%RB) Sensor off											
Front side-15mm	20	QPSK	50_28	372000/1860	0.334	0.02	22.34	23.50	1.306	0.436	Yes
Back side-17mm	20	QPSK	50_28	372000/1860	0.228	0.12	22.34	23.50	1.306	0.298	Yes
Left side-17mm	20	QPSK	50_28	372000/1860	0.022	0.03	22.34	23.50	1.306	0.029	Yes
Right side-15mm	20	QPSK	50_28	372000/1860	0.040	-0.05	22.34	23.50	1.306	0.052	Yes
Bottom side-19mm	20	QPSK	50_28	372000/1860	0.425	-0.01	22.34	23.50	1.306	0.555	Yes

n25(Ant0):

Ant0 Test Record											
Test position	Test mode			Test ch./Freq.	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Product Specific 10-g SAR SAR Exclusion
	BW.	Modulation	RB Size_RB offset								
Hotspot Test data(Separate 10mm 1RB) Sensor on											
Front side	20	QPSK	1_1	376500/1882.5	0.471	0.07	19.83	23.50	2.328	1.097	Yes
Back side	20	QPSK	1_1	376500/1882.5	0.385	0.04	19.83	23.50	2.328	0.896	Yes
Left side	20	QPSK	1_1	376500/1882.5	0.032	-0.05	19.83	23.50	2.328	0.075	Yes
Right side	20	QPSK	1_1	376500/1882.5	0.039	-0.16	19.83	23.50	2.328	0.091	Yes
Bottom side	20	QPSK	1_1	376500/1882.5	0.827	-0.19	19.83	23.50	2.328	1.925	No
Bottom side	20	QPSK	1_1	372000/1860	0.831	0.05	19.80	23.50	2.344	1.948	No
Bottom side	20	QPSK	1_1	381000/1905	0.876	-0.19	19.82	23.50	2.333	2.044	No
Hotspot Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK	50_28	372000/1860	0.341	0.06	19.87	23.50	2.307	0.787	Yes
Back side	20	QPSK	50_28	372000/1860	0.309	0.06	19.87	23.50	2.307	0.713	Yes
Left side	20	QPSK	50_28	372000/1860	0.029	-0.05	19.87	23.50	2.307	0.067	Yes
Right side	20	QPSK	50_28	372000/1860	0.040	0.02	19.87	23.50	2.307	0.093	Yes
Bottom side	20	QPSK	50_28	372000/1860	0.898	-0.03	19.87	23.50	2.307	2.071	No
Bottom side-repeat	20	QPSK	50_28	372000/1860	0.833	-0.02	19.87	23.50	2.307	1.922	No
Bottom side	20	QPSK	50_28	376500/1882.5	0.838	-0.17	19.77	23.50	2.360	1.978	No
Bottom side	20	QPSK	50_28	381000/1905	0.792	-0.19	19.82	23.50	2.333	1.848	No
Hotspot Test data (Separate 10mm 100%RB) Sensor on											
Bottom side	20	QPSK	100_0	381000/1905	0.650	-0.09	18.81	21.50	1.858	1.208	No
Hotspot Test data(Separate 1RB) Sensor off											
Front side-15mm	20	QPSK	1_1	376500/1882.5	0.345	0.07	21.66	23.50	1.528	0.527	Yes
Back side-17mm	20	QPSK	1_1	376500/1882.5	0.211	0.06	21.66	23.50	1.528	0.322	Yes
Left side-17mm	20	QPSK	1_1	376500/1882.5	0.021	-0.15	21.66	23.50	1.528	0.032	Yes
Right side-15mm	20	QPSK	1_1	376500/1882.5	0.043	0.17	21.66	23.50	1.528	0.066	Yes
Bottom side-19mm	20	QPSK	1_1	376500/1882.5	0.466	0.00	21.66	23.50	1.528	0.712	Yes
Hotspot Test data (Separate 50%RB) Sensor off											
Front side-15mm	20	QPSK	50_28	372000/1860	0.306	-0.16	21.74	23.50	1.500	0.459	Yes
Back side-17mm	20	QPSK	50_28	372000/1860	0.201	0.08	21.74	23.50	1.500	0.301	Yes
Left side-17mm	20	QPSK	50_28	372000/1860	0.023	-0.04	21.74	23.50	1.500	0.035	Yes
Right side-15mm	20	QPSK	50_28	372000/1860	0.028	-0.01	21.74	23.50	1.500	0.042	Yes
Bottom side-19mm	20	QPSK	50_28	372000/1860	0.461	0.12	21.74	23.50	1.500	0.691	Yes




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

5.1 Proximity Sensor Triggering Test

Proximity sensor triggering distances:

The Proximity sensor triggering was applied to WWAN antenna. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

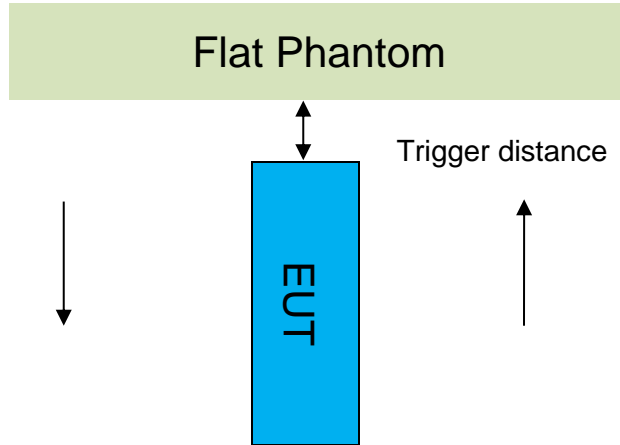

Proximity Sensor Triggering Distance(mm)		
Antenna	Ant0	Ant1
Band	WCDMA B2, LTE B2/7/25, N2/25/66	WCDMA B2, LTE B2/7/25/30, N2/25/66
Position	Front/Back/Left/Right/Bottom	Front/Back/Left/Right/Top
Minimum	Front 16 Back 18 Left 18 Right 16 Bottom 20	Front 16 Back 18 Left 18 Right 16 Top 15
Required SAR Test	Front 15 Back 17 Left 17 Right 15 Bottom 19	Front 15 Back 17 Left 17 Right 15 Top 14


Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



● DUT Moving Toward(Trigger)the Phantom

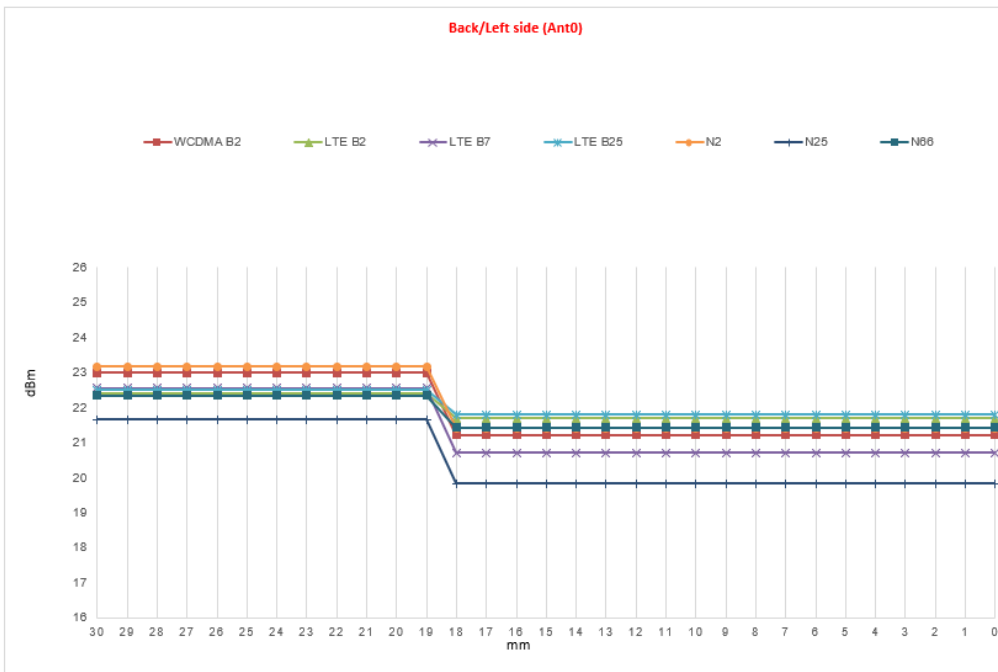

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

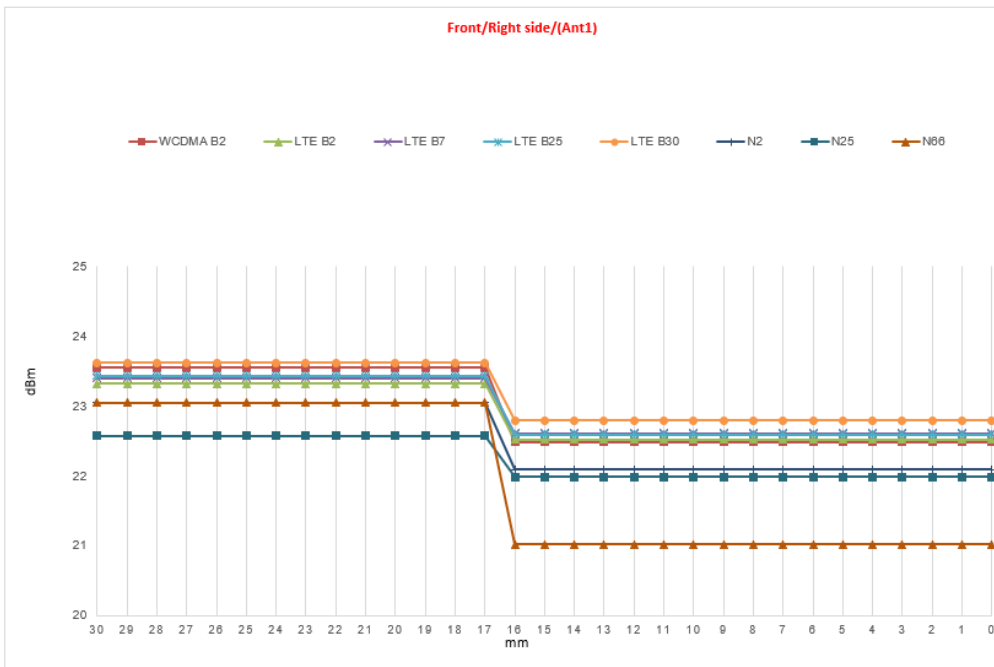



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

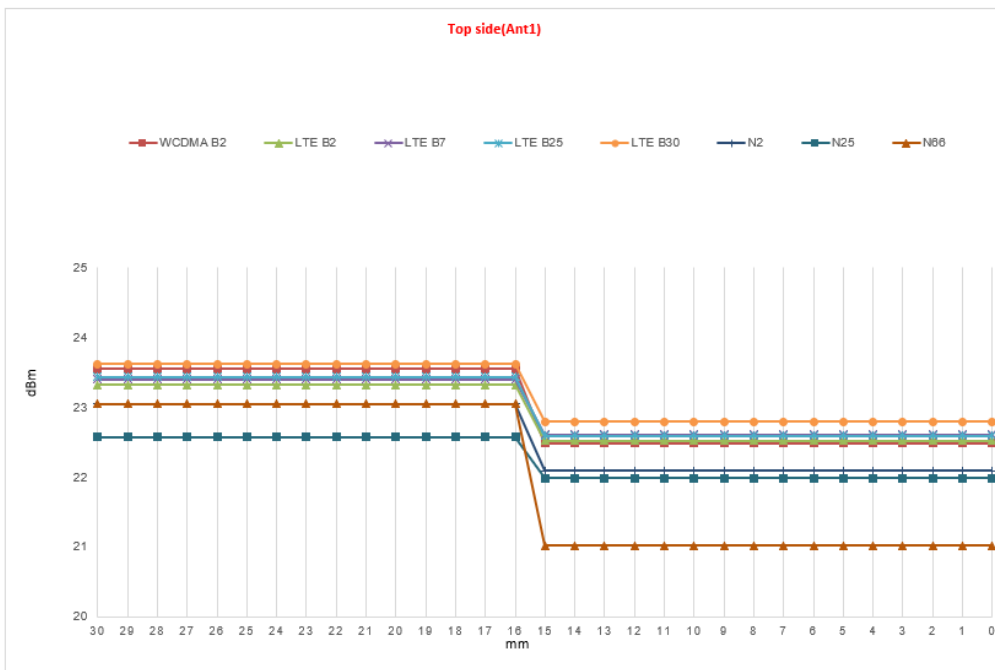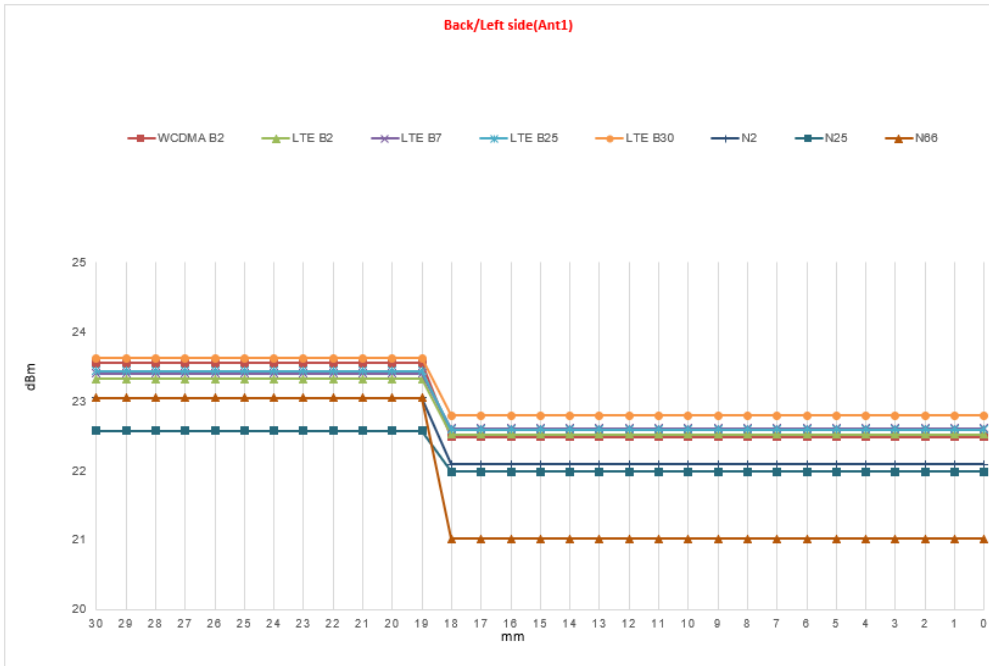


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



● DUT Moving Away(Release) from the Phantom

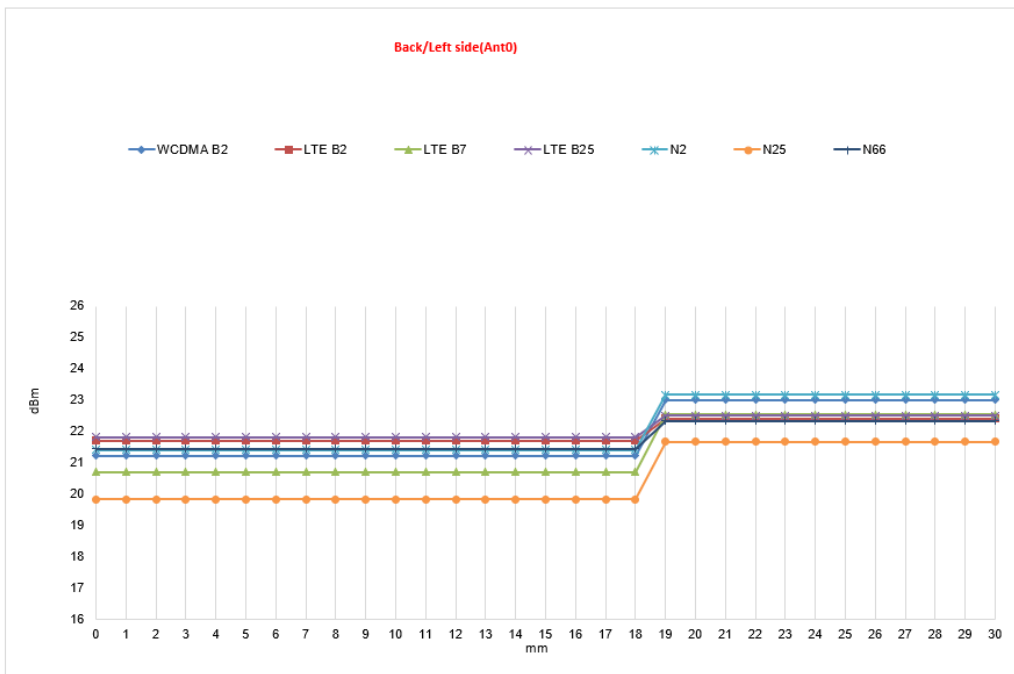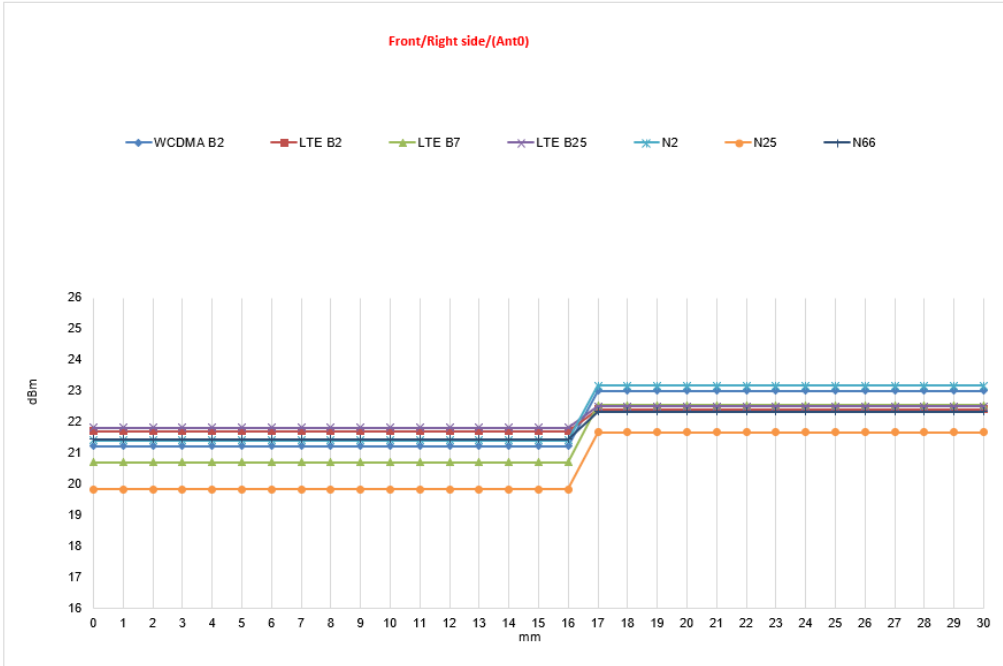

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

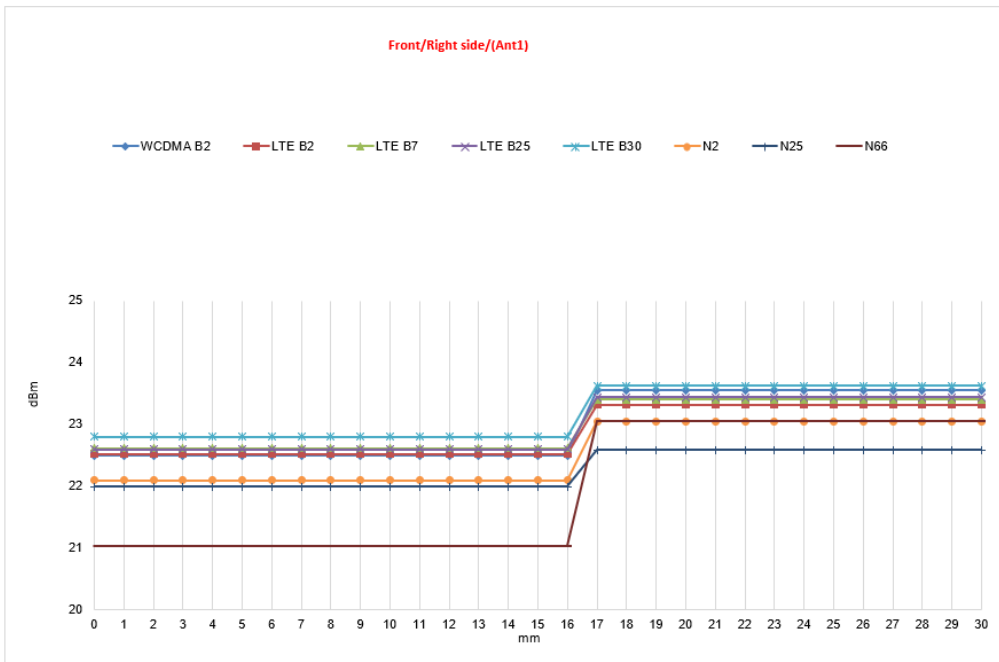

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

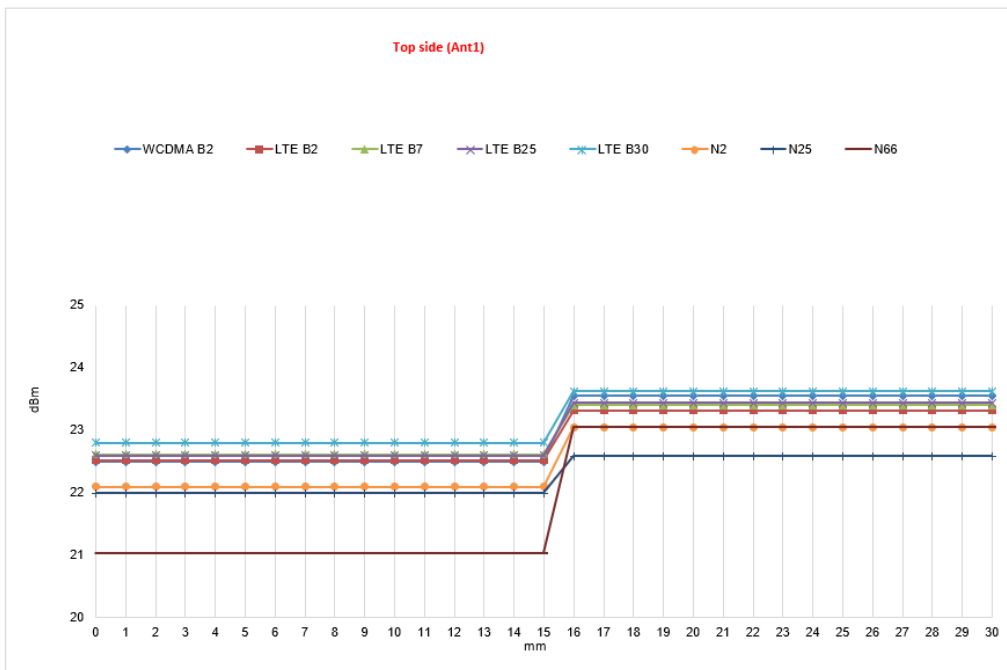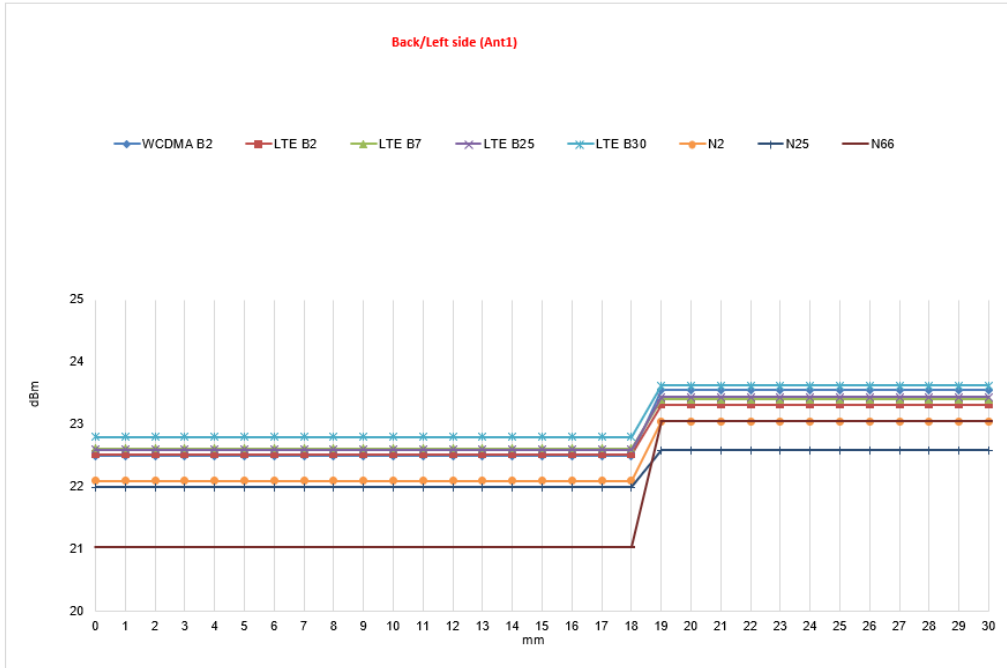

Proximity sensor coverage

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

Device tilt angle influences to proximity sensor triggering

The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

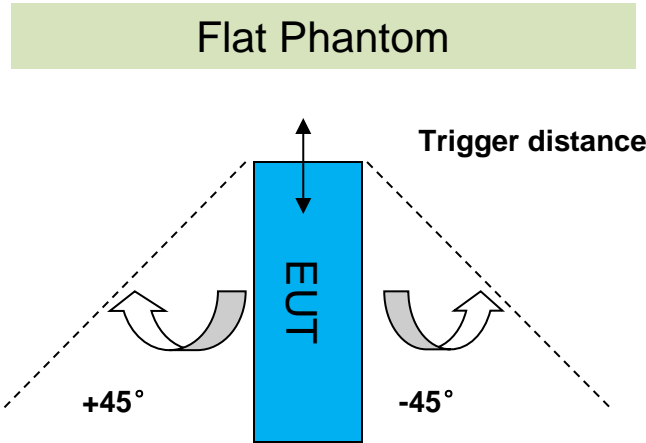

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering for Top Side													
Band (MHz)	Minimum trigger distance Per KDB616217§6.2	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status										
			-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°
Ant0	Left 18mm Right 16mm Bottom 20mm	Left 18mm Right 16mm Bottom 20mm	on	on	on	on	on	on	on	on	on	on	on
Ant1	Left 18mm Right 16mm Top 15mm	Left 18mm Right 16mm Top 15mm	on	on	on	on	on	on	on	on	on	on	on



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ ⁺ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate			Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose		
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 3: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6.1.2 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in below table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp.($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	42.495	0.884	22.1	2021/4/23
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	41.649	0.895	22.1	2021/5/3
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	42.786	0.879	22.1	2021/5/17
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	40.83	0.887	22.1	2021/4/13
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	42.595	0.93	22.1	2021/4/16
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	43.352	0.913	22.1	2021/4/20
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	42.422	0.898	22.1	2021/5/16
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.238	1.338	22.2	2021/5/20
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.419	1.345	22.2	2021/5/22
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.321	1.416	22.3	2021/5/20
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.173	1.376	22.3	2021/5/25
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	41.604	1.392	22.3	2021/5/27
2300 Head	2300	39.5 (37.53~41.48)	1.67 (1.59~1.75)	39.073	1.706	22.1	2021/5/22
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.744	1.855	22.0	2021/5/1
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	38.901	1.961	22.1	2021/5/7
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	39.388	2	22.1	2021/6/1
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	38.475	1.909	22.1	2021/6/3
3500 Head	3500	37.9 (36.01~39.8)	2.91 (2.76~3.06)	38.234	2.993	22.1	2021/5/29
3700 Head	3700	37.7 (35.82~39.59)	3.12 (2.96~3.28)	37.194	3.069	22.3	2021/5/14
3700 Head	3700	37.7 (35.82~39.59)	3.12 (2.96~3.28)	37.612	3.225	22.1	2021/5/30
3900 Head	3900	37.5 (35.63~39.38)	3.32 (3.15~3.49)	36.483	3.283	22.3	2021/5/14
5250Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	36.518	4.672	22.2	2021/5/4
5600 Head	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	35.65	5.052	22.2	2021/5/5
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	35.47	5.244	22.2	2021/5/6


Table 4: Measurement result of Tissue electric parameters



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15±0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

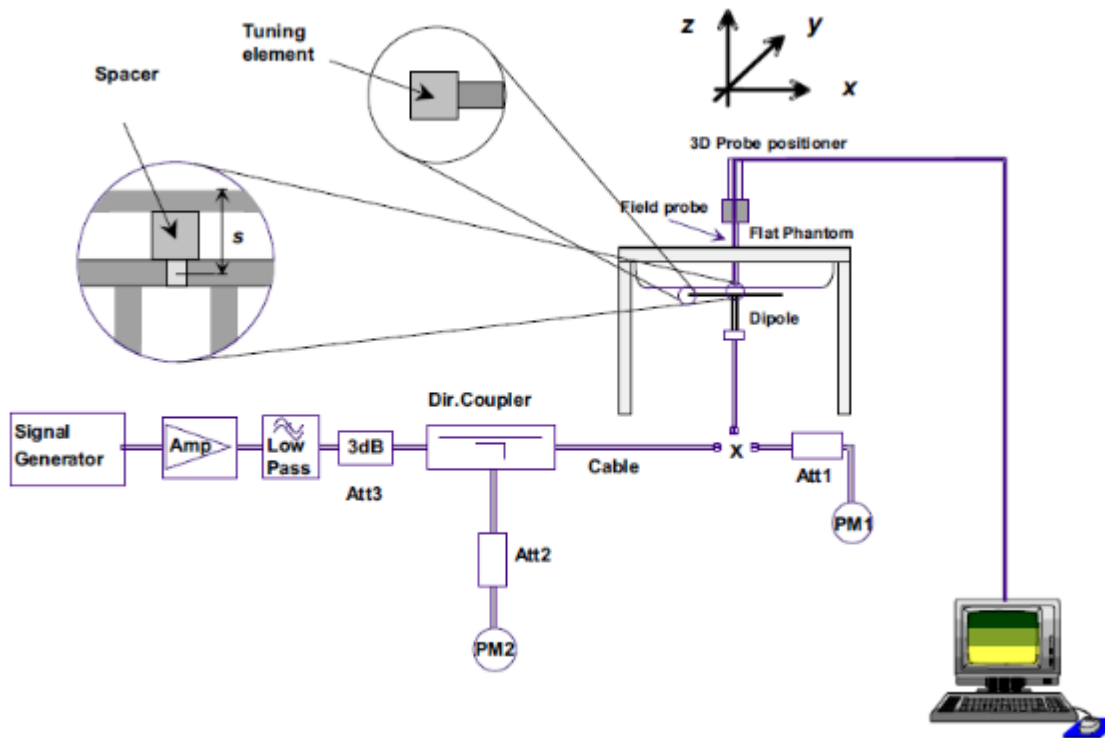

F-12. the microwave circuit arrangement used for SAR system check



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V3	Head	2.06	1.36	8.24	5.44	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2021/4/23
D750V3	Head	2.11	1.38	8.44	5.52	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2021/5/3
D750V3	Head	2.12	1.37	8.48	5.48	8.39 (7.55~9.23)	5.63 (5.07~6.19)	22.1	2021/5/17
D835V2	Head	2.35	1.57	9.4	6.28	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.1	2021/4/13
D835V2	Head	2.46	1.65	9.84	6.6	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.1	2021/4/16
D835V2	Head	2.39	1.57	9.56	6.28	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.1	2021/4/20
D835V2	Head	2.50	1.63	10.00	6.52	9.64 (8.68~10.60)	6.29 (5.66~6.92)	22.1	2021/5/16
D1750V2	Head	9.29	4.94	37.16	19.76	36.3 (32.67~39.93)	19.2 (17.28~21.12)	22.2	2021/5/20
D1750V2	Head	9.36	4.98	37.44	19.92	36.3 (32.67~39.93)	19.2 (17.28~21.12)	22.2	2021/5/22
D1900V2	Head	10.50	5.42	42.00	21.68	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2021/5/20
D1900V2	Head	10.20	5.26	40.80	21.04	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2021/5/25
D1900V2	Head	9.79	5.15	39.16	20.6	39.3 (35.37~43.23)	20.2 (18.18~22.22)	22.3	2021/5/27
D2300V2	Head	12.70	6.03	50.8	24.12	49.3 (44.37~54.23)	23.1 (20.79~25.41)	22.0	2021/5/22
D2450V2	Head	14.20	6.52	56.80	26.08	51.9 (46.71~57.09)	23.8 (21.42~26.18)	22.0	2021/5/1
D2600V2	Head	15.00	6.62	60.00	26.48	56.8 (51.12~62.48)	24.9 (22.41~27.39)	22.1	2021/5/7
D2600V2	Head	13.90	6.23	55.6	24.92	56.8 (51.12~62.48)	24.9 (22.41~27.39)	22.1	2021/6/1
D2600V2	Head	13.30	5.94	53.20	23.76	56.8 (51.12~62.48)	24.9 (22.41~27.39)	22.1	2021/6/3
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D3500V2	Head(3.5 GHz)	6.55	2.51	65.50	25.10	66.5 (59.85~73.15)	25.1 (22.59~27.61)	22.1	2021/5/29
D3700V2	Head(3.7 GHz)	6.92	2.57	69.20	25.70	67.8 (61.02~74.58)	24.7 (22.23~27.17)	22.3	2021/5/14
	Head(3.7 GHz)	6.46	2.39	64.60	23.90	67.8 (61.02~74.58)	24.7 (22.23~27.17)	22.1	2021/5/30
D3900V2	Head(3.9 GHz)	6.64	2.35	66.40	23.50	71.1 (63.99~78.21)	24.6 (22.14~27.06)	22.3	2021/5/14
D5GHzV2	Head(5.25 GHz)	7.30	2.09	73.00	20.90	75.2 (67.68~82.72)	21.5 (19.35~23.65)	22.2	2021/5/4
	Head(5.6 GHz)	7.73	2.20	77.30	22.00	80 (72~88)	22.7 (20.43~24.97)	22.2	2021/5/5
	Head(5.75 GHz)	7.79	2.22	77.90	22.20	78.7 (70.83~86.57)	22.3 (20.07~24.53)	22.2	2021/5/6

Table 5: SAR System Check Result



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
Shenzhen Branch 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 33 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 33 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.2 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

3) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Sub-test	βc	Bd	$\beta d(SF)$	$\beta c/\beta d$	βhs	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ Ahs = $\beta hs/\beta c = 30/15$ $\beta hs = 30/15 * \beta c$
Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta NACK = 8$ (Ahs=30/15) with $\beta hs = 30/15 * \beta c$, and $\Delta CQI = 7$ (Ahs=24/15) with $\beta hs = 24/15 * \beta c$.
Note3: CM=1 for $\beta c/\beta d = 12/15$, $\beta hs/\beta c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6: settings of required H-Set 1 QPSK acc. to 3GPP 34.121



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum H S-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Sub-test ^⓪	$\beta_{\text{c}}^{\text{⓪}}$	$\beta_{\text{d}}^{\text{⓪}}$	β_{d} (SF) ^⓪	$\beta_{\text{c}}/\beta_{\text{d}}^{\text{⓪}}$	$\beta_{\text{hs}}^{\text{⓪}}$ ⁽¹⁾	$\beta_{\text{ec}}^{\text{⓪}}$	$\beta_{\text{ed}}^{\text{⓪}}$	β_{c} (SF) ^⓪	$\beta_{\text{ed}}^{\text{⓪}}$ (code) ^⓪	CM ⁽²⁾ (dB) ^⓪	MP R ^⓪ (dB) ^⓪	AG ⁽⁴⁾ Inde x ^⓪	E- TFC I ^⓪
1 ^⓪	11/15 ⁽³⁾	15/15 ⁽³⁾	64 ^⓪	11/15 ⁽³⁾	22/15 ^⓪	209/225 ^⓪	1039/225 ^⓪	4 ^⓪	1 ^⓪	1.0 ^⓪	0.0 ^⓪	20 ^⓪	75 ^⓪
2 ^⓪	6/15 ^⓪	15/15 ^⓪	64 ^⓪	6/15 ^⓪	12/15 ^⓪	12/15 ^⓪	94/75 ^⓪	4 ^⓪	1 ^⓪	3.0 ^⓪	2.0 ^⓪	12 ^⓪	67 ^⓪
3 ^⓪	15/15 ^⓪	9/15 ^⓪	64 ^⓪	15/9 ^⓪	30/15 ^⓪	30/15 ^⓪	$\beta_{\text{ed1}}:47/15^{\text{⓪}}$ $\beta_{\text{ed2}}:47/15^{\text{⓪}}$	4 ^⓪	2 ^⓪	2.0 ^⓪	1.0 ^⓪	15 ^⓪	92 ^⓪
4 ^⓪	2/15 ^⓪	15/15 ^⓪	64 ^⓪	2/15 ^⓪	4/15 ^⓪	2/15 ^⓪	56/75 ^⓪	4 ^⓪	1 ^⓪	3.0 ^⓪	2.0 ^⓪	17 ^⓪	71 ^⓪
5 ^⓪	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 ^⓪	15/15 ⁽⁴⁾	30/15 ^⓪	24/15 ^⓪	134/15 ^⓪	4 ^⓪	1 ^⓪	1.0 ^⓪	0.0 ^⓪	21 ^⓪	81 ^⓪

Note 1: ΔACK , ΔNACK and $\Delta \text{CQI} = 8$ $A_{\text{hs}} = \beta_{\text{hs}}/\beta_{\text{c}} = 30/15$ $\beta_{\text{hs}} = 30/15 * \beta_{\text{c}}^{\text{⓪}}$
Note 2: CM = 1 for $\beta_{\text{c}}/\beta_{\text{d}} = 12/15$, $\beta_{\text{hs}}/\beta_{\text{c}} = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference^⓪
Note 3 : For subtest 1 the $\beta_{\text{c}}/\beta_{\text{d}}$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_{\text{c}} = 10/15$ and $\beta_{\text{d}} = 15/15^{\text{⓪}}$
Note 4 : For subtest 5 the $\beta_{\text{c}}/\beta_{\text{d}}$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_{\text{c}} = 14/15$ and $\beta_{\text{d}} = 15/15^{\text{⓪}}$
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g^⓪
Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.^⓪

Table 8: Subtests for UMTS Release 6 HSUPA

UE Category	E-DCH Codes Transmitted	Number of HARQ Processes	of	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4		10	4	7110	0.7296
2	2	8		2	4	2798	1.4592
	2	4		10	4	14484	
3	2	4		10	4	14484	1.4592
4	2	8		2	2	5772	2.9185
	2	4		10	2	20000	2.00
5	2	4		10	2	20000	2.00
6 (No DPDCH)	4	8		10	2SF2&2SF	11484	5.76
	4	4		2	4	20000	2.00
7 (No DPDCH)	4	8		2	2SF2&2SF	22996	?
	4	4		10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 9: HSUPA UE category



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

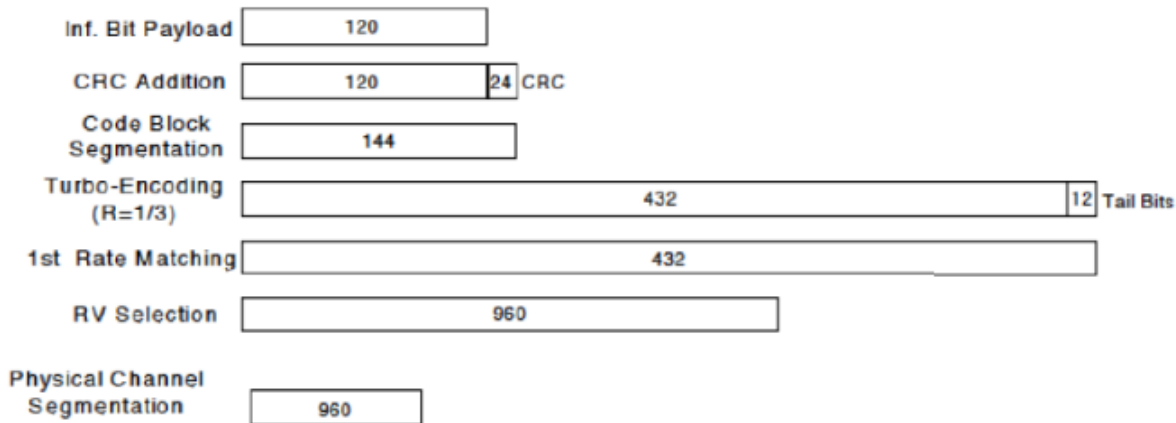


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	$\beta_d \cdot (SF)$ ^o	β_c / β_d ^o	$\beta_{hs} (1)$ ^o	CM(dB)(2) ^o	MPR : (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1 : ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2 : CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

d) HSPA+

Per KDB941225D01, SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS+} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{nr} = 30/15 * \beta_c$

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0)

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.3.1 Duty cycle


1) Wi-Fi 2.4GHz 802.11b:

Duty cycle=12.39/12.49=99.20%

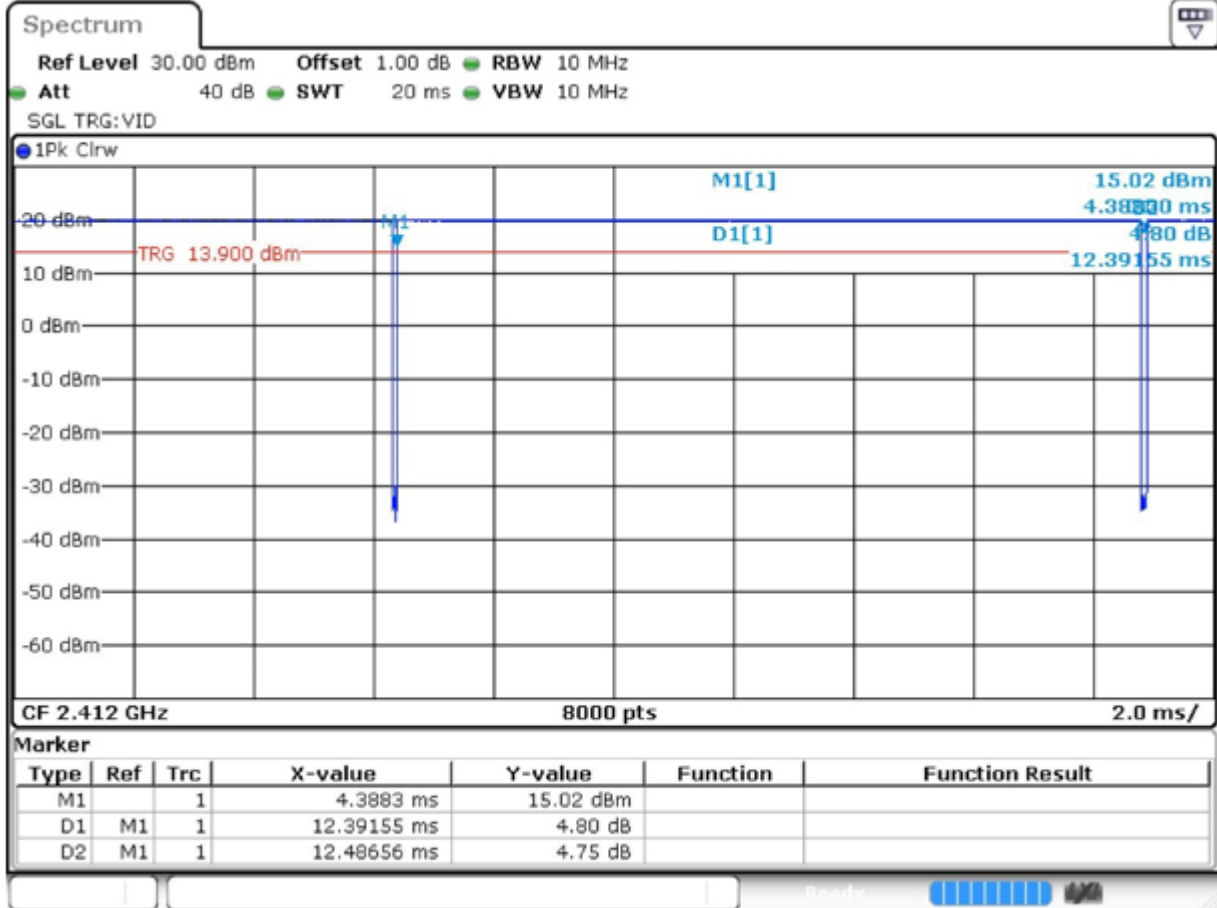

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2) Wi-Fi 5GHz 802.11a:
 Duty cycle=2.05/2.09=98.09%

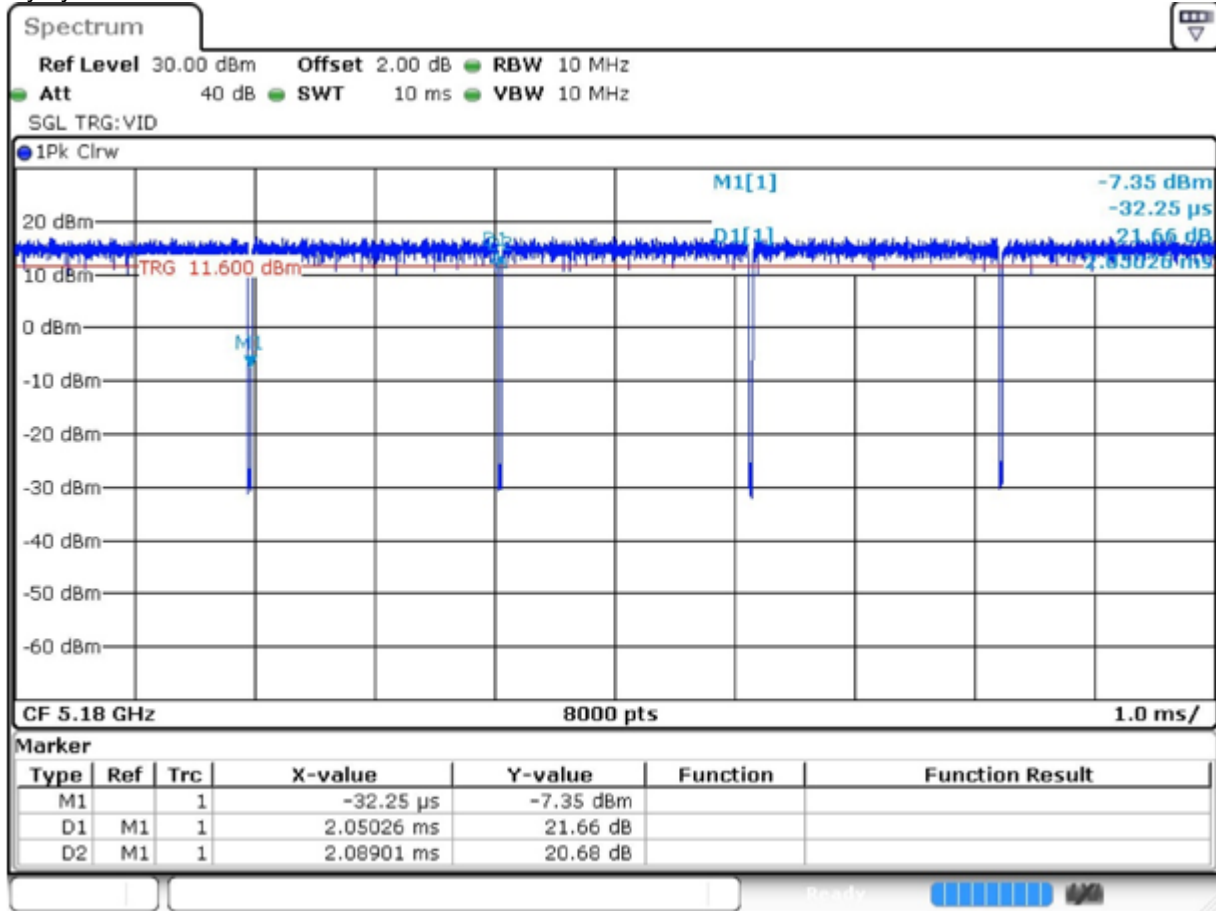

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.3.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.3.6 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

- **OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements**

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.2.4 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8821C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

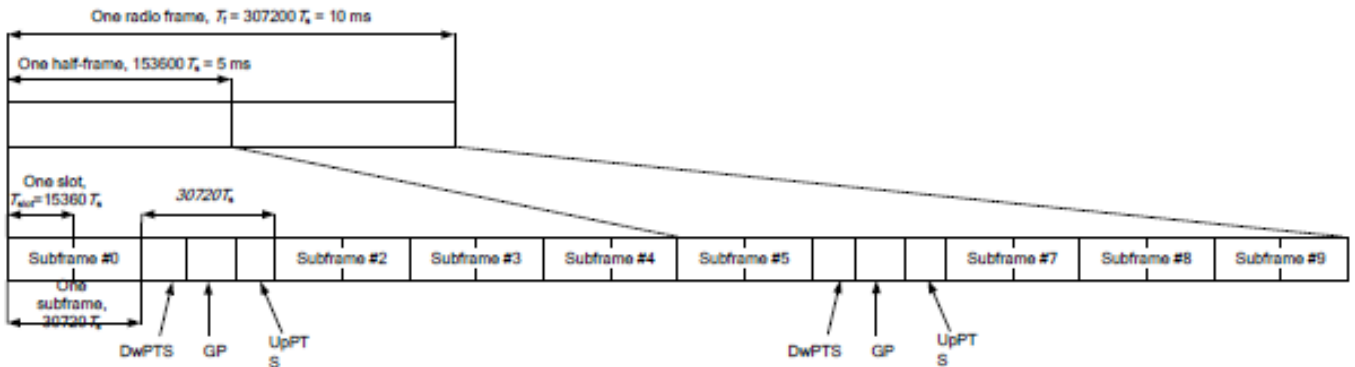

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts	4384.Ts	5120.Ts	7680.Ts	4384.Ts	5120.Ts
5	6592.Ts			20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-		-
9	13168.Ts			-		-

Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 3

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



7.2.5 NR Band Test Configuration

1. NR Band n2/n5/n25/n38/n41/n66/n71/n77/n78 support SA mode and NSA mode. LTE+NR Band operations are possible only with LTE under EN-DC mode and the operations are possible as following table:

Band/ Antenna	n2		n5		n25		n38		n41		n66		n71		n77		n78	
	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant1	Ant3	Ant1	Ant3	Ant0	Ant1	Ant0	Ant1	Ant2	Ant3	Ant2	Ant3
LTE B2	Ant0			v		v						v		v	v	v	v	v
	Ant1		v		v						v		v		v	v	v	v
LTE B5	Ant0		v					v				v						
	Ant1	v						v			v							
LTE B7	Ant0			v														
	Ant1			v														
LTE B12	Ant0		v			v		v		v		v			v	v	v	v
	Ant1	v				v		v		v	v				v	v	v	v
LTE B13	Ant0		v															
	Ant1	v																
LTE B14	Ant0		v									v			v	v		
	Ant1	v									v				v	v		
LTE B66	Ant0		v		v			v		v		v		v	v	v	v	v
	Ant1	v		v		v		v		v	v		v		v	v	v	v

2. The general information supported by the NR band is as following table:

Band		n2	n5	n25	n38	n41	n66	n71	n77	n78
NR mode	SA	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	NSA	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Modulation	DFT-s-OFDM	PI/2 BPSK	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		QPSK	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		16QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		64QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		256QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	CP-OFDM	QPSK	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		16QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		64QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		256QAM	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Duty Cycle	100%	100%	100%	25%	25%	100%	100%	25%

Band	SCS	Bandwidth													
		5Mhz	10Mhz	15Mhz	20Mhz	25Mhz	30Mhz	40Mhz	50Mhz	60Mhz	70Mhz	80Mhz	90Mhz	100Mhz	
n2	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
n5	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
n25	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
n38	15KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	30KHZ	N/A	Yes	N/A	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

n41	15KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30KHZ	N/A	Yes	N/A	Yes	N/A	N/A	Yes	Yes	Yes	N/A	Yes	Yes	Yes
n66	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
n71	15KHZ	Yes	Yes	Yes	Yes	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
n77	15KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30KHZ	N/A	Yes	N/A	Yes	N/A	Yes	Yes	Yes	Yes	N/A	Yes	Yes	Yes
n78	15KHZ	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30KHZ	N/A	Yes	N/A	Yes	N/A	Yes	Yes	Yes	Yes	N/A	Yes	Yes	Yes

3. NR Band operation does not have the fixed UL/DL frame structure, but during the transmitting/receiving it can be operated in the slot structure of 100% UL duty cycle, we are proposing the conservative way to evaluate SAR at 100% duty cycle. For the purpose of test NR Band standalone SAR, and also test SAR level at 100% TX duty cycle.

4. For TDD NR Band operation and final implementation, TDD NR slot configuration extended cyclic prefix uplink duty cycle =25%; However, EN-DC transmission on test DUT is only possible using FTM mode with continuous transmission (duty cycle =100%). SAR testing was performed using FTM mode at maximum output power adjusted for duty cycle to mimic final 25% cycle

Band	5G NR Antenna Power Level (dBm)					
	Max Tune up (Not Adjusted for duty cycle)			Max Tune up (Adjusted for duty cycle 25%)		
	Ant1	Ant2	Ant3	Ant1	Ant2	Ant3
NR Band 38	23.5	/	23.5	17.5	/	17.5
NR Band 41	26.0	/	26.0	20.0	/	20.0
NR Band 77	/	23.0	23.5	/	17.0	17.5
NR Band 78	/	25.0	25.0	/	19.0	19.0

5. For EN-DC SAR, as the existing SAR test system can not test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative “max + max” multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink EN-DC SAR from standalone SAR test results of each LTE and NR EN-DC component band and the conservative “max + max” multi-Tx method to combine the scaled SAR value from each EN-DC component band as the inter-band Uplink EN-DC SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report.

Since the maximum output power of the LTE EN-DC band is ≤ the LTE Band, the SAR data of the LTE Band is used instead of the SAR data of the LTE EN-DC band.

6. For the SAR test data of the NR mode, Since the maximum output power of the SA mode are ≤ the NSA mode, the SAR data of the NSA mode are used instead of the SAR data of the SA mode.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
- a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 3GPP 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, for PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the PI/2 BPSK/16QAM/64QMA/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest SCS and largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller SCS/bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8. MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS 38.101-1 Section 6.2.2 under Table 6.2.2 -1.

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	PI/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0^2
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability powerBoosting-pi2BPSK and if the IE powerBoostPi2BPSK is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE powerBoostPi2BPSK is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

9. For FDD NR Band operation does not have the fixed UL/DL frame structure, but during the transmitting/ receiving it can be operated in the slot structure of 100% UL duty cycle, we are proposing the conservative way to evaluate SAR at 100% duty cycle. For the purpose of test NR Band standalone SAR, and also test SAR level at 100% TX duty cycle.

10. For 5G NR Sub6GHz SISO Mode, SAR Test plan as below:

1) For 5G NR NSA mode with the same UL EN_DC combination but different DL EN_DC combinations, eg: EN-DC configuration: UL DC_7A_n5 (UL two bands) with DL DC_7C_n5 (DL two bands)

a) The UL EN-DC configuration, including the Tx antenna configuration, RF path, the channel bandwidth and other operating parameters are the same.

b) The maximum output power, including tolerance, for the UL EN-DC configuration with DL two or more bands must be \leq the same UL EN-DC configuration with DL two bands only to qualify for the SAR test exclusion.

11. For EN-DC SAR, as the existing SAR test system cannot test the multiple different frequency bands simultaneous Transmission SAR at the same time, we suggest that the conservative “max + max” multi-Tx and SAR scaling method can be used to evaluate the inter-band Uplink EN-DC SAR from standalone SAR test results of each LTE and NR EN-DC component band and the conservative “max + max” multi-Tx method to combine the scaled SAR value from each EN-DC component band as the inter-band Uplink EN-DC SAR. All Simultaneous Transmission Scenarios will be evaluated independently in the final SAR report.

12. When the reported SAR for and EN DC configuration is greater than 1.2 W/kg, EN DC SAR is also required for other NR based test channels.

13. EN DC SAR is also required for standalone NR configurations greater than 1.2 W/kg when scaled to the EN DC power level.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8 Test Result

8.1 Measurement of RF conducted Power

Note: The detailed conducted power table can refer to Appendix E.

8.1.1 Conducted Power of GSM

Note:

- 1) . CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
 Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8
- 3) . When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used

8.1.2 Conducted Power of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.1.3 Conducted Power of LTE

Note: The detailed conducted power table can refer to Appendix E.

8.1.4 Conducted Power of Uplink & Downlink LTE CA

The following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

Power test equipment: Anritsu Radio Communication Analyzer MT8821C were used.

8.1.4.1 Conducted Power of uplink LTE CA

Note:

- 1) The device supports Inter-band uplink LTE CA for CA_2A-12A, CA_4A-12A with two component carriers in the uplink.
- 2) According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
- 3) In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs.
- 4) Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05.

8.1.4.2 Conducted Power of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

Power test equipment: Anritsu Radio Communication Analyzer MT8821C

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V15.4.0. The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521-1 V14.4.0. According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing.

The conducted power measurement results of downlink LTE CA Conducted Power are as below, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing

In applying the existing power measurement procedures for DL CA SAR test exclusion, the configurations that require power measurements are highlighted in the table as below:

Note:

The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.1.5 Conducted Power of NR

Note: The detailed conducted power table can refer to Appendix E.


8.1.6 Conducted Power of WIFI

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

8.1.7 Conducted Power of BT

BT DH5 Duty Cycle=2.89/3.73 =77.48%

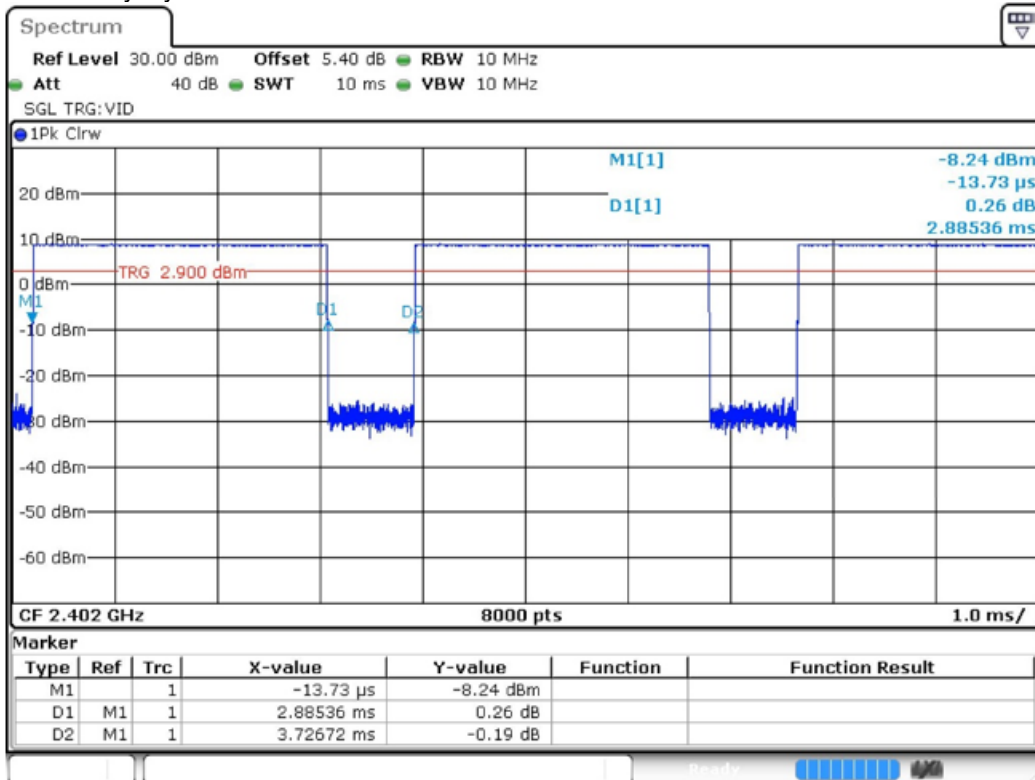

Note:

- 1) The conducted power of BT is measured with RMS detector.



8.2 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR test for the other 802.11 modes are not required.
- 4) For Wi-Fi 5G, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is $\leq 1.2\text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration.
- 5) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 6) The EN-DC is reduced by XdB therefore power (the power reduced can be refer to Appendix E) and SAR was estimated based on standalone results.
- 7) The Simultaneous is reduced by XdB therefore power (the power reduced can be refer to Appendix E) and SAR was estimated based on standalone results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.2.1 SAR Result of GSM850

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.440	0.16	32.24	33.50	1.337	0.588	22.1
Left tilted	GSM	190/836.6	1:8.3	0.067	0.01	32.24	33.50	1.337	0.090	22.1
Right cheek	GSM	190/836.6	1:8.3	0.295	0.16	32.24	33.50	1.337	0.394	22.1
Right tilted	GSM	190/836.6	1:8.3	0.060	-0.10	32.24	33.50	1.337	0.080	22.1
Body worn Test data(Separate 10mm)										
Front side	GSM	190/836.6	1:8.3	0.387	0.07	32.24	33.50	1.337	0.517	22.1
Back side	GSM	190/836.6	1:8.3	0.364	-0.17	32.24	33.50	1.337	0.487	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 3TS	190/836.6	1:2.77	0.203	0.03	29.19	29.50	1.074	0.218	22.1
Back side	GPRS 3TS	190/836.6	1:2.77	0.216	0.04	29.19	29.50	1.074	0.232	22.1
Left side	GPRS 3TS	190/836.6	1:2.77	0.288	-0.08	29.19	29.50	1.074	0.309	22.1
Right side	GPRS 3TS	190/836.6	1:2.77	0.008	0.06	29.19	29.50	1.074	0.008	22.1
Top side	GPRS 3TS	190/836.6	1:2.77	0.013	0.03	29.19	29.50	1.074	0.014	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.092	-0.08	33.07	33.50	1.104	0.102	22.1
Left tilted	GSM	190/836.6	1:8.3	0.069	0.08	33.07	33.50	1.104	0.076	22.1
Right cheek	GSM	190/836.6	1:8.3	0.154	0.04	33.07	33.50	1.104	0.170	22.1
Right tilted	GSM	190/836.6	1:8.3	0.112	-0.09	33.07	33.50	1.104	0.124	22.1
Body worn Test data(Separate 10mm)										
Front side	GSM	190/836.6	1:8.3	0.377	-0.04	33.07	33.50	1.104	0.416	22.1
Back side	GSM	190/836.6	1:8.3	0.352	0.06	33.07	33.50	1.104	0.389	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 3TS	190/836.6	1:2.77	0.382	-0.06	28.82	29.50	1.169	0.447	22.1
Back side	GPRS 3TS	190/836.6	1:2.77	0.383	-0.02	28.82	29.50	1.169	0.448	22.1
Left side	GPRS 3TS	190/836.6	1:2.77	0.079	0.19	28.82	29.50	1.169	0.092	22.1
Right side	GPRS 3TS	190/836.6	1:2.77	0.216	-0.04	28.82	29.50	1.169	0.253	22.1
Bottom side	GPRS 3TS	190/836.6	1:2.77	0.371	-0.18	28.82	29.50	1.169	0.434	22.1
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	GSM	190/836.6	1:8.3	0.412	0.03	32.24	33.50	1.337	0.551	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	GSM	190/836.6	1:8.3	0.383	0.01	32.24	33.50	1.337	0.512	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	GPRS 3TS	190/836.6	1:2.77	0.271	0.12	29.19	29.50	1.074	0.291	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	GSM	190/836.6	1:8.3	0.144	0.02	33.07	33.50	1.104	0.159	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	GSM	190/836.6	1:8.3	0.359	0.11	33.07	33.50	1.104	0.396	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Back side	GPRS 3TS	190/836.6	1:2.77	0.381	0.14	28.82	29.50	1.169	0.446	22.1

Table 11: SAR of GSM850 for Head and Body



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.2 SAR Result of GSM1900

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.396	0.13	27.67	28.00	1.079	0.427	22.3
Left tilted	GSM	661/1880	1:8.3	0.147	0.07	27.67	28.00	1.079	0.159	22.3
Right cheek	GSM	661/1880	1:8.3	0.872	-0.03	27.67	28.00	1.079	0.941	22.3
Right tilted	GSM	661/1880	1:8.3	0.221	-0.02	27.67	28.00	1.079	0.238	22.3
Right cheek	GSM	512/1850.2	1:8.3	0.842	0.04	27.09	28.00	1.233	1.038	22.3
Right cheek-repeat	GSM	512/1850.2	1:8.3	0.822	0.05	27.09	28.00	1.233	1.014	22.3
Right cheek	GSM	810/1909.8	1:8.3	0.904	0.08	27.67	28.00	1.079	0.975	22.3
Body worn Test data(Separate 10mm)										
Front side	GSM	661/1880	1:8.3	0.118	0.07	29.14	30.00	1.219	0.144	22.3
Back side	GSM	661/1880	1:8.3	0.131	0.05	29.14	30.00	1.219	0.160	22.3
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.346	0.12	24.73	25.00	1.064	0.368	22.3
Back side	GPRS 4TS	661/1880	1:2.075	0.406	0.12	24.73	25.00	1.064	0.432	22.3
Left side	GPRS 4TS	661/1880	1:2.075	0.529	0.06	24.73	25.00	1.064	0.563	22.3
Right side	GPRS 4TS	661/1880	1:2.075	0.001	-0.13	24.73	25.00	1.064	0.001	22.3
Top side	GPRS 4TS	661/1880	1:2.075	0.129	0.16	24.73	25.00	1.064	0.137	22.3
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.012	0.07	28.60	30.00	1.380	0.016	22.3
Left tilted	GSM	661/1880	1:8.3	0.007	0.05	28.60	30.00	1.380	0.009	22.3
Right cheek	GSM	661/1880	1:8.3	0.006	0.01	28.60	30.00	1.380	0.009	22.3
Right tilted	GSM	661/1880	1:8.3	0.006	0.09	28.60	30.00	1.380	0.008	22.3
Body worn Test data(Separate 10mm)										
Front side	GSM	661/1880	1:8.3	0.216	0.07	28.60	30.00	1.380	0.298	22.3
Back side	GSM	661/1880	1:8.3	0.183	0.05	28.60	30.00	1.380	0.253	22.3
Hotspot Test data(Separate 10mm)										
Front side	GPRS 4TS	661/1880	1:2.075	0.418	0.03	24.54	25.00	1.112	0.465	22.3
Back side	GPRS 4TS	661/1880	1:2.075	0.361	-0.07	24.54	25.00	1.112	0.401	22.3
Left side	GPRS 4TS	661/1880	1:2.075	0.041	0.04	24.54	25.00	1.112	0.046	22.3
Right side	GPRS 4TS	661/1880	1:2.075	0.012	0.00	24.54	25.00	1.112	0.013	22.3
Bottom side	GPRS 4TS	661/1880	1:2.075	0.685	0.08	24.54	25.00	1.112	0.762	22.3
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	GSM	512/1850.2	1:8.3	0.779	0.11	27.09	28.00	1.233	0.961	22.3
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Back side	GSM	661/1880	1:8.3	0.126	0.08	29.14	30.00	1.219	0.154	22.3
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	GPRS 4TS	661/1880	1:2.075	0.512	0.01	24.73	25.00	1.064	0.545	22.3
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	GSM	661/1880	1:8.3	0.011	0.09	28.60	30.00	1.380	0.015	22.3
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	GSM	661/1880	1:8.3	0.200	0.03	28.60	30.00	1.380	0.276	22.3
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Bottom side	GPRS 4TS	661/1880	1:2.075	0.648	0.13	24.54	25.00	1.112	0.720	22.3

Table 12: SAR of GSM1900 for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.3 SAR Result of WCDMA Band II

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.470	0.10	19.95	21.00	1.274	0.599	22.3
Left tilted	RMC	9400/1880	1:1	0.100	0.04	19.95	21.00	1.274	0.127	22.3
Right cheek	RMC	9400/1880	1:1	0.745	0.04	19.95	21.00	1.274	0.949	22.3
Right tilted	RMC	9400/1880	1:1	0.175	0.03	19.95	21.00	1.274	0.223	22.3
Right cheek	RMC	9262/1852.4	1:1	0.682	0.14	19.91	21.00	1.285	0.877	22.3
Right cheek	RMC	9538/1907.6	1:1	0.787	0.06	19.89	21.00	1.291	1.016	22.3
Body worn Test data(Separate 10mm) Sensor on										
Front side	RMC	9400/1880	1:1	0.259	0.02	22.49	23.50	1.262	0.327	22.3
Back side	RMC	9400/1880	1:1	0.326	-0.01	22.49	23.50	1.262	0.411	22.3
Body worn Test data Sensor off										
Front side-15mm	RMC	9400/1880	1:1	0.238	0.17	23.55	24.50	1.245	0.296	22.3
Back side-17mm	RMC	9400/1880	1:1	0.228	-0.10	23.55	24.50	1.245	0.284	22.3
Hotspot Test data(Separate 10mm) Sensor on										
Front side	RMC	9400/1880	1:1	0.259	0.13	22.49	23.50	1.262	0.327	22.3
Back side	RMC	9400/1880	1:1	0.326	-0.01	22.49	23.50	1.262	0.411	22.3
Left side	RMC	9400/1880	1:1	0.472	-0.02	22.49	23.50	1.262	0.596	22.3
Right side	RMC	9400/1880	1:1	0.051	0.06	22.49	23.50	1.262	0.064	22.3
Top side	RMC	9400/1880	1:1	0.196	-0.18	22.49	23.50	1.262	0.247	22.3
Hotspot Test data Sensor off										
Front side-15mm	RMC	9400/1880	1:1	0.238	-0.11	23.55	24.50	1.245	0.296	22.3
Back side-17mm	RMC	9400/1880	1:1	0.228	-0.06	23.55	24.50	1.245	0.284	22.3
Left side-17mm	RMC	9400/1880	1:1	0.336	0.14	23.55	24.50	1.245	0.418	22.3
Right side-15mm	RMC	9400/1880	1:1	0.001	-0.16	23.55	24.50	1.245	0.001	22.3
Top side-14mm	RMC	9400/1880	1:1	0.160	0.04	23.55	24.50	1.245	0.199	22.3
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.015	0.05	23.00	24.00	1.259	0.019	22.3
Left tilted	RMC	9400/1880	1:1	0.011	0.17	23.00	24.00	1.259	0.014	22.3
Right cheek	RMC	9400/1880	1:1	0.010	-0.01	23.00	24.00	1.259	0.013	22.3
Right tilted	RMC	9400/1880	1:1	0.011	-0.06	23.00	24.00	1.259	0.014	22.3
Body worn Test data(Separate 10mm) Sensor on										
Front side	RMC	9400/1880	1:1	0.245	0.18	21.22	22.00	1.197	0.293	22.3
Back side	RMC	9400/1880	1:1	0.174	0.08	21.22	22.00	1.197	0.208	22.3
Body worn Test data (Sensor off)										
Front side-15mm	RMC	9400/1880	1:1	0.279	0.05	23.00	24.00	1.259	0.351	22.3
Back side-17mm	RMC	9400/1880	1:1	0.212	-0.08	23.00	24.00	1.259	0.267	22.3
Hotspot Test data(Separate 10mm) Sensor on										
Front side	RMC	9400/1880	1:1	0.245	0.18	21.22	22.00	1.197	0.293	22.3
Back side	RMC	9400/1880	1:1	0.174	0.08	21.22	22.00	1.197	0.208	22.3
Left side	RMC	9400/1880	1:1	0.027	0.15	21.22	22.00	1.197	0.033	22.3
Right side	RMC	9400/1880	1:1	0.042	0.01	21.22	22.00	1.197	0.050	22.3
Bottom side	RMC	9400/1880	1:1	0.968	-0.03	21.22	22.00	1.197	1.158	22.3
Bottom side	RMC	9262/1852.4	1:1	0.952	-0.16	21.08	22.00	1.236	1.177	22.3
Bottom side-repeat	RMC	9400/1880	1:1	0.939	0.08	21.22	22.00	1.197	1.124	22.3
Bottom side	RMC	9538/1907.6	1:1	0.906	-0.14	21.12	22.00	1.225	1.110	22.3
Hotspot Test data(Separate 10mm) Sensor off										
Front side-15mm	RMC	9400/1880	1:1	0.279	0.05	23.00	24.00	1.259	0.351	22.3
Back side-17mm	RMC	9400/1880	1:1	0.212	0.02	23.00	24.00	1.259	0.267	22.3
Left side-17mm	RMC	9400/1880	1:1	0.005	0.04	23.00	24.00	1.259	0.006	22.3
Right side-15mm	RMC	9400/1880	1:1	0.012	-0.04	23.00	24.00	1.259	0.015	22.3
Bottom side-19mm	RMC	9400/1880	1:1	0.391	-0.12	23.00	24.00	1.259	0.492	22.3
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Right cheek	RMC	9538/1907.6	1:1	0.758	0.01	19.89	21.00	1.291	0.979	22.3
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Back side	RMC	9400/1880	1:1	0.311	0.17	22.49	23.50	1.262	0.392	22.3
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	RMC	9400/1880	1:1	0.455	-0.07	22.49	23.50	1.262	0.574	22.3
ANTO										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	RMC	9400/1880	1:1	0.011	-0.02	23.00	24.00	1.259	0.014	22.3
Body worn Test data (Sensor off) at the worst case with Second supply										
Front side-15mm	RMC	9400/1880	1:1	0.246	0.15	23.00	24.00	1.259	0.310	22.3
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Bottom side	RMC	9262/1852.4	1:1	0.912	0.13	21.08	22.00	1.236	1.127	22.3

Table 13: SAR of WCDMA Band II for Head and Body.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back Side	9400/1880	0.968	0.939	1.030884	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was preformed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.4 SAR Result of WCDMA Band IV

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.425	0.03	19.95	21.00	1.274	0.541	22.2
Left tilted	RMC	1412/1732.4	1:1	0.084	0.16	19.95	21.00	1.274	0.107	22.2
Right cheek	RMC	1412/1732.4	1:1	0.653	-0.05	19.95	21.00	1.274	0.832	22.2
Right tilted	RMC	1412/1732.4	1:1	0.155	0.06	19.95	21.00	1.274	0.197	22.2
Right cheek	RMC	1312/1712.4	1:1	0.613	0.18	19.98	21.00	1.265	0.775	22.2
Right cheek	RMC	1513/1752.6	1:1	0.671	0.09	19.88	21.00	1.294	0.868	22.2
Body worn Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.340	-0.18	23.53	24.50	1.250	0.425	22.2
Back side	RMC	1412/1732.4	1:1	0.357	-0.08	23.53	24.50	1.250	0.446	22.2
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.340	-0.02	23.53	24.50	1.250	0.425	22.2
Back side	RMC	1412/1732.4	1:1	0.357	-0.08	23.53	24.50	1.250	0.446	22.2
Left side	RMC	1412/1732.4	1:1	0.679	0.03	23.53	24.50	1.250	0.849	22.2
Right side	RMC	1412/1732.4	1:1	0.001	-0.04	23.53	24.50	1.250	0.001	22.2
Top side	RMC	1412/1732.4	1:1	0.061	0.03	23.53	24.50	1.250	0.076	22.2
Left side	RMC	1312/1712.4	1:1	0.594	-0.12	23.50	24.50	1.259	0.748	22.2
Left side	RMC	1513/1752.6	1:1	0.654	-0.11	23.49	24.50	1.262	0.825	22.2
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.024	0.04	22.87	24.00	1.297	0.030	22.2
Left tilted	RMC	1412/1732.4	1:1	0.009	0.05	22.87	24.00	1.297	0.012	22.2
Right cheek	RMC	1412/1732.4	1:1	0.016	0.06	22.87	24.00	1.297	0.020	22.2
Right tilted	RMC	1412/1732.4	1:1	0.005	0.06	22.87	24.00	1.297	0.006	22.2
Body worn Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.350	0.04	22.87	24.00	1.297	0.454	22.2
Back side	RMC	1412/1732.4	1:1	0.264	0.10	22.87	24.00	1.297	0.342	22.2
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.350	0.04	22.87	24.00	1.297	0.454	22.2
Back side	RMC	1412/1732.4	1:1	0.264	0.10	22.87	24.00	1.297	0.342	22.2
Left side	RMC	1412/1732.4	1:1	0.047	0.08	22.87	24.00	1.297	0.061	22.2
Right side	RMC	1412/1732.4	1:1	0.023	-0.15	22.87	24.00	1.297	0.030	22.2
Bottom side	RMC	1412/1732.4	1:1	0.720	0.07	22.87	24.00	1.297	0.934	22.2
Bottom side	RMC	1312/1712.4	1:1	0.649	0.10	22.75	24.00	1.334	0.865	22.2
Bottom side	RMC	1513/1752.6	1:1	0.864	0.06	22.97	24.00	1.268	1.095	22.2
Bottom side -repeat	RMC	1513/1752.6	1:1	0.736	0.14	22.97	24.00	1.268	0.933	22.2
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	RMC	1513/1752.6	1:1	0.655	0.01	19.88	21.00	1.294	0.848	22.2
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Back side	RMC	1412/1732.4	1:1	0.331	0.09	23.53	24.50	1.250	0.414	22.2
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	RMC	1412/1732.4	1:1	0.642	0.11	23.53	24.50	1.250	0.803	22.2
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	RMC	1412/1732.4	1:1	0.015	0.01	22.87	24.00	1.297	0.019	22.2
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	RMC	1412/1732.4	1:1	0.310	-0.11	22.87	24.00	1.297	0.402	22.2
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Bottom side	RMC	1513/1752.6	1:1	0.834	-0.17	22.97	24.00	1.268	1.057	22.2

Table 14: SAR of WCDMA Band IV for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Back Side	1412/1732.4	0.864	0.736	1.173913	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 f (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.2.5 SAR Result of WCDMA Band V

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.488	0.14	24.36	24.50	1.033	0.504	22.1
Left tilted	RMC	4182/836.4	1:1	0.069	0.09	24.36	24.50	1.033	0.071	22.1
Right cheek	RMC	4182/836.4	1:1	0.411	0.11	24.36	24.50	1.033	0.424	22.1
Right tilted	RMC	4182/836.4	1:1	0.086	0.12	24.36	24.50	1.033	0.088	22.1
Body worn Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.322	0.11	24.36	24.50	1.033	0.333	22.1
Back side	RMC	4182/836.4	1:1	0.327	-0.15	24.36	24.50	1.033	0.338	22.1
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.322	0.11	24.36	24.50	1.033	0.333	22.1
Back side	RMC	4182/836.4	1:1	0.327	-0.15	24.36	24.50	1.033	0.338	22.1
Left side	RMC	4182/836.4	1:1	0.506	0.02	24.36	24.50	1.033	0.523	22.1
Right side	RMC	4182/836.4	1:1	0.008	0.08	24.36	24.50	1.033	0.008	22.1
Top side	RMC	4182/836.4	1:1	0.013	0.03	24.36	24.50	1.033	0.014	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.100	-0.06	22.38	24.00	1.452	0.145	22.1
Left tilted	RMC	4182/836.4	1:1	0.071	0.18	22.38	24.00	1.452	0.103	22.1
Right cheek	RMC	4182/836.4	1:1	0.189	0.08	22.38	24.00	1.452	0.274	22.1
Right tilted	RMC	4182/836.4	1:1	0.088	0.02	22.38	24.00	1.452	0.128	22.1
Body worn Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.371	0.01	22.38	24.00	1.452	0.539	22.1
Back side	RMC	4182/836.4	1:1	0.276	0.10	22.38	24.00	1.452	0.401	22.1
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.371	0.01	22.38	24.00	1.452	0.539	22.1
Back side	RMC	4182/836.4	1:1	0.276	0.10	22.38	24.00	1.452	0.401	22.1
Left side	RMC	4182/836.4	1:1	0.057	0.12	22.38	24.00	1.452	0.083	22.1
Right side	RMC	4182/836.4	1:1	0.184	0.17	22.38	24.00	1.452	0.267	22.1
Bottom side	RMC	4182/836.4	1:1	0.282	-0.04	22.38	24.00	1.452	0.409	22.1
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	RMC	4182/836.4	1:1	0.471	0.11	24.36	24.50	1.033	0.486	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Back side	RMC	4182/836.4	1:1	0.315	0.12	24.36	24.50	1.033	0.325	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	RMC	4182/836.4	1:1	0.488	0.08	24.36	24.50	1.033	0.504	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	RMC	4182/836.4	1:1	0.172	0.01	22.38	24.00	1.452	0.250	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	RMC	4182/836.4	1:1	0.355	-0.14	22.38	24.00	1.452	0.515	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Front side	RMC	4182/836.4	1:1	0.355	-0.14	22.38	24.00	1.452	0.515	22.1

Table 15: SAR of WCDMA Band V for Head and Body.

8.2.6 SAR Result of CDMA BC0

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	CDMA RC3+SO55	384/836.52	1:1	0.786	0.01	23.05	24.50	1.396	1.098	22.1
Left tilted	CDMA RC3+SO55	384/836.52	1:1	0.096	-0.19	23.05	24.50	1.396	0.134	22.1
Right cheek	CDMA RC3+SO55	384/836.52	1:1	0.466	0.10	23.05	24.50	1.396	0.651	22.1
Right tilted	CDMA RC3+SO55	384/836.52	1:1	0.087	0.06	23.05	24.50	1.396	0.121	22.1
Left cheek	CDMA RC3+SO55	1013/824.7	1:1	0.850	-0.06	23.24	24.50	1.337	1.136	22.1
Left cheek-repeat	CDMA RC3+SO55	1013/824.7	1:1	0.841	0.01	23.24	24.50	1.337	1.124	22.1
Left cheek	CDMA RC3+SO55	777/848.31	1:1	0.670	0.07	23.35	24.50	1.303	0.873	22.1
Body Worn Test data(Separate 10mm)										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.269	-0.11	23.15	24.50	1.365	0.367	22.1
Back side	CDMA RC3+SO32	384/836.52	1:1	0.229	-0.13	23.15	24.50	1.365	0.312	22.1
Hotspot Test data(Separate 10mm)										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.269	-0.11	23.15	24.50	1.365	0.367	22.1
Back side	CDMA RC3+SO32	384/836.52	1:1	0.229	0.04	23.15	24.50	1.365	0.312	22.1
Left side	CDMA RC3+SO32	384/836.52	1:1	0.419	0.08	23.15	24.50	1.365	0.572	22.1
Right side	CDMA RC3+SO32	384/836.52	1:1	0.001	0.17	23.15	24.50	1.365	0.001	22.1
Top side	CDMA RC3+SO32	384/836.52	1:1	0.001	0.08	23.15	24.50	1.365	0.001	22.1
Left side	EVDO RTAP 153.6Kbps	384/836.52	1:1	0.341	0.18	23.03	24.50	1.403	0.478	22.1
Left side	EVDO RETAP 4096Bits	384/836.52	1:1	0.351	0.01	23.10	24.50	1.380	0.485	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	CDMA RC3+SO55	384/836.52	1:1	0.125	-0.03	24.02	24.50	1.117	0.140	22.1
Left tilted	CDMA RC3+SO55	384/836.52	1:1	0.095	0.16	24.02	24.50	1.117	0.106	22.1
Right cheek	CDMA RC3+SO55	384/836.52	1:1	0.141	-0.01	24.02	24.50	1.117	0.157	22.1
Right tilted	CDMA RC3+SO55	384/836.52	1:1	0.114	0.03	24.02	24.50	1.117	0.127	22.1
Body Worn Test data(Separate 10mm)										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.419	-0.05	23.92	24.50	1.143	0.479	22.1
Back side	CDMA RC3+SO32	384/836.52	1:1	0.373	0.05	23.92	24.50	1.143	0.426	22.1
Hotspot Test data(Separate 10mm)										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.419	-0.05	23.92	24.50	1.143	0.479	22.1
Back side	CDMA RC3+SO32	384/836.52	1:1	0.373	-0.09	23.92	24.50	1.143	0.426	22.1
Left side	CDMA RC3+SO32	384/836.52	1:1	0.077	0.12	23.92	24.50	1.143	0.088	22.1
Right side	CDMA RC3+SO32	384/836.52	1:1	0.206	0.01	23.92	24.50	1.143	0.235	22.1
Bottom side	CDMA RC3+SO32	384/836.52	1:1	0.341	-0.19	23.92	24.50	1.143	0.390	22.1
Front side	EVDO RTAP 153.6Kbps	384/836.52	1:1	0.357	-0.12	23.85	24.50	1.161	0.415	22.1
Front side	EVDO RETAP 4096Bits	384/836.52	1:1	0.351	0.18	23.52	24.50	1.253	0.440	22.1
ANT1 with Simultaneous transmission										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Left cheek	CDMA RC3+SO55	384/836.52	1:1	0.786	0.01	23.05	23.50	1.109	0.872	22.1
Left tilted	CDMA RC3+SO55	384/836.52	1:1	0.096	-0.19	23.05	23.50	1.109	0.106	22.1
Right cheek	CDMA RC3+SO55	384/836.52	1:1	0.466	0.10	23.05	23.50	1.109	0.517	22.1
Right tilted	CDMA RC3+SO55	384/836.52	1:1	0.087	0.06	23.05	23.50	1.109	0.096	22.1
Left cheek	CDMA RC3+SO55	1013/824.7	1:1	0.850	-0.06	23.24	23.50	1.062	0.902	22.1
Left cheek-repeat	CDMA RC3+SO55	1013/824.7	1:1	0.841	0.01	23.24	23.50	1.062	0.893	22.1
Left cheek	CDMA RC3+SO55	777/848.31	1:1	0.670	0.07	23.35	23.50	1.035	0.694	22.1
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	CDMA RC3+SO55	1013/824.7	1:1	0.810	-0.05	23.24	24.50	1.337	1.083	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.233	-0.11	23.15	24.50	1.365	0.318	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	CDMA RC3+SO32	384/836.52	1:1	0.400	0.01	23.15	24.50	1.365	0.546	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	CDMA RC3+SO55	384/836.52	1:1	0.133	0.07	24.02	24.50	1.117	0.149	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.389	0.02	23.92	24.50	1.143	0.445	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Front side	CDMA RC3+SO32	384/836.52	1:1	0.389	0.02	23.92	24.50	1.143	0.445	22.1

Table 16: SAR of CDMA BC0 for Head and Body.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Right tilted	384/836.52	0.850	0.841	1.01070155	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.7 SAR Result of CDMA BC1

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RC3+SO55	600/1880	1:1	0.634	0.02	18.64	20.00	1.368	0.867	22.1
Left cheek	RC3+SO55	25/1851.25	1:1	0.622	0.07	18.76	20.00	1.330	0.828	22.1
Left cheek	RC3+SO55	1175/1908.75	1:1	0.601	0.03	18.59	20.00	1.384	0.832	22.1
Left tilted	RC3+SO55	600/1880	1:1	0.200	0.09	18.64	20.00	1.368	0.274	22.1
Right cheek	RC3+SO55	600/1880	1:1	0.990	0.04	18.64	20.00	1.368	1.354	22.1
Right tilted	RC3+SO55	600/1880	1:1	0.226	0.01	18.64	20.00	1.368	0.309	22.1
Right cheek	RC3+SO55	25/1851.25	1:1	0.798	-0.06	18.76	20.00	1.330	1.062	22.1
Right cheek	RC3+SO55	1175/1908.75	1:1	1.000	-0.04	18.59	20.00	1.384	1.384	22.1
Right cheek-repeat	RC3+SO55	1175/1908.75	1:1	0.982	-0.10	18.59	20.00	1.384	1.359	22.1
Body Worn Test data(Separate 10mm)										
Front side	RC3+SO32	600/1880	1:1	0.266	-0.06	20.48	22.00	1.419	0.377	22.1
Back side	RC3+SO32	600/1880	1:1	0.269	0.01	20.48	22.00	1.419	0.382	22.1
Hotspot Test data(Separate 10mm)										
Front side	RC3+SO32	600/1880	1:1	0.266	0.04	20.48	22.00	1.419	0.377	22.1
Back side	RC3+SO32	600/1880	1:1	0.269	0.01	20.48	22.00	1.419	0.382	22.1
Left side	RC3+SO32	600/1880	1:1	0.351	-0.03	20.48	22.00	1.419	0.498	22.1
Right side	RC3+SO32	600/1880	1:1	0.000	0.06	20.48	22.00	1.419	0.000	22.1
Top side	RC3+SO32	600/1880	1:1	0.126	0.02	20.48	22.00	1.419	0.179	22.1
Left side	EVDO RTAP 153.6Kbps	600/1880	1:1	0.468	-0.14	20.58	22.00	1.387	0.649	22.1
Left side	EVDO RETAP 4096Bits	600/1880	1:1	0.398	-0.05	20.66	22.00	1.361	0.542	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RC3+SO55	600/1880	1:1	0.237	0.02	20.17	21.00	1.211	0.287	22.1
Left tilted	RC3+SO55	600/1880	1:1	0.163	0.01	20.17	21.00	1.211	0.197	22.1
Right cheek	RC3+SO55	600/1880	1:1	0.429	0.02	20.17	21.00	1.211	0.519	22.1
Right tilted	RC3+SO55	600/1880	1:1	0.203	0.10	20.17	21.00	1.211	0.246	22.1
Body Worn Test data(Separate 10mm)										
Front side	RC3+SO32	600/1880	1:1	0.328	-0.07	20.15	21.00	1.216	0.399	22.1
Back side	RC3+SO32	600/1880	1:1	0.291	-0.05	20.15	21.00	1.216	0.354	22.1
Hotspot Test data(Separate 10mm)										
Front side	RC3+SO32	600/1880	1:1	0.328	-0.07	20.15	21.00	1.216	0.399	22.1
Back side	RC3+SO32	600/1880	1:1	0.291	-0.05	20.15	21.00	1.216	0.354	22.1
Left side	RC3+SO32	600/1880	1:1	0.017	0.03	20.15	21.00	1.216	0.021	22.1
Right side	RC3+SO32	600/1880	1:1	0.033	-0.07	20.15	21.00	1.216	0.040	22.1
Bottom side	RC3+SO32	600/1880	1:1	0.705	0.07	20.15	21.00	1.216	0.857	22.1
Bottom side	RC3+SO32	25/1851.25	1:1	0.672	0.05	20.08	21.00	1.236	0.831	22.1
Bottom side	RC3+SO32	1175/1908.75	1:1	0.720	0.17	20.21	21.00	1.199	0.864	22.1
Bottom side	EVDO RTAP 153.6Kbps	25/1851.25	1:1	0.904	-0.17	20.08	21.00	1.236	1.117	22.1
Bottom side	EVDO RTAP 153.6Kbps	600/1880	1:1	0.949	-0.18	20.15	21.00	1.216	1.154	22.1
Bottom side-repeat	EVDO RTAP 153.6Kbps	600/1880	1:1	0.933	0.07	20.15	21.00	1.216	1.135	22.1
Bottom side	EVDO RTAP 153.6Kbps	1175/1908.75	1:1	0.927	-0.17	20.12	21.00	1.225	1.135	22.1
Bottom side	EVDO RETAP 4096Bits	25/1851.25	1:1	0.908	-0.17	20.16	21.00	1.213	1.102	22.1
Bottom side	EVDO RETAP 4096Bits	600/1880	1:1	0.937	-0.17	20.16	21.00	1.213	1.137	22.1
Bottom side	EVDO RETAP 4096Bits	1175/1908.75	1:1	0.945	-0.05	20.18	21.00	1.208	1.141	22.1
ANT1 with Simultaneous transmission										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RC3+SO55	600/1880	1:1	0.634	0.02	18.64	19.00	1.086	0.689	22.1
Left tilted	RC3+SO55	600/1880	1:1	0.200	0.09	18.64	19.00	1.086	0.217	22.1
Right cheek	RC3+SO55	600/1880	1:1	1.010	0.04	18.64	19.00	1.086	1.097	22.1
Right tilted	RC3+SO55	600/1880	1:1	0.226	0.01	18.64	19.00	1.086	0.246	22.1
Right cheek	RC3+SO55	25/1851.25	1:1	0.798	-0.06	18.76	19.00	1.057	0.843	22.1
Right cheek	RC3+SO55	1175/1908.75	1:1	1.000	-0.04	18.59	19.00	1.099	1.099	22.1
Right cheek-repeat	RC3+SO55	1175/1908.75	1:1	0.982	-0.10	18.59	19.00	1.099	1.079	22.1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	RC3+SO55	1175/1908.75	1:1	0.950	0.01	18.59	20.00	1.384	1.314	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Back side	RC3+SO32	600/1880	1:1	0.233	0.17	20.48	22.00	1.419	0.331	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	EVDO RTAP 153.6Kbps	600/1880	1:1	0.418	0.06	20.58	22.00	1.387	0.580	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	RC3+SO55	600/1880	1:1	0.408	0.01	20.17	21.00	1.211	0.494	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	RC3+SO32	600/1880	1:1	0.300	0.07	20.15	21.00	1.216	0.365	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Bottom side	EVDO RTAP 153.6Kbps	600/1880	1:1	0.887	-0.04	20.15	21.00	1.216	1.079	22.1

Table 17: SAR of CDMA BC1 for Head and Body.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Right cheek	1175/1908.75	1	0.982	1.01832994	N/A	N/A
Bottom side	600/1880	0.949	0.933	1.01714898	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.8 SAR Result of CDMA BC10

ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RC3+SO55	580/820.5	1:1	0.724	0.09	24.22	24.50	1.067	0.772	22.1
Left tilted	RC3+SO55	580/820.5	1:1	0.091	0.16	24.22	24.50	1.067	0.097	22.1
Right cheek	RC3+SO55	580/820.5	1:1	0.427	0.03	24.22	24.50	1.067	0.455	22.1
Right tilted	RC3+SO55	580/820.5	1:1	0.082	-0.04	24.22	24.50	1.067	0.087	22.1
Body Worn Test data(Separate 10mm)										
Front side	RC3+SO32	580/820.5	1:1	0.243	-0.03	24.23	24.50	1.064	0.259	22.1
Back side	RC3+SO32	580/820.5	1:1	0.216	0.16	24.23	24.50	1.064	0.230	22.1
Hotspot Test data(Separate 10mm)										
Front side	RC3+SO32	580/820.5	1:1	0.243	-0.03	24.23	24.50	1.064	0.259	22.1
Back side	RC3+SO32	580/820.5	1:1	0.216	-0.13	24.23	24.50	1.064	0.230	22.1
Left side	RC3+SO32	580/820.5	1:1	0.386	0.07	24.23	24.50	1.064	0.411	22.1
Right side	RC3+SO32	580/820.5	1:1	0.001	-0.05	24.23	24.50	1.064	0.001	22.1
Top side	RC3+SO32	580/820.5	1:1	0.001	-0.08	24.23	24.50	1.064	0.001	22.1
Left side	EVDO RTAP 153.6Kbps	580/820.5	1:1	0.315	0.10	24.05	24.50	1.109	0.349	22.1
Left side	EVDO RETAP 4096Bits	580/820.5	1:1	0.321	0.19	24.30	24.50	1.047	0.336	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RC3+SO55	580/820.5	1:1	0.124	-0.13	23.64	24.50	1.219	0.151	22.1
Left tilted	RC3+SO55	580/820.5	1:1	0.092	-0.04	23.64	24.50	1.219	0.112	22.1
Right cheek	RC3+SO55	580/820.5	1:1	0.163	0.05	23.64	24.50	1.219	0.199	22.1
Right tilted	RC3+SO55	580/820.5	1:1	0.111	-0.10	23.64	24.50	1.219	0.135	22.1
Body Worn Test data(Separate 10mm)										
Front side	RC3+SO32	580/820.5	1:1	0.353	0.01	23.76	24.50	1.186	0.419	22.1
Back side	RC3+SO32	580/820.5	1:1	0.344	-0.11	23.76	24.50	1.186	0.408	22.1
Hotspot Test data(Separate 10mm)										
Front side	RC3+SO32	580/820.5	1:1	0.353	0.01	23.76	24.50	1.186	0.419	22.1
Back side	RC3+SO32	580/820.5	1:1	0.344	-0.06	23.76	24.50	1.186	0.408	22.1
Left side	RC3+SO32	580/820.5	1:1	0.077	-0.01	23.76	24.50	1.186	0.091	22.1
Right side	RC3+SO32	580/820.5	1:1	0.219	-0.10	23.76	24.50	1.186	0.260	22.1
Bottom side	RC3+SO32	580/820.5	1:1	0.315	-0.17	23.76	24.50	1.186	0.374	22.1
Front side	EVDO RTAP 153.6Kbps	580/820.5	1:1	0.331	0.00	23.61	24.50	1.227	0.406	22.1
Front side	EVDO RETAP 4096Bits	580/820.5	1:1	0.337	-0.10	23.52	24.50	1.253	0.422	22.1
ANT1										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Left cheek	RC3+SO55	580/820.5	1:1	0.689	0.01	24.22	24.50	1.067	0.735	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	RC3+SO32	580/820.5	1:1	0.221	-0.15	24.23	24.50	1.064	0.235	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Left side	RC3+SO32	580/820.5	1:1	0.351	0.09	24.23	24.50	1.064	0.374	22.1
ANT0										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case with Second supply										
Right cheek	RC3+SO55	580/820.5	1:1	0.155	-0.02	23.64	24.50	1.219	0.189	22.1
Body worn Test data(Separate 10mm) at the worst case with Second supply										
Front side	RC3+SO32	580/820.5	1:1	0.330	-0.18	23.76	24.50	1.186	0.391	22.1
Hotspot Test data(Separate 10mm) at the worst case with Second supply										
Front side	RC3+SO32	580/820.5	1:1	0.330	-0.18	23.76	24.50	1.186	0.391	22.1

Table 18: SAR of CDMA BC10 for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

8.2.9 SAR Result of LTE Band 2

ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_0	18700/1860	1:1	0.709	0.42	20.20	21.00	1.202	0.852	22.3
Left cheek	20	QPSK 1RB_0	18900/1880	1:1	0.724	0.03	19.91	21.00	1.285	0.931	22.3
Left cheek	20	QPSK 1RB_0	19100/1900	1:1	0.739	0.13	19.88	21.00	1.294	0.956	22.3
Left tilted	20	QPSK 1RB_0	18700/1860	1:1	0.306	-0.05	20.20	21.00	1.202	0.368	22.3
Right cheek	20	QPSK 1RB_0	18700/1860	1:1	0.881	0.07	20.20	21.00	1.202	1.059	22.3
Right tilted	20	QPSK 1RB_0	18700/1860	1:1	0.202	0.01	20.20	21.00	1.202	0.243	22.3
Right cheek	20	QPSK 1RB_0	18900/1880	1:1	0.931	0.05	19.91	21.00	1.285	1.197	22.3
Right cheek	20	QPSK 1RB_0	19100/1900	1:1	0.982	0.03	19.88	21.00	1.294	1.271	22.3
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_25	18700/1860	1:1	0.683	0.13	20.09	21.00	1.233	0.842	22.3
Left cheek	20	QPSK 50RB_25	18900/1880	1:1	0.697	0.03	19.90	21.00	1.288	0.898	22.3
Left cheek	20	QPSK 50RB_25	19100/1900	1:1	0.711	0.07	20.00	21.00	1.259	0.895	22.3
Left tilted	20	QPSK 50RB_25	18700/1860	1:1	0.161	0.17	20.09	21.00	1.233	0.199	22.3
Right cheek	20	QPSK 50RB_25	18700/1860	1:1	0.896	0.06	20.09	21.00	1.233	1.105	22.3
Right tilted	20	QPSK 50RB_25	18700/1860	1:1	0.212	0.02	20.09	21.00	1.233	0.261	22.3
Right cheek	20	QPSK 50RB_25	18900/1880	1:1	0.958	0.08	19.90	21.00	1.288	1.234	22.3
Right cheek	20	QPSK 50RB_25	19100/1900	1:1	1.020	0.01	20.00	21.00	1.259	1.284	22.3
Head Test data(100%RB)											
Left cheek	20	QPSK 100RB_0	19100/1900	1:1	0.711	0.03	20.26	21.00	1.186	0.843	22.3
Right cheek	20	QPSK 100RB_0	19100/1900	1:1	1.020	0.16	20.26	21.00	1.186	1.209	22.3
Right cheek-repeat	20	QPSK 100RB_0	19100/1900	1:1	0.984	0.11	20.26	21.00	1.186	1.167	22.3
Body worn Test data(Separate 10mm 1RB) Sensor on											
Front side	20	QPSK 1RB_0	18700/1860	1:1	0.300	0.14	22.52	23.00	1.117	0.335	22.1
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.356	0.05	22.52	23.00	1.117	0.398	22.1
Body worn Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.290	0.19	22.46	23.00	1.132	0.328	22.1
Back side	20	QPSK 50RB_0	18700/1860	1:1	0.339	0.07	22.46	23.00	1.132	0.384	22.1
Body worn Test data(Separate 10mm 1RB) Sensor off											
Front side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.196	0.05	23.32	24.00	1.169	0.229	22.1
Back side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.160	0.09	23.32	24.00	1.169	0.187	22.1
Body worn Test data (Separate 10mm 50%RB) Sensor off											
Front side-15mm	20	QPSK 50RB_0	18700/1860	1:1	0.158	0.04	22.46	23.00	1.132	0.179	22.1
Back side-17mm	20	QPSK 50RB_0	18700/1860	1:1	0.127	0.15	22.46	23.00	1.132	0.144	22.1
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	20	QPSK 1RB_0	18700/1860	1:1	0.300	0.14	22.52	23.00	1.117	0.335	22.1
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.356	0.05	22.52	23.00	1.117	0.398	22.1
Left side	20	QPSK 1RB_0	18700/1860	1:1	0.523	0.04	22.52	23.00	1.117	0.584	22.1
Right side	20	QPSK 1RB_0	18700/1860	1:1	0.025	0.07	22.52	23.00	1.117	0.027	22.1
Top side	20	QPSK 1RB_0	18700/1860	1:1	0.073	0.15	22.52	23.00	1.117	0.082	22.1
Hotspot Test data (Separate 10mm 50%RB)Sensor on											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.290	0.19	22.46	23.00	1.132	0.328	22.1
Back side	20	QPSK 50RB_0	18700/1860	1:1	0.339	0.07	22.46	23.00	1.132	0.384	22.1
Left side	20	QPSK 50RB_0	18700/1860	1:1	0.438	0.03	22.46	23.00	1.132	0.496	22.1
Right side	20	QPSK 50RB_0	18700/1860	1:1	0.023	0.05	22.46	23.00	1.132	0.025	22.1
Top side	20	QPSK 50RB_0	18700/1860	1:1	0.075	0.09	22.46	23.00	1.132	0.084	22.1
Hotspot Test data(Separate 10mm 1RB) Sensor off											
Front side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.196	0.05	23.32	24.00	1.169	0.229	22.3
Back side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.160	0.09	23.32	24.00	1.169	0.187	22.3
Left side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.246	0.08	23.32	24.00	1.169	0.288	22.3
Right side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.043	0.02	23.32	24.00	1.169	0.050	22.3
Top side-14mm	20	QPSK 1RB_0	18700/1860	1:1	0.040	0.08	23.32	24.00	1.169	0.047	22.3
Hotspot Test data (Separate 10mm 50%RB) Sensor off											
Front side-15mm	20	QPSK 50RB_0	18700/1860	1:1	0.158	0.04	22.46	23.00	1.132	0.179	22.3
Back side-17mm	20	QPSK 50RB_0	18700/1860	1:1	0.127	0.15	22.46	23.00	1.132	0.144	22.3
Left side-17mm	20	QPSK 50RB_0	18700/1860	1:1	0.194	0.09	22.46	23.00	1.132	0.220	22.3
Right side-15mm	20	QPSK 50RB_0	18700/1860	1:1	0.035	-0.08	22.46	23.00	1.132	0.039	22.3
Top side-14mm	20	QPSK 50RB_0	18700/1860	1:1	0.029	0.05	22.46	23.00	1.132	0.033	22.3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

ANTO											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_0	18900/1880	1:1	0.020	0.12	22.41	24.00	1.442	0.029	22.3
Left tilted	20	QPSK 1RB_0	18900/1880	1:1	0.008	0.02	22.41	24.00	1.442	0.012	22.3
Right cheek	20	QPSK 1RB_0	18900/1880	1:1	0.011	0.04	22.41	24.00	1.442	0.016	22.3
Right tilted	20	QPSK 1RB_0	18900/1880	1:1	0.005	0.19	22.41	24.00	1.442	0.008	22.3
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_25	18700/1860	1:1	0.011	0.09	21.67	23.00	1.358	0.015	22.3
Left tilted	20	QPSK 50RB_25	18700/1860	1:1	0.006	0.05	21.67	23.00	1.358	0.009	22.3
Right cheek	20	QPSK 50RB_25	18700/1860	1:1	0.009	0.03	21.67	23.00	1.358	0.012	22.3
Right tilted	20	QPSK 50RB_25	18700/1860	1:1	0.036	0.07	21.67	23.00	1.358	0.049	22.3
Body worn Test data(Separate 10mm 1RB) Sensor on											
Front side	20	QPSK 1RB_0	18700/1860	1:1	0.487	0.07	21.70	23.00	1.349	0.657	22.1
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.387	0.03	21.70	23.00	1.349	0.522	22.1
Body worn Test data (Separate 10mm 50%RB) Sensor on											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.478	0.08	21.54	23.00	1.400	0.669	22.1
Back side	20	QPSK 50RB_0	18700/1860	1:1	0.382	0.04	21.54	23.00	1.400	0.535	22.1
Body worn Test data(Separate 10mm 1RB) Sensor off											
Front side-15mm	20	QPSK 1RB_0	18900/1880	1:1	0.309	0.04	22.41	24.00	1.442	0.446	22.3
Back side-17mm	20	QPSK 1RB_0	18900/1880	1:1	0.242	-0.11	22.41	24.00	1.442	0.349	22.3
Body worn Test data (Separate 10mm 50%RB) Sensor off											
Front side-15mm	20	QPSK 50RB_25	18700/1860	1:1	0.205	0.18	21.67	23.00	1.358	0.278	22.3
Back side-17mm	20	QPSK 50RB_25	18700/1860	1:1	0.193	-0.10	21.67	23.00	1.358	0.262	22.3
Hotspot Test data(Separate 10mm 1RB)Sensor on											
Front side	20	QPSK 1RB_0	18700/1860	1:1	0.487	0.07	21.70	23.00	1.349	0.657	22.1
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.387	0.03	21.70	23.00	1.349	0.522	22.1
Left side	20	QPSK 1RB_0	18700/1860	1:1	0.021	0.04	21.70	23.00	1.349	0.028	22.1
Right side	20	QPSK 1RB_0	18700/1860	1:1	0.035	-0.03	21.70	23.00	1.349	0.047	22.1
Bottom side	20	QPSK 1RB_0	18700/1860	1:1	0.946	0.01	21.70	23.00	1.349	1.276	22.1
Bottom side	20	QPSK 1RB_50	18900/1880	1:1	1.000	-0.03	21.69	23.00	1.352	1.352	22.1
Bottom side	20	QPSK 1RB_0	19100/1900	1:1	0.995	-0.02	21.63	23.00	1.371	1.364	22.1
Hotspot Test data (Separate 10mm 50%RB)Sensor on											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.478	0.08	21.54	23.00	1.400	0.669	22.1
Back side	20	QPSK 50RB_0	18700/1860	1:1	0.382	0.04	21.54	23.00	1.400	0.535	22.1
Left side	20	QPSK 50RB_0	18700/1860	1:1	0.019	0.08	21.54	23.00	1.400	0.026	22.1
Right side	20	QPSK 50RB_0	18700/1860	1:1	0.035	0.12	21.54	23.00	1.400	0.048	22.1
Bottom side	20	QPSK 50RB_0	18700/1860	1:1	0.929	0.00	21.54	23.00	1.400	1.300	22.1
Bottom side	20	QPSK 50RB_50	18900/1880	1:1	0.982	-0.01	21.52	23.00	1.406	1.381	22.1
Bottom side-repeat	20	QPSK 50RB_50	18900/1880	1:1	0.975	-0.13	21.52	23.00	1.406	1.371	22.1
Bottom side	20	QPSK 50RB_50	19100/1900	1:1	0.922	-0.02	21.53	23.00	1.403	1.293	22.1
Hotspot Test data (Separate 10mm 100%RB)Sensor on											
Bottom side	20	QPSK 100RB_0	18900/1880	1:1	0.968	-0.03	21.58	23.00	1.387	1.342	22.1
Hotspot Test data(Separate 10mm 1RB)Sensor off											
Front side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.309	0.04	22.41	24.00	1.442	0.446	22.1
Back side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.242	-0.11	22.41	24.00	1.442	0.349	22.1
Left side-17mm	20	QPSK 1RB_0	18700/1860	1:1	0.013	0.01	22.41	24.00	1.442	0.018	22.1
Right side-15mm	20	QPSK 1RB_0	18700/1860	1:1	0.031	0.03	22.41	24.00	1.442	0.044	22.1
Bottom side-19mm	20	QPSK 1RB_0	18700/1860	1:1	0.357	0.04	22.41	24.00	1.442	0.515	22.1
Hotspot Test data (Separate 10mm 50%RB)Sensor off											
Front side-15mm	20	QPSK 50RB_25	18700/1860	1:1	0.205	0.18	21.67	23.00	1.358	0.278	22.1
Back side-17mm	20	QPSK 50RB_25	18700/1860	1:1	0.193	-0.10	21.67	23.00	1.358	0.262	22.1
Left side-17mm	20	QPSK 50RB_25	18700/1860	1:1	0.009	0.06	21.67	23.00	1.358	0.013	22.1
Right side-15mm	20	QPSK 50RB_25	18700/1860	1:1	0.025	0.14	21.67	23.00	1.358	0.034	22.1
Bottom side-19mm	20	QPSK 50RB_25	18700/1860	1:1	0.292	0.03	21.67	23.00	1.358	0.397	22.1
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Product specific 10g SAR Test data(Separate 0mm 1RB)Sensor on											
Bottom side	20	QPSK 1RB_0	18700/1860	1:1	2.050	0.06	21.70	23.00	1.349	2.765	22.1
Bottom side	20	QPSK 1RB_50	18900/1880	1:1	2.040	0.07	21.69	23.00	1.352	2.758	22.1
Bottom side	20	QPSK 1RB_0	19100/1900	1:1	2.010	0.02	21.63	23.00	1.371	2.755	22.1
Product specific 10g SAR Test data (Separate 0mm 50%RB)Sensor on											



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Bottom side	20	QPSK 50RB_0	18700/1860	1:1	2.040	0.05	21.54	23.00	1.400	2.855	22.1
Bottom side	20	QPSK 50RB_50	18900/1880	1:1	2.000	0.03	21.52	23.00	1.406	2.812	22.1
Bottom side	20	QPSK 50RB_50	19100/1900	1:1	1.900	0.03	21.53	23.00	1.403	2.665	22.1
Product specific 10g SAR Test data (Separate 0mm 100%RB)Sensor on											
Bottom side	20	QPSK 100RB_0	18900/1880	1:1	2.030	0.04	21.58	23.00	1.387	2.815	22.1
Product specific 10g SAR Test data(Separate 0mm 1RB)Sensor off											
Bottom side-19mm	20	QPSK 1RB_0	18700/1860	1:1	0.201	0.04	22.41	24.00	1.442	0.290	22.1
Product specific 10g SAR Test data (Separate 0mm 50%RB)Sensor off											
Bottom side-19mm	20	QPSK 50RB_25	18700/1860	1:1	0.164	0.03	21.67	23.00	1.358	0.223	22.1
ANT1 with Simultaneous transmission											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_0	18700/1860	1:1	0.709	0.42	20.20	20.00	0.955	0.677	22.3
Left tilted	20	QPSK 1RB_0	18700/1860	1:1	0.306	-0.05	20.20	20.00	0.955	0.292	22.3
Right cheek	20	QPSK 1RB_0	18700/1860	1:1	0.881	0.07	20.20	20.00	0.955	0.841	22.3
Right tilted	20	QPSK 1RB_0	18700/1860	1:1	0.202	0.01	20.20	20.00	0.955	0.193	22.3
Right cheek	20	QPSK 1RB_0	18900/1880	1:1	0.931	0.05	19.91	20.00	1.021	0.950	22.3
Right cheek	20	QPSK 1RB_0	19100/1900	1:1	0.982	0.03	19.88	20.00	1.028	1.010	22.3
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_25	18700/1860	1:1	0.683	0.13	20.09	20.00	0.979	0.669	22.3
Left tilted	20	QPSK 50RB_25	18700/1860	1:1	0.161	0.17	20.09	20.00	0.979	0.158	22.3
Right cheek	20	QPSK 50RB_25	18700/1860	1:1	0.896	0.06	20.09	20.00	0.979	0.878	22.3
Right tilted	20	QPSK 50RB_25	18700/1860	1:1	0.212	0.02	20.09	20.00	0.979	0.208	22.3
Right cheek	20	QPSK 50RB_25	18900/1880	1:1	0.958	0.08	19.90	20.00	1.023	0.980	22.3
Right cheek	20	QPSK 50RB_25	19100/1900	1:1	1.020	0.01	20.00	20.00	1.000	1.020	22.3
Head Test data(100%RB)											
Left cheek	20	QPSK 100RB_0	19100/1900	1:1	0.711	0.03	20.26	20.00	0.942	0.670	22.3
Right cheek	20	QPSK 100RB_0	19100/1900	1:1	1.020	0.16	20.26	20.00	0.942	0.961	22.3
Right cheek-repeat	20	QPSK 100RB_0	19100/1900	1:1	0.984	0.11	20.26	20.00	0.942	0.927	22.3
ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the worst case with Second supply											
Right cheek	20	QPSK 50RB_25	19100/1900	1:1	0.950	0.08	20.00	21.00	1.259	1.196	22.3
Body worn Test data at the worst case with Second supply											
Back side	20	QPSK 1RB_0	18700/1860	1:1	0.331	0.14	22.52	23.00	1.117	0.370	22.1
Hotspot Test data at the worst case with Second supply											
Left side	20	QPSK 1RB_0	18700/1860	1:1	0.487	0.11	22.52	23.00	1.117	0.544	22.1
ANT0											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the worst case with Second supply											
Left cheek	20	QPSK 1RB_0	18900/1880	1:1	0.017	-0.12	22.41	24.00	1.442	0.025	22.3
Body worn Test data at the worst case with Second supply											
Front side	20	QPSK 50RB_0	18700/1860	1:1	0.441	0.15	21.54	23.00	1.400	0.617	22.1
Hotspot Test data at the worst case with Second supply											
Bottom side	20	QPSK 50RB_50	18900/1880	1:1	0.975	0.15	21.52	23.00	1.406	1.371	22.1
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Product specific 10g SAR Test data at the worst case with Second supply											
Bottom side	20	QPSK 50RB_0	18700/1860	1:1	1.960	-0.17	21.54	23.00	1.400	2.743	22.1

Table 19: SAR of LTE Band 2 for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Position	Channel/ Frequency	Measured SAR (1g)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Right cheek	19100/1900	1.02	0.984	1.03659	N/A	N/A
Bottom side	18900/1880	0.982	0.975	1.00718	N/A	N/A

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.2.10SAR Result of LTE Band 4

ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	20300/1745	1:1	0.546	0.08	19.97	21.00	1.268	0.692	22.2
Left tilted	20	QPSK 1RB_50	20300/1745	1:1	0.303	-0.01	19.97	21.00	1.268	0.384	22.2
Right cheek	20	QPSK 1RB_50	20300/1745	1:1	1.130	0.05	19.97	21.00	1.268	1.432	22.2
Right cheek-repeat	20	QPSK 1RB_50	20300/1745	1:1	1.080	0.07	19.97	21.00	1.268	1.369	22.2
Right tilted	20	QPSK 1RB_50	20300/1745	1:1	0.259	0.07	19.97	21.00	1.268	0.328	22.2
Right cheek	20	QPSK 1RB_50	20050/1720	1:1	0.954	0.01	19.80	21.00	1.318	1.258	22.2
Right cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.998	0.03	19.91	21.00	1.285	1.283	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_25	20300/1745	1:1	0.573	0.12	19.89	21.00	1.291	0.740	22.2
Left tilted	20	QPSK 50RB_25	20300/1745	1:1	0.286	0.06	19.89	21.00	1.291	0.369	22.2
Right cheek	20	QPSK 50RB_25	20300/1745	1:1	1.020	-0.01	19.89	21.00	1.291	1.317	22.2
Right tilted	20	QPSK 50RB_25	20300/1745	1:1	0.265	0.00	19.89	21.00	1.291	0.342	22.2
Right cheek	20	QPSK 50RB_25	20050/1720	1:1	1.000	0.02	19.84	21.00	1.306	1.306	22.2
Right cheek	20	QPSK 50RB_25	20175/1732.5	1:1	1.040	0.06	19.83	21.00	1.309	1.362	22.2
Head Test data(100%RB)											
Right cheek	20	QPSK 100RB_0	20300/1745	1:1	0.959	0.03	19.95	21.00	1.274	1.221	22.2
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	20300/1745	1:1	0.394	0.01	23.54	24.00	1.112	0.438	22.2
Back side	20	QPSK 1RB_50	20300/1745	1:1	0.456	-0.03	23.54	24.00	1.112	0.507	22.2
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_25	20300/1745	1:1	0.330	0.05	22.51	23.00	1.119	0.369	22.2
Back side	20	QPSK 50RB_25	20300/1745	1:1	0.354	-0.19	22.51	23.00	1.119	0.396	22.2
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_50	20300/1745	1:1	0.394	0.01	23.54	24.00	1.112	0.438	22.2
Back side	20	QPSK 1RB_50	20300/1745	1:1	0.456	-0.03	23.54	24.00	1.112	0.507	22.2
Left side	20	QPSK 1RB_50	20300/1745	1:1	0.700	-0.03	23.54	24.00	1.112	0.778	22.2
Right side	20	QPSK 1RB_50	20300/1745	1:1	0.021	0.15	23.54	24.00	1.112	0.024	22.2
Top side	20	QPSK 1RB_50	20300/1745	1:1	0.056	0.06	23.54	24.00	1.112	0.062	22.2
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_25	20300/1745	1:1	0.330	0.05	22.51	23.00	1.119	0.369	22.2
Back side	20	QPSK 50RB_25	20300/1745	1:1	0.354	-0.19	22.51	23.00	1.119	0.396	22.2
Left side	20	QPSK 50RB_25	20300/1745	1:1	0.559	0.01	22.51	23.00	1.119	0.626	22.2
Right side	20	QPSK 50RB_25	20300/1745	1:1	0.018	0.06	22.51	23.00	1.119	0.020	22.2
Top side	20	QPSK 50RB_25	20300/1745	1:1	0.046	-0.01	22.51	23.00	1.119	0.051	22.2
ANT0											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_0	20300/1745	1:1	0.018	0.02	22.45	24.00	1.429	0.026	22.2
Left tilted	20	QPSK 1RB_0	20300/1745	1:1	0.006	0.00	22.45	24.00	1.429	0.009	22.2
Right cheek	20	QPSK 1RB_0	20300/1745	1:1	0.010	0.04	22.45	24.00	1.429	0.014	22.2
Right tilted	20	QPSK 1RB_0	20300/1745	1:1	0.005	0.07	22.45	24.00	1.429	0.007	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_50	20175/1732.5	1:1	0.013	0.09	21.54	23.00	1.400	0.018	22.2
Left tilted	20	QPSK 50RB_50	20175/1732.5	1:1	0.006	0.00	21.54	23.00	1.400	0.008	22.2
Right cheek	20	QPSK 50RB_50	20175/1732.5	1:1	0.007	0.09	21.54	23.00	1.400	0.010	22.2
Right tilted	20	QPSK 50RB_50	20175/1732.5	1:1	0.003	0.16	21.54	23.00	1.400	0.004	22.2
Body worn Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	20300/1745	1:1	0.282	0.01	22.45	24.00	1.429	0.403	22.2
Back side	20	QPSK 1RB_0	20300/1745	1:1	0.245	0.01	22.45	24.00	1.429	0.350	22.2
Body worn Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20175/1732.5	1:1	0.286	0.02	21.54	23.00	1.400	0.400	22.2
Back side	20	QPSK 50RB_50	20175/1732.5	1:1	0.243	-0.06	21.54	23.00	1.400	0.340	22.2
Hotspot Test data(Separate 10mm 1RB)											
Front side	20	QPSK 1RB_0	20300/1745	1:1	0.282	0.01	22.45	24.00	1.429	0.403	22.2
Back side	20	QPSK 1RB_0	20300/1745	1:1	0.245	0.01	22.45	24.00	1.429	0.350	22.2
Left side	20	QPSK 1RB_0	20300/1745	1:1	0.040	0.02	22.45	24.00	1.429	0.058	22.2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Right side	20	QPSK 1RB_0	20300/1745	1:1	0.042	0.03	22.45	24.00	1.429	0.060	22.2
Bottom side	20	QPSK 1RB_0	20300/1745	1:1	0.759	-0.08	22.45	24.00	1.429	1.085	22.2
Bottom side	20	QPSK 1RB_0	20050/1720	1:1	0.661	0.08	22.33	24.00	1.469	0.971	22.2
Bottom side	20	QPSK 1RB_0	20175/1732.5	1:1	0.696	0.05	22.44	24.00	1.432	0.997	22.2
Hotspot Test data (Separate 10mm 50%RB)											
Front side	20	QPSK 50RB_50	20175/1732.5	1:1	0.286	0.02	21.54	23.00	1.400	0.400	22.2
Back side	20	QPSK 50RB_50	20175/1732.5	1:1	0.243	-0.06	21.54	23.00	1.400	0.340	22.2
Left side	20	QPSK 50RB_50	20175/1732.5	1:1	0.033	0.03	21.54	23.00	1.400	0.046	22.2
Right side	20	QPSK 50RB_50	20175/1732.5	1:1	0.034	0.03	21.54	23.00	1.400	0.047	22.2
Bottom side	20	QPSK 50RB_50	20175/1732.5	1:1	0.651	0.04	21.54	23.00	1.400	0.911	22.2
Bottom side	20	QPSK 50RB_50	20300/1745	1:1	0.673	0.04	21.42	23.00	1.439	0.968	22.2
Bottom side	20	QPSK 50RB_25	20050/1720	1:1	0.592	0.06	21.47	23.00	1.422	0.842	22.2
Hotspot Test data (Separate 10mm 100%RB)											
Bottom side	20	QPSK 100RB_0	20300/1745	1:1	0.635	-0.18	21.51	23.00	1.409	0.895	22.3
ANT1 with Simultaneous transmission											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB)											
Left cheek	20	QPSK 1RB_50	20300/1745	1:1	0.546	0.08	19.97	20.00	1.007	0.550	22.2
Left tilted	20	QPSK 1RB_50	20300/1745	1:1	0.303	-0.01	19.97	20.00	1.007	0.305	22.2
Right cheek	20	QPSK 1RB_50	20300/1745	1:1	1.130	0.05	19.97	20.00	1.007	1.138	22.2
Right cheek-repeat	20	QPSK 1RB_50	20300/1745	1:1	1.080	0.07	19.97	20.00	1.007	1.087	22.2
Right tilted	20	QPSK 1RB_50	20300/1745	1:1	0.259	0.07	19.97	20.00	1.007	0.261	22.2
Right cheek	20	QPSK 1RB_50	20050/1720	1:1	0.954	0.01	19.80	20.00	1.047	0.999	22.2
Right cheek	20	QPSK 1RB_50	20175/1732.5	1:1	0.998	0.03	19.91	20.00	1.021	1.019	22.2
Head Test data(50%RB)											
Left cheek	20	QPSK 50RB_25	20300/1745	1:1	0.573	0.12	19.89	20.00	1.026	0.588	22.2
Left tilted	20	QPSK 50RB_25	20300/1745	1:1	0.286	0.06	19.89	20.00	1.026	0.293	22.2
Right cheek	20	QPSK 50RB_25	20300/1745	1:1	1.020	-0.01	19.89	20.00	1.026	1.046	22.2
Right tilted	20	QPSK 50RB_25	20300/1745	1:1	0.265	0.00	19.89	20.00	1.026	0.272	22.2
Right cheek	20	QPSK 50RB_25	20050/1720	1:1	1.000	0.02	19.84	20.00	1.038	1.038	22.2
Right cheek	20	QPSK 50RB_25	20175/1732.5	1:1	1.040	0.06	19.83	20.00	1.040	1.082	22.2
Head Test data(100%RB)											
Right cheek	20	QPSK 100RB_0	20300/1745	1:1	0.959	0.03	19.95	20.00	1.012	0.970	22.2
ANT1											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the worst case with Second supply											
Right cheek	20	QPSK 1RB_50	20300/1745	1:1	1.110	0.01	19.97	21.00	1.268	1.407	22.2
Body worn Test data at the worst case with Second supply											
Back side	20	QPSK 1RB_50	20300/1745	1:1	0.432	0.15	23.54	24.00	1.112	0.480	22.2
Hotspot Test data at the worst case with Second supply											
Left side	20	QPSK 1RB_50	20300/1745	1:1	0.648	0.01	23.54	24.00	1.112	0.720	22.2
ANT0											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the worst case with Second supply											
Left cheek	20	QPSK 1RB_0	20300/1745	1:1	0.015	-0.14	22.45	24.00	1.429	0.021	22.2
Body worn Test data at the worst case with Second supply											
Front side	20	QPSK 1RB_0	20300/1745	1:1	0.256	0.16	22.45	24.00	1.429	0.366	22.2
Hotspot Test data at the worst case with Second supply											
Bottom side	20	QPSK 1RB_0	20300/1745	1:1	0.711	0.03	22.45	24.00	1.429	1.016	22.2

Table 20: SAR of LTE Band 4 for Head and Body.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.