

# FCC TEST REPORT (PART 24)



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Tablet PC
Brand Name:	NOKIA
Model Name:	TA-1495
FCC ID:	2AJOTTA-1495
Date of tests:	Aug. 03, 2022 ~ Sep. 20, 2022

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**
 **FCC PART 2**  
 **ANSI/TIA/EIA-603-D**
 **ANSI/TIA/EIA-603-E**
 **ANSI C63.26-2015**

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
  Date: Sep. 13, 2022	  Date: Sep. 13, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	6
1.2 TEST SITE AND INSTRUMENTS .....	7
<b>2 GENERAL INFORMATION .....</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT .....	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	10
2.3 DESCRIPTION OF SUPPORT UNITS .....	11
2.4 TEST ITEM AND TEST CONFIGURATION.....	11
2.5 EUT OPERATING CONDITIONS .....	12
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	12
<b>3 TEST TYPES AND RESULTS .....</b>	<b>13</b>
3.1 OUTPUT POWER MEASUREMENT .....	13
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	13
3.1.2 TEST PROCEDURES.....	13
3.1.3 TEST SETUP .....	14
3.1.4 TEST RESULTS.....	14
3.2 FREQUENCY STABILITY MEASUREMENT .....	16
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	16
3.2.2 TEST PROCEDURE .....	16
3.2.3 TEST SETUP .....	16
3.2.4 TEST RESULTS.....	17
3.3 OCCUPIED BANDWIDTH MEASUREMENT .....	18
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT .....	18
3.3.2 TEST SETUP .....	18
3.3.3 TEST PROCEDURES.....	18
3.3.4 TEST RESULTS.....	19
3.4 BAND EDGE MEASUREMENTC .....	20
3.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	20
3.4.2 TEST SETUP .....	20
3.4.3 TEST PROCEDURES.....	21
3.4.4. TEST RESULTS.....	22
3.5 CONDUCTED SPURIOUS EMISSIONS.....	23
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	23
3.5.2 TEST PROCEDURE .....	23
3.5.3 TEST SETUP .....	23
3.5.4 TEST RESULTS.....	24
3.6 RADIATED EMISSION MEASUREMENT .....	25
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	25
3.6.2 TEST PROCEDURES.....	25



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

3.6.3 DEVIATION FROM TEST STANDARD .....	25
3.6.4 TEST SETUP .....	26
3.6.5 TEST RESULTS .....	28
3.7 PEAK TO AVERAGE RATIO .....	42
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....	42
3.7.2 TEST SETUP .....	42
3.7.3 TEST PROCEDURES .....	42
3.7.4 TEST RESULTS .....	43
<b>4 INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>44</b>
<b>5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>45</b>
<b>6 APPENDIX .....</b>	<b>46</b>
GSM1900 .....	46



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P22080003RF05

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22080003RF05	Original release	Sep. 20, 2022



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Coducted Output Power	Compliance
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance
§2.1055 §24.235	Frequency Stability	Compliance
§2.1049	Occupied Bandwidth	Compliance
§24.232(d)	Peak to average ratio	Compliance
§24.238(a)(b)	Band Edge Measurements	Compliance
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance

**NOTE:**

This report refers to the data of W7L-P22070038RF05 ( FCC ID: 2AJOTTA-1505, model: TA-1505 ) except to RSE and EIRP, the change between TA-1505 and TA-1495 is the difference of supporting bands and model name. In this report verify conducted power and RSE. So this report replaces the worst RSE data of supporting band, and updated the power of all supporting bands.

Detailed differences and validation are listed as below

Quoted FCC ID	Model	Supporting bands	Spot-Check	Replace data
2AJOTTA-1505	TA1505	GSM 850/1900 WCDMA Band 2/4/5 LTE Band2/4/5/7/7C/12/13/17/38/41/66	Conducted power &RSE	RSE& Coducted Output Power&EIRP
2AJOTTA-1495	TA1495	GSM 850/1900 WCDMA Band 5 LTE Band5/7/38/41/41C	Conducted power &RSE	RSE& Coducted Output Power&EIRP

Note : The difference is only the supporting bands of WWAN, other parts are all the same.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 21,22	Feb. 20,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.15,22	May.14,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.05,21	Sep.04,22
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.04,22	Sep.03,23
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Mar. 06,22	Mar. 05,23
Horn Antenna	ETS-LINDGRE N	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 24, 22	Aug. 23, 23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15,22	Feb. 14,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 21,22	Feb.20,23
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	May. 07,22	May. 06,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Sensor	Anritsu	MA2411B	1339352	May. 07,22	May. 06,23
Temperature Chamber	ESPEC	SH-242	93000855	May. 12,22	May. 11,23
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 18,22	Feb. 17,23
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.12,22	May.11,23
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 25,21	Aug. 24,22
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 24,22	Aug. 23,23

- NOTE:** 1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.  
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.  
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.  
4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Tablet PC	
<b>BRAND NAME</b>	NOKIA	
<b>MODEL NAME</b>	TA-1495	
<b>NOMINAL VOLTAGE</b>	5.0Vdc(adapter or host equipment) 3.85Vdc (Li-ion, battery)	
<b>MODULATION TYPE</b>	<b>GSM:</b> GMSK <b>EDGE:</b> 8PSK	
<b>FREQUENCY RANGE</b>	<b>GSM, EDGE</b>	1850.2MHz ~ 1909.8MHz
<b>MAX. EIRP POWER</b>	<b>GSM</b>	703.07mW
	<b>EDGE</b>	334.97mW
<b>EMISSION DESIGNATOR</b>	<b>GSM</b>	248KGXW
	<b>EDGE</b>	244KG7W
<b>ANTENNA TYPE</b>	Fixed Internal Antenna with -0.53dBi gain for GSM1900	
<b>VERSION</b>	V0.492_B01	
<b>I/O PORTS</b>	Refer to user's manual	
<b>CABLE SUPPLIED</b>	USB cable: non-shielded cable, with w/o ferrite core, 1 meter Earphone: non-shielded cable, with w/o ferrite core, 1.5 meter	
<b>EXTREME TEMPERATURE</b>	0-40 °C	
<b>EXTREME VOLTAGE</b>	3.6V - 4. 4V	

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.





2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


**List of Accessory:**

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	NOKIA	Guangdong Fenghua New Energy Co., Ltd.	WTT80	Capacity : 3.8 Vdc, 8000mAh
AC Adapter	NOKIA	Shenzhen Baijunda Electronic Co., Ltd	AD-010U	I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A
Earphone	NOKIA	JUWEI ELECTRONICS CO., LTD	JWEP1242-W09 H	Signal Line, 1.5meter
USB Cable	NOKIA	Saibao (Jiangxi) Industrial Co., Ltd	AC-2A	Signal Line, 1.0meter



## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

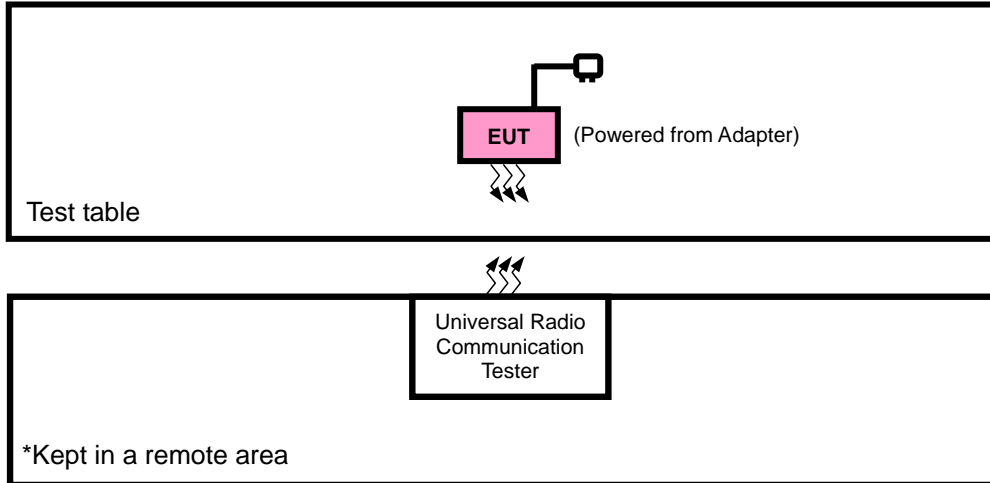



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with GSM link
B	EUT + Battery with GSM link

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM,EDGE
B	FREQUENCY STABILITY	512 to 810	512, 661, 810	GSM,EDGE
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM,EDGE
A	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM,EDGE
A	BAND EDGE	512 to 810	512, 810	GSM,EDGE
A	CONDCUDED EMISSION	512 to 810	512, 661, 810	GSM,EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM,EDGE



**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 5V By Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 3.8V By Battery	James Fu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC5V By Adapter	James Fu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 5V By Adapter	James Fu
BAND EDGE	23deg. C, 61%RH	DC5V By Adapter	James Fu
CONDCUDED EMISSION	23deg. C, 61%RH	DC5V By Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Jace Hu

**2.5 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



## 3 TEST TYPES AND RESULTS

### 3.1 OUTPUT POWER MEASUREMENT

#### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 3.1.2 TEST PROCEDURES

##### **EIRP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

##### **CONDUCTED POWER MEASUREMENT:**


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

**EIRP / ERP Measurement:**

**CONDUCTED POWER MEASUREMENT:**



### 3.1.4 TEST RESULTS

**CONDUCTED OUTPUT POWER (dBm)**

Band	GPRS1900		
	512	661	810
Channel	1850.2	1880	1909.8
Frequency	1850.2	1880	1909.8
<b>GSM</b>	28.95	28.98	28.79
<b>GPRS (GMSK, 1Tx-slot)</b>	28.96	29.00	28.90
<b>GPRS (GMSK, 2Tx-slot)</b>	27.06	27.08	27.00
<b>GPRS (GMSK, 3Tx-slot)</b>	25.34	25.59	24.96
<b>GPRS (GMSK, 4Tx-slot)</b>	23.29	23.53	22.95
<b>EDGE (8PSK, 1Tx-slot)</b>	25.71	25.78	25.65
<b>EDGE (8PSK, 2Tx-slot)</b>	24.33	24.54	24.30
<b>EDGE (8PSK, 3Tx-slot)</b>	21.97	22.30	22.15
<b>EDGE (8PSK, 4Tx-slot)</b>	20.18	20.47	20.38



**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

**EIRP POWER (dBm)**

**GSM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	28.96	-0.53	28.43	696.63	2
661	1880.0	29	-0.53	28.47	703.07	2
810	1909.8	28.9	-0.53	28.37	687.07	2

**EDGE**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.71	-0.53	25.18	329.61	2
661	1880.0	25.78	-0.53	25.25	334.97	2
810	1909.8	25.65	-0.53	25.12	325.09	2



### 3.2 FREQUENCY STABILITY MEASUREMENT

#### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 3.2.3 TEST SETUP

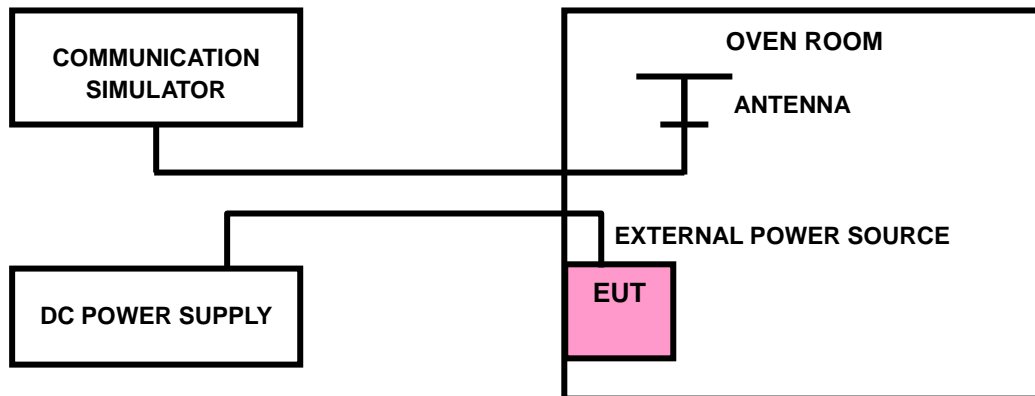





Test Report No.: W7L-P22080003RF05

### 3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.




### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

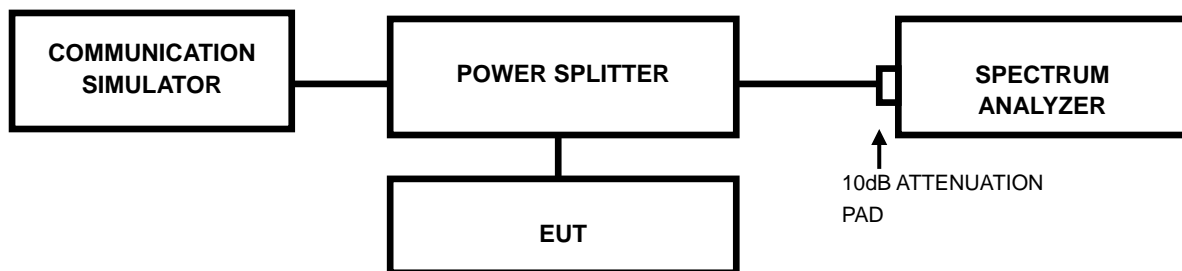

#### 3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-P22080003RF05

### 3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.




### 3.4 BAND EDGE MEASUREMENTC

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

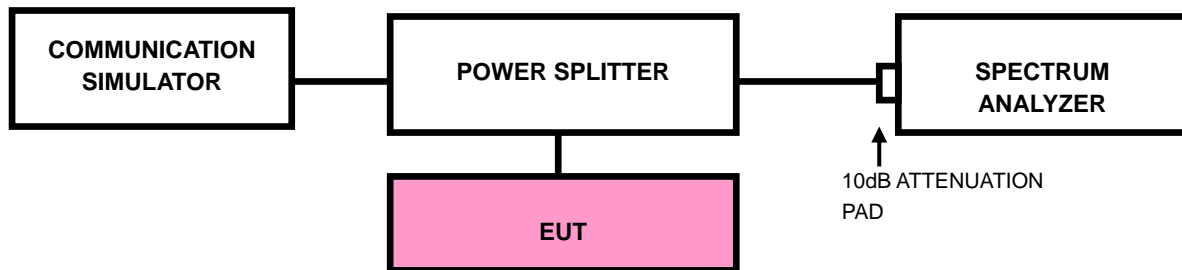



Test Report No.: W7L-P22080003RF05

### 3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE bandwidth).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is  $\geq 1\% \cdot \text{EBW}$  kHz and VBW of the spectrum is  $3 \cdot \text{RBW}$  kHz.
- d. Record the max trace plot into the test report.



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

### 3.4.4. TEST RESULTS

Please Refer to Appendix Of this test report.



### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30MHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

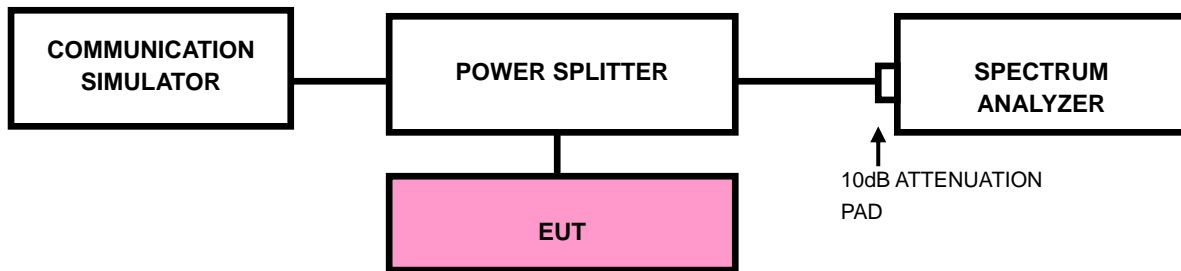



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

### 3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.





### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


#### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.6.4 TEST SETUP

#### < Frequency Range below 30MHz >

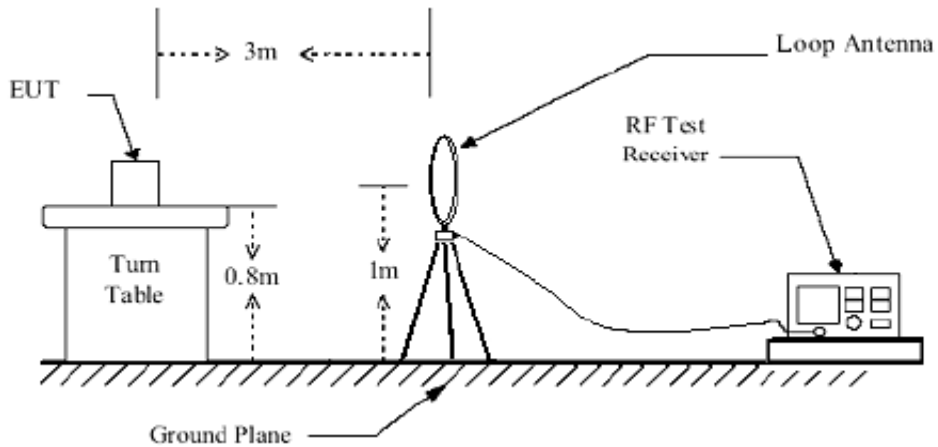

#### < Frequency Range 30MHz~1GHz >

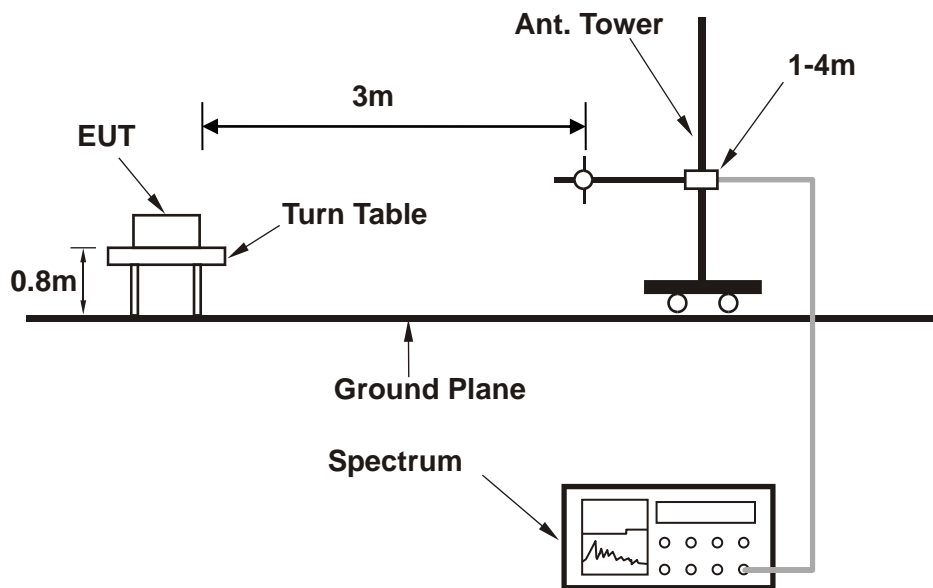




BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05

<Frequency Range above 1GHz>

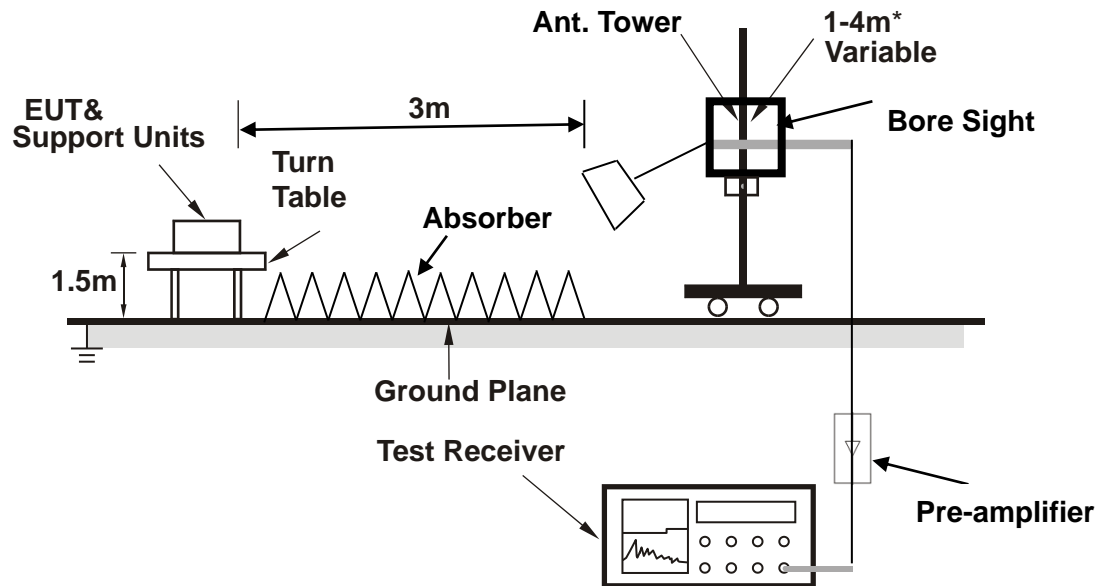

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU VERITAS

Test Report No.: W7L-P22080003RF05

### 3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

#### BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

GSM 1900:

CHANNEL BANDWIDTH: 512 ~ 810

MODE	TX channel 810	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	56.190	-62.86	-44.78	-13.00	-49.86	-18.08	Peak	Horizontal
2	81.410	-70.37	-48.89	-13.00	-57.37	-21.48	Peak	Horizontal
3	163.860	-66.11	-50.04	-13.00	-53.11	-16.07	Peak	Horizontal
4 PP	252.130	-59.16	-47.66	-13.00	-46.16	-11.50	Peak	Horizontal
5	318.090	-60.92	-48.90	-13.00	-47.92	-12.02	Peak	Horizontal
6	422.850	-66.99	-57.37	-13.00	-53.99	-9.62	Peak	Horizontal

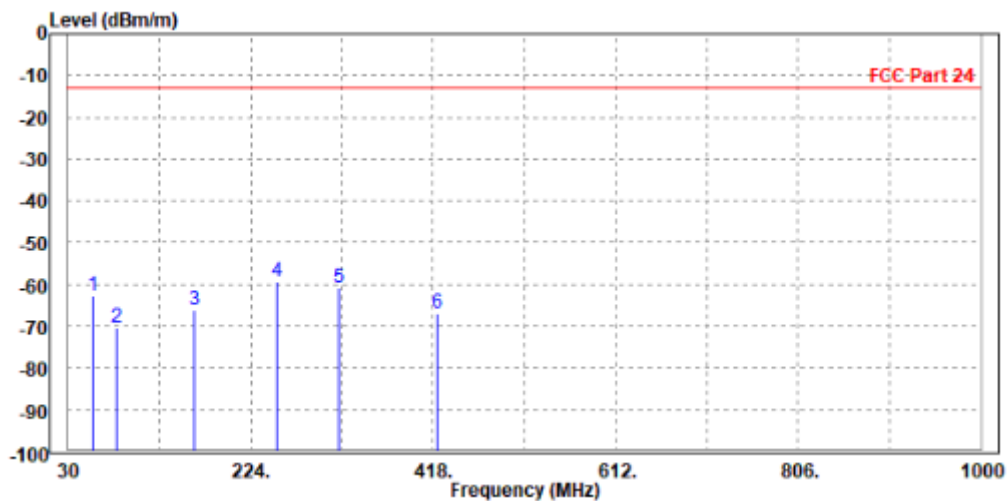




**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	41.640	-64.06	-39.06	-13.00	-51.06	-25.00 Peak	Vertical
2 PP	103.720	-57.72	-49.80	-13.00	-44.72	-7.92 Peak	Vertical
3	142.520	-67.86	-53.61	-13.00	-54.86	-14.25 Peak	Vertical
4	251.160	-65.86	-52.33	-13.00	-52.86	-13.53 Peak	Vertical
5	310.330	-65.35	-54.72	-13.00	-52.35	-10.63 Peak	Vertical
6	422.850	-69.84	-61.05	-13.00	-56.84	-8.79 Peak	Vertical

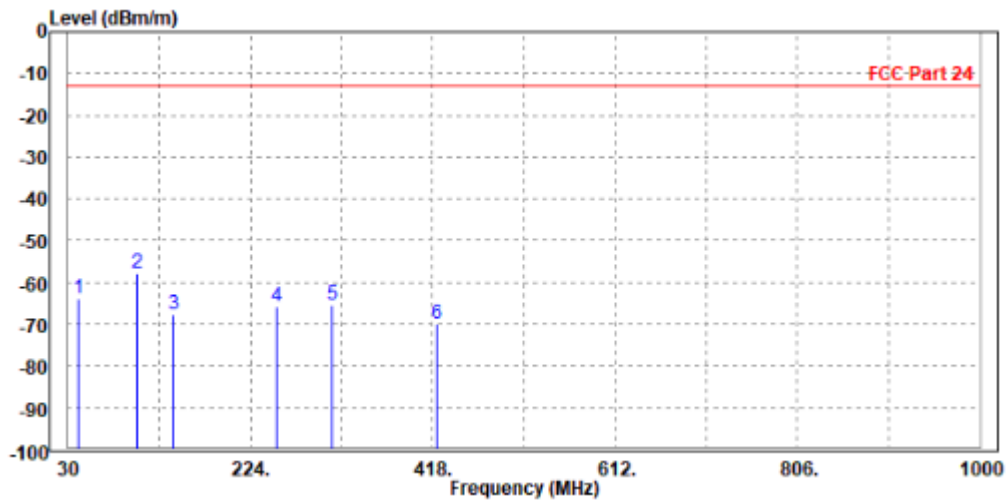



**ABOVE 1GHz DATA**

**Note:** For higher frequency, the emission is too low to be detected.


**WORST-CASE DATA**

**GPRS 1900:**

**CH 512**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-52.50	-60.33	-13.00	-39.50	7.83	Peak	Horizontal
2 PP	5550.600	-51.88	-62.45	-13.00	-38.88	10.57	Peak	Horizontal

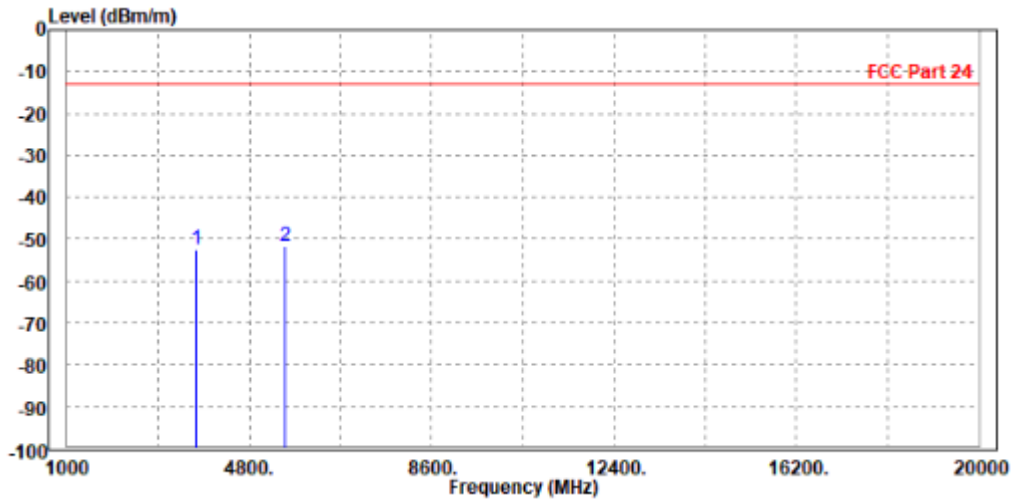




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-53.34	-60.95	-13.00	-40.34	7.61	Peak	Vertical
2 PP	5550.600	-52.90	-63.77	-13.00	-39.90	10.87	Peak	Vertical

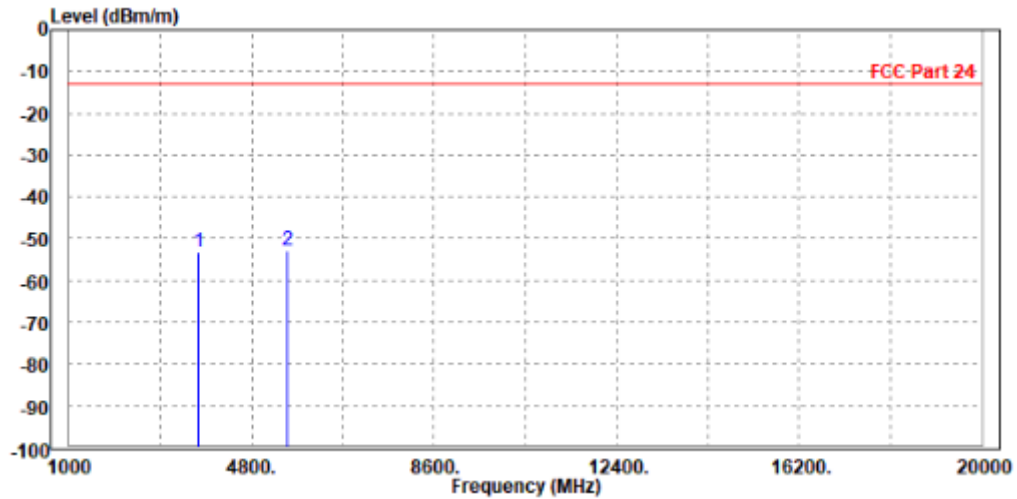




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

**CH 661**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-52.60	-60.58	-13.00	-39.60	7.98	Peak	Horizontal
2	5640.000	-52.64	-63.38	-13.00	-39.64	10.74	Peak	Horizontal

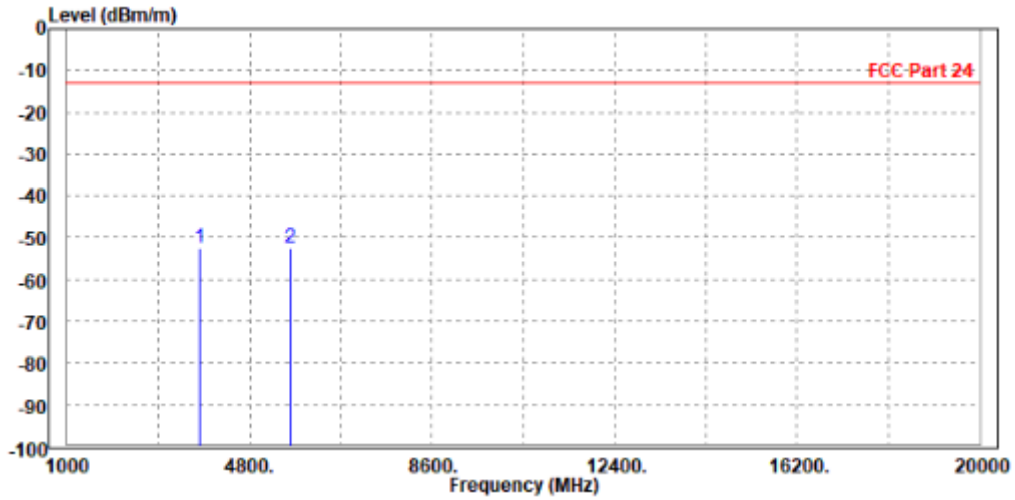






**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-53.33	-61.02	-13.00	-40.33	7.69	Peak	Vertical
2	PP 5640.000	-51.15	-62.28	-13.00	-38.15	11.13	Peak	Vertical

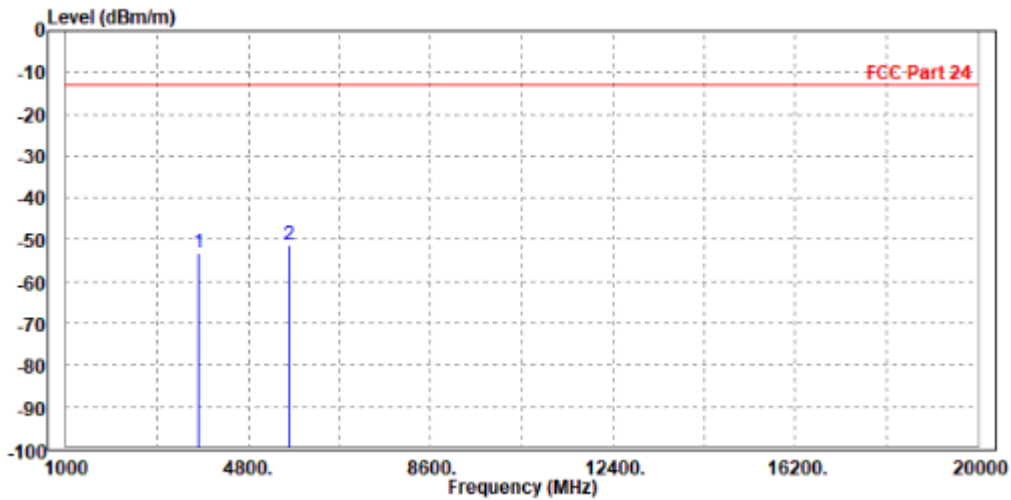




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

**CH 810**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-52.42	-60.54	-13.00	-39.42	8.12	Peak	Horizontal
2 PP	5729.400	-51.13	-62.04	-13.00	-38.13	10.91	Peak	Horizontal

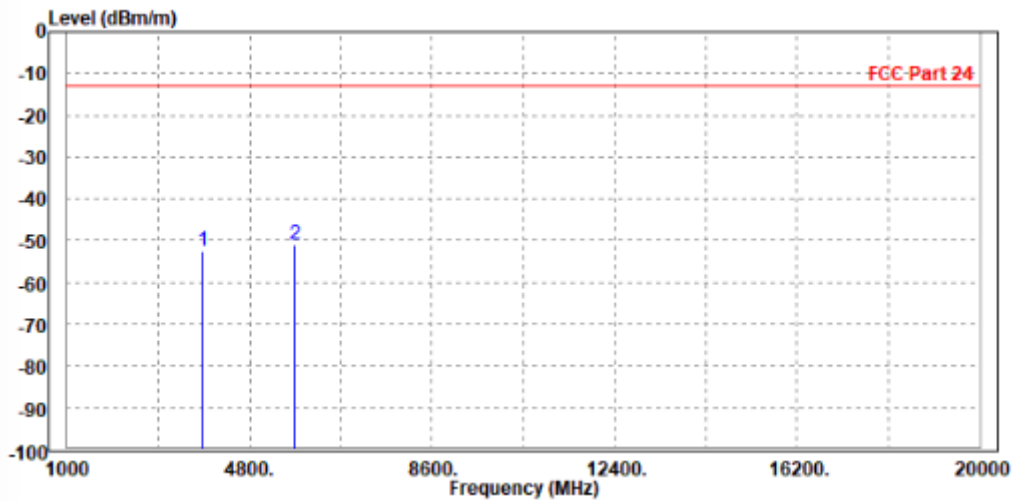




**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-52.64	-60.41	-13.00	-39.64	7.77	Peak	Vertical
2	PP 5729.400	-50.38	-61.76	-13.00	-37.38	11.38	Peak	Vertical

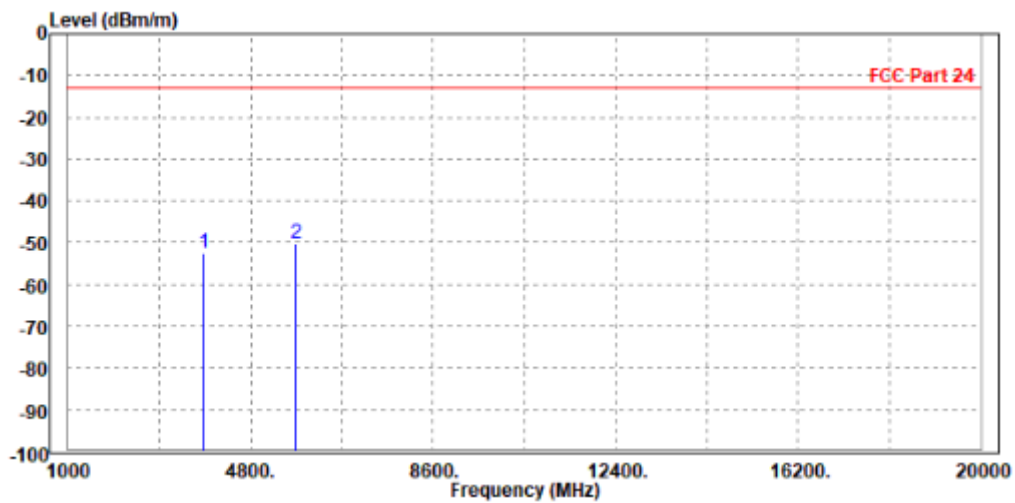



**BUREAU  
VERITAS**


Test Report No.: W7L-P22080003RF05

EDGE 1900:

CH 512

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.400	-43.46	-51.30	-13.00	-30.46	7.84	Peak	Horizontal
2	5560.000	-46.40	-56.99	-13.00	-33.40	10.59	Peak	Horizontal

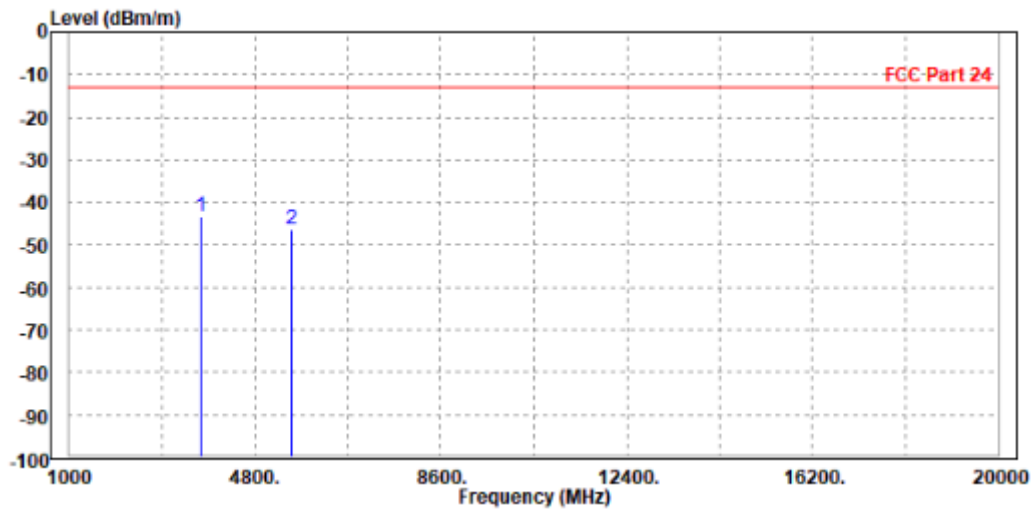




**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3698.000	-42.25	-49.86	-13.00	-29.25	7.61	Peak	Vertical
2	5550.600	-49.13	-60.00	-13.00	-36.13	10.87	Peak	Vertical

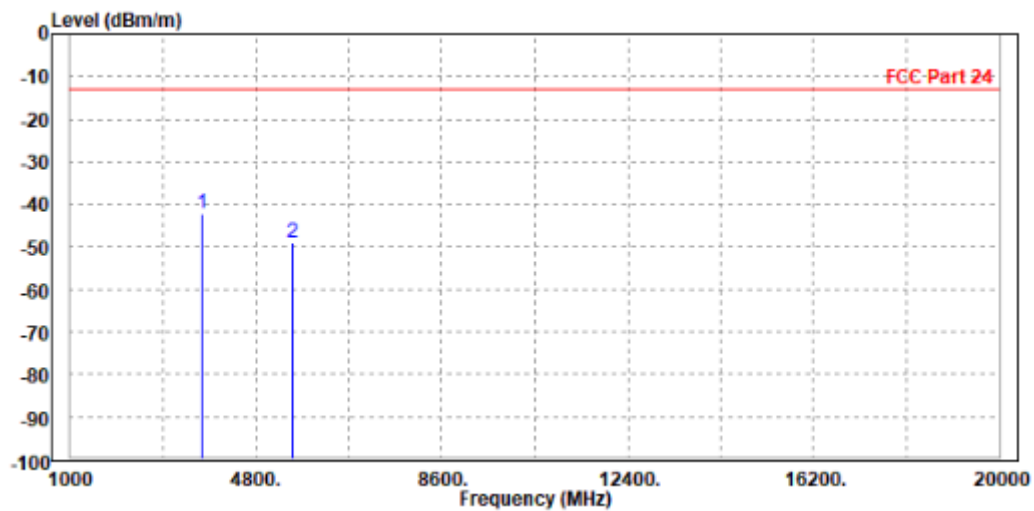




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

**CH 661**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-43.06	-51.04	-13.00	-30.06	7.98	Peak	Horizontal
2	5640.000	-50.21	-60.95	-13.00	-37.21	10.74	Peak	Horizontal

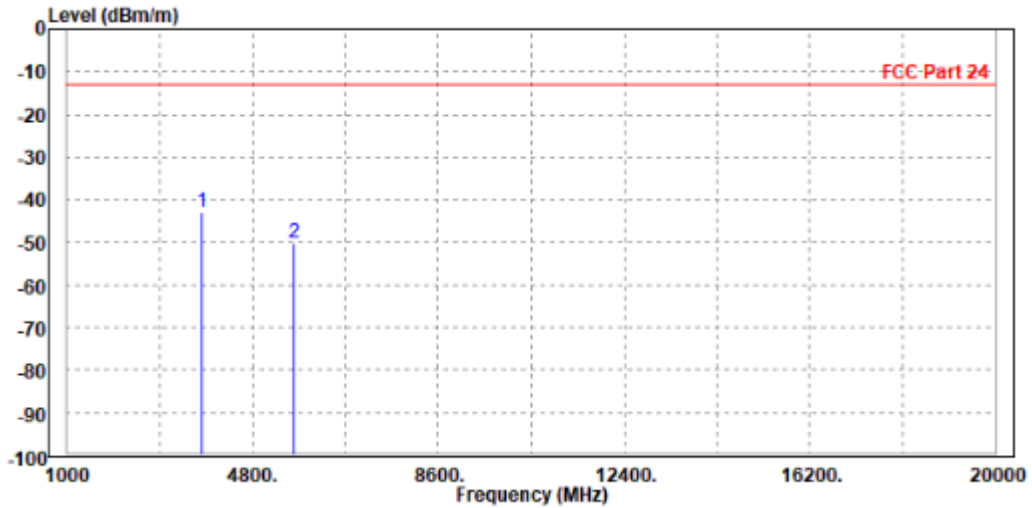




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-46.85	-54.55	-13.00	-33.85	7.70	Peak	Vertical
2 PP	5636.000	-44.56	-55.68	-13.00	-31.56	11.12	Peak	Vertical

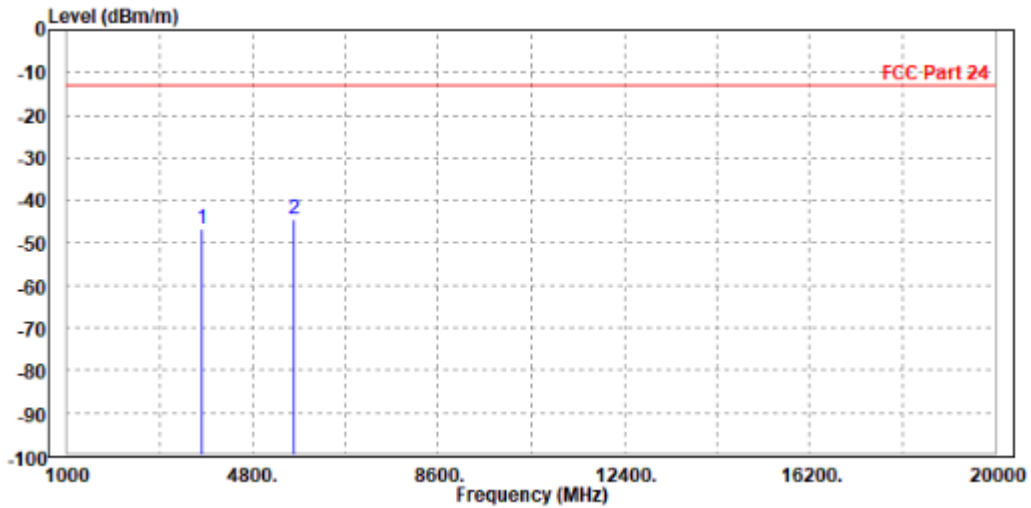




**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

**CH 810**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.94	-57.06	-13.00	-35.94	8.12	Peak	Horizontal
2 PP	5729.400	-47.52	-58.43	-13.00	-34.52	10.91	Peak	Horizontal

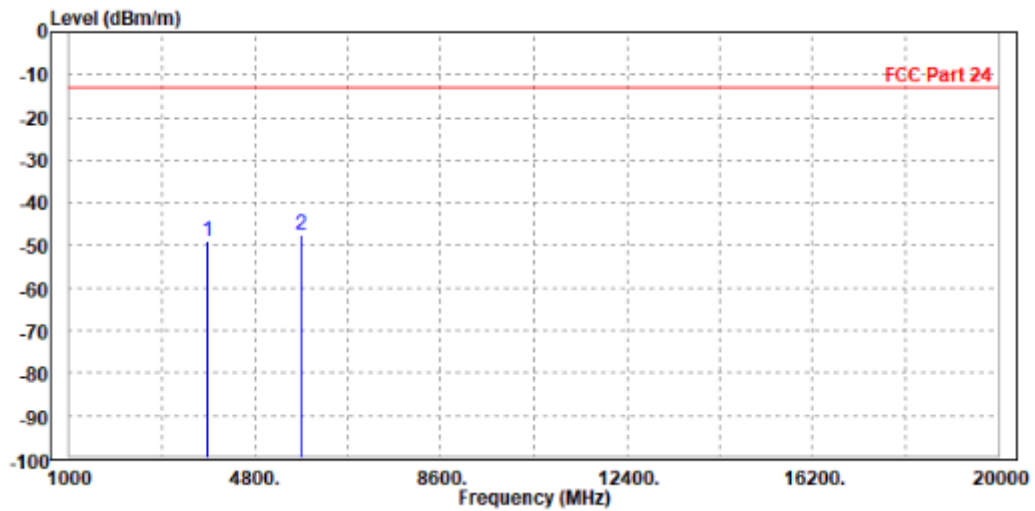






**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3700.400	-53.43	-61.04	-13.00	-40.43	7.61	Peak	Vertical
2 PP	5731.000	-49.59	-60.98	-13.00	-36.59	11.39	Peak	Vertical

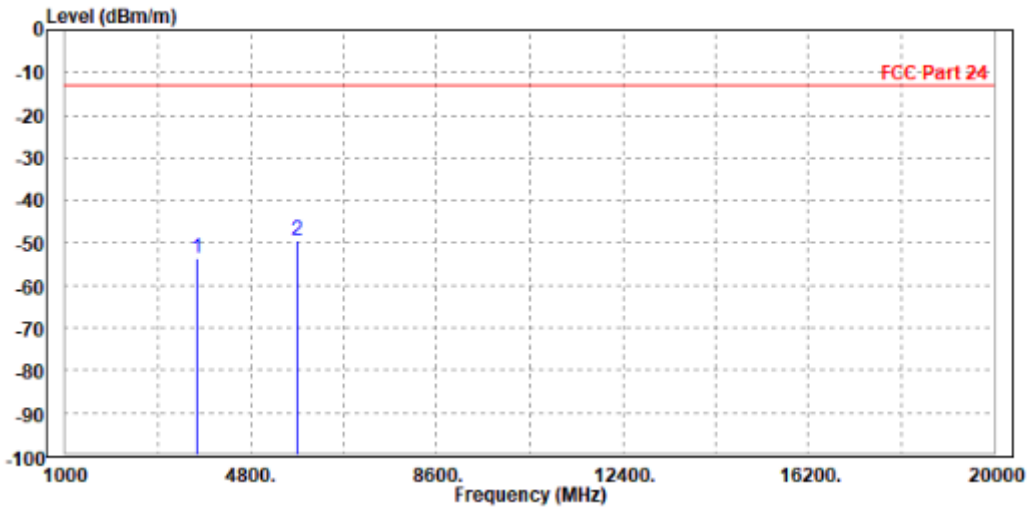




### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

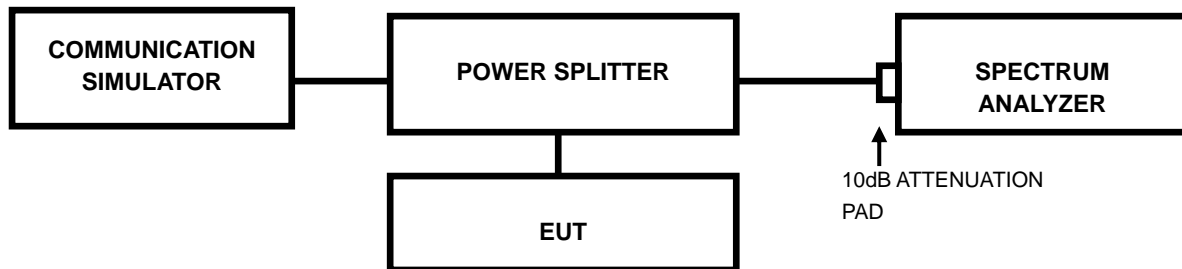

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



**BUREAU  
VERITAS**

**Test Report No.: W7L-P22080003RF05**

### 3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



**BUREAU  
VERITAS**

Test Report No.: W7L-P22080003RF05

## 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

**Email:** [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P22080003RF05

## 5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



## 6 Appendix

### GSM1900

#### PEAK-TO-AVERAGE RATIO(CCDF)

##### Test Result


Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM1900	512	2.59	13	PASS
GSM1900	661	2.58	13	PASS
GSM1900	810	2.58	13	PASS
EGPRS1900	512	5.53	13	PASS
EGPRS1900	661	5.54	13	PASS
EGPRS1900	810	5.57	13	PASS






BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05

## Test Graphs

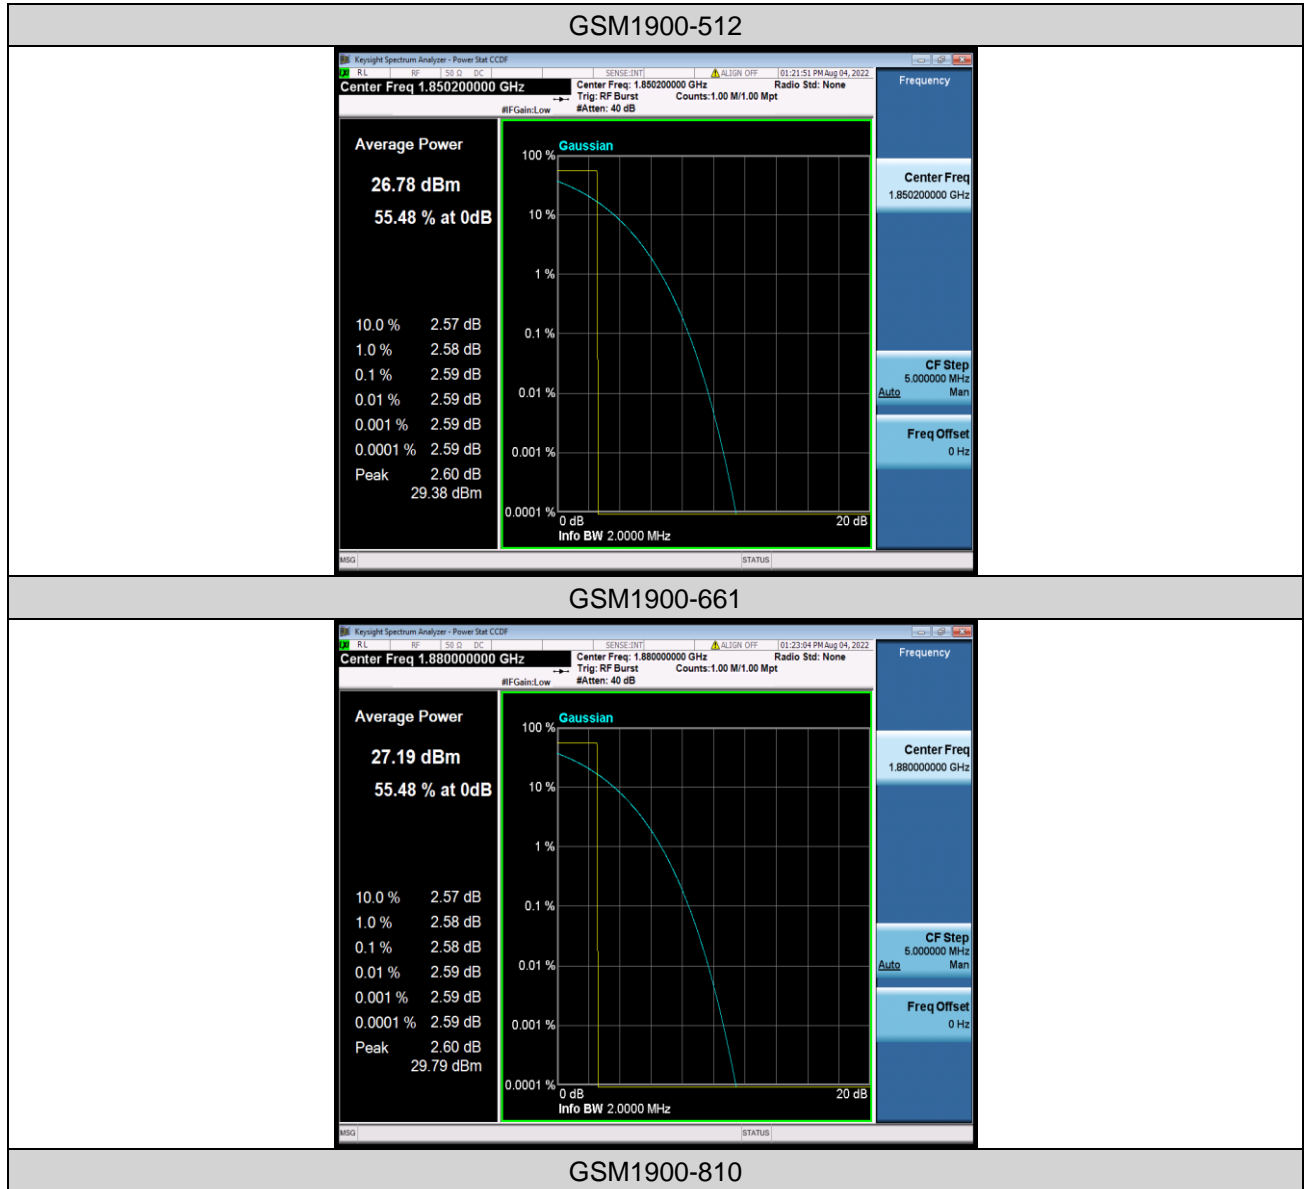

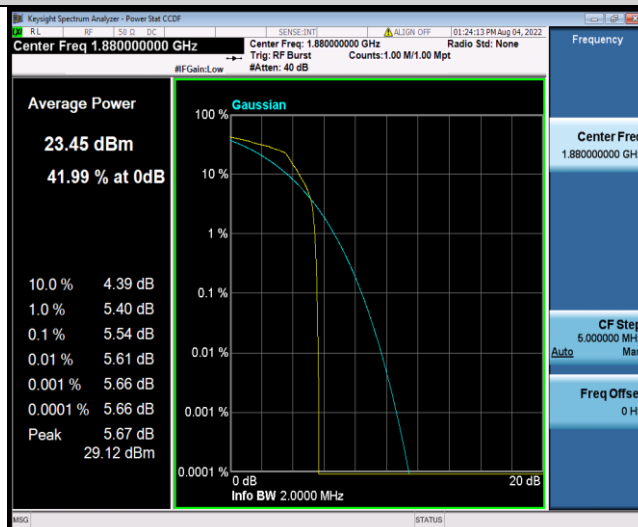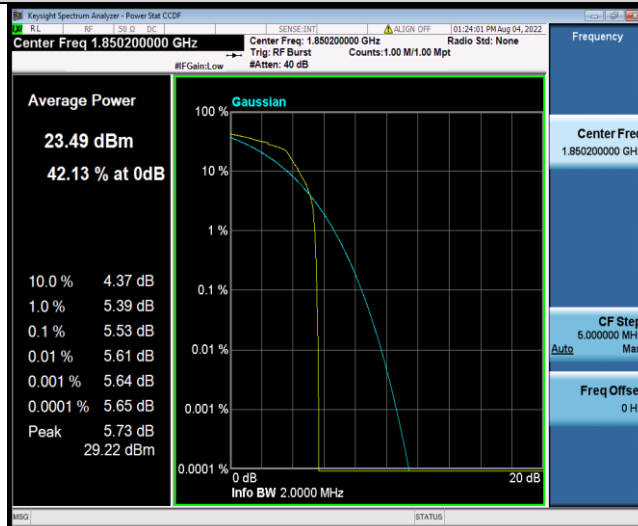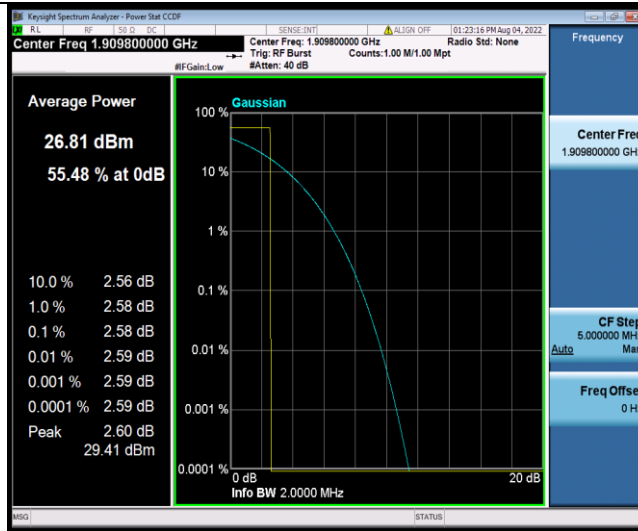






BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05

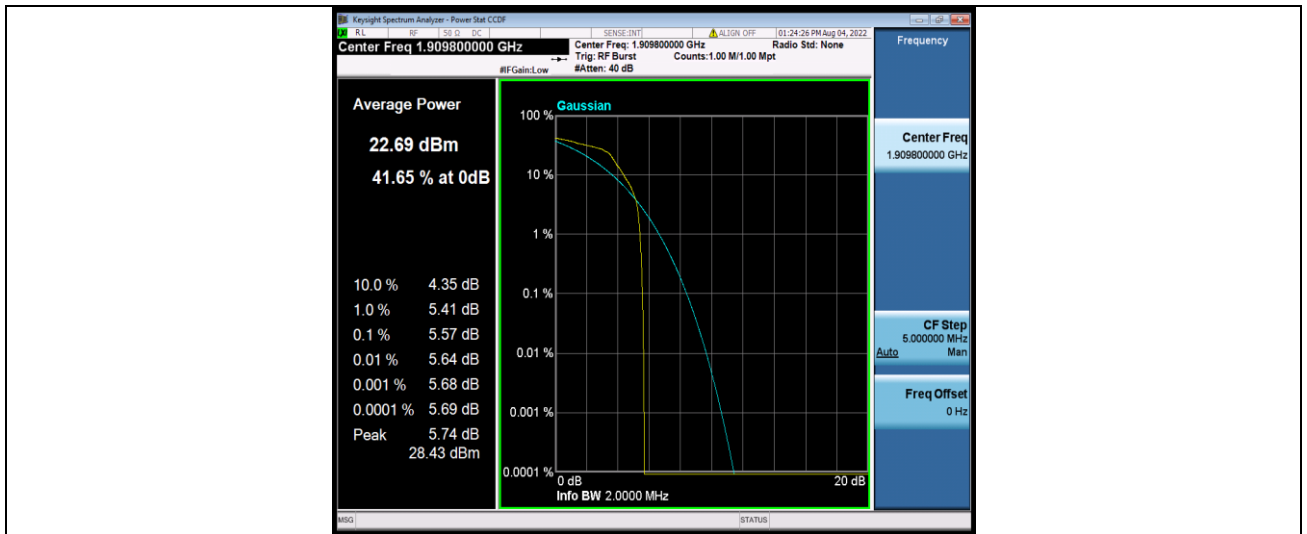



Test Report No.: W7L-P22080003RF05

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result


Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM1900	512	0.24377	0.3122	---	PASS
GSM1900	661	0.24818	0.3190	---	PASS
GSM1900	810	0.24558	0.2978	---	PASS
EGPRS1900	512	0.24388	0.3096	---	PASS
EGPRS1900	661	0.24196	0.3075	---	PASS
EGPRS1900	810	0.24426	0.2979	---	PASS



BUREAU VERITAS

Test Report No.: W7L-P22080003RF05


### Test Graphs

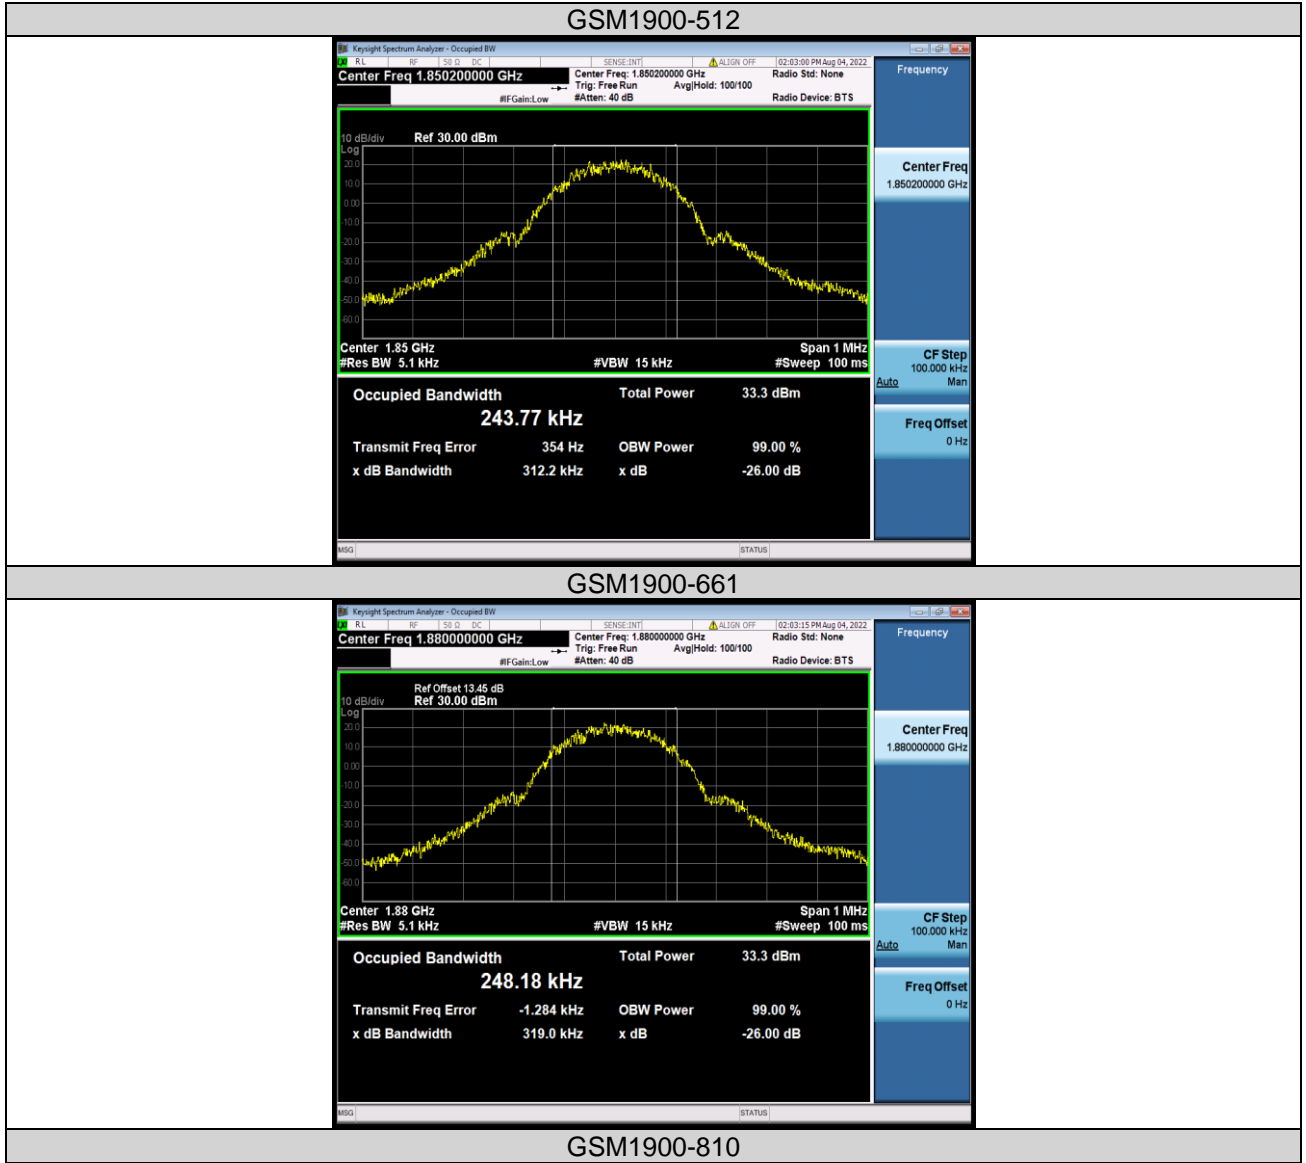




BUREAU VERITAS


### Test Report No.: W7L-P22080003RF05

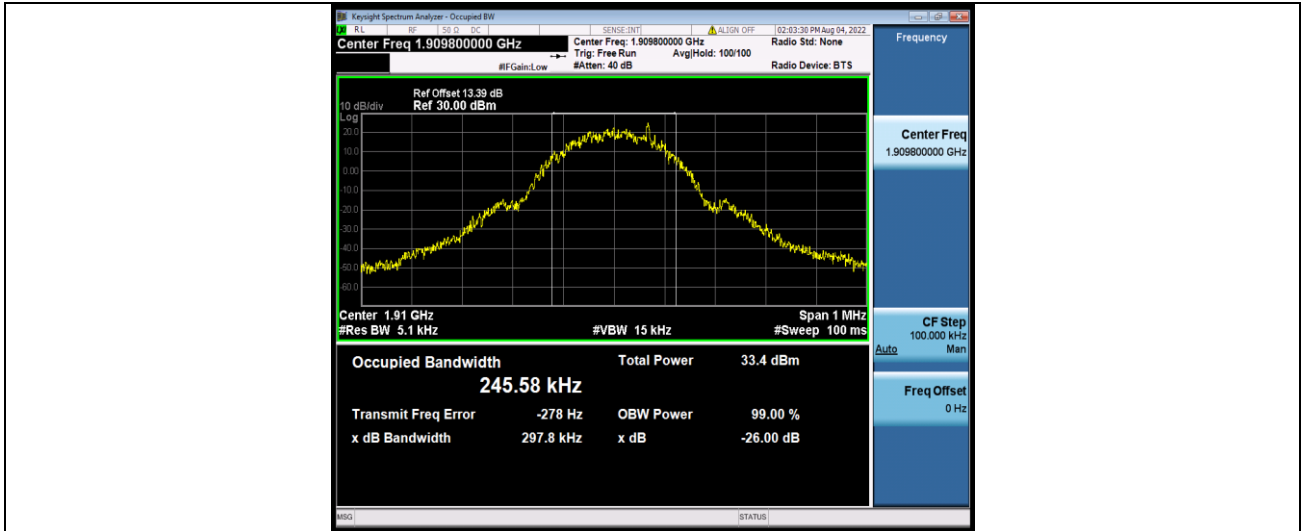

EGPRS1900-512

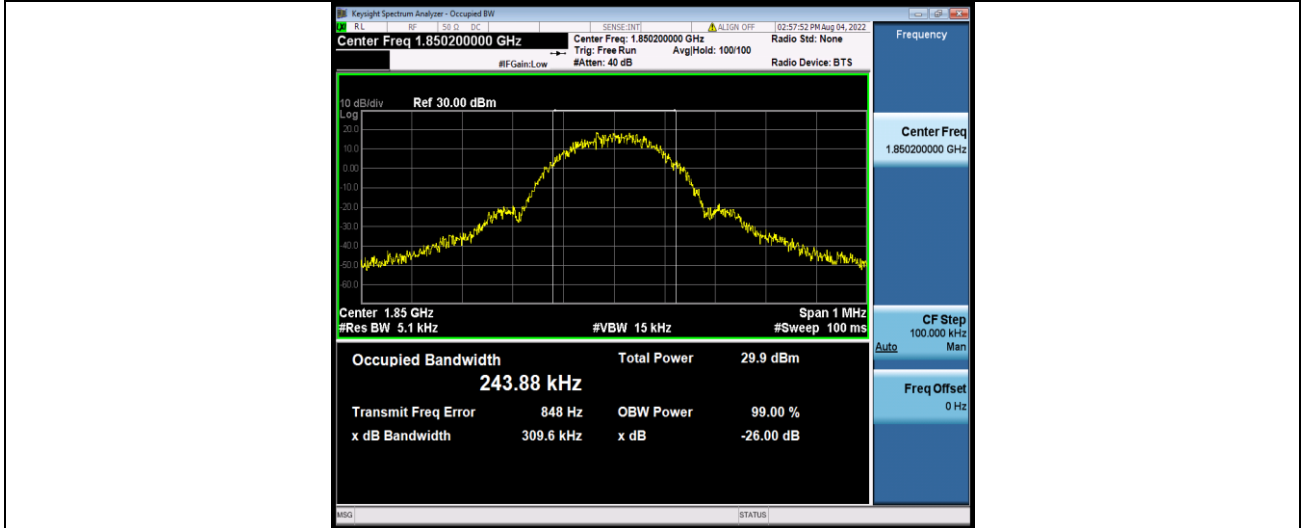

EGPRS1900-661

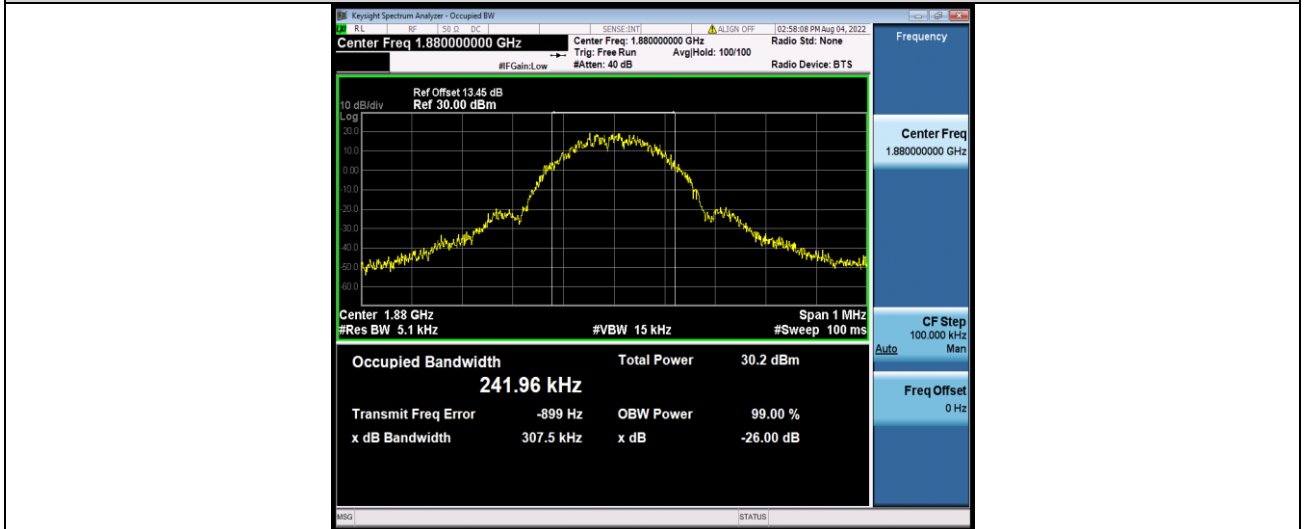


EGPRS1900-810



BUREAU VERITAS

Test Report No.: W7L-P22080003RF05

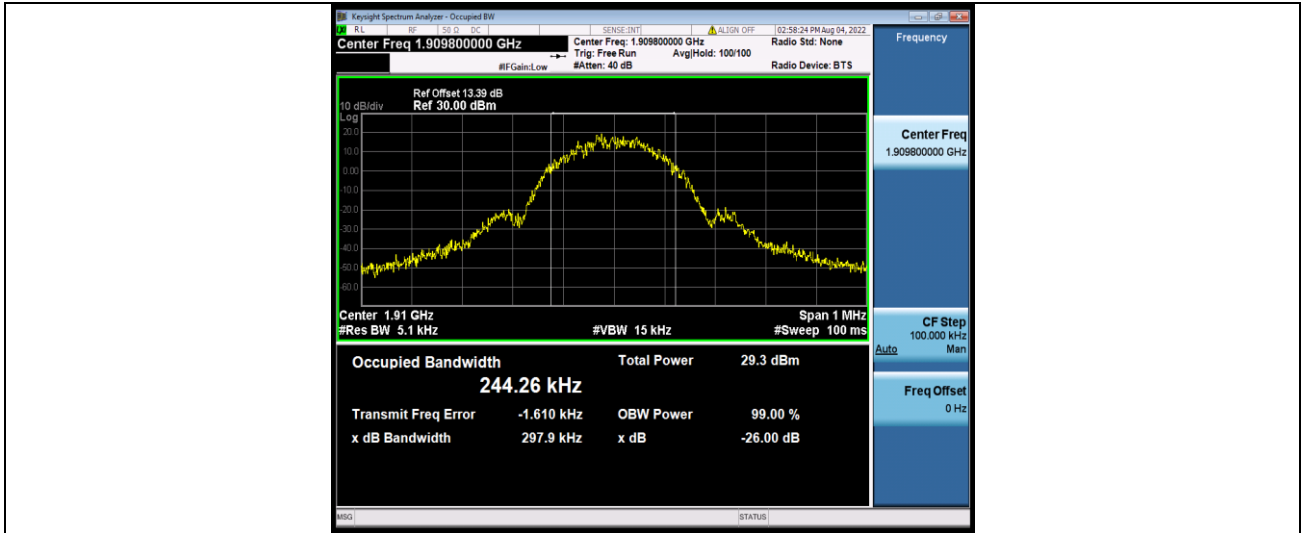



**BUREAU**  
**VERITAS**

Test Report No.: W7L-P22080003RF05

## BAND EDGE

### Test Result


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM1900	512	1849.98	-17.72	-13	PASS
GSM1900	810	1910.02	-16.80	-13	PASS
EGPRS1900	512	1849.98	-20.70	-13	PASS
EGPRS1900	810	1910.02	-23.60	-13	PASS



BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05


## Test Graphs

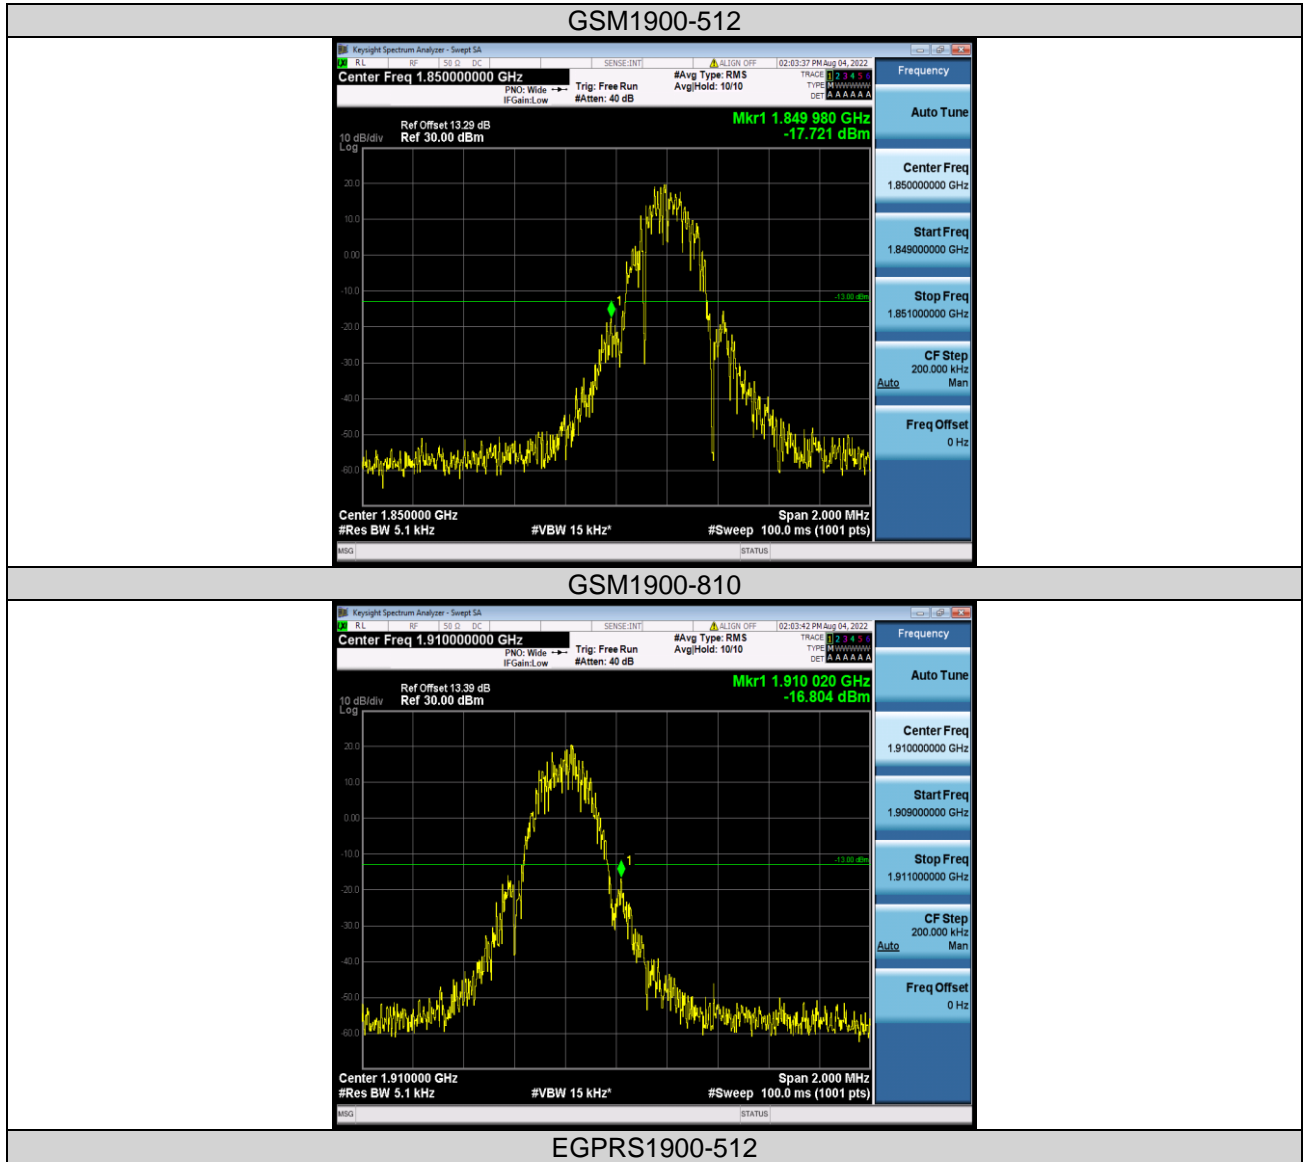




BUREAU VERITAS

Test Report No.: W7L-P22080003RF05

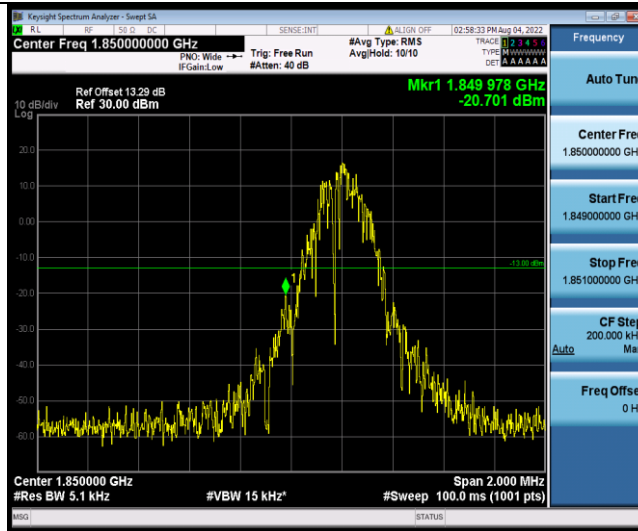

EGPRS1900-810

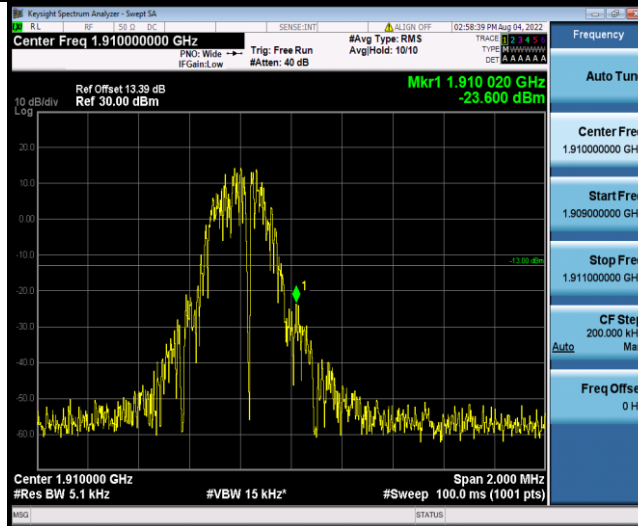





## CONDUCTED SPURIOUS EMISSION

### Test Result


Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM1900	512	30~1000MHz	786.73	-41.57	-13	PASS
GSM1900	512	1000~20000MHz	19253.93	-31.76	-13	PASS
GSM1900	661	30~1000MHz	899.22	-40.56	-13	PASS
GSM1900	661	1000~20000MHz	18944.23	-31.89	-13	PASS
GSM1900	810	30~1000MHz	901.32	-40.32	-13	PASS
GSM1900	810	1000~20000MHz	8083.2	-32.14	-13	PASS
EGPRS1900	512	30~1000MHz	861.16	-40.24	-13	PASS
EGPRS1900	512	1000~20000MHz	18784.63	-32.12	-13	PASS
EGPRS1900	661	30~1000MHz	965.4	-40.98	-13	PASS
EGPRS1900	661	1000~20000MHz	18431.87	-31.61	-13	PASS
EGPRS1900	810	30~1000MHz	988.3	-40.22	-13	PASS
EGPRS1900	810	1000~20000MHz	19259.0	-31.96	-13	PASS



BUREAU VERITAS

Test Report No.: W7L-P22080003RF05


### Test Graphs

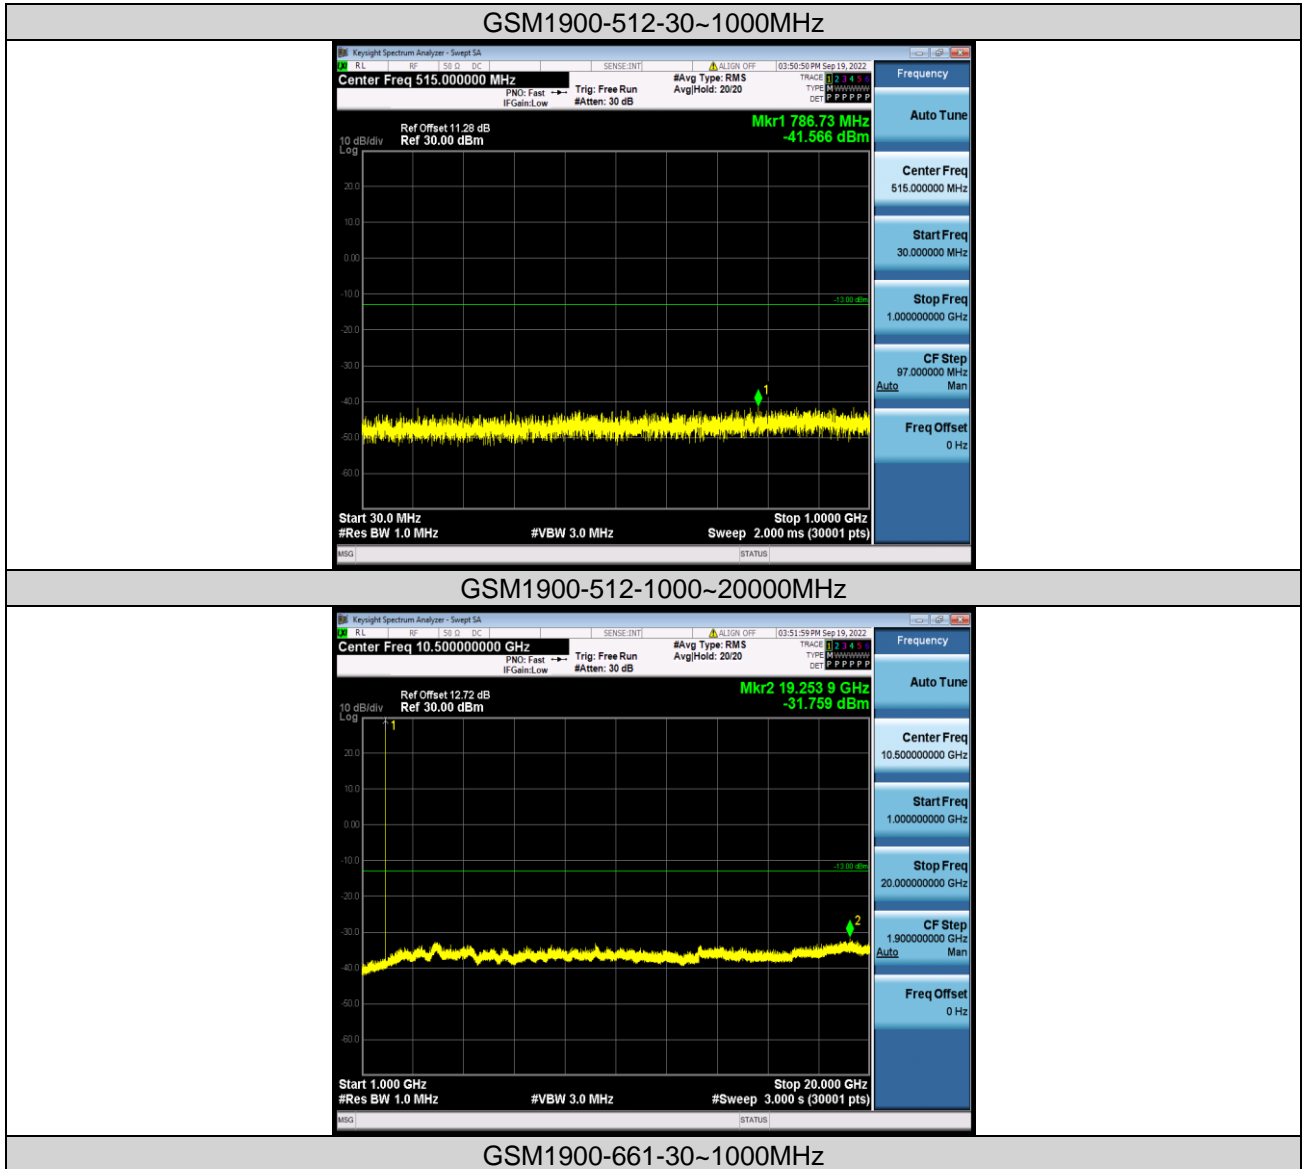




BUREAU VERITAS


Test Report No.: W7L-P22080003RF05

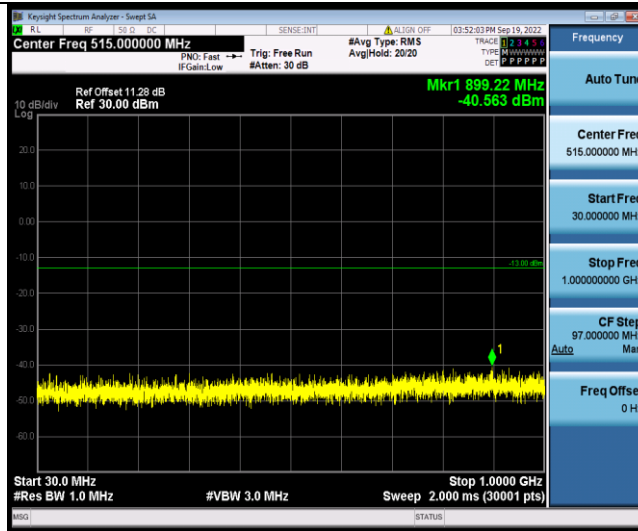

GSM1900-661-1000~2000MHz

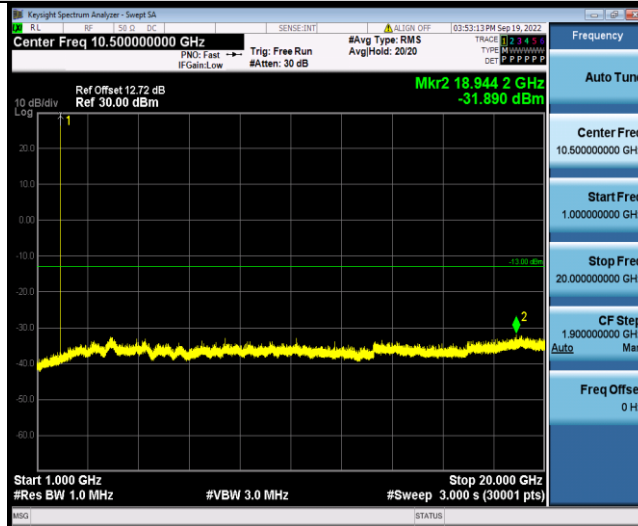

GSM1900-810-30~1000MHz

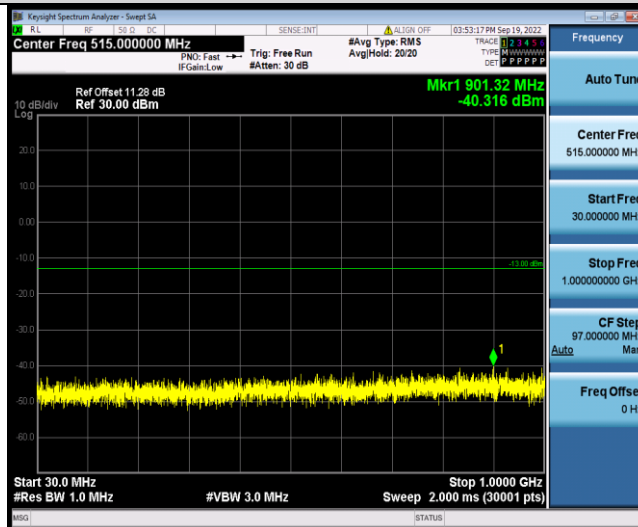

GSM1900-810-1000~2000MHz

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)




BUREAU VERITAS

Test Report No.: W7L-P22080003RF05

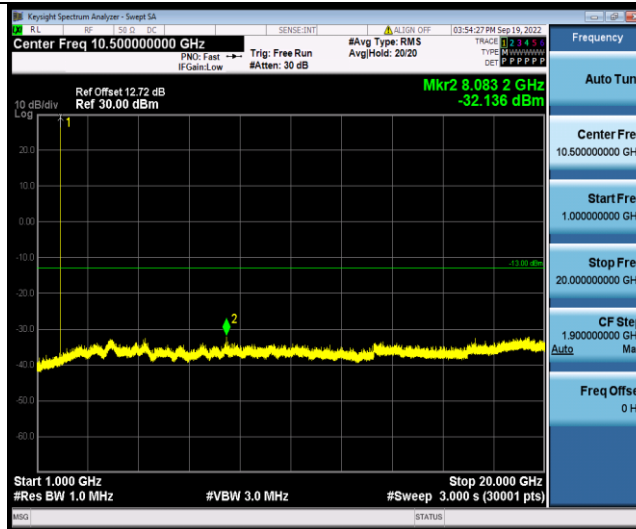

EGPRS1900-512-30~1000MHz

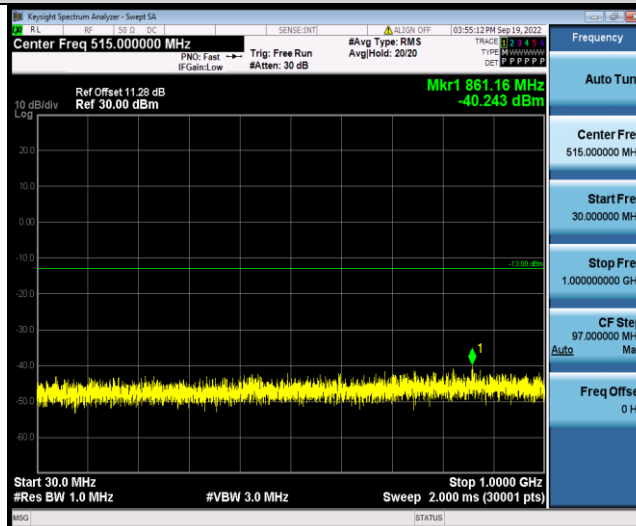

EGPRS1900-512-1000~2000MHz




EGPRS1900-661-30~1000MHz




BUREAU VERITAS


Test Report No.: W7L-P22080003RF05

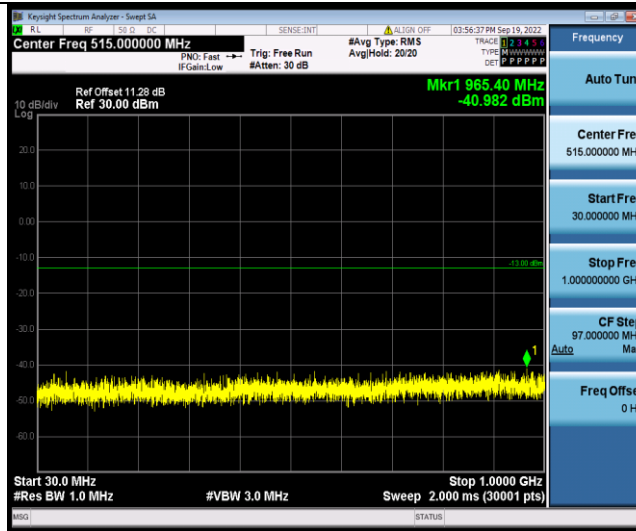

EGPRS1900-661-1000~20000MHz

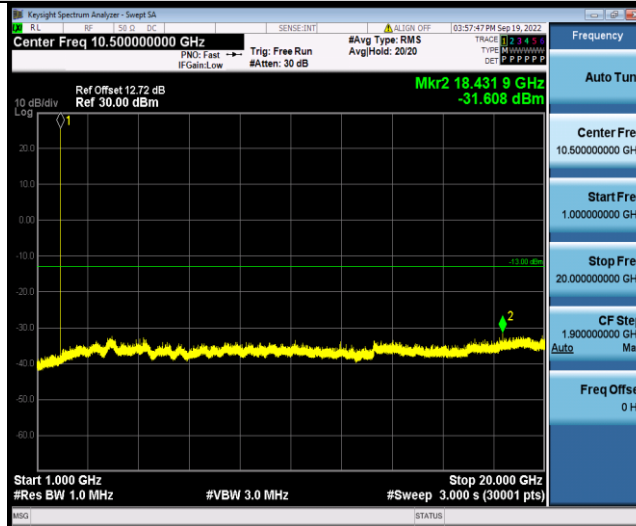

EGPRS1900-810-30~1000MHz

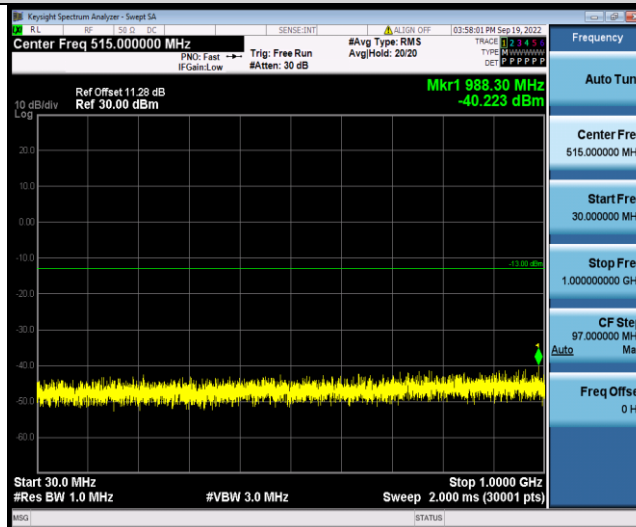

EGPRS1900-810-1000~20000MHz

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05

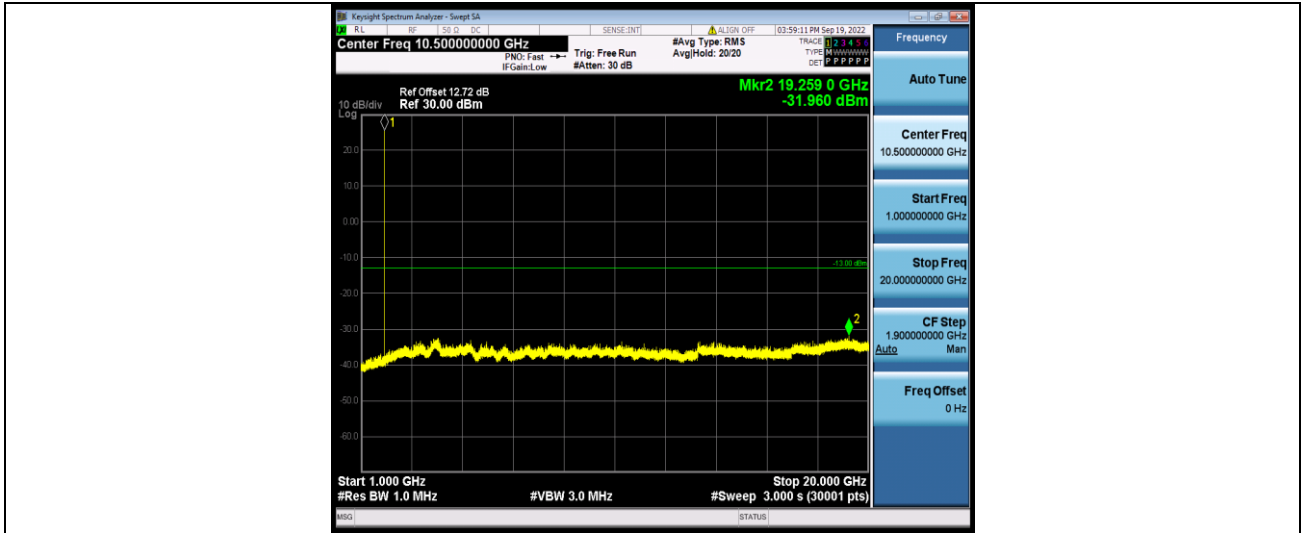

BV 7Layers Communications Technology  
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



### FREQUENCY STABILITY

#### Test Result

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM1900	512	VL	NT	9.27	0.005010	±2.5	PASS
GSM1900	512	VN	NT	14.30	0.007729	±2.5	PASS
GSM1900	512	VH	NT	9.07	0.004902	±2.5	PASS
GSM1900	661	VL	NT	6.20	0.003298	±2.5	PASS
GSM1900	661	VN	NT	11.04	0.005872	±2.5	PASS
GSM1900	661	VH	NT	7.20	0.003830	±2.5	PASS
GSM1900	810	VL	NT	11.14	0.005833	±2.5	PASS
GSM1900	810	VN	NT	1.71	0.000895	±2.5	PASS
GSM1900	810	VH	NT	8.14	0.004262	±2.5	PASS
EGPRS1900	512	VL	NT	4.04	0.002184	±2.5	PASS
EGPRS1900	512	VN	NT	0.87	0.000470	±2.5	PASS
EGPRS1900	512	VH	NT	4.13	0.002232	±2.5	PASS
EGPRS1900	661	VL	NT	7.75	0.004122	±2.5	PASS
EGPRS1900	661	VN	NT	0.55	0.000293	±2.5	PASS
EGPRS1900	661	VH	NT	12.14	0.006457	±2.5	PASS
EGPRS1900	810	VL	NT	11.30	0.005917	±2.5	PASS
EGPRS1900	810	VN	NT	6.20	0.003246	±2.5	PASS
EGPRS1900	810	VH	NT	5.10	0.002670	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM1900	512	NV	-30	5.00	0.002702	±2.5	PASS
GSM1900	512	NV	-20	12.85	0.006945	±2.5	PASS
GSM1900	512	NV	-10	-3.81	-0.002059	±2.5	PASS
GSM1900	512	NV	0	-0.32	-0.000173	±2.5	PASS
GSM1900	512	NV	10	-8.65	-0.004675	±2.5	PASS
GSM1900	512	NV	20	10.69	0.005778	±2.5	PASS
GSM1900	512	NV	30	7.65	0.004135	±2.5	PASS
GSM1900	512	NV	40	-1.78	-0.000962	±2.5	PASS
GSM1900	512	NV	50	12.75	0.006891	±2.5	PASS
GSM1900	661	NV	-30	11.43	0.006080	±2.5	PASS
GSM1900	661	NV	-20	7.59	0.004037	±2.5	PASS
GSM1900	661	NV	-10	6.30	0.003351	±2.5	PASS
GSM1900	661	NV	0	-5.17	-0.002750	±2.5	PASS
GSM1900	661	NV	10	16.11	0.008569	±2.5	PASS
GSM1900	661	NV	20	11.82	0.006287	±2.5	PASS
GSM1900	661	NV	30	0.87	0.000463	±2.5	PASS
GSM1900	661	NV	40	4.42	0.002351	±2.5	PASS



BUREAU  
VERITAS

Test Report No.: W7L-P22080003RF05

GSM1900	661	NV	50	13.50	0.007181	±2.5	PASS
GSM1900	810	NV	-30	11.82	0.006189	±2.5	PASS
GSM1900	810	NV	-20	9.75	0.005105	±2.5	PASS
GSM1900	810	NV	-10	11.75	0.006152	±2.5	PASS
GSM1900	810	NV	0	10.88	0.005697	±2.5	PASS
GSM1900	810	NV	10	4.04	0.002115	±2.5	PASS
GSM1900	810	NV	20	11.72	0.006137	±2.5	PASS
GSM1900	810	NV	30	7.07	0.003702	±2.5	PASS
GSM1900	810	NV	40	19.31	0.010111	±2.5	PASS
GSM1900	810	NV	50	15.88	0.008315	±2.5	PASS
EGPRS1900	512	NV	-30	-1.39	-0.000751	±2.5	PASS
EGPRS1900	512	NV	-20	1.16	0.000627	±2.5	PASS
EGPRS1900	512	NV	-10	6.59	0.003562	±2.5	PASS
EGPRS1900	512	NV	0	10.36	0.005599	±2.5	PASS
EGPRS1900	512	NV	10	1.78	0.000962	±2.5	PASS
EGPRS1900	512	NV	20	9.01	0.004870	±2.5	PASS
EGPRS1900	512	NV	30	9.43	0.005097	±2.5	PASS
EGPRS1900	512	NV	40	7.36	0.003978	±2.5	PASS
EGPRS1900	512	NV	50	11.69	0.006318	±2.5	PASS
EGPRS1900	661	NV	-30	14.92	0.007936	±2.5	PASS
EGPRS1900	661	NV	-20	6.97	0.003707	±2.5	PASS
EGPRS1900	661	NV	-10	11.82	0.006287	±2.5	PASS
EGPRS1900	661	NV	0	3.33	0.001771	±2.5	PASS
EGPRS1900	661	NV	10	-0.84	-0.000447	±2.5	PASS
EGPRS1900	661	NV	20	-3.42	-0.001819	±2.5	PASS
EGPRS1900	661	NV	30	-0.19	-0.000101	±2.5	PASS
EGPRS1900	661	NV	40	2.20	0.001170	±2.5	PASS
EGPRS1900	661	NV	50	19.02	0.010117	±2.5	PASS
EGPRS1900	810	NV	-30	0.36	0.000189	±2.5	PASS
EGPRS1900	810	NV	-20	-4.88	-0.002555	±2.5	PASS
EGPRS1900	810	NV	-10	-3.58	-0.001875	±2.5	PASS
EGPRS1900	810	NV	0	-5.36	-0.002807	±2.5	PASS
EGPRS1900	810	NV	10	2.23	0.001168	±2.5	PASS
EGPRS1900	810	NV	20	-1.13	-0.000592	±2.5	PASS
EGPRS1900	810	NV	30	9.91	0.005189	±2.5	PASS
EGPRS1900	810	NV	40	8.01	0.004194	±2.5	PASS
EGPRS1900	810	NV	50	7.33	0.003838	±2.5	PASS