


User Manual

Model:DA164

1 Outlooking parameter and instruction

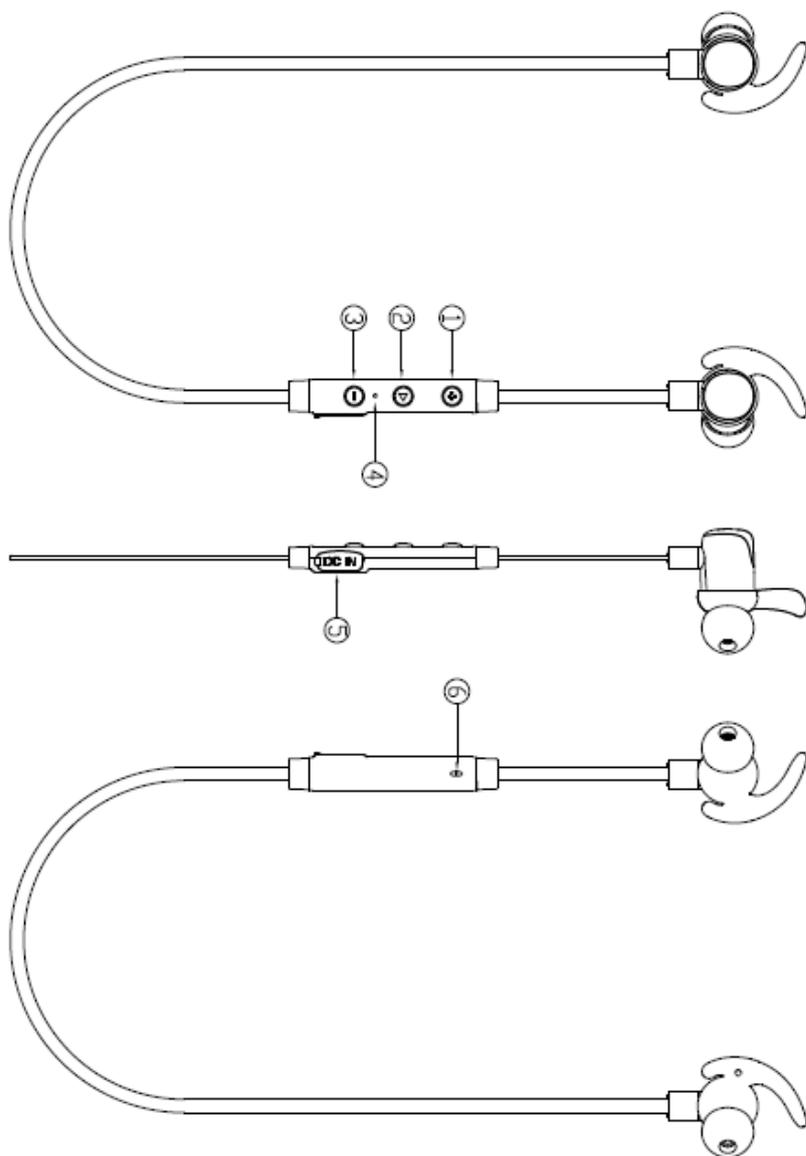

Button instruction:

- 1. Volume +
- 2. Multi-function
- 3. Volume -
- 4. LED
- 5. MICRO USB
- 6. MIC

2. Basic parameter

Product size: 620*25*30mm

Product weight: 14.1g (bare)

Working voltage: 3.7 V

Successive working time: Around 5~6 hours

Charging time: 1~2 hours

Charging current: 80mA

No connected will be power off automatically: 5 minutes

Support 1pcs earbuds connect 2pcs smart phones

Support APTX

3.1 Bluetooth

Bluetooth chipset	CSR8645A04		
Bluetooth version	4.1		
Profile	A2DP AVRCP HSP HFP		
RF	2402~2480MHz		
Receiving distance	360° 10meter		

3.2 MIC

MIC SPEC: 3.7*2.2*1.1mm MEMS MIC

Sensitivity: -42±3dB

3.3 Battery

Battery Spec: 3.7V 60 mAh Capacitor type lithium ion battery * 2

Battery size: Φ10*12mm

Battery life: 300 times

3.4 Speaker

Speaker OD: Φ6mm

Speaker impedance: 16Ω

Rated power: 10mW (Max power: 15mW)

Frequency response: 200~100KHz;

Sensitivity: 87dB±3dB;

Speaker curve:



4 Operation

Power on: Press and hold down the power button till a blue light appears

Power off: Press and hold down the power button till a red light appears

Pairing: Press and hold down the power button 6~8 seconds till red and blue light flashing

Volume adjust: Press and Hold down the volume + to increase volume or Volume - to decrease the volume

Music track choose: Press Volume - shortly to select previous track, and Volume + to select the next track.

Pause/play: When the bluetooth headset is connected with mobile phone, press the power button once to play music, press power button quickly to pause the music.

Answering/ending the call: Press the power button once to answering or end the call

Reject calling: Press the power button 1~2 seconds

Redialing a call: Press the power button twice to redial the last dialed phone number on your mobile phone.

5 LED instruction

Charging: Red LED when charging, after full charge, blue LED

Paired: Blue Led flashing slow

Pairing: Red and blue LED flashing alternate

Federal Communications Commission (FCC) Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications made to this device not expressly approved by Shenzhen TOMTOP Technology Co., Ltd. may void the FCC authorization to operate this device.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.