

ANNEX D TEST DATA

For

Project No.:	8132EU011201W
Client:	QUEST USA CORP
Product Description:	IJOY UFO IPX7 WATERPROOF FLOATING BLUETOOTH SPEAKER
Model No.:	IJSP210069-CVS
FCC ID:	2AJQ7UFO
Technology:	Bluetooth BDR+EDR
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2023-09-19

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass


1. Duty Cycle



1.1 Ant1



1.1.1 Test Result



Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.885	3.749	76.95	1.14	0.03
		2441	DH5	2.886	3.749	76.98	1.14	0.03
		2480	DH5	2.886	3.750	76.96	1.14	0.03
Pi/4DQPSK	SISO	2402	2DH5	2.892	3.749	77.14	1.13	0.01
		2441	2DH5	2.892	3.751	77.10	1.13	0.04
		2480	2DH5	2.892	3.749	77.14	1.13	0.03
8DPSK	SISO	2402	3DH5	2.896	3.751	77.21	1.12	0.03
		2441	3DH5	2.896	3.751	77.21	1.12	0.03
		2480	3DH5	2.895	3.750	77.20	1.12	0.03


1.1.2 Test Graph

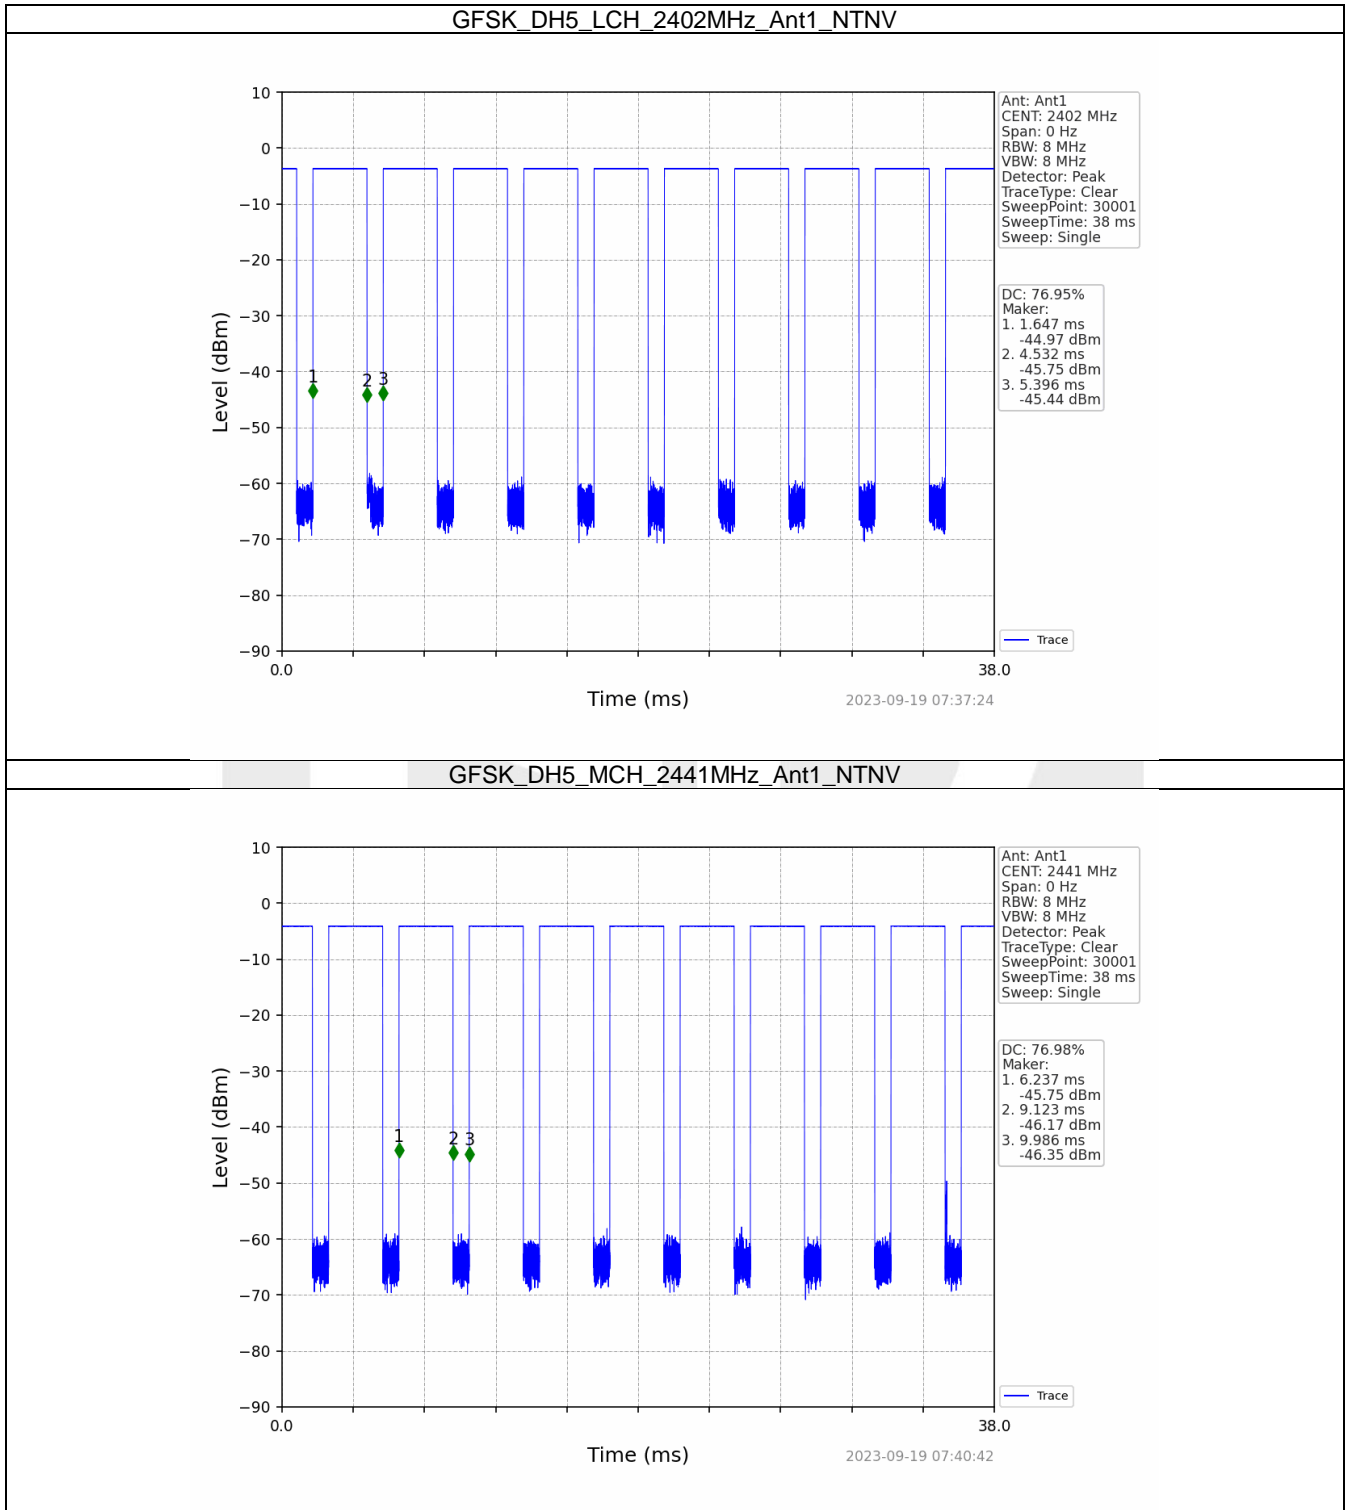

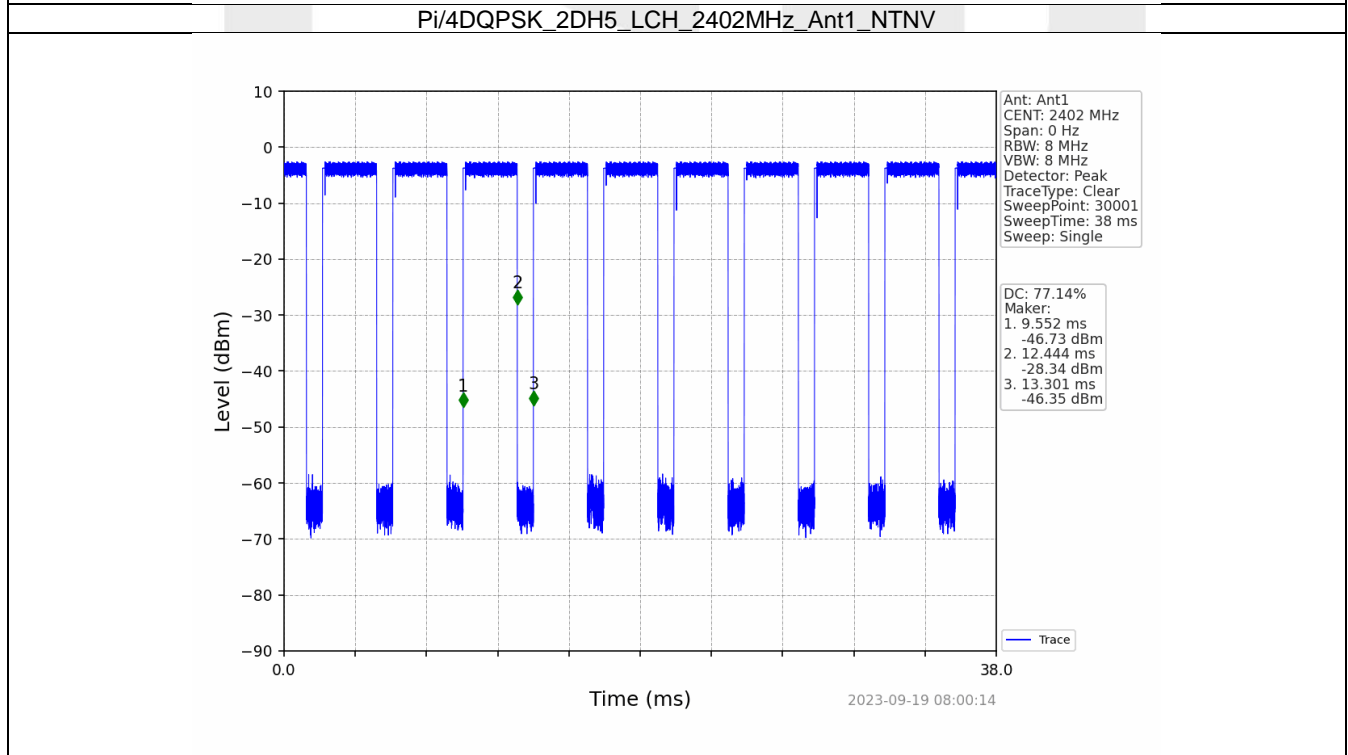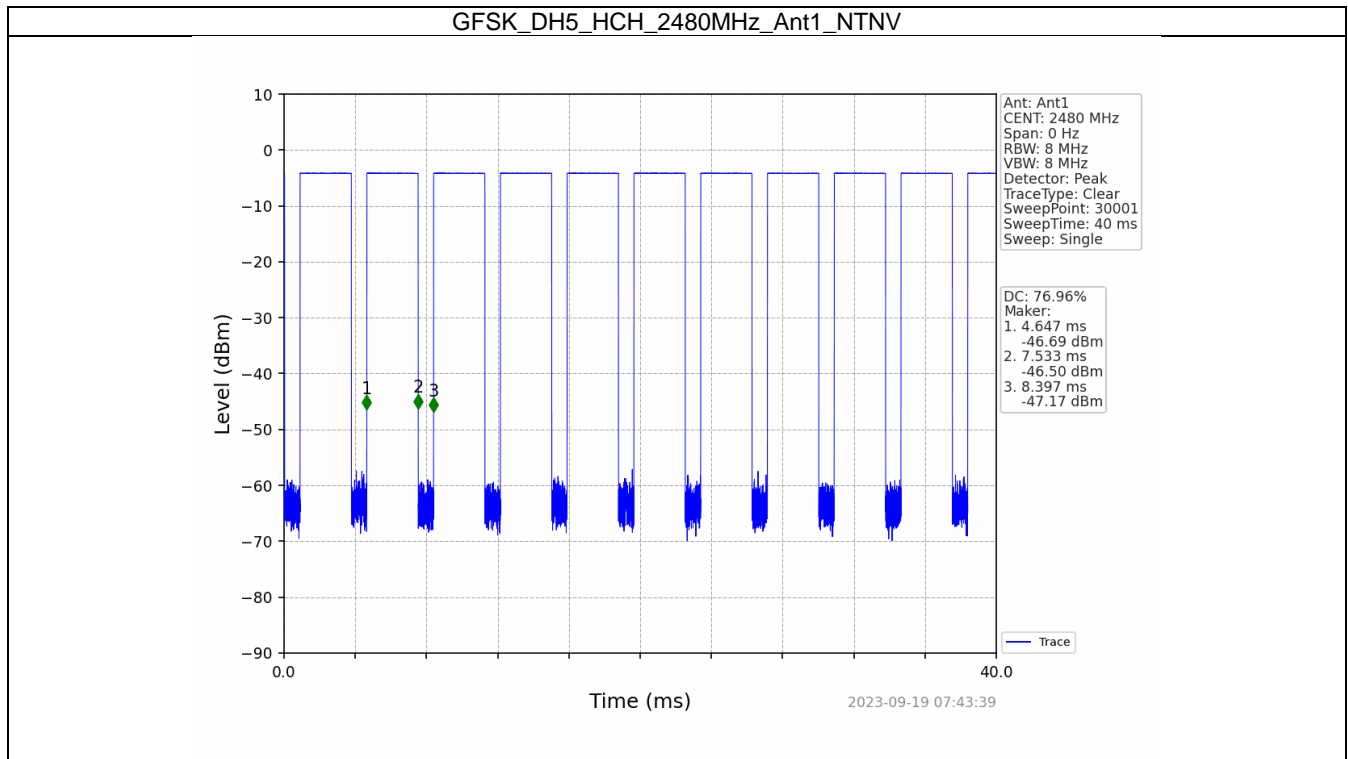

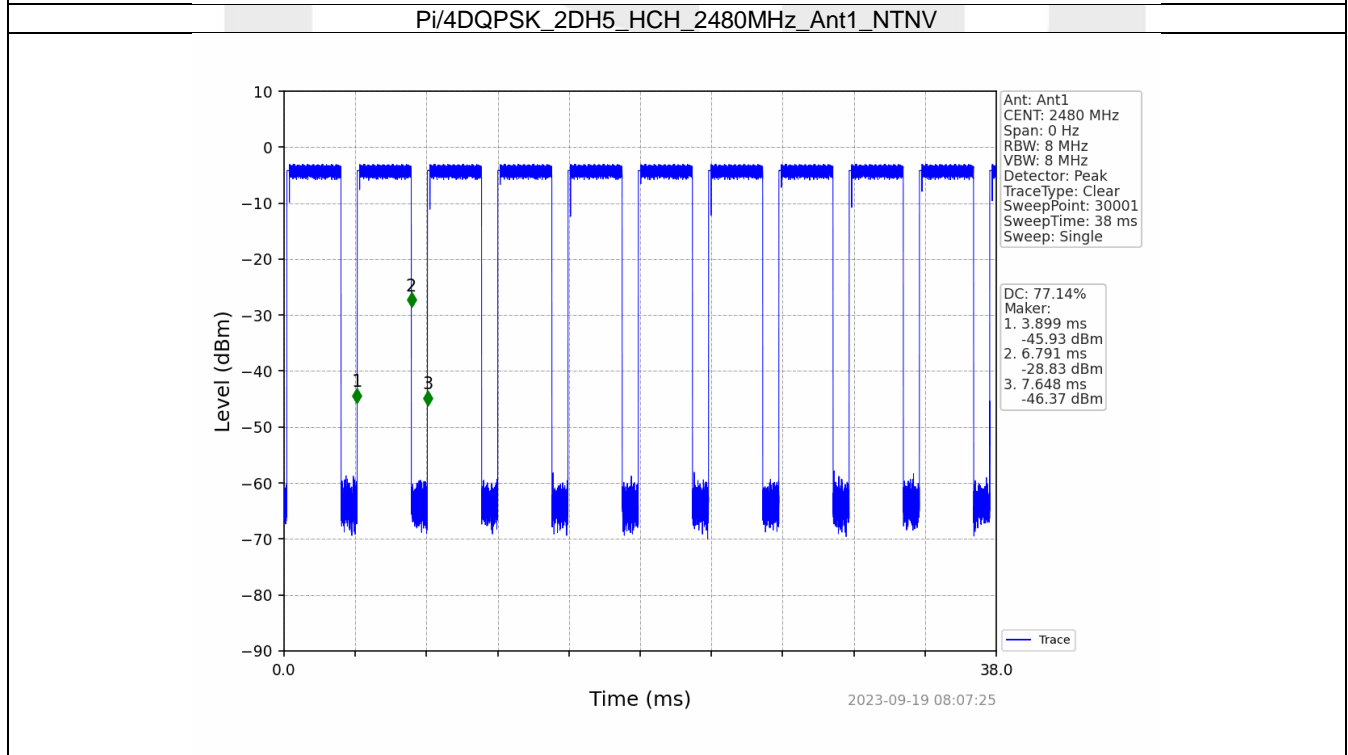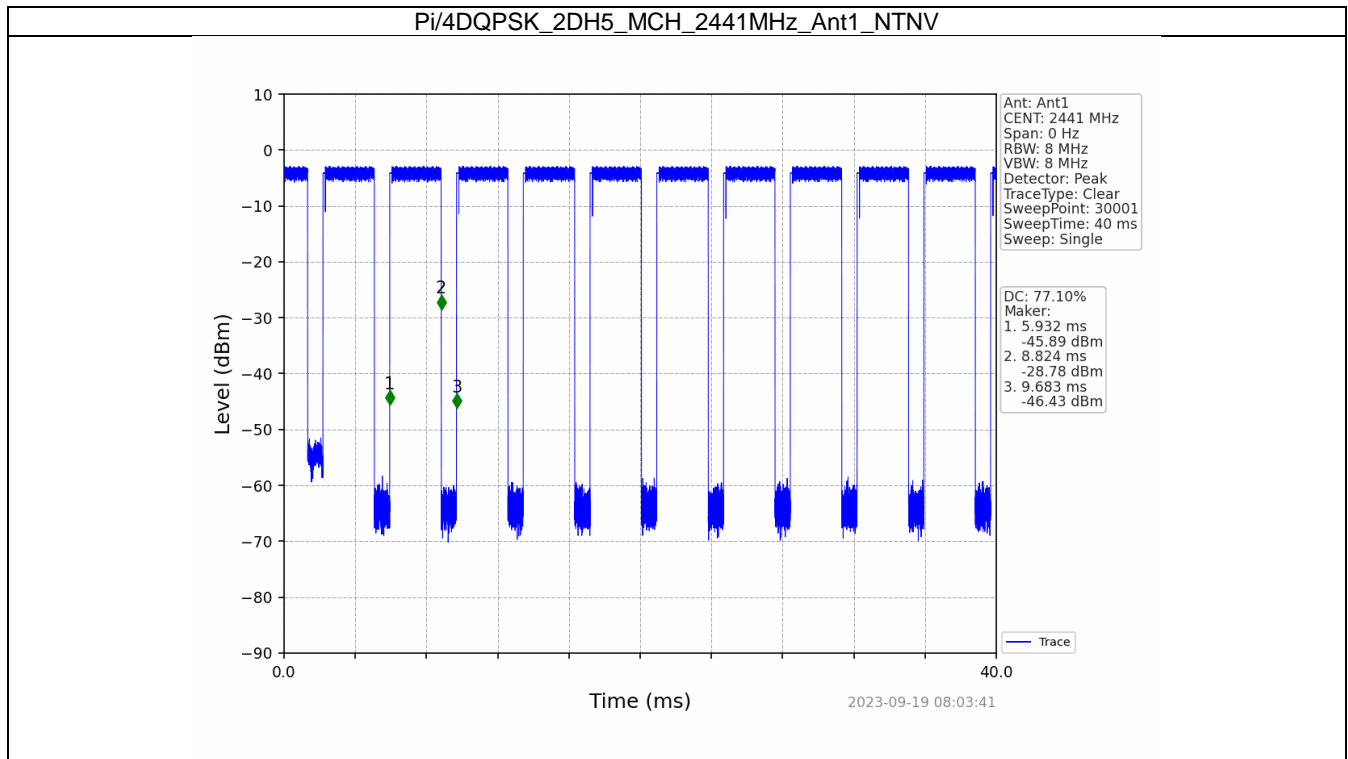

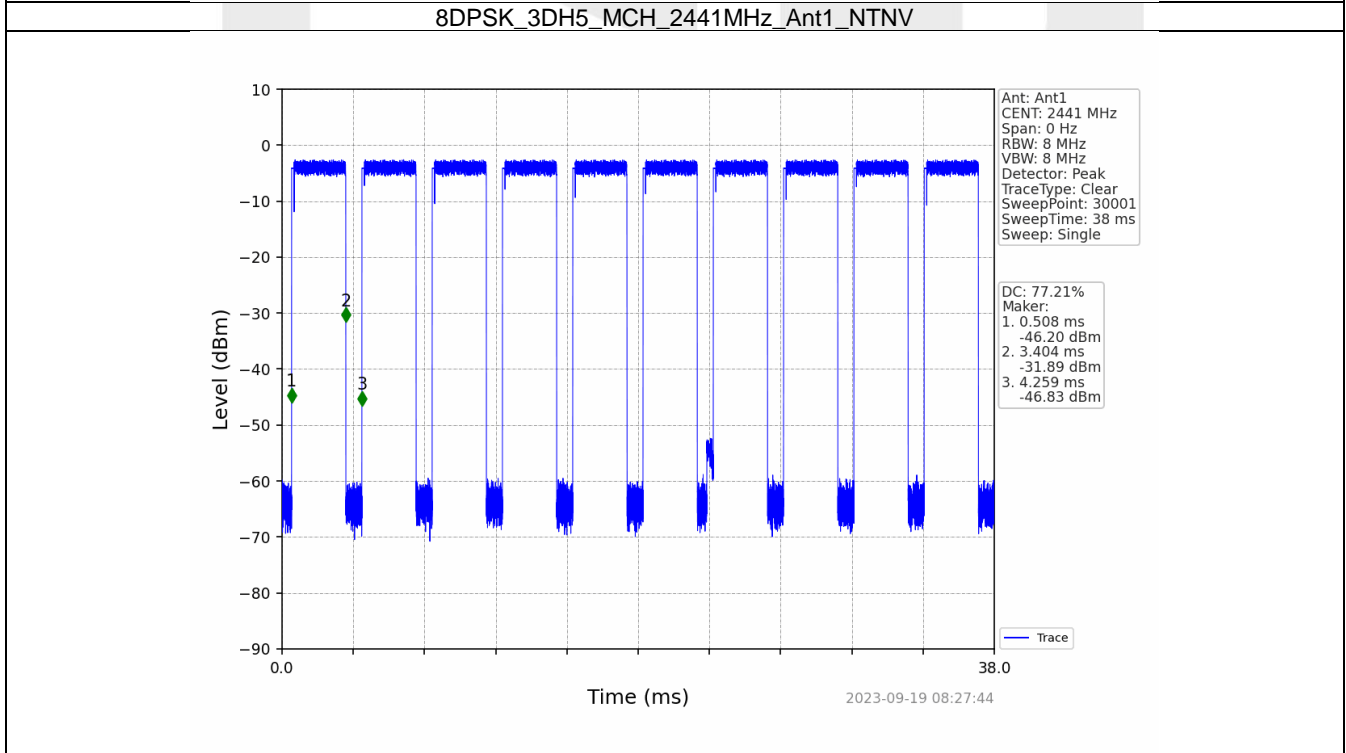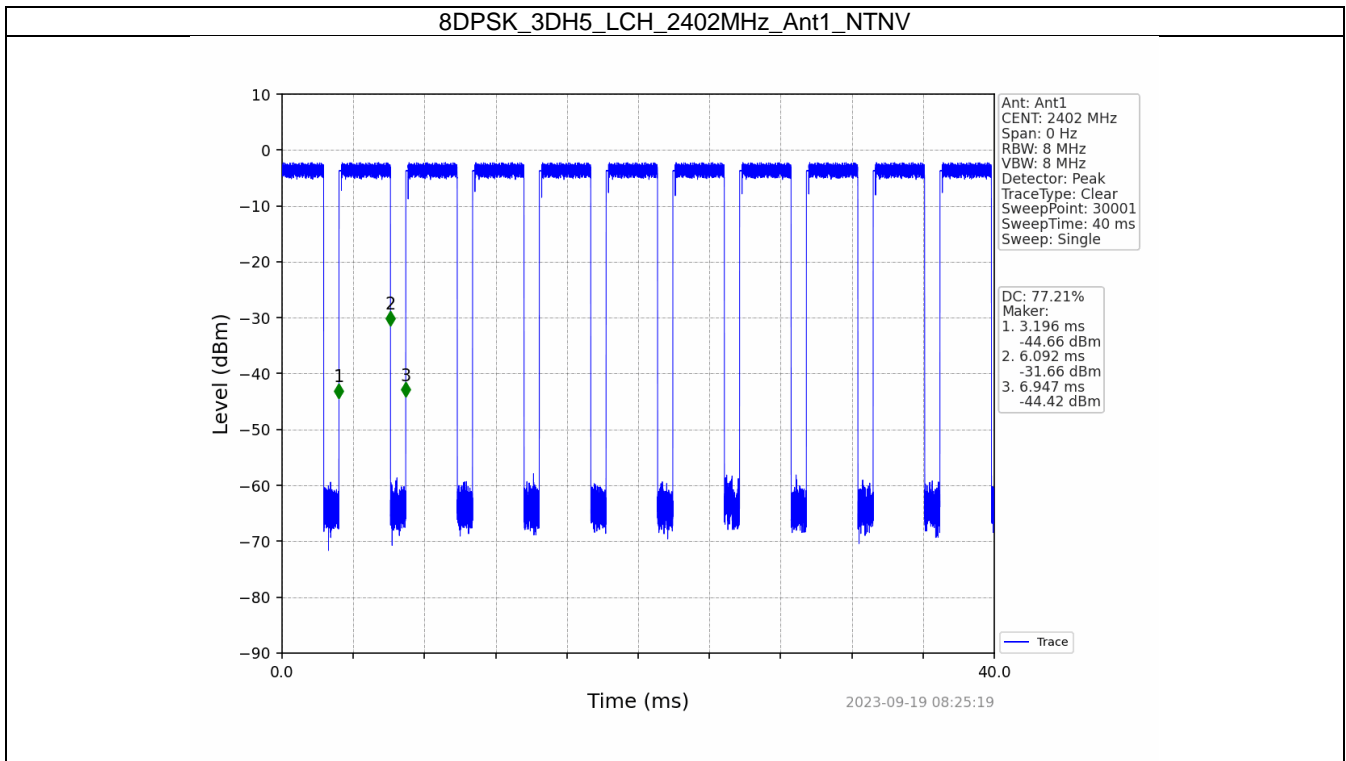

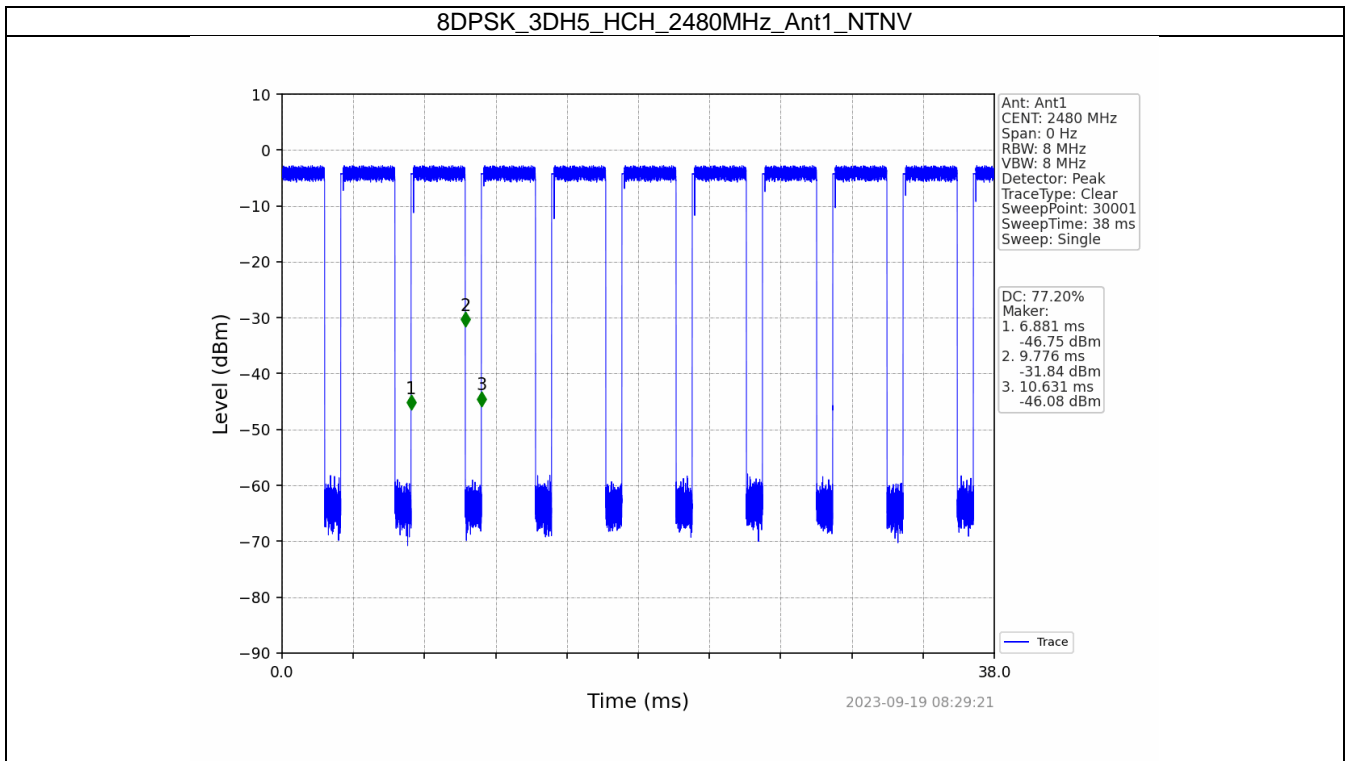


2. Bandwidth



2.1 OBW



2.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.854	Pass
		2441	DH5	1	0.856	Pass
		2480	DH5	1	0.851	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.166	Pass
		2441	2DH5	1	1.168	Pass
		2480	2DH5	1	1.166	Pass
8DPSK	SISO	2402	3DH5	1	1.177	Pass
		2441	3DH5	1	1.178	Pass
		2480	3DH5	1	1.177	Pass


2.1.2 Test Graph

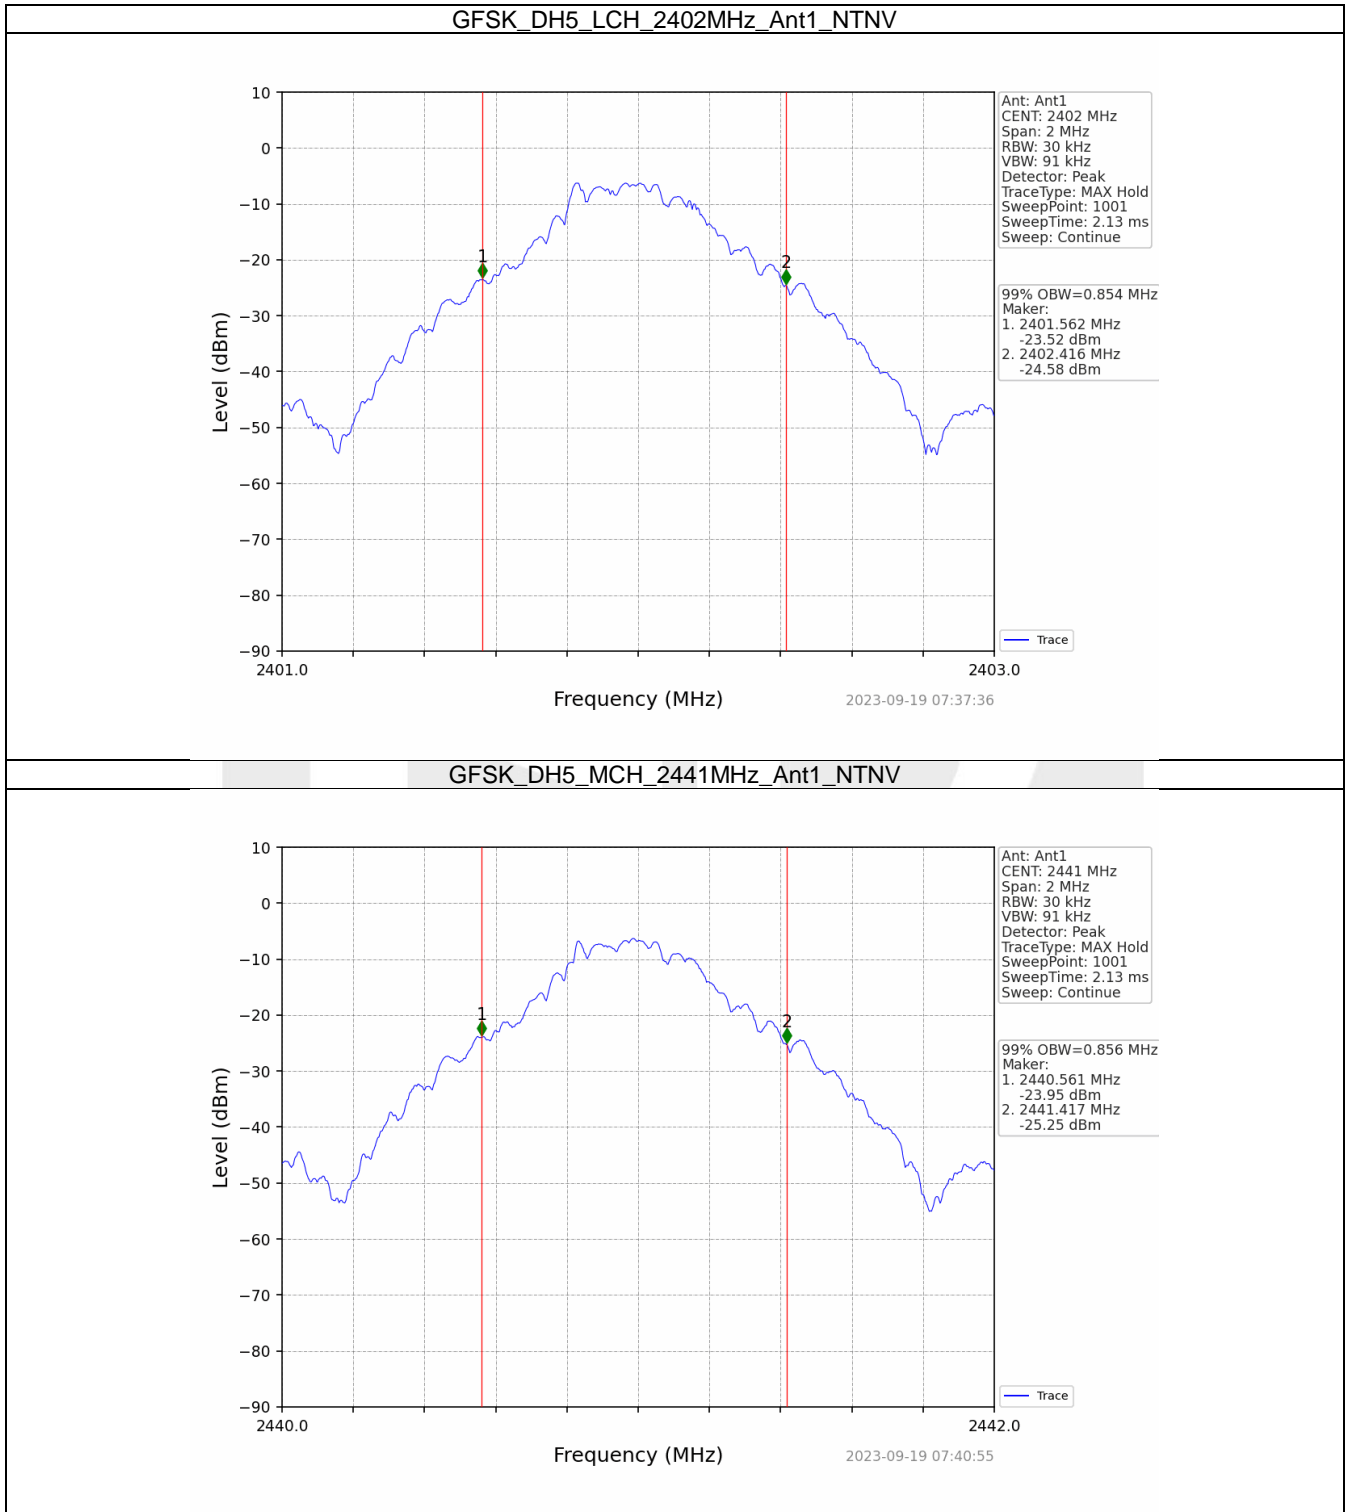

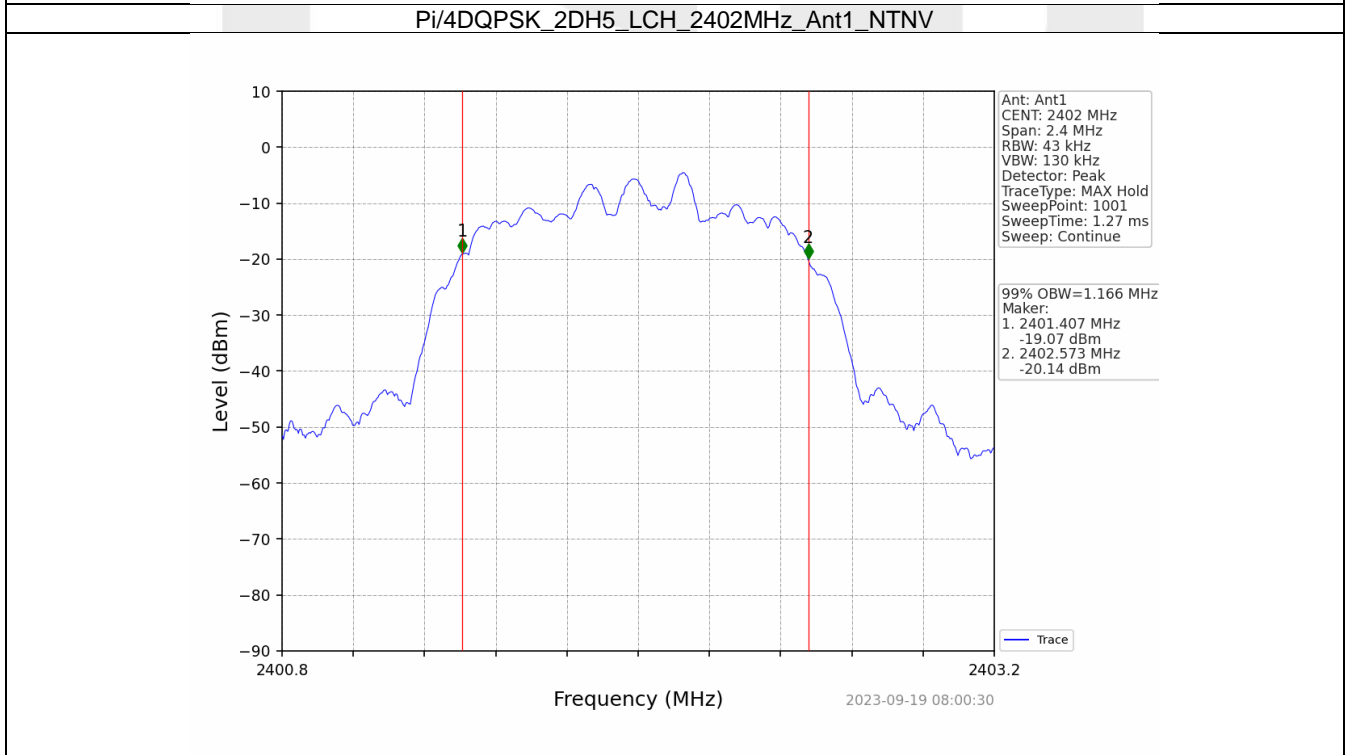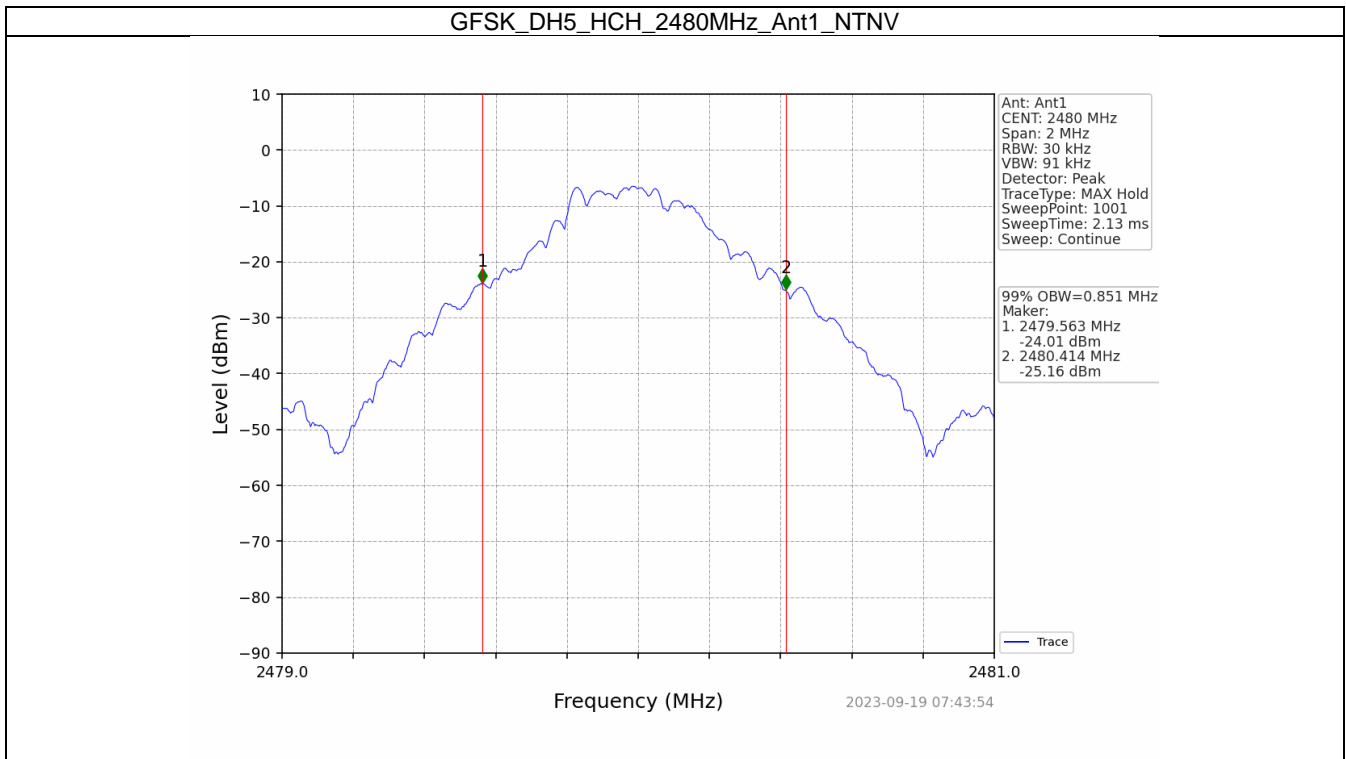

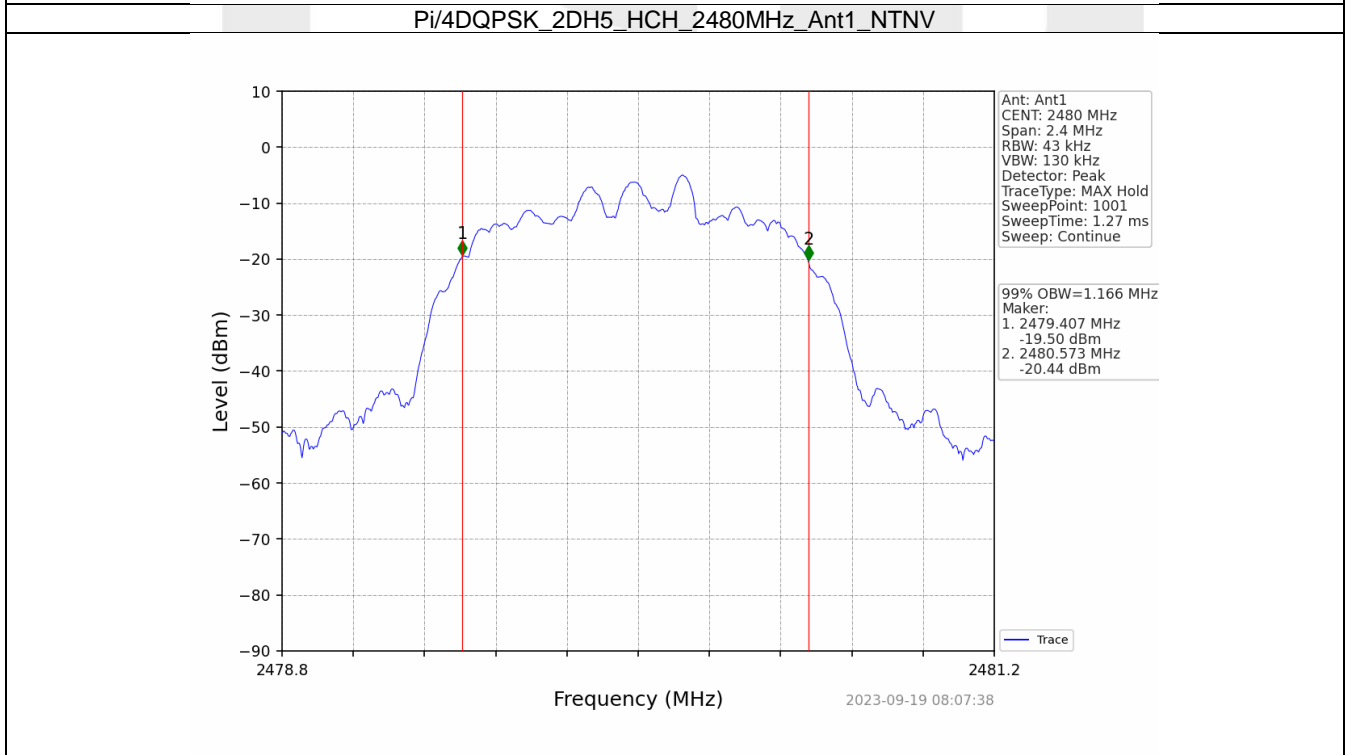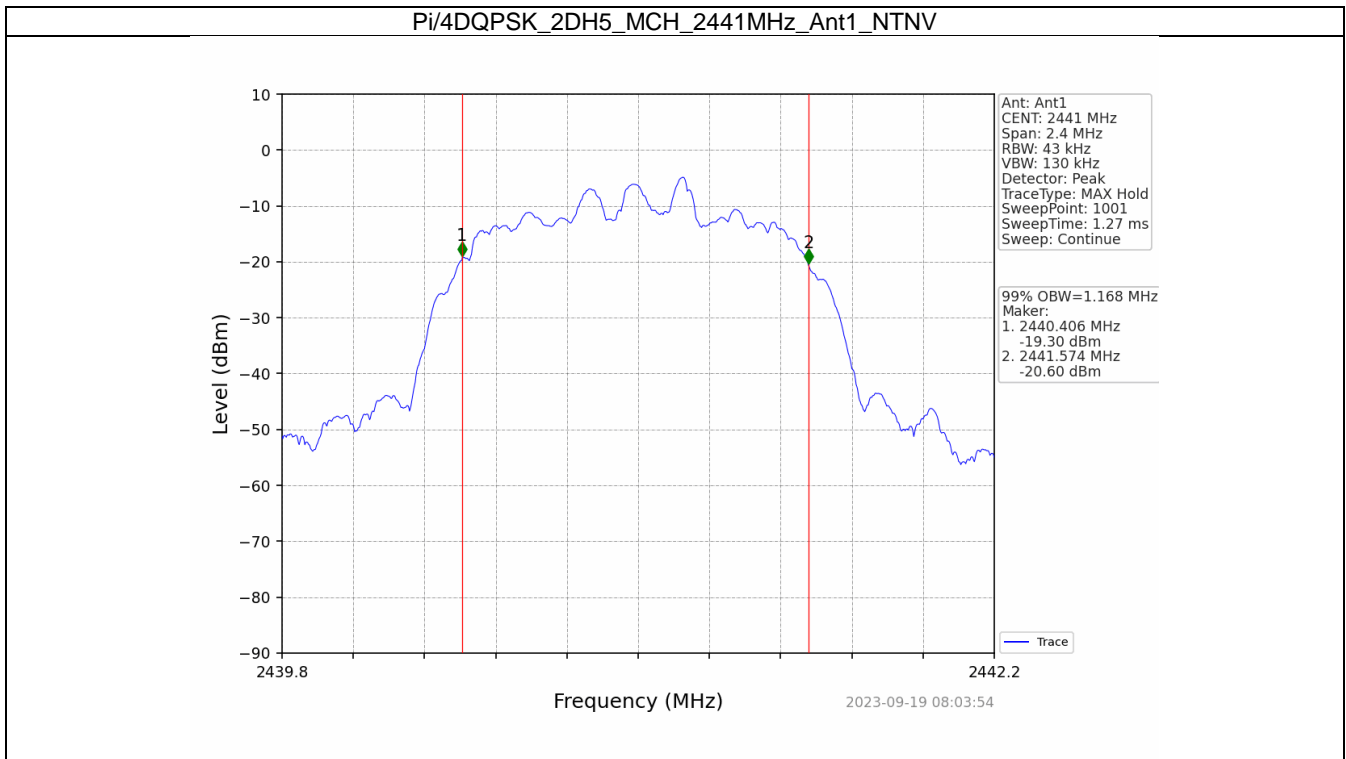

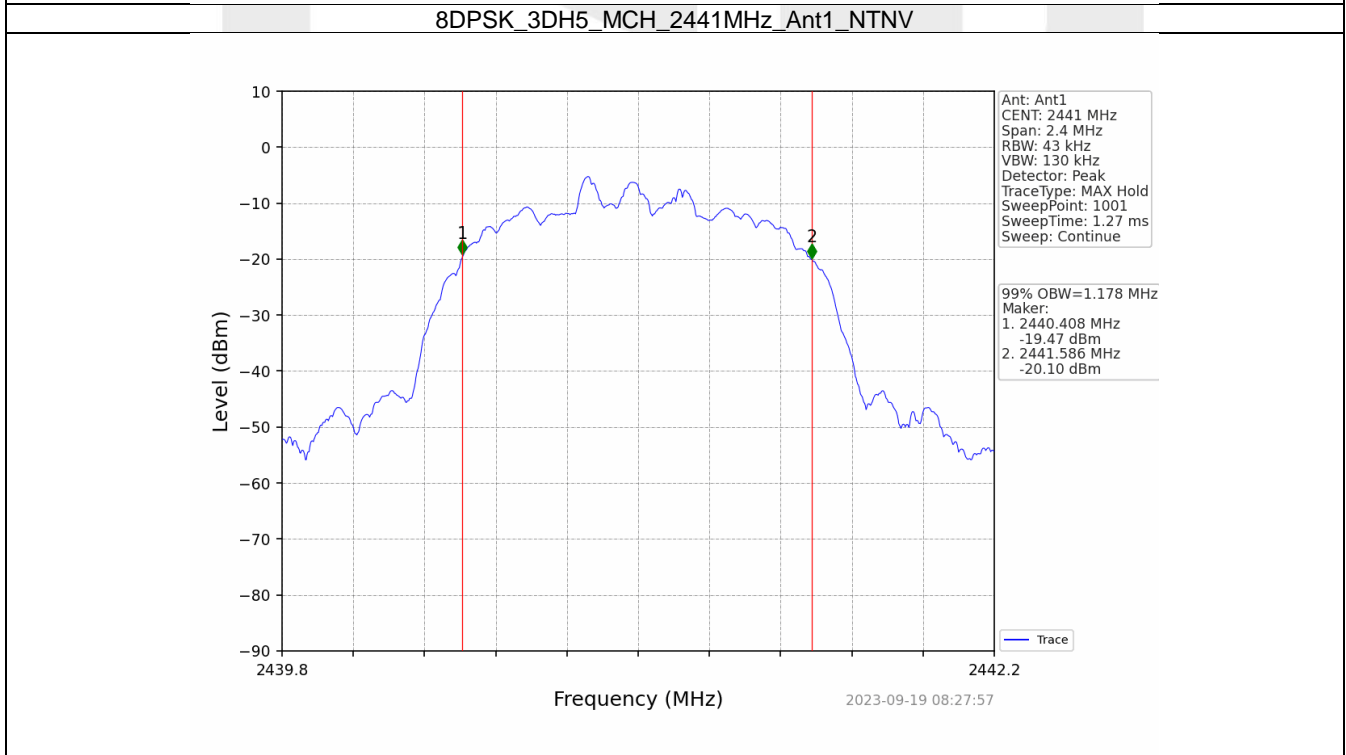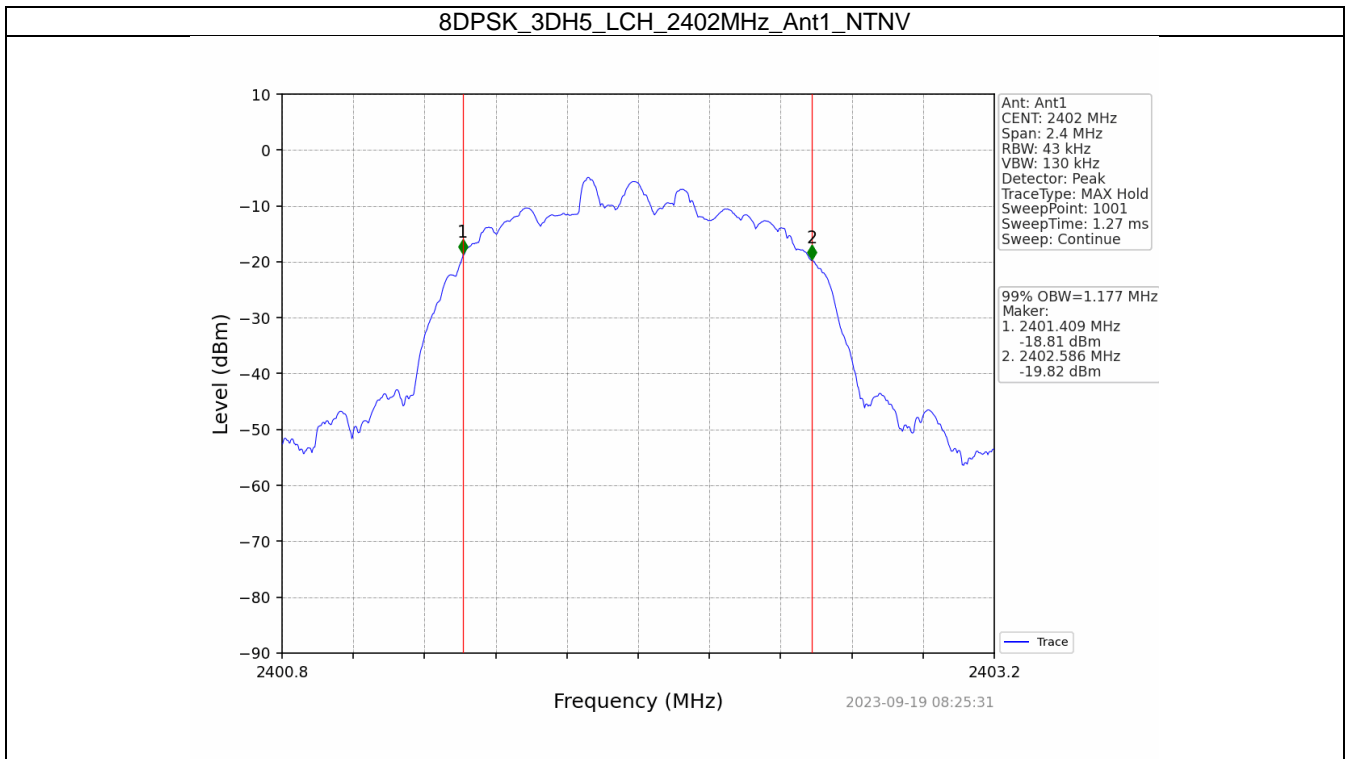

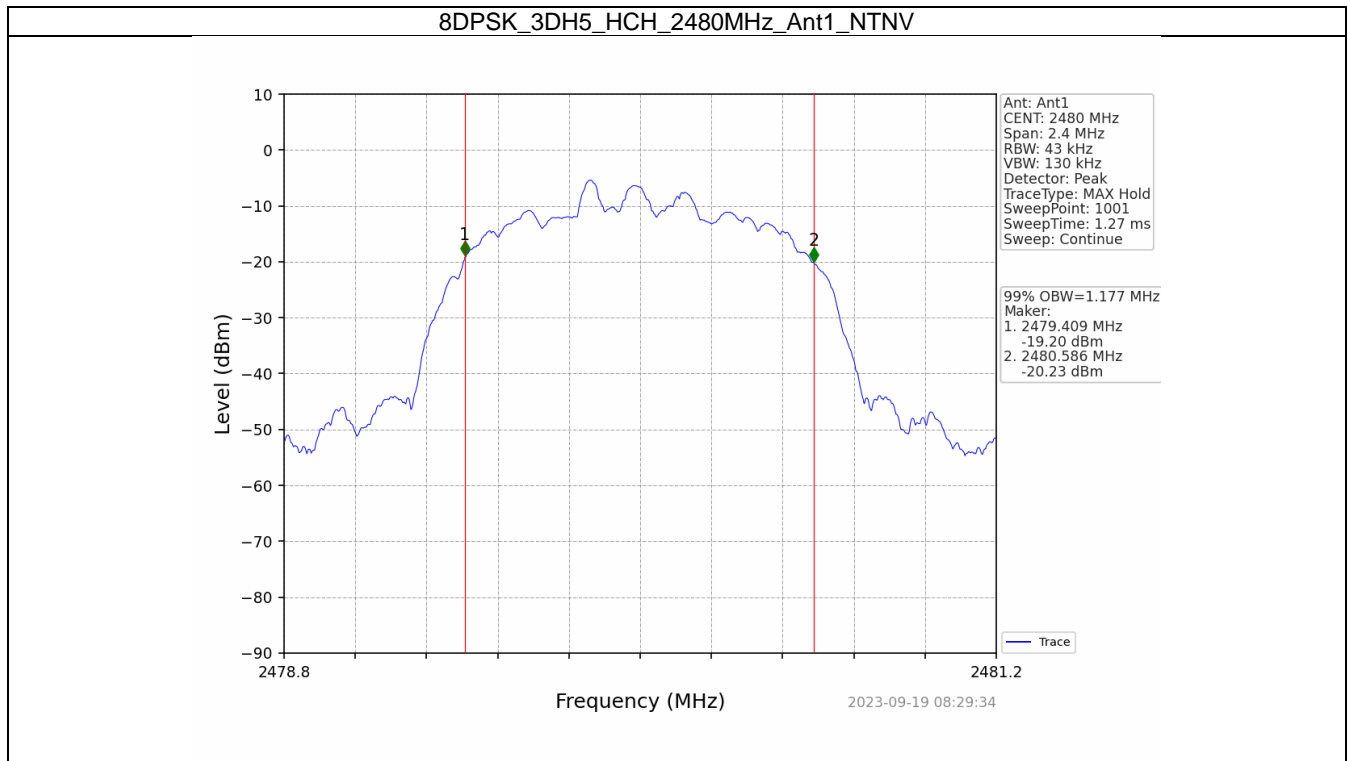




2.2 20dB BW



2.2.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.957	Pass
		2441	DH5	1	0.955	Pass
		2480	DH5	1	0.953	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.286	Pass
		2441	2DH5	1	1.286	Pass
		2480	2DH5	1	1.289	Pass
8DPSK	SISO	2402	3DH5	1	1.313	Pass
		2441	3DH5	1	1.309	Pass
		2480	3DH5	1	1.311	Pass


2.2.2 Test Graph

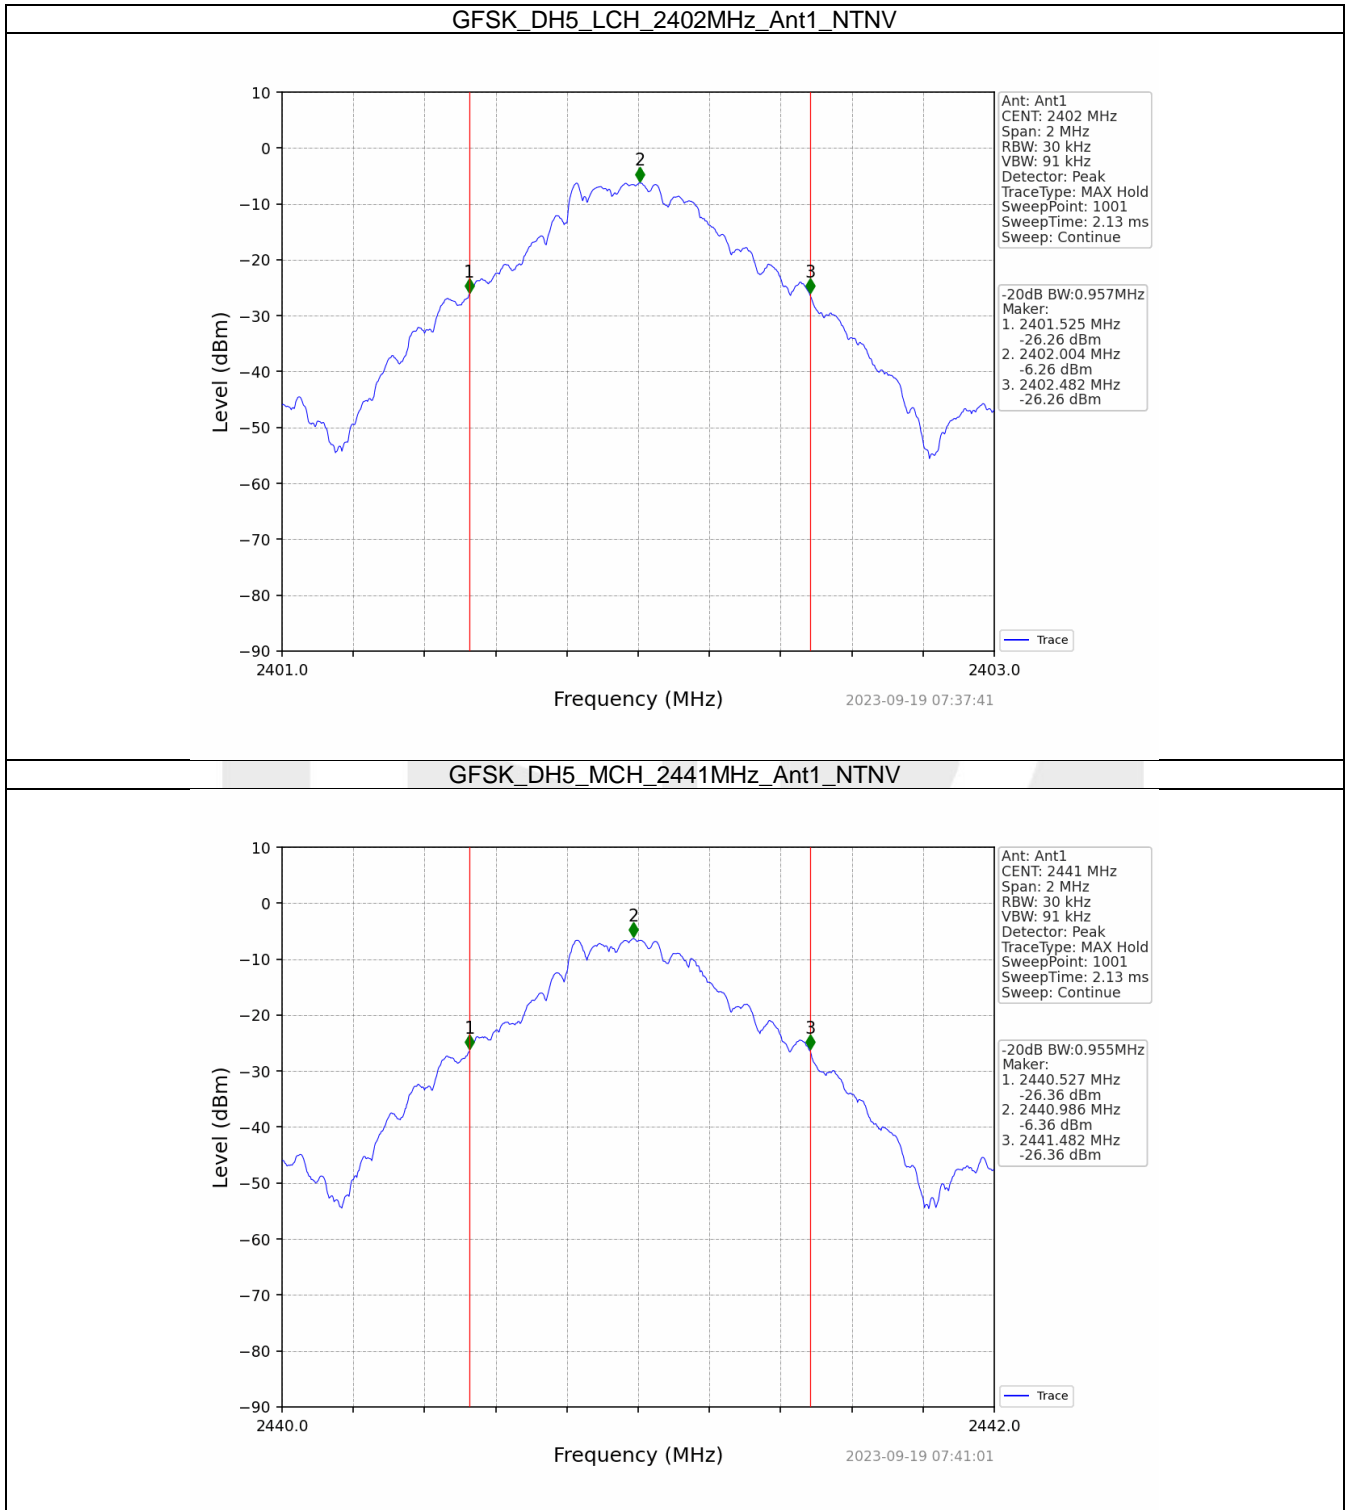

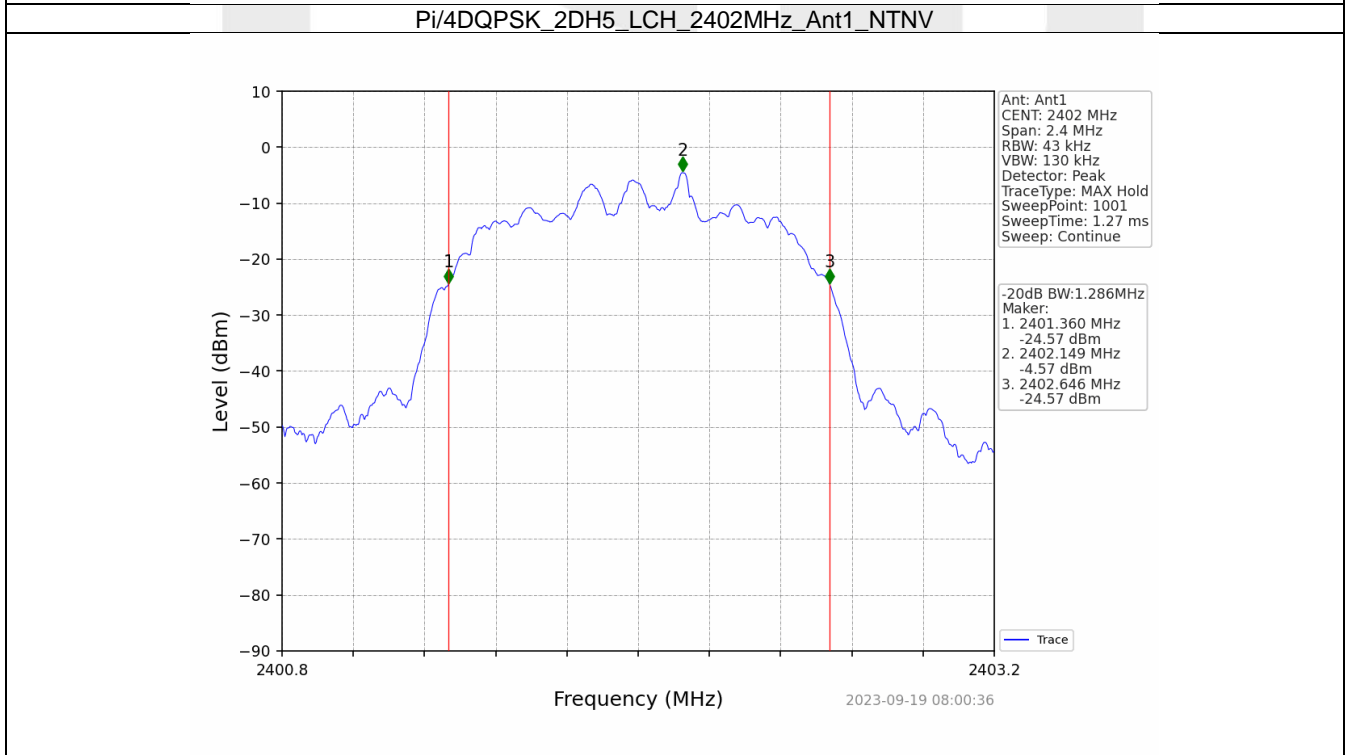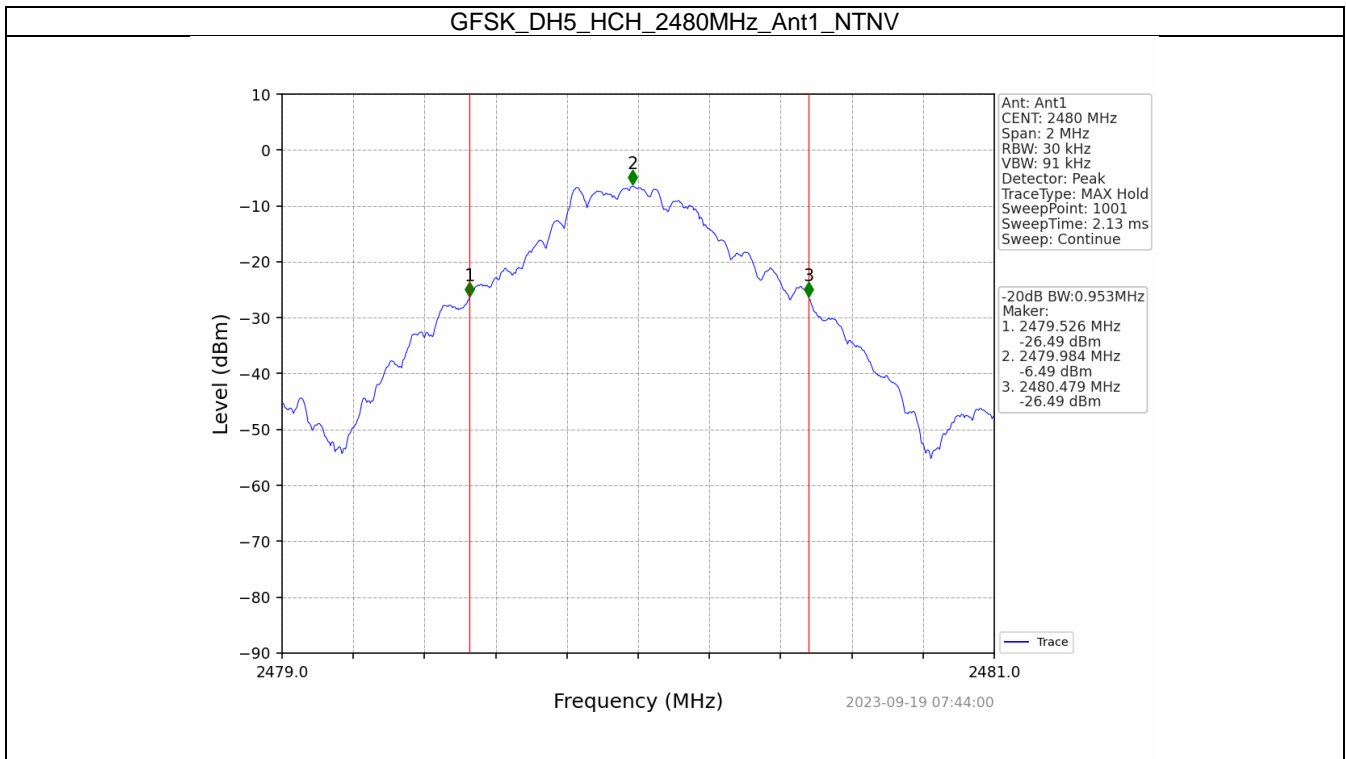

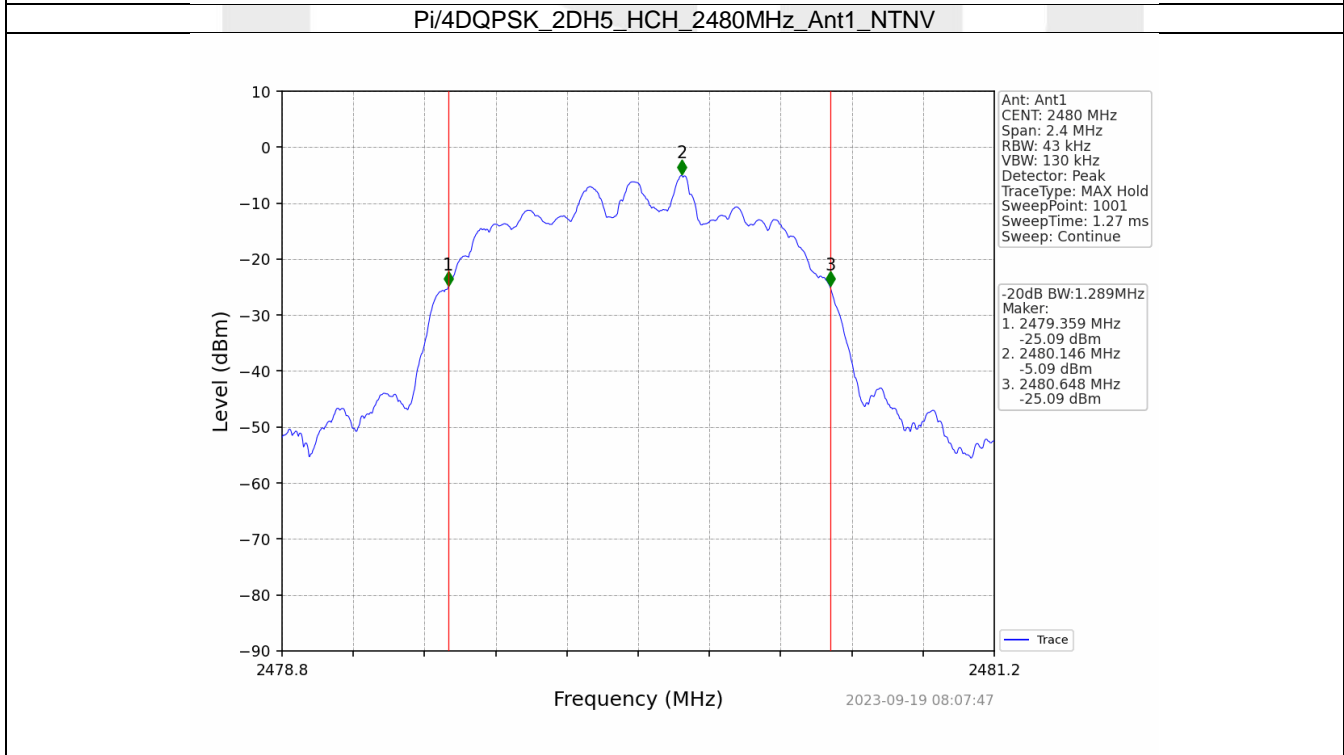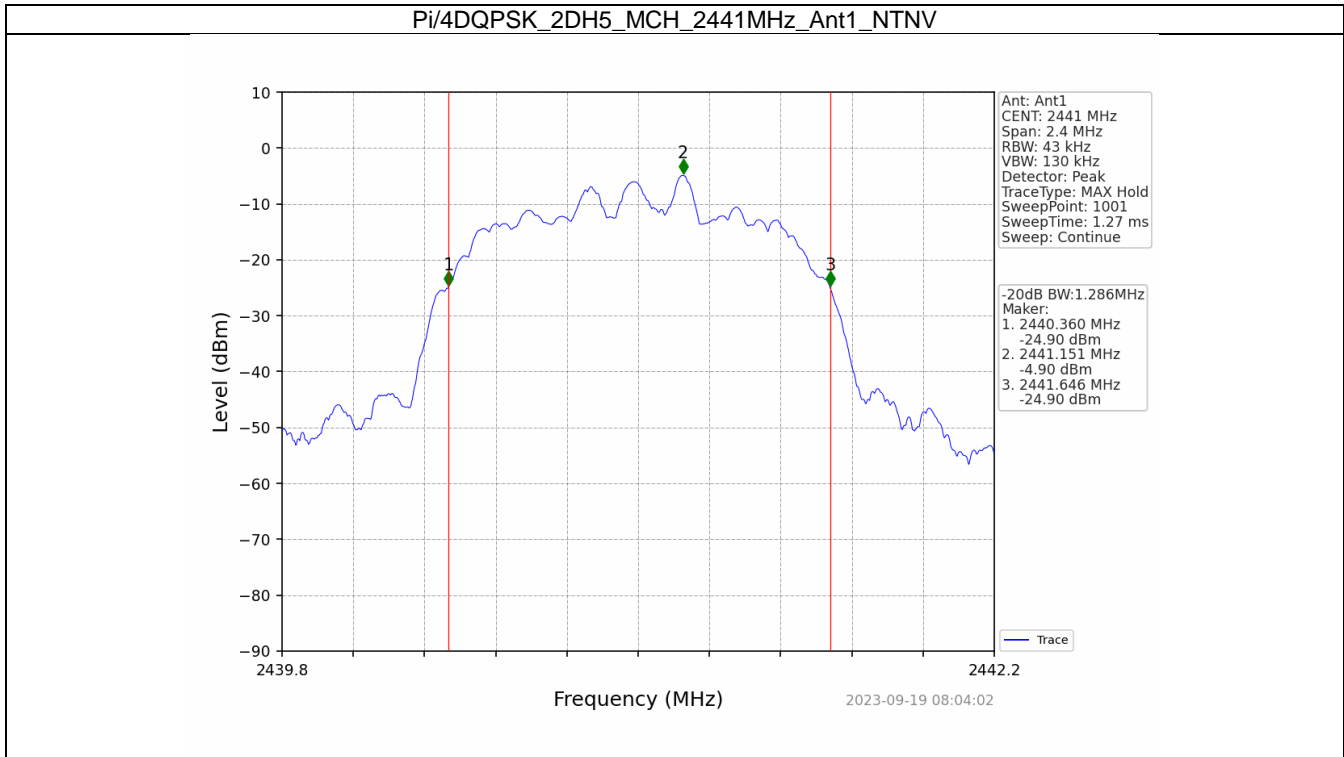

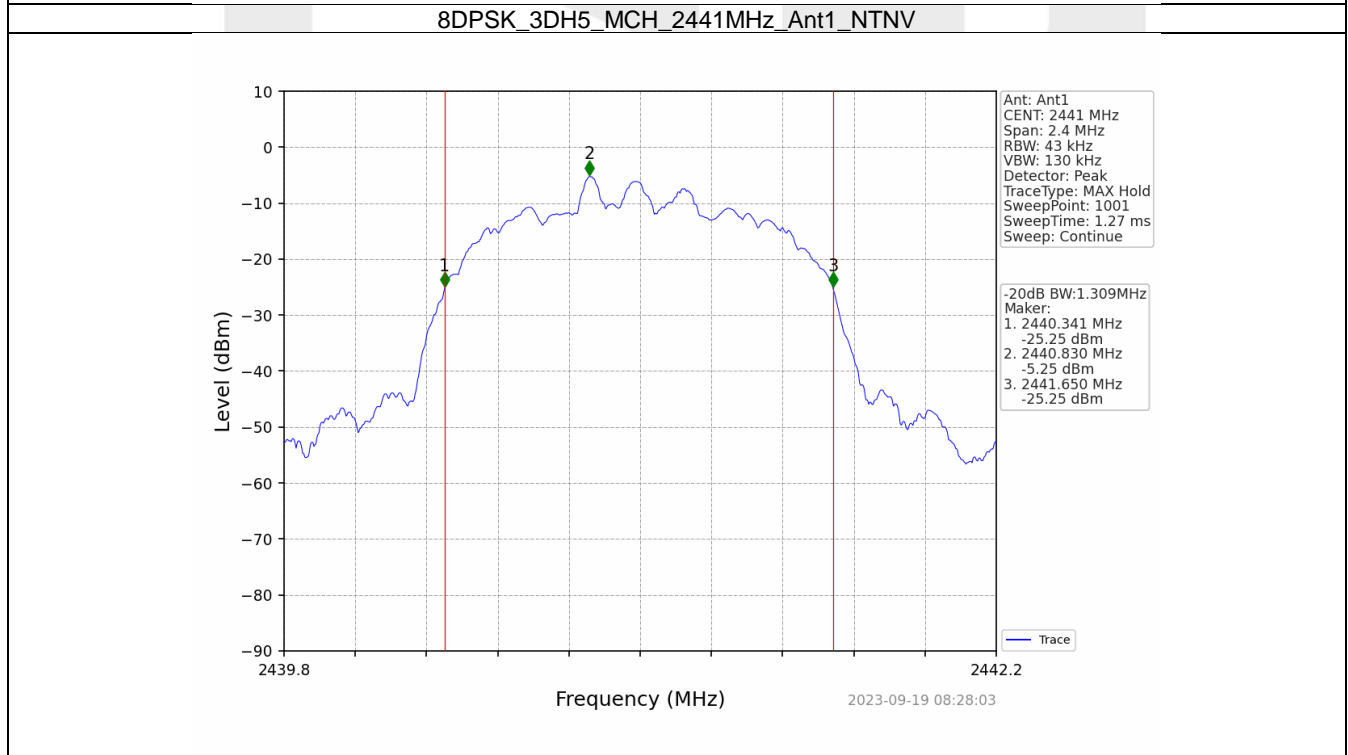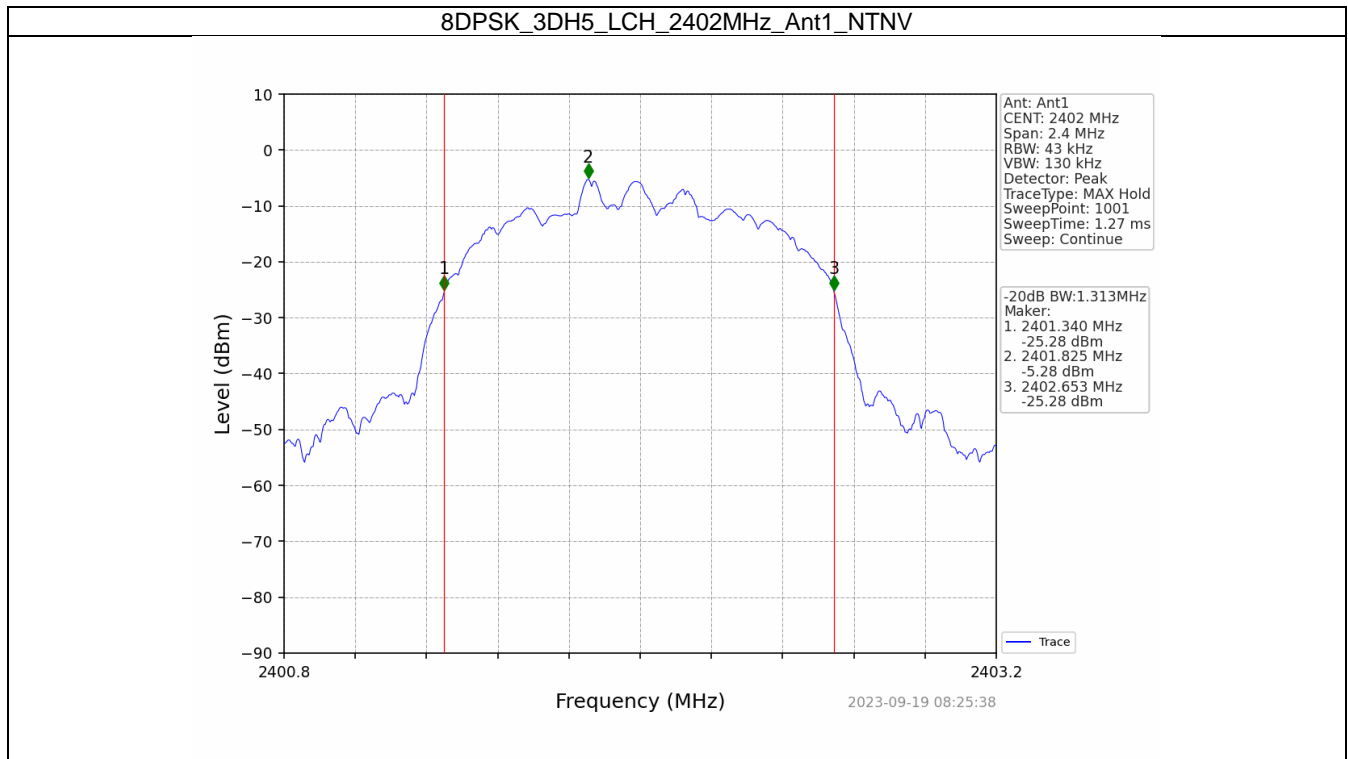

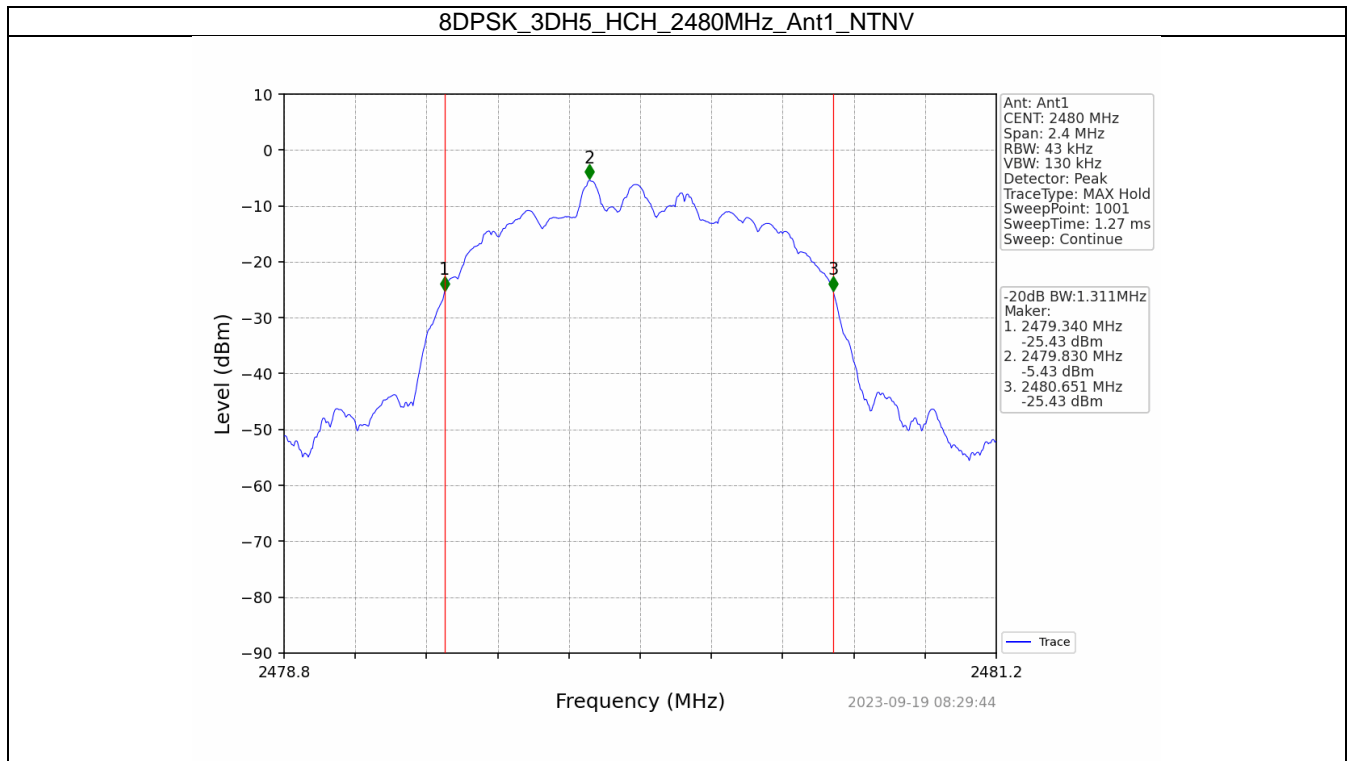

3. Maximum Conducted Output Power


3.1 Power



3.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-3.69	<=30	Pass
		2441	DH5	-4.13	<=30	Pass
		2480	DH5	-4.19	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-2.84	<=20.97	Pass
		2441	2DH5	-3.17	<=20.97	Pass
		2480	2DH5	-3.32	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-2.26	<=20.97	Pass
		2441	3DH5	-2.77	<=20.97	Pass
		2480	3DH5	-2.94	<=20.97	Pass



Note1: Antenna Gain: Ant1: 1.68dBi;


3.1.2 Test Graph

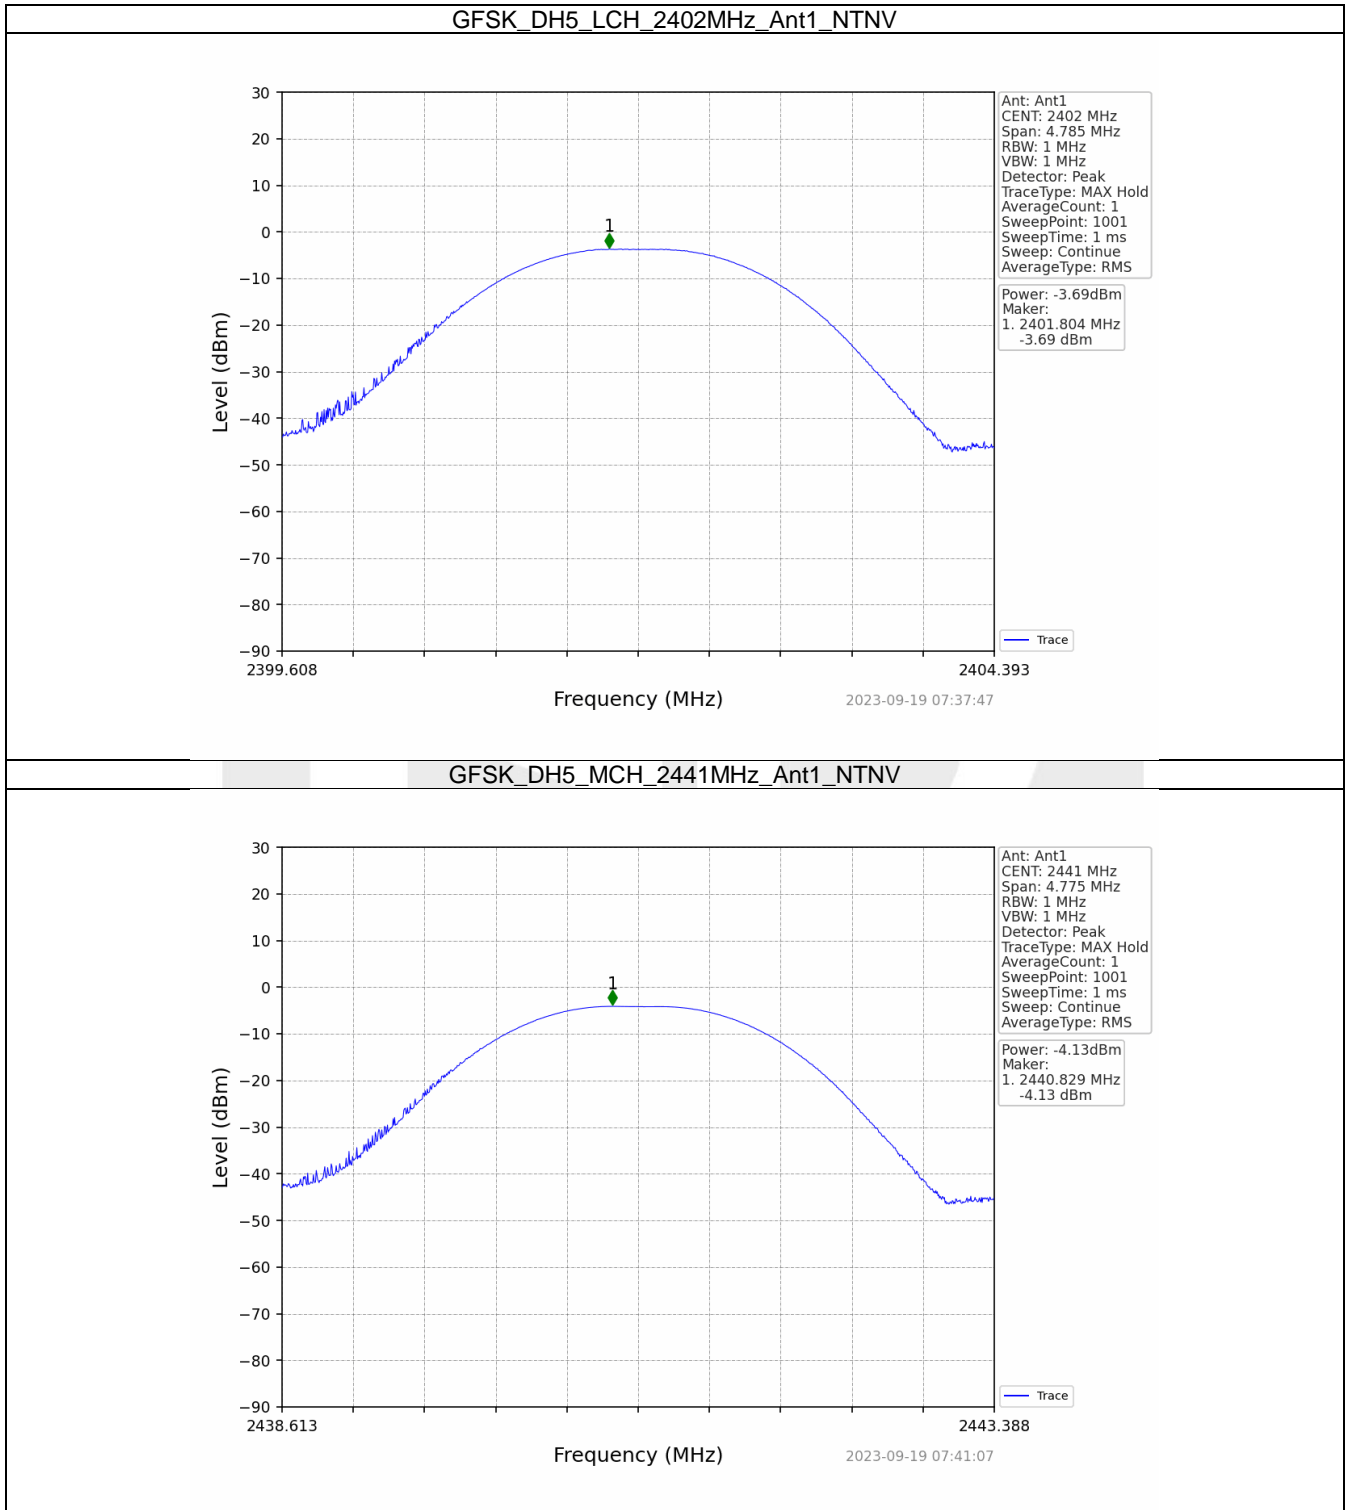

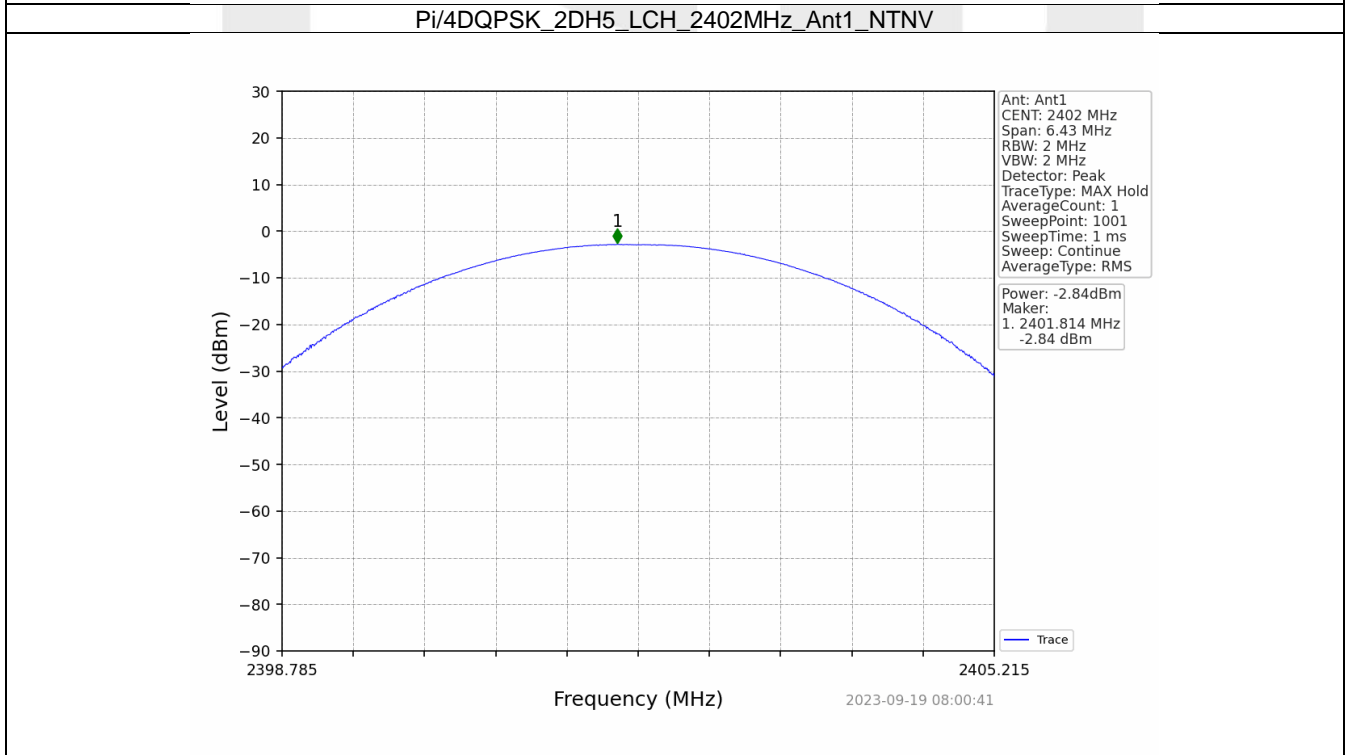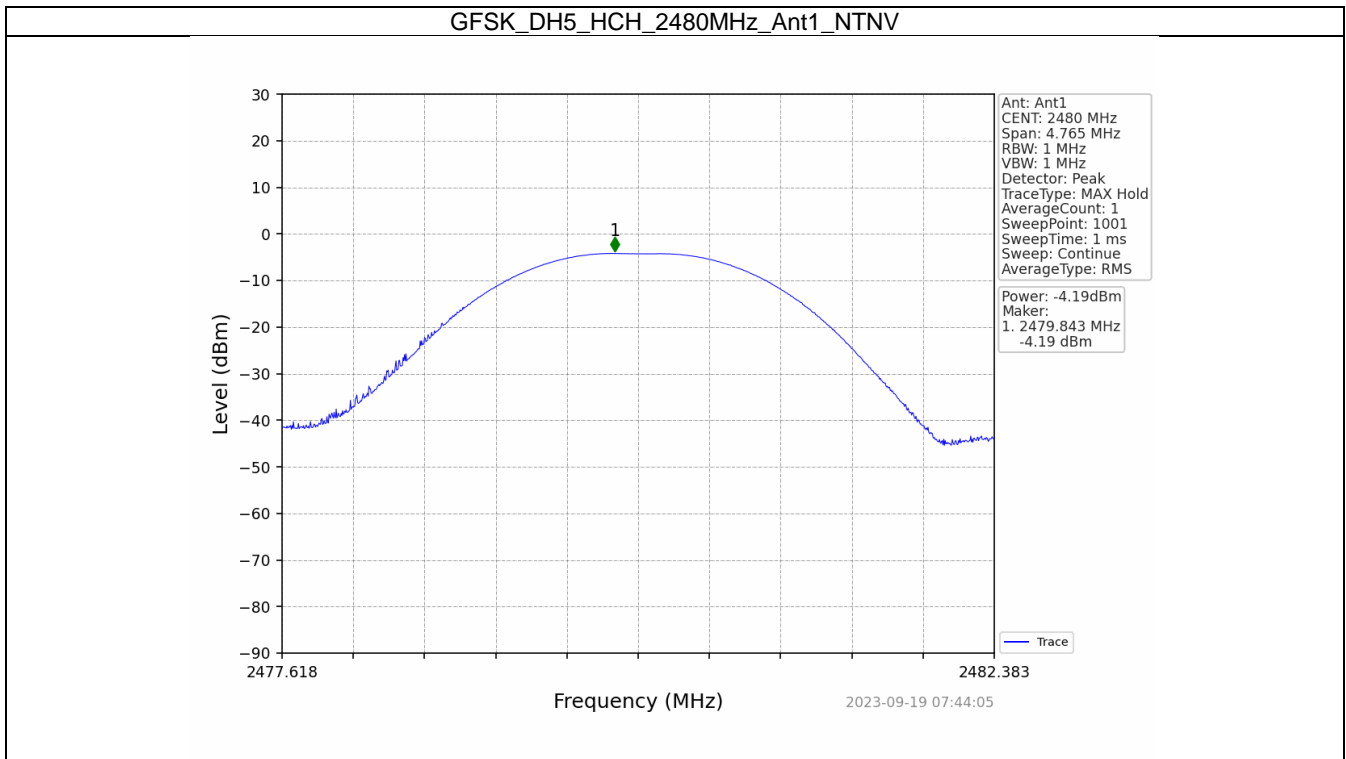

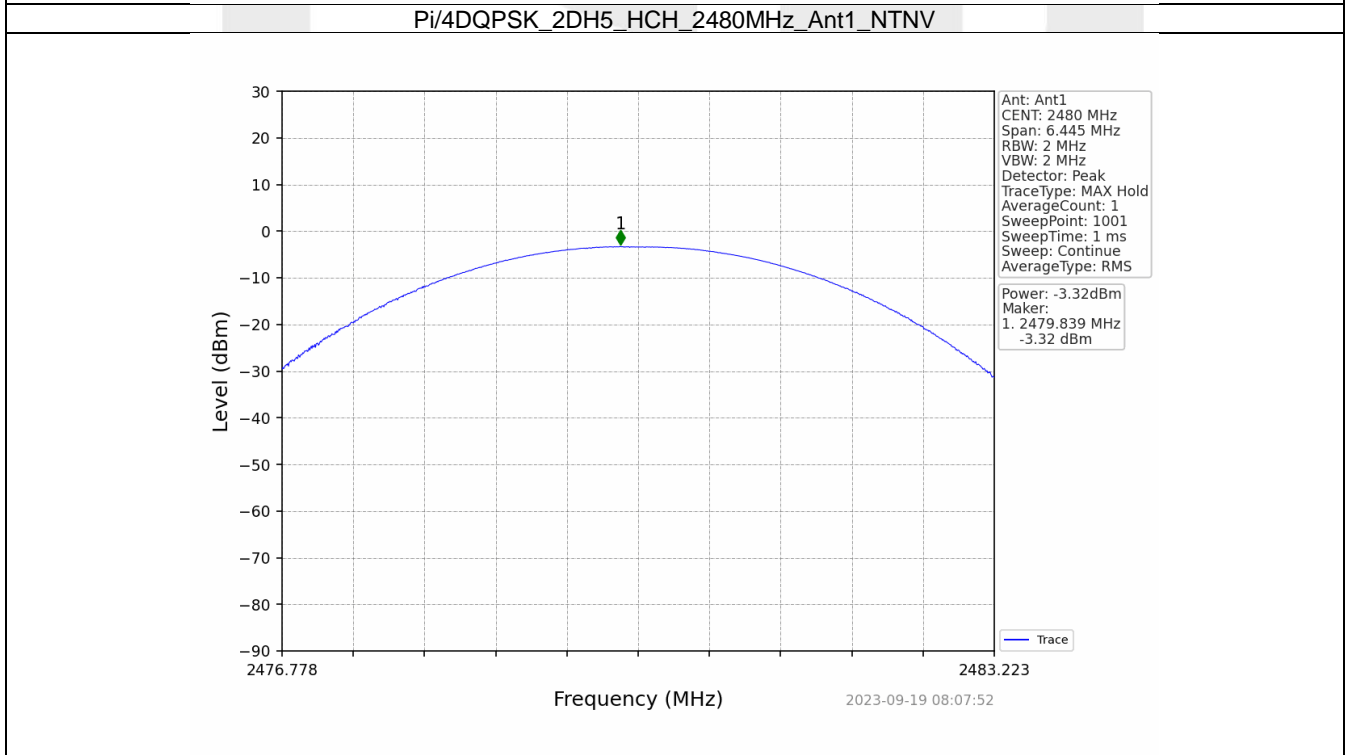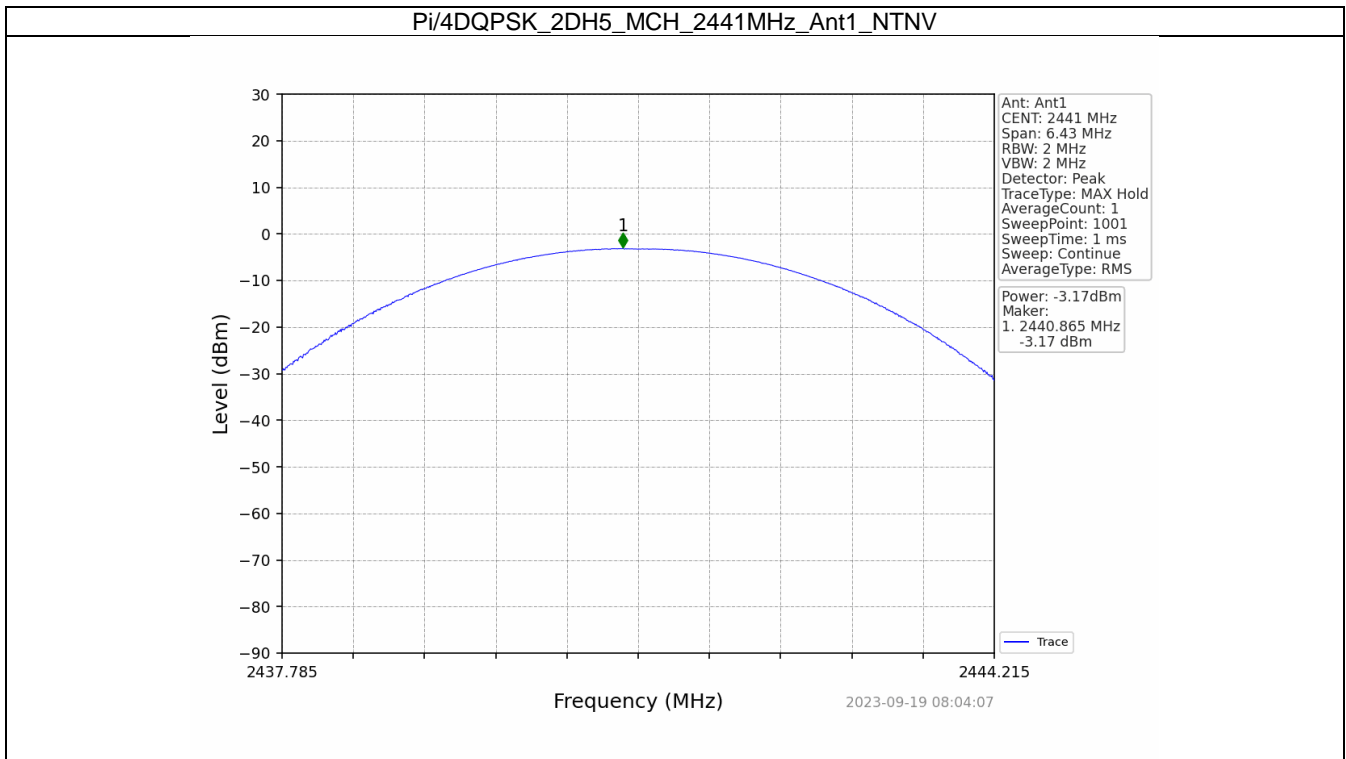

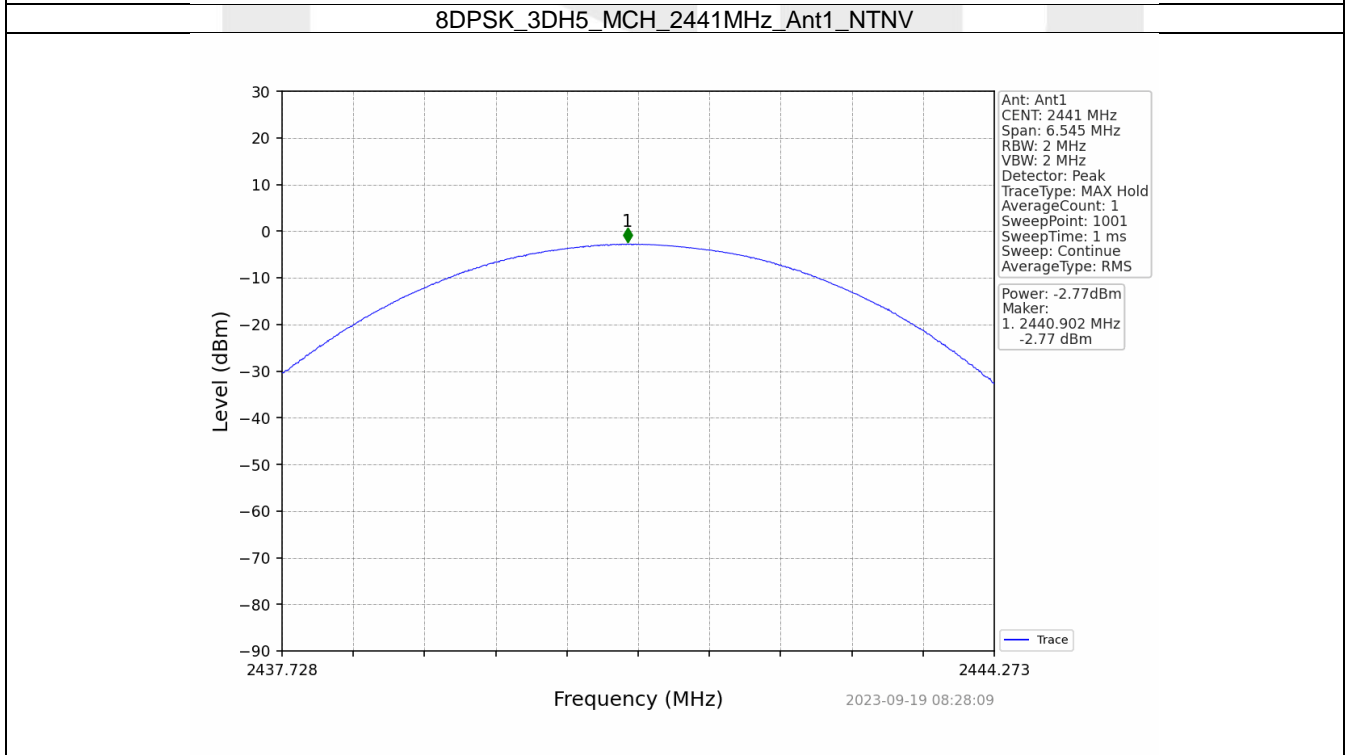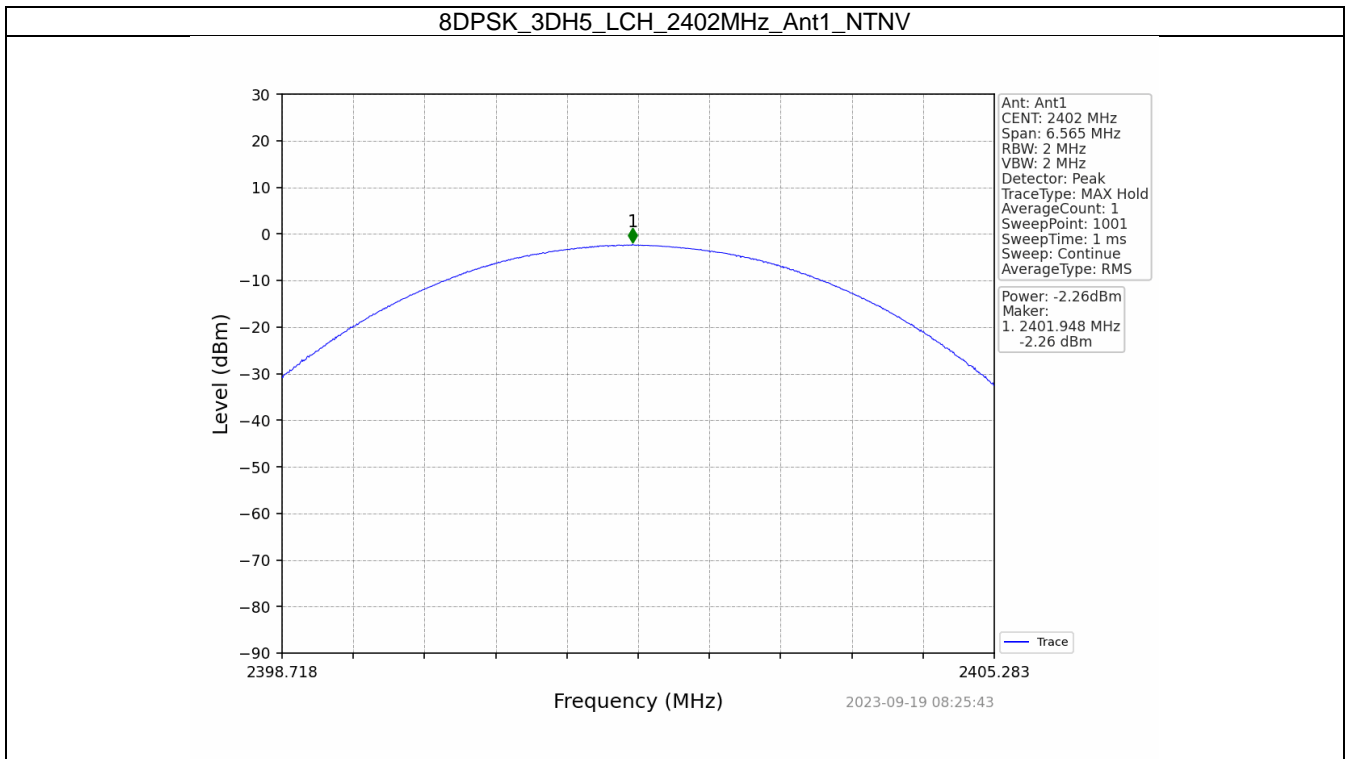

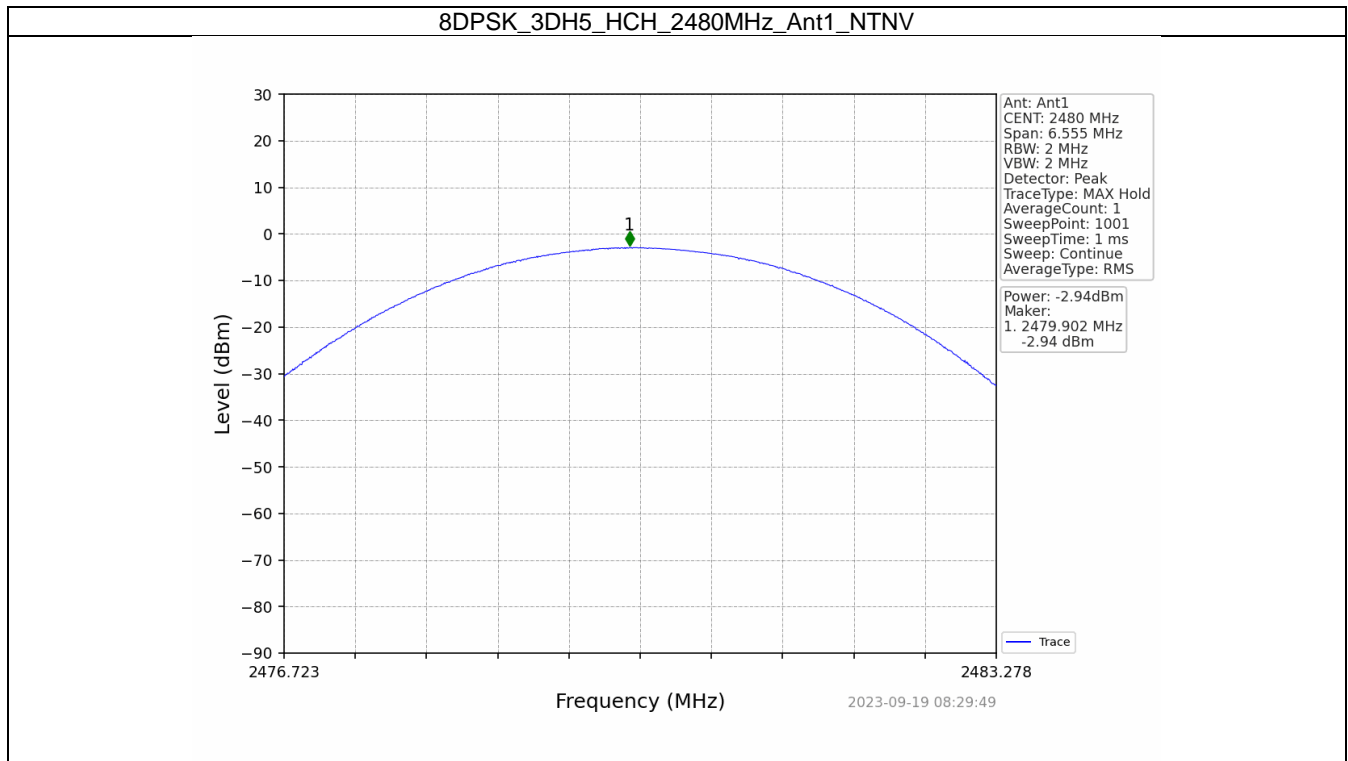


4. Carrier Frequency Separation


4.1 Ant1

4.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.004	0.957	≥ 0.957	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	0.986	1.289	≥ 0.859	Pass
8DPSK	SISO	HOPP	3DH5	0.996	1.313	≥ 0.875	Pass

4.1.2 Test Graph

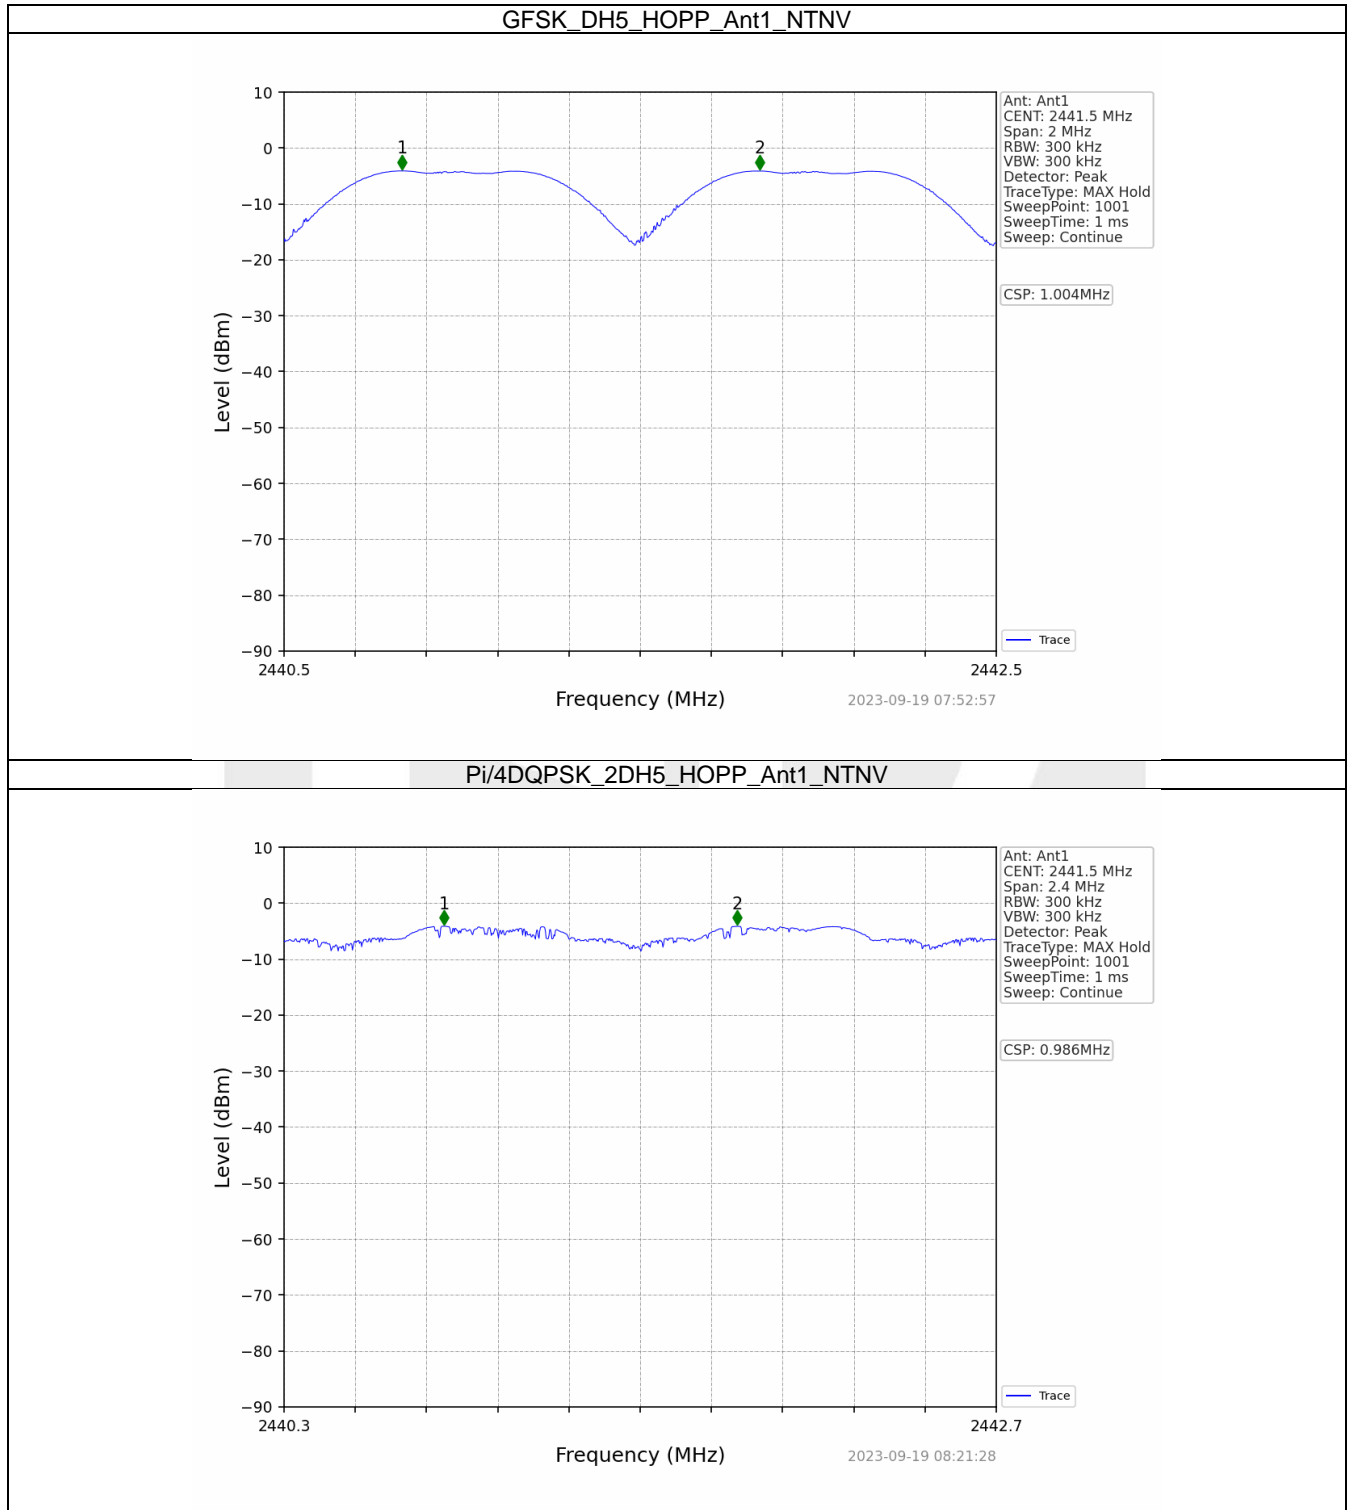

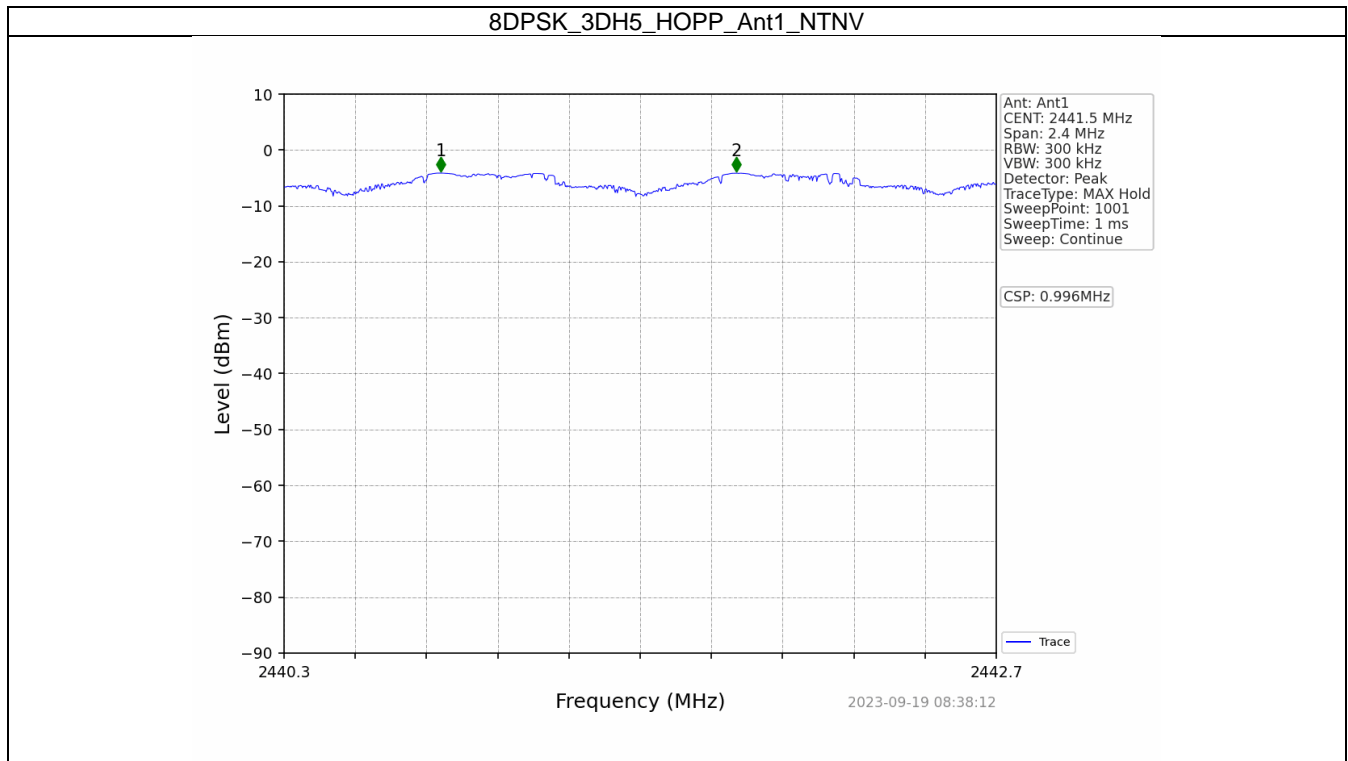


5. Number of Hopping Frequencies


5.1 HoppNum

5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
$\pi/4$ DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

5.1.2 Test Graph

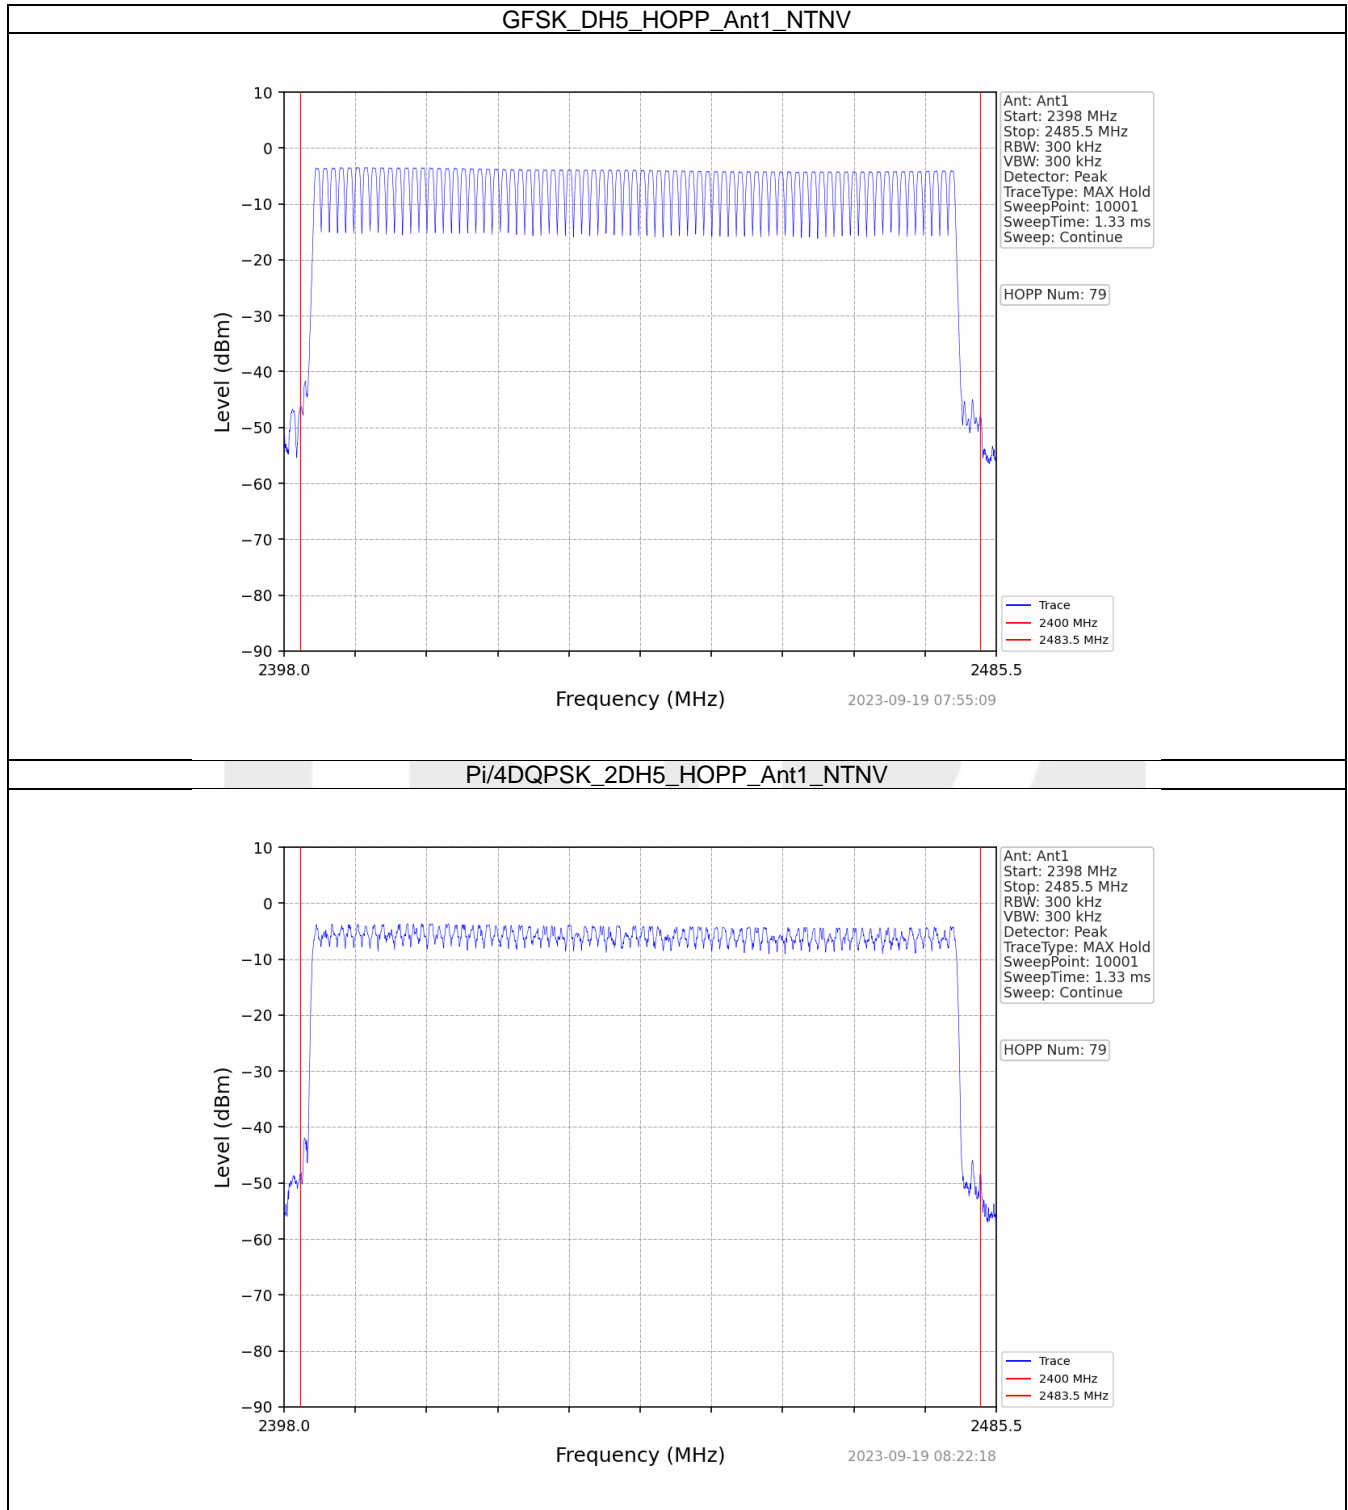

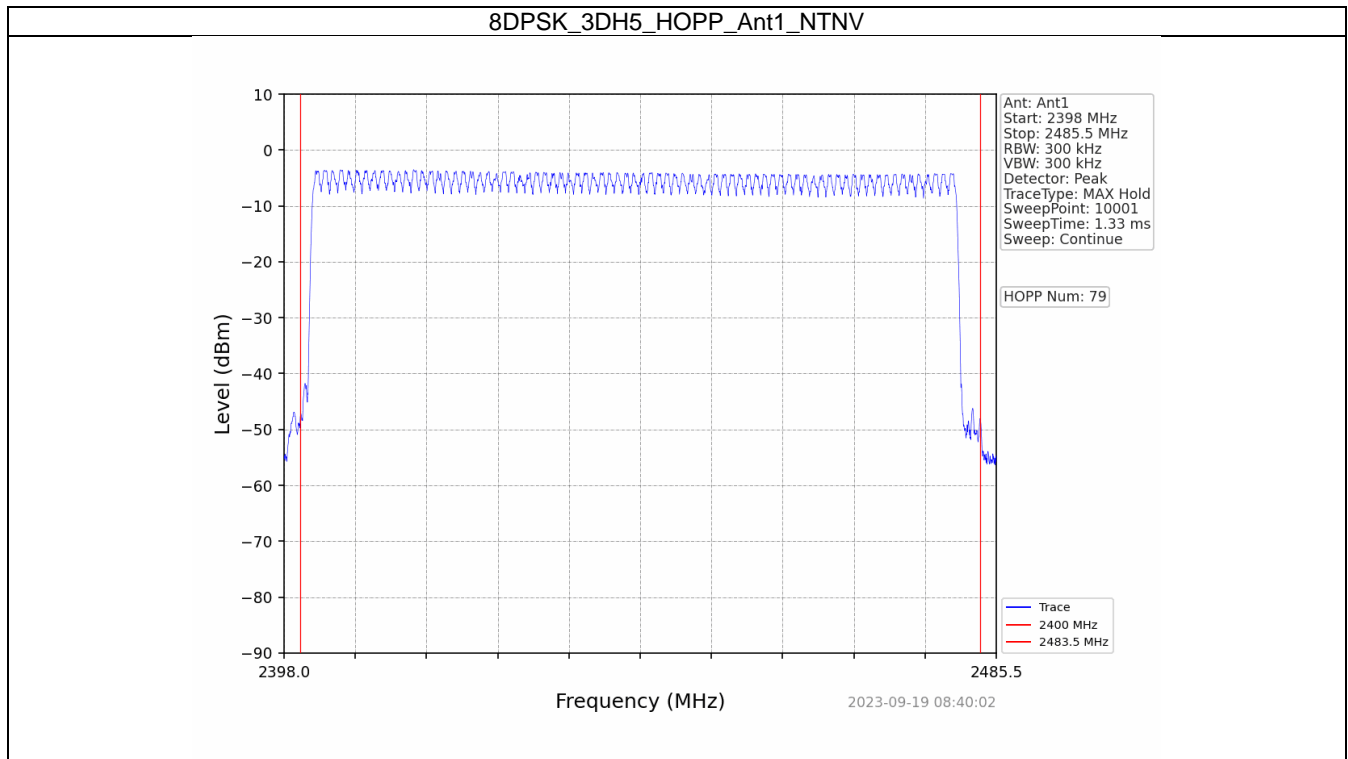


6. Time of Occupancy (Dwell Time)



6.1 Ant1



6.1.1 Test Result



Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.380	31.600	320	121.600	<=400	Pass
			DH3	1.636	31.600	162	265.032	<=400	Pass
			DH5	2.884	31.600	98	282.632	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	319	124.410	<=400	Pass
			2DH3	1.642	31.600	161	264.362	<=400	Pass
			2DH5	2.892	31.600	118	341.256	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.392	31.600	320	125.440	<=400	Pass
			3DH3	1.642	31.600	158	259.436	<=400	Pass
			3DH5	2.890	31.600	95	274.550	<=400	Pass



6.1.2 Test Graph


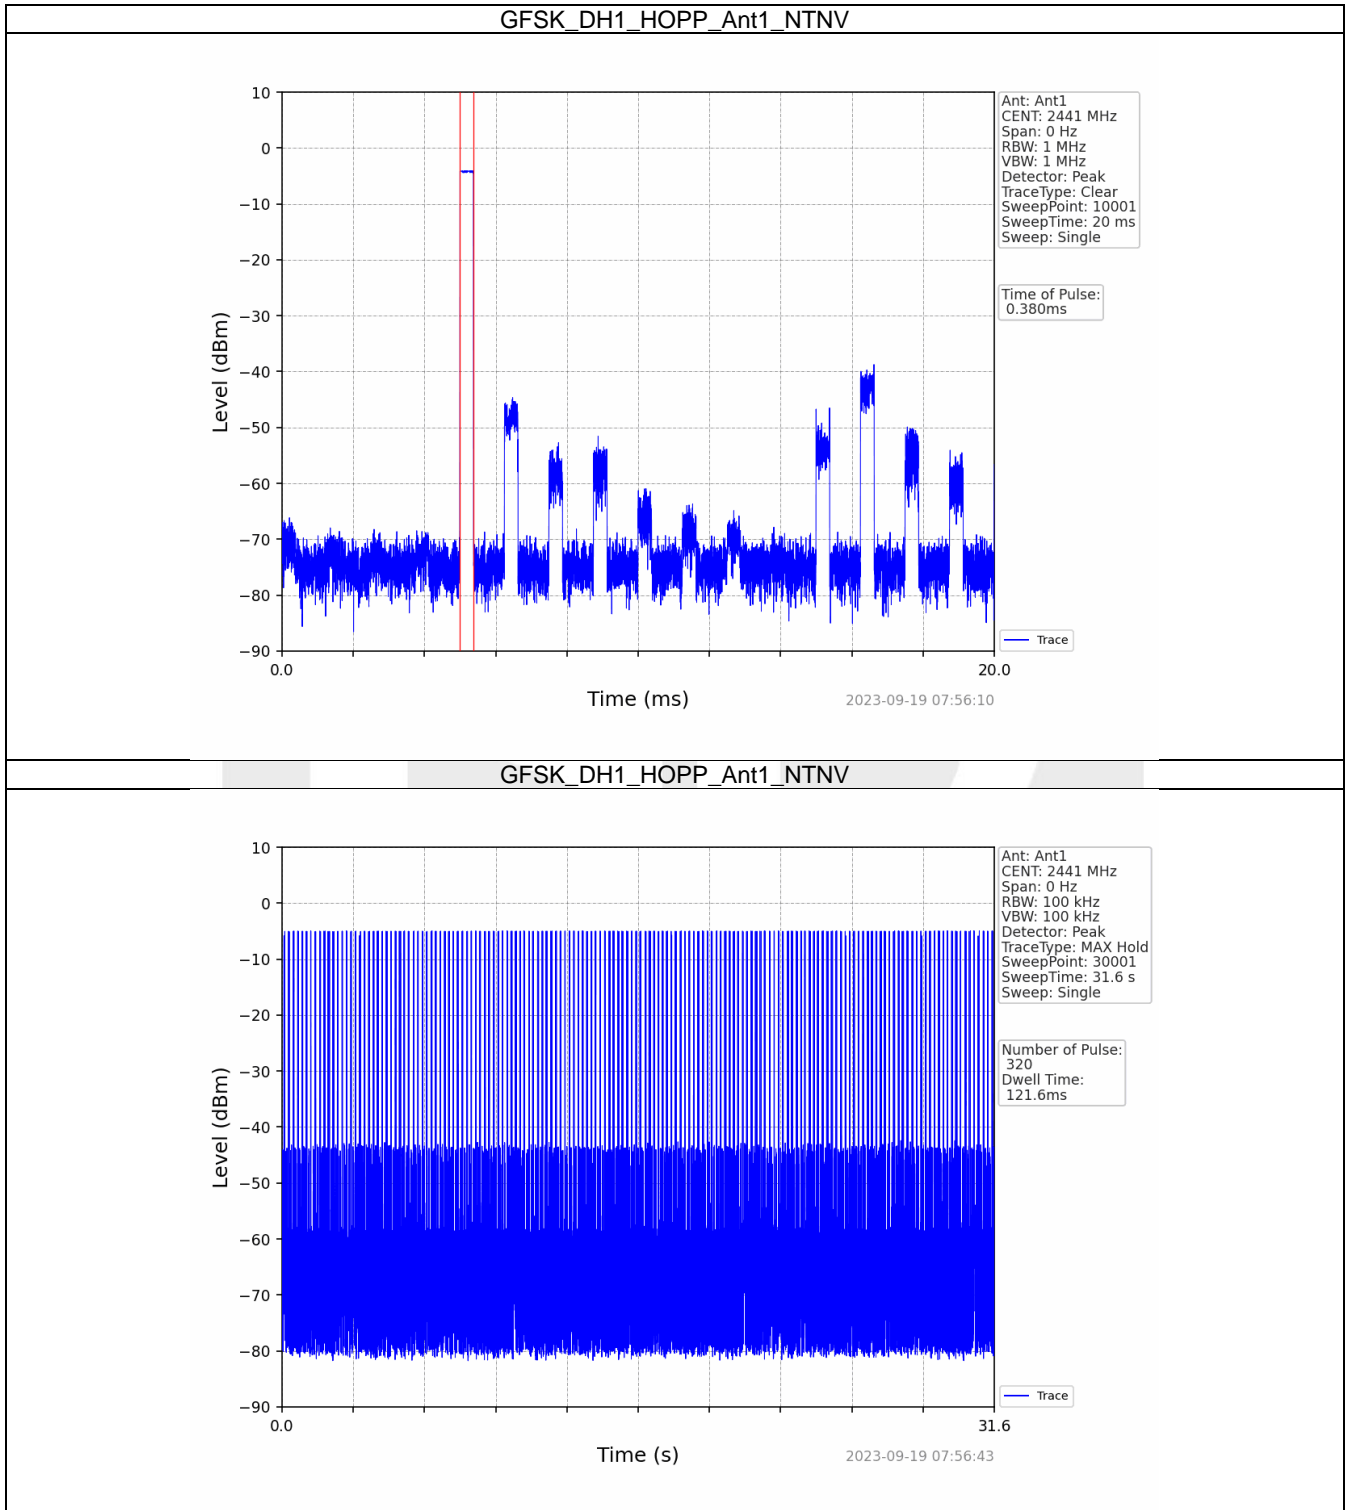


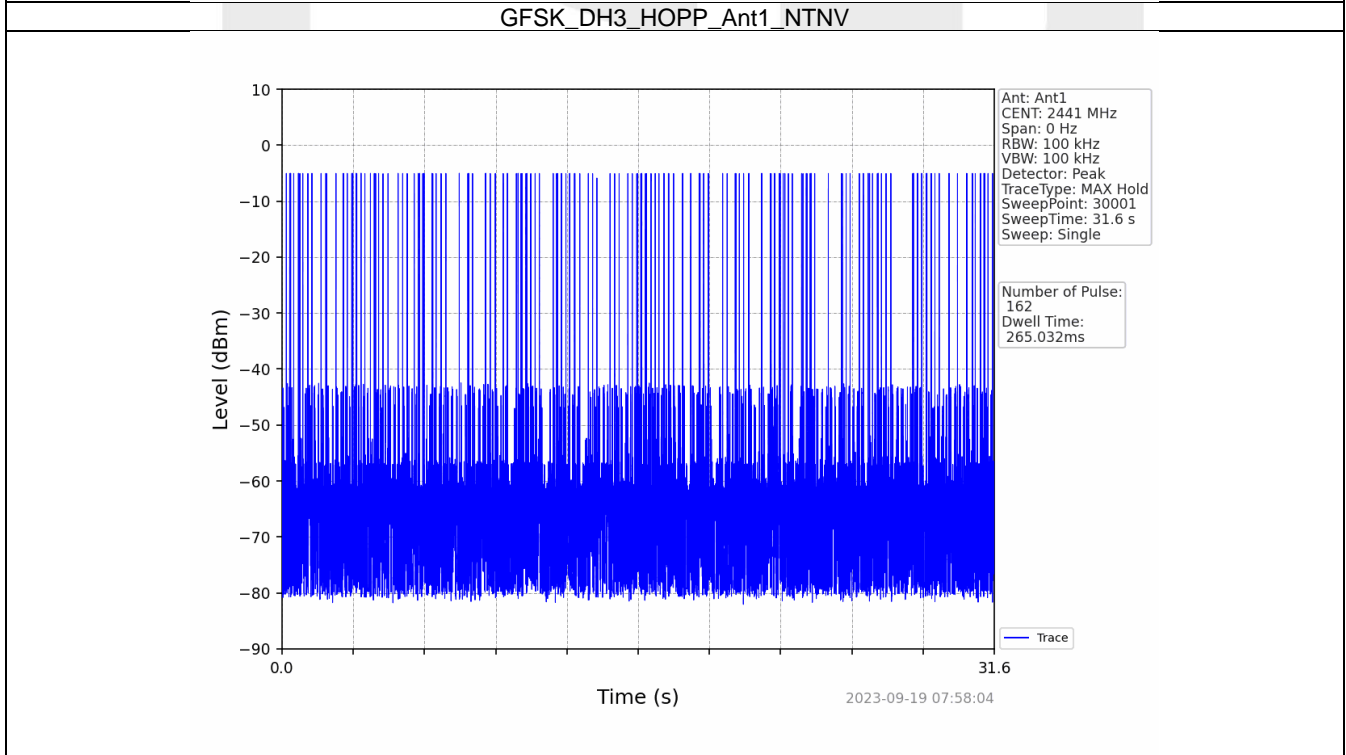
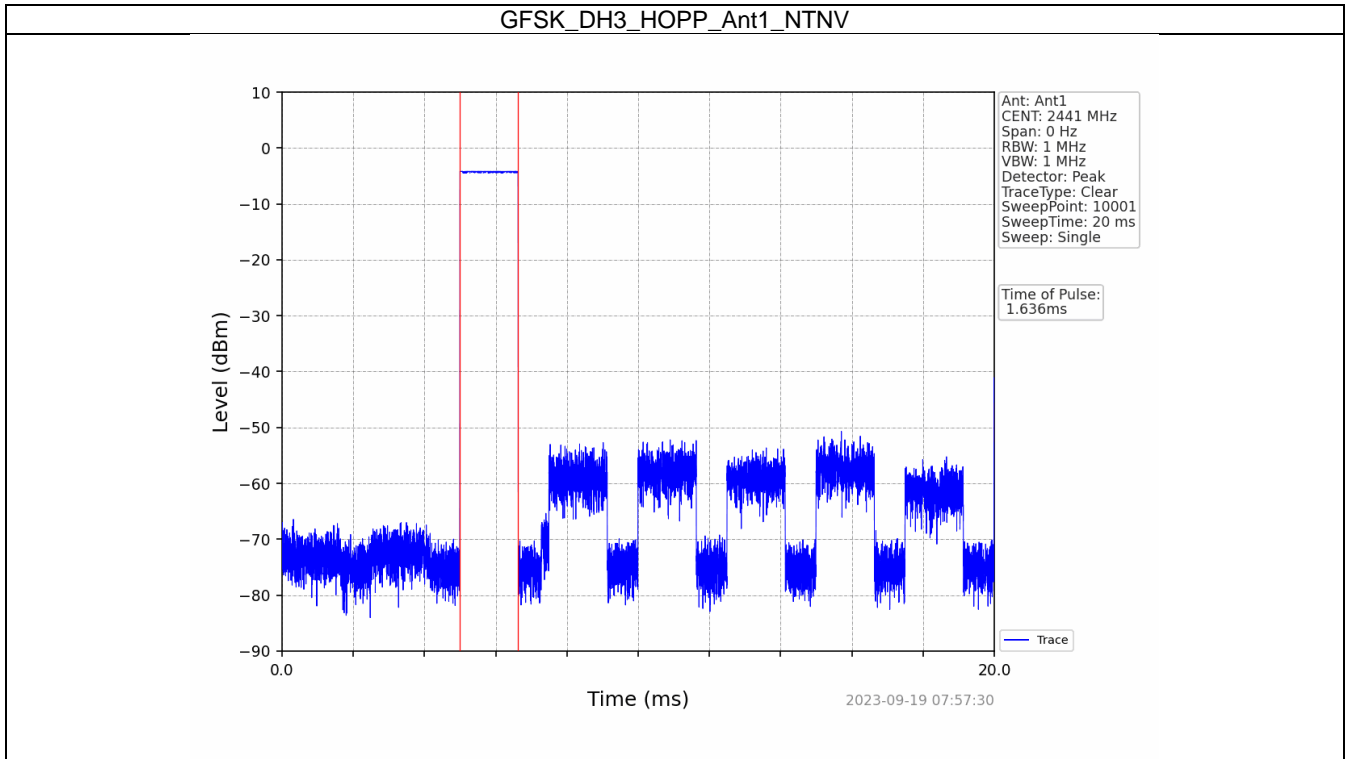


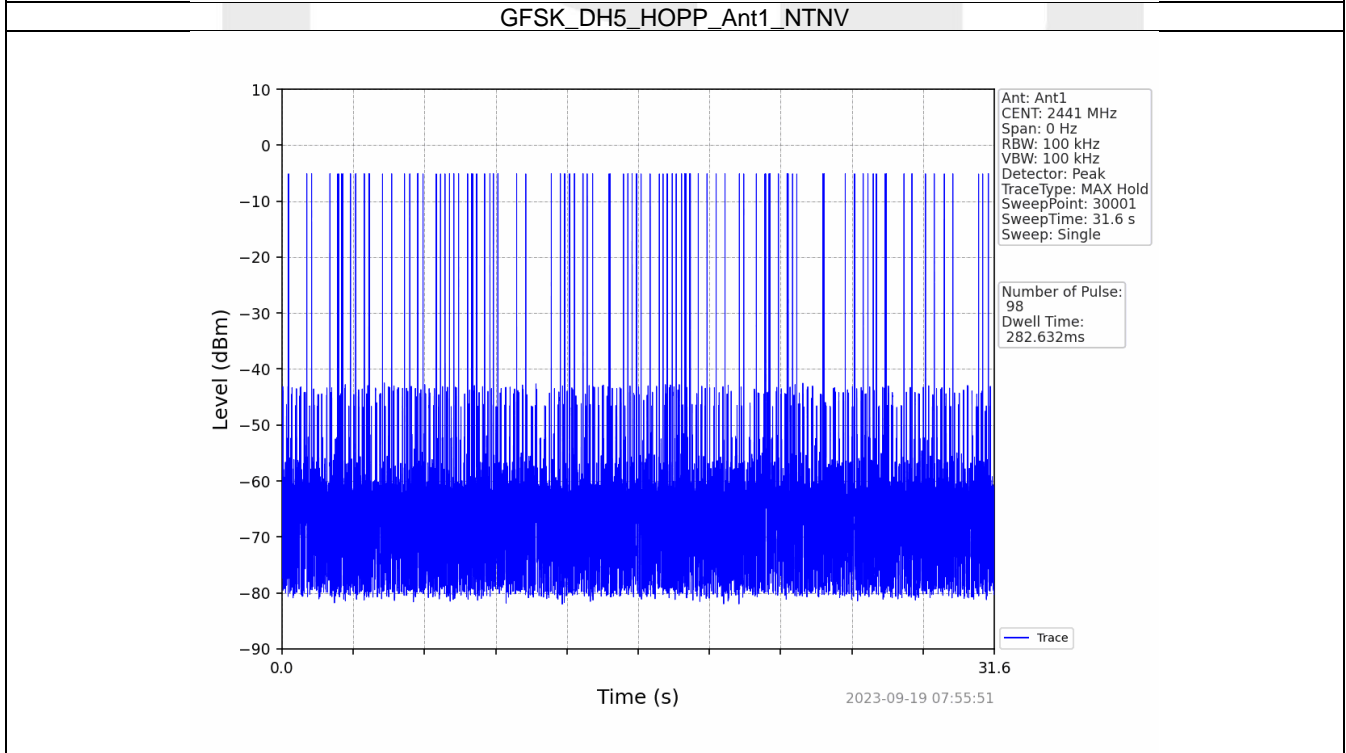
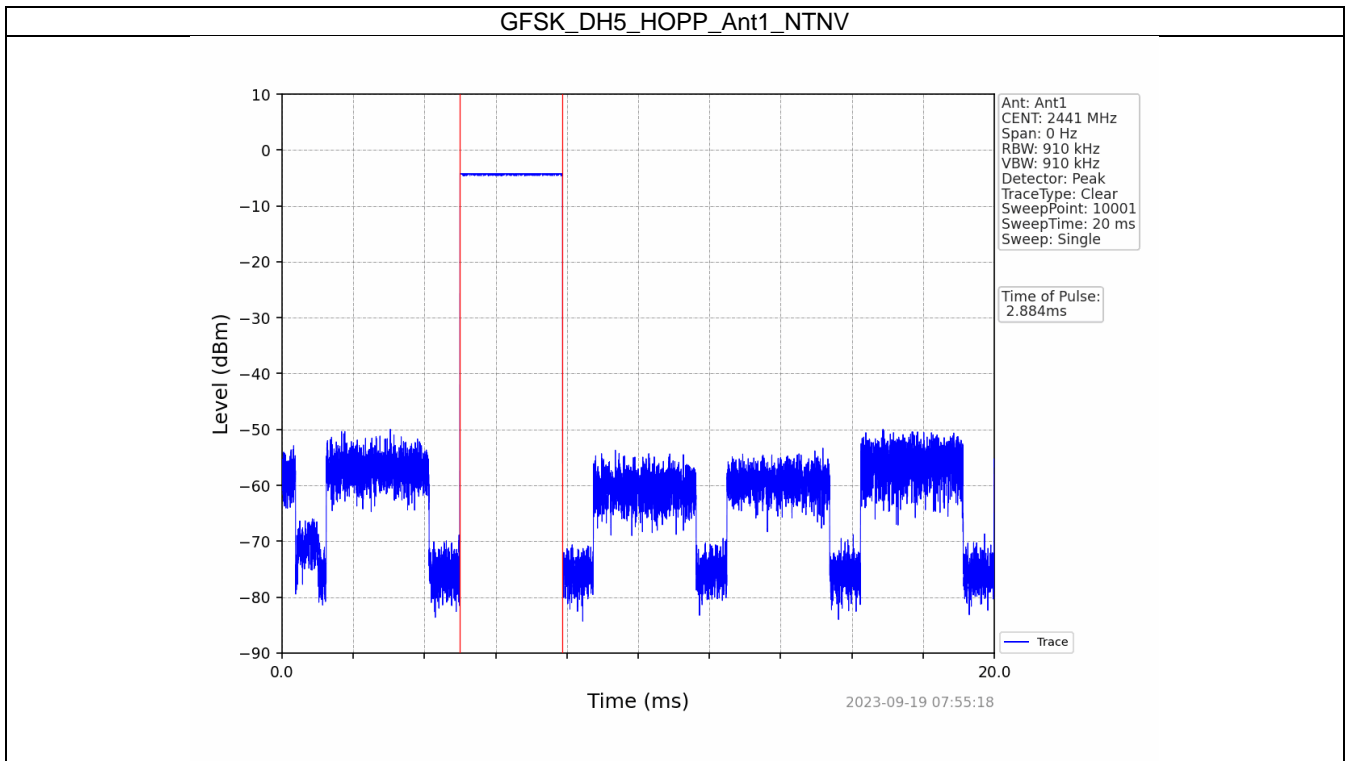


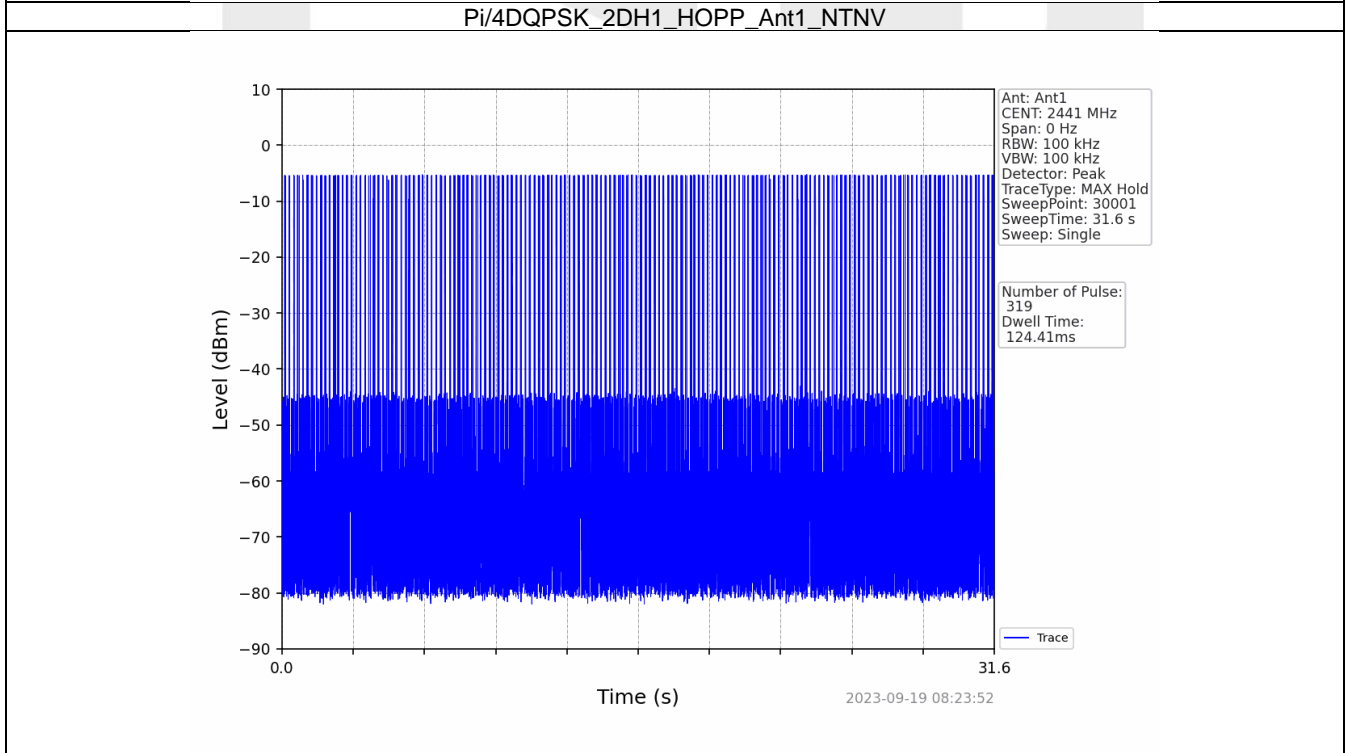
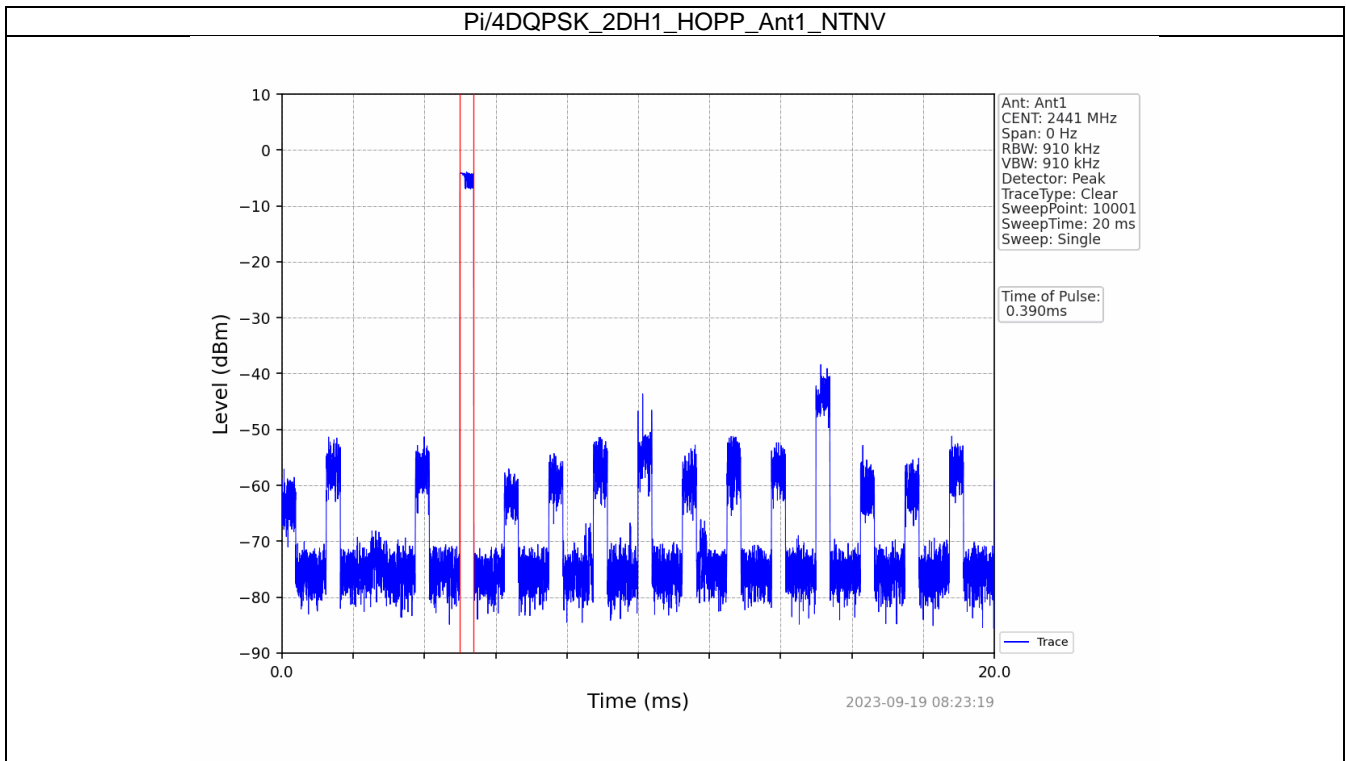


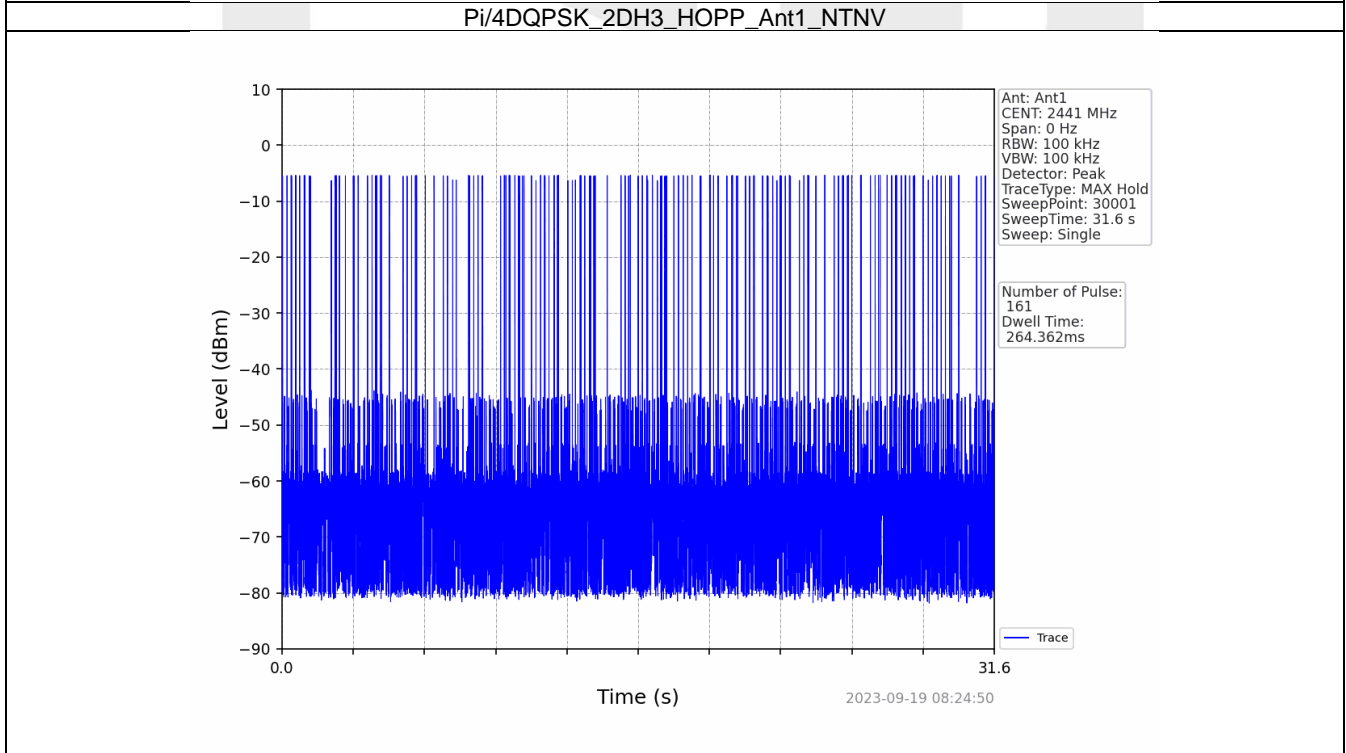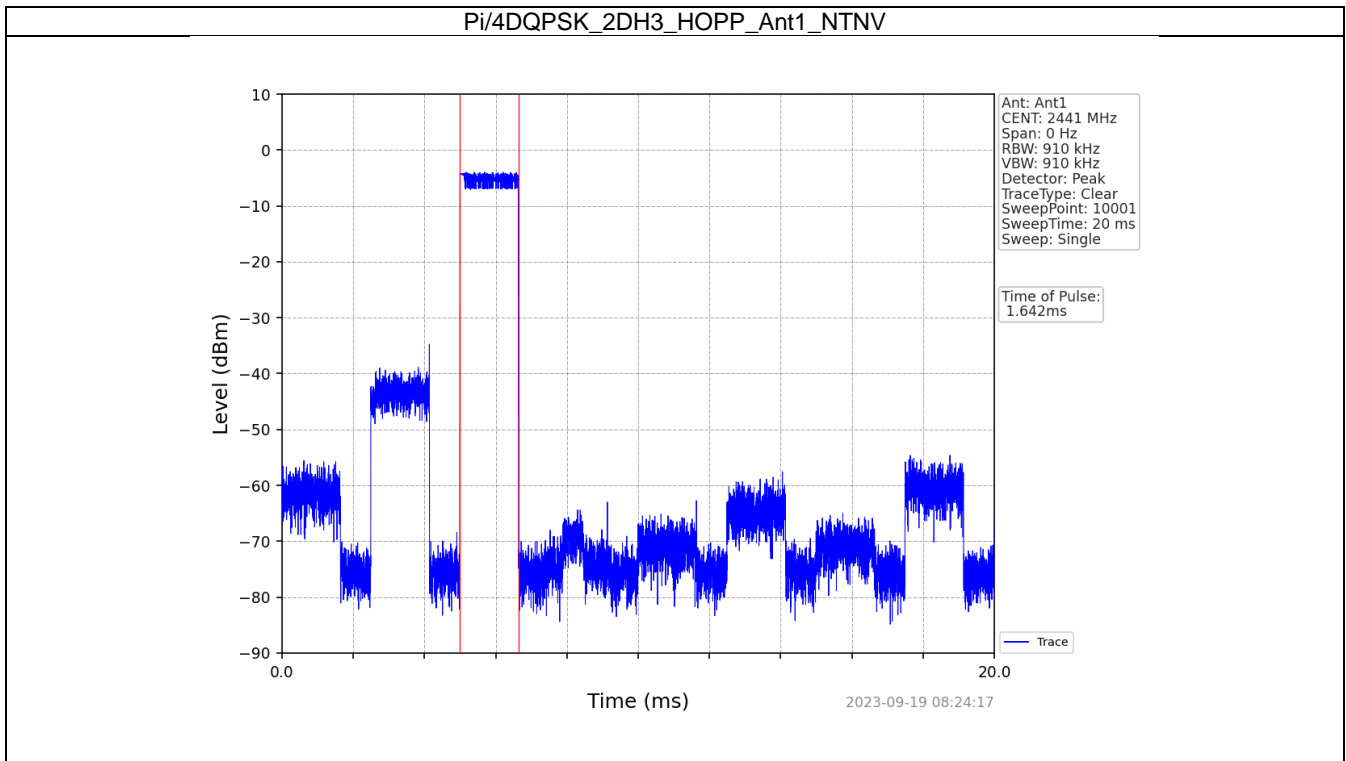

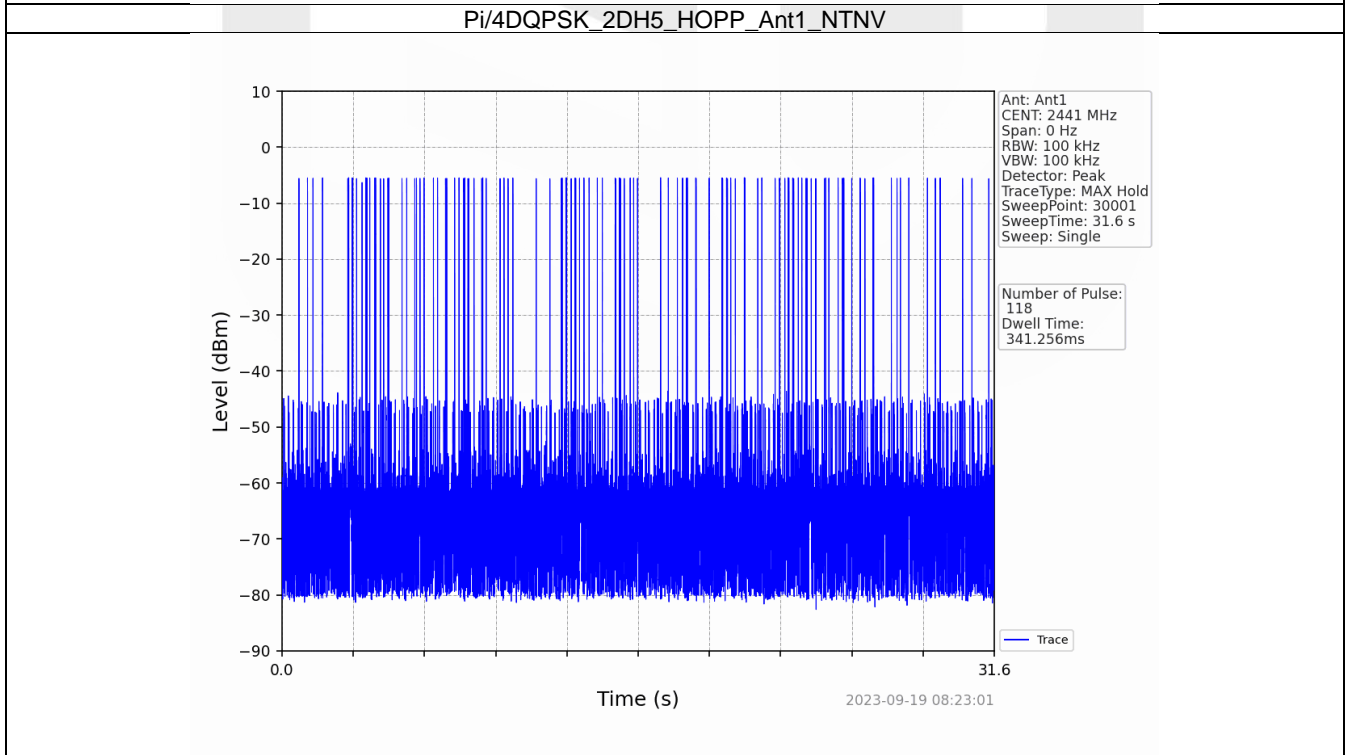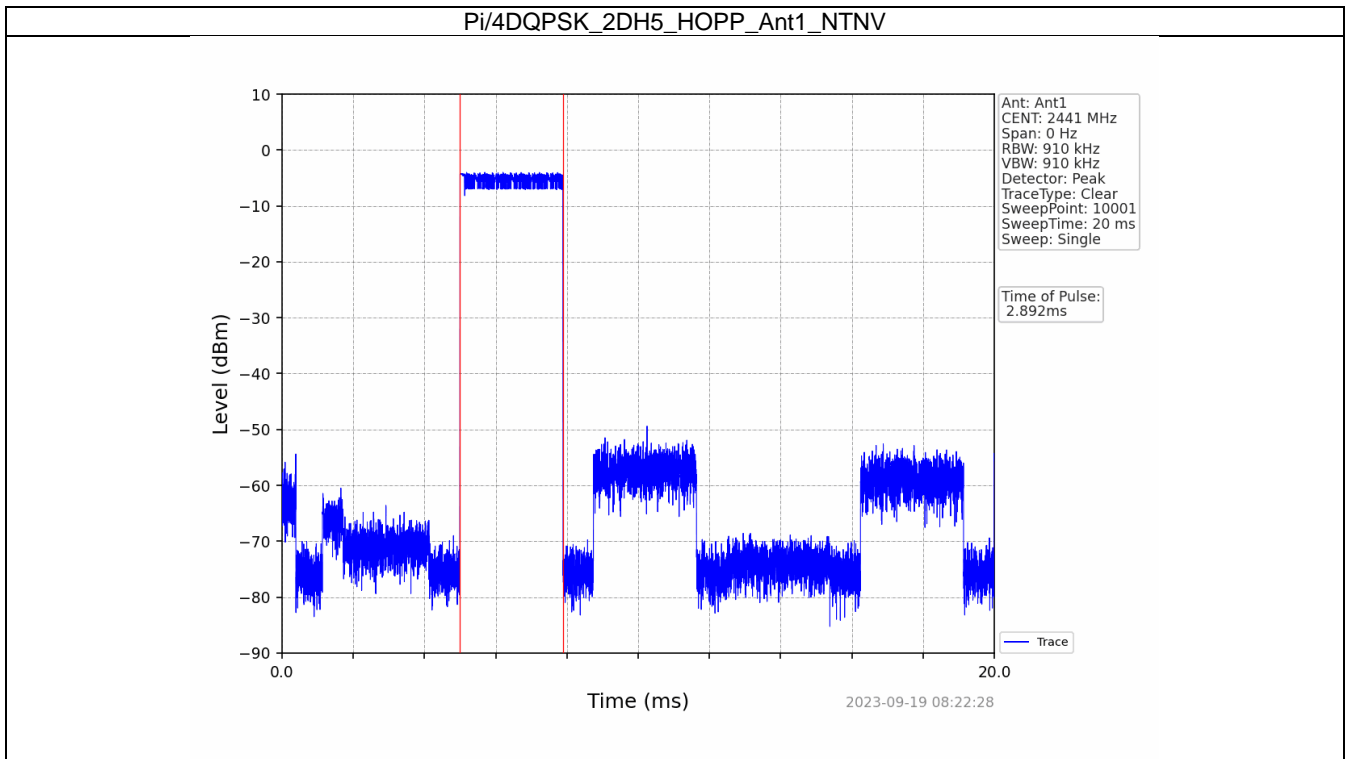

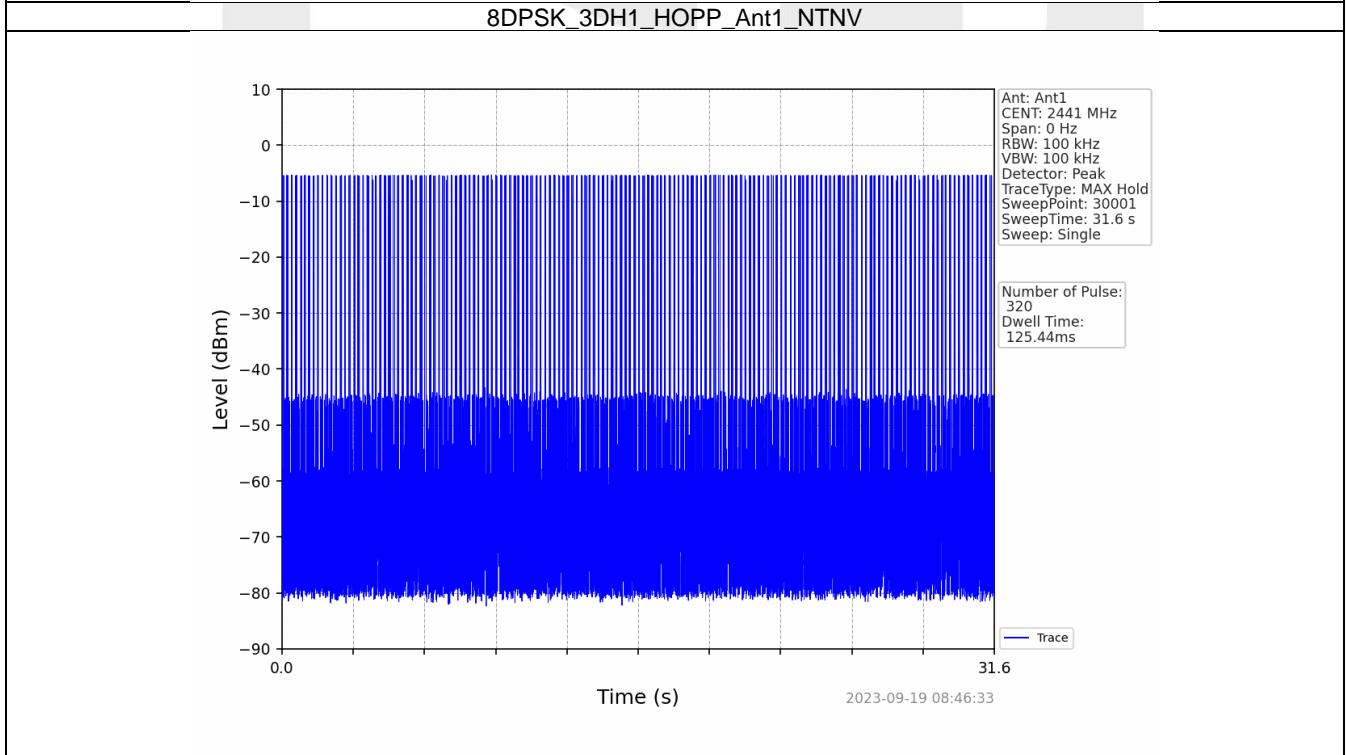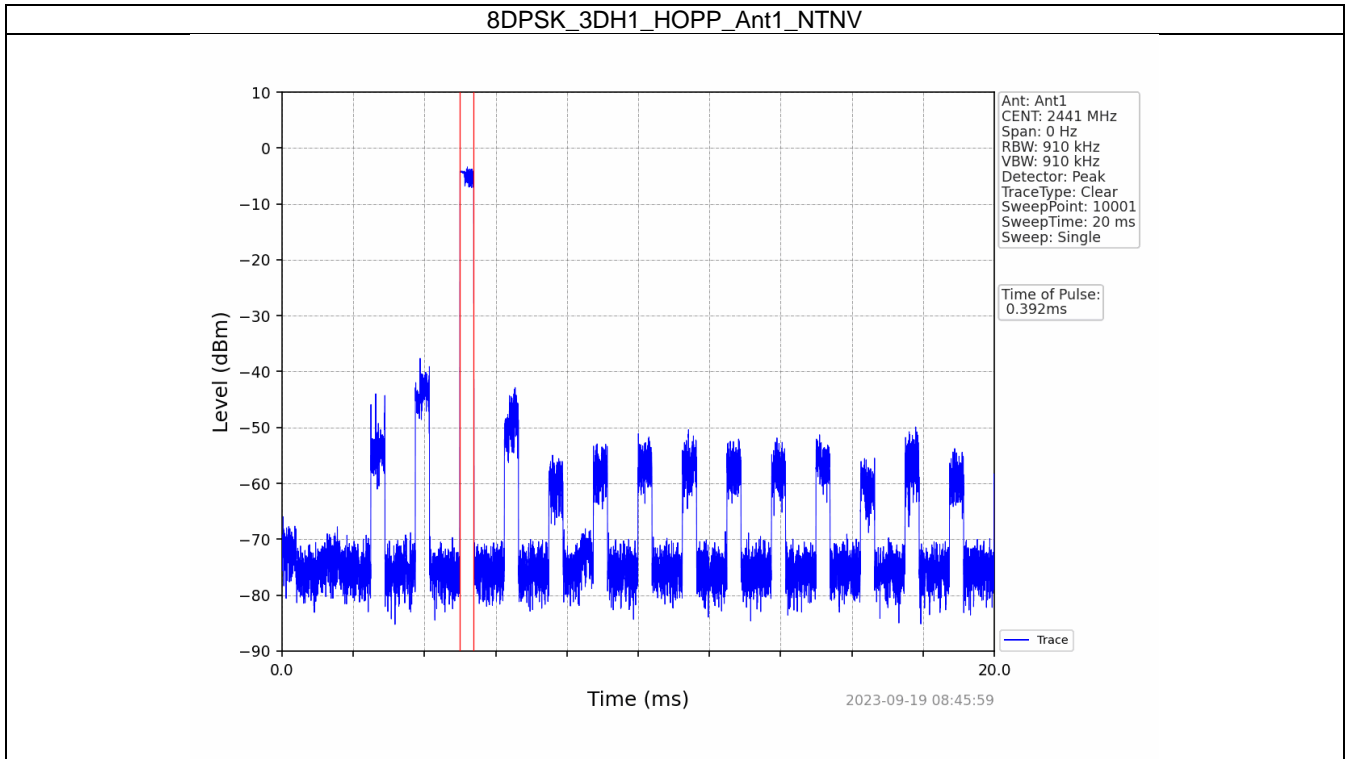

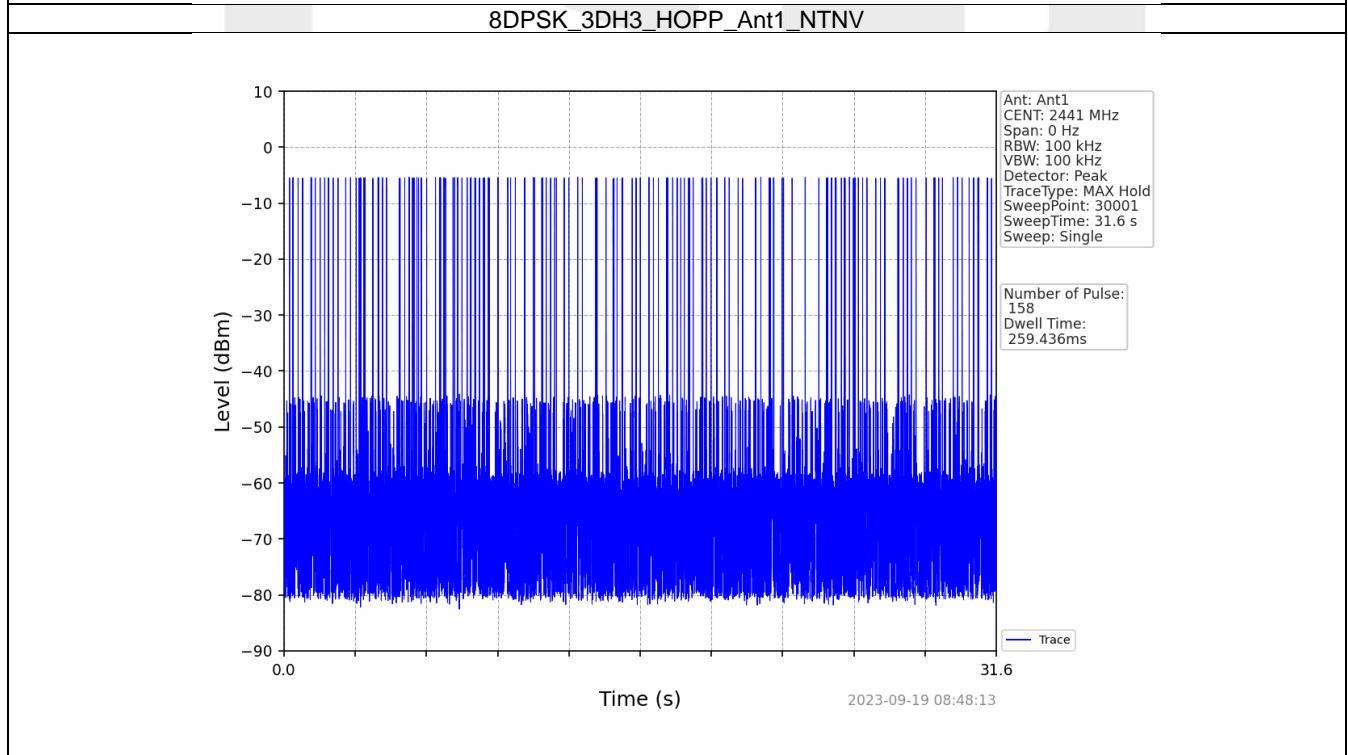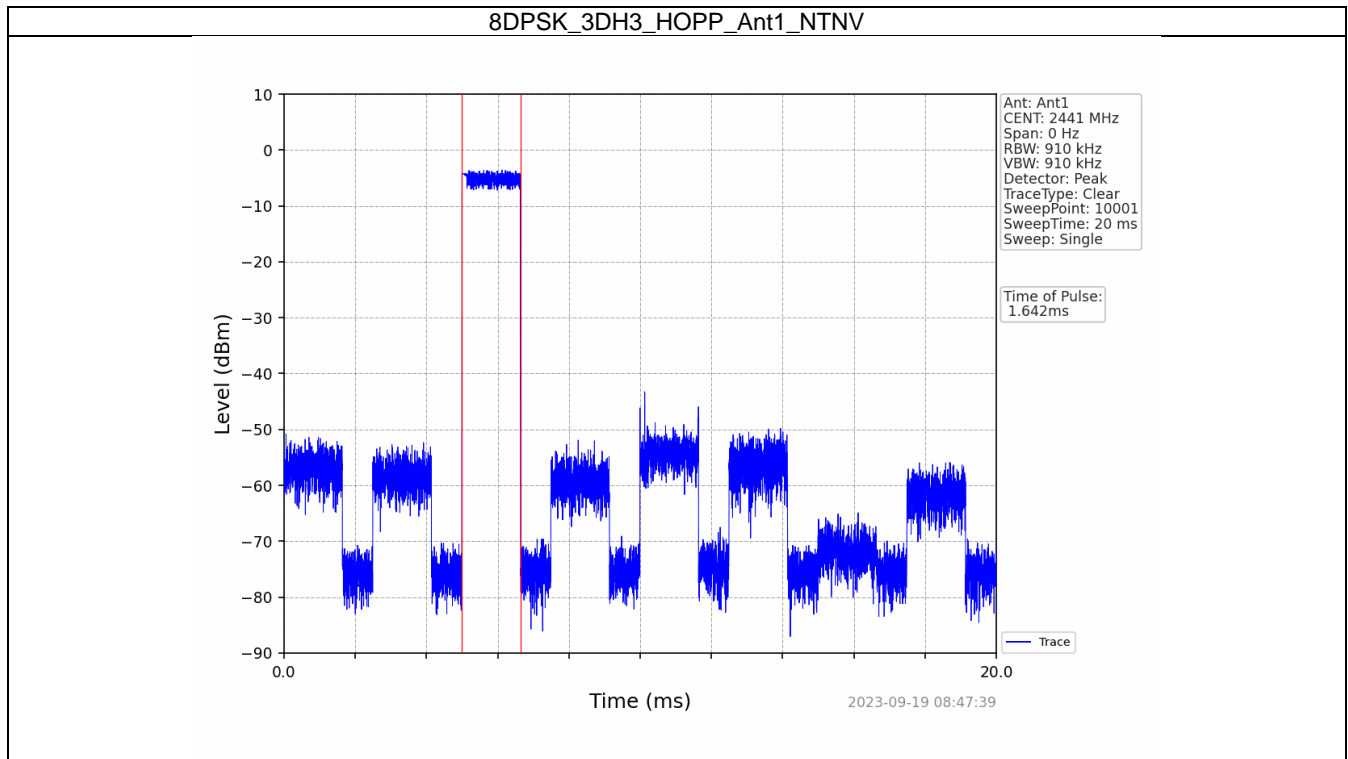

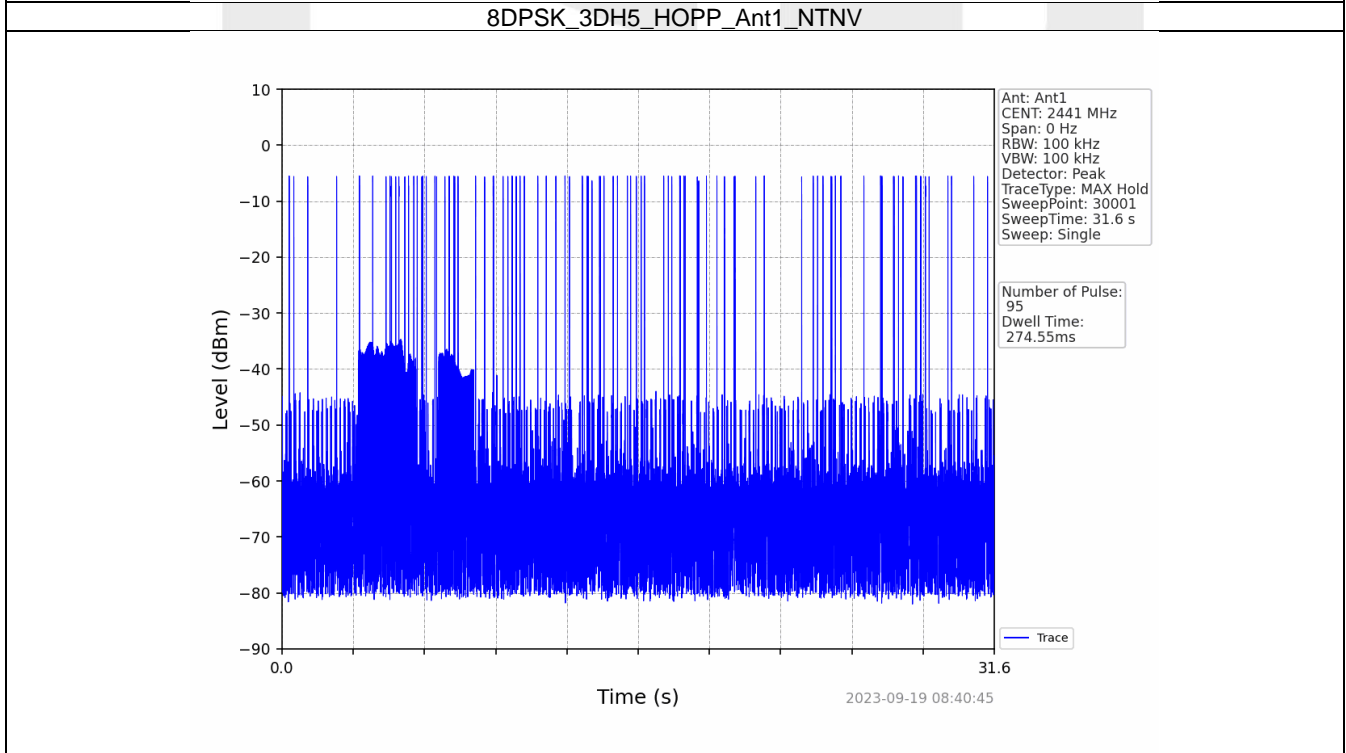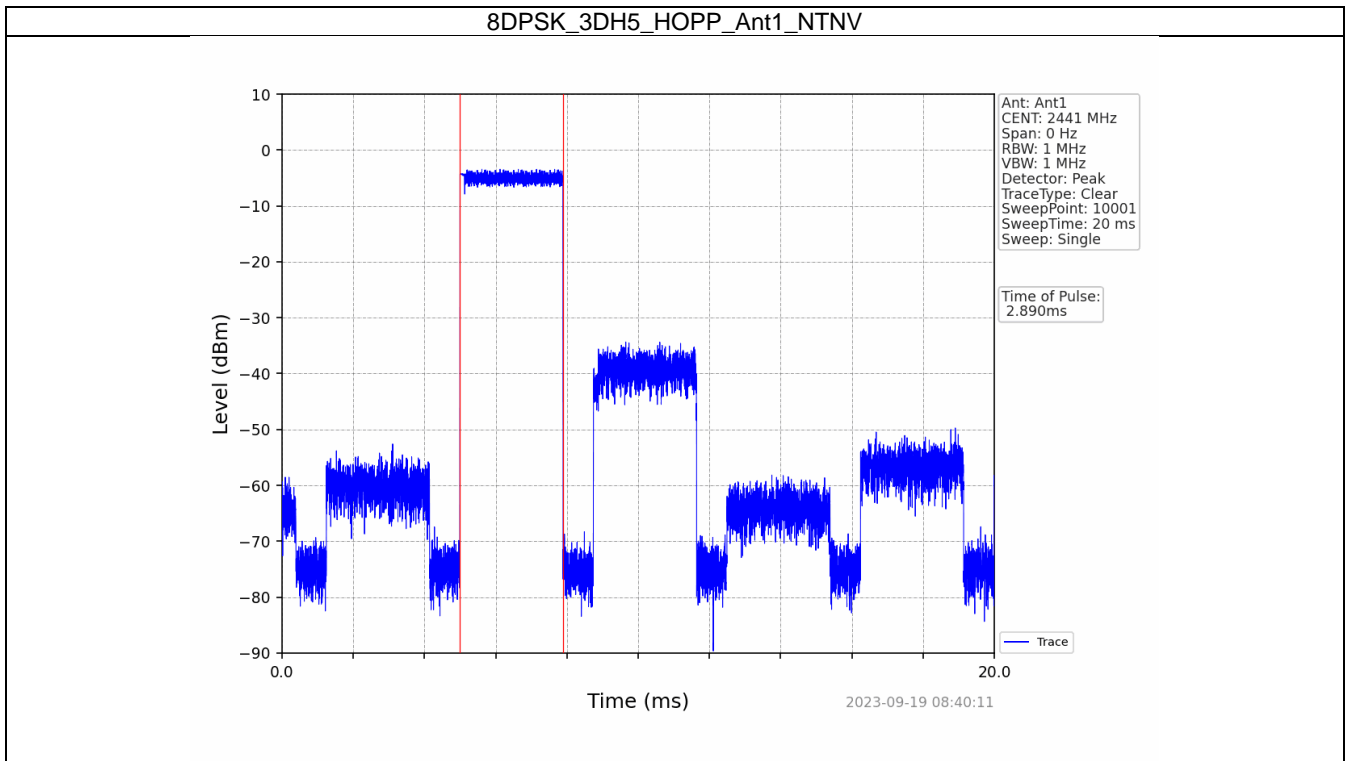

7. Unwanted Emissions In Non-restricted Frequency Bands


7.1 Ref



7.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-3.88
		2441	DH5	1	-4.20
		2480	DH5	1	-4.31
Pi/4DQPSK	SISO	2402	2DH5	1	-3.92
		2441	2DH5	1	-4.26
		2480	2DH5	1	-4.38
8DPSK	SISO	2402	3DH5	1	-3.91
		2441	3DH5	1	-4.22
		2480	3DH5	1	-4.35



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.1.2 Test Graph

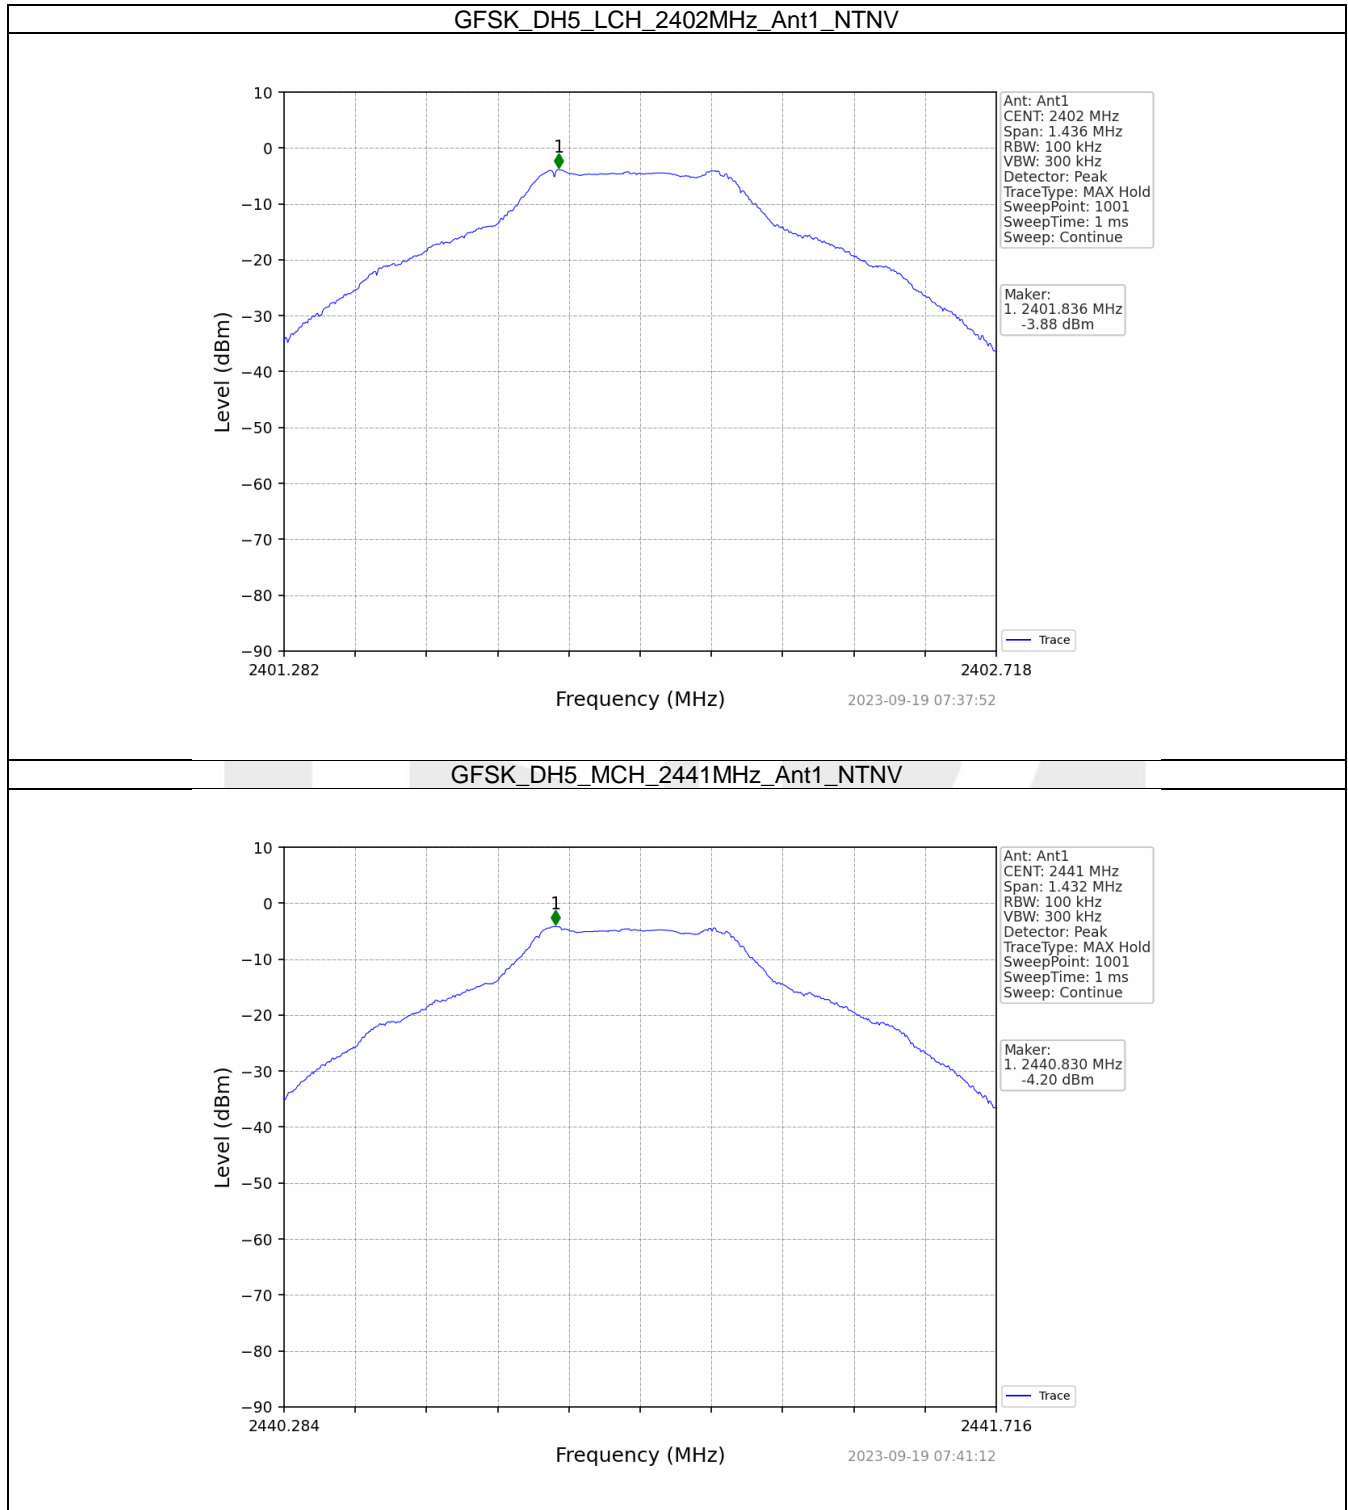

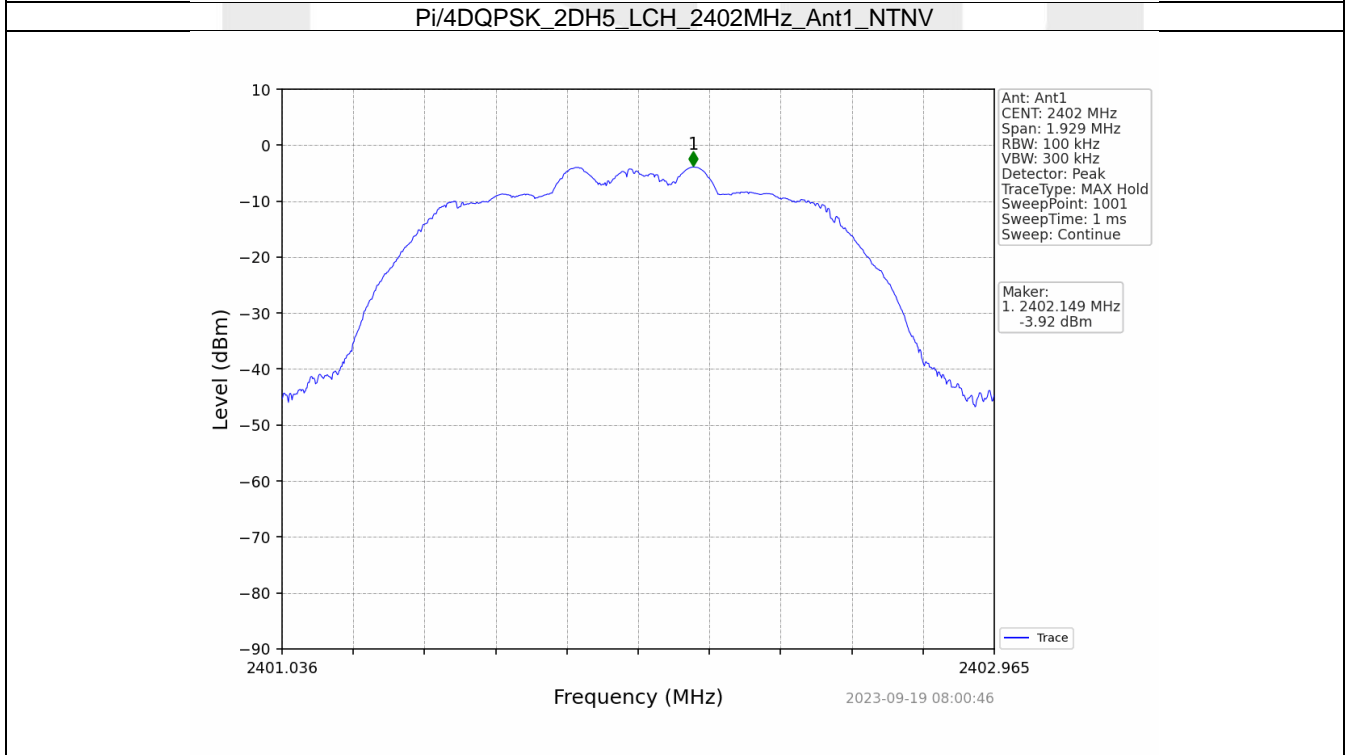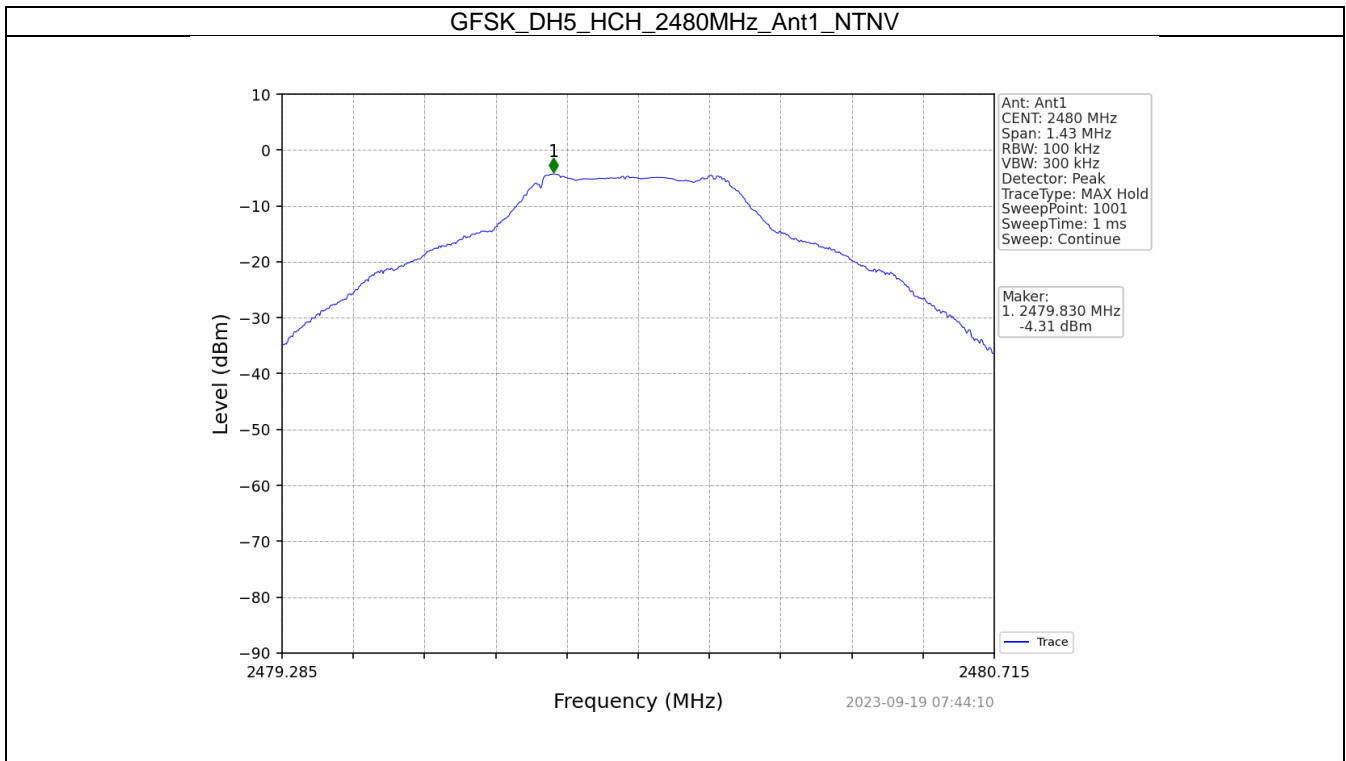

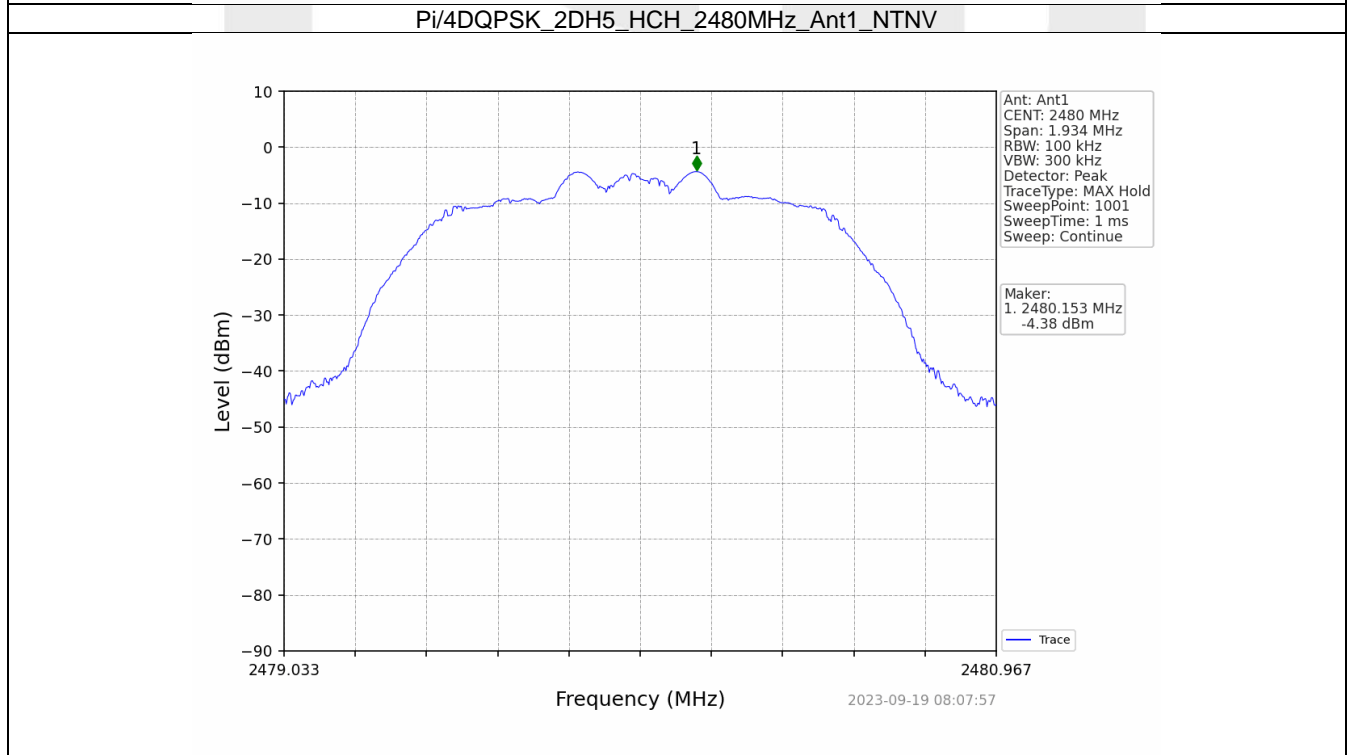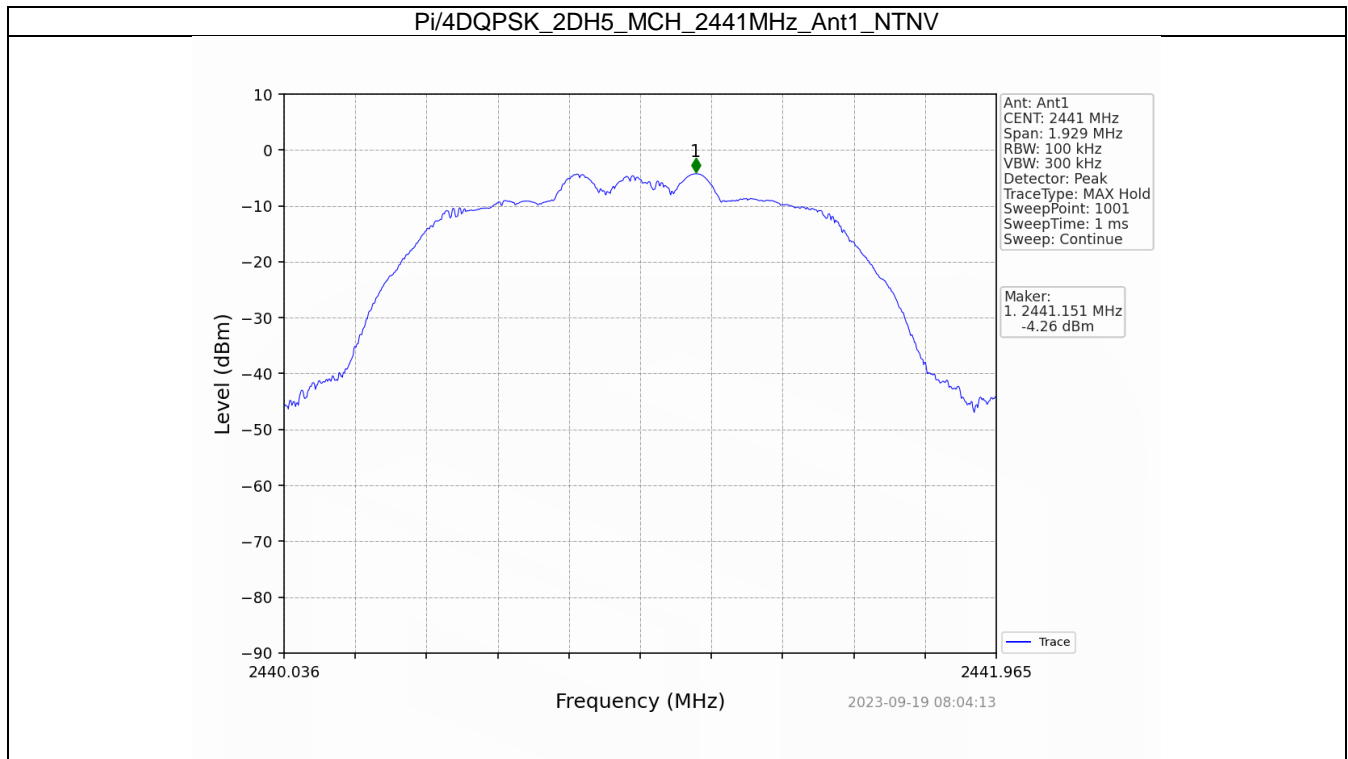

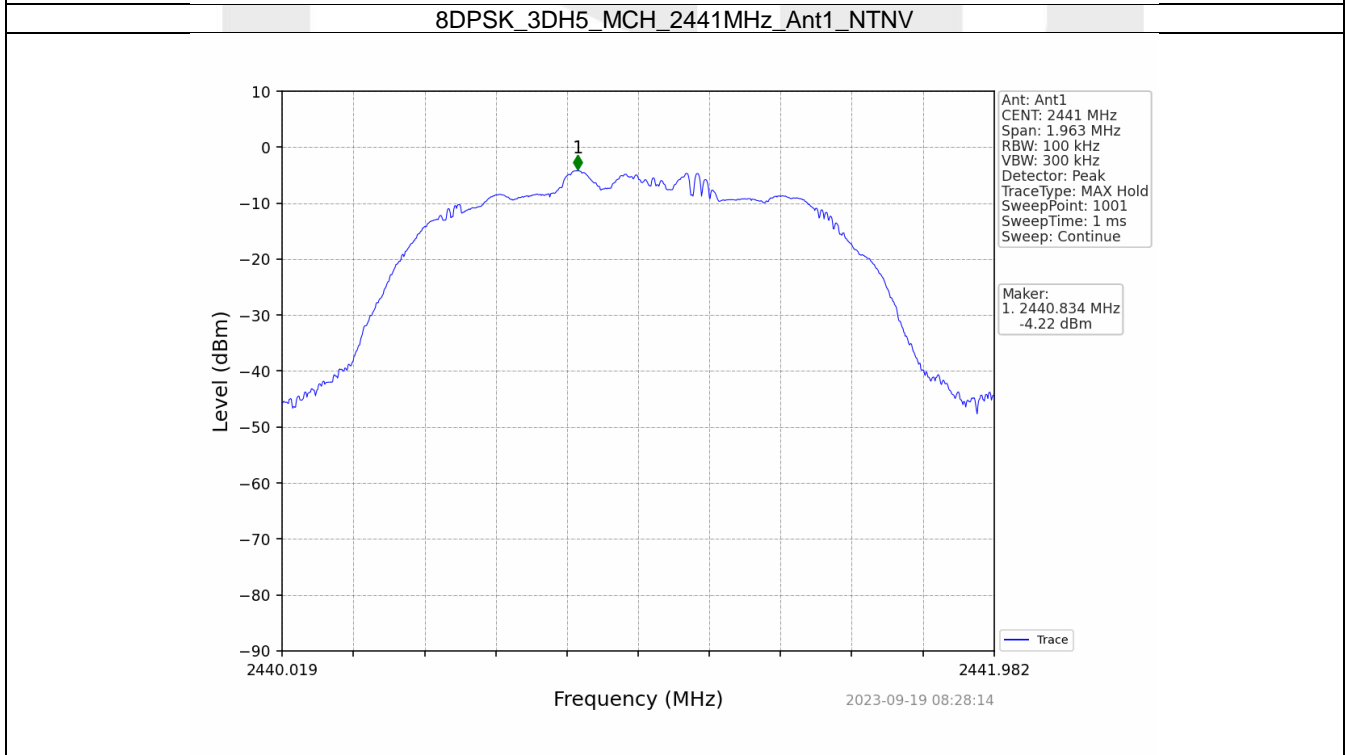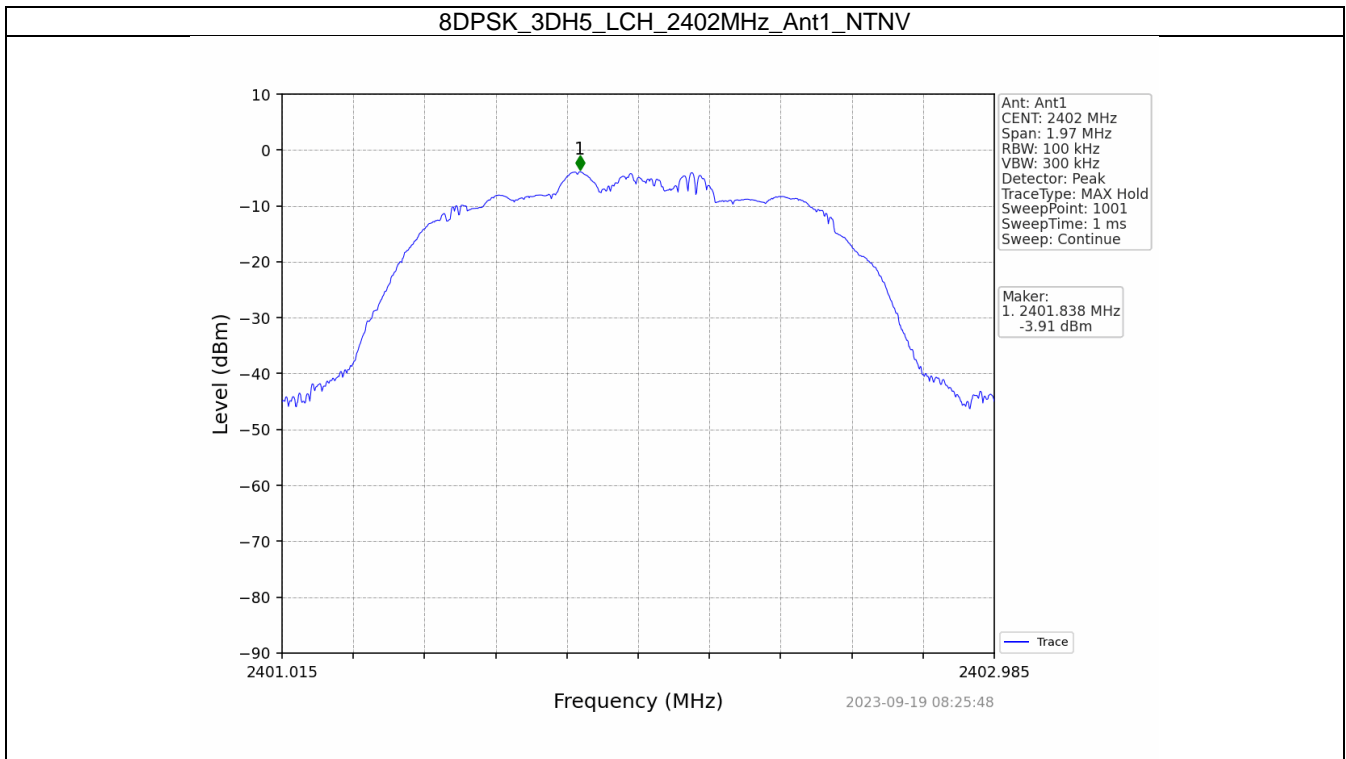

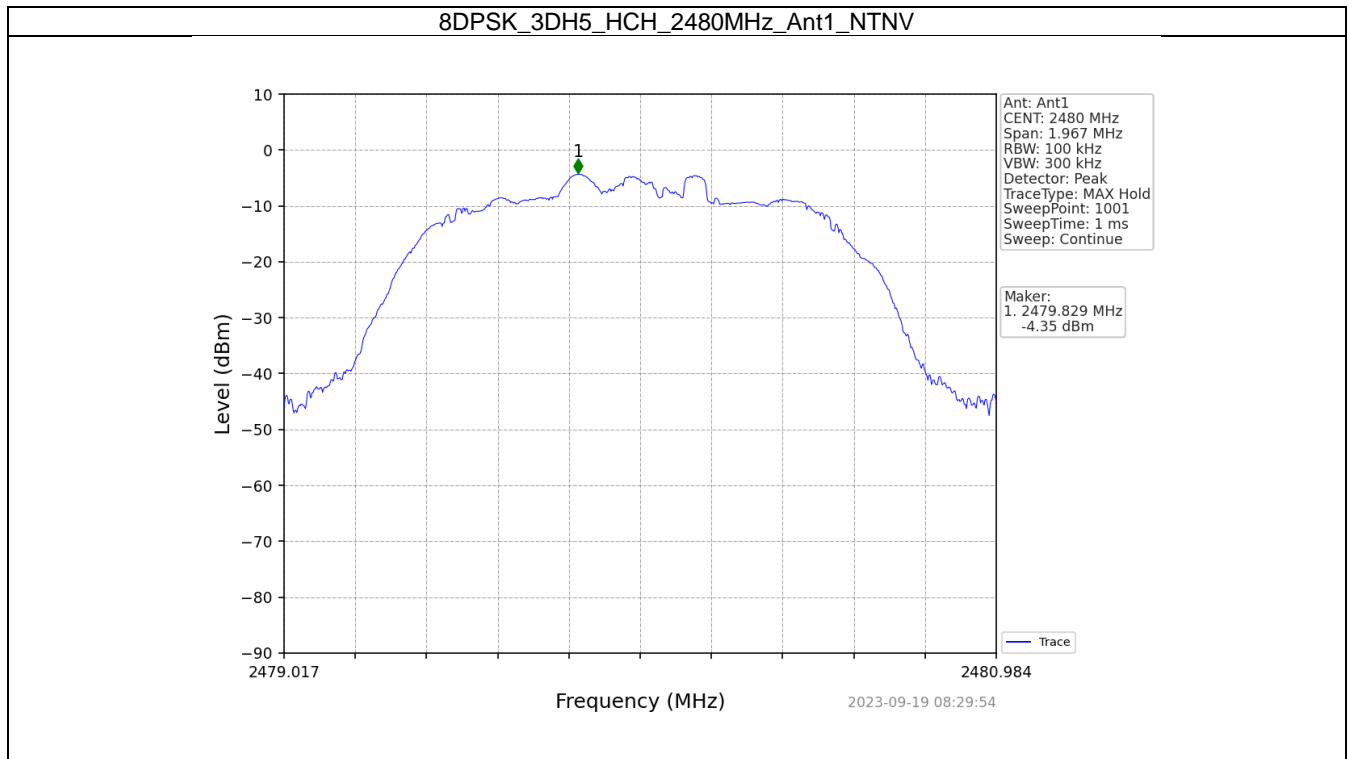


7.2 CSE



7.2.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-3.88	-23.88	Pass
		2441	DH5	1	-3.88	-23.88	Pass
		2480	DH5	1	-3.88	-23.88	Pass
		HOPP	DH5	1	-3.88	-23.88	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-3.92	-23.92	Pass
		2441	2DH5	1	-3.92	-23.92	Pass
		2480	2DH5	1	-3.92	-23.92	Pass
		HOPP	2DH5	1	-3.92	-23.92	Pass
8DPSK	SISO	2402	3DH5	1	-3.91	-23.91	Pass
		2441	3DH5	1	-3.91	-23.91	Pass
		2480	3DH5	1	-3.91	-23.91	Pass
		HOPP	3DH5	1	-3.91	-23.91	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.



7.2.2 Test Graph


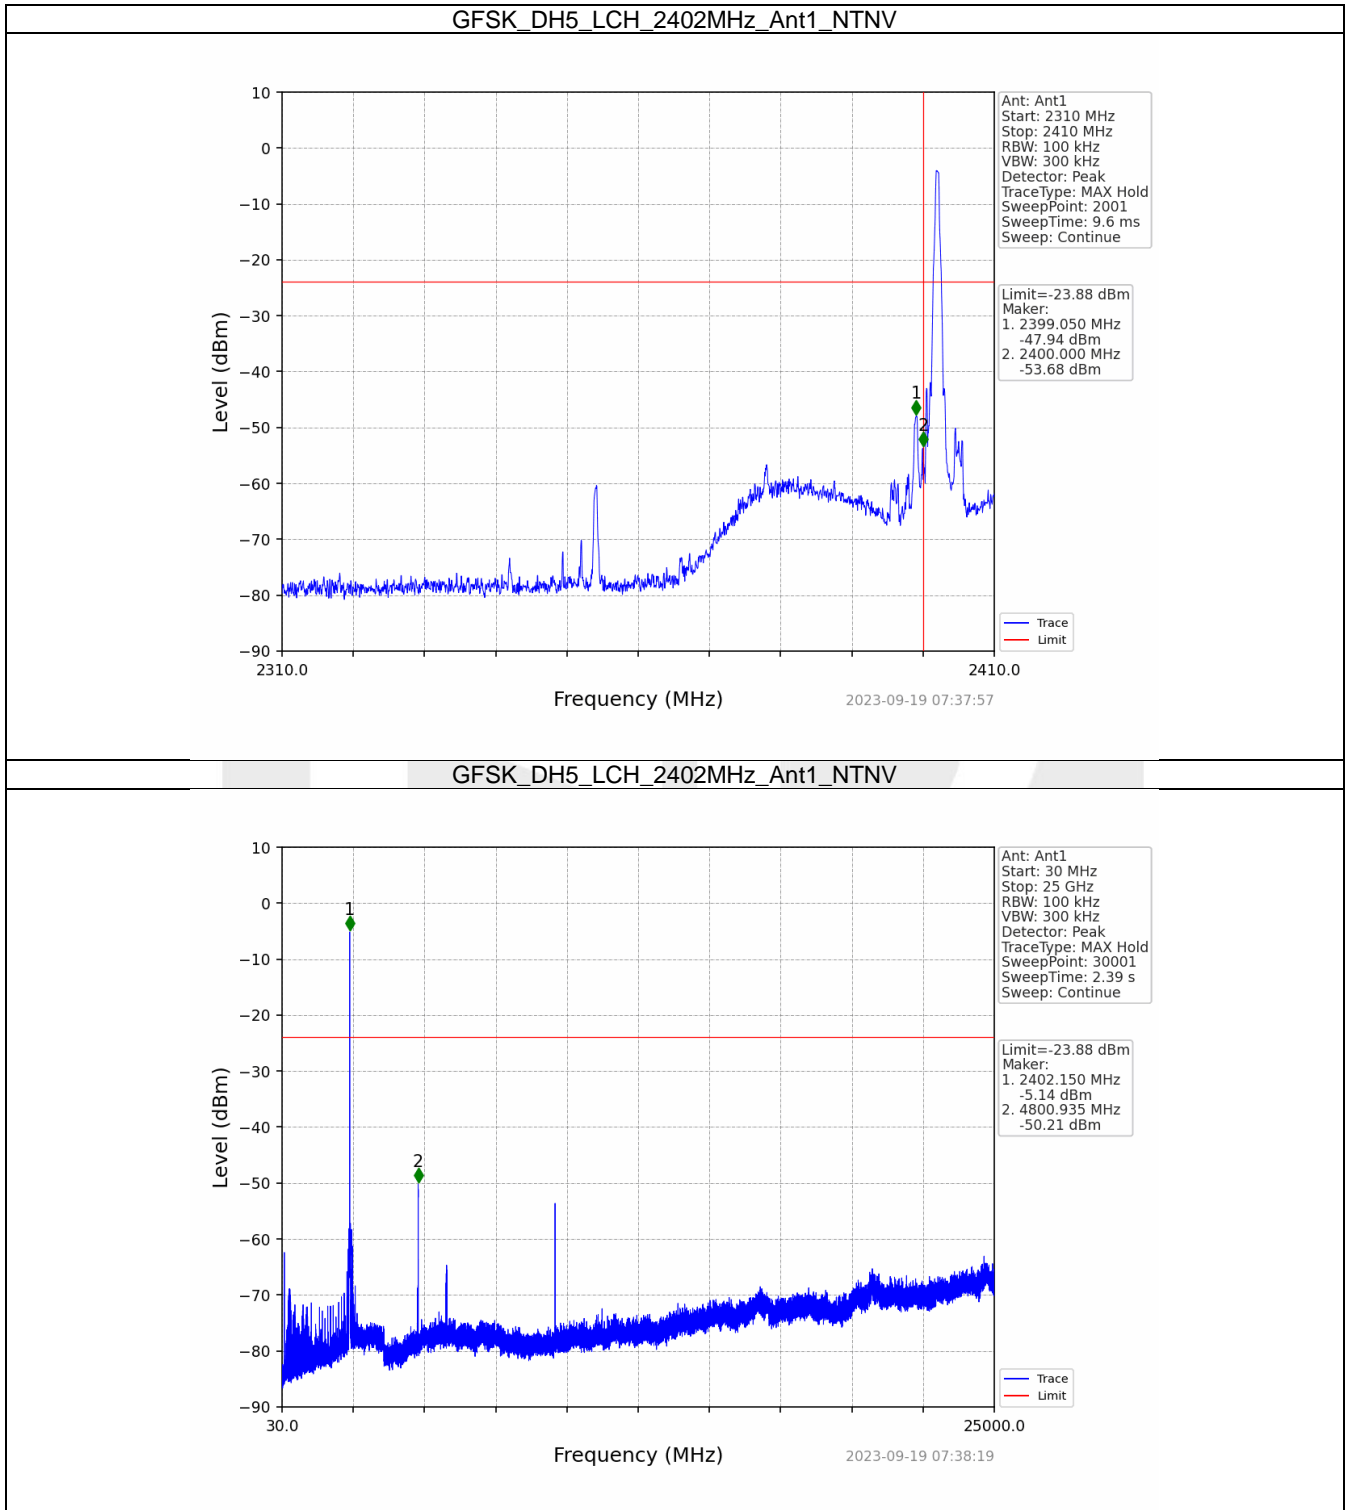


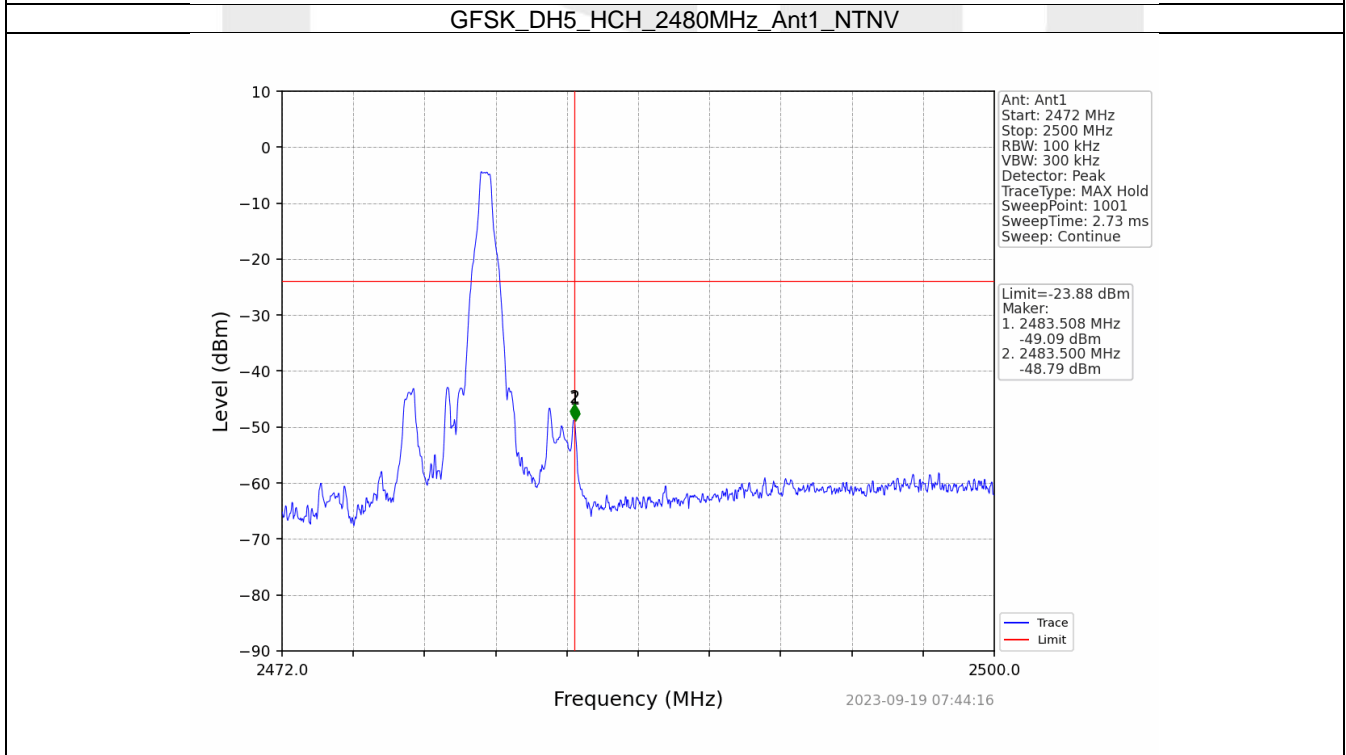
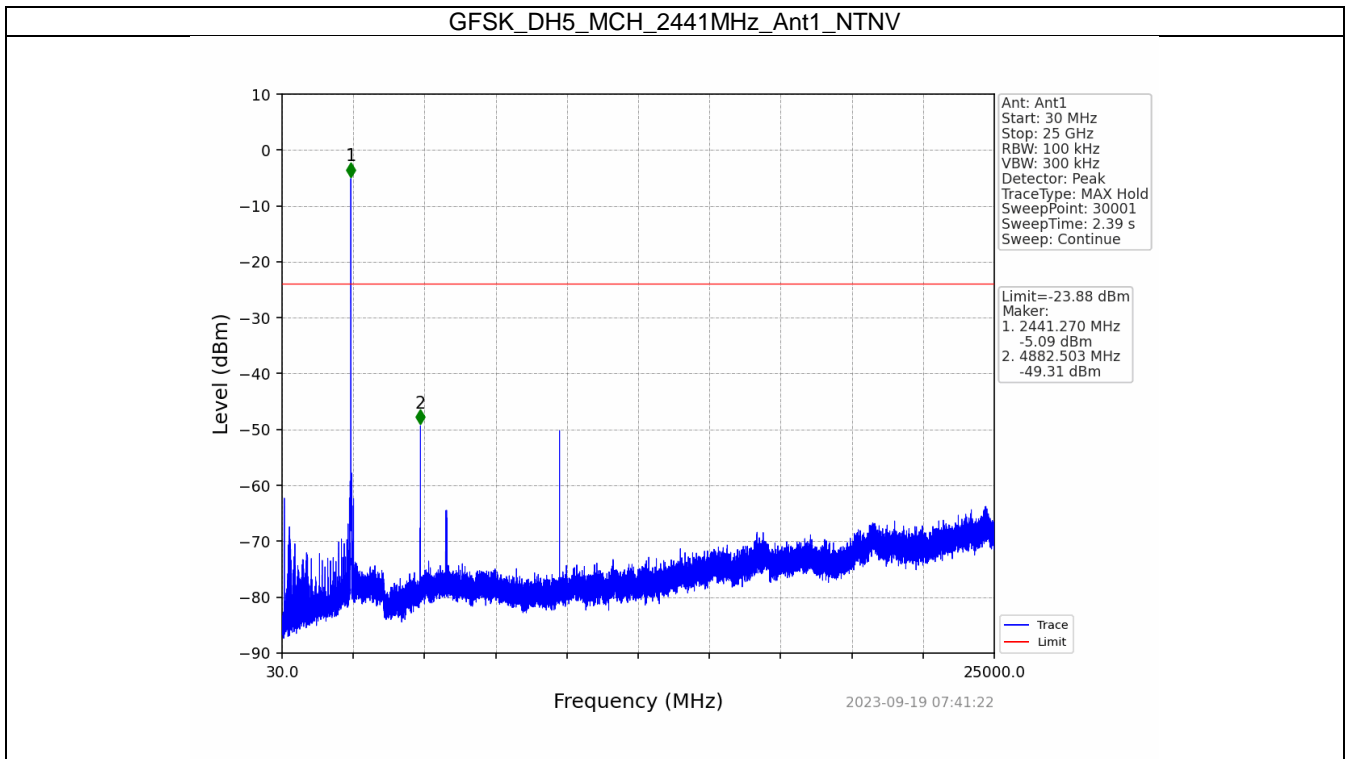


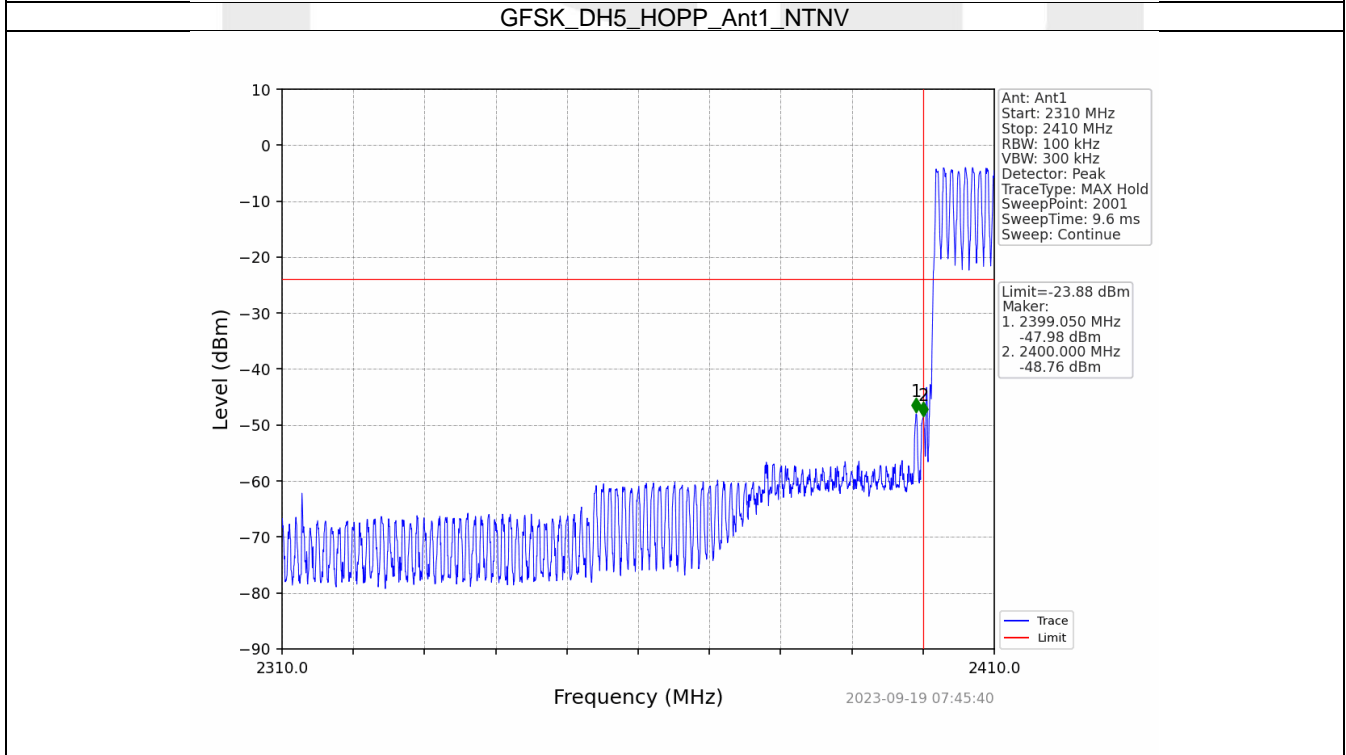
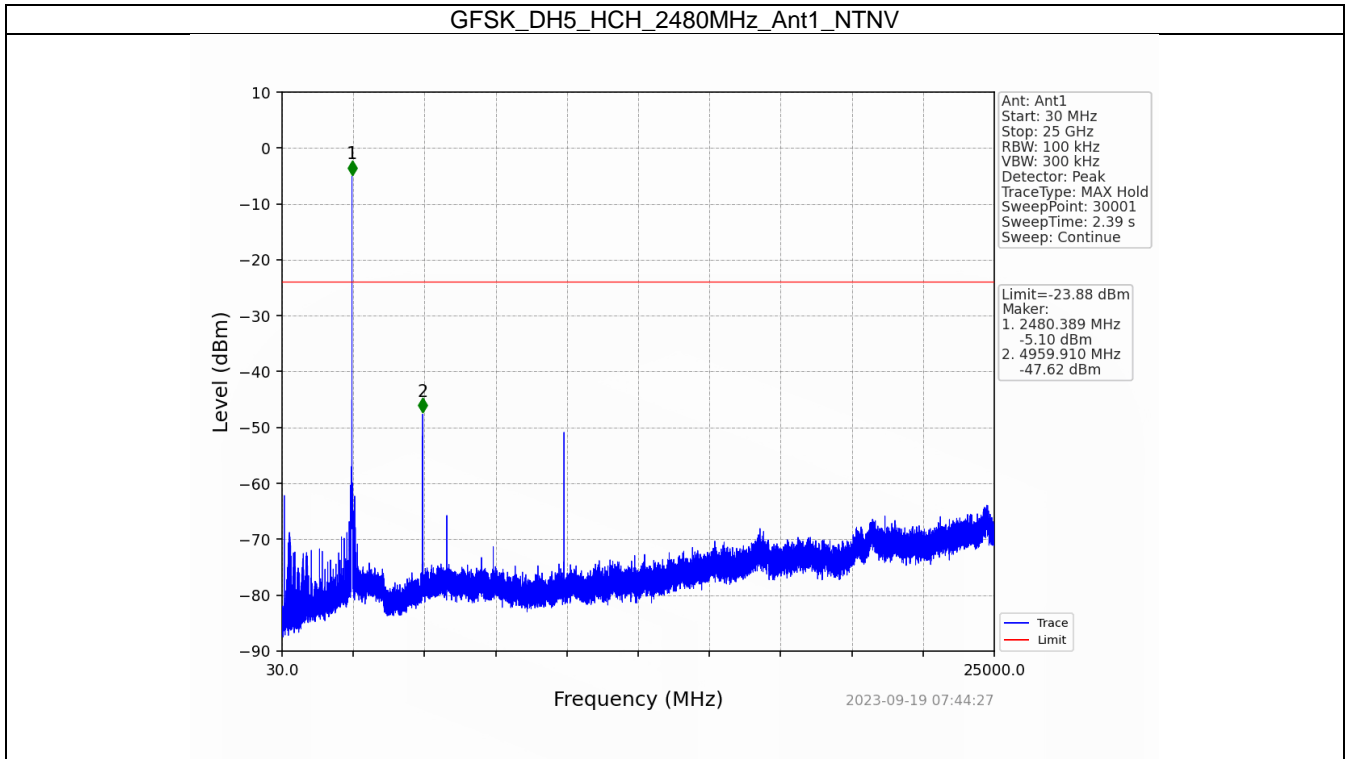


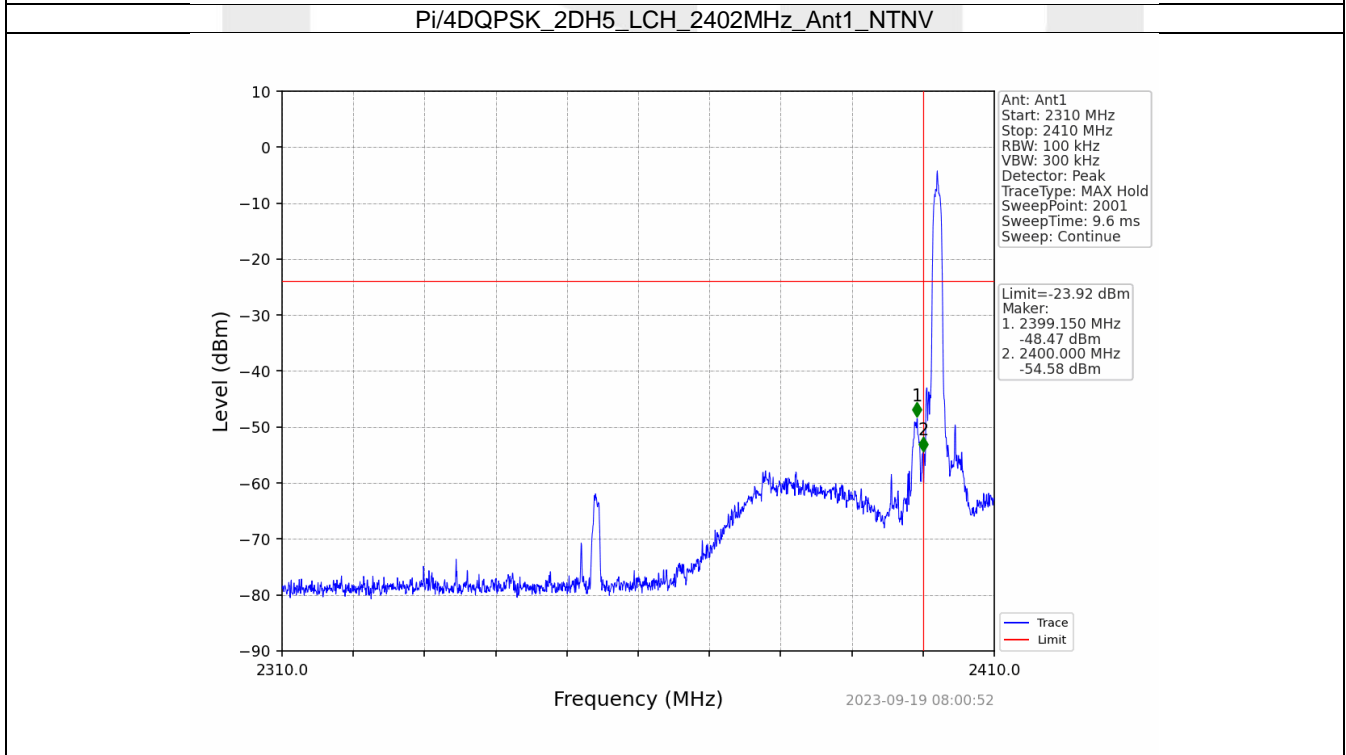
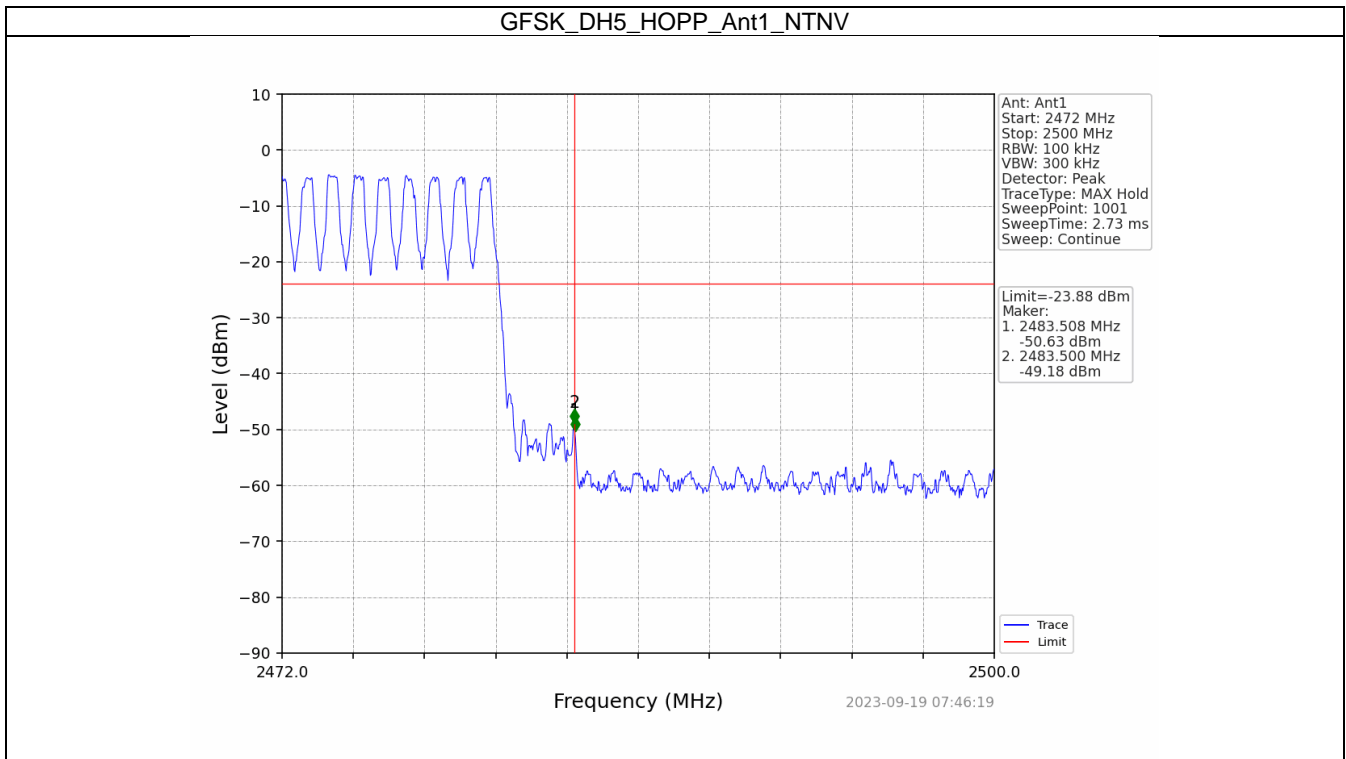


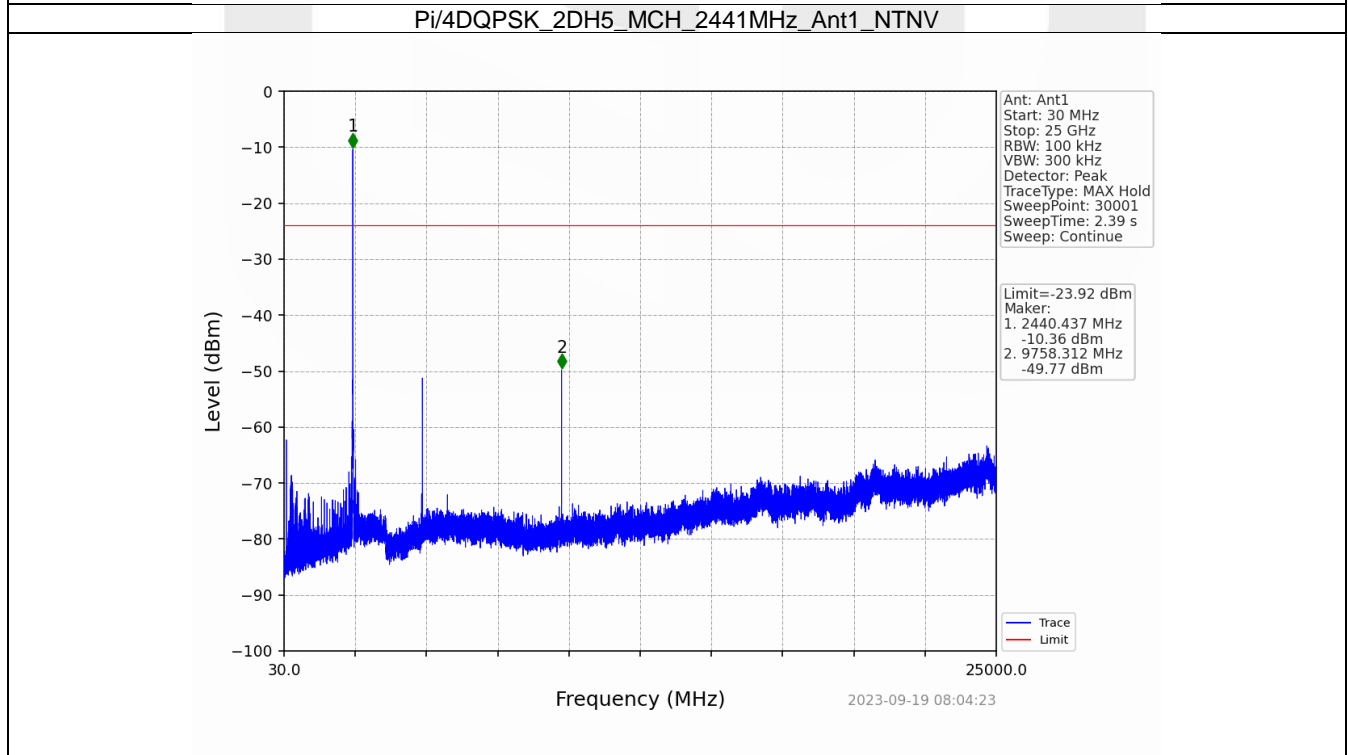
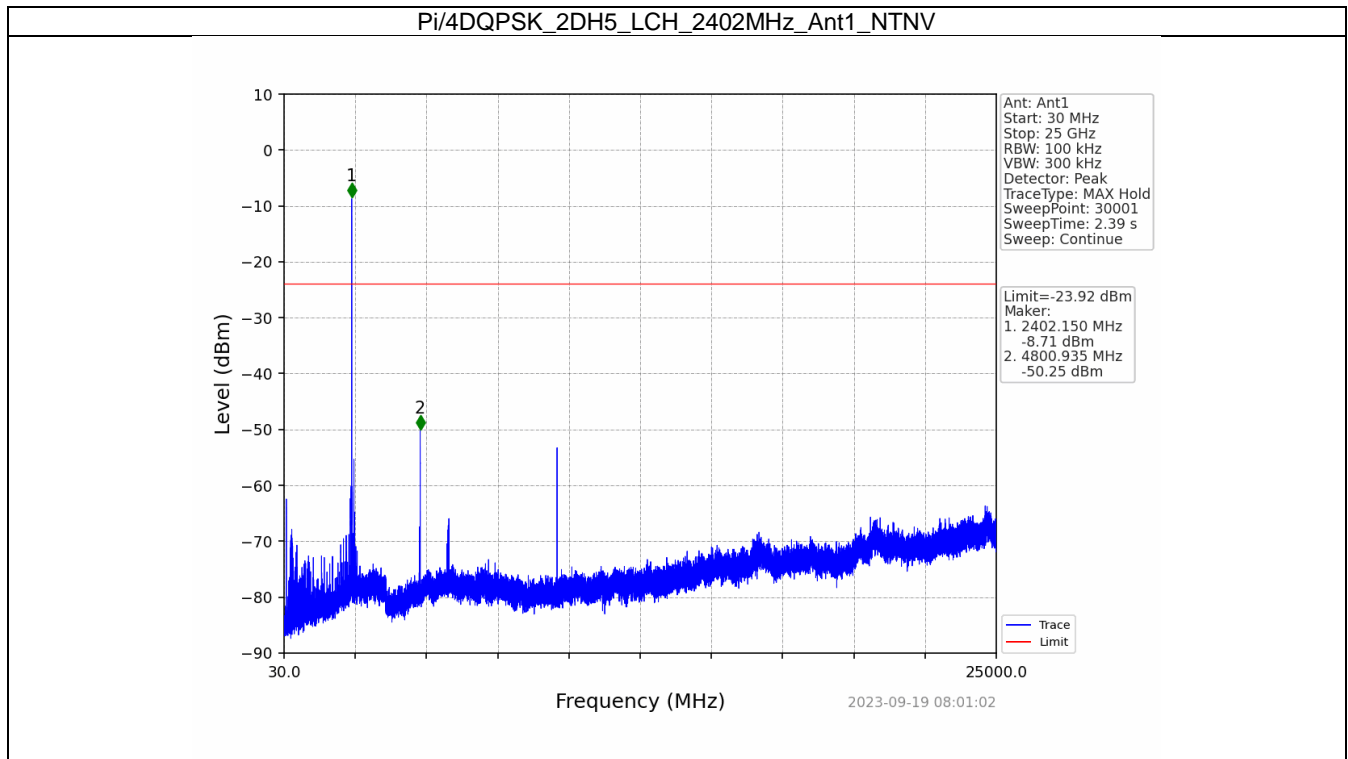


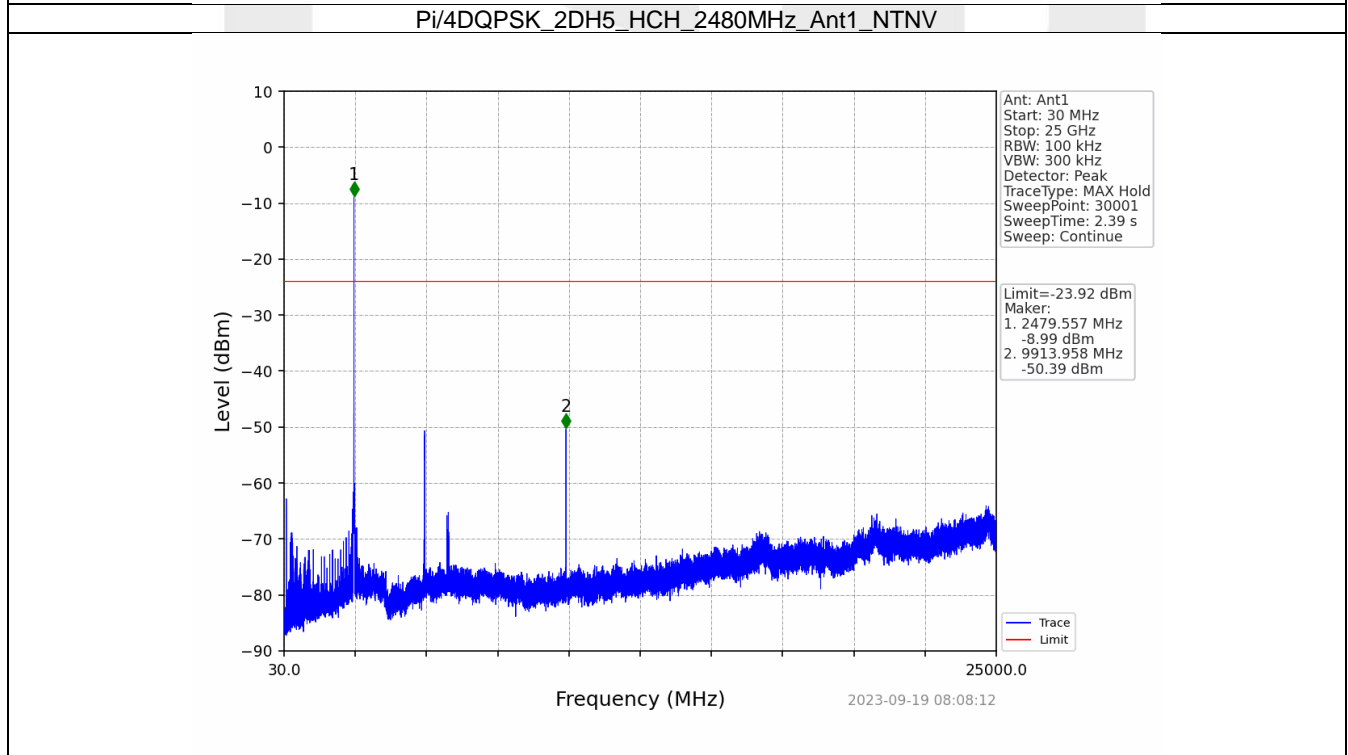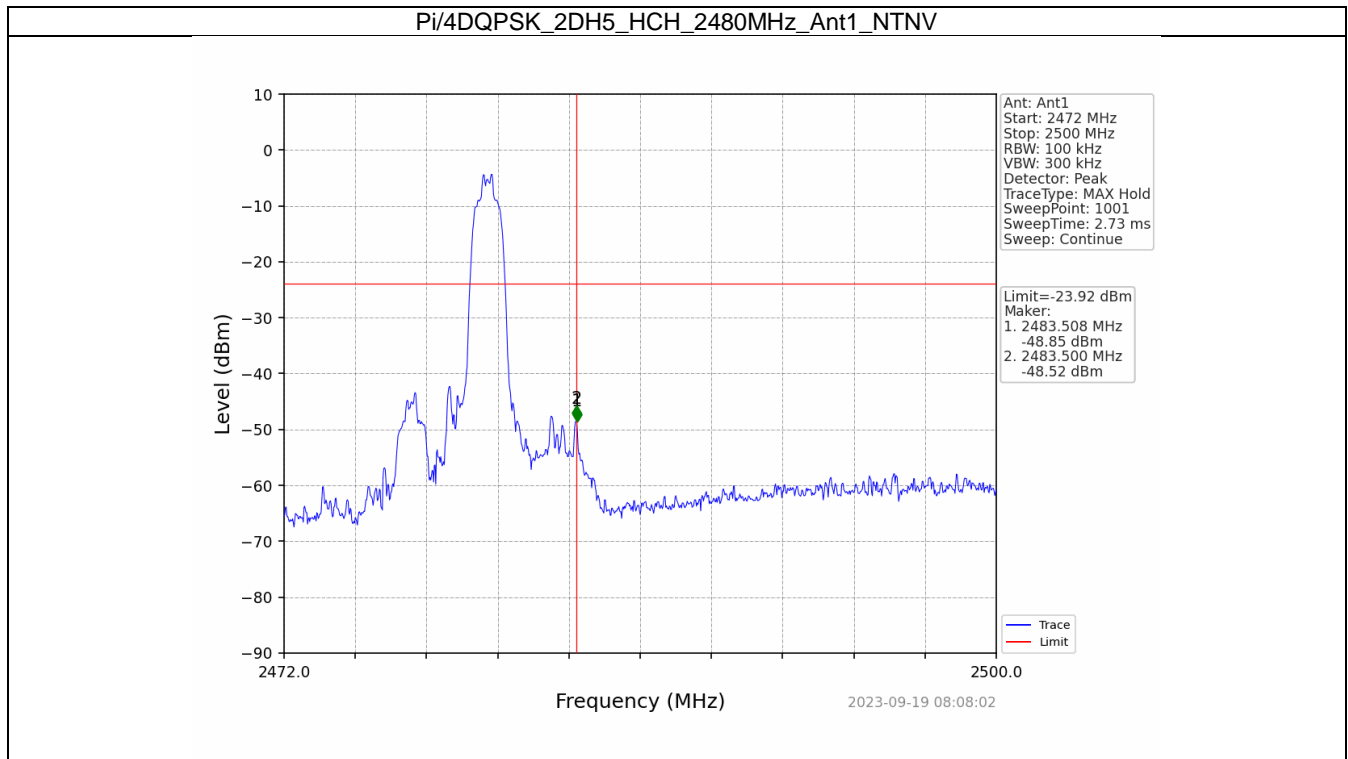


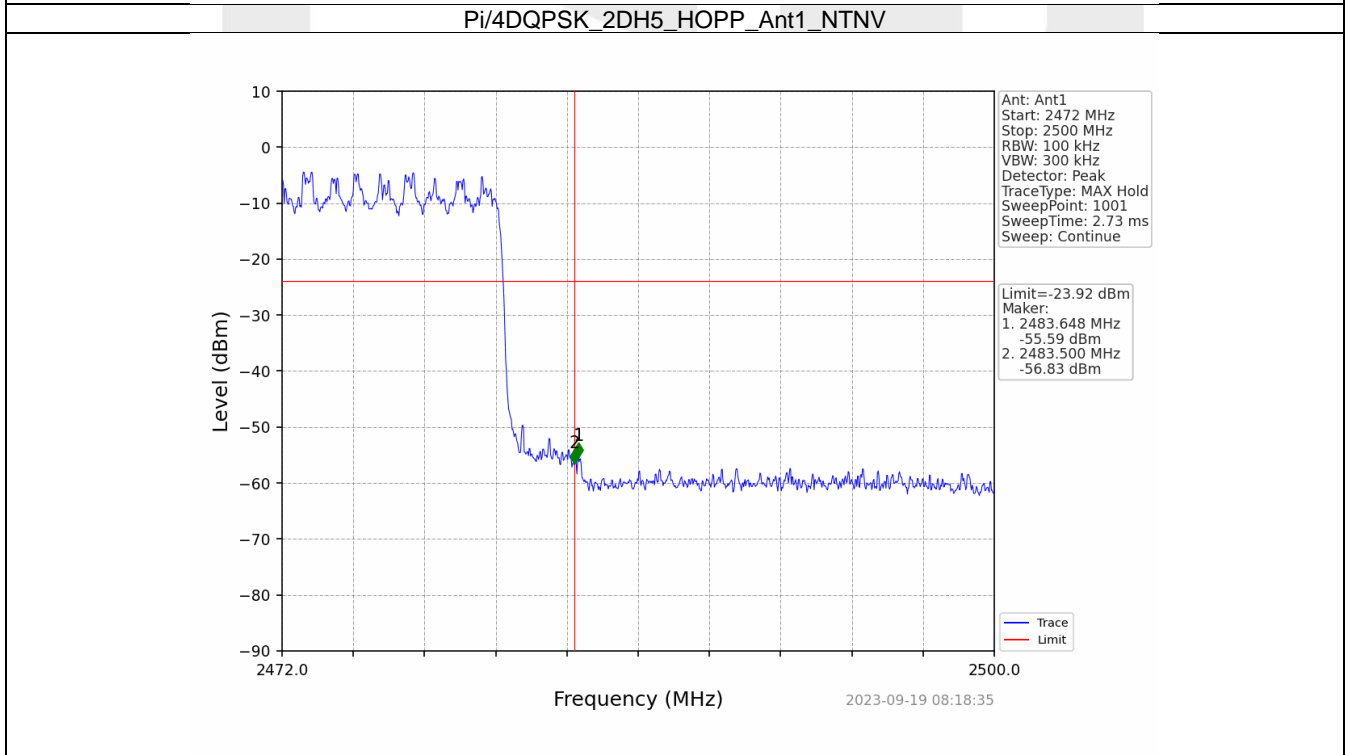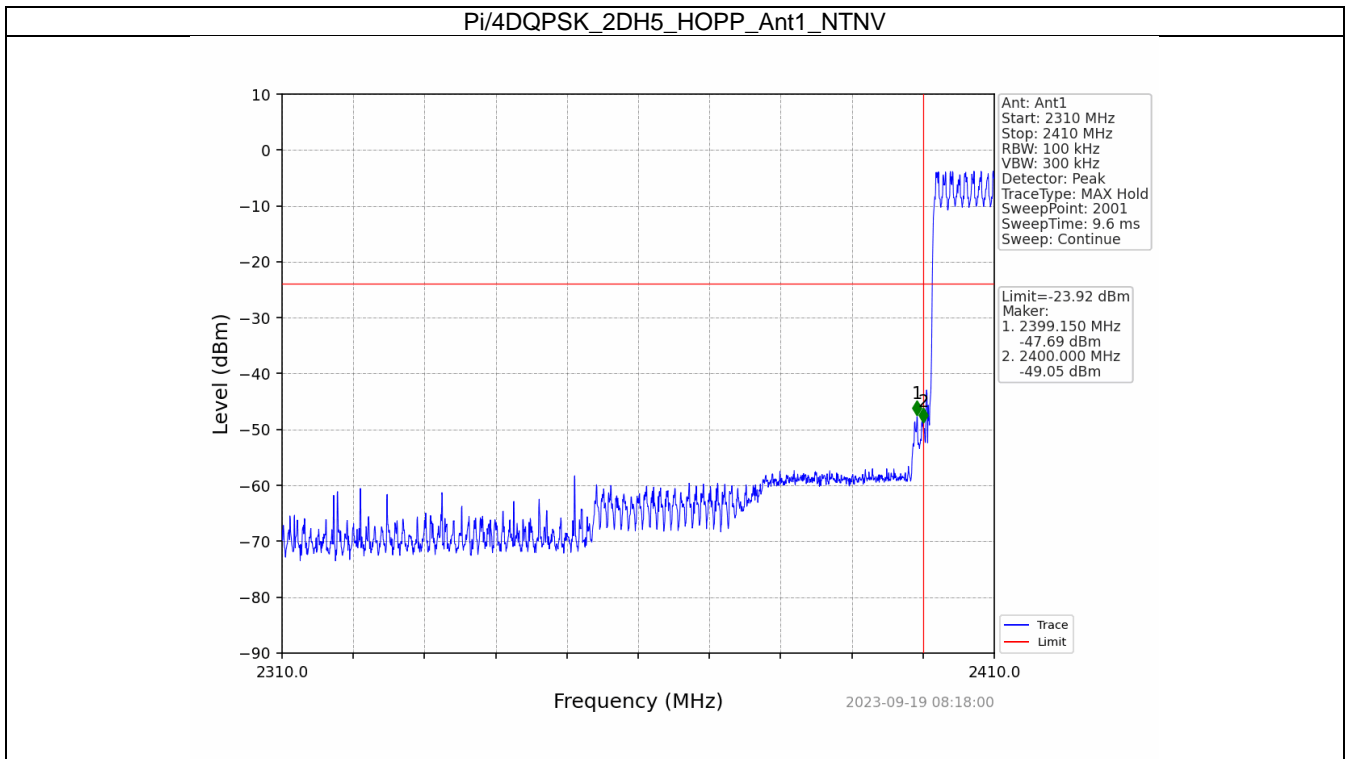

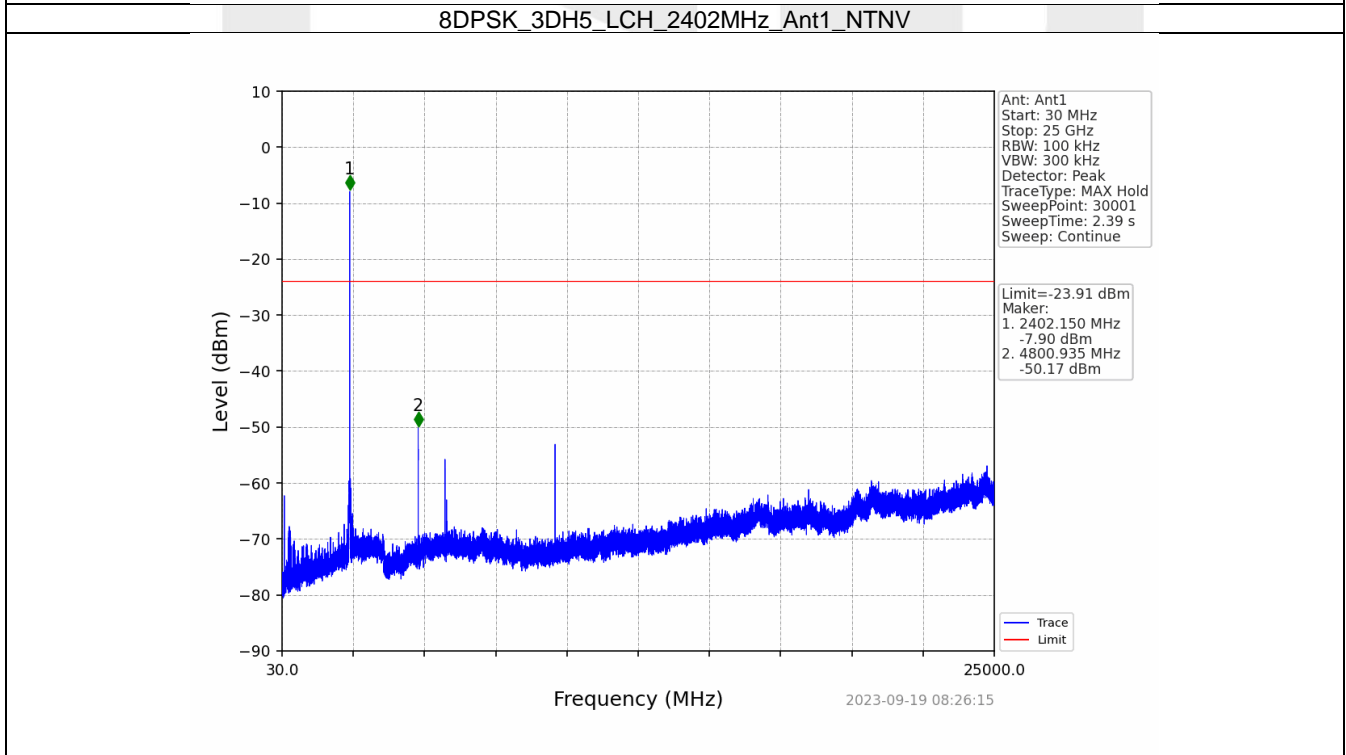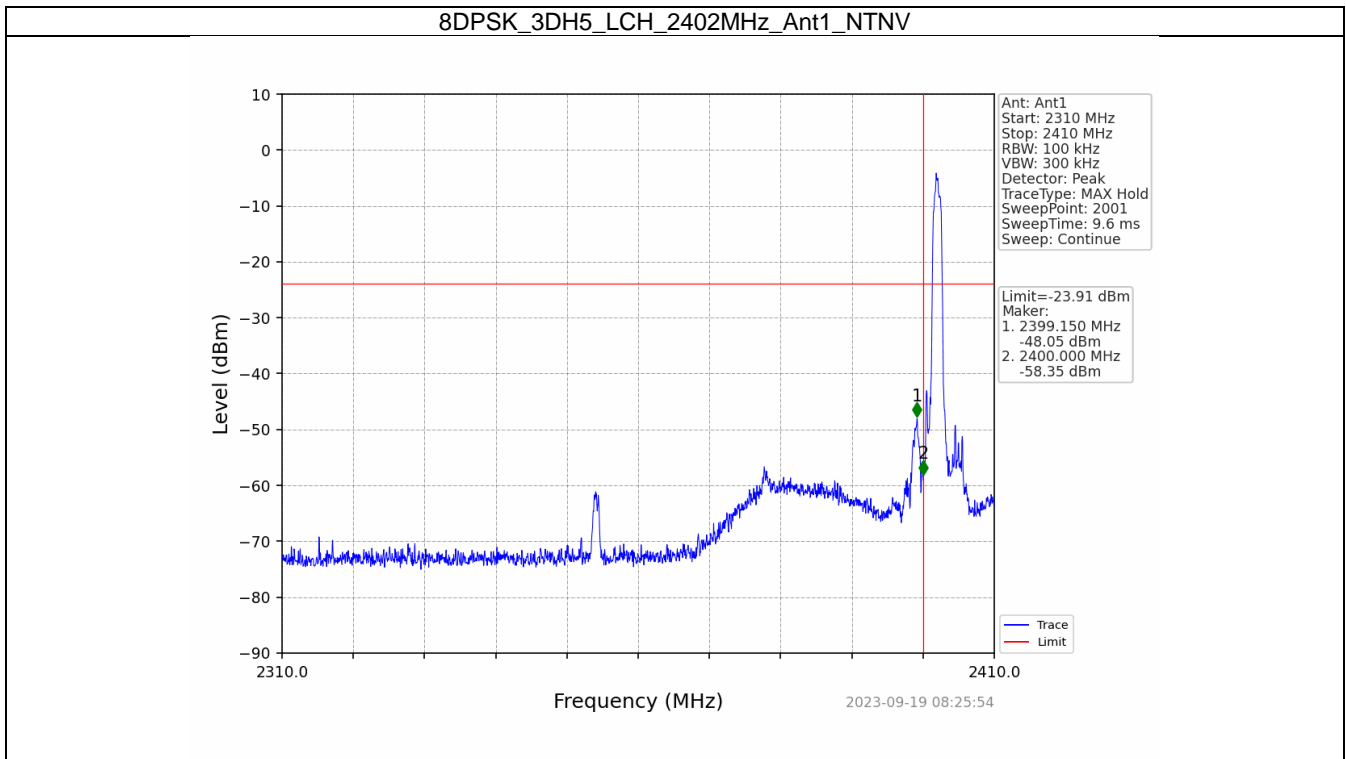

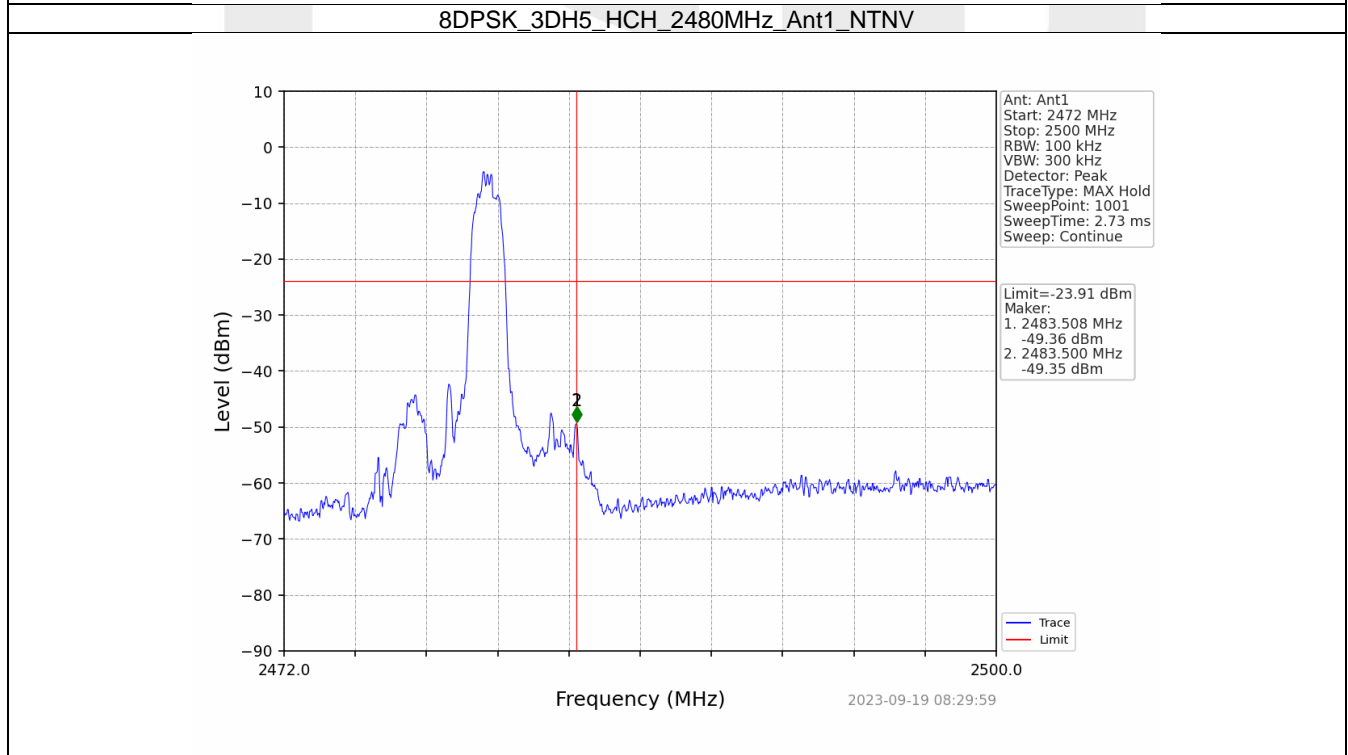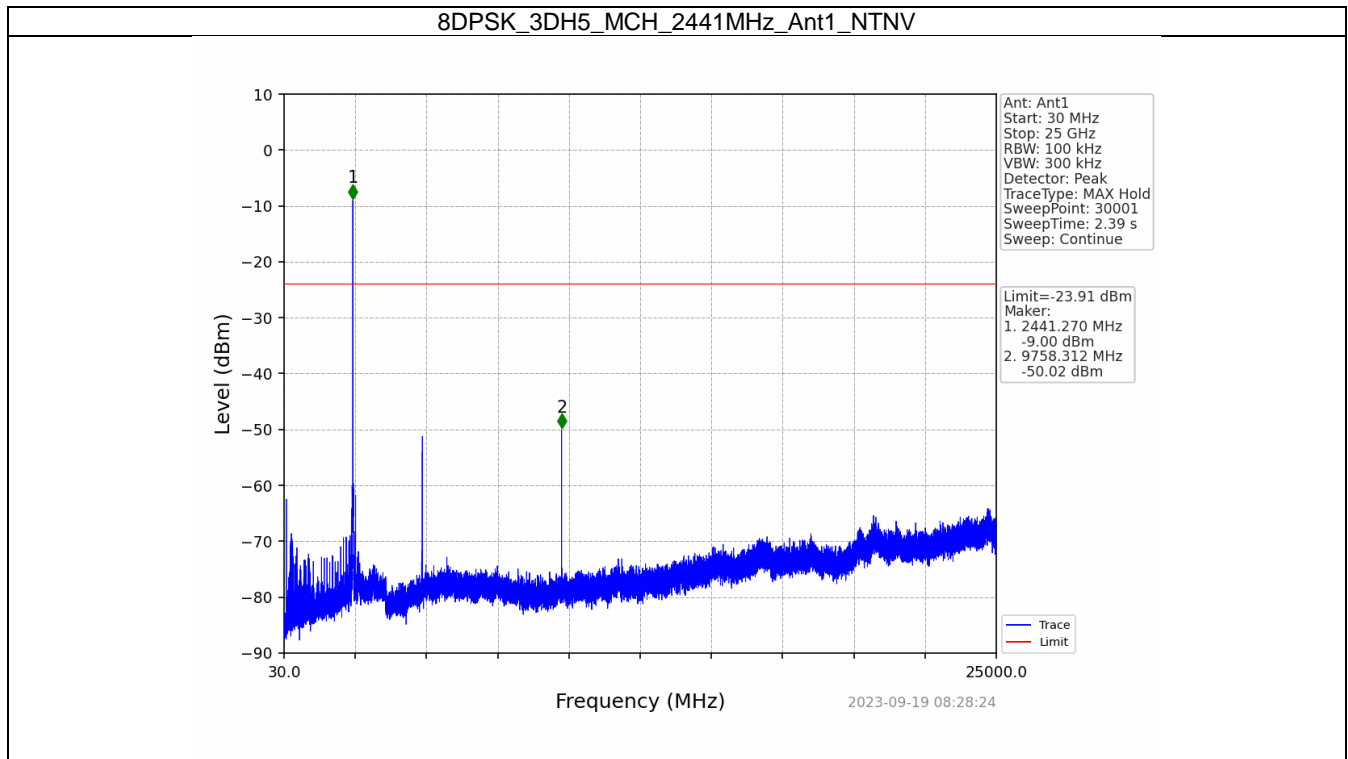

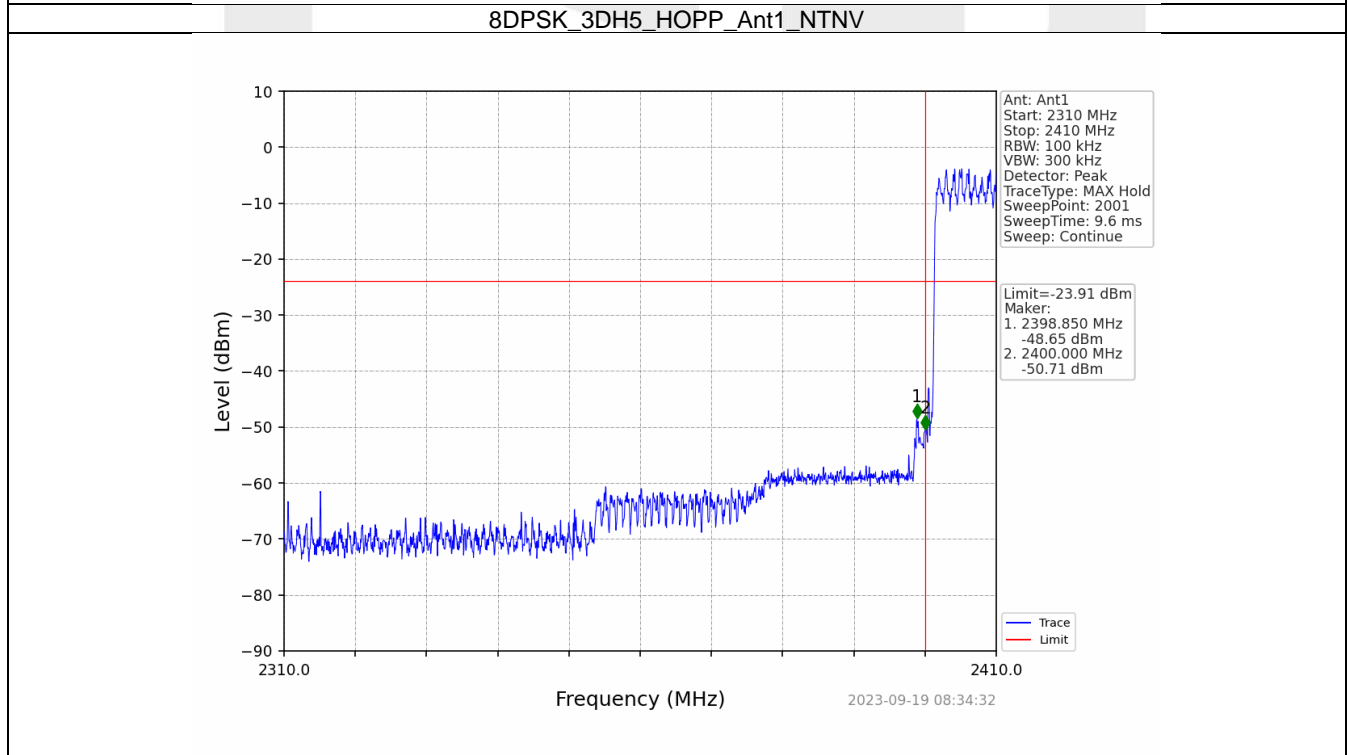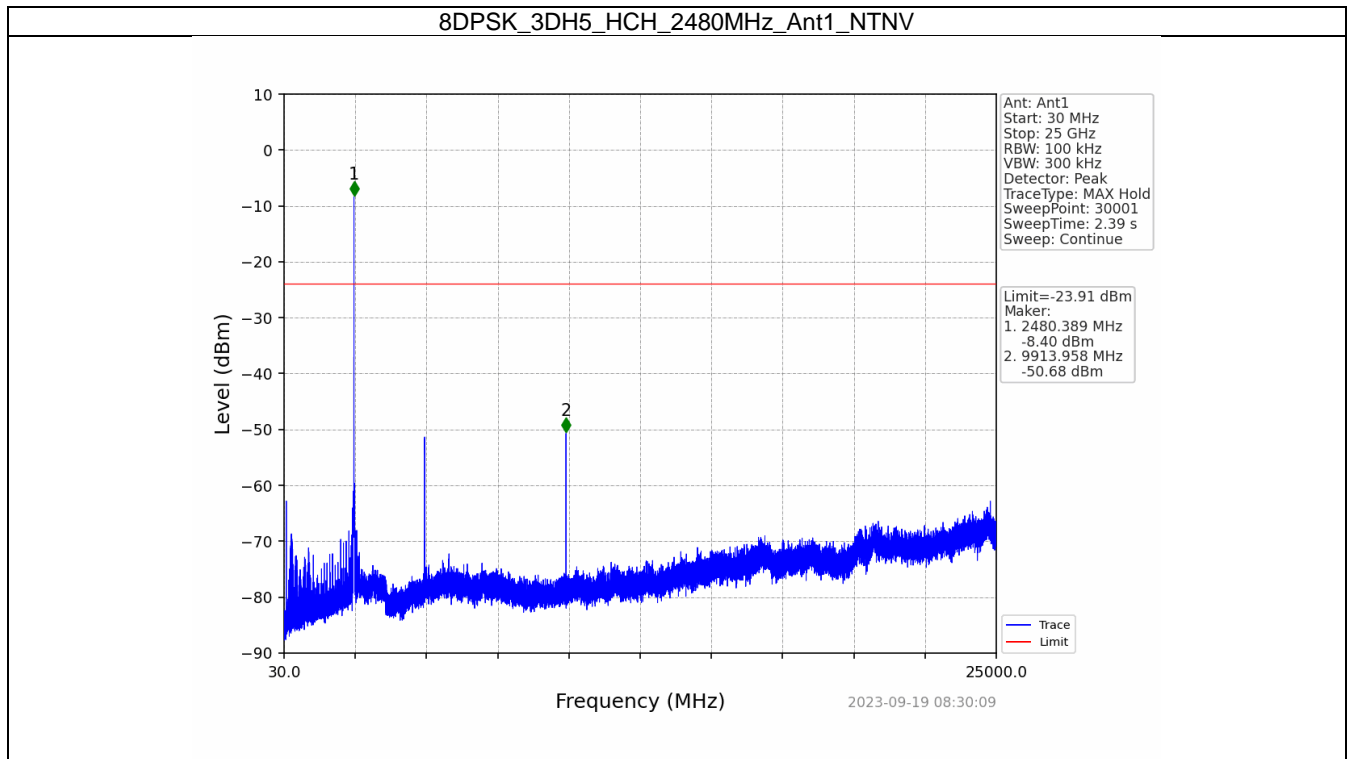

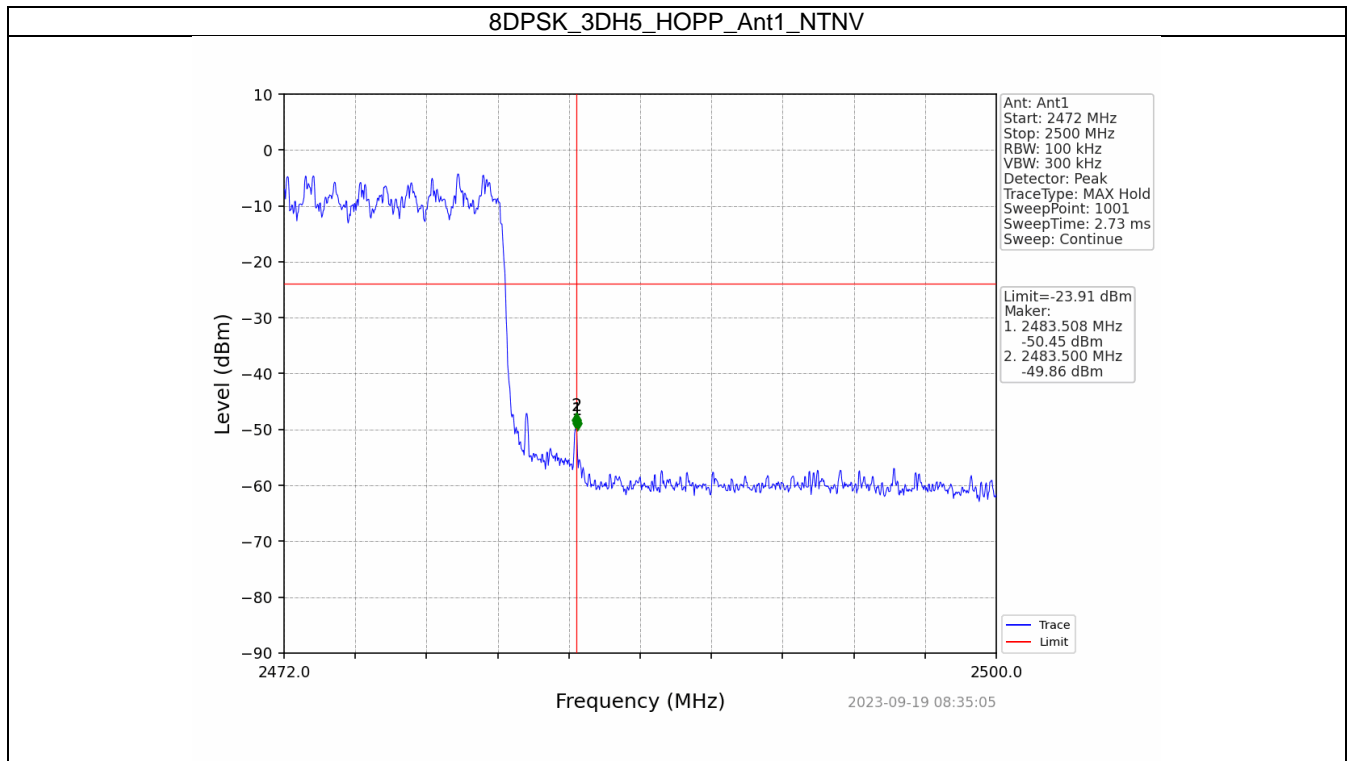

----- End of Report -----