



Mode:802.11ax HE80 Tone:996T Frequency:5290MHz
Ant:Chain0

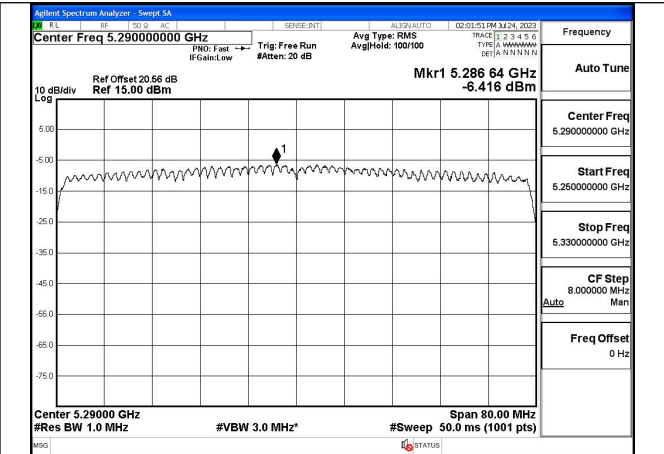

Mode:802.11ax HE80 Tone:996T Frequency:5290MHz
Ant:Chain1

Data Traffic and Noise Floor Plots

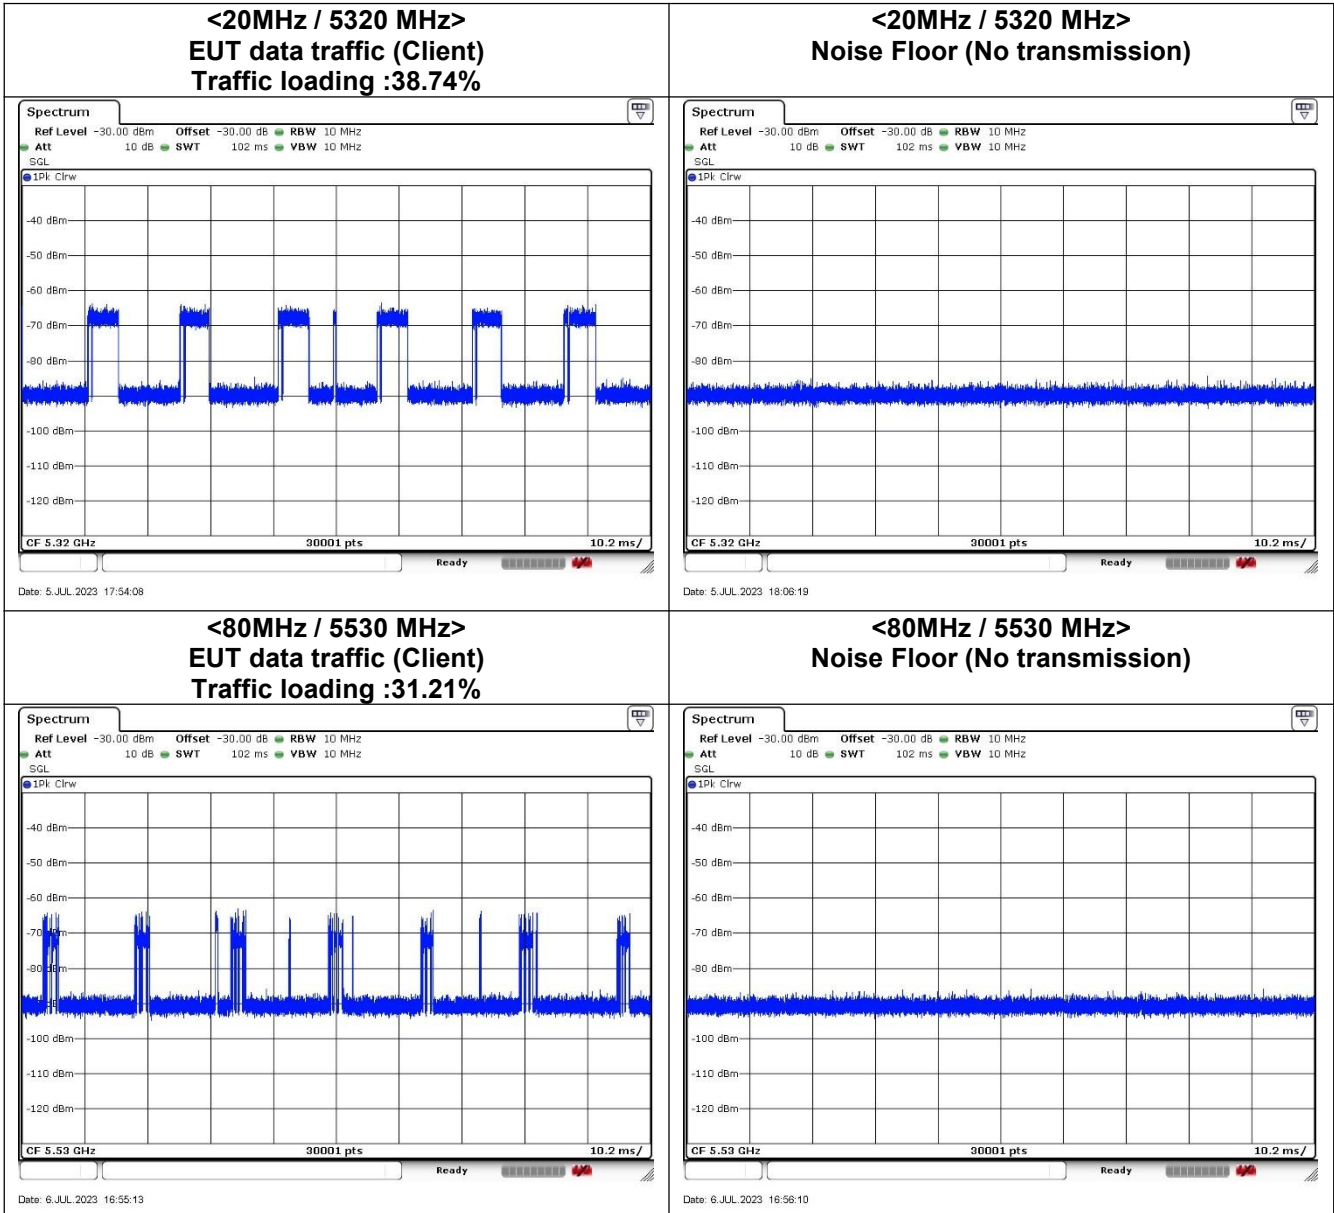

Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test


Frequency	Test Item	Test Result	Limit	Pass/Fail
5320MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.6ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
5530MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	201.2ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass

Note*: We notice clearly that “Channel Move Time” is less than 10s from the figure. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots


<20MHz / 5320 MHz>

Channel Move Time & Channel Closing Transmission Time

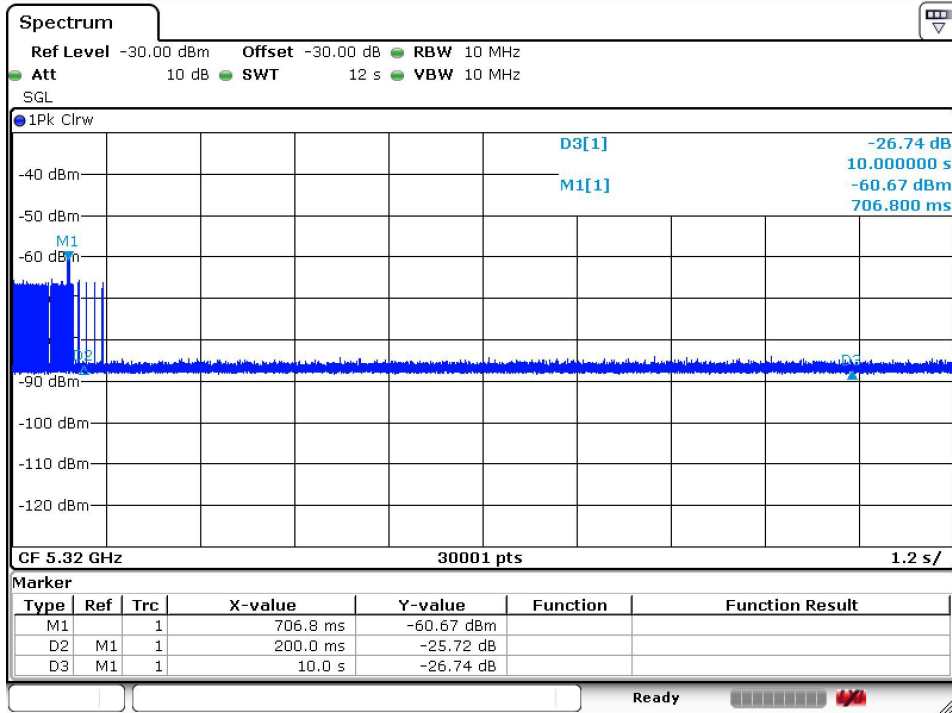

Date: 5.JUL.2023 18:18:10

Non-Occupancy Period

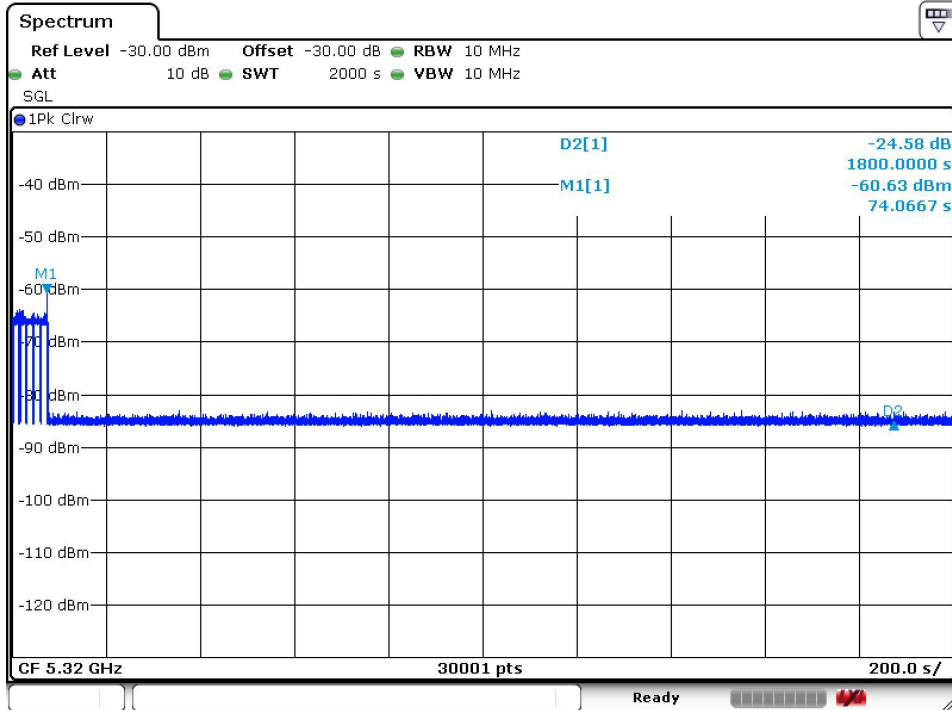

Date: 5.JUL.2023 20:21:45

Note:


Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 +1.6ms) = 200 + Number of beacon after 200ms(4) X Dwell (0.4

ms) < 260ms


<20MHz / 5530MHz>

Channel Move Time & Channel Closing Transmission Time

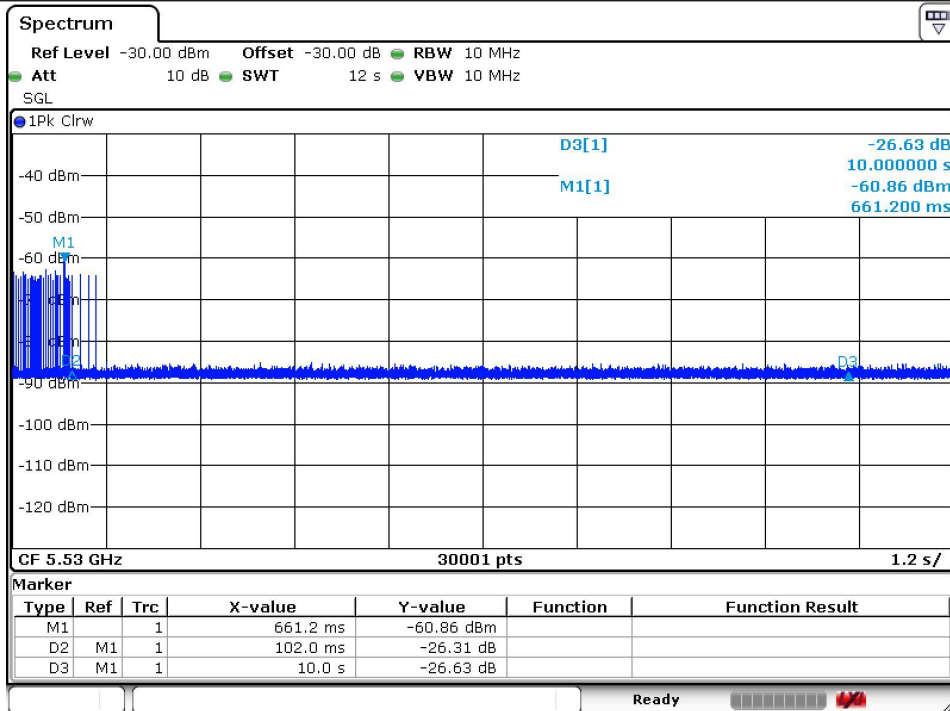

Date: 6 JUL 2023 17:02:23

Non-Occupancy Period

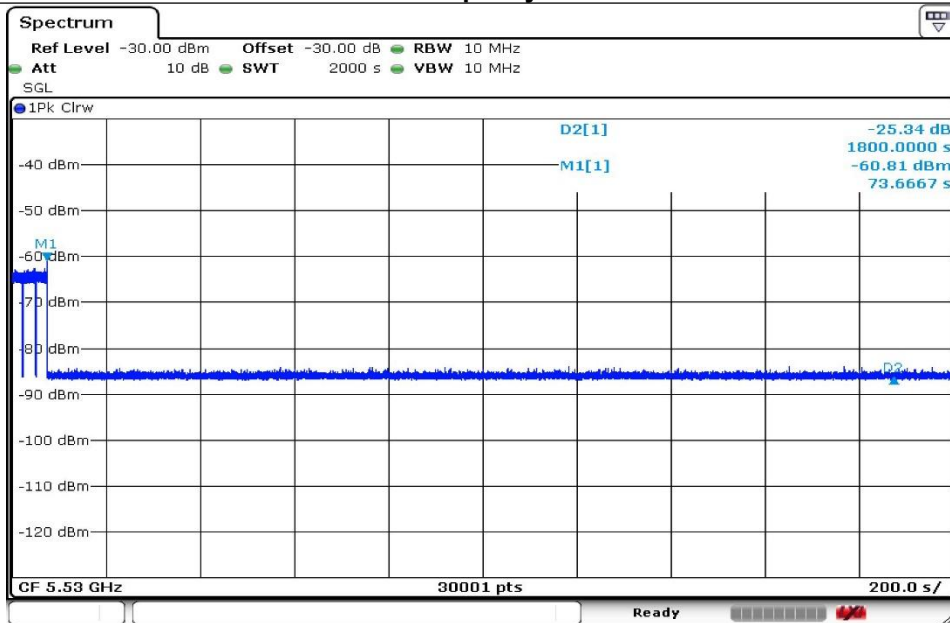

Date: 6 JUL 2023 19:57:34

Note:

Dwell (0.4 ms)= Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time(200 + 1.2ms) = 200 + Number of beacon after 200ms(3) X Dwell (0.4 ms) < 260ms