

## Appendix B

### RF Test Data for BT V4.1(BDR/EDR) (Conducted Measurement)


**Product Name: Speaker**  
**Trade Mark: Diablo**  
**Test Model: DB--RUMBLE**

#### Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	54.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Wang Chuang
Supervised by:	Jayden.Zhuo


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

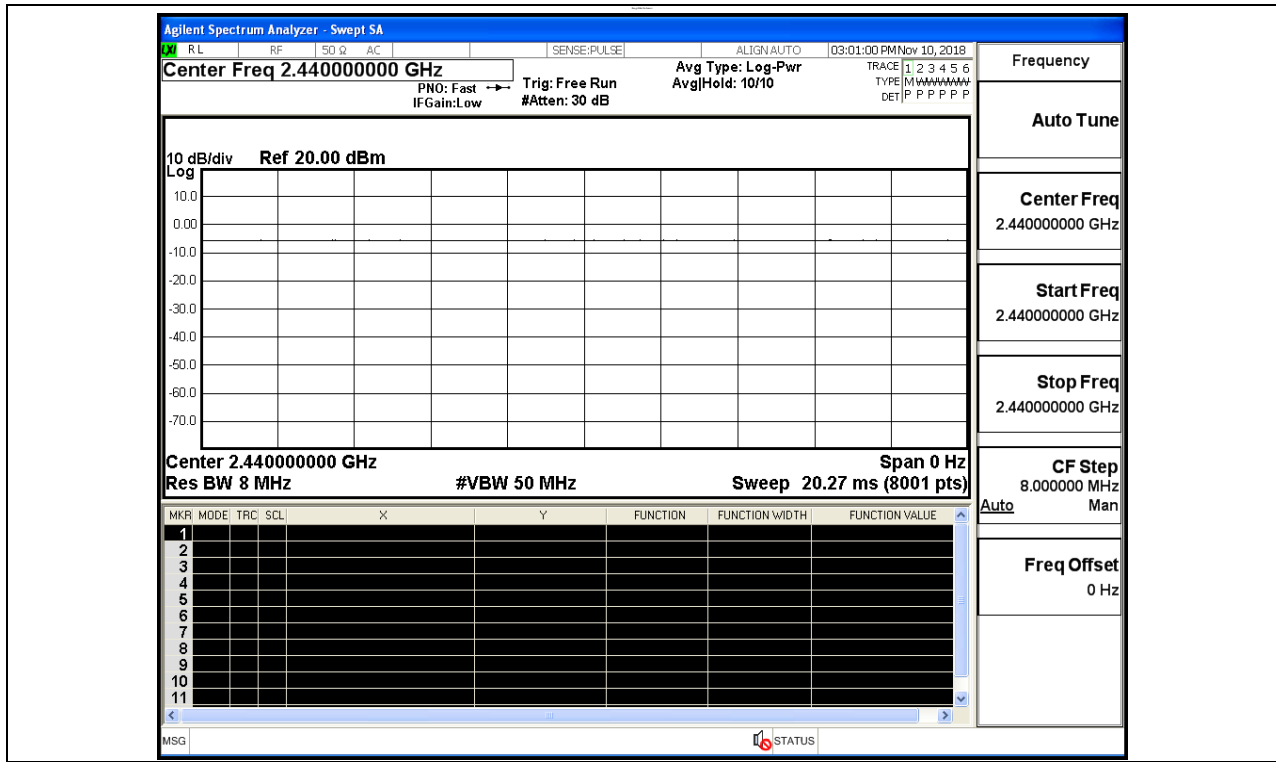


### B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	2.148	30	PASS
BT LE	MCH	2.064	30	PASS
BT LE	HCH	2.006	30	PASS

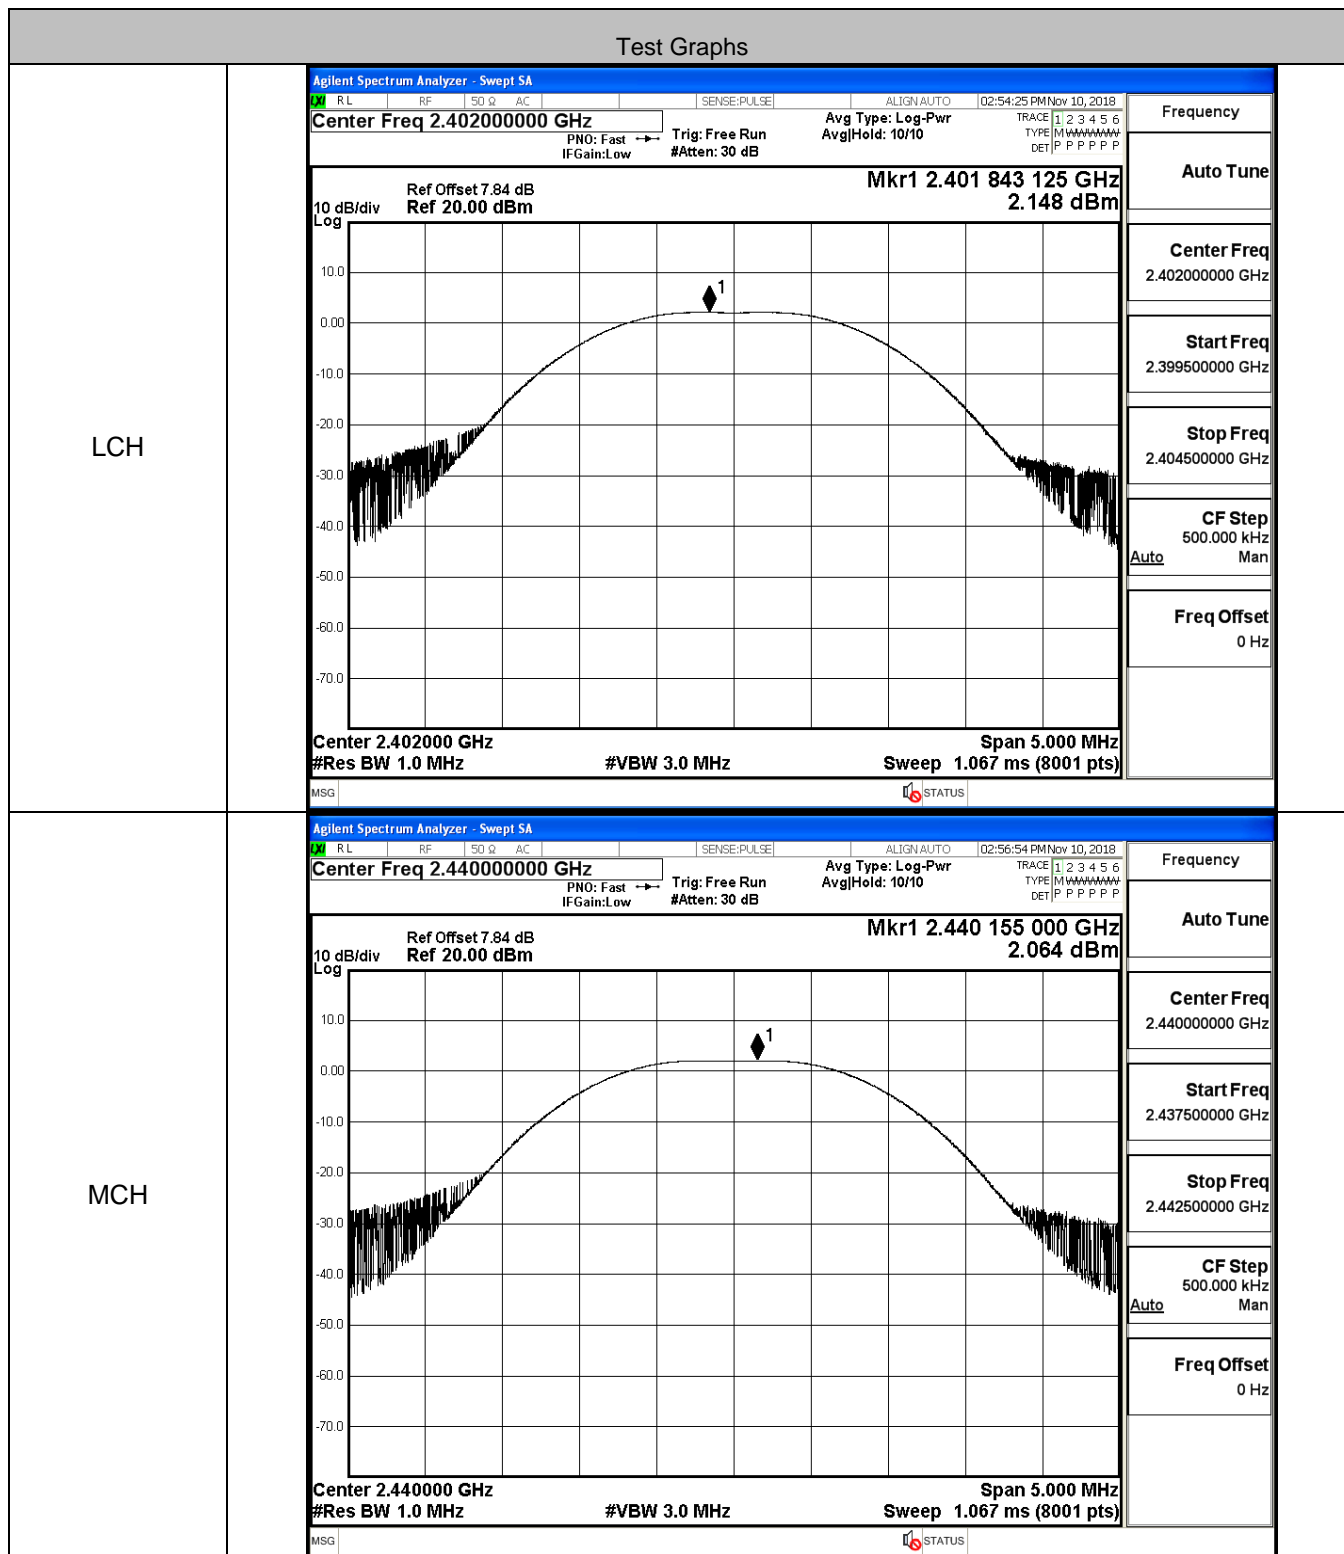


HCH

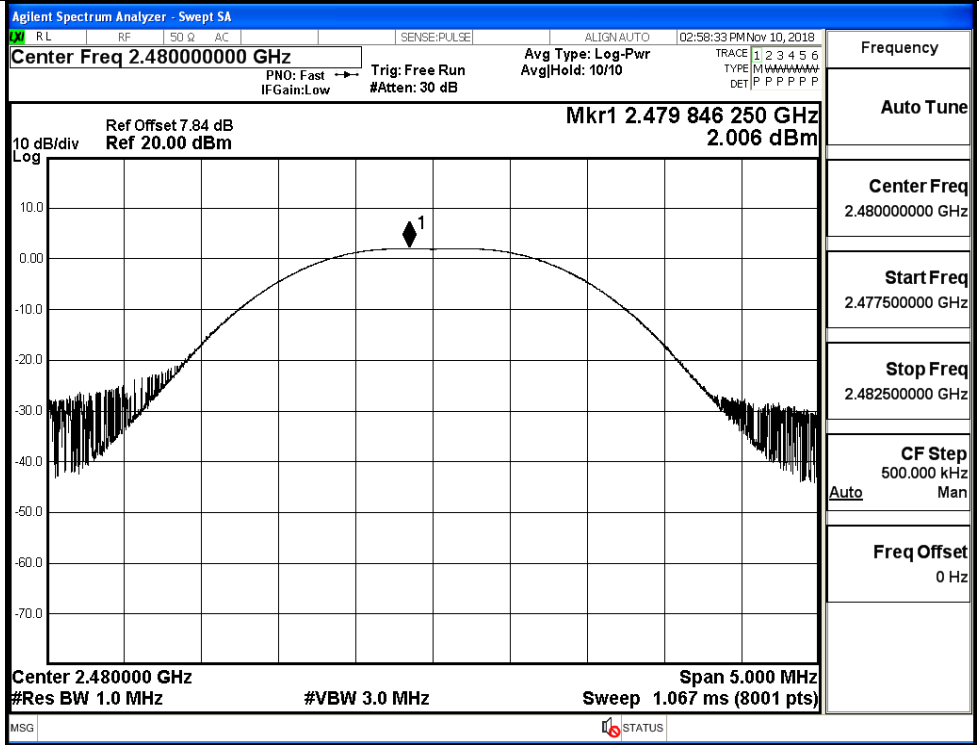

### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-12.858	8	PASS
BT LE	MCH	-12.946	8	PASS
BT LE	HCH	-12.926	8	PASS

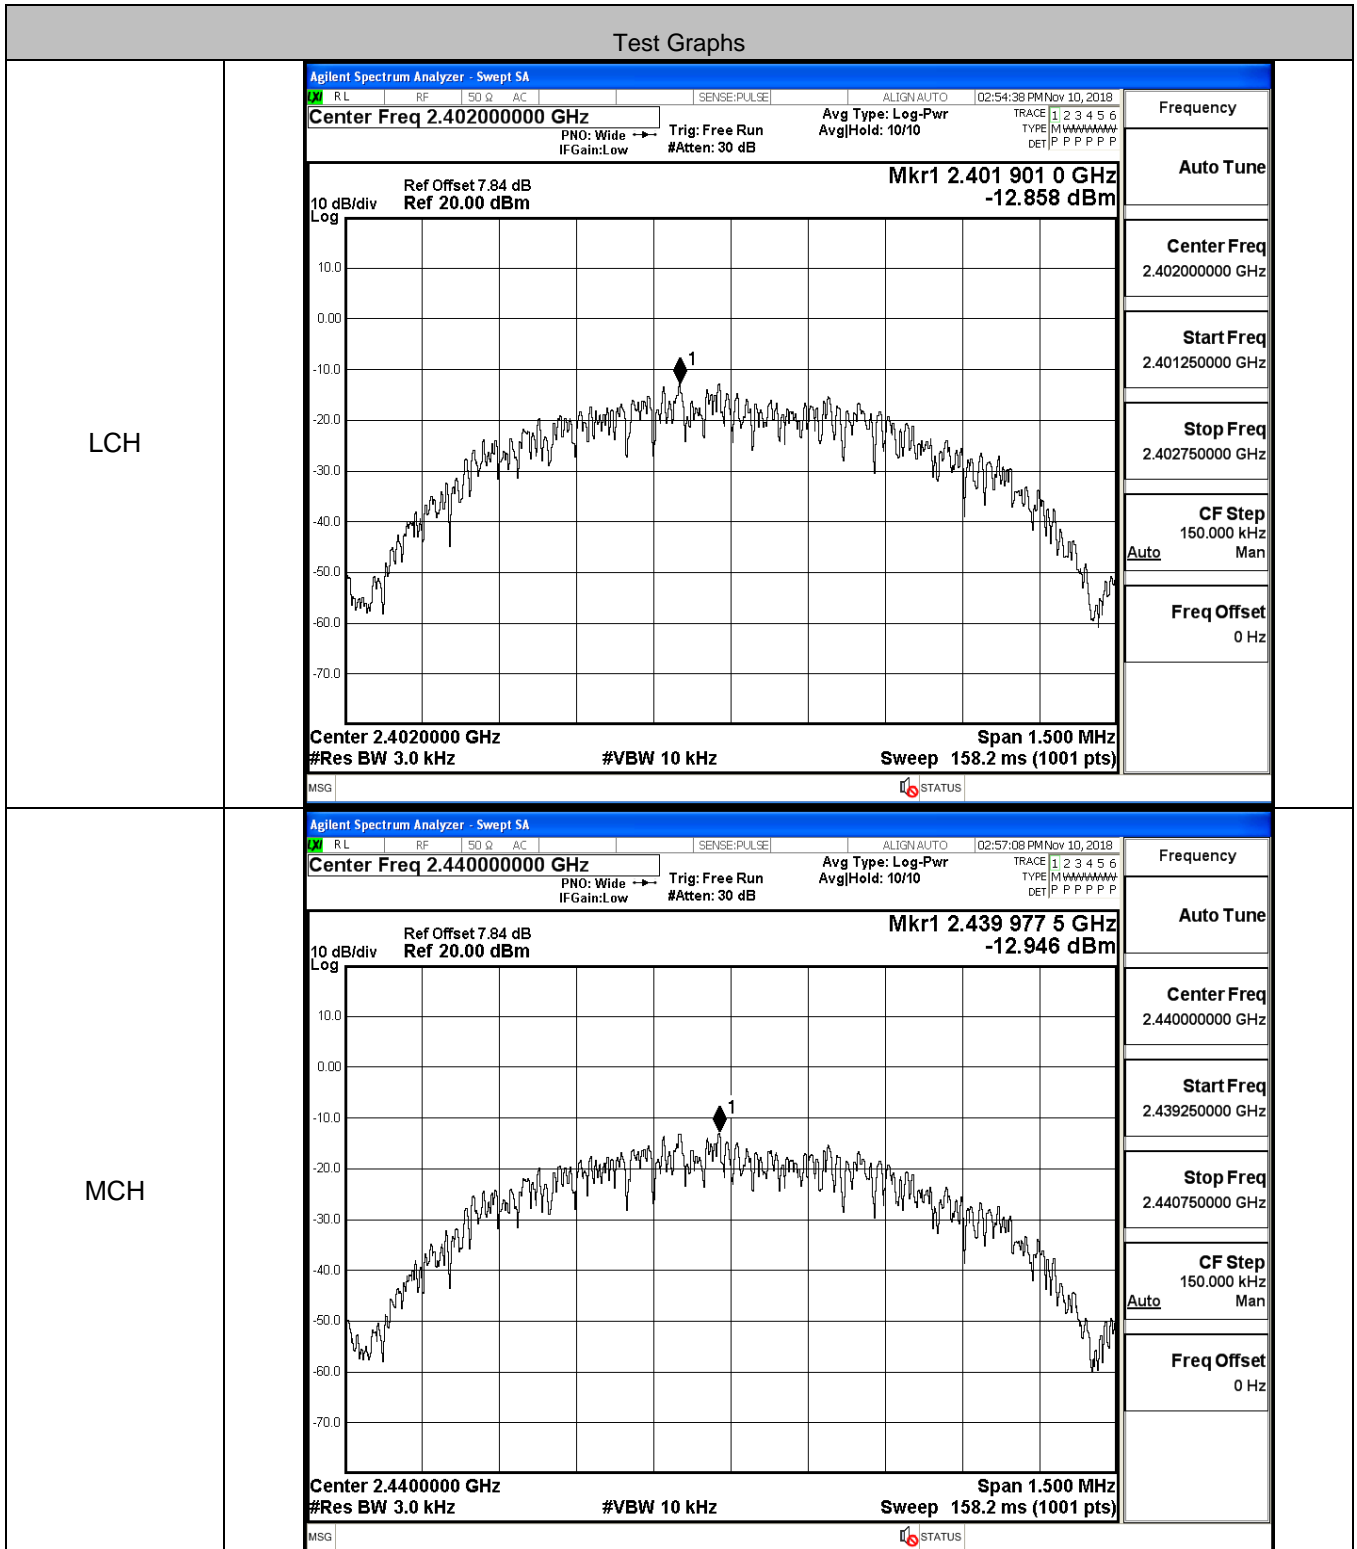



**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6984	≥0.5	PASS
BT LE	MCH	0.6994	≥0.5	PASS
BT LE	HCH	0.6912	≥0.5	PASS


Test Graphs																	
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 02:54:14 PM Nov 10, 2018</p> <p style="margin: 0;">Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None                      Trig: Free Run AvgHold: &gt;1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 7.84 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4019921 GHz                          1.3742 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.402 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">8.46 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>1.0479 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>2.377 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>698.4 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	8.46 dBm		<b>1.0479 MHz</b>				Transmit Freq Error	2.377 kHz	OBW Power	99.00 %	x dB Bandwidth	698.4 kHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	8.46 dBm															
<b>1.0479 MHz</b>																	
Transmit Freq Error	2.377 kHz	OBW Power	99.00 %														
x dB Bandwidth	698.4 kHz	x dB	-6.00 dB														
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 02:56:43 PM Nov 10, 2018</p> <p style="margin: 0;">Center Freq: 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None                      Trig: Free Run AvgHold: &gt;1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 7.84 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.439991 GHz                          1.3208 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.44 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">8.38 dBm</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>1.0459 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>1.408 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>699.4 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	8.38 dBm		<b>1.0459 MHz</b>				Transmit Freq Error	1.408 kHz	OBW Power	99.00 %	x dB Bandwidth	699.4 kHz	x dB	-6.00 dB
Occupied Bandwidth	Total Power	8.38 dBm															
<b>1.0459 MHz</b>																	
Transmit Freq Error	1.408 kHz	OBW Power	99.00 %														
x dB Bandwidth	699.4 kHz	x dB	-6.00 dB														

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	02:58:21 PM Nov 10, 2018
<b>Center Freq 2.480000000 GHz</b>			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold>1/1	
#IFGain:Low			#Atten: 30 dB		Radio Device: BTS	

10 dB/div	Ref Offset 7.84 dB	<b>Mkr1 2.4799929 GHz</b>
Log	Ref 20.00 dBm	<b>1.2778 dBm</b>

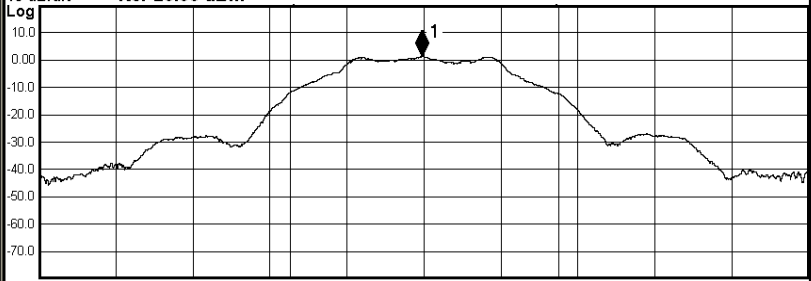

Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz		Sweep 1.067 ms

<b>Occupied Bandwidth</b>	<b>Total Power</b>	<b>8.32 dBm</b>
<b>1.0440 MHz</b>		
Transmit Freq Error	2.492 kHz	OBW Power
x dB Bandwidth	691.2 kHz	x dB
		99.00 %
		-6.00 dB

Frequency
Center Freq 2.480000000 GHz
CF Step 300.000 kHz Auto Man
Freq Offset 0 Hz

MSG
STATUS


## B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	1.424	-43.929	-18.576	PASS
BT LE	MCH	1.353	-44.468	-18.647	PASS
BT LE	HCH	1.06	-43.663	-18.940	PASS




BT LE\_LCH\_Graphs

Pref/BT LE/LCH

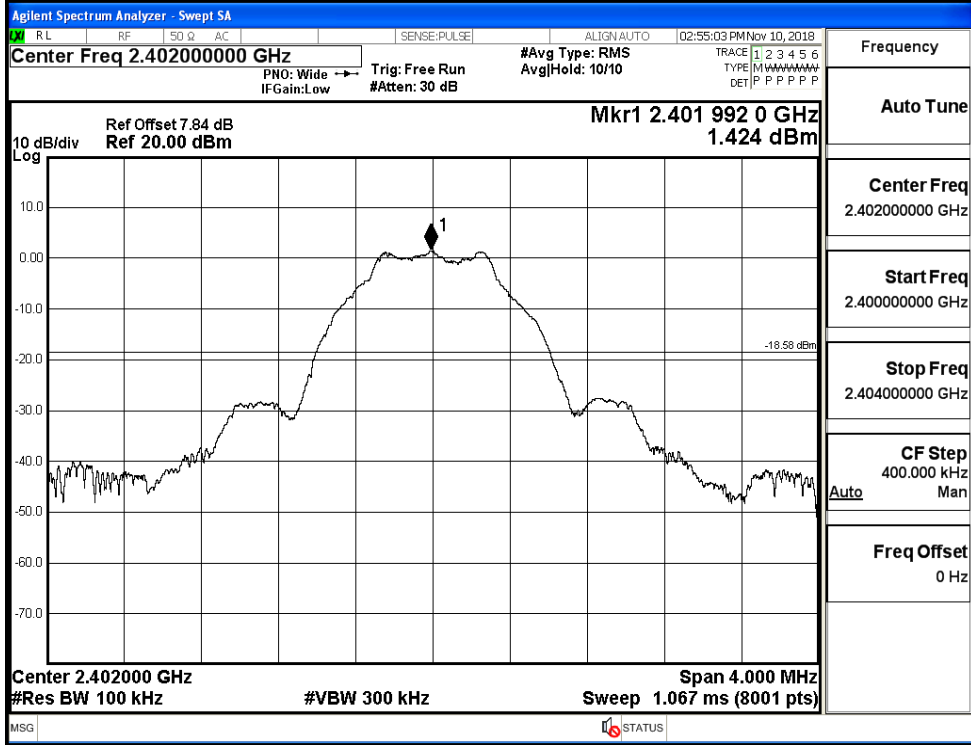


Puw/BT LE/LCH

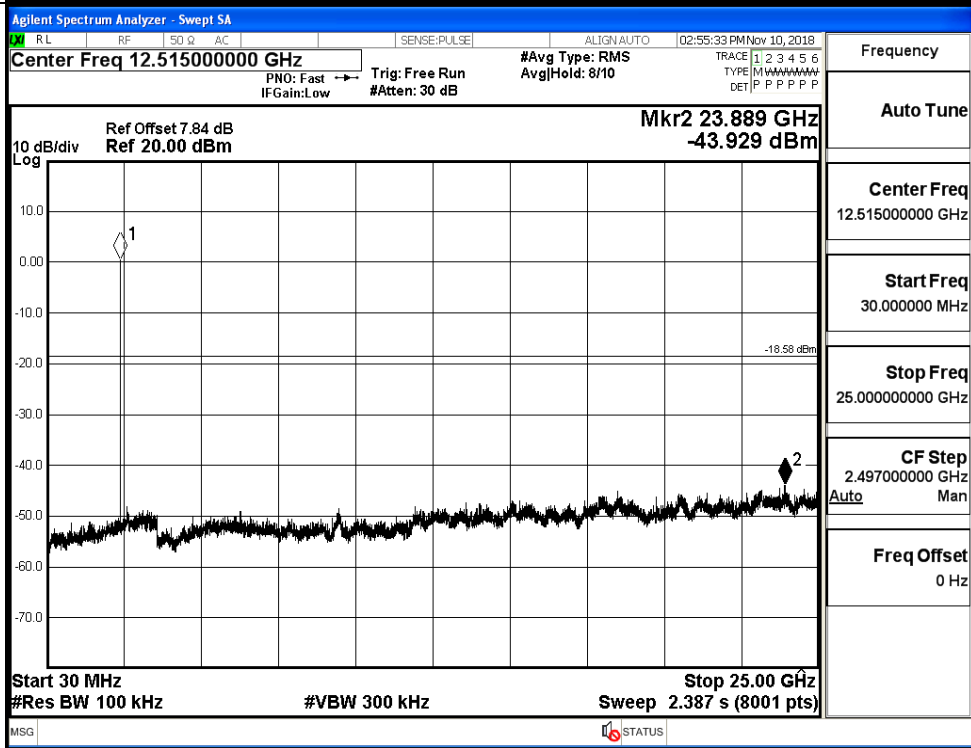


BT LE\_MCH\_Graphs

Pref/BT LE/MCH

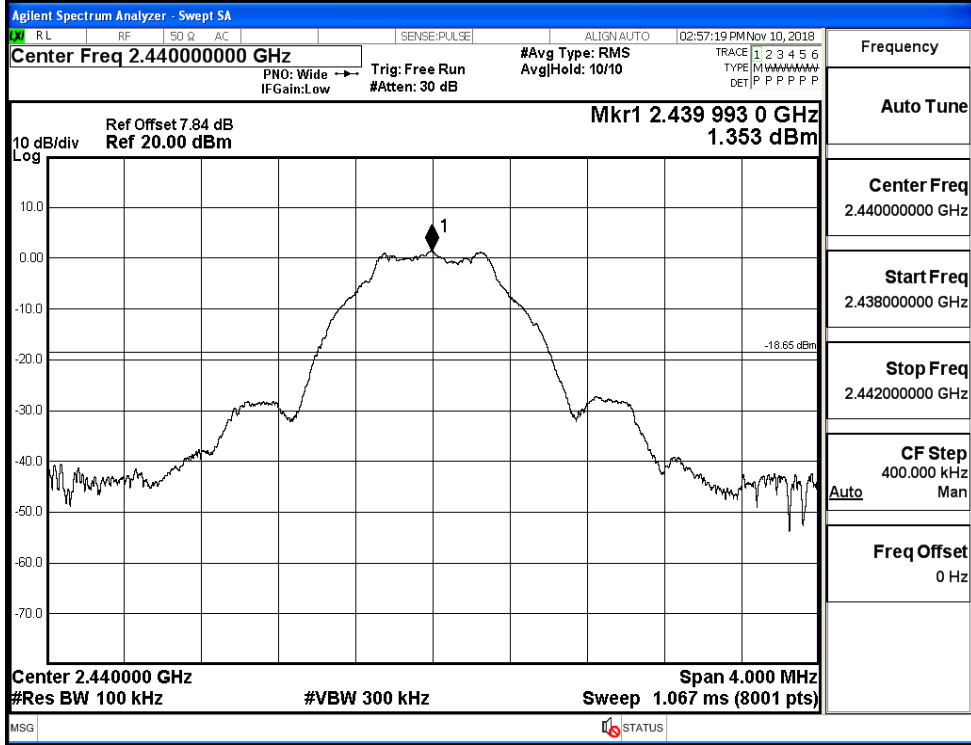


Puw/BT LE/MCH

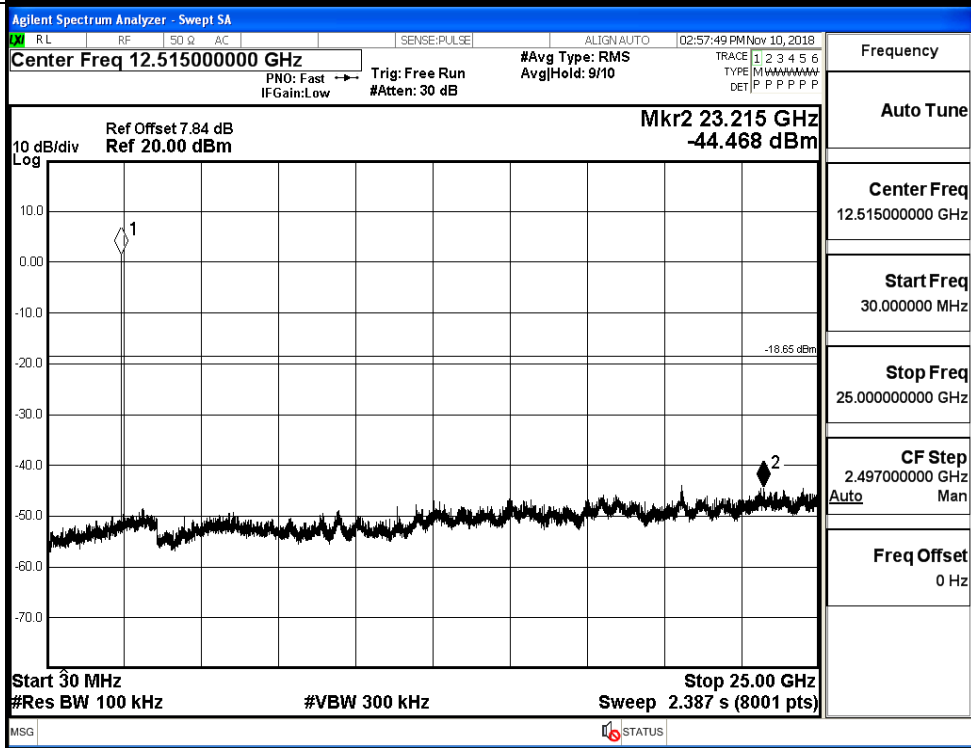


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

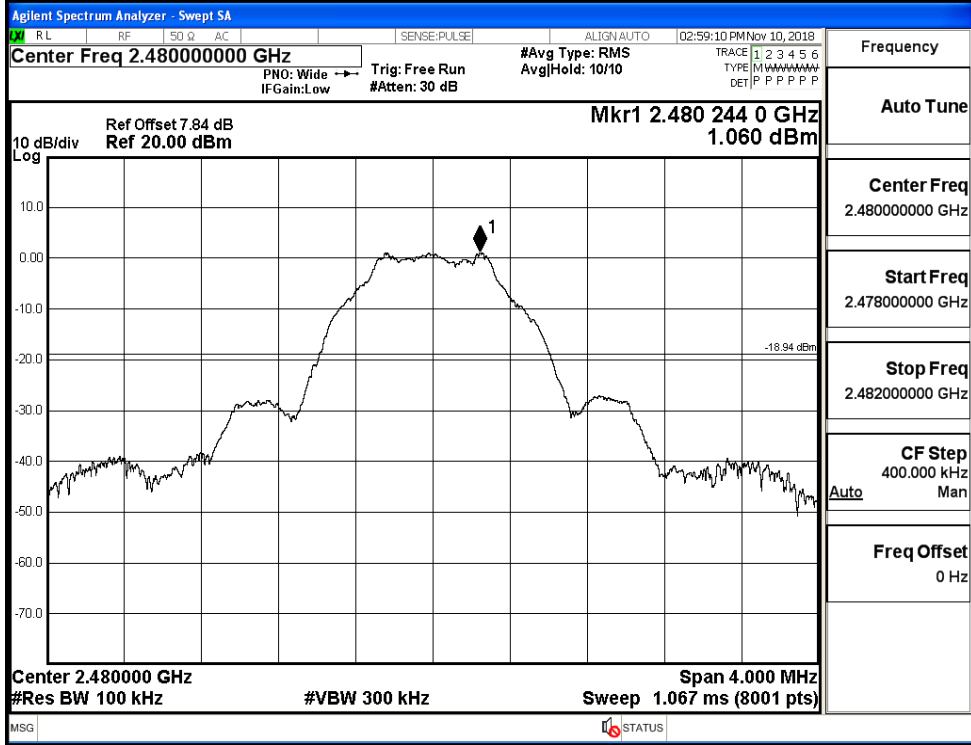

Puw/BT LE/HCH

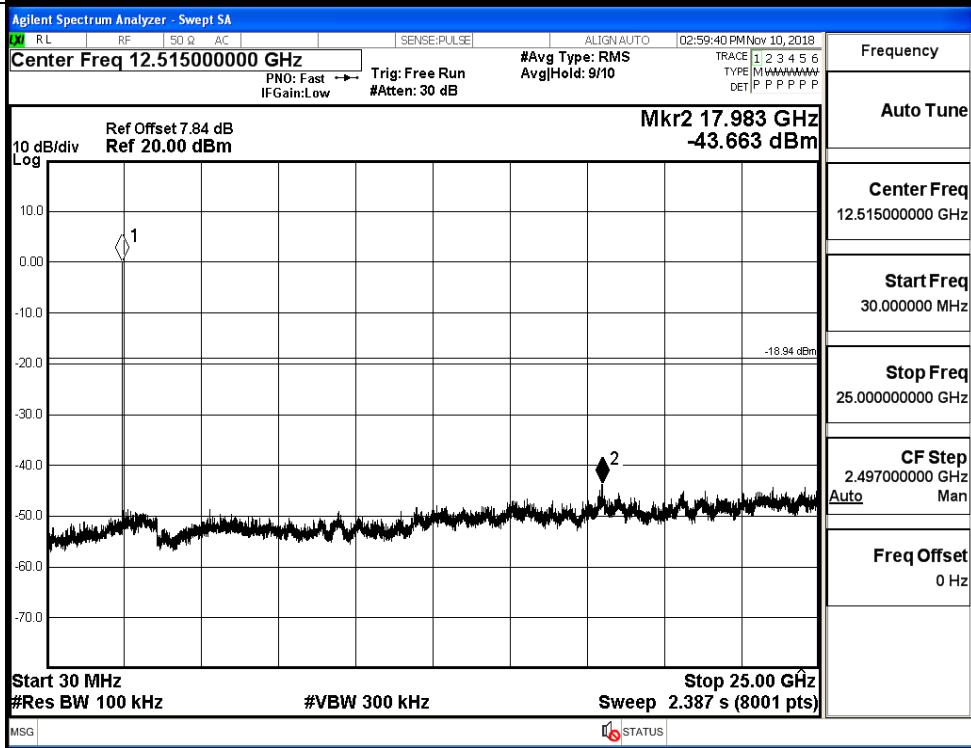

### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	1.522	-50.392	-18.48	PASS
BT LE	HCH	1.527	-48.208	-18.47	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.35700000 GHz                  Max Spurious Level -50.392 dBm                  Mkr4 2.381 146 GHz                  Start 2.31000 GHz Stop 2.40400 GHz                  #Res BW 100 kHz #VBW 300 kHz Sweep 9.067 ms (8001 pts)</p> <table border="1" style="width: 100%; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 003 GHz</td><td>1.522 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-43.766 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-51.604 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.381 146 GHz</td><td>-50.392 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 003 GHz	1.522 dBm				2	N	f		2.400 000 GHz	-43.766 dBm				3	N	f		2.390 000 GHz	-51.604 dBm				4	N	f		2.381 146 GHz	-50.392 dBm				Frequency Auto Tune Center Freq 2.35700000 GHz Start Freq 2.310000000 GHz Stop Freq 2.404000000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 003 GHz	1.522 dBm																																										
2	N	f		2.400 000 GHz	-43.766 dBm																																										
3	N	f		2.390 000 GHz	-51.604 dBm																																										
4	N	f		2.381 146 GHz	-50.392 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.48900000 GHz                  Max Spurious Level -48.208 dBm                  Mkr4 2.483 607 25 GHz                  Start 2.47800 GHz Stop 2.50000 GHz                  #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table border="1" style="width: 100%; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.479 993 75 GHz</td><td>1.527 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-51.662 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.276 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.483 607 25 GHz</td><td>-48.208 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.479 993 75 GHz	1.527 dBm				2	N	f		2.483 500 00 GHz	-51.662 dBm				3	N	f		2.500 000 00 GHz	-52.276 dBm				4	N	f		2.483 607 25 GHz	-48.208 dBm				Frequency Auto Tune Center Freq 2.48900000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.479 993 75 GHz	1.527 dBm																																										
2	N	f		2.483 500 00 GHz	-51.662 dBm																																										
3	N	f		2.500 000 00 GHz	-52.276 dBm																																										
4	N	f		2.483 607 25 GHz	-48.208 dBm																																										


### B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.94	2.0	0	53.32	PEAK	74	PASS
		Ant1	2310.0	-53.99	2.0	0	43.27	AV	54	PASS
		Ant1	2390.0	-41.94	2.0	0	55.32	PEAK	74	PASS
		Ant1	2390.0	-53.71	2.0	0	43.55	AV	54	PASS
	2480	Ant1	2483.5	-43.49	2.0	0	53.77	PEAK	74	PASS
		Ant1	2483.5	-53.25	2.0	0	44.01	AV	54	PASS
		Ant1	2500.0	-44.55	2.0	0	52.71	PEAK	74	PASS
		Ant1	2500.0	-53.20	2.0	0	44.06	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

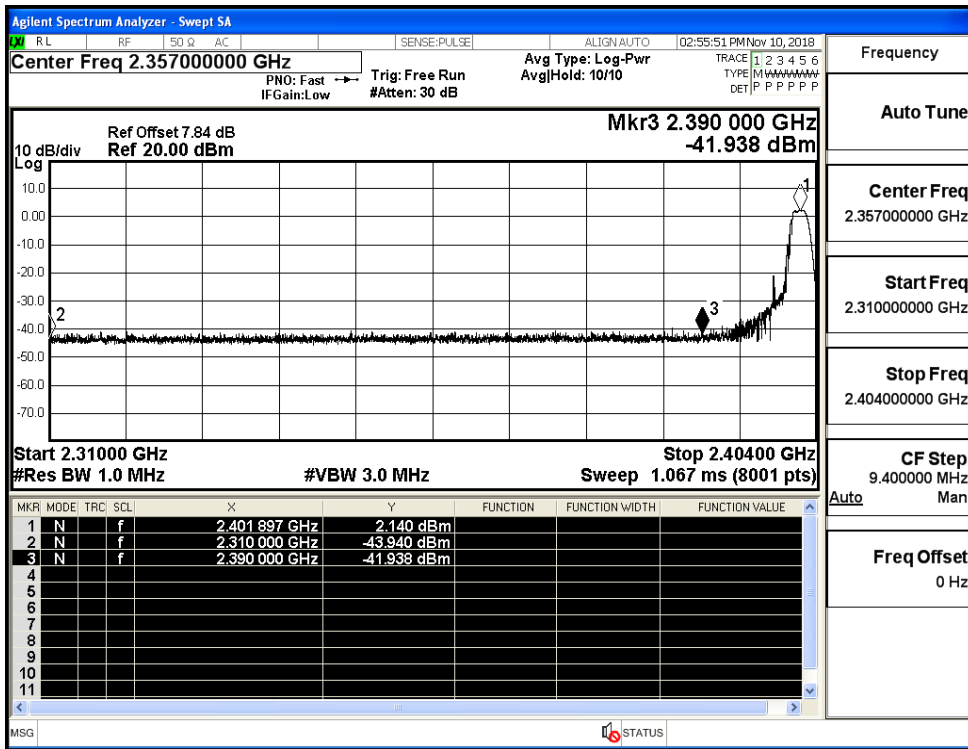

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

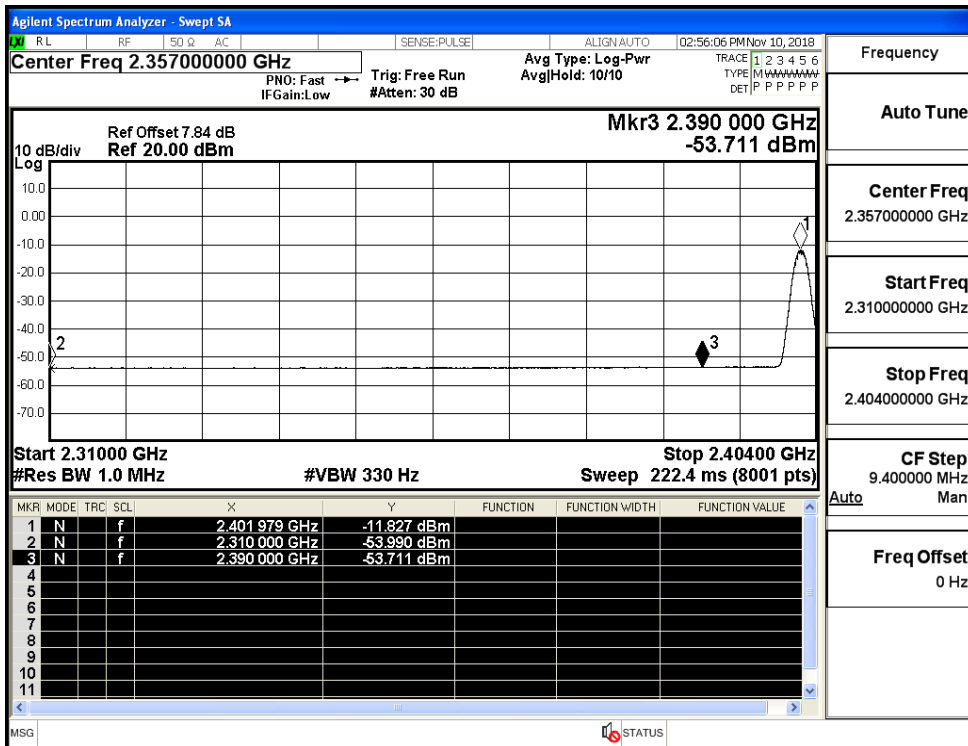

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

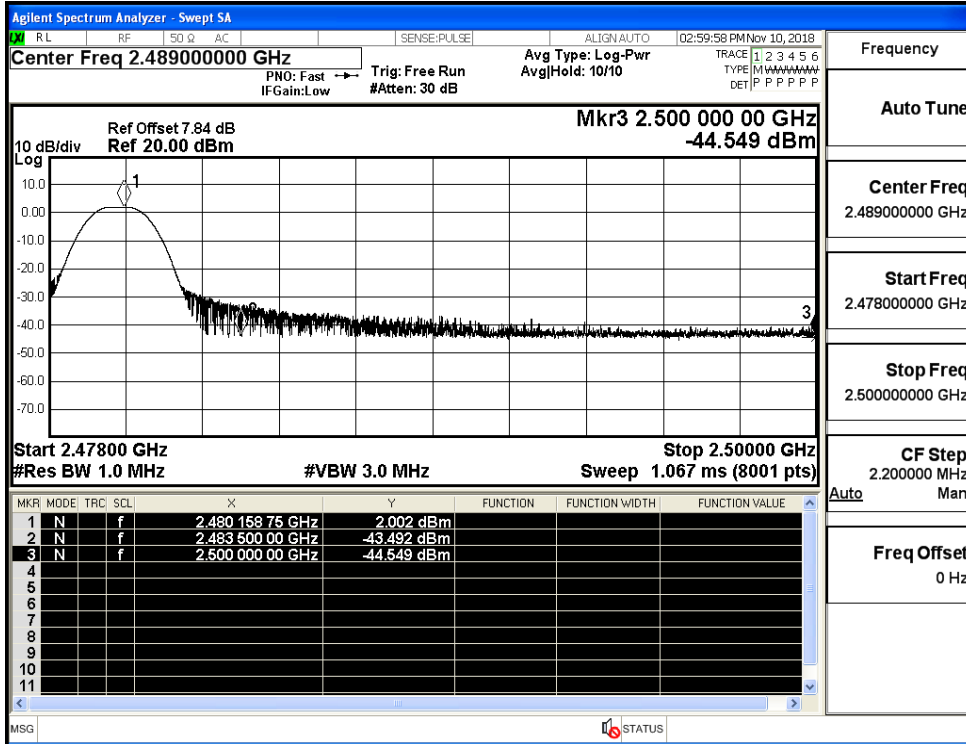

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

