
M6 (Ground) User Manual

Please read the instruction manual carefully before using this product.

Product specification

Model NO : M6 (Ground)

Bluetooth version: Action 4.2+EDR

Fashionable design with high quality waterproof fabric

Waterproof IPX6

High quality speaker driver with two passive radiator

3.5MM Aux In Jack for other audio devices

Built-in rechargeable battery 4400mAH 3.7V

Micro USB power supply


Output power: 5W *2

Frequency range: 60Hz~20KHz

SNR: \geq 70dB

Unit size: 170X80X85 MM


Control and Interface

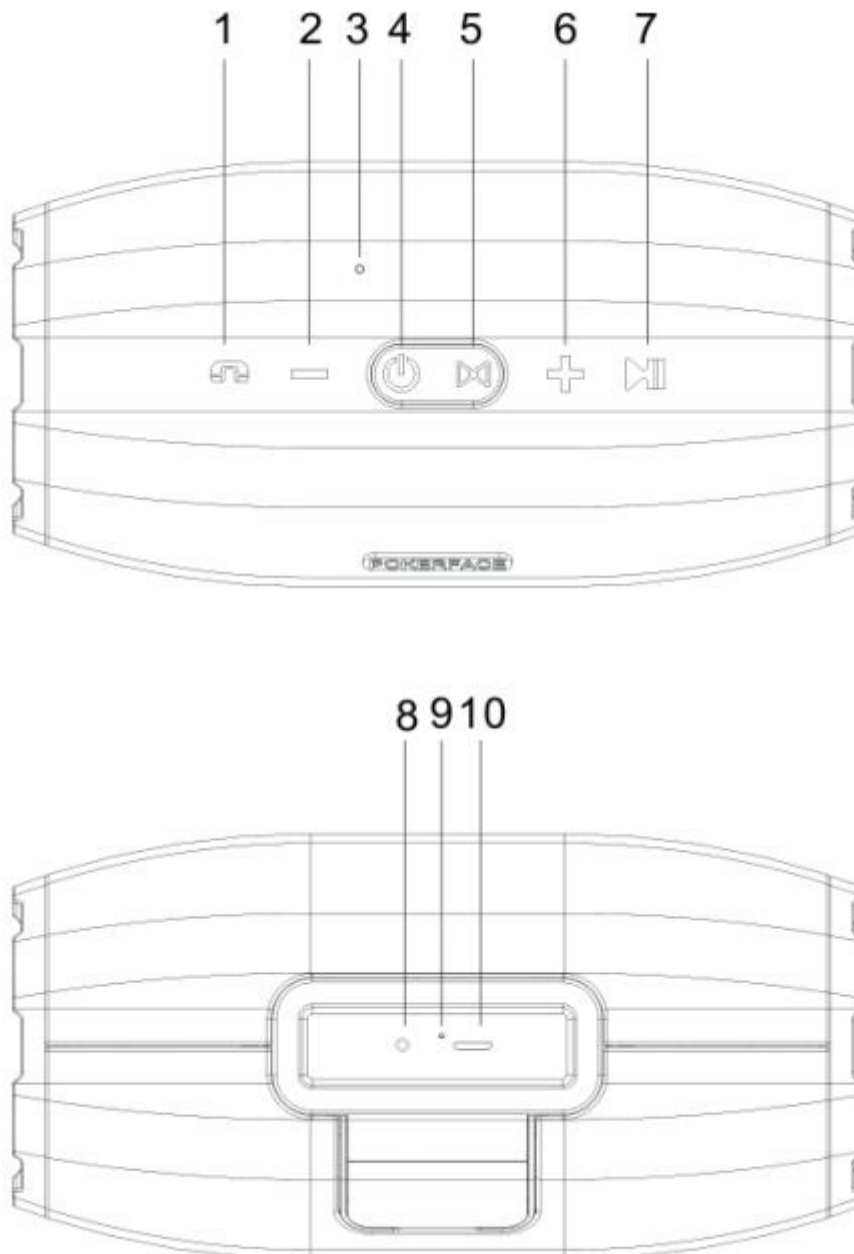




1. Handfree
2. Long press to play the previous track and short press to turn down volume
Note: When it reaches the minimum volume and the button is still being short-pressed, a prompt tone will indicate that the volume can't be decreased anymore.
3. Microphone
4. Power button - Long press to turn on/off
5. Bluetooth pairing , Long press to disconnect Bluetooth

6. Long press to play the next track and short press to turn up volume
Note: When it reaches the maximum volume and the button is still being short-pressed, a prompt tone will indicate that the volume can't be increased anymore.
7. Pause / Play
8. Aux In Jack
9. Charging indicator
10. Micro USB port

Bluetooth Model

1. Long press  button to turn on the device. The LED indicator light will flash blue.
2. Open the Bluetooth function of the pairing device, search for "Ground" from your list and select to connect. When it is successfully paired, the LED indicator turns on blue.

Note:

- 1) When some mobile phones prompt to input a PIN number, please enter "0000".
 - 2) Long press  button to disconnect the connected device, and repeat Step 2 to connect another device via Bluetooth.
 - 3) The speaker will turn off automatically when no device connected to it in 10 minutes.
3. Play music from your device selection.
 4. When there is a Call Incoming, short press the  button to answer the phone and long press to reject it. When finishing a call, press the  button to end it.

Note: When answering a call via hands-free mode, please keep the distance from the microphone no more than 50 centimeters.

AUX-in Model

1. Use a 3.5 mm cable for AUX-IN mode.
 2. Hands-free Answering Mode does not work in AUX-IN mode.
- Note:
- 1) When a 3.5mm AUX-IN jack is plugged in, the Speaker will automatically change to AUX-IN mode and has no previous track and next track function.
 - 2) When the jack is unplugged in, the Speaker will return to Bluetooth Mode.

Charging the Bluetooth Device

- 1. To charge the speaker, connect a Mirco USB cable to the Mirco USB port and then to a USB Charging Adaptor.**
- 2. When battery is charging, the LED indicator turns red. When it is fully charged, the indicator turns off.**

Note:

- 1) For most smartphones, when the speaker is connected to them via Bluetooth function, it will show the battery capacity of the speaker on these phones.**
- 2) When the battery capacity is lower than 20%, a prompt tone will indicate low battery.**

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and**
- (2) this device must accept any interference received, including interference that may cause undesired operation.**