


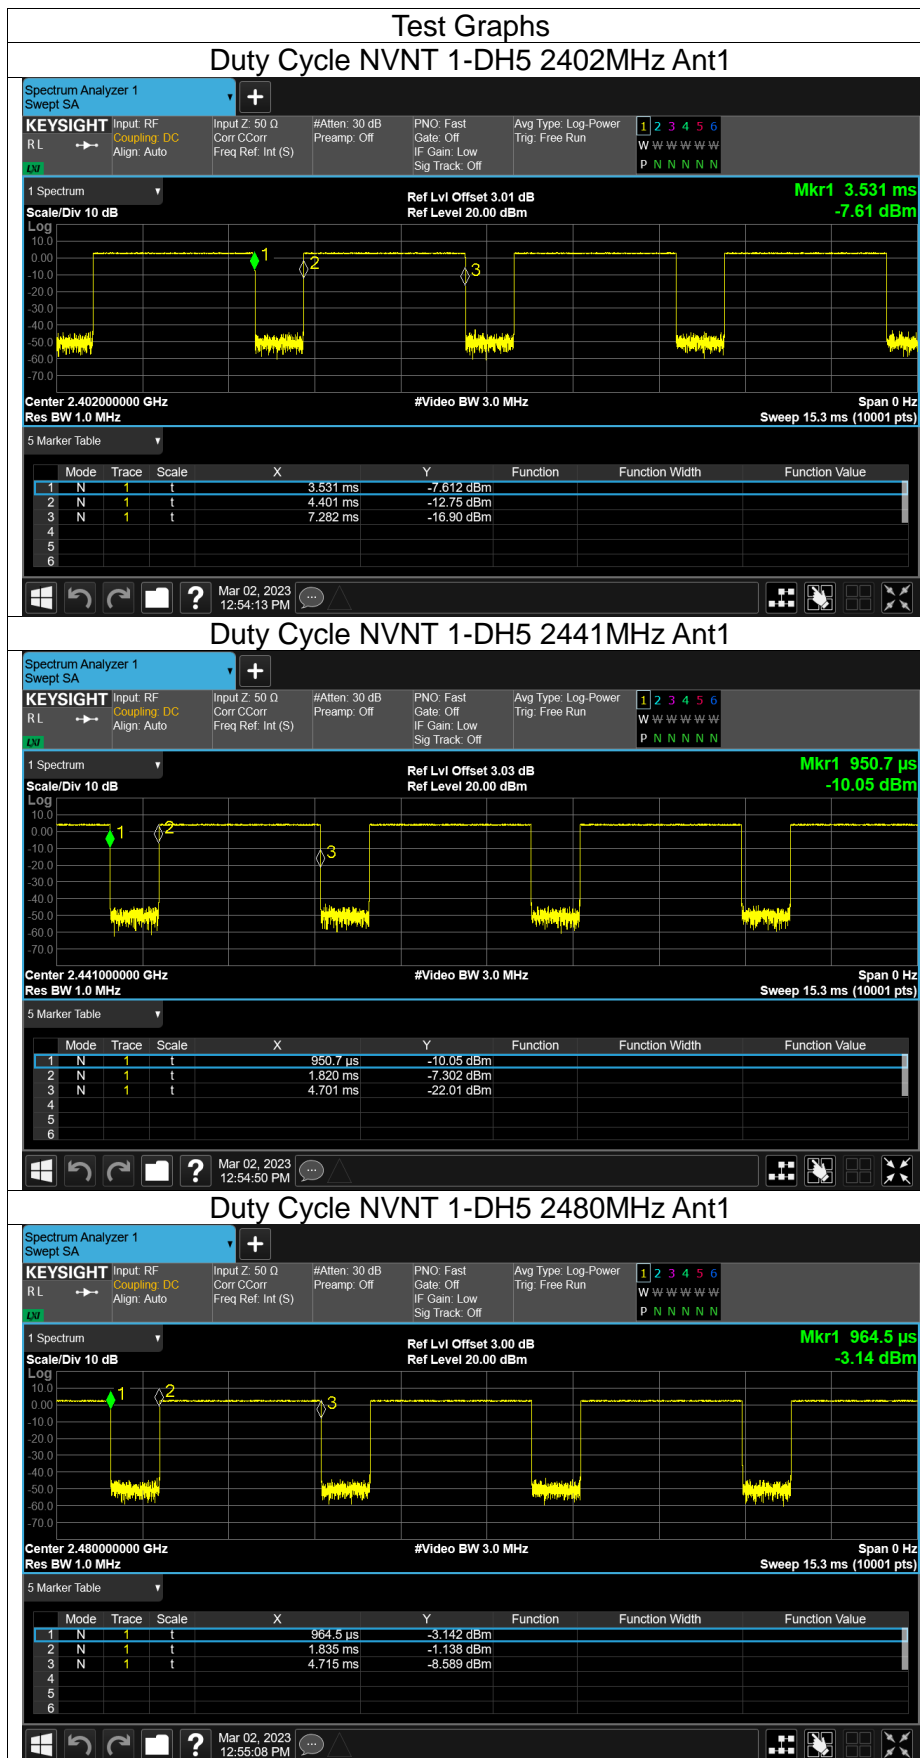




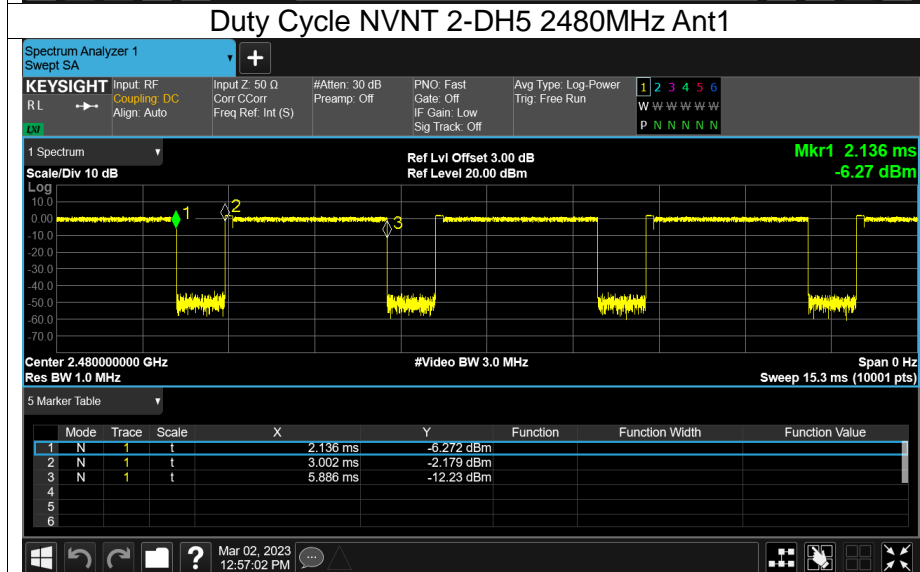


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	76.82	1.15	0.35
NVNT	1-DH5	2441	Ant1	76.82	1.15	0.35
NVNT	1-DH5	2480	Ant1	76.78	1.15	0.35
NVNT	2-DH5	2402	Ant1	76.94	1.14	0.35
NVNT	2-DH5	2441	Ant1	76.94	1.14	0.35
NVNT	2-DH5	2480	Ant1	76.9	1.14	0.35
NVNT	3-DH5	2402	Ant1	76.94	1.14	0.35
NVNT	3-DH5	2441	Ant1	76.97	1.14	0.35
NVNT	3-DH5	2480	Ant1	76.97	1.14	0.35

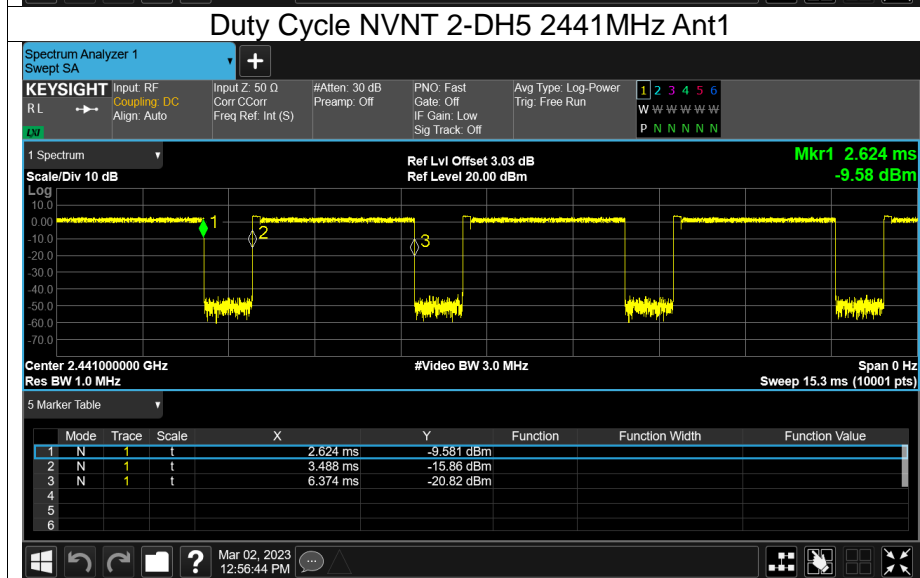

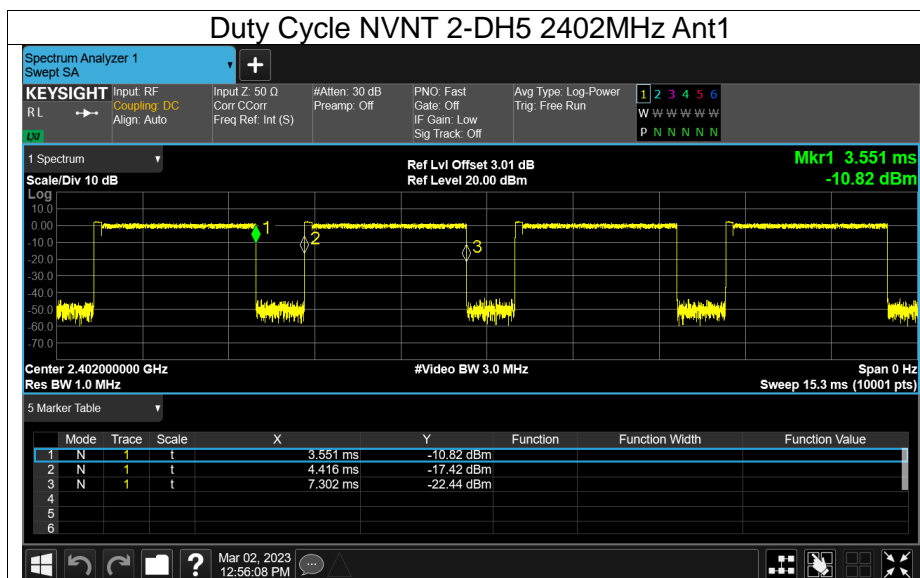

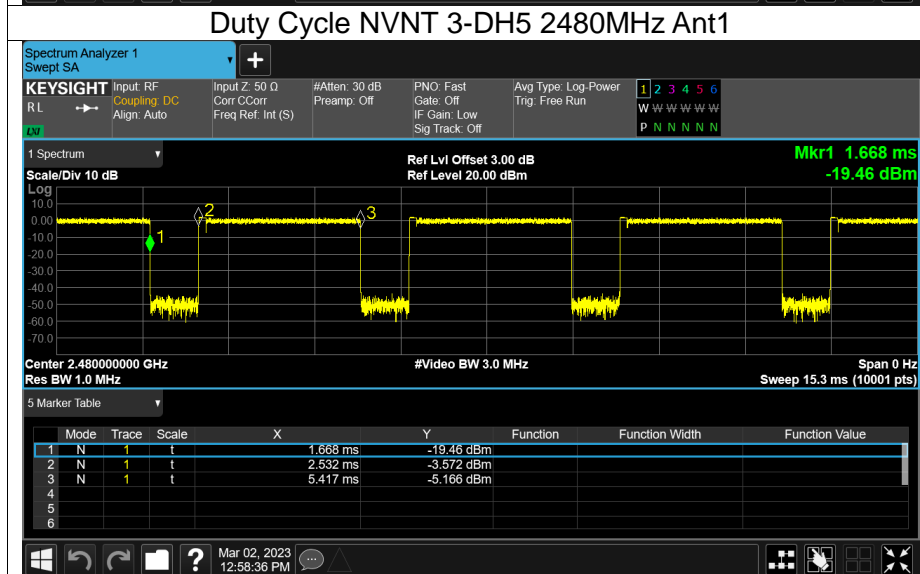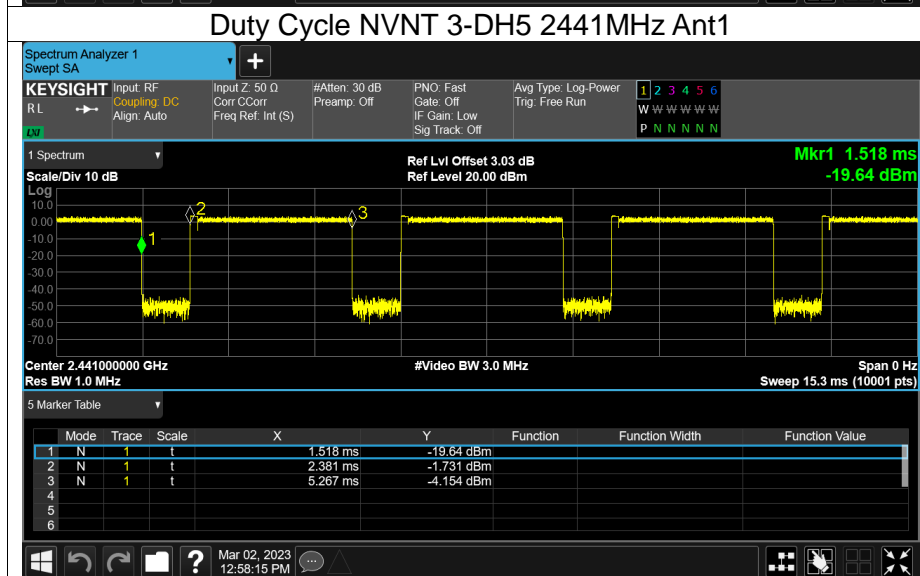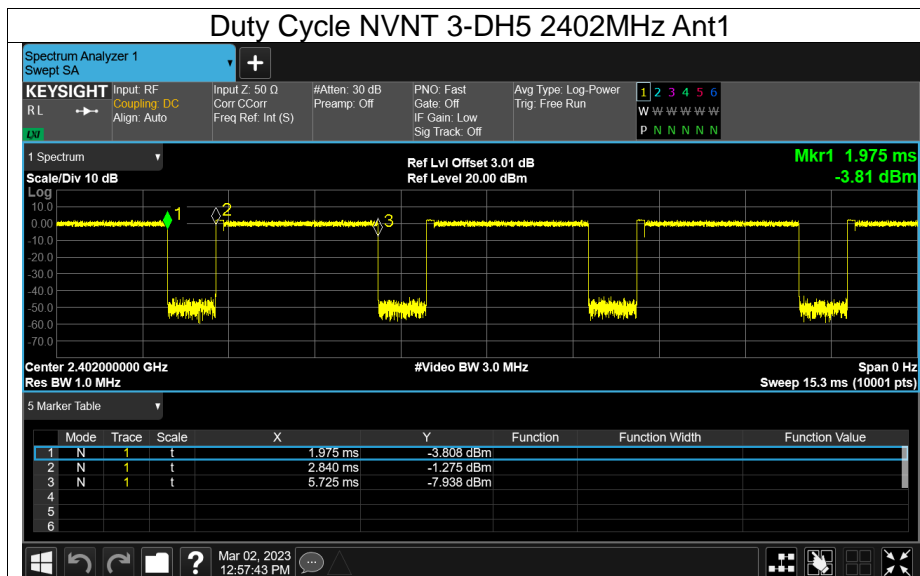



Maximum Peak Conducted Output Power




Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	3.17	21	Pass
NVNT	1-DH5	2441	Ant1	4.45	21	Pass
NVNT	1-DH5	2480	Ant1	2.77	21	Pass
NVNT	2-DH5	2402	Ant1	2.32	21	Pass
NVNT	2-DH5	2441	Ant1	3.62	21	Pass
NVNT	2-DH5	2480	Ant1	2.02	21	Pass
NVNT	3-DH5	2402	Ant1	2.39	21	Pass
NVNT	3-DH5	2441	Ant1	3.71	21	Pass
NVNT	3-DH5	2480	Ant1	2.08	21	Pass






-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.84	Pass
NVNT	1-DH5	2441	Ant1	0.84	Pass
NVNT	1-DH5	2480	Ant1	0.841	Pass
NVNT	2-DH5	2402	Ant1	1.272	Pass
NVNT	2-DH5	2441	Ant1	1.257	Pass
NVNT	2-DH5	2480	Ant1	1.283	Pass
NVNT	3-DH5	2402	Ant1	1.288	Pass
NVNT	3-DH5	2441	Ant1	1.278	Pass
NVNT	3-DH5	2480	Ant1	1.291	Pass



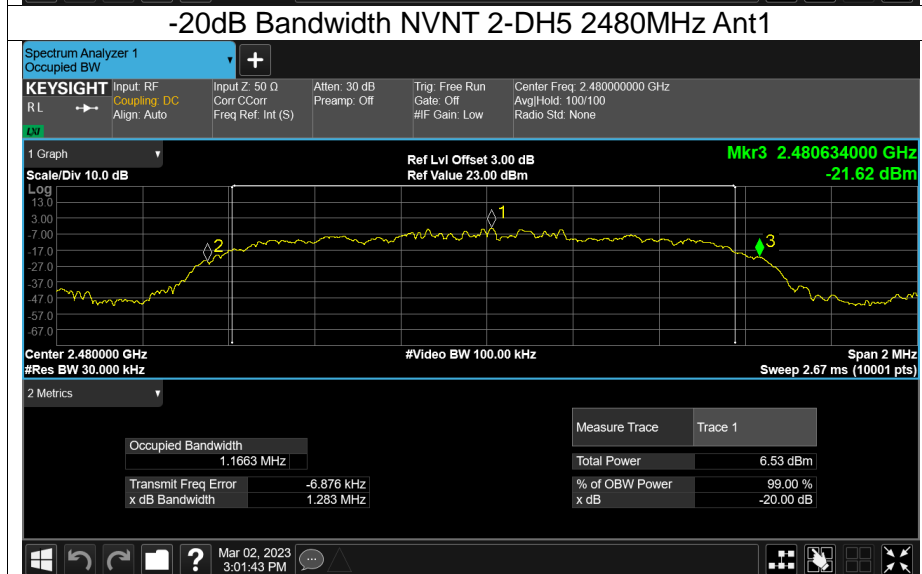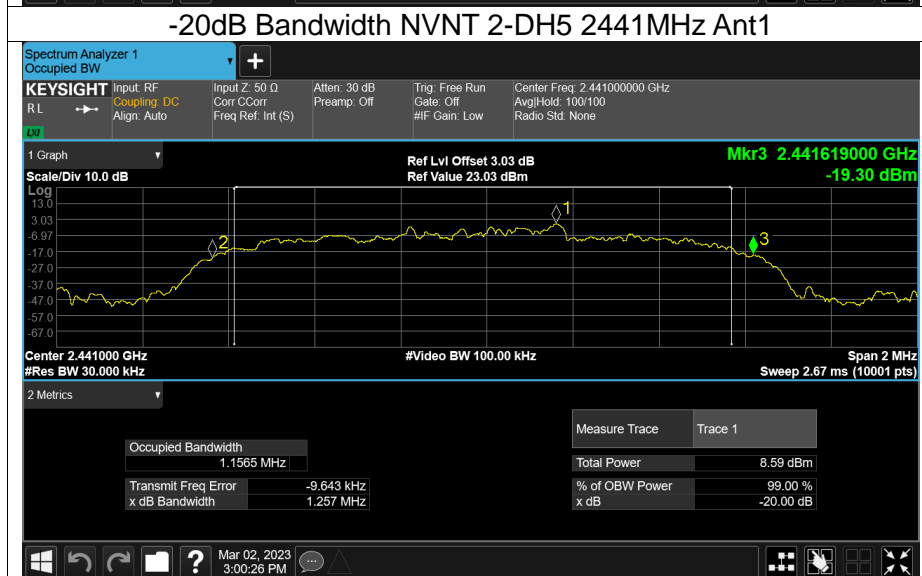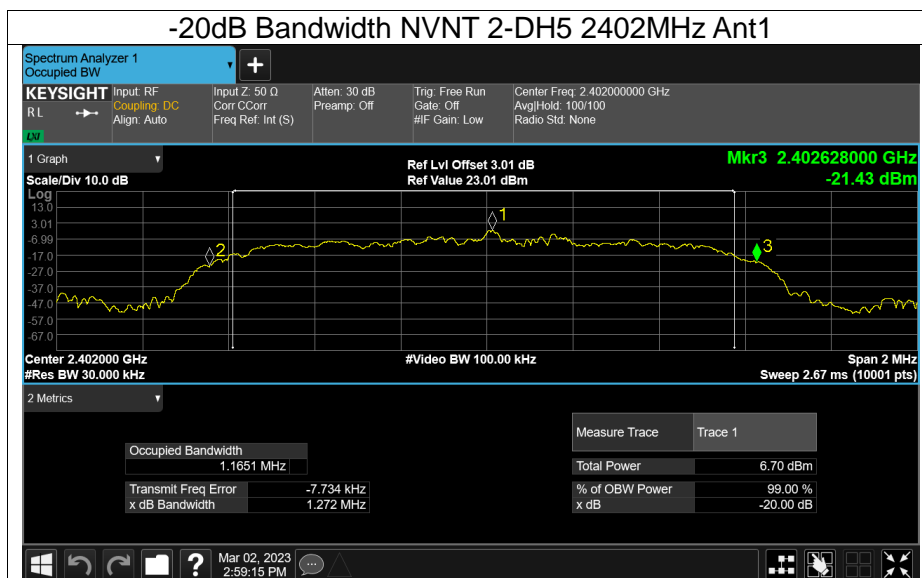

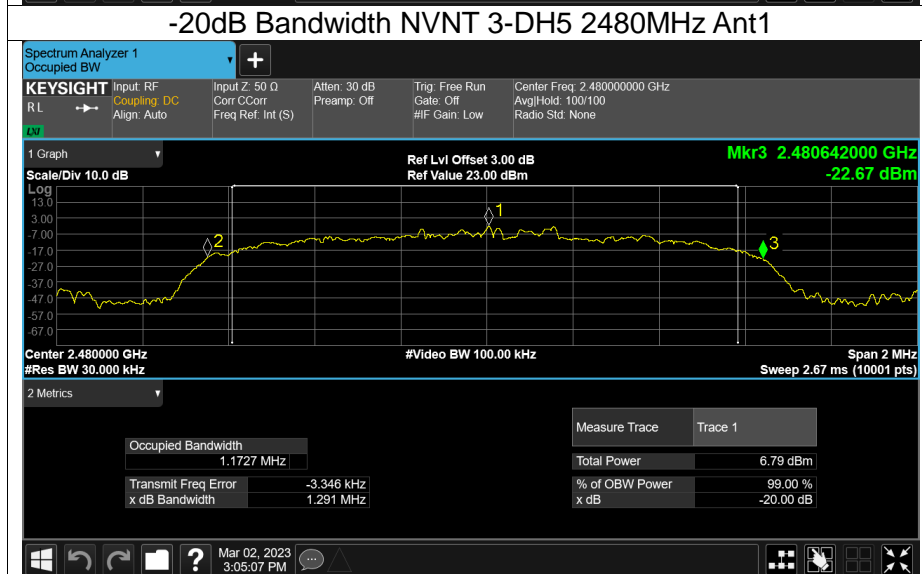
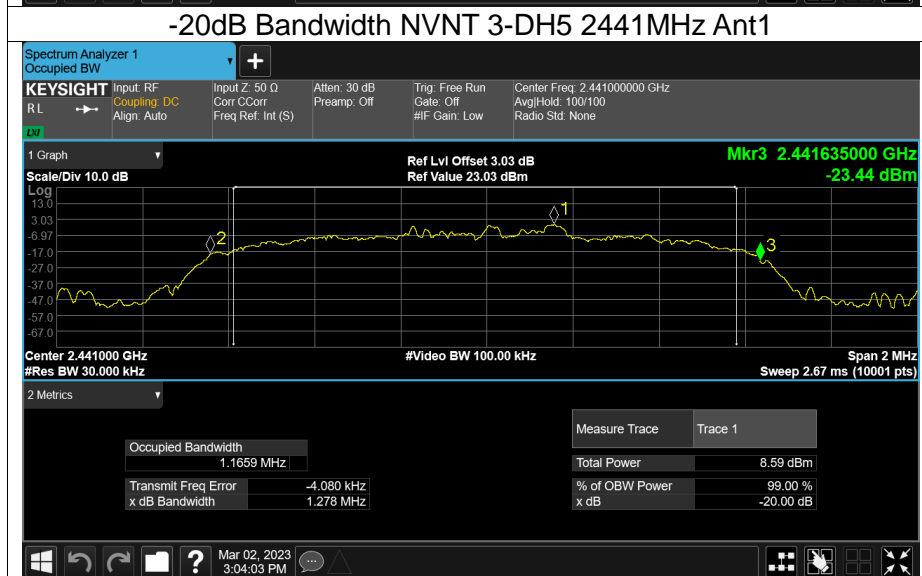
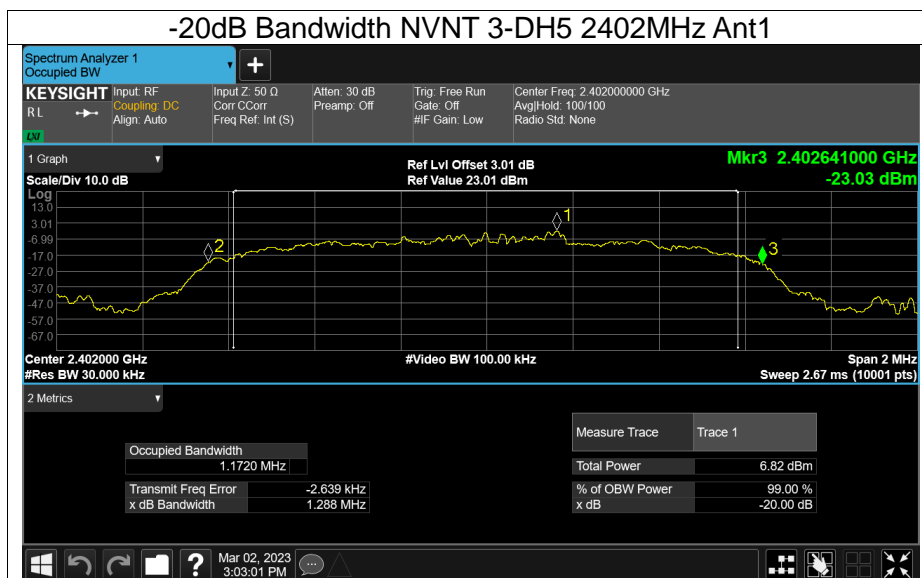







Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.751
NVNT	1-DH5	2441	Ant1	0.756
NVNT	1-DH5	2480	Ant1	0.758
NVNT	2-DH5	2402	Ant1	1.162
NVNT	2-DH5	2441	Ant1	1.158
NVNT	2-DH5	2480	Ant1	1.155
NVNT	3-DH5	2402	Ant1	1.162
NVNT	3-DH5	2441	Ant1	1.189
NVNT	3-DH5	2480	Ant1	1.171



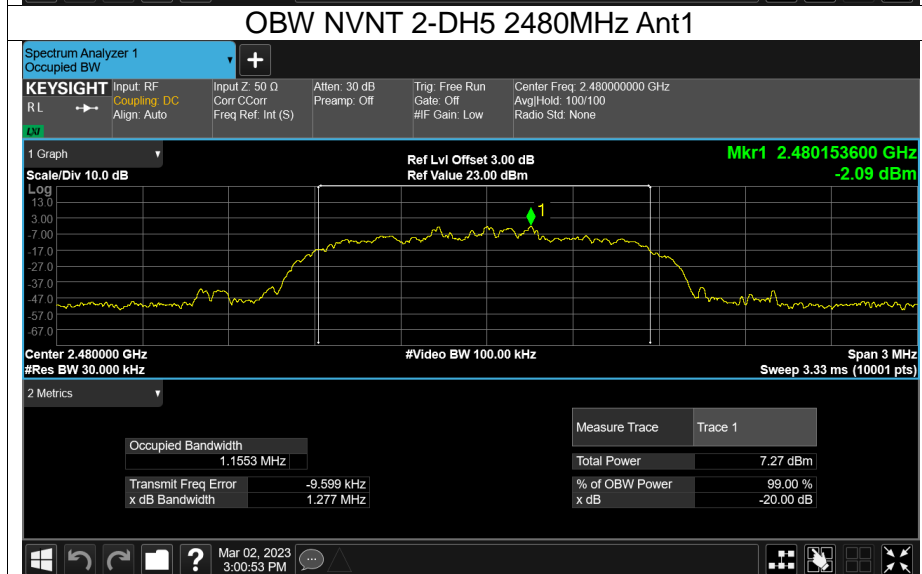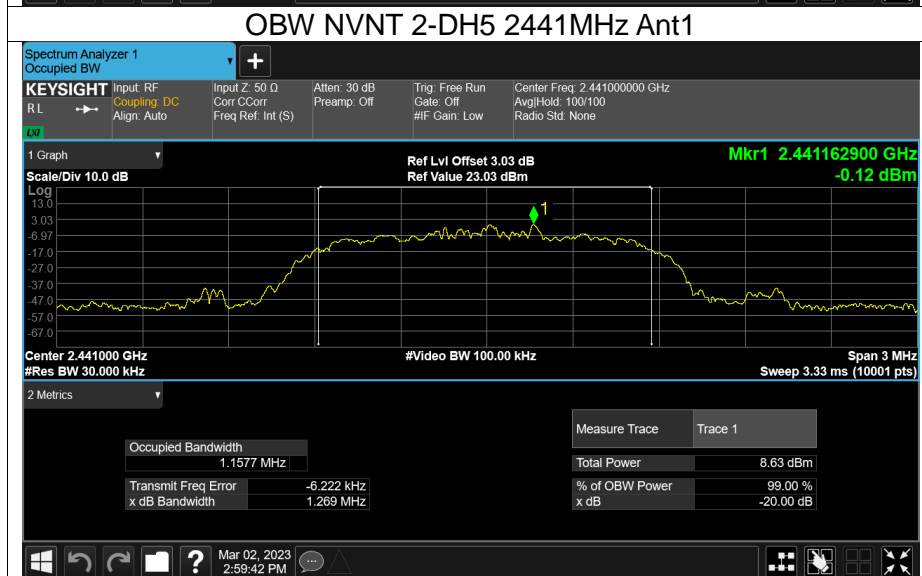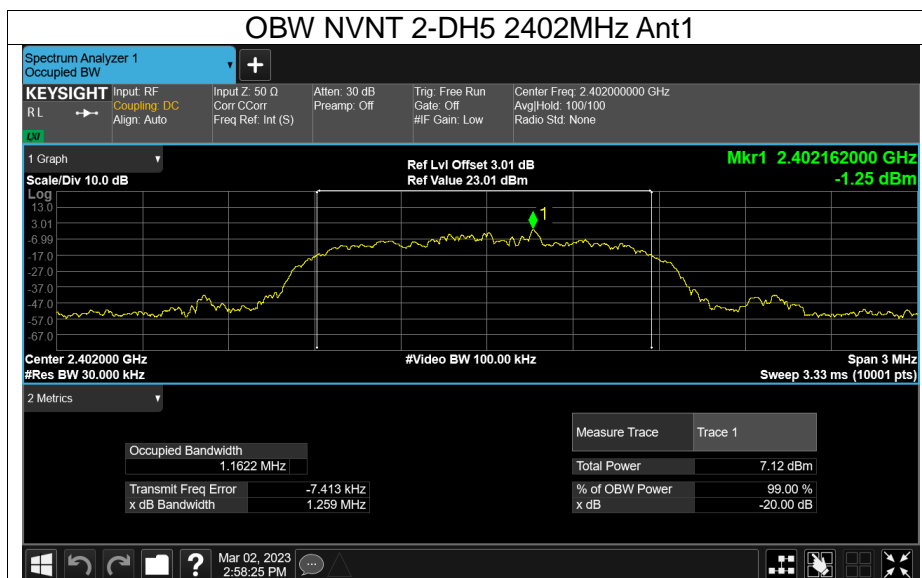

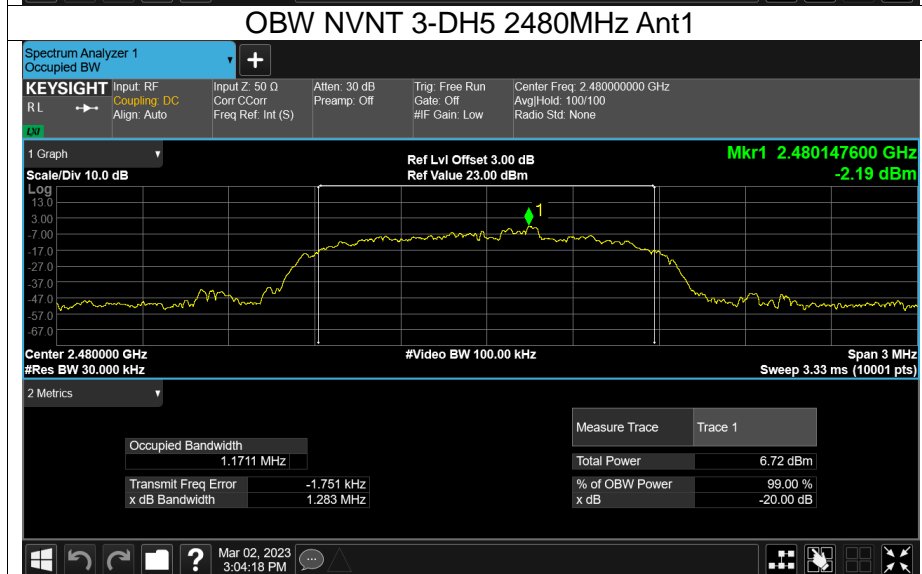
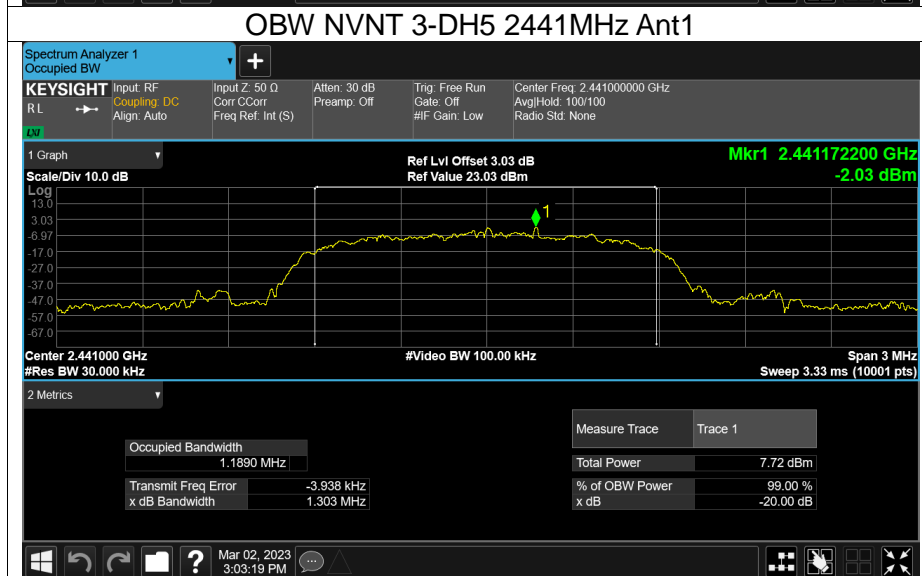
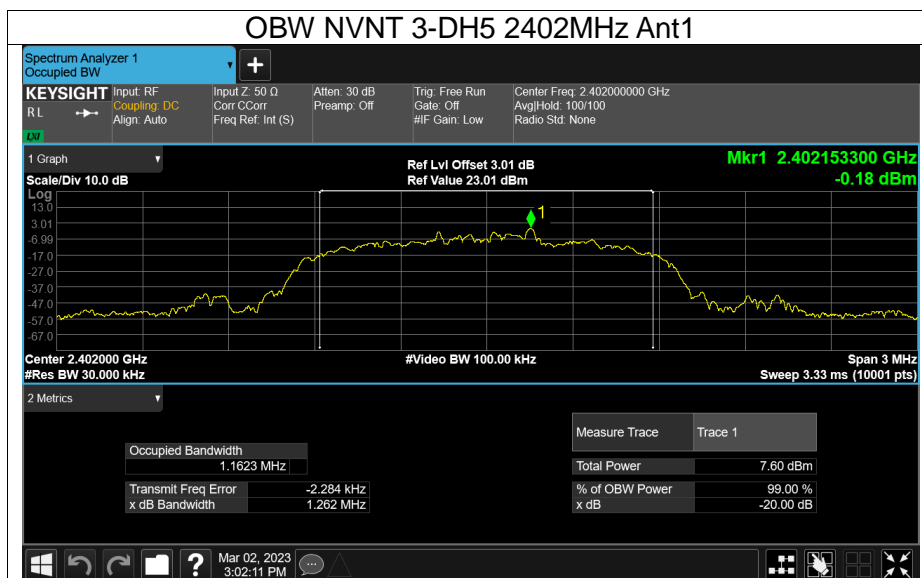







Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.962	2402.902	0.94	0.56	Pass
NVNT	1-DH5	Ant1	2441.012	2441.99	0.978	0.025	Pass
NVNT	1-DH5	Ant1	2478.97	2480.01	1.04	0.025	Pass
NVNT	2-DH5	Ant1	2402.018	2403.004	0.986	0.848	Pass
NVNT	2-DH5	Ant1	2441.032	2442	0.968	0.838	Pass
NVNT	2-DH5	Ant1	2479.002	2480.028	1.026	0.855	Pass
NVNT	3-DH5	Ant1	2402.072	2403.034	0.962	0.859	Pass
NVNT	3-DH5	Ant1	2441.014	2441.91	0.896	0.025	Pass
NVNT	3-DH5	Ant1	2479.012	2479.994	0.982	0.025	Pass



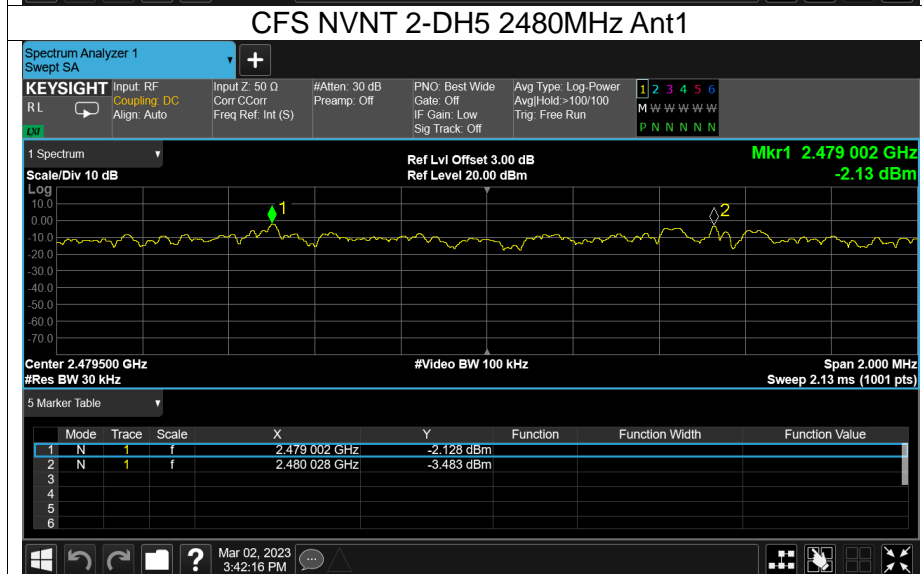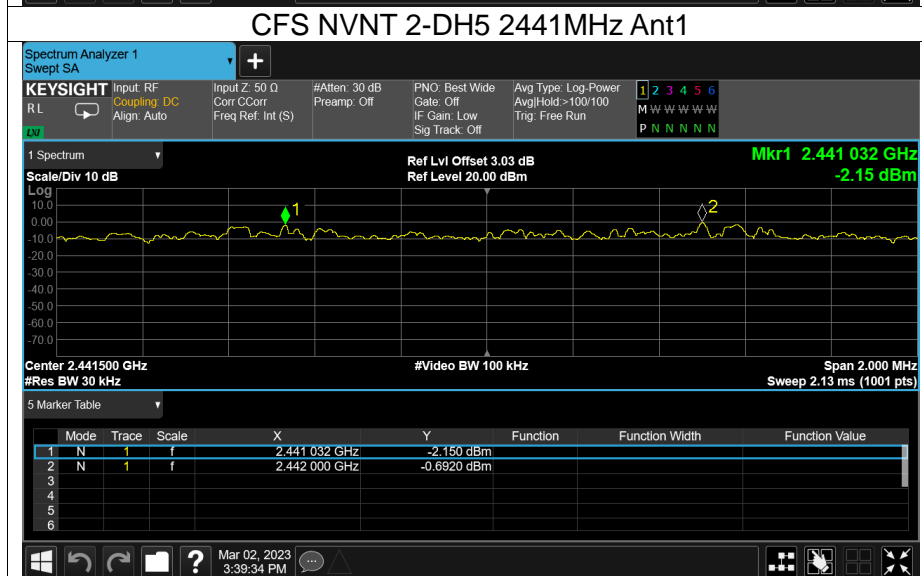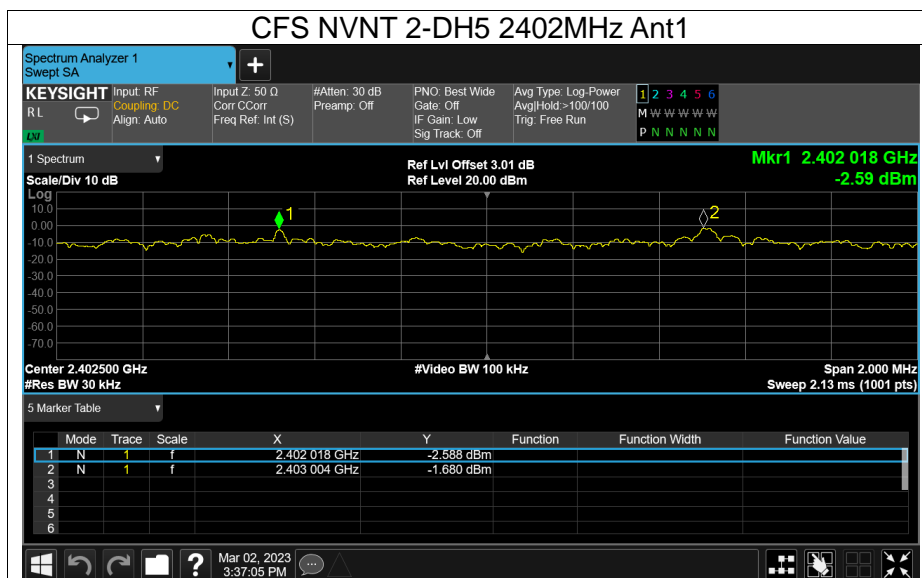

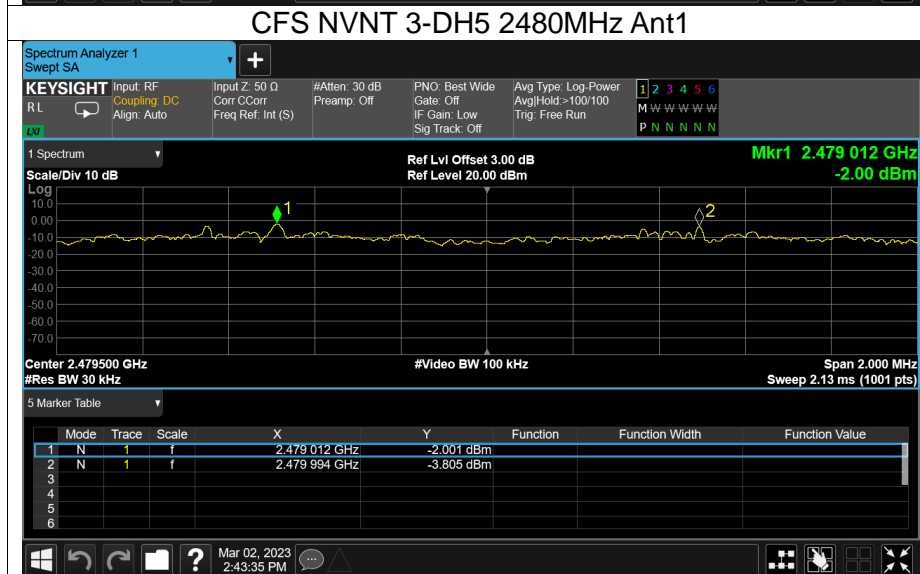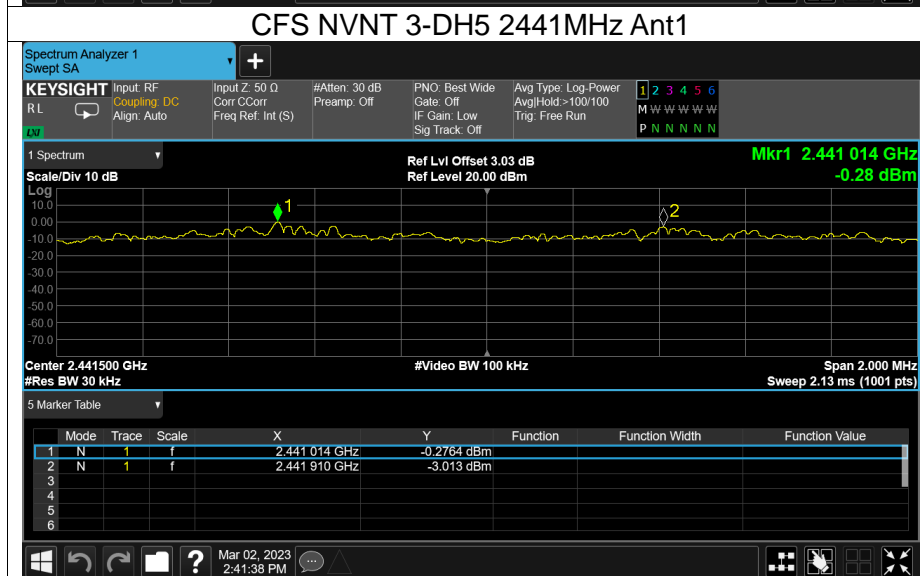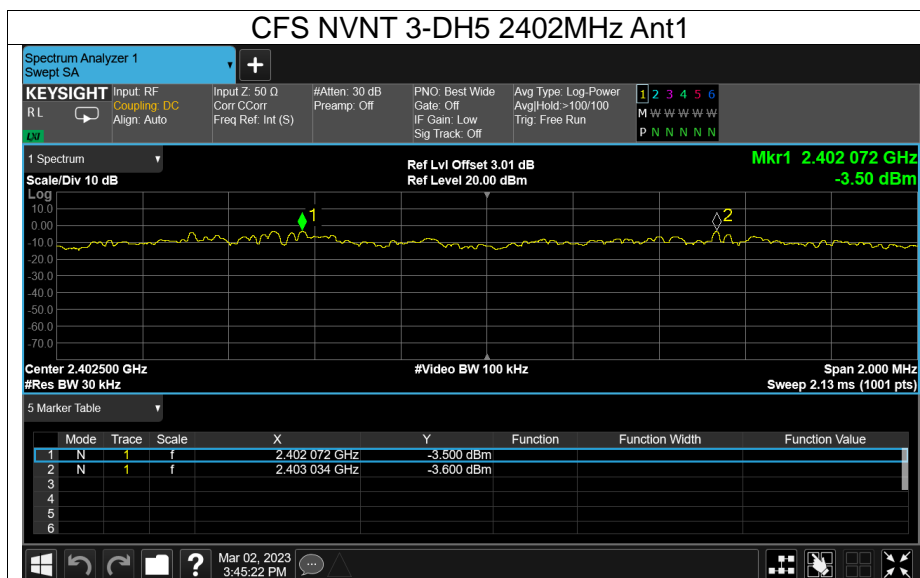



Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-54.45	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54.29	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-53.53	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-52.33	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-52.73	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.86	-20	Pass

