


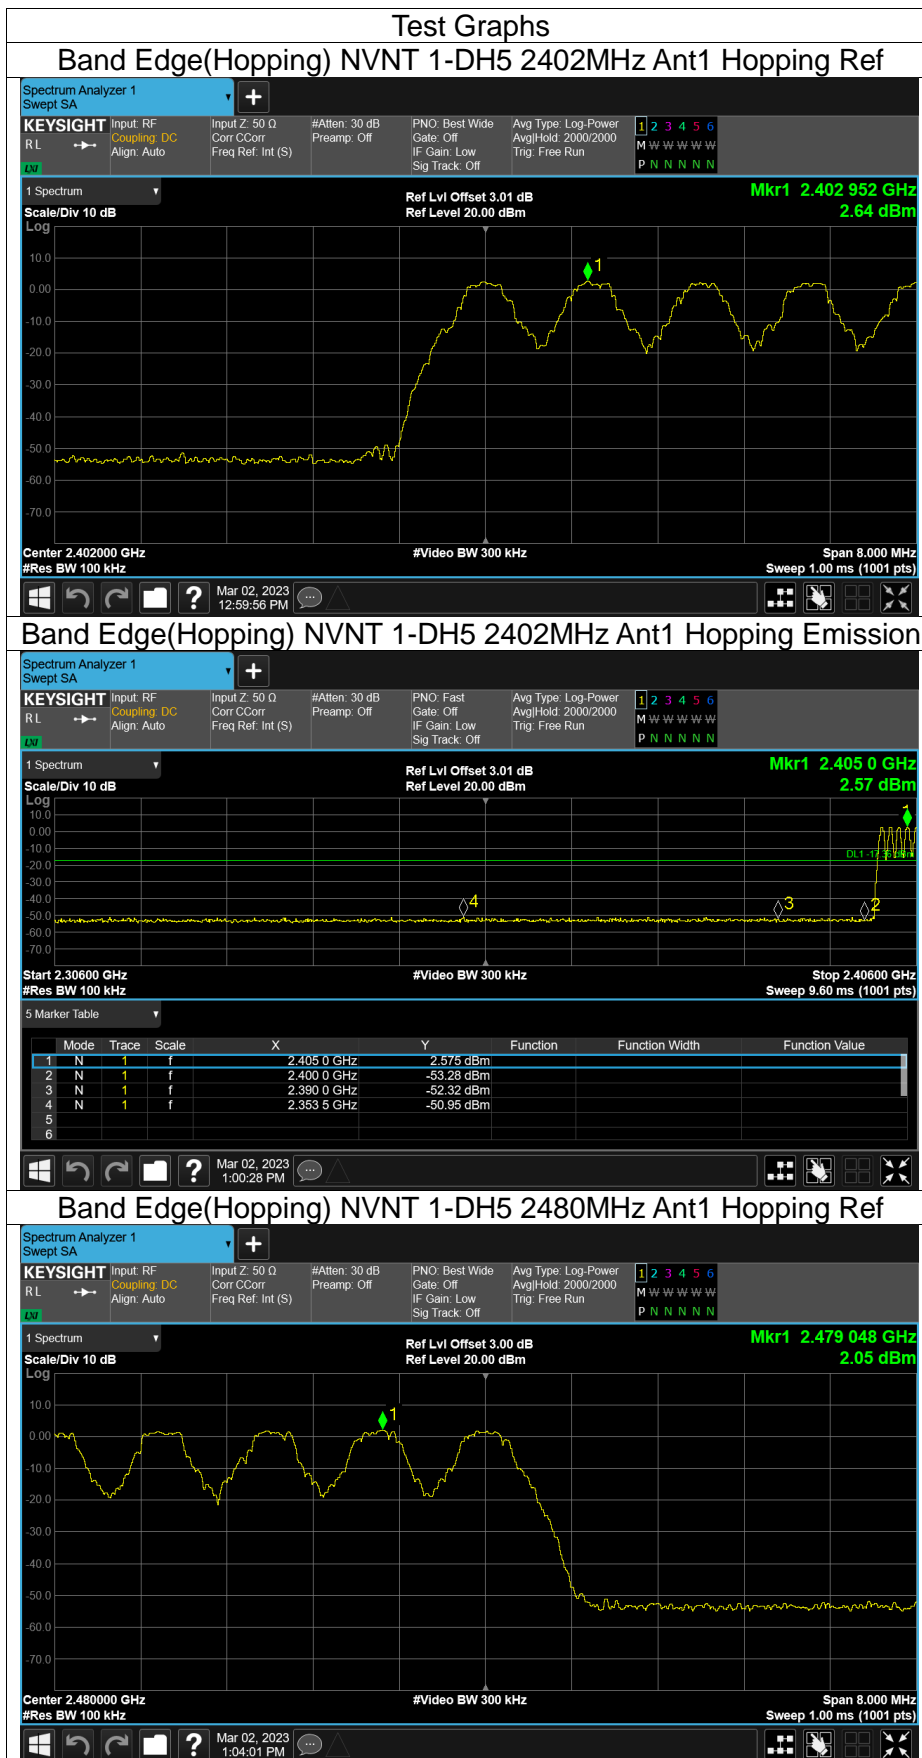




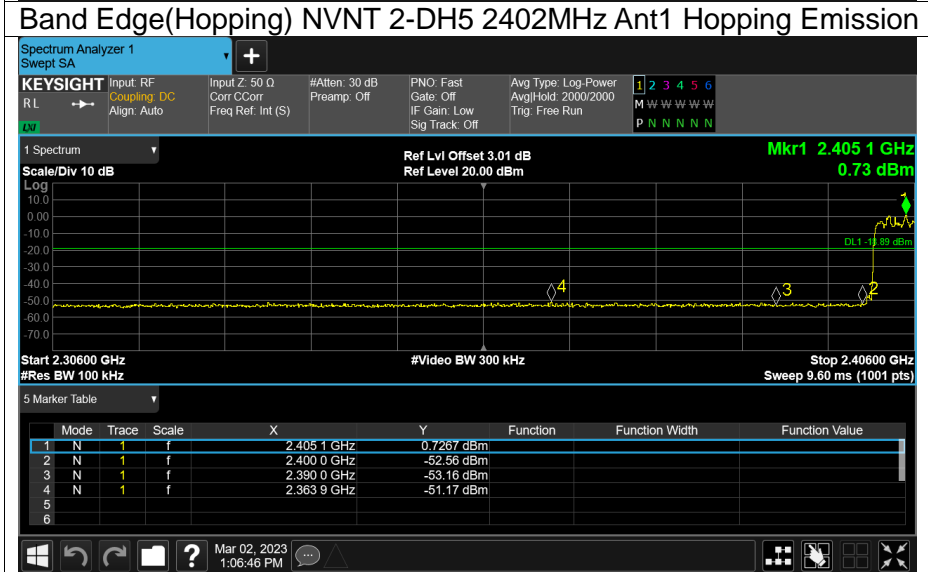





Band Edge (Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-53.58	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-53.25	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-52.28	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-52.37	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-49.52	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-52.83	-20	Pass

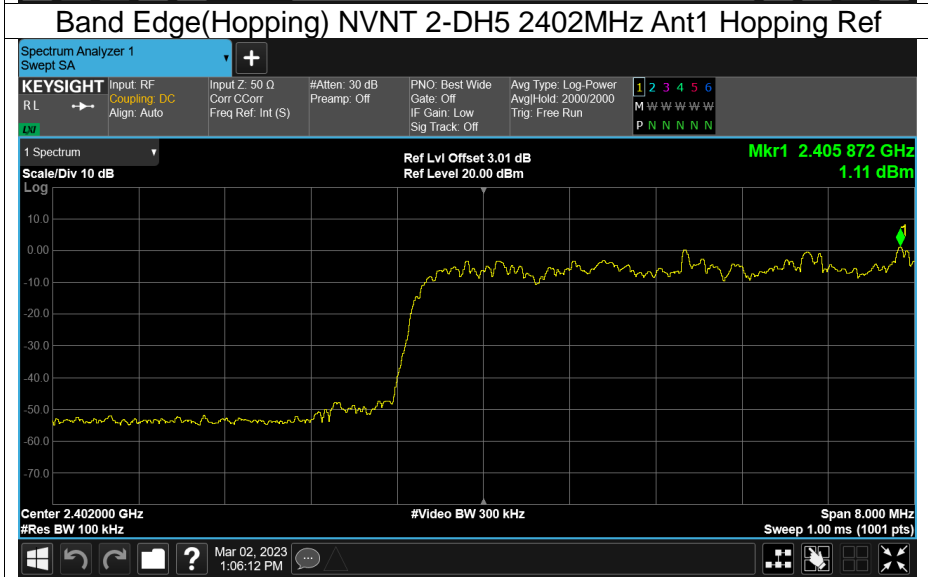

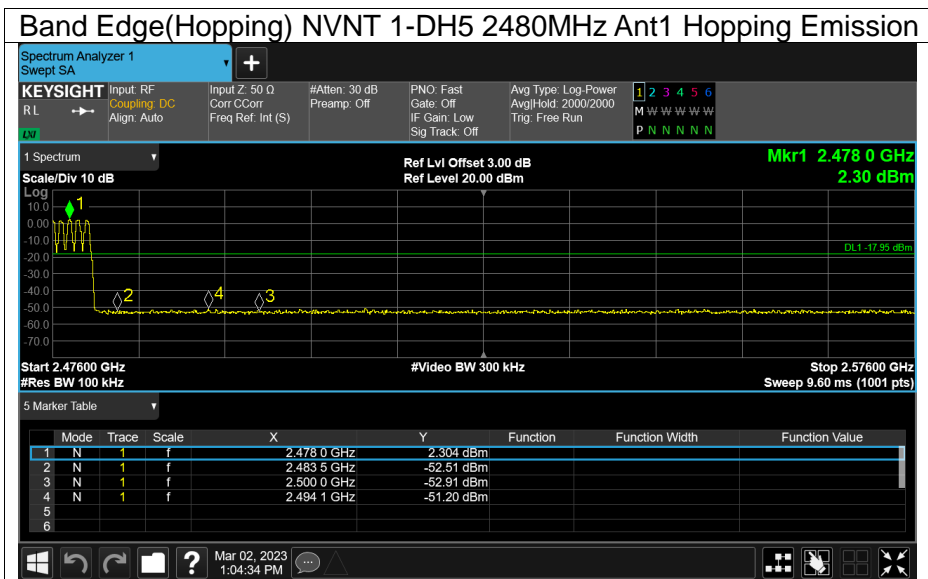

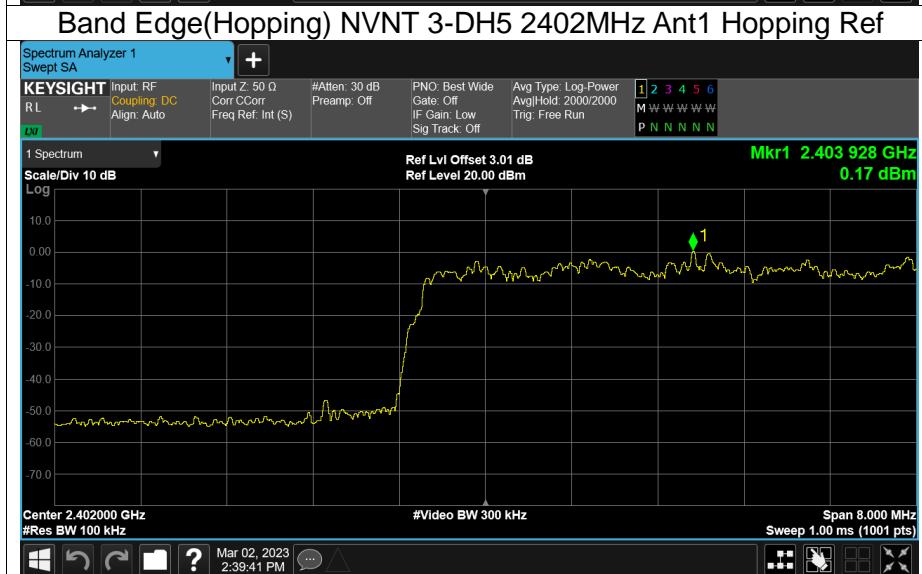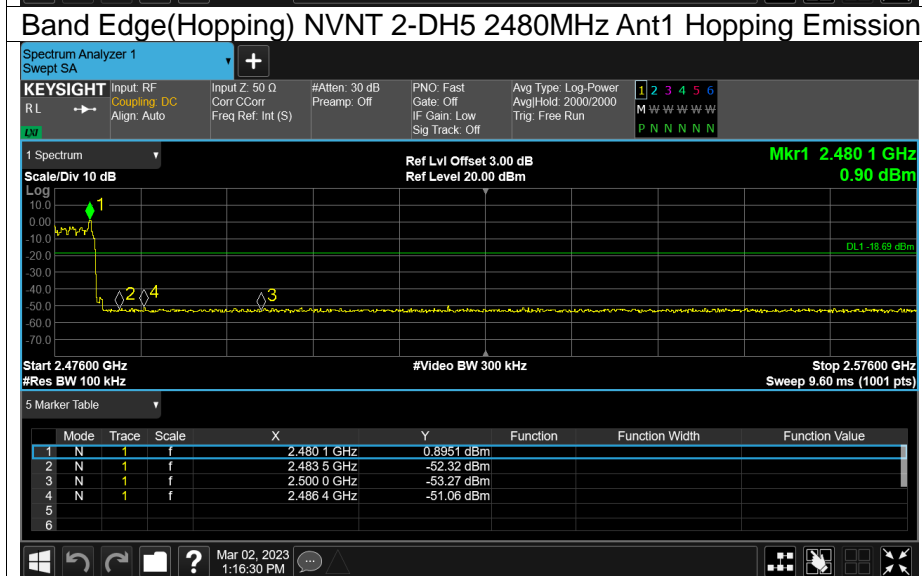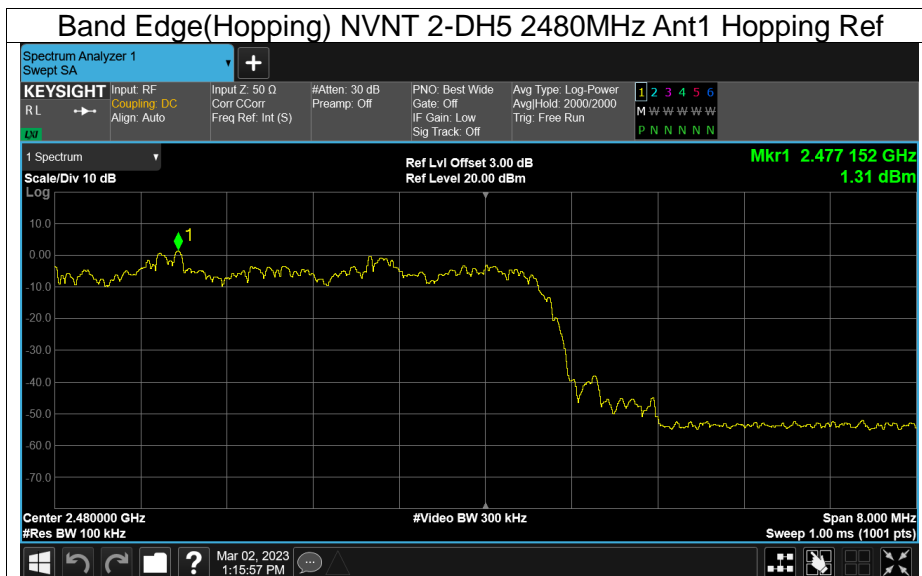


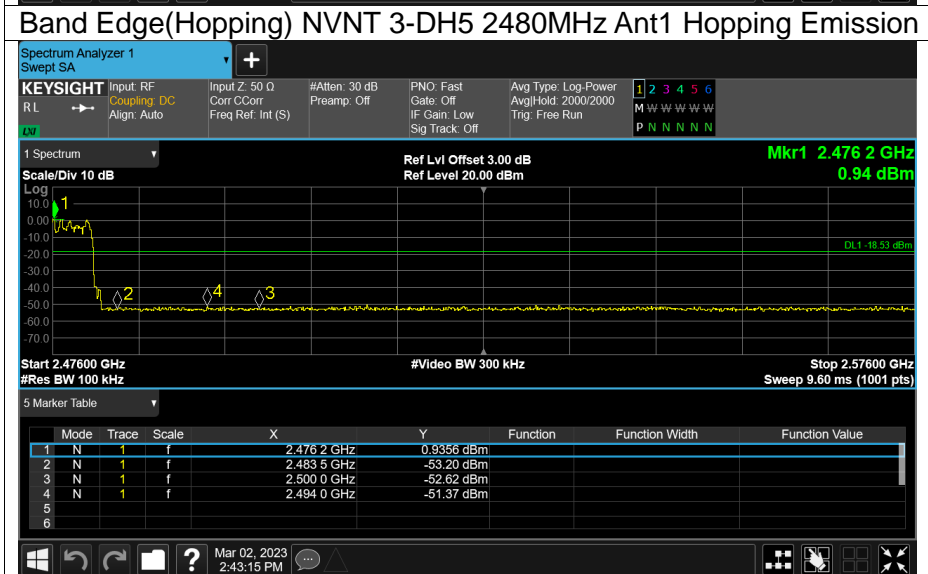
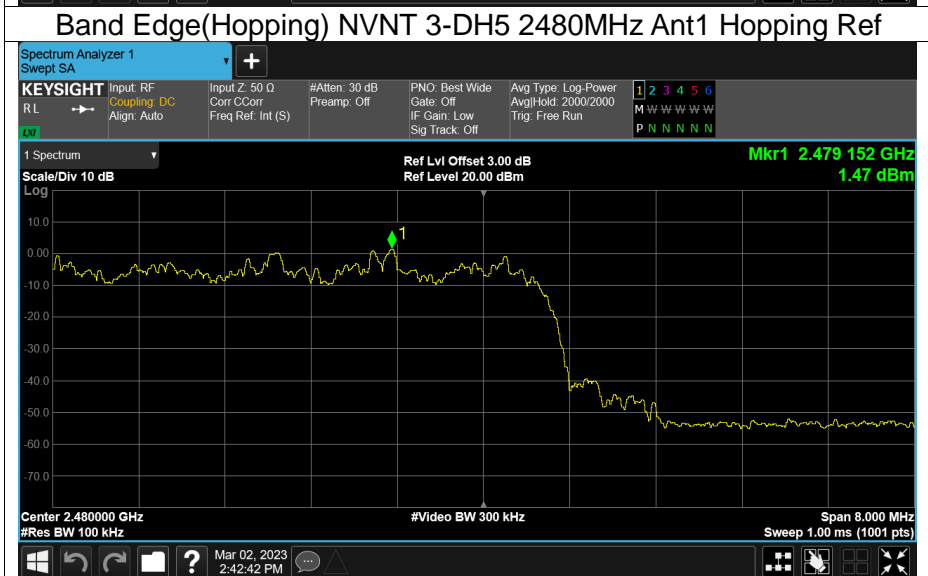
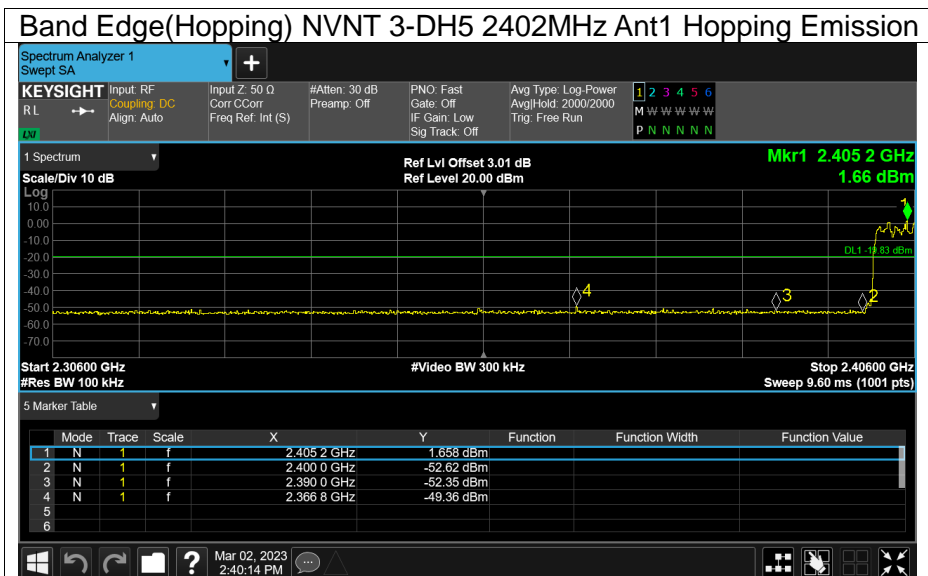










Conducted RF Spurious Emission




Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-47.62	-20	Pass
NVNT	1-DH5	2441	Ant1	-49.5	-20	Pass
NVNT	1-DH5	2480	Ant1	-47.38	-20	Pass
NVNT	2-DH5	2402	Ant1	-46.5	-20	Pass
NVNT	2-DH5	2441	Ant1	-48.5	-20	Pass
NVNT	2-DH5	2480	Ant1	-46.37	-20	Pass
NVNT	3-DH5	2402	Ant1	-47.44	-20	Pass
NVNT	3-DH5	2441	Ant1	-48.28	-20	Pass
NVNT	3-DH5	2480	Ant1	-46.55	-20	Pass



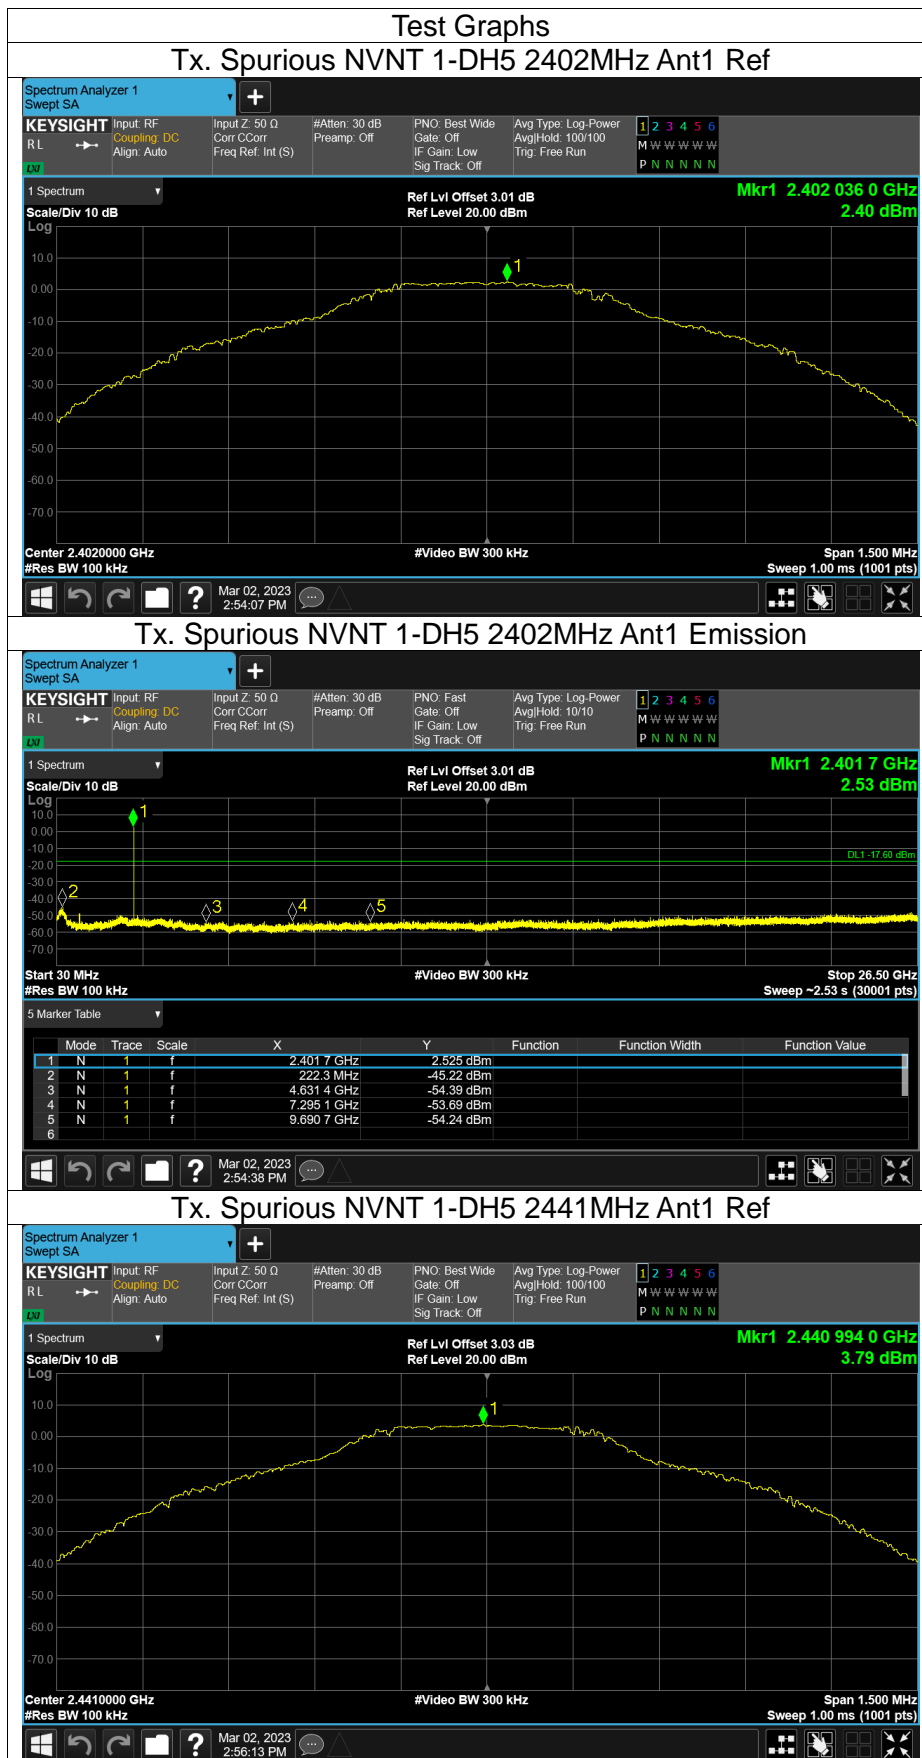


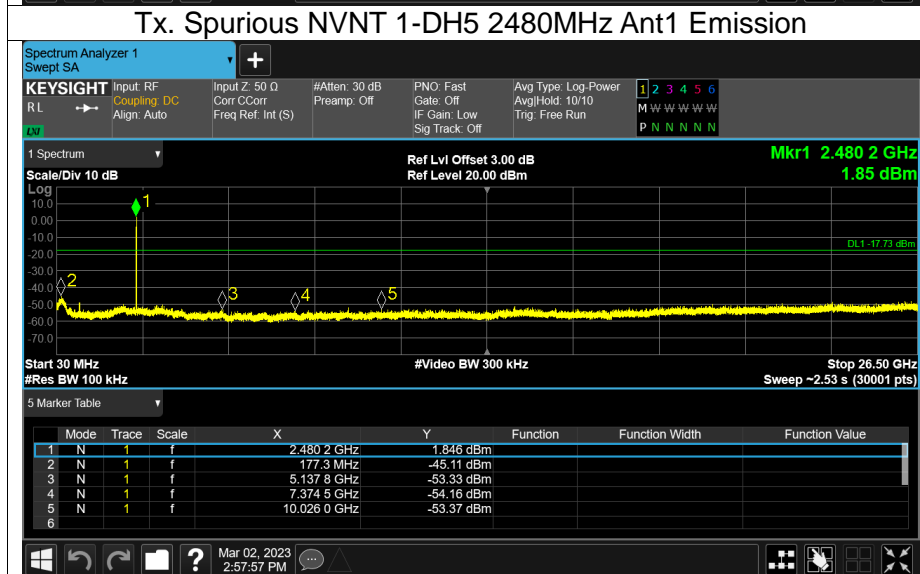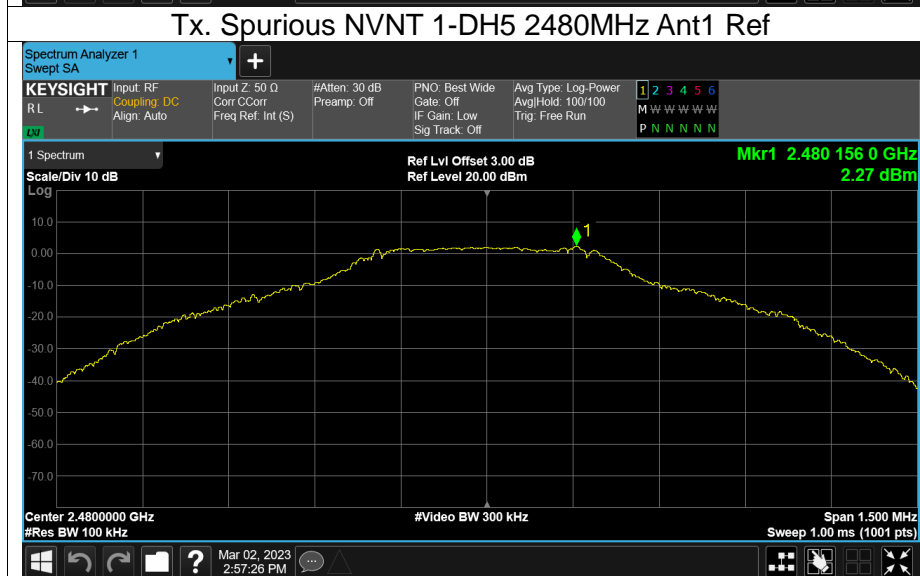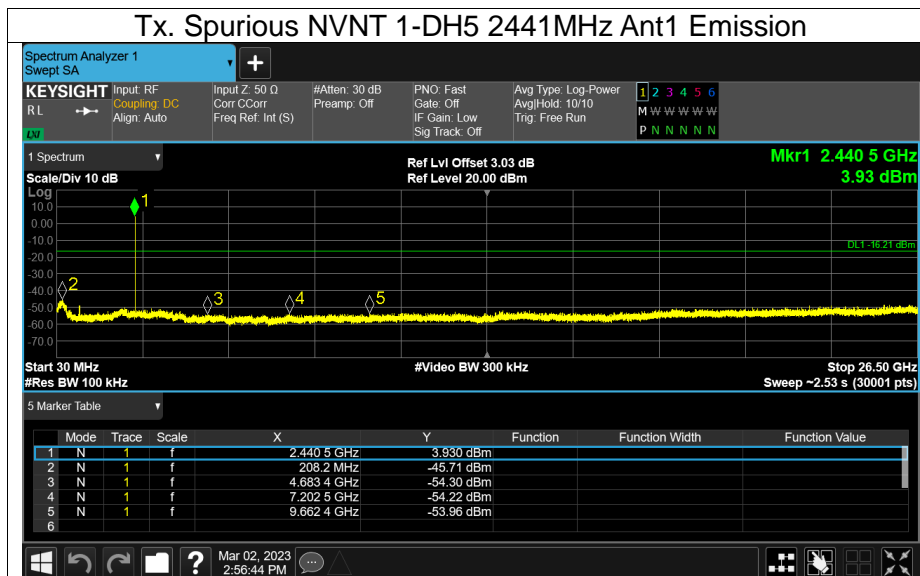

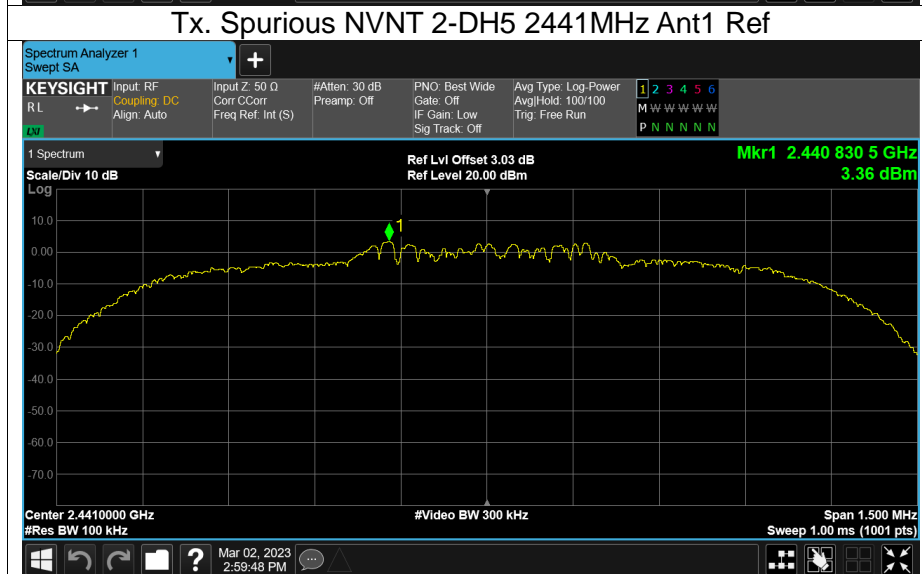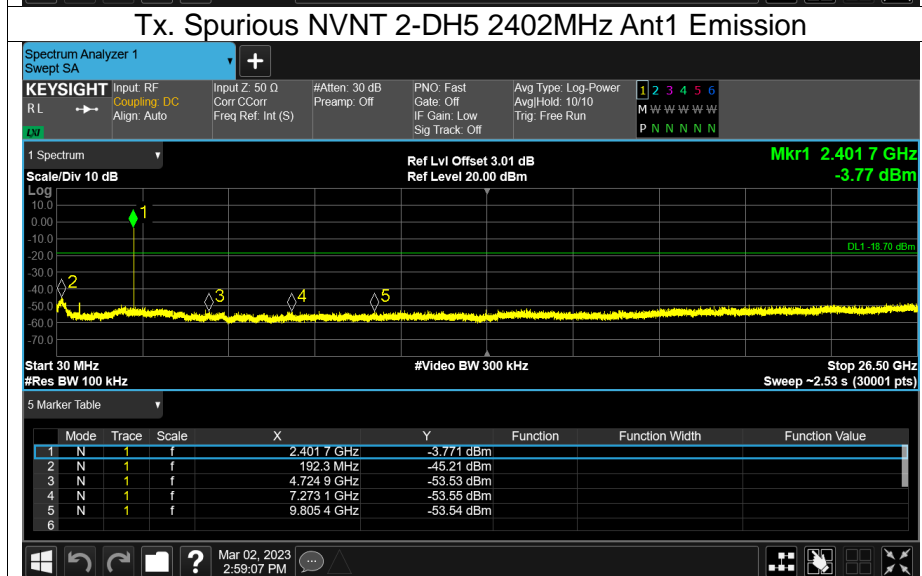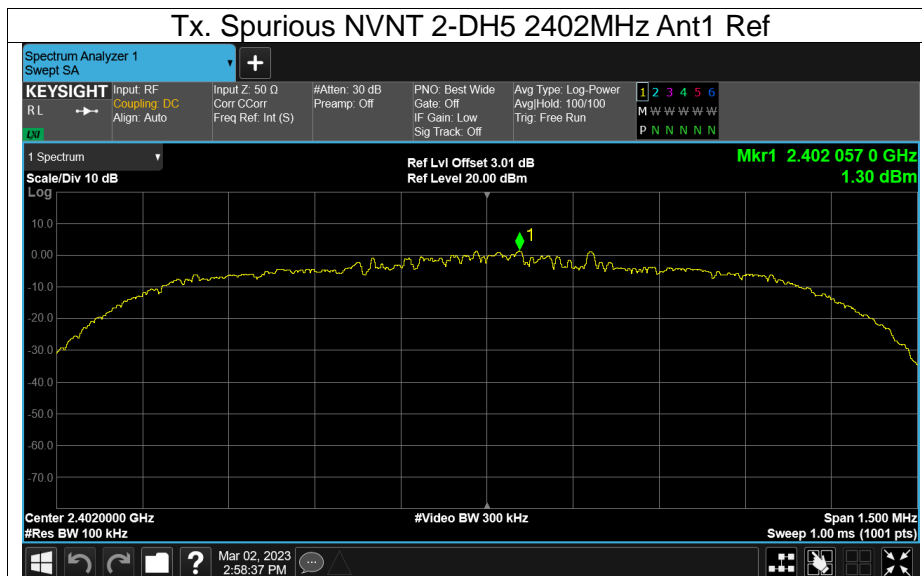

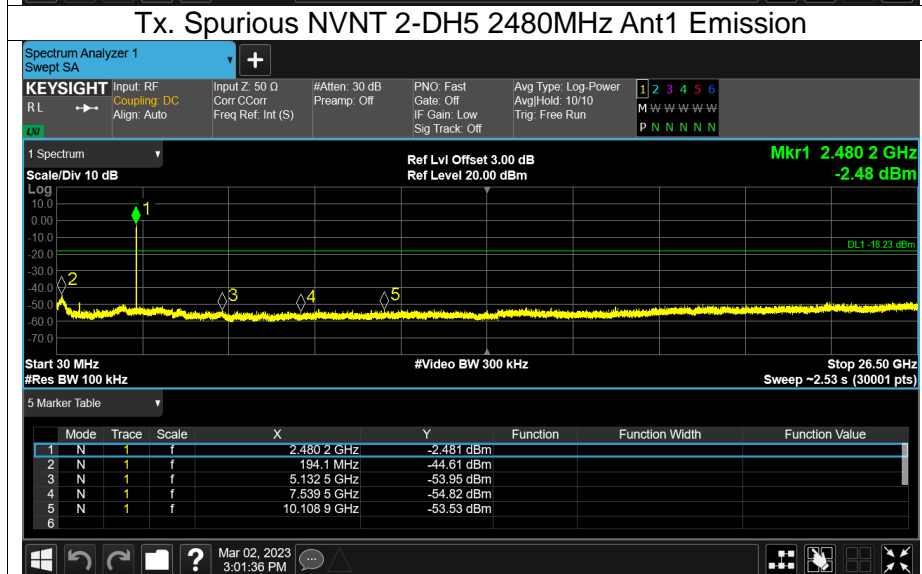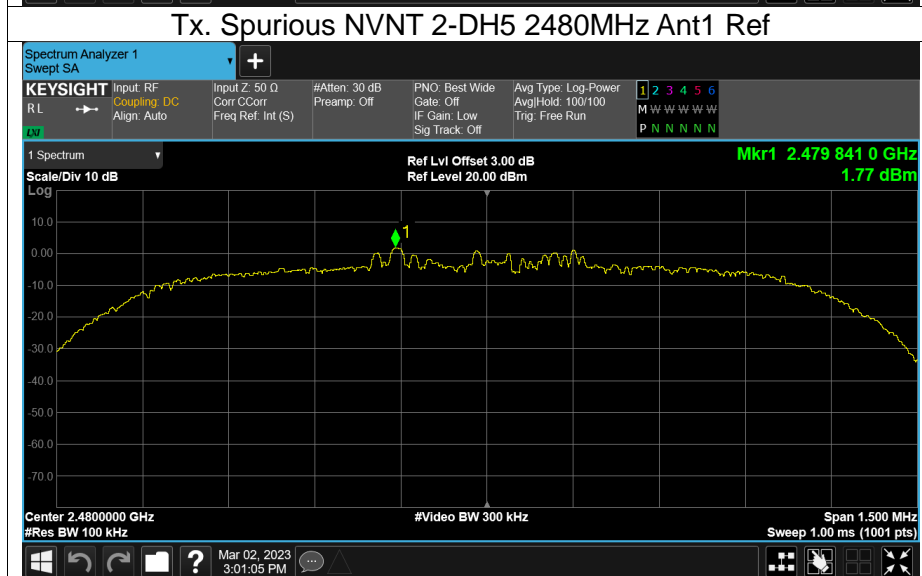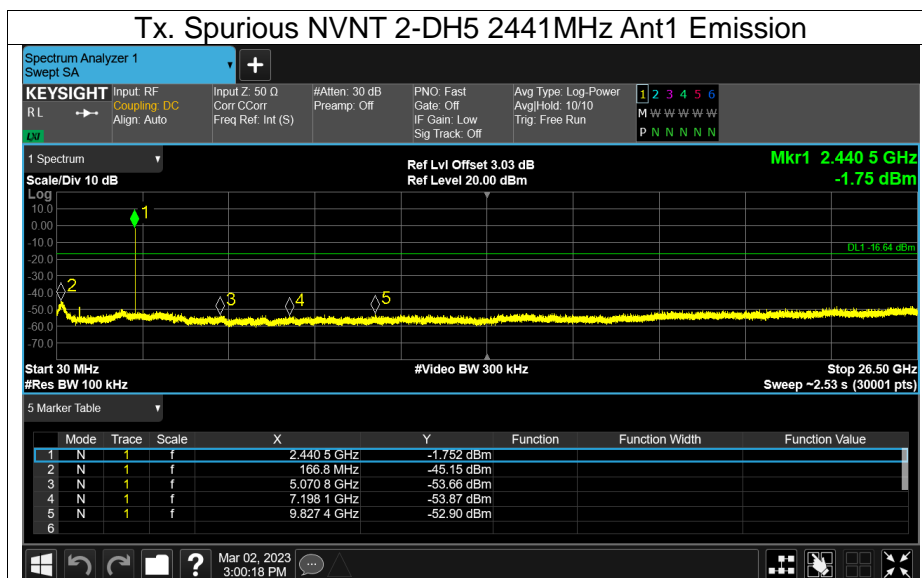

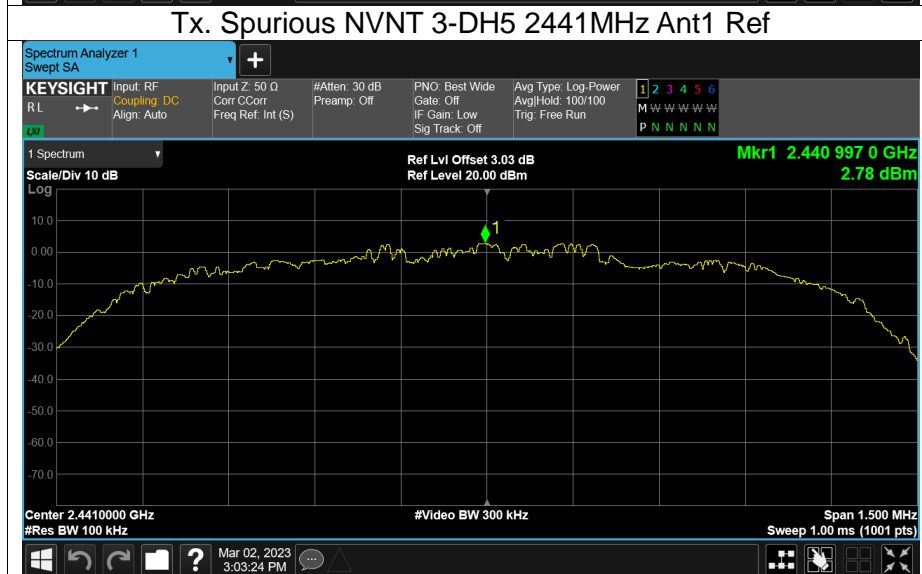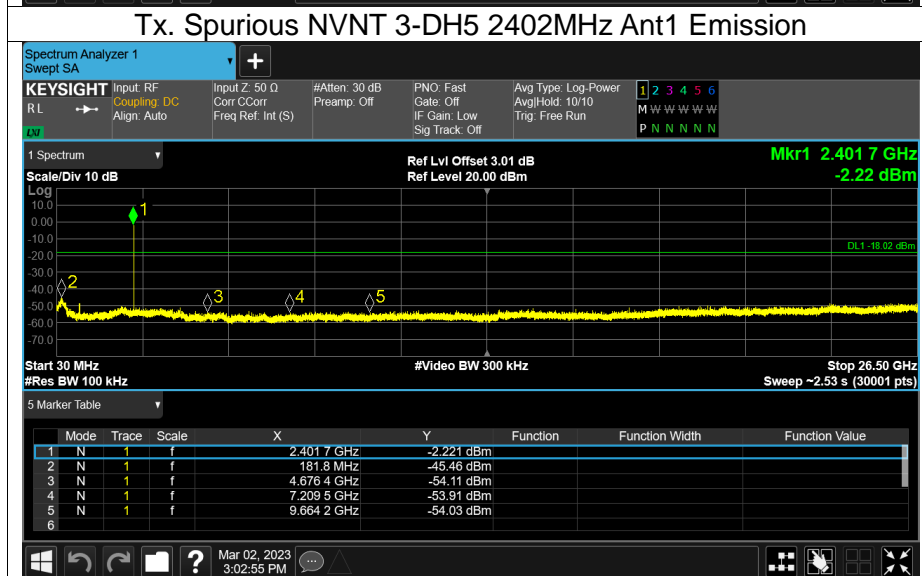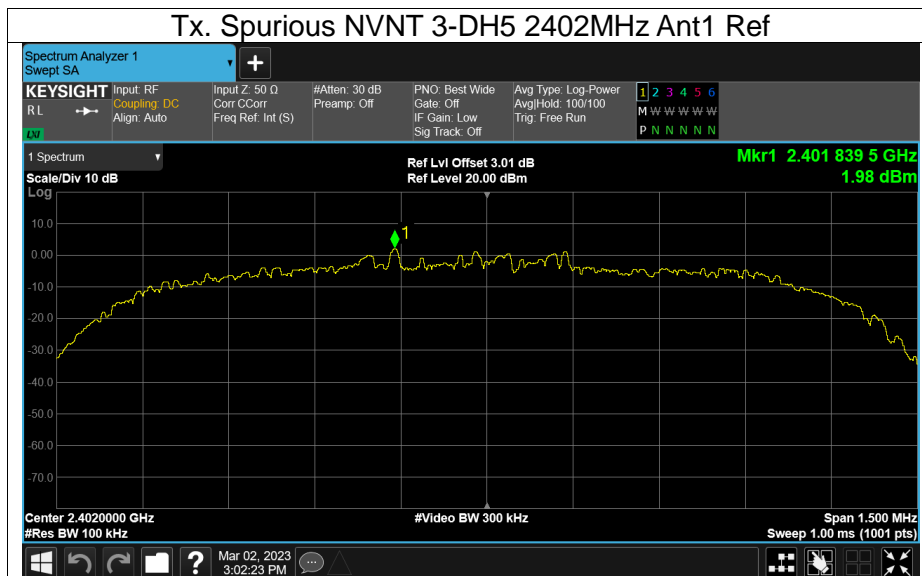

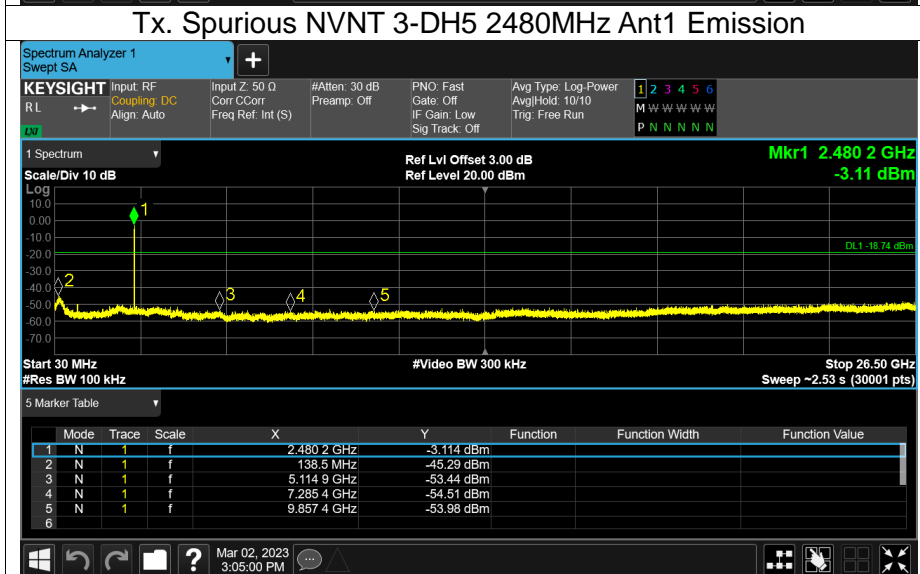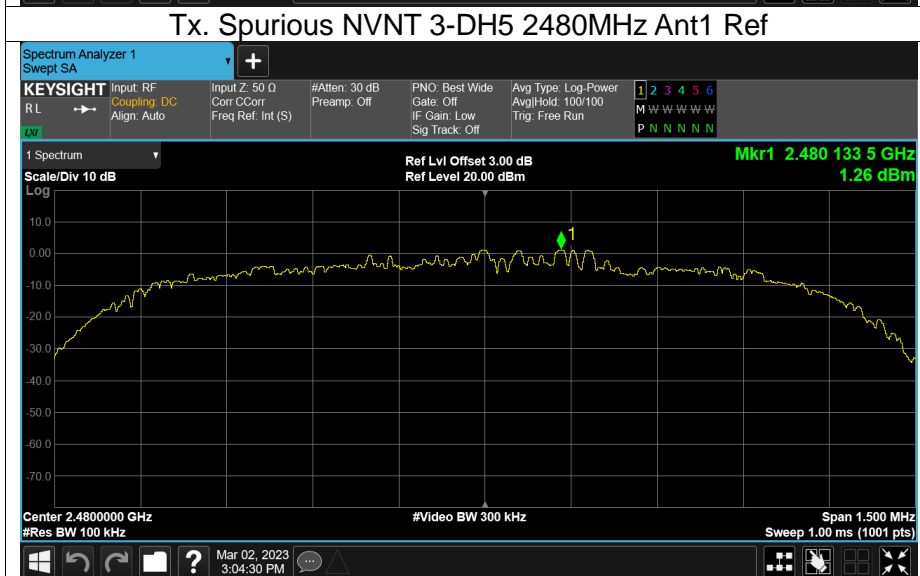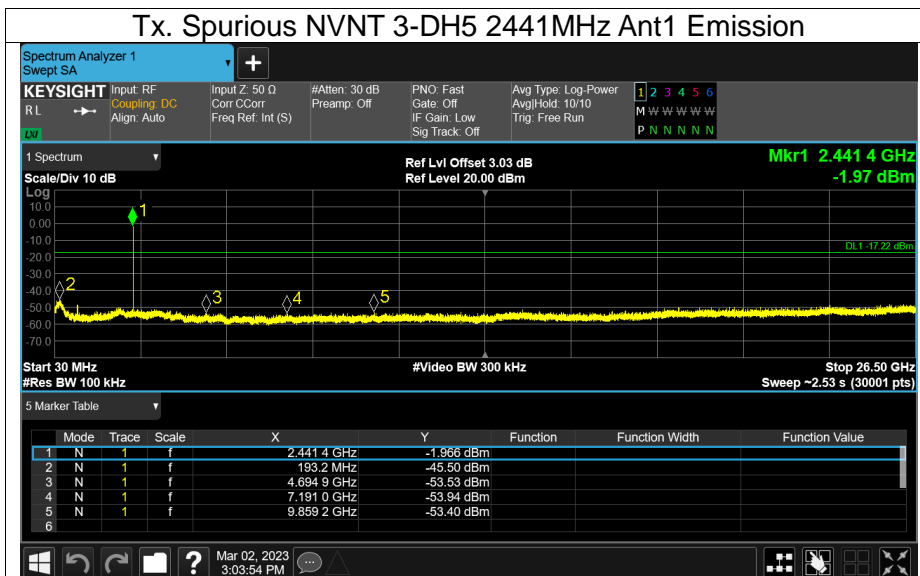




Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	30 -1000	205.7	-66.89	NA	-57	Pass
NVNT	1-DH5	2402	Ant1	1000 -12750	3321.5	-62.04	NA	-47	Pass
NVNT	1-DH5	2441	Ant1	30 -1000	142.55	-67.88	NA	-57	Pass
NVNT	1-DH5	2441	Ant1	1000 -12750	5178.5	-62.18	NA	-47	Pass
NVNT	1-DH5	2480	Ant1	30 -1000	199.55	-68.20	NA	-57	Pass
NVNT	1-DH5	2480	Ant1	1000 -12750	2563	-61.42	NA	-47	Pass
NVNT	2-DH5	2402	Ant1	30 -1000	142.55	-67.70	NA	-57	Pass
NVNT	2-DH5	2402	Ant1	1000 -12750	10851.5	-62.33	NA	-47	Pass
NVNT	2-DH5	2441	Ant1	30 -1000	197.2	-68.47	NA	-57	Pass
NVNT	2-DH5	2441	Ant1	1000 -12750	2542.5	-62.23	NA	-47	Pass
NVNT	2-DH5	2480	Ant1	30 -1000	198	-68.07	NA	-57	Pass
NVNT	2-DH5	2480	Ant1	1000 -12750	2472.5	-61.92	NA	-47	Pass
NVNT	3-DH5	2402	Ant1	30 -1000	188.4	-68.72	NA	-57	Pass
NVNT	3-DH5	2402	Ant1	1000 -12750	11879.5	-62.03	NA	-47	Pass
NVNT	3-DH5	2441	Ant1	30 -1000	190.95	-68.10	NA	-57	Pass
NVNT	3-DH5	2441	Ant1	1000 -12750	2007	-62.08	NA	-47	Pass
NVNT	3-DH5	2480	Ant1	30 -1000	186.9	-68.02	NA	-57	Pass
NVNT	3-DH5	2480	Ant1	1000 -12750	3291	-62.33	NA	-47	Pass




Test Graphs


Rx. Spurious NVNT 1-DH5 2402MHz Ant1

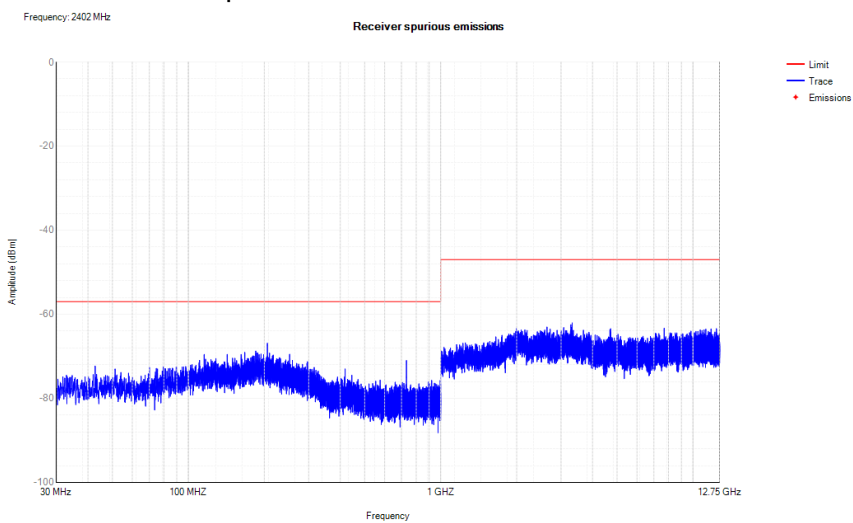

Rx. Spurious NVNT 1-DH5 2441MHz Ant1

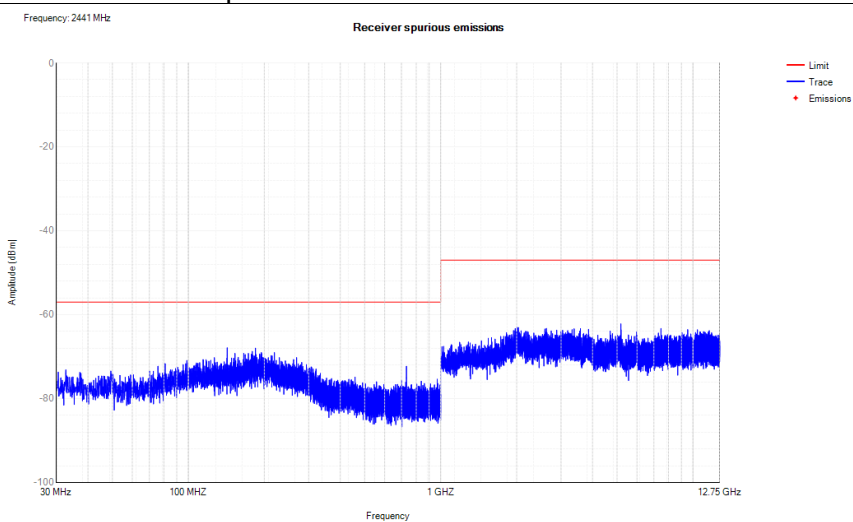


Rx. Spurious NVNT 1-DH5 2480MHz Ant1

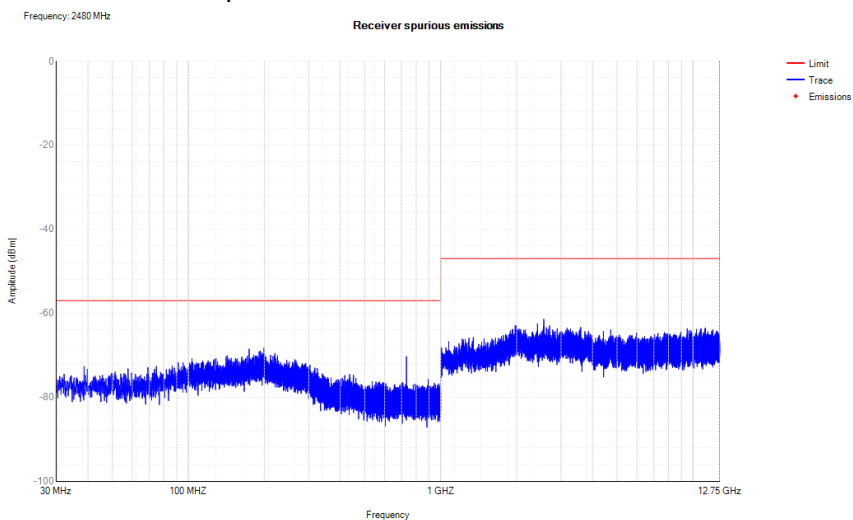





Rx. Spurious NVNT 2-DH5 2402MHz Ant1

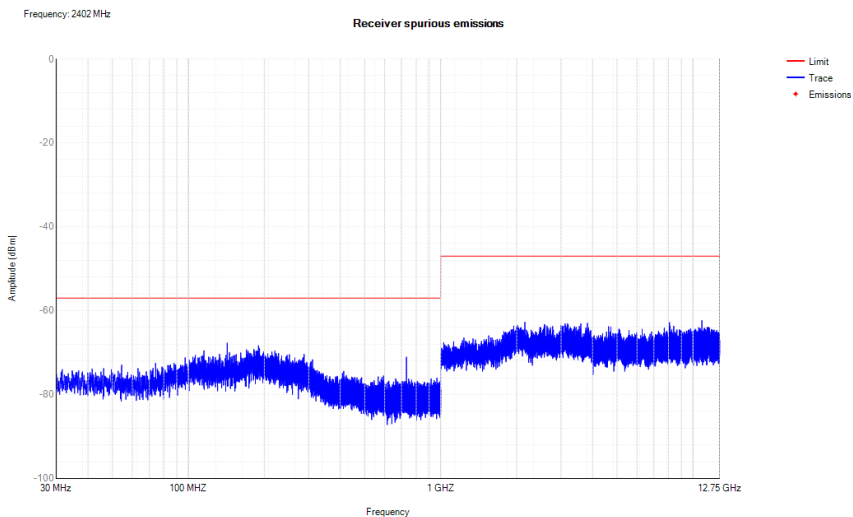

Rx. Spurious NVNT 2-DH5 2441MHz Ant1

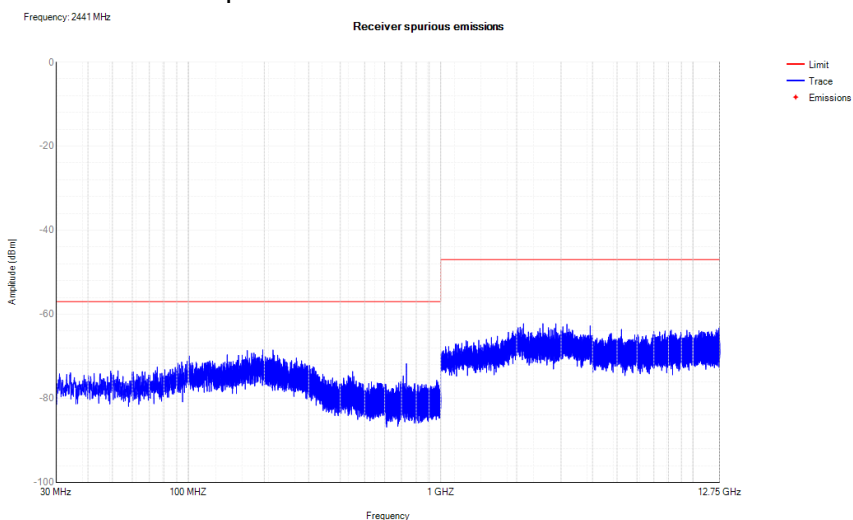


Rx. Spurious NVNT 2-DH5 2480MHz Ant1

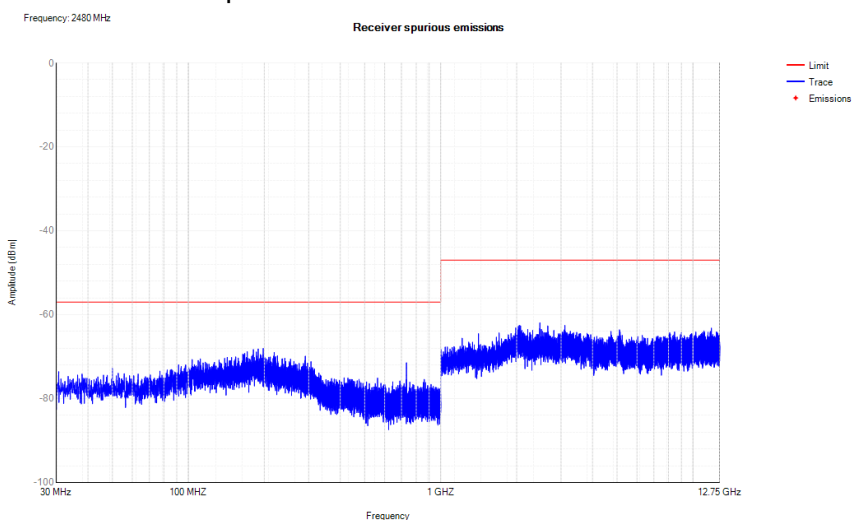





Rx. Spurious NVNT 3-DH5 2402MHz Ant1

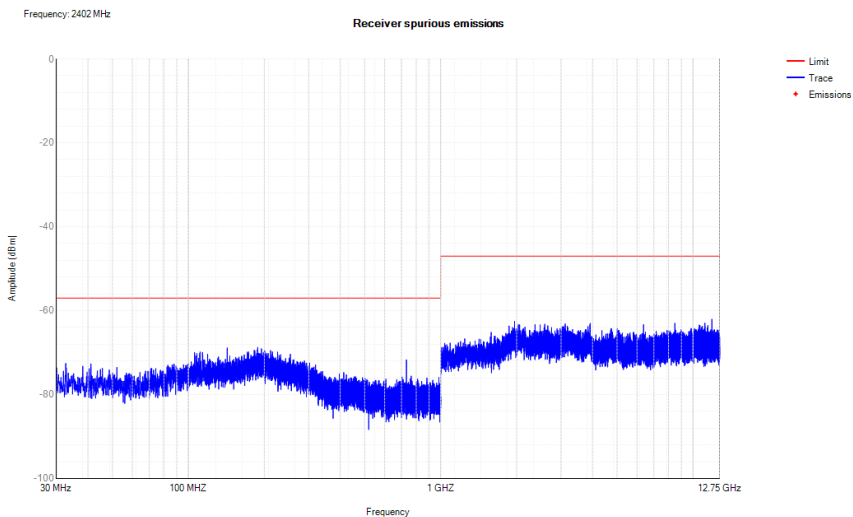

Rx. Spurious NVNT 3-DH5 2441MHz Ant1

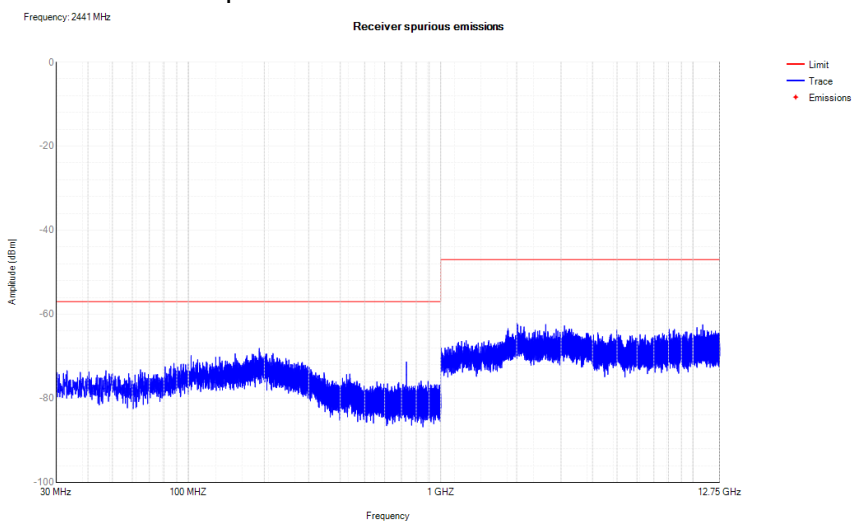


Rx. Spurious NVNT 3-DH5 2480MHz Ant1

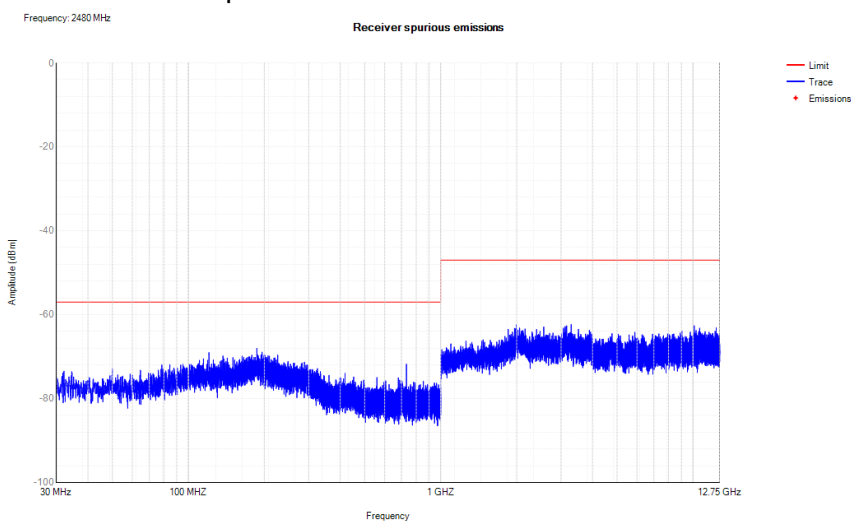




Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

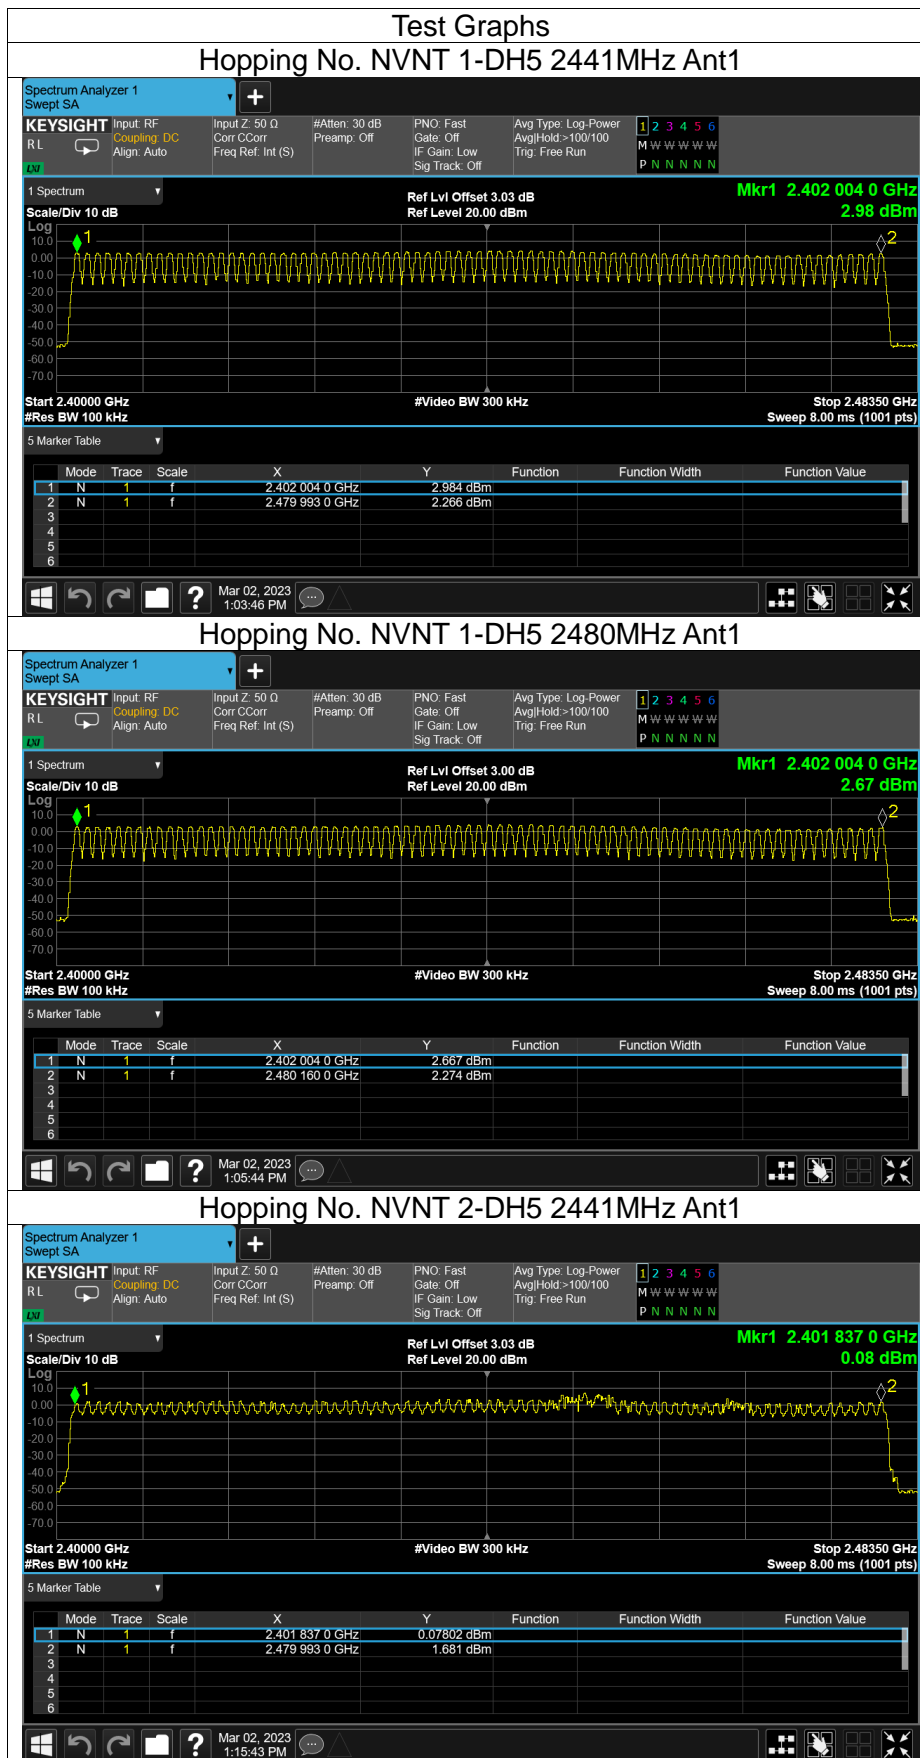


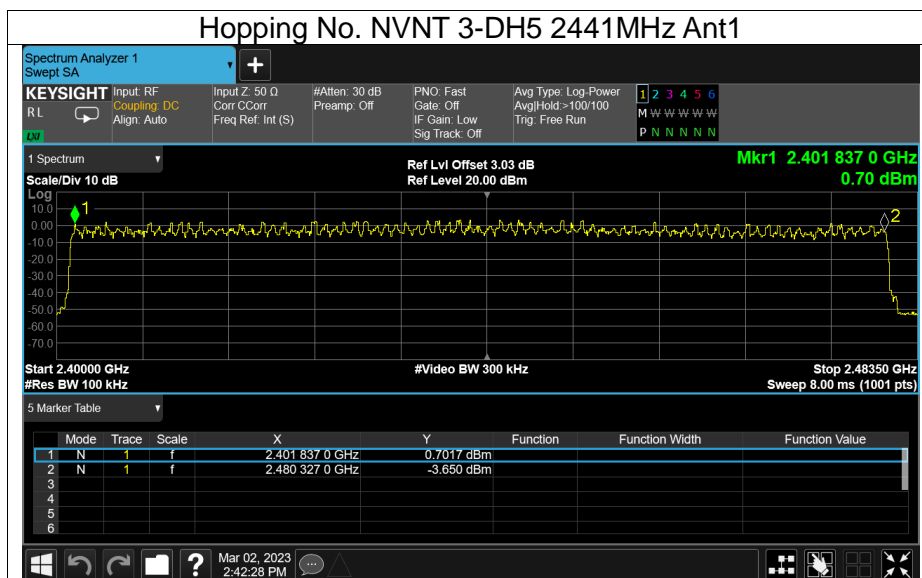



APPENDIX II: PHOTOS OF TEST SETUP

Radiated Spurious Emission Test Setup Photo - Below 1GHz

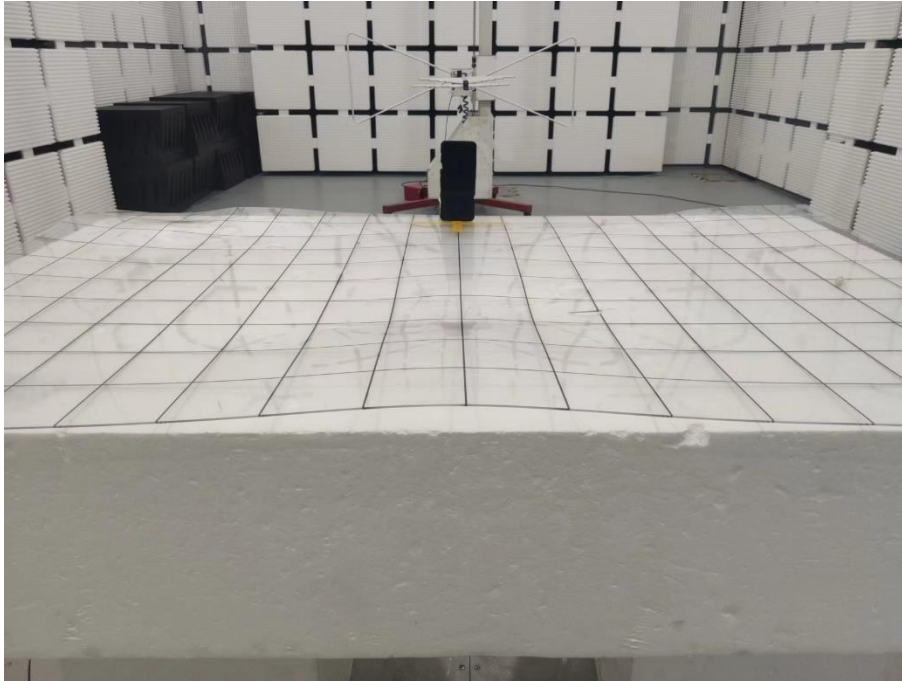

Radiated Spurious Emission Test Setup Photo - Above 1GHz

