


► Warm Tips

- Only supports 2.4 GHz Wi-Fi & Bluetooth network
- Simplified steps to install App on your smart phone or tablet on Apple/Google Play Store
- Works with Amazon Alexa, Google Home.

► Key Specification

Model	X19
Input Voltage	120V AC/60Hz
Max Power	400W
Wireless Frequency	Wi-Fi 2.4GHz & Bluetooth
Wireless Standard	IEEE802.11 b/g/n
Support System	Android 4.1 and above or iOS 8.0 and above
Max Output	400W INC
	150W CFL
	150W LED

▶ I INDICATOR LIGHT STATUS

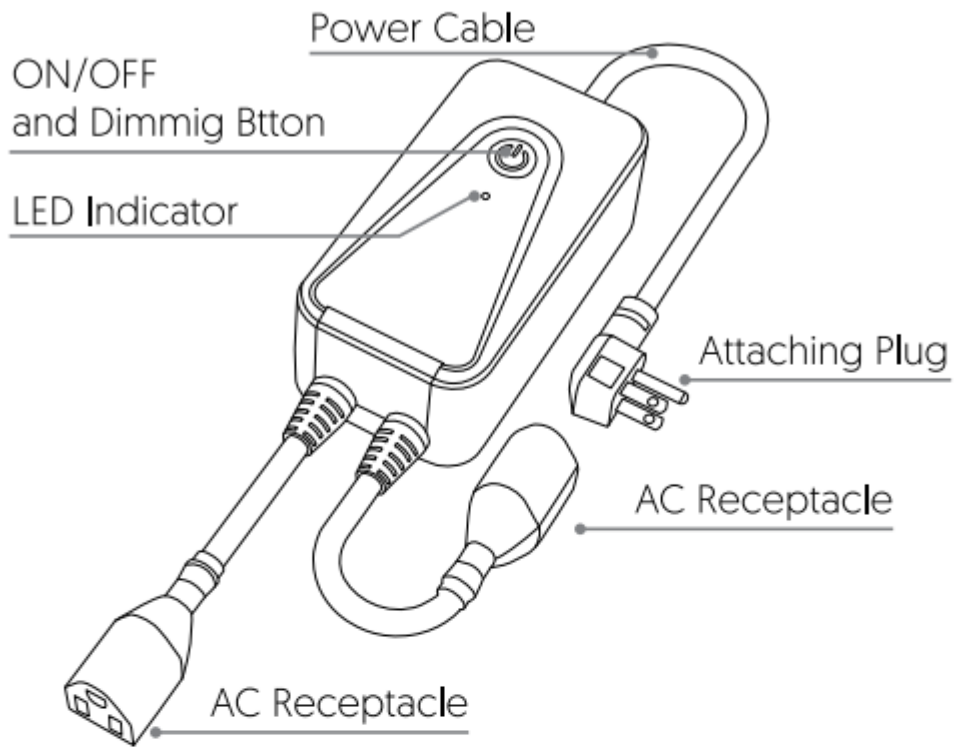

Light Color	Light Status	Switch Status
Red	Steady [For 3 minutes]	Low power initial state
	Blink quickly [2 times per second]	Ready for default Configuration
	Blink slowly [once every 3s]	Ready for AP [Access Point] configuration mode
White	ON	Power ON
	OFF	Power OFF

► BUTTON DEFINITION

1.Press the on / off button 3 times continuously , red indicator light blinks quickly [twice / 1s] to initiate default configuration mode.



2.In default configuration mode , press the on / off button 3 times continuously to initiate AP mode.

3.Short press the on / off button to turn the light on / off.

4.Long press the on / off button to increase the brightness of your light. Stepless dimming [1 % to 100% brightness completed in 5.5s]

5.Long press the on / off button to decrease the brightness of your light. Stepless dimming [100% to 1% brightness completed in 5.5s]

► How to connect Smart Plug to Wi-Fi network



1. Download Smart Life from  or .
2. Download or scan the QR code and install the Smart Life App for either iOS and Android. Once downloaded, the app will ask you to register your device. Enter your email, you will receive a text with a registration code. you will then create a password.




Attention: There's no Registration Code needed if email method chosen.

▶ Connect with mobile phone [Auto Scan]


1. Turn on the smart phone or device Bluetooth function and ensure the smart phone or device network is ON.
2. Before connecting, please make sure your smart phone or device is connecting with your home Wi-Fi 2.4GHz successfully.
3. Quickly press the on/off button for 3 times. Make sure the red indicator is blinking fast (2/s). If the red light is blinking fast, skip the reset step.
4. Open the application, click "+" to select "Auto Scan Mode", and then start to automatically scan products that can be connected.
5. Once connected, the App will prompt the connection, then click "Done".

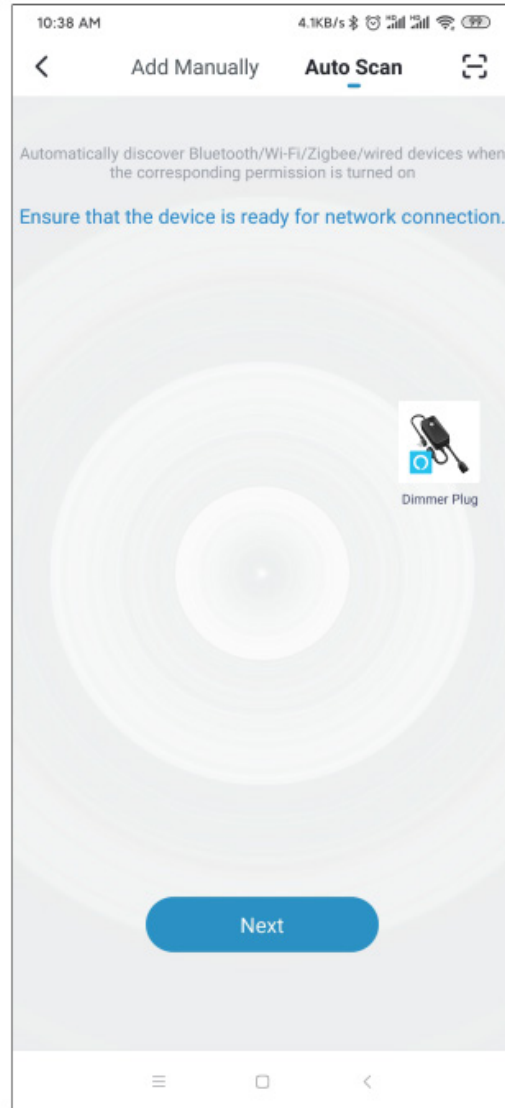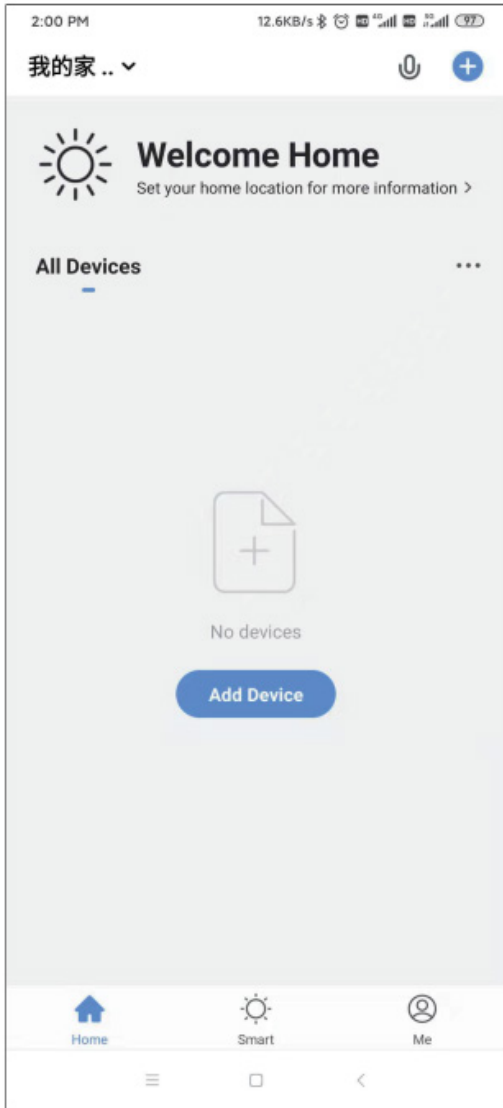


③ Enter the Wifi password

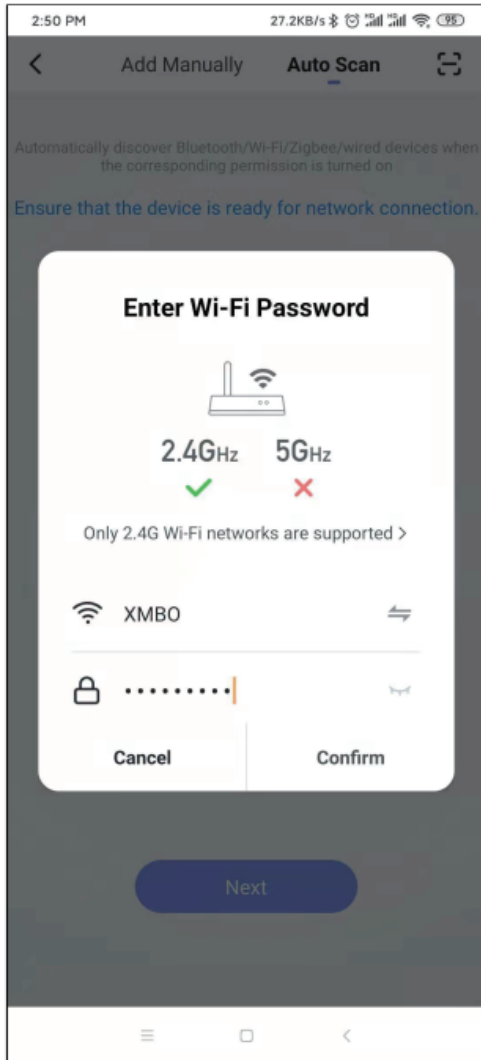


④ The equipment connected to the Internet

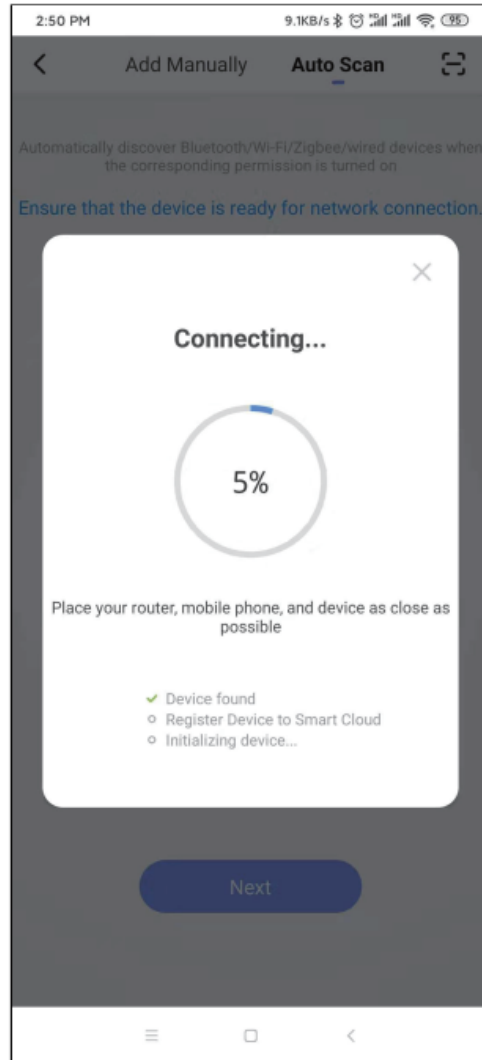

⑤ Distribution network success

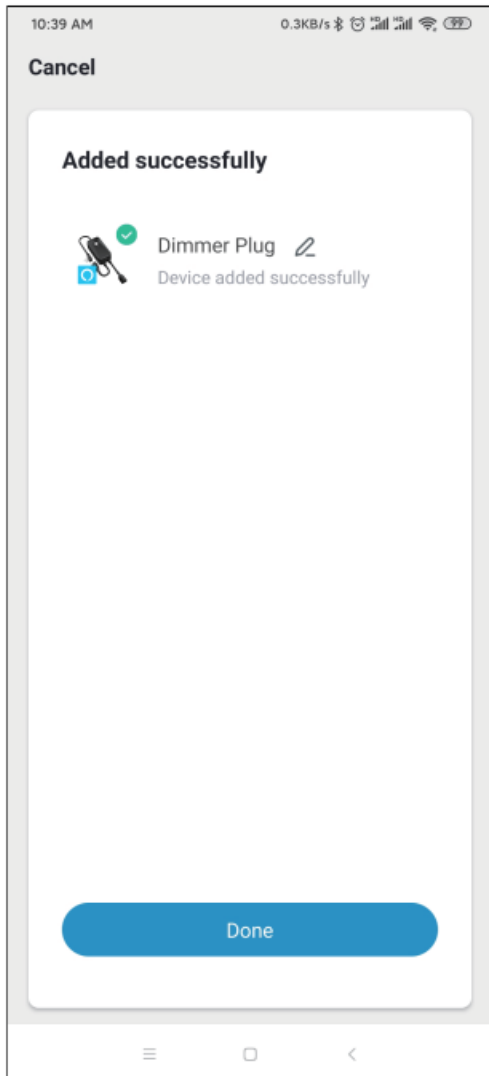

⑥ Jump to the user panel

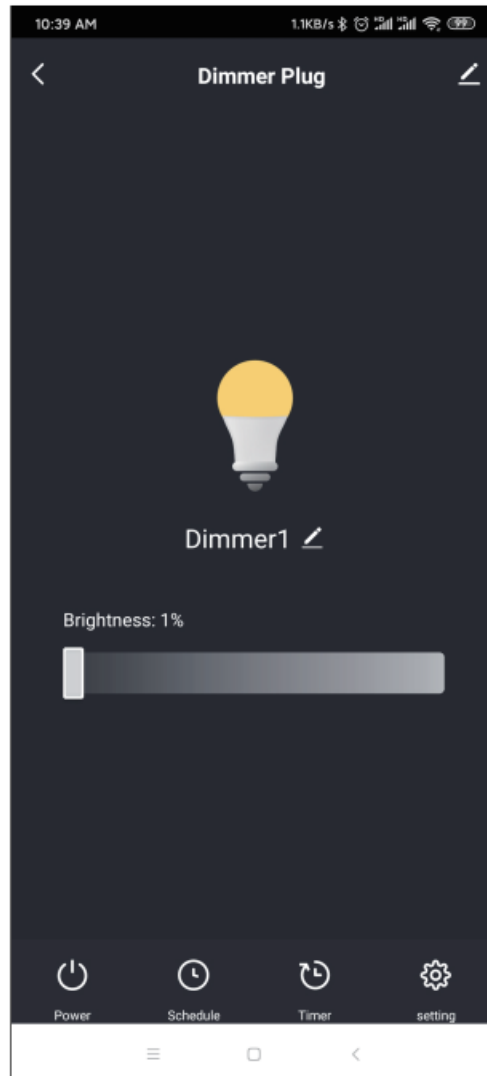

▶ Connect with mobile phone (Add Manually)

1. Turn on the smart phone or device Bluetooth function and ensure the smart phone or device network is ON.

2. Before connecting, please make sure your smart phone or device is connecting with your home Wi-Fi 2.4GHz successfully


3. Quickly press the on/off button for 3 times. Make sure the red indicator is blinking fast [2/s]. If the red light is blinking fast, skip the reset step.

4. Open the app, to scan QR code and see the guideline of pairing mode.




Lights are too bright though dimming to the minimum level.

Go to Dimmer Setting to adjust dimming range to desired brightness.

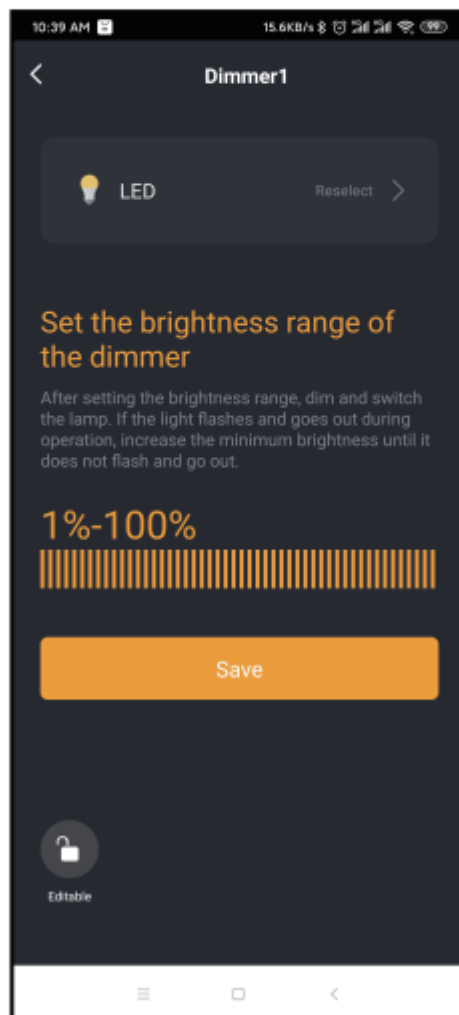

Lights are flickering

Switch to the dimmer setting to change the bulb type and adjust the light range until the flicker stops.

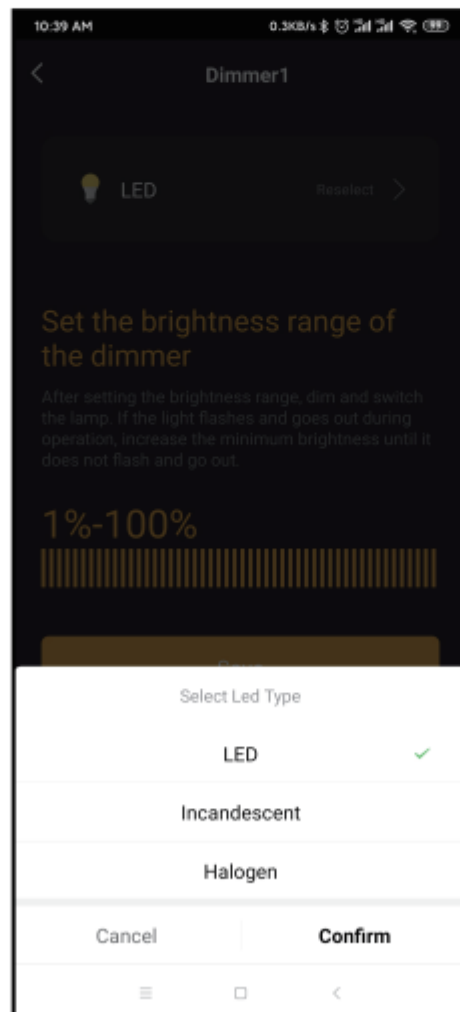


► Support 3rd Party Control



① Type the edit menu of the user panel.



② Select the third-party application to be operated.

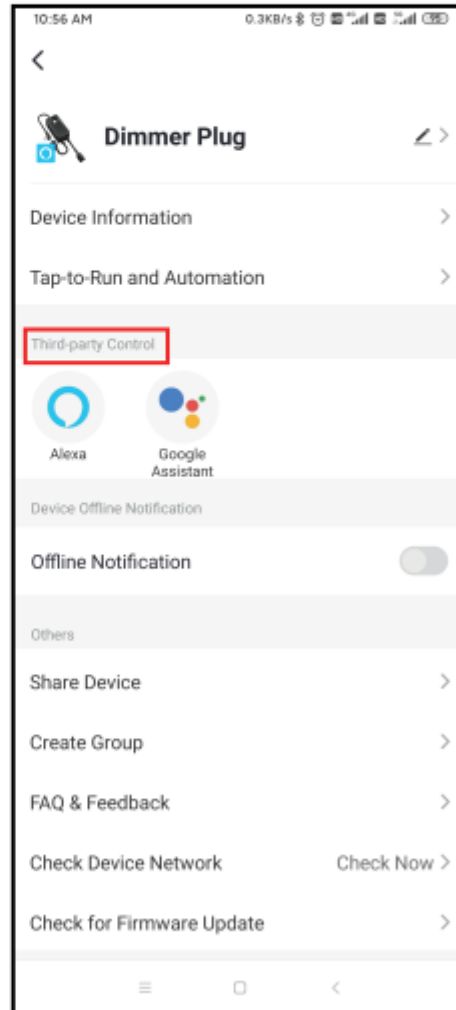

- ③ Follow the instructions in the tutorial to connect and use.

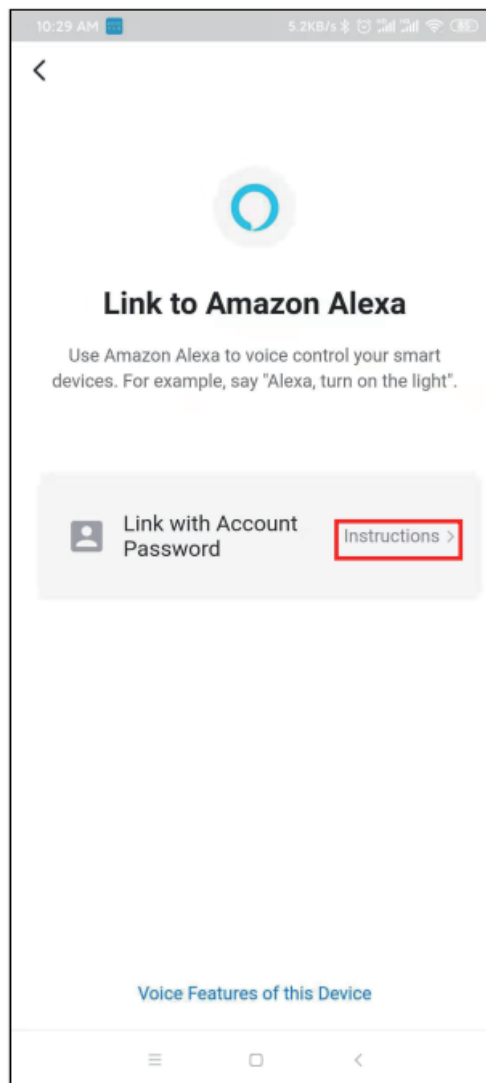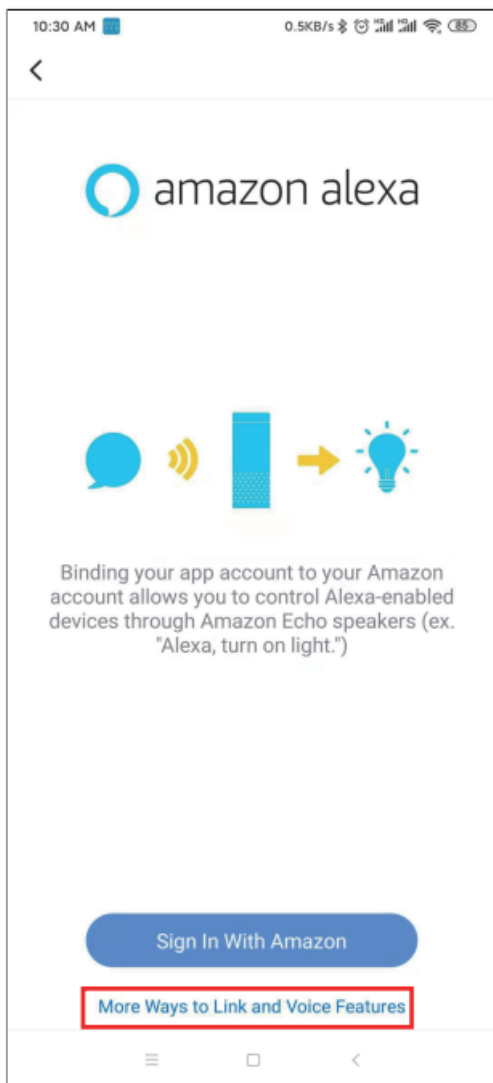

► Warm Tips

- Please check whether the device is connected with power and your phone is connected with Wi-Fi.
- Check routers: If the router is dual-band router, please select a 2.4GHz network to add device. You also need to open the router broadcasting function.
- Set up the wireless router: Set encryption method as WPA2-PSK authorization type as AES, or set both as auto. The Wireless mode cannot be only 5GHz. Please name router Wi-Fi in English. In order to stay strong Wi-Fi signal, please keep device and router within a certain distance.
- Check whether connected devices have reached the Maximum number router connection. If so, please try to turn off the Wi-Fi connection of some devices.
- Make sure router wireless MAC filtering function is enabled.

- Remove the device from the filter list and make sure that router is not prohibiting device from connection.
- Make sure the entered password is correct when adding a new device.

► Warranty

The product carries a one-year warranty from purchase date. Please feel free to contact us when you have any product problem or suggestions. We take care of all quality-related issues with a REPLACEMENT OR FULL REFUND.



Made in China

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.