

---

# FCC Test Report

---

Report No.: AGC00742190601FE06

**FCC ID** : 2AKC6XHT-WF6D  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Dual Band Wireless USB Adapter  
**BRAND NAME** : N/A  
**MODEL NAME** : XHT-6B16, XHT-6B18  
**CLIENT** : SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD  
**DATE OF ISSUE** : Jun. 27, 2019  
**STANDARD(S)** : FCC Part 15.407  
**TEST PROCEDURE(S)** : KDB 789033 D02 v02r01  
**REPORT VERSION** : V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

**REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 27, 2019	Valid	Initial Release



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY</b> .....	<b>5</b>
<b>2. GENERAL INFORMATION</b> .....	<b>6</b>
2.1. PRODUCT DESCRIPTION .....	6
2.2. TABLE OF CARRIER FREQUENCYS .....	7
2.3. RELATED SUBMITTAL(S) / GRANT (S) .....	7
2.4. TEST METHODOLOGY .....	7
2.5. SPECIAL ACCESSORIES .....	7
2.6. EQUIPMENT MODIFICATIONS .....	7
<b>3. MEASUREMENT UNCERTAINTY</b> .....	<b>8</b>
<b>4. DESCRIPTION OF TEST MODES</b> .....	<b>9</b>
<b>5. SYSTEM TEST CONFIGURATION</b> .....	<b>10</b>
5.1. CONFIGURATION OF EUT SYSTEM .....	10
5.2. EQUIPMENT USED IN EUT SYSTEM .....	10
5.3. SUMMARY OF TEST RESULTS .....	10
<b>6. TEST FACILITY</b> .....	<b>11</b>
<b>7. MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>12</b>
7.1. MEASUREMENT PROCEDURE .....	12
7.2. TEST SET-UP .....	12
7.3. LIMITS AND MEASUREMENT RESULT .....	13
<b>8. 6DB BANDWIDTH</b> .....	<b>15</b>
8.1. MEASUREMENT PROCEDURE .....	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	15
8.3. LIMITS AND MEASUREMENT RESULTS .....	16
<b>9. EMISSION BANDWIDTH</b> .....	<b>24</b>
9.1. MEASUREMENT PROCEDURE .....	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	24
9.3. LIMITS AND MEASUREMENT RESULTS .....	25
<b>10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY</b> .....	<b>33</b>
10.1 MEASUREMENT PROCEDURE .....	33
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	33
10.3 MEASUREMENT EQUIPMENT USED .....	33



10.4 LIMITS AND MEASUREMENT RESULT .....33

**11. CONDUCTED SPURIOUS EMISSION .....61**

11.1. MEASUREMENT PROCEDURE .....61

11.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....61

11.3. MEASUREMENT EQUIPMENT USED .....61

11.4. LIMITS AND MEASUREMENT RESULT .....61

**12. RADIATED EMISSION .....83**

9.1. MEASUREMENT PROCEDURE .....83

9.2. TEST SETUP .....84

9.3. LIMITS AND MEASUREMENT RESULT .....85

9.4. TEST RESULT .....85

**13. BAND EDGE EMISSION .....92**

13.1. MEASUREMENT PROCEDURE .....92

13.2. TEST SET-UP .....92

13.3. TEST RESULT .....93

**14. FREQUENCY STABILITY .....99**

14.1. MEASUREMENT PROCEDURE .....99

14.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....99

14.3. MEASUREMENT RESULTS .....100

**15. FCC LINE CONDUCTED EMISSION TEST .....106**

15.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....106

15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....106

15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....107

15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....107

15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....108

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....110**

**APPENDIX B: PHOTOGRAPHS OF EUT .....112**



### 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	SHEN ZHEN SHI XIN HUA TIAN TECHNOLOGY CO., LTD
<b>Address</b>	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
<b>Manufacturer</b>	SHEN ZHEN SHI XIN HUA TIAN TECHNOLOGY CO., LTD
<b>Address</b>	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
<b>Factory</b>	SHEN ZHEN SHI XIN HUA TIAN TECHNOLOGY CO., LTD
<b>Address</b>	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
<b>Product Designation</b>	Dual Band Wireless USB Adapter
<b>Brand Name</b>	N/A
<b>Test Model</b>	XHT-6B16
<b>Series Model</b>	XHT-6B18
<b>Model Difference</b>	All the same except for the model name and color
<b>Date of test</b>	Jun. 13, 2019 to Jun. 25, 2019
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Test Result</b>	Pass
<b>Report Template</b>	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Tested By

*NiNi*

NiNi Guo(Guo Lili)

Jun. 25, 2019

Reviewed By

*Max Zhang*

Max Zhang(Zhang Yi)

Jun. 27, 2019

Approved By

*Forrest Lei*

Forrest Lei(Lei Yonggang)

Authorized Officer

Jun. 27, 2019



## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as “Dual Band Wireless USB Adapter”. It is designed by way of utilizing the OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

<b>Product Name</b>	Dual Band Wireless USB Adapter
<b>Model/Type reference</b>	XHT-6B16
<b>Modulation</b>	802.11a/n20/n40/ac20/ac40/ac80 BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM, OFDM
<b>Operation Frequency</b>	5150 MHz~5250MHz;5725 MHz~5850MHz
<b>Channel number</b>	15
<b>Antenna Designation</b>	Two external antennas(Use of reverse SMA connector)
<b>Number of transmit chain</b>	2(802.11a used antenna 0, 802.11n/ac used two antennas)
<b>Directional gain</b>	All transmit signals are completely uncorrelated with each other
<b>Antenna gain</b>	5dBi
<b>Power Supply</b>	DC 5V



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

**2.2. TABLE OF CARRIER FREQUENCIES**

Frequency Band	Channel Number	Frequency	Frequency Band	Channel Number	Frequency
5150 GHz~ 5250GHz	36	5180 MHz	5725 GHz~ 5850GHz	149	5745 MHz
	38	5190 MHz		151	5755 MHz
	40	5200 MHz		153	5765 MHz
	42	5210 MHz		155	5775MHz
	44	5220 MHz		157	5785 MHz
	46	5230 MHz		159	5795 MHz
	48	5240 MHz		161	5805 MHz
				165	5825MHz

Note: For 20MHZ bandwidth system use Channel 36,40,44,48,149,153,157,161,165; For 40MHZ bandwidth system use Channel 38,46,151,159; For 80MHZ bandwidth system use Channel 42,155

**2.3. RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID: 2AKC6XHT-WF6D** filing to comply with the FCC Part 15 requirements.

**2.4. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013).

Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.407 rules KDB 789033 D02

**2.5. SPECIAL ACCESSORIES**

Refer to section 5.2.

**2.6. EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

### 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission,  $U_c = \pm 3.2$  dB
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.9$  dB
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.8$  dB



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118



#### 4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate(Mbps)
802.11a/n20/ac20	36,40,44,48,149,153,157,161,165	36,38,48,149, 157,165	OFDM	6/6.5
802.11n40/ac40	38,46,151,159	38,46, 151,159	OFDM	13.5
802.11ac80	42,155	42,155	OFDM	13.5

**Note:**

1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. The test software is the RtkTestAPP-v2.0.0\_20170425 which can set the EUT into the individual test modes



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:

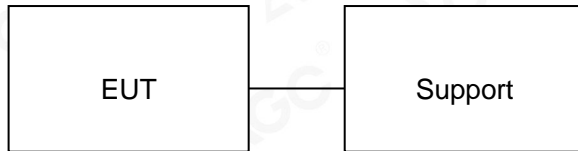

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Dual Band Wireless USB Adapter	XHT-6B06	2AKC6XHT-WF6D	EUT
2	PC	XIAOMI	N/A	Support
3	PC adapter	XIAOMI ADC6501TM	DC15V/3A	Support

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.407	6dB Bandwidth	Compliant
§15.407	Emission Bandwidth	Compliant
§15.407	Maximum conducted output power	Compliant
§15.407	Conducted Spurious Emission	Compliant
§15.407	Maximum Conducted Output Power Density	Compliant
§15.209	Radiated Emission	Compliant
§15.407	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

## 6. TEST FACILITY

<b>Test Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2018	Jun. 11, 2019
LISN	R&S	ESH2-Z5	100086	Aug. 28, 2018	Aug. 27, 2019

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2018	Jun. 11, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Power sensor	Aglient	U2021XA	MY54110007	Sep. 20, 2018	Sep. 19, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Jun. 12, 2018	Jun. 11, 2019
preamplifier	ChengYi	EMC184045SE	980508	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	A.H.	SAS-562B	N/A	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Oct. 25, 2018	Oct. 24, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For average power test:

1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

**Note :** The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

### 7.2. TEST SET-UP

#### AVERAGE POWER SETUP

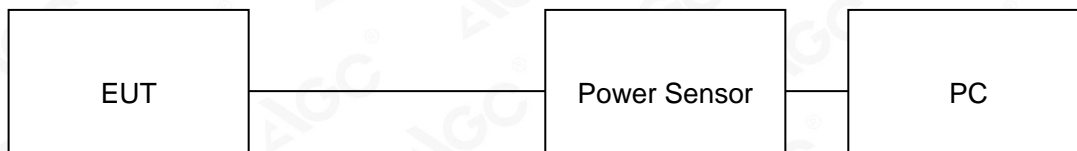

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### 7.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION			
Frequency (MHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
5180	6.95	24	Pass
5200	6.71	24	Pass
5240	6.53	24	Pass
5745	6.25	30	Pass
5785	6.14	30	Pass
5825	6.17	30	Pass

LIMITS AND MEASUREMENT RESULT FOR 802.11N20 MODULATION					
Frequency (MHz)	Average Power Chain 0(dBm)	Average Power Chain 1(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail
5180	0.61	0.56	3.60	24	Pass
5200	0.59	0.34	3.48	24	Pass
5240	0.56	0.27	3.43	24	Pass
5745	0.55	0.29	3.43	30	Pass
5785	0.60	0.31	3.47	30	Pass
5825	0.51	0.24	3.39	30	Pass

LIMITS AND MEASUREMENT RESULT FOR 802.11AC20 MODULATION					
Frequency (MHz)	Average Power Chain 0(dBm)	Average Power Chain 1(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail
5180	0.50	0.21	3.37	24	Pass
5200	0.46	0.11	3.30	24	Pass
5240	0.44	0.16	3.31	24	Pass
5745	0.41	0.14	3.29	30	Pass
5785	0.40	0.13	3.28	30	Pass
5825	0.39	0.16	3.29	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

LIMITS AND MEASUREMENT RESULT FOR 802.11N40 MODULATION					
Frequency (MHz)	Average Power Chain 0(dBm)	Average Power Chain 1(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail
5190	-1.23	-1.69	1.56	24	Pass
5230	-1.30	-1.72	1.51	24	Pass
5755	-1.39	-1.76	1.44	30	Pass
5795	-1.44	-1.79	1.40	30	Pass

LIMITS AND MEASUREMENT RESULT FOR 802.11AC40 MODULATION					
Frequency (MHz)	Average Power Chain 0(dBm)	Average Power Chain 1(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail
5190	-1.56	-1.91	1.28	24	Pass
5230	-1.60	-1.83	1.30	24	Pass
5755	-1.63	-1.96	1.22	30	Pass
5795	-1.65	-1.98	1.20	30	Pass

LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION					
Frequency (MHz)	Average Power Chain 0(dBm)	Average Power Chain 1(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail
5210	-4.06	-4.12	-1.08	24	Pass
5775	-4.64	-4.68	-1.65	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118


## 8. 6dB BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 100kHz.
4. Set the VBW  $\geq 3 \times$  RBW. Detector = Peak. Trace mode = max hold.
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

**Note:** The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

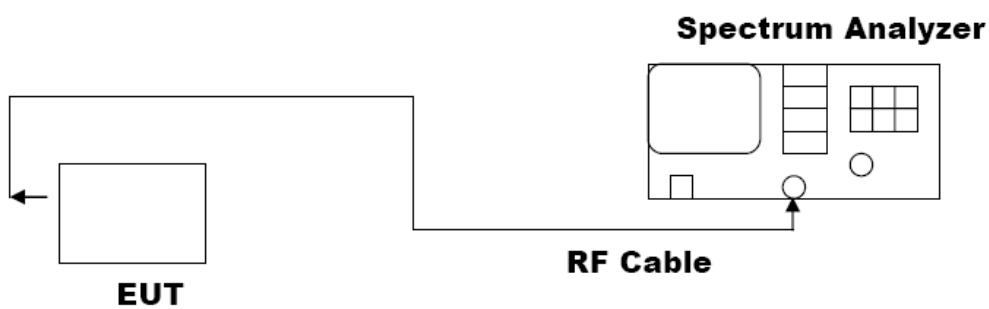

### 8.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
>500KHZ	5745MHz	16.34	PASS
	5785MHz	16.36	PASS
	5825MHz	16.35	PASS

LIMITS AND MEASUREMENT RESULT FOR 802.11N20/40 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
>500KHZ	5745MHz	17.54	PASS
	5785MHz	17.56	PASS
	5825MHz	17.51	PASS
	5755MHz	36.36	PASS
	5795MHz	36.33	PASS

LIMITS AND MEASUREMENT RESULT FOR 802.11AC20/40/80 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
>500KHZ	5745MHz	17.32	PASS
	5785MHz	17.15	PASS
	5825MHz	17.07	PASS
	5755MHz	36.34	PASS
	5795MHz	36.35	PASS
	5775MHz	75.28	PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118




### 802.11a20 TEST RESULT

#### TEST PLOT OF BANDWIDTH FOR 5745MHZ

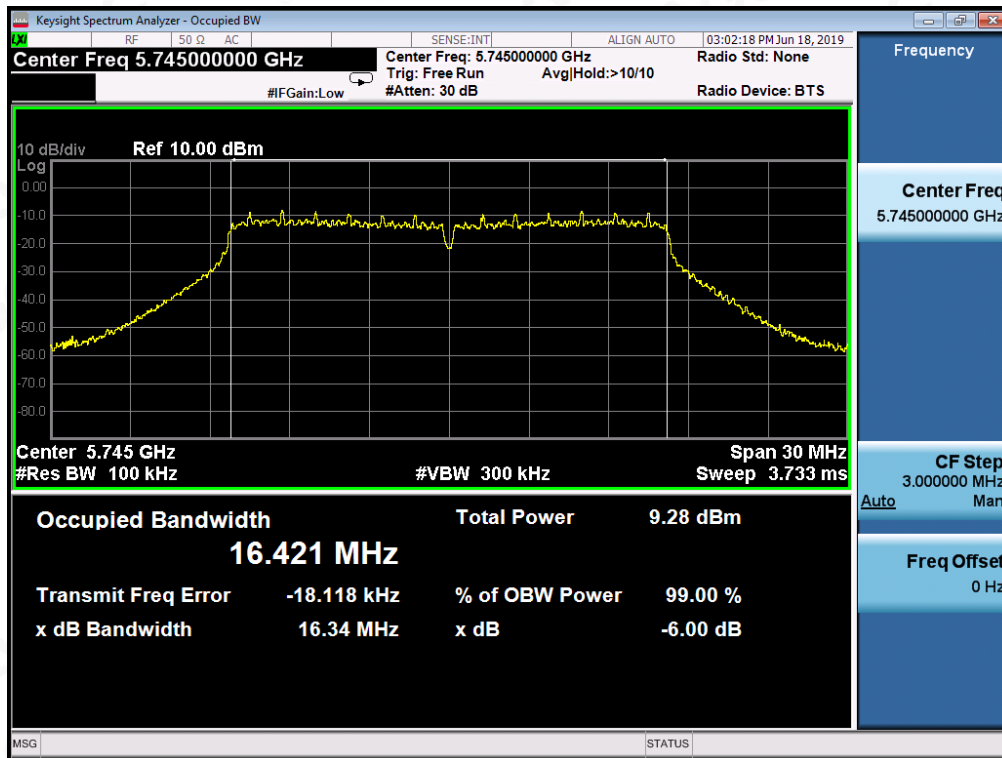


#### TEST PLOT OF BANDWIDTH FOR 5785MHZ

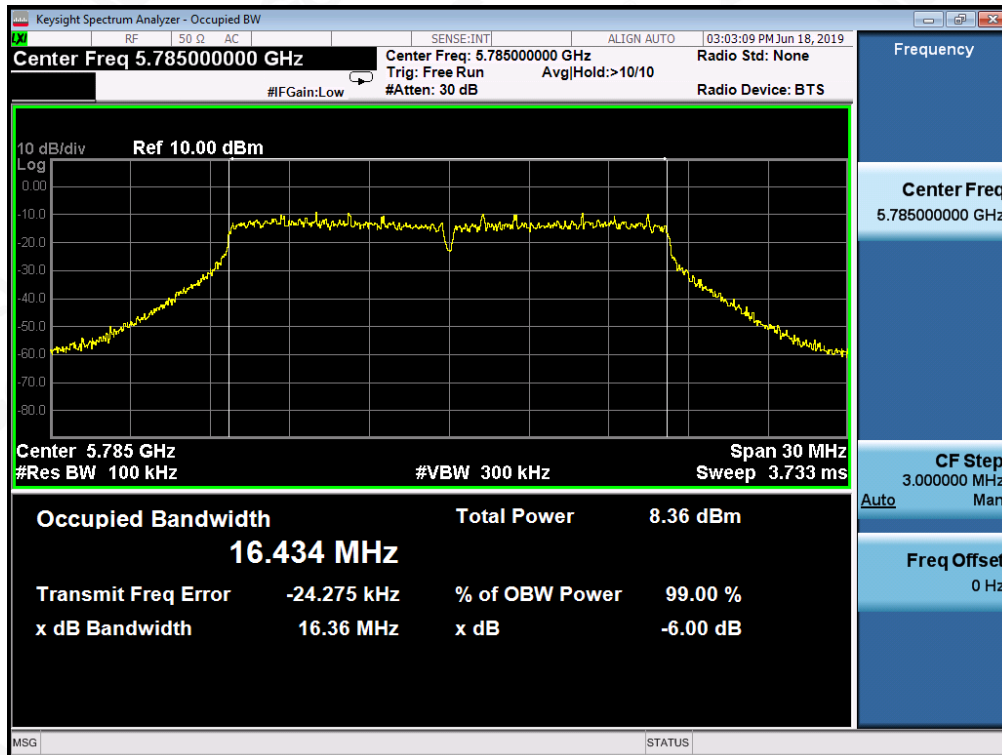

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5825MHZ

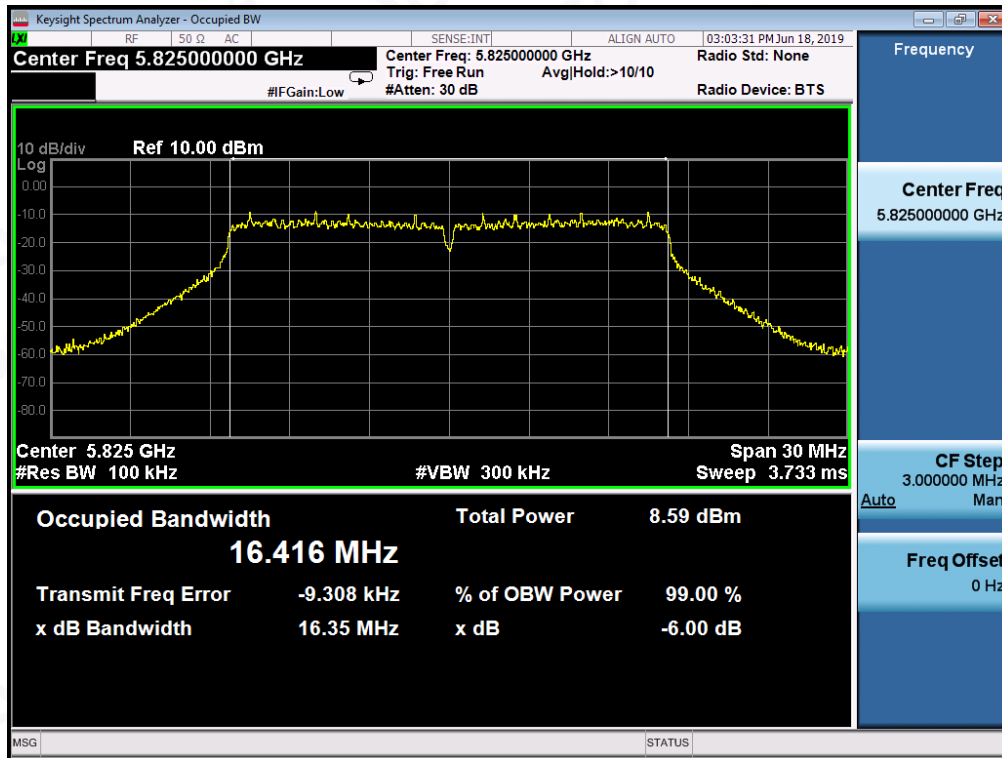

802.11n20 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5745MHZ

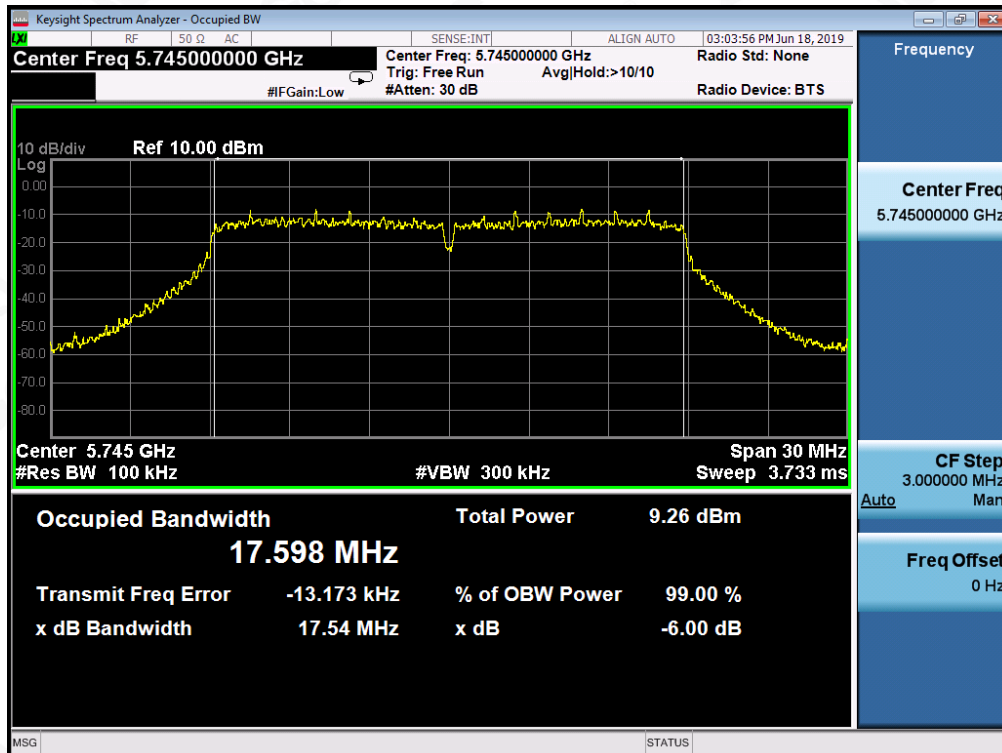

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5785MHz

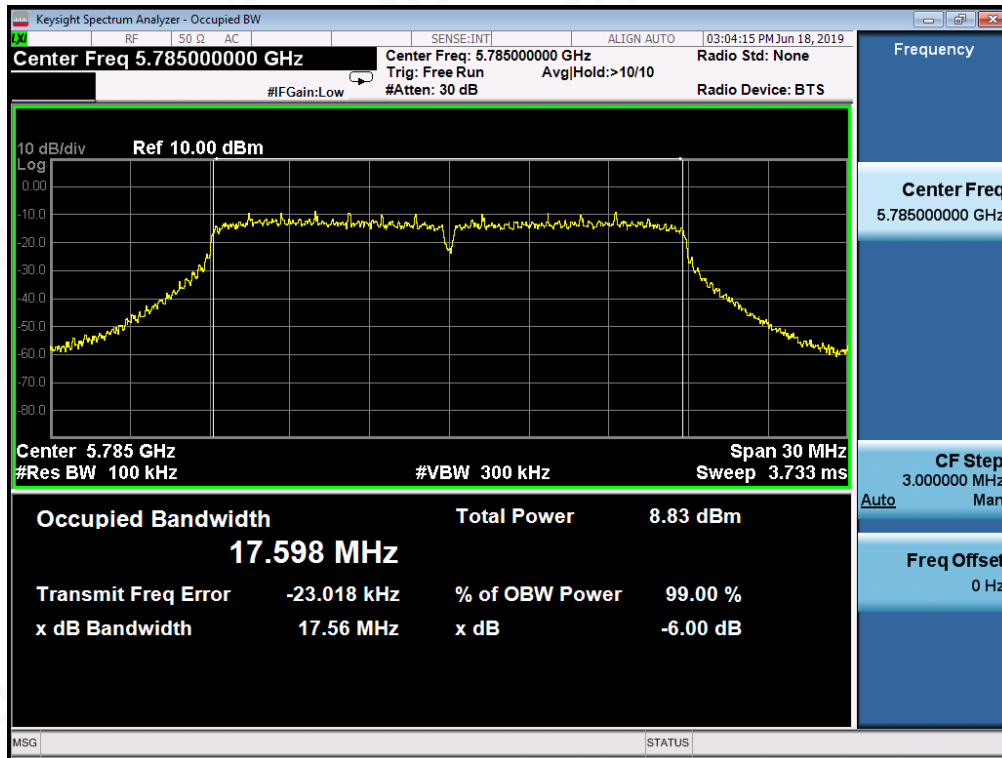

TEST PLOT OF BANDWIDTH FOR 5825MHz

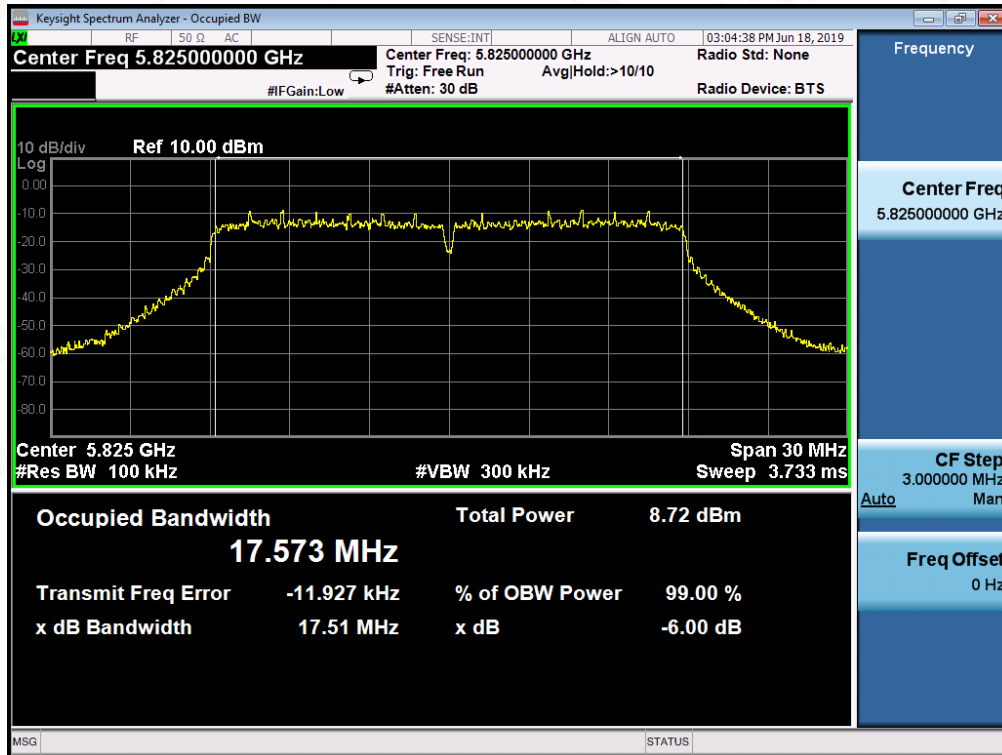


Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

### 802.11n40 TEST RESULT

#### TEST PLOT OF BANDWIDTH FOR 5755MHz

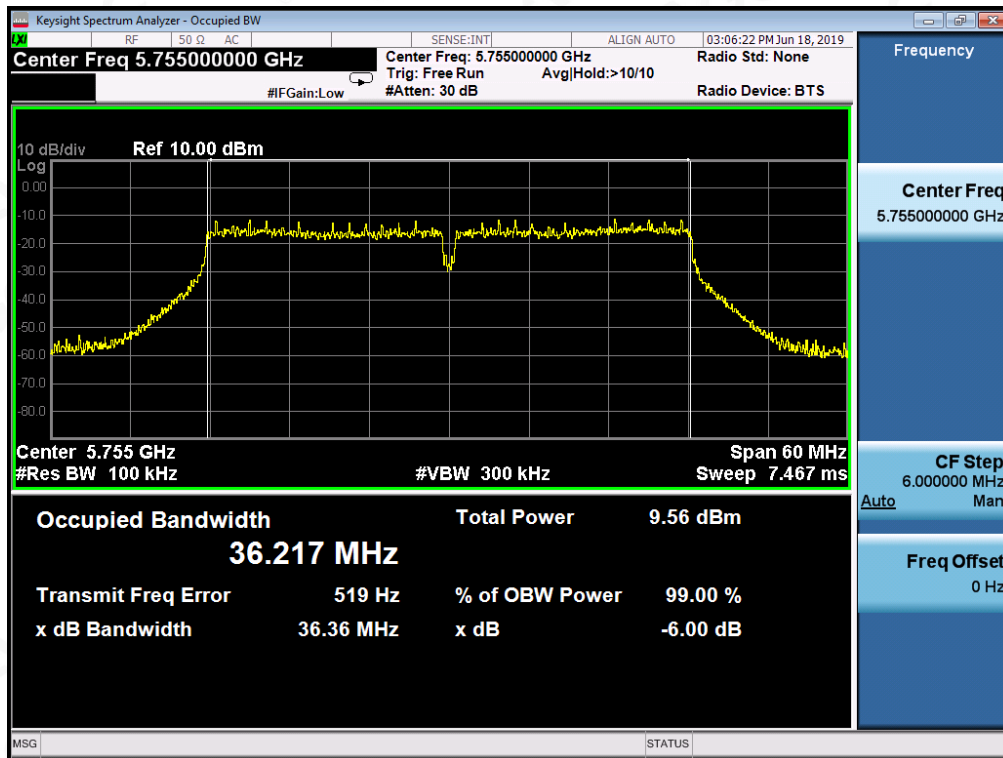

#### TEST PLOT OF BANDWIDTH FOR 5795MHz

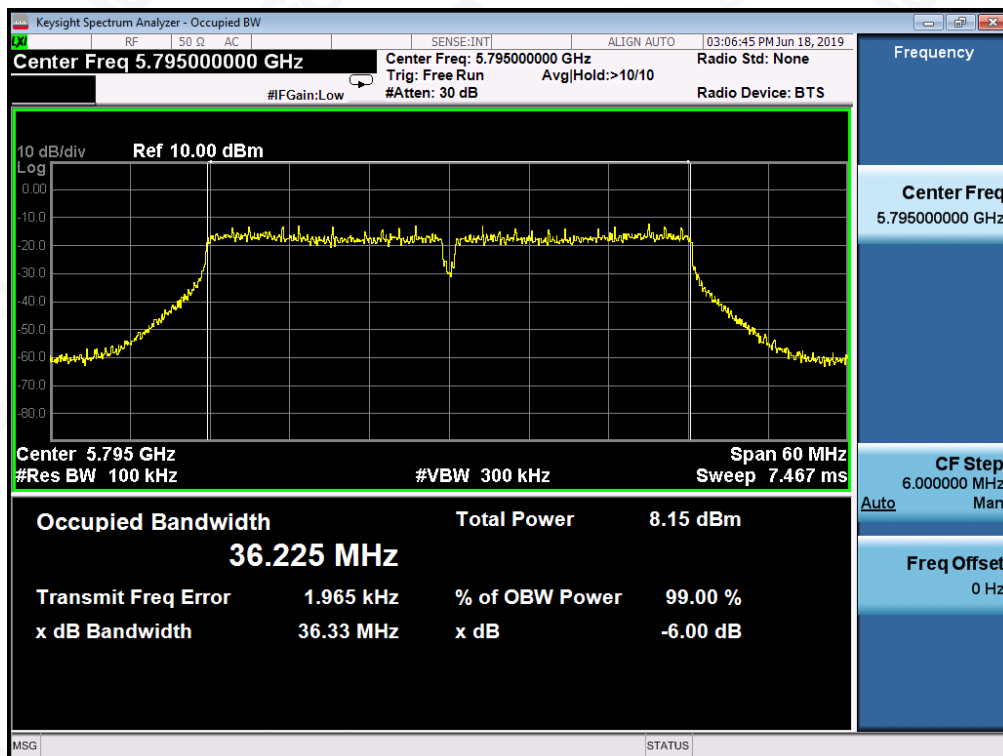

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### 802.11ac20 TEST RESULT

#### TEST PLOT OF BANDWIDTH FOR 5745MHz

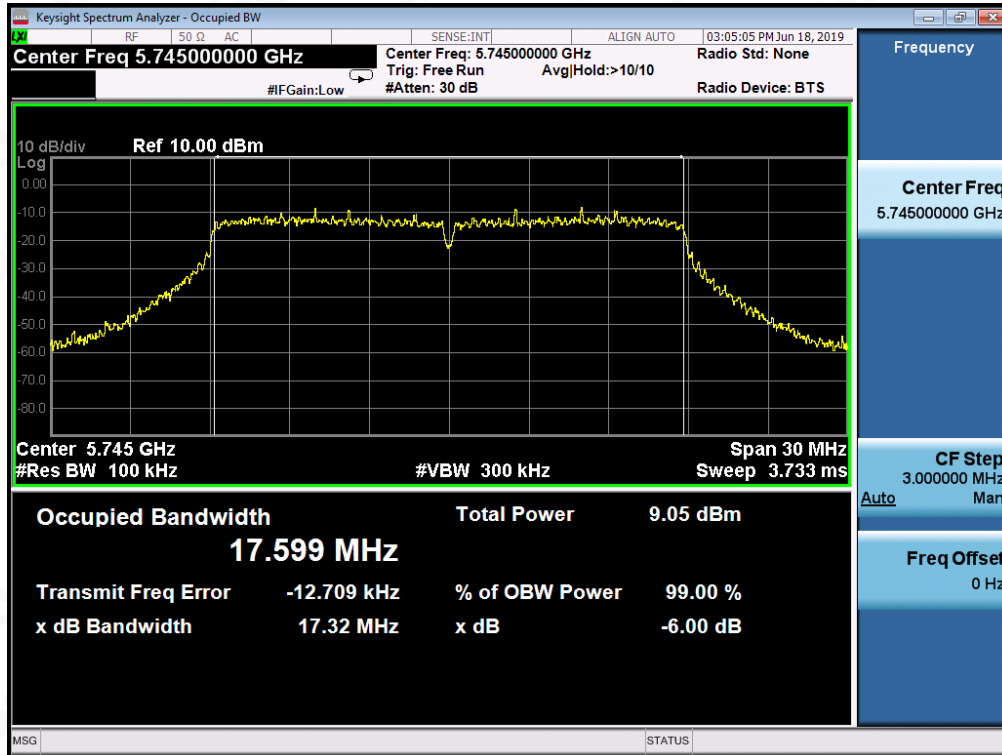

#### TEST PLOT OF BANDWIDTH FOR 5785MHz

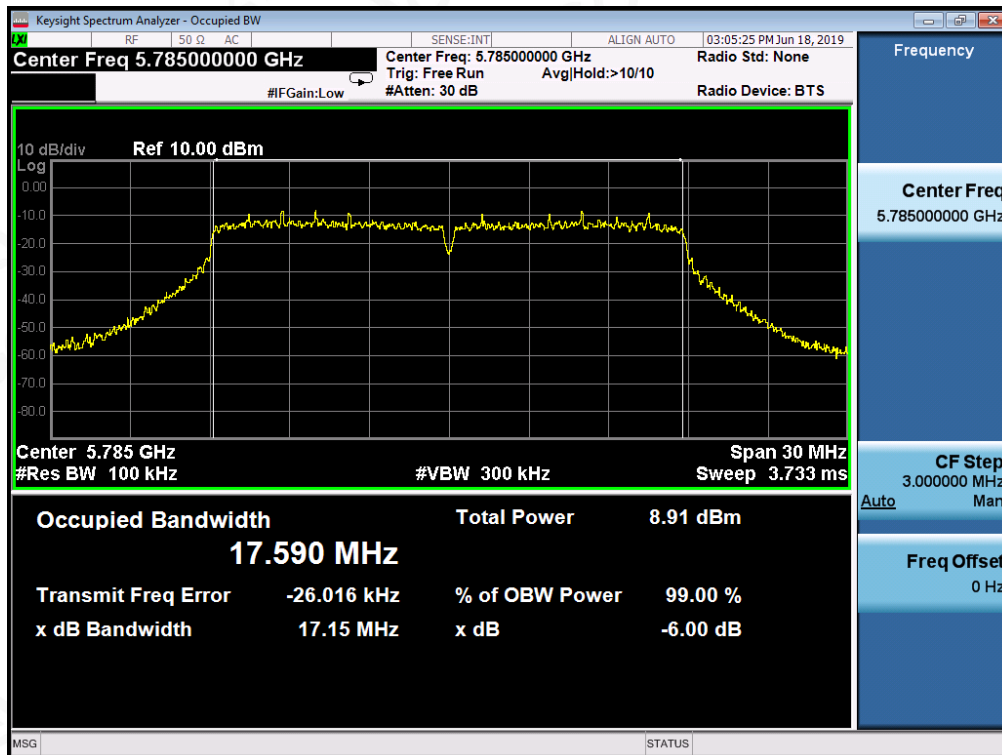

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### TEST PLOT OF BANDWIDTH FOR 5825MHZ

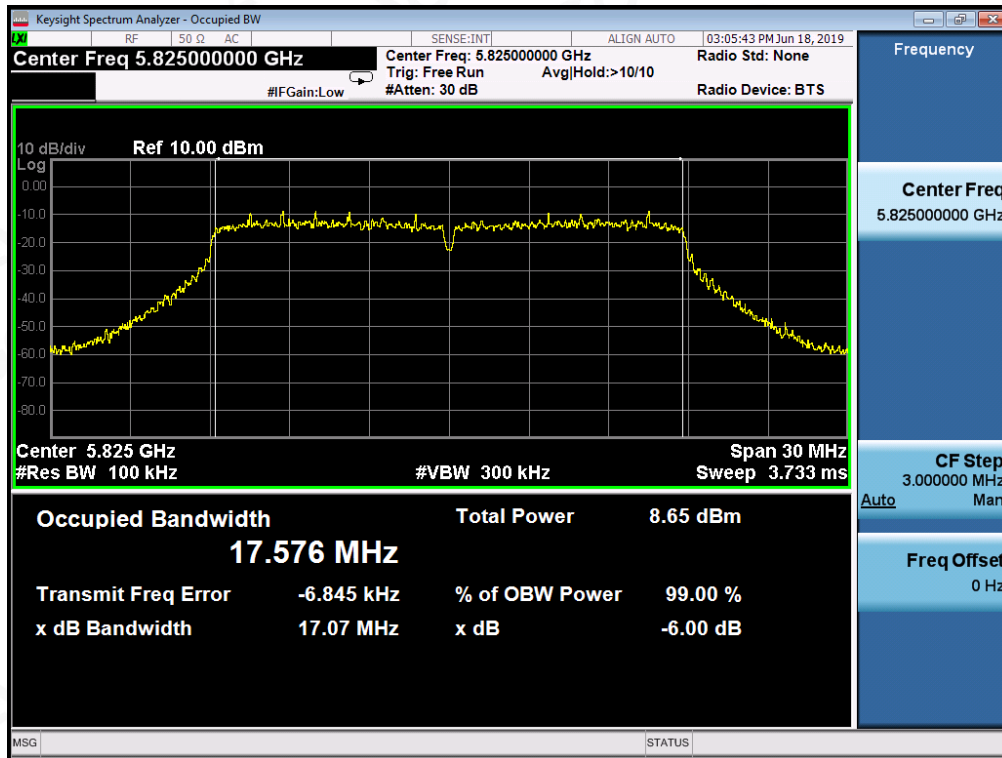

### 802.11ac40 TEST RESULT


### TEST PLOT OF BANDWIDTH FOR 5755MHZ

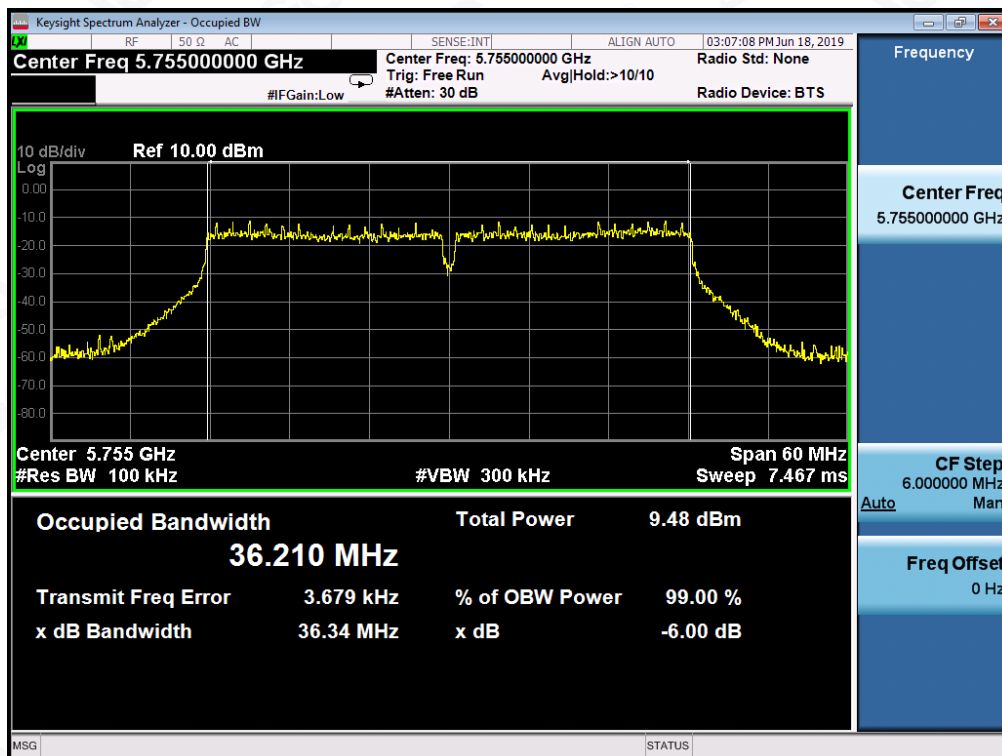

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

### TEST PLOT OF BANDWIDTH FOR 5795MHz

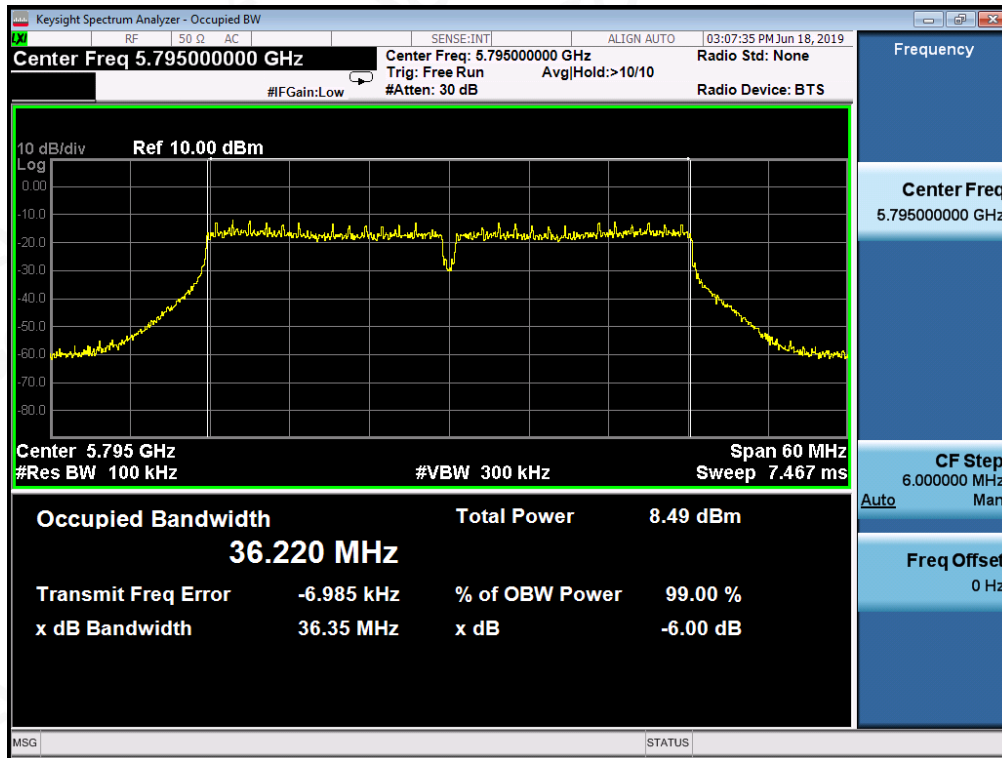

### 802.11ac80 TEST RESULT

### TEST PLOT OF BANDWIDTH FOR 5775MHz

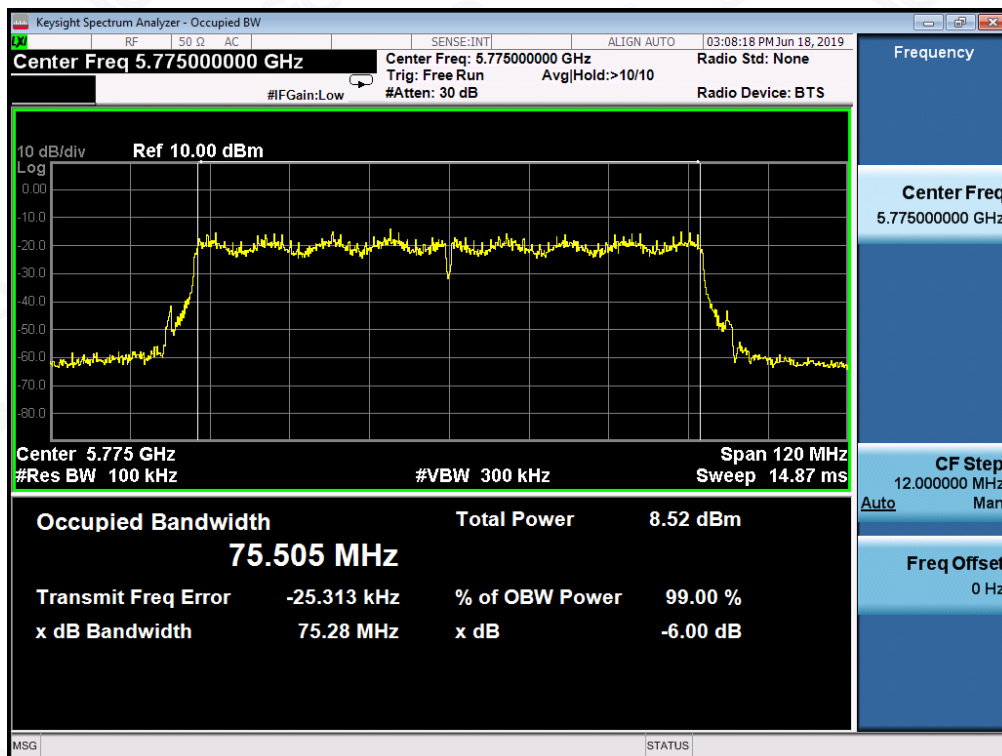

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118


## 9. EMISSION BANDWIDTH

### 9.1. MEASUREMENT PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
  - b) Set the VBW > RBW.
  - c) Detector = Peak.
  - d) Trace mode = max hold.
  - e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
- Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

**Note:** The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

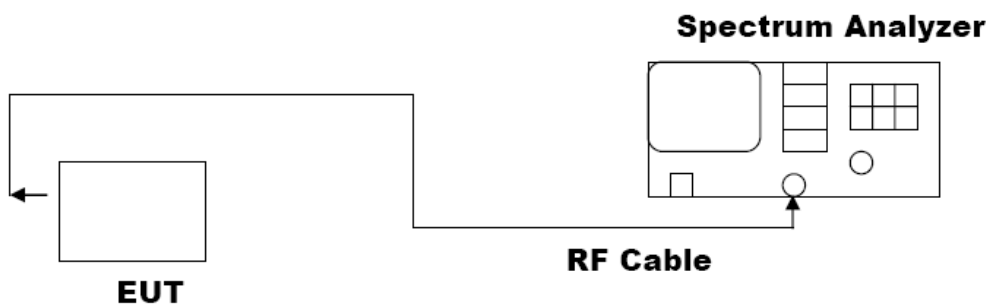



### 9.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
Within the Band	5180MHz	20.54	PASS
	5200MHz	20.38	PASS
	5240MHz	20.45	PASS

LIMITS AND MEASUREMENT RESULT FOR 802.11N20/40 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
Within the Band	5180MHz	20.49	PASS
	5200MHz	20.39	PASS
	5240MHz	20.59	PASS
	5190MHz	43.72	PASS
	5230MHz	43.70	PASS


LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION			
Applicable Limits	Applicable Limits		
	Test Data (MHz)		Criteria
Within the Band	5180MHz	20.63	PASS
	5200MHz	20.39	PASS
	5240MHz	20.71	PASS
	5190MHz	42.88	PASS
	5230MHz	42.71	PASS
	5210MHz	83.06	PASS

A 26-dB bandwidth that straddles into U-NII 2A band but its 99% occupied power bandwidth does not. If DFS is required, the device must be able to detect radar signal within its 99% occupied power bandwidth. For this rare case, DFS requirement does not apply.




802.11a20 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5180MHZ

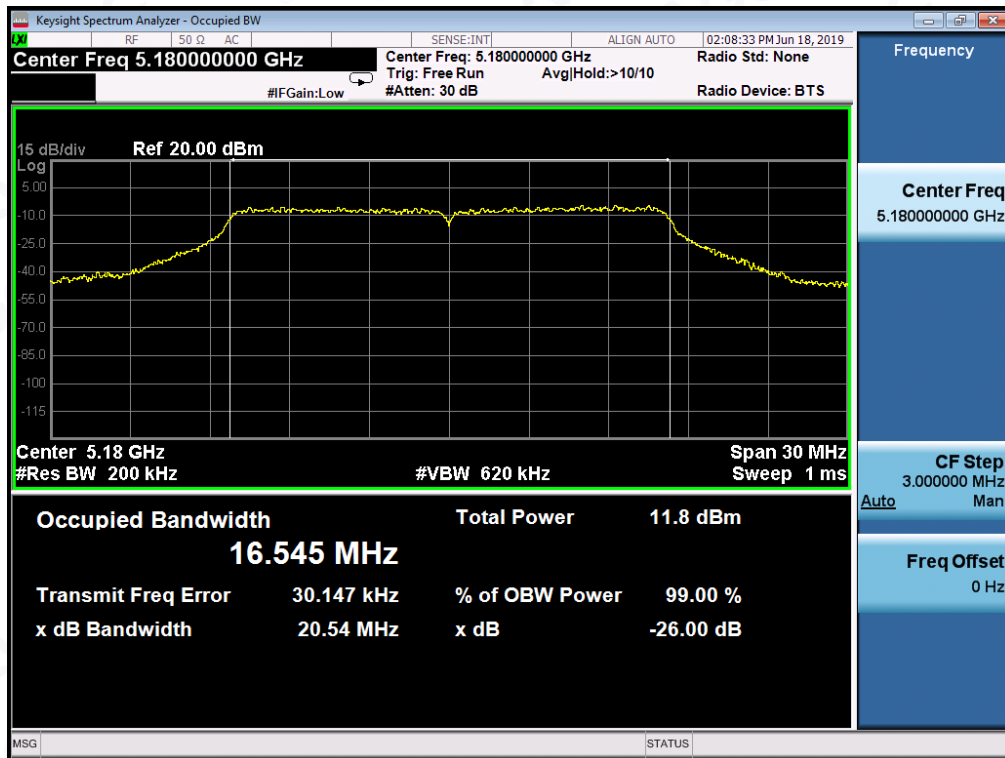

TEST PLOT OF BANDWIDTH FOR 5200MHZ

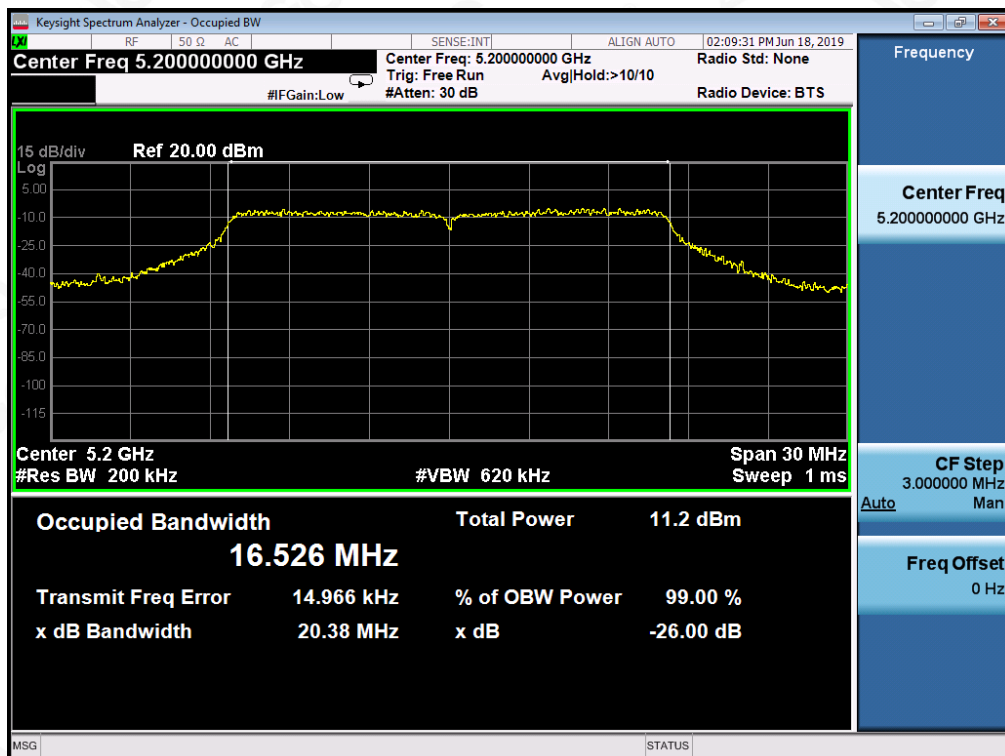

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5240MHz

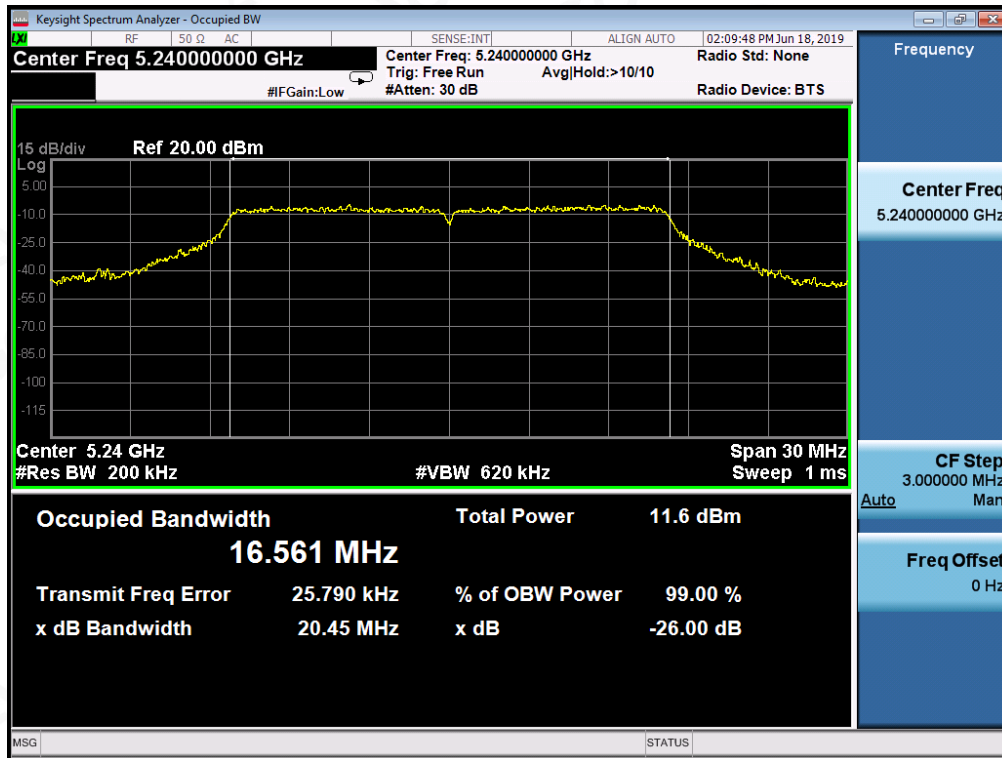

802.11n20 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5180MHz

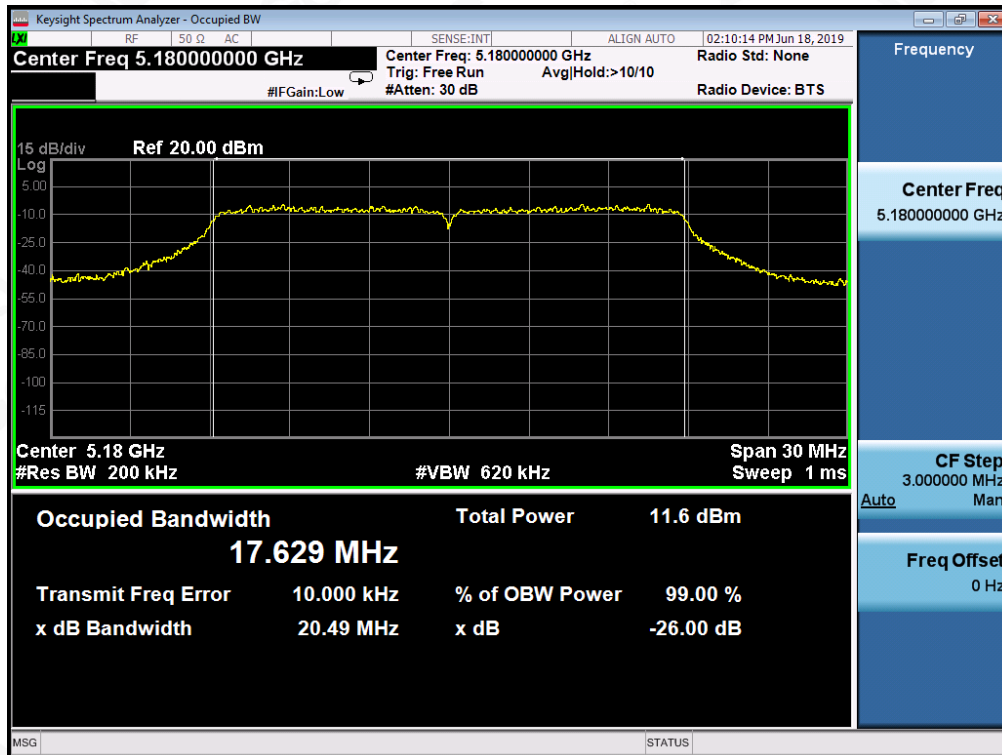

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5200MHZ

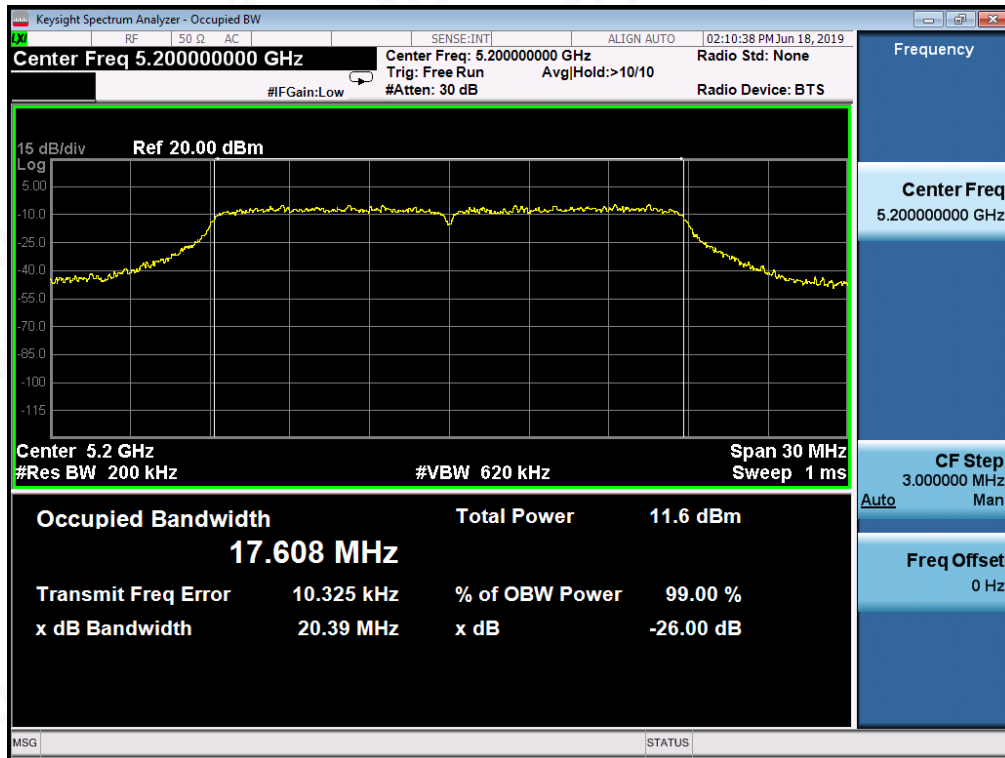

TEST PLOT OF BANDWIDTH FOR 5240MHZ

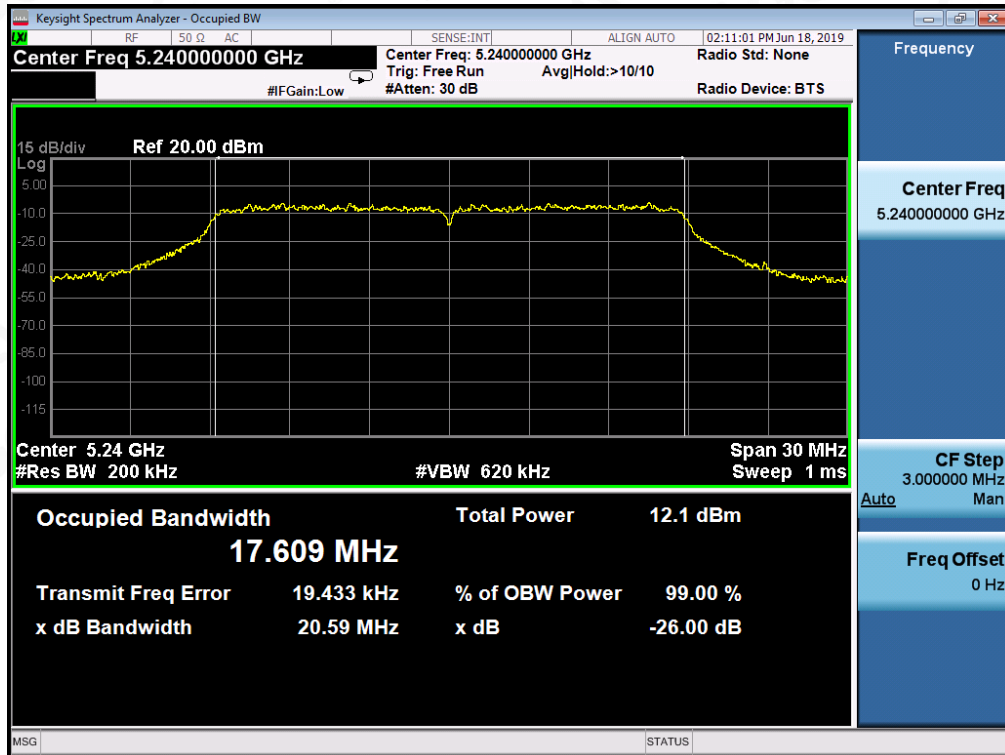


Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

### 802.11n40 TEST RESULT

#### TEST PLOT OF BANDWIDTH FOR 5190MHz

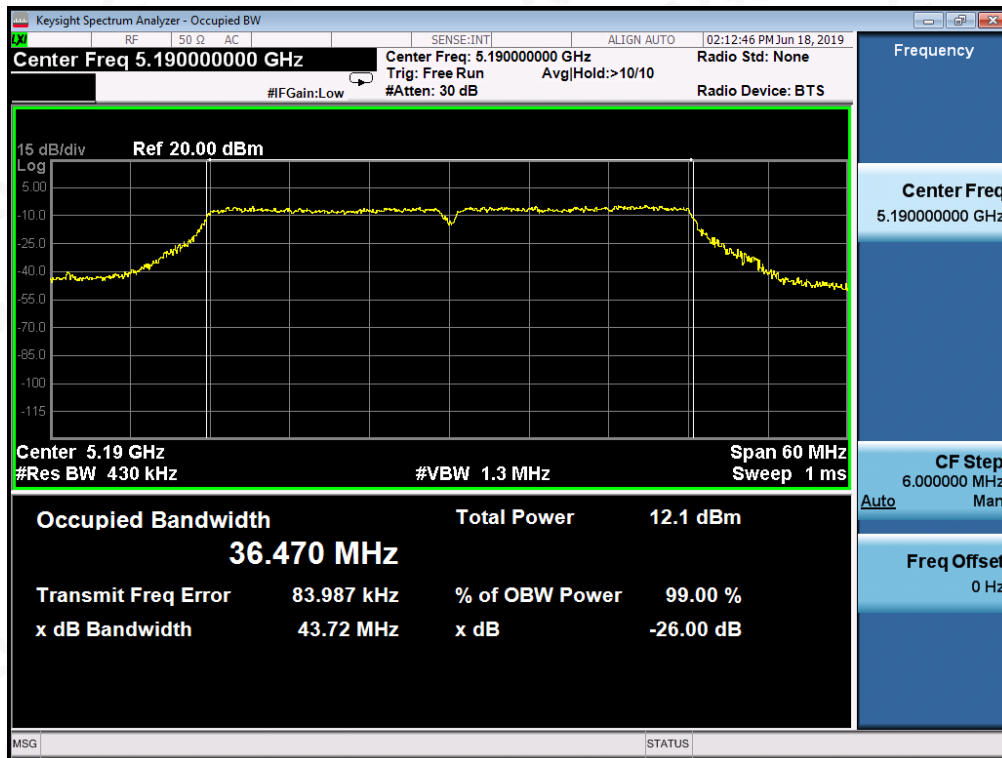

#### TEST PLOT OF BANDWIDTH FOR 5230MHz

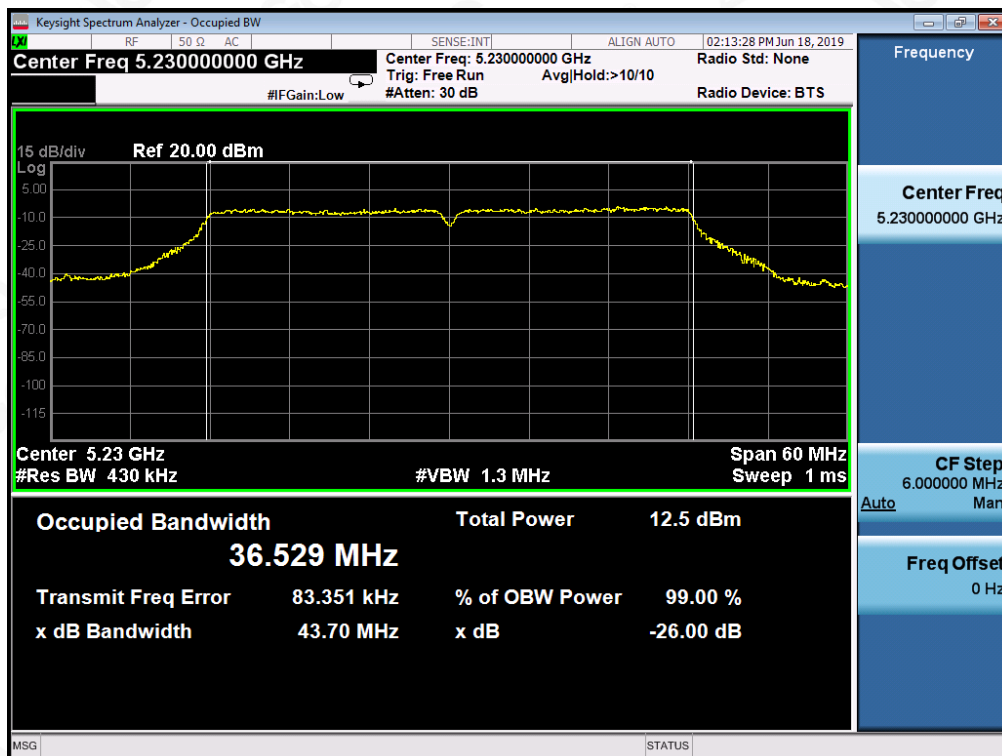

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

### 802.11ac20 TEST RESULT

#### TEST PLOT OF BANDWIDTH FOR 5180MHz

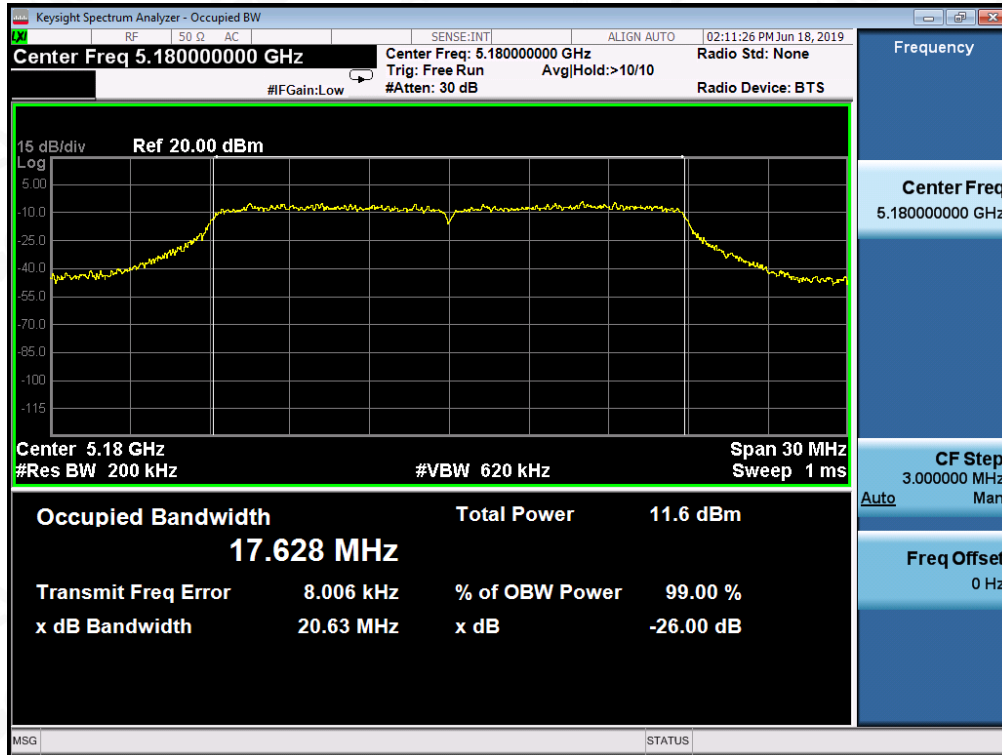

#### TEST PLOT OF BANDWIDTH FOR 5200MHz




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,  
Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com


Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5240MHZ

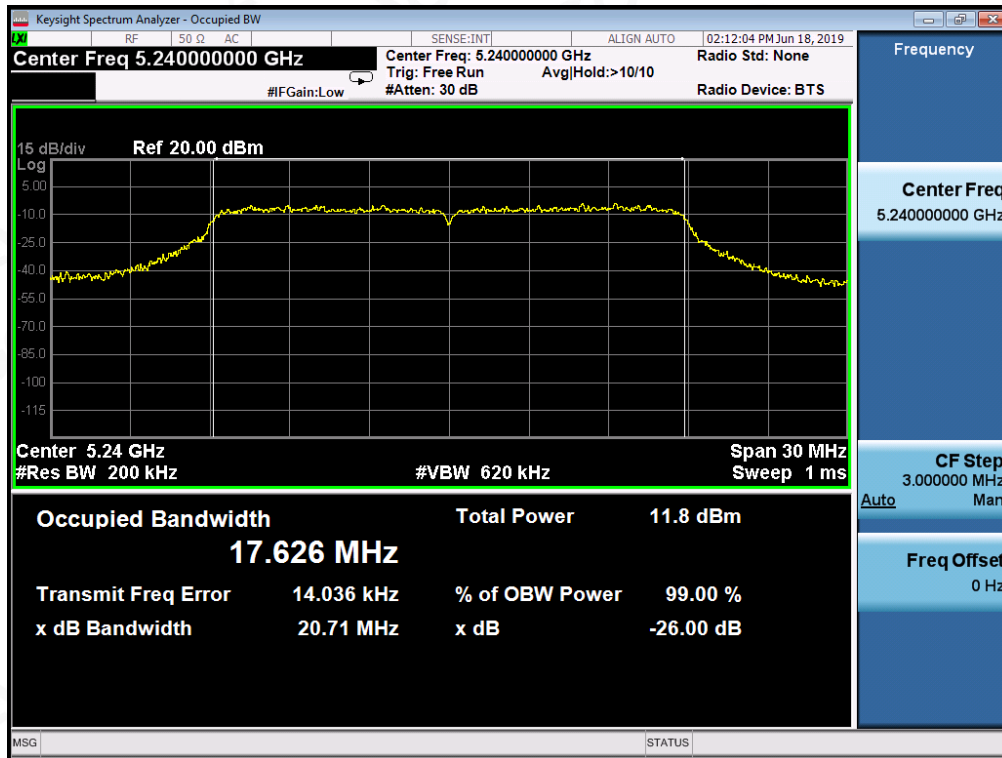

802.11ac40 TEST RESULT


TEST PLOT OF BANDWIDTH FOR 5190MHZ

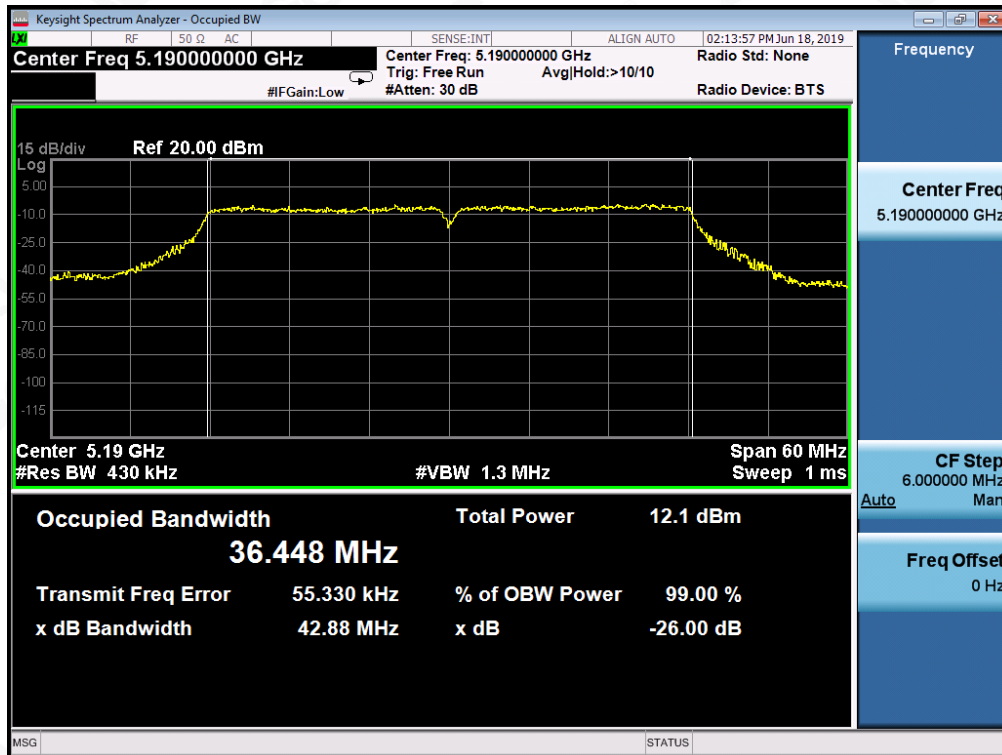

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

TEST PLOT OF BANDWIDTH FOR 5230MHz

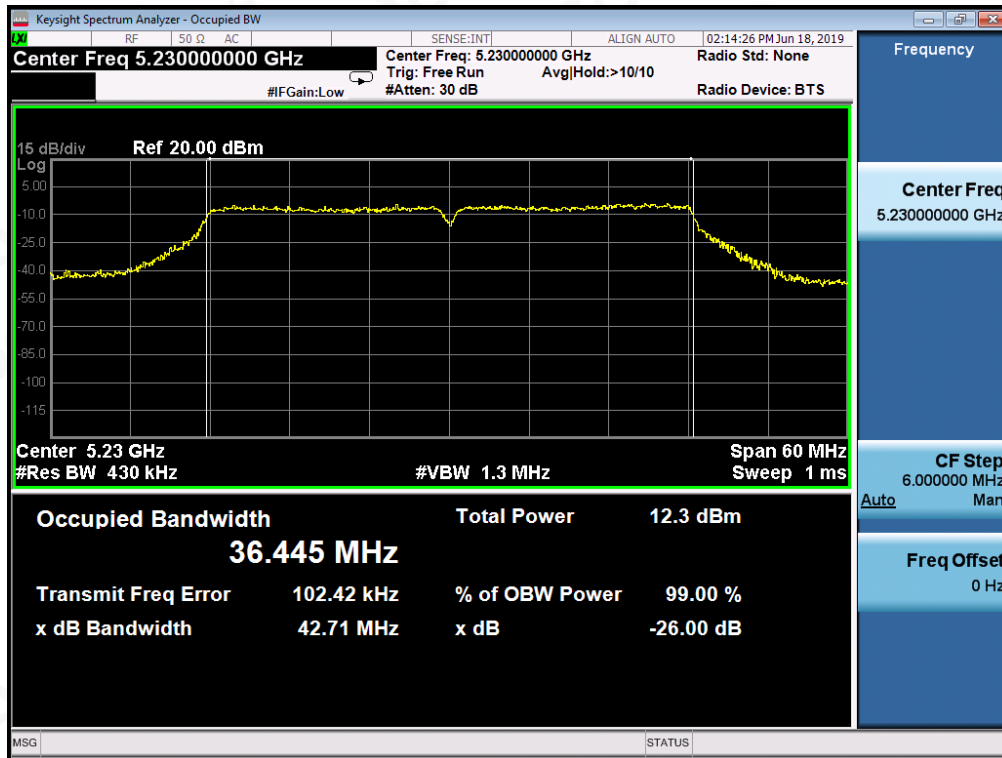

802.11ac80 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5210MHz

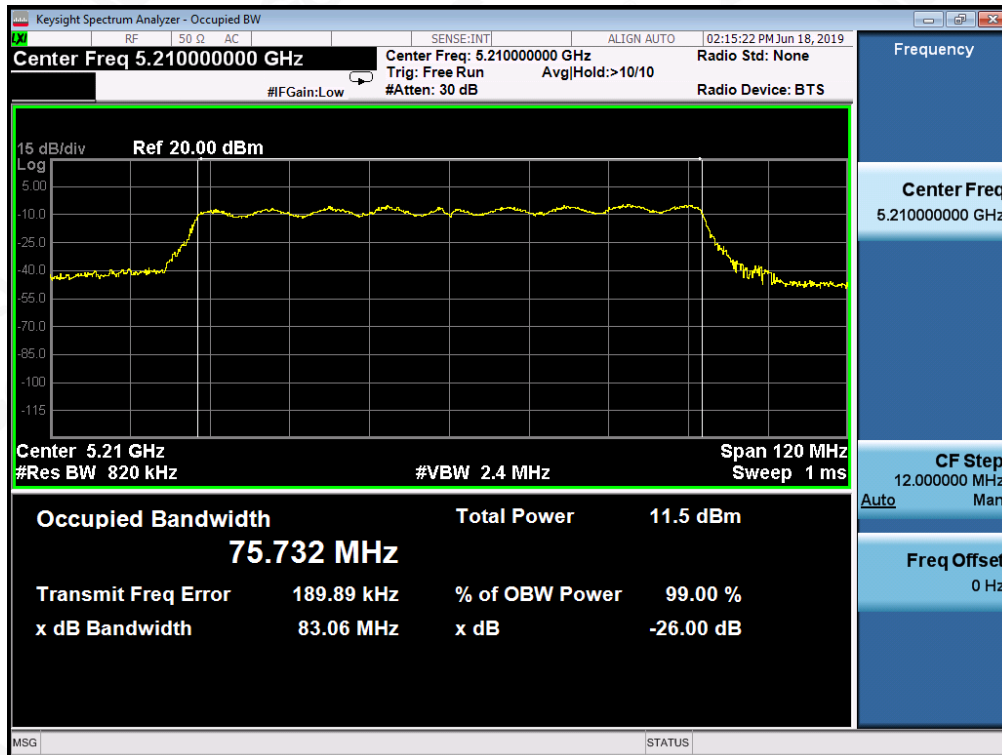

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118



## 10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

### 10.1 MEASUREMENT PROCEDURE

Refer to KDB 789033 section F

### 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

### 10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

### 10.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION			
Freq (MHz)	Power density (dBm/MHz)	Applicable Limits (dBm)	Pass or Fail
5180	-0.363	11	Pass
5200	0.230	11	Pass
5240	1.228	11	Pass
Freq (MHz)	Power density (dBm/500kHz)	Applicable Limits (dBm)	Pass or Fail
5745	-2.630	30	Pass
5785	-3.205	30	Pass
5825	-3.317	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

LIMITS AND MEASUREMENT RESULT FOR 802.11N20/40 MODULATION					
Freq (MHz)	Power density Chain 0 (dBm/MHz)	Power density Chain 1 (dBm/MHz)	Power density Total (dBm/MHz)	Limits (dBm)	Pass or Fail
5180	-0.733	-0.881	2.20	11	Pass
5200	-0.655	-0.449	2.46	11	Pass
5240	0.680	0.442	3.57	11	Pass
5190	-3.181	-3.303	-0.23	11	Pass
5230	-2.311	-2.474	0.62	11	Pass
Freq (MHz)	Power density Chain 0 (dBm/500kHz)	Power density Chain 1 (dBm/500kHz)	Power density Total (dBm/500kHz)	Limits (dBm)	Pass or Fail
5745	-3.260	-3.250	-0.24	30	Pass
5785	-3.388	-3.400	-0.38	30	Pass
5825	-3.990	-4.126	-1.05	30	Pass
5755	-5.814	-6.069	-2.93	30	Pass
5795	-6.244	-5.598	-2.90	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

LIMITS AND MEASUREMENT RESULT FOR 802.11AC20/40/80 MODULATION					
Freq (MHz)	Power density Chain 0 (dBm/MHz)	Power density Chain 1 (dBm/MHz)	Power density Total (dBm/MHz)	Limits (dBm)	Pass or Fail
5180	-1.091	-1.202	1.86	11	Pass
5200	-0.803	-0.907	2.16	11	Pass
5240	0.099	-0.048	3.04	11	Pass
5190	-2.655	-2.675	0.35	11	Pass
5230	-2.093	-2.326	0.80	11	Pass
5210	-4.644	-4.770	-1.70	11	Pass
Freq (MHz)	Power density Chain 0 (dBm/500kHz)	Power density Chain 1 (dBm/500kHz)	Power density Total (dBm/500kHz)	Limits (dBm)	Pass or Fail
5745	-3.308	-3.532	-0.41	30	Pass
5785	-3.464	-3.900	-0.67	30	Pass
5825	-4.335	-4.368	-1.34	30	Pass
5755	-5.500	-5.669	-2.57	30	Pass
5795	-5.794	-5.785	-2.78	30	Pass
5775	-8.036	-7.824	-4.92	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118