


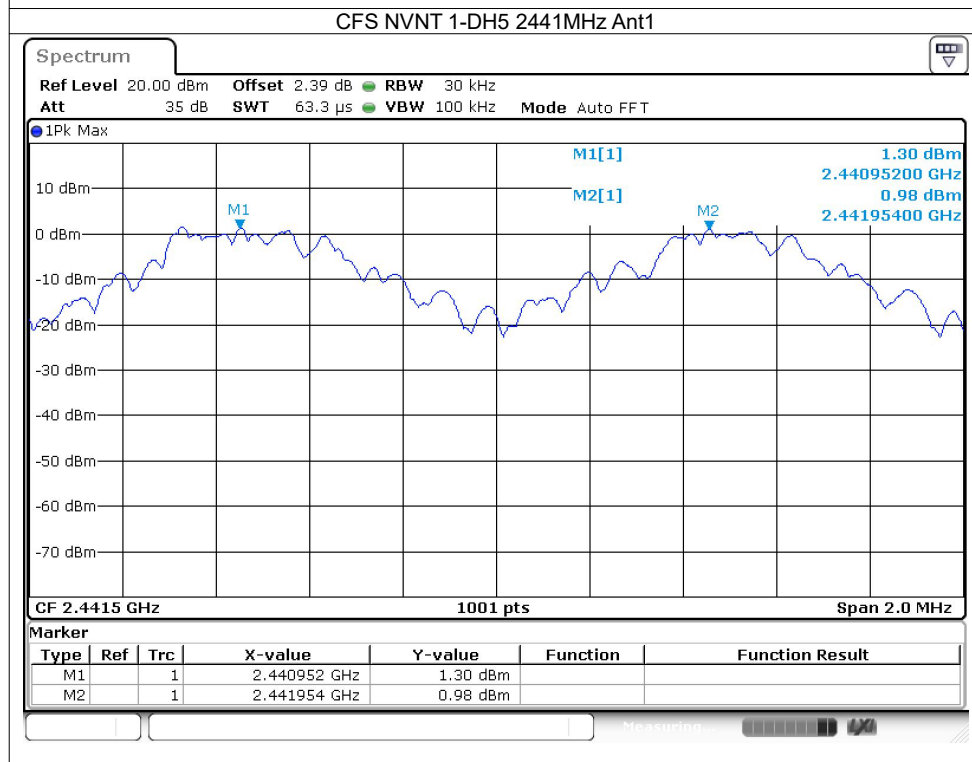
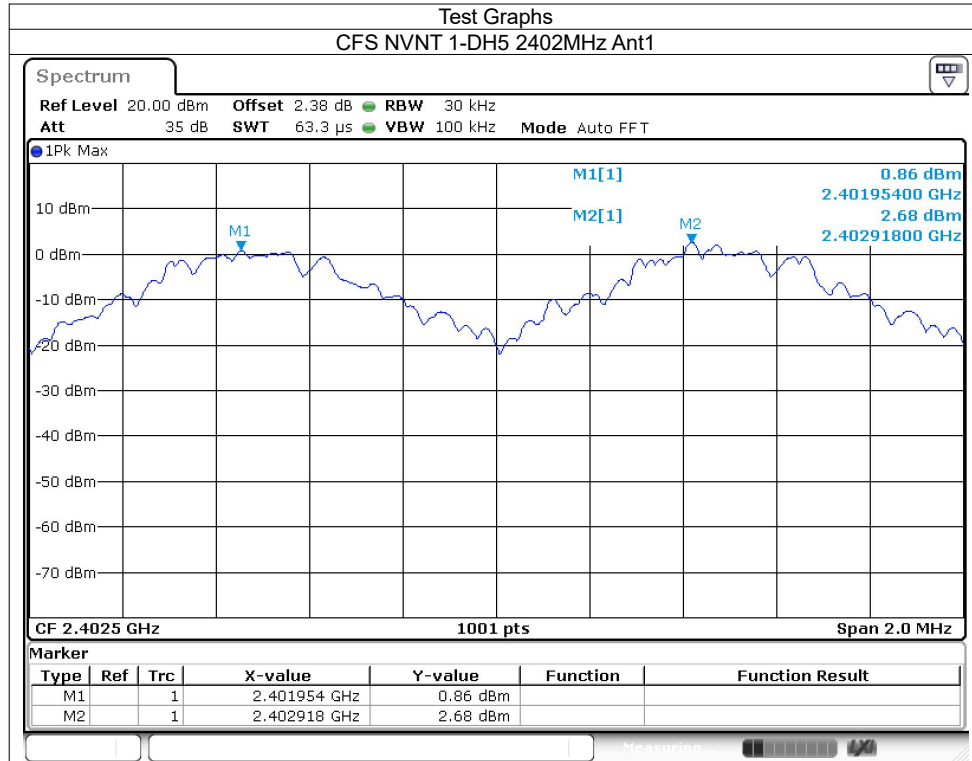
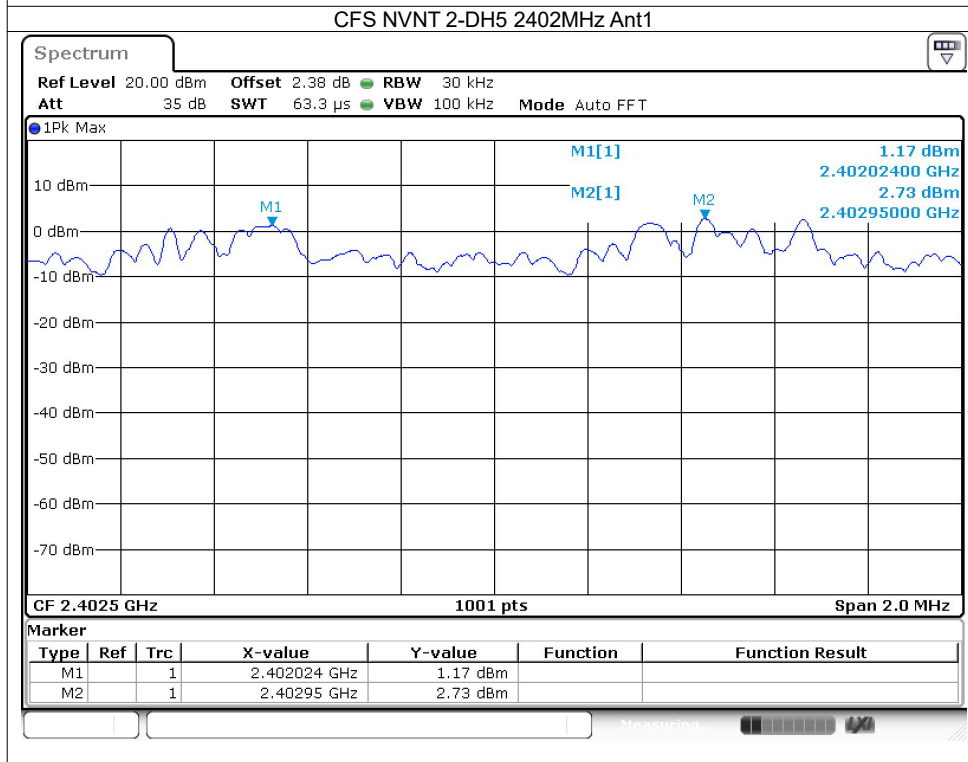



8.5 **CARRIER FREQUENCIES SEPARATION**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.954	2402.918	0.964	0.685	Pass
NVNT	1-DH5	Ant1	2440.952	2441.954	1.002	0.685	Pass
NVNT	1-DH5	Ant1	2478.902	2479.828	0.926	0.687	Pass
NVNT	2-DH5	Ant1	2402.024	2402.95	0.926	0.889	Pass
NVNT	2-DH5	Ant1	2441.012	2441.978	0.966	0.889	Pass
NVNT	2-DH5	Ant1	2478.98	2480.02	1.04	0.885	Pass
NVNT	3-DH5	Ant1	2401.828	2402.824	0.996	0.857	Pass
NVNT	3-DH5	Ant1	2440.976	2441.929	0.953	0.857	Pass
NVNT	3-DH5	Ant1	2478.95	2479.828	0.878	0.856	Pass

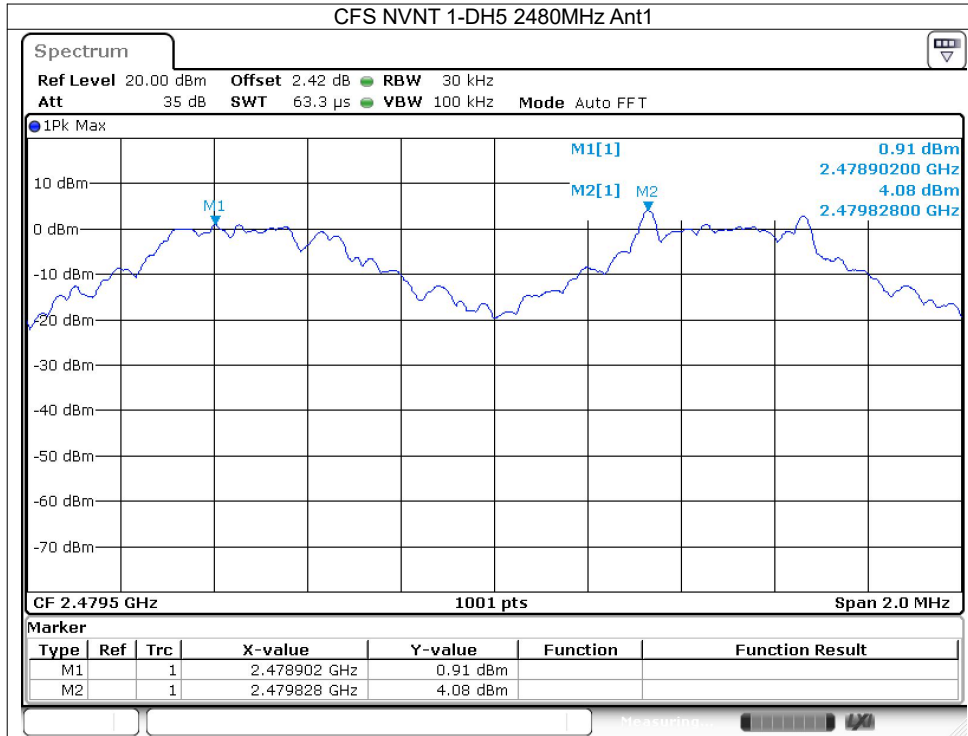


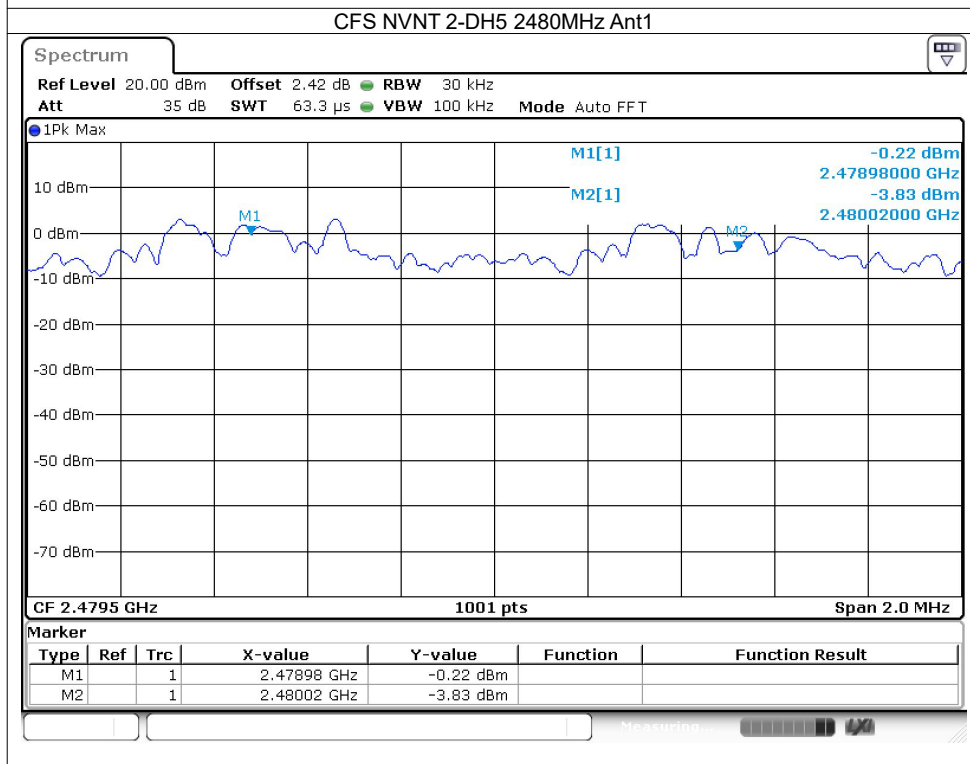


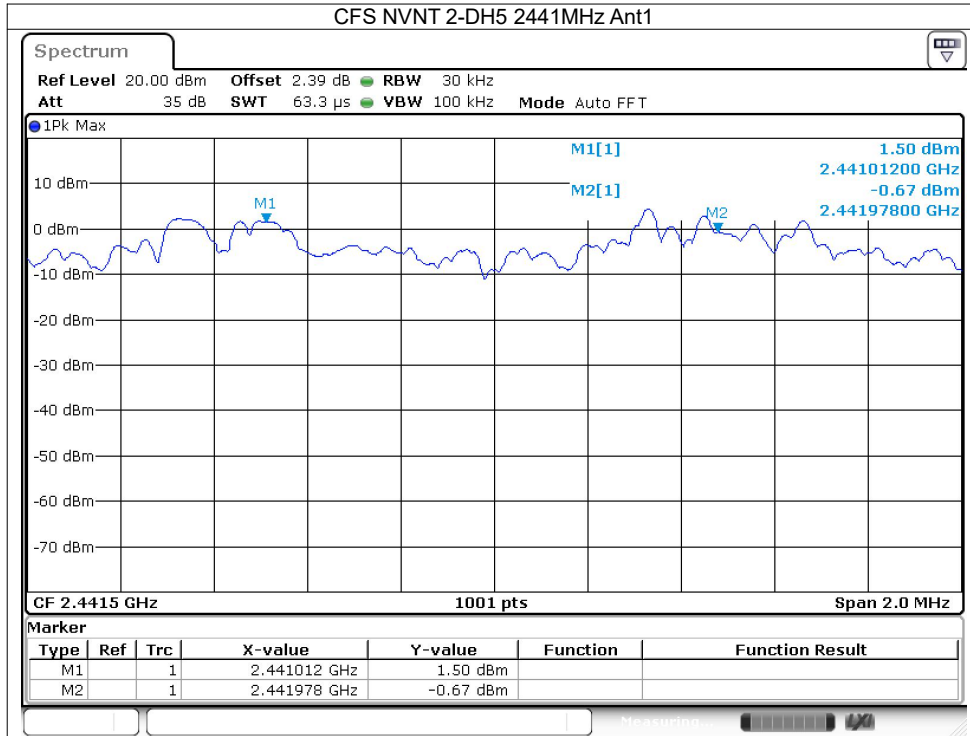


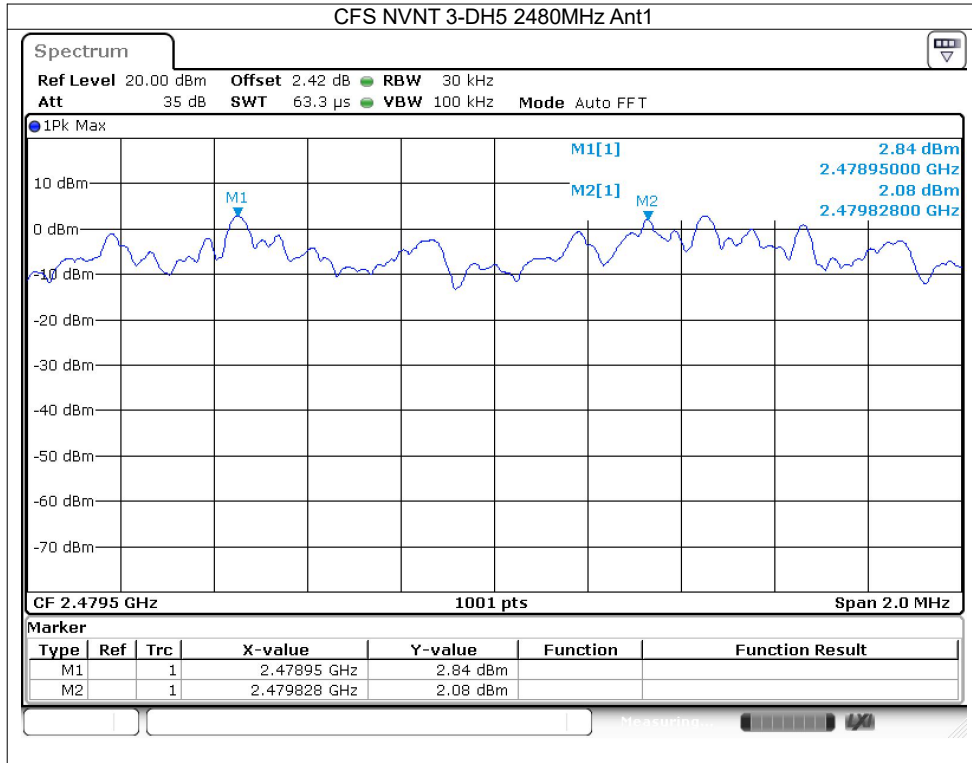

8.6 NUMBER OF HOPPING CHANNEL



Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

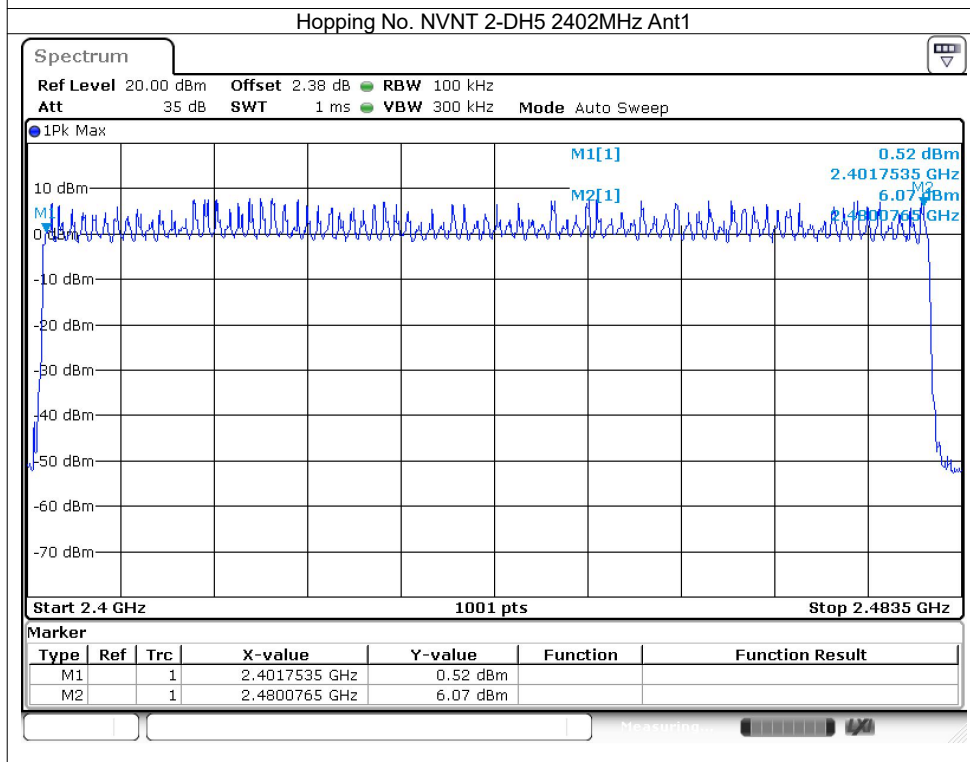
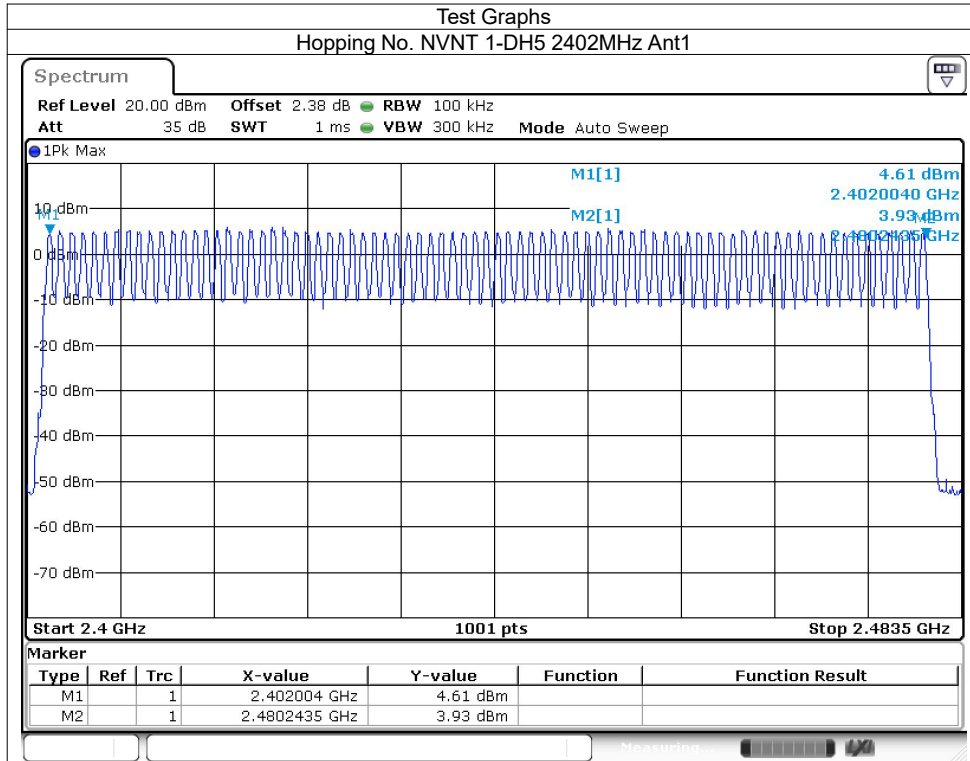



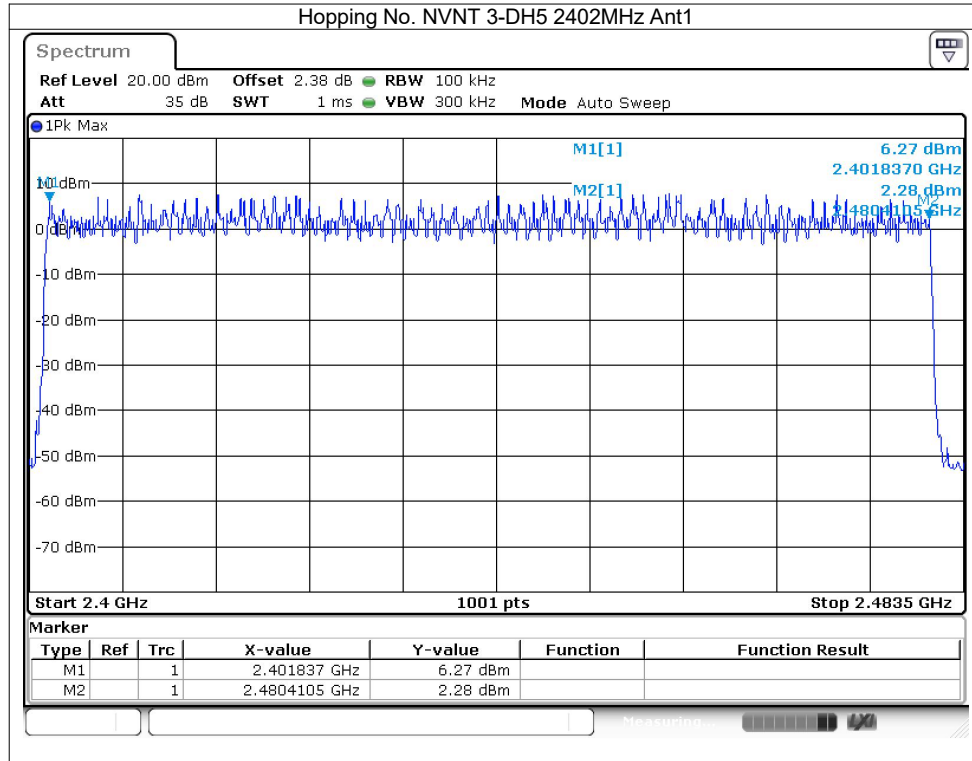




8.7 **BAND EDGE**



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-52.58	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54.69	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-47.63	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-51.06	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-48.72	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-49.96	-20	Pass

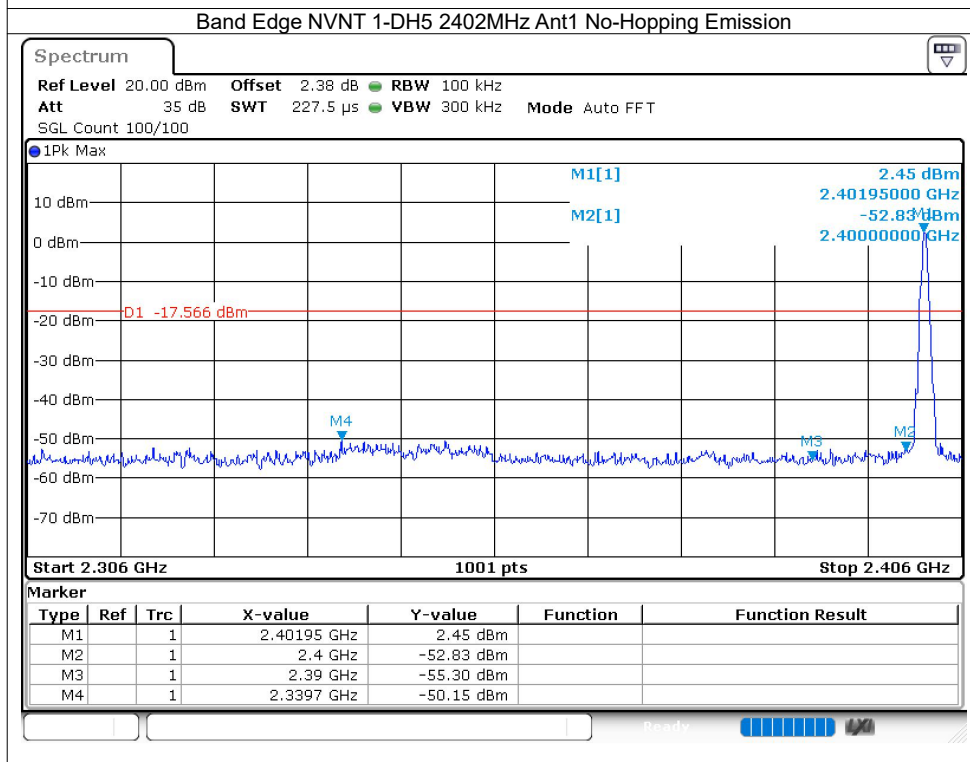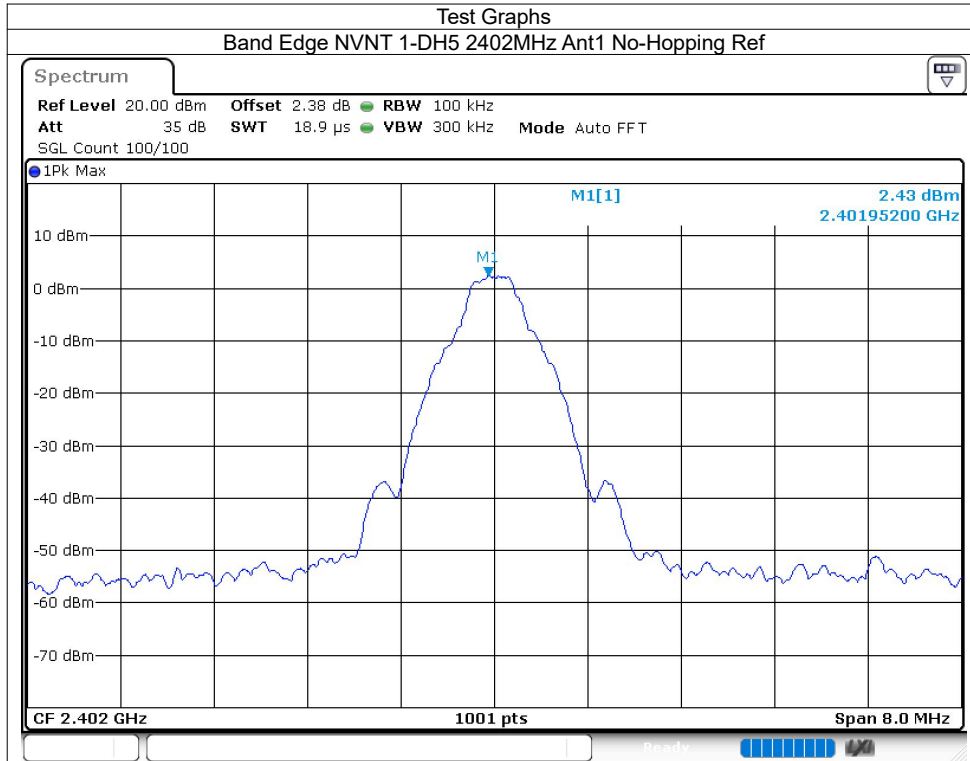


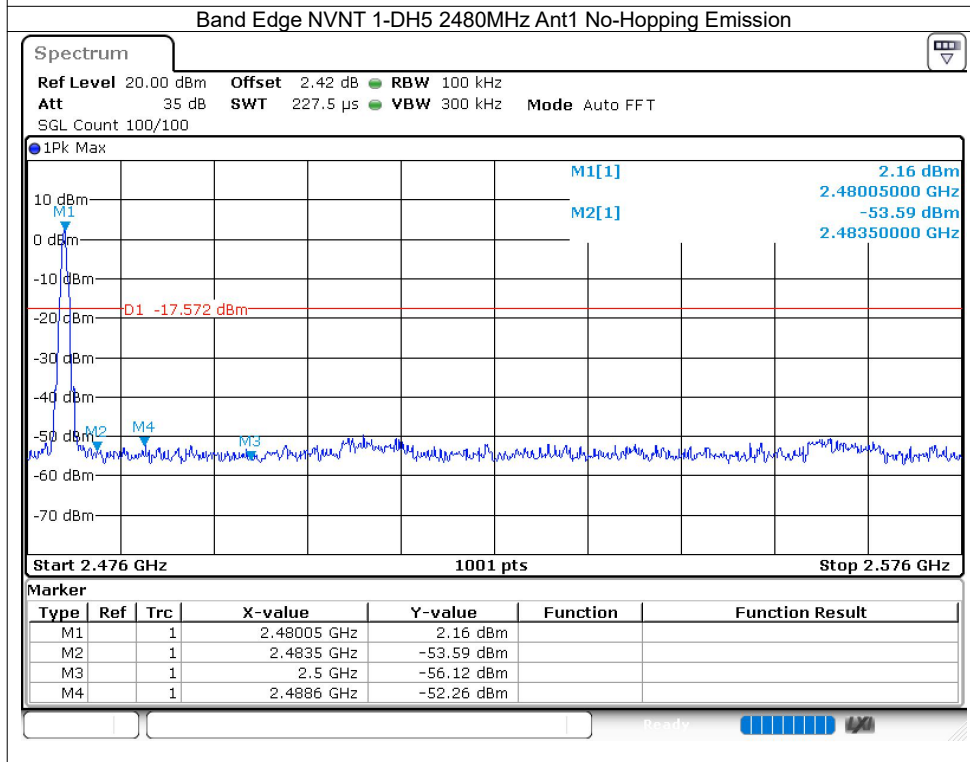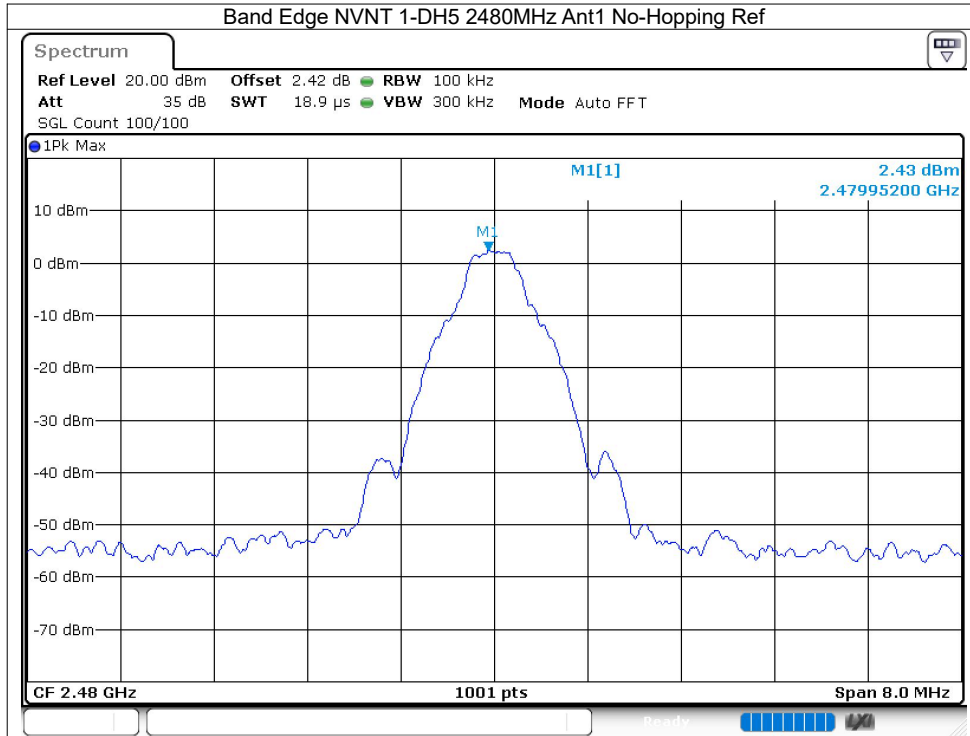

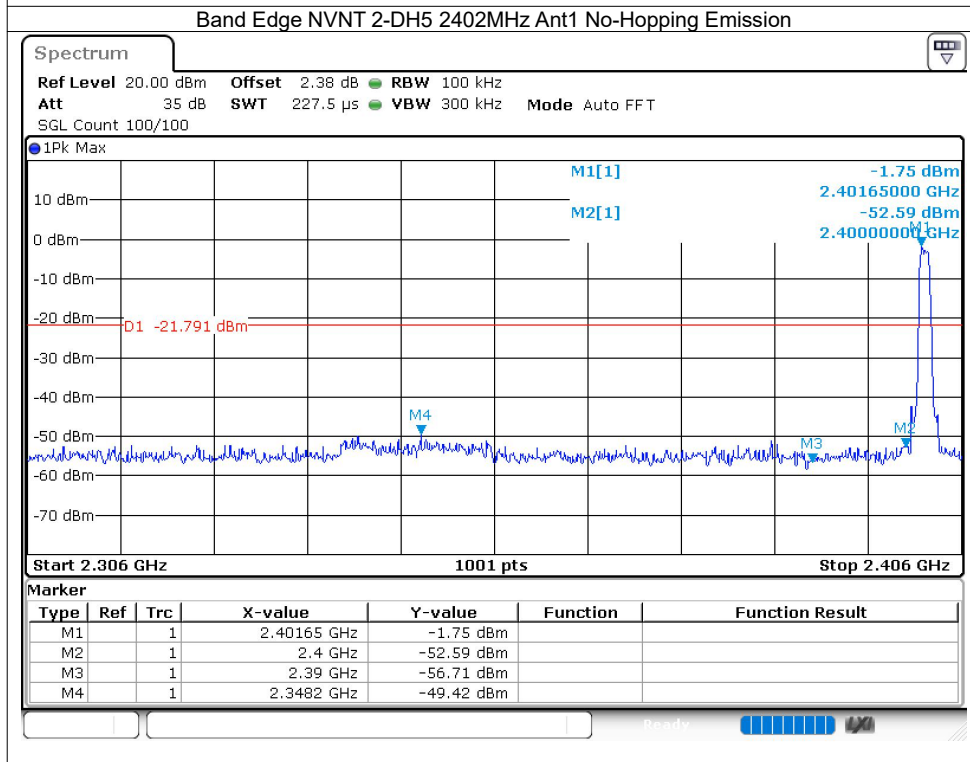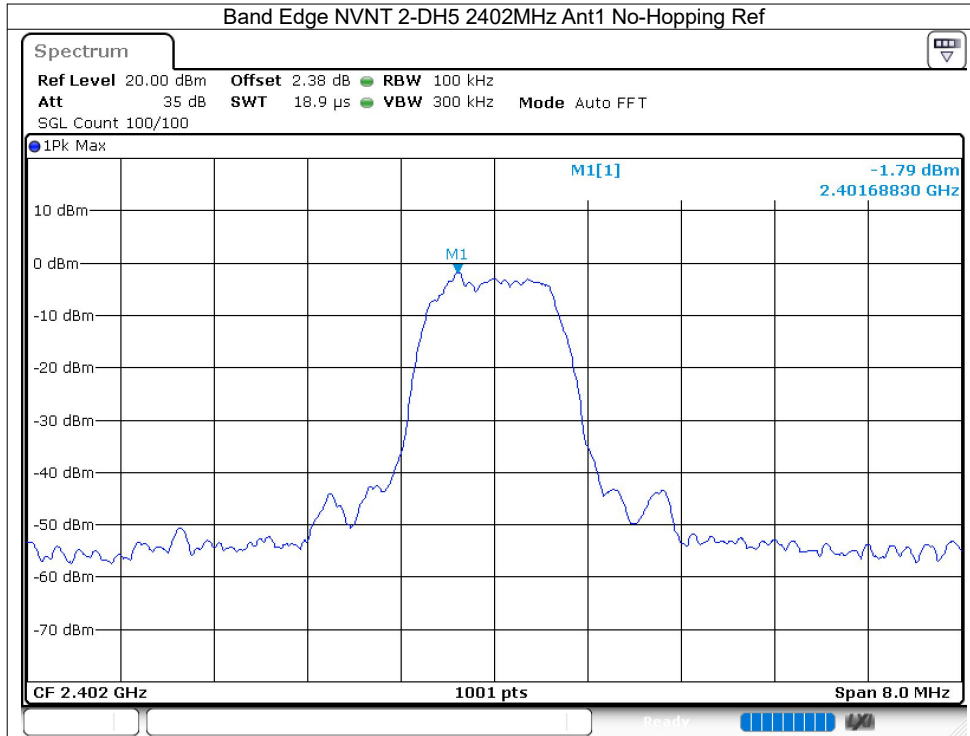

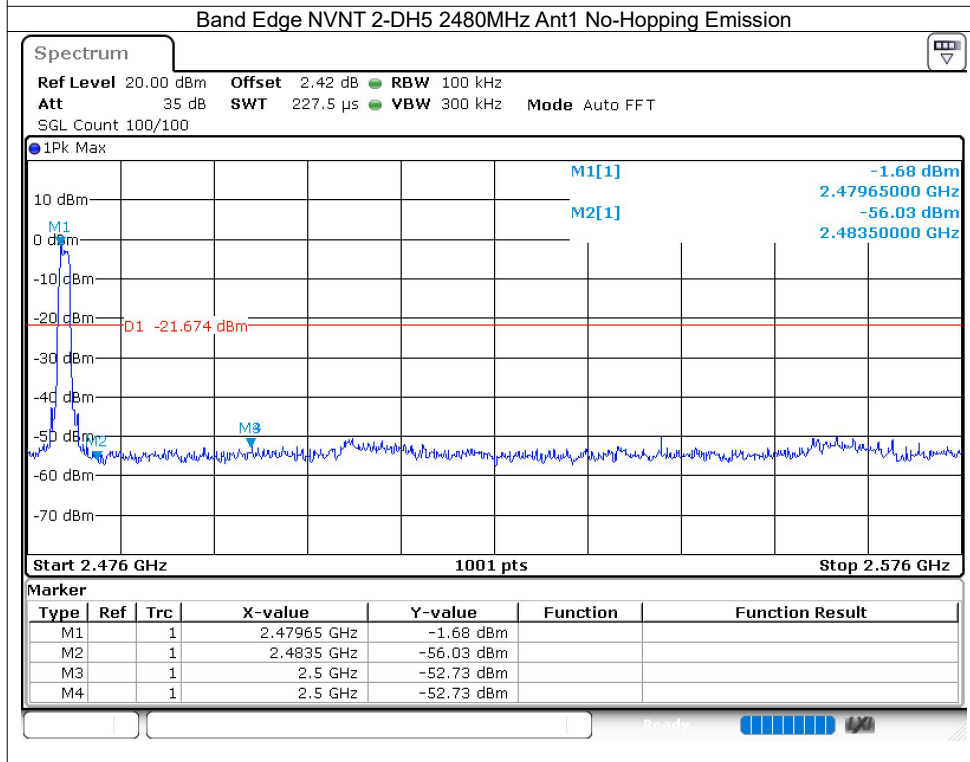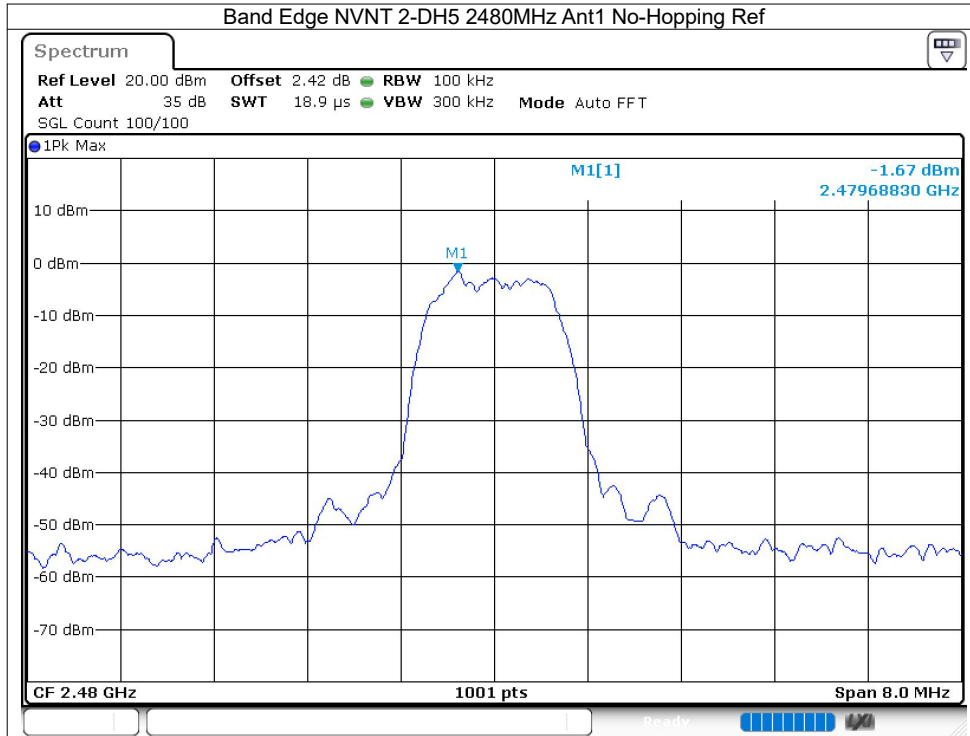

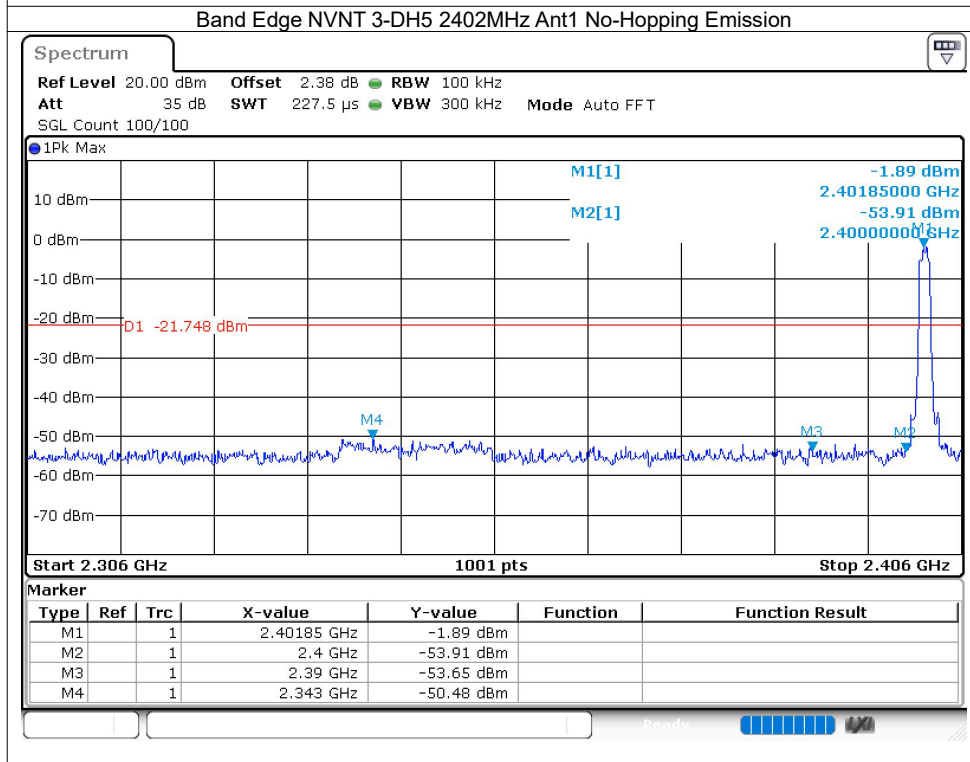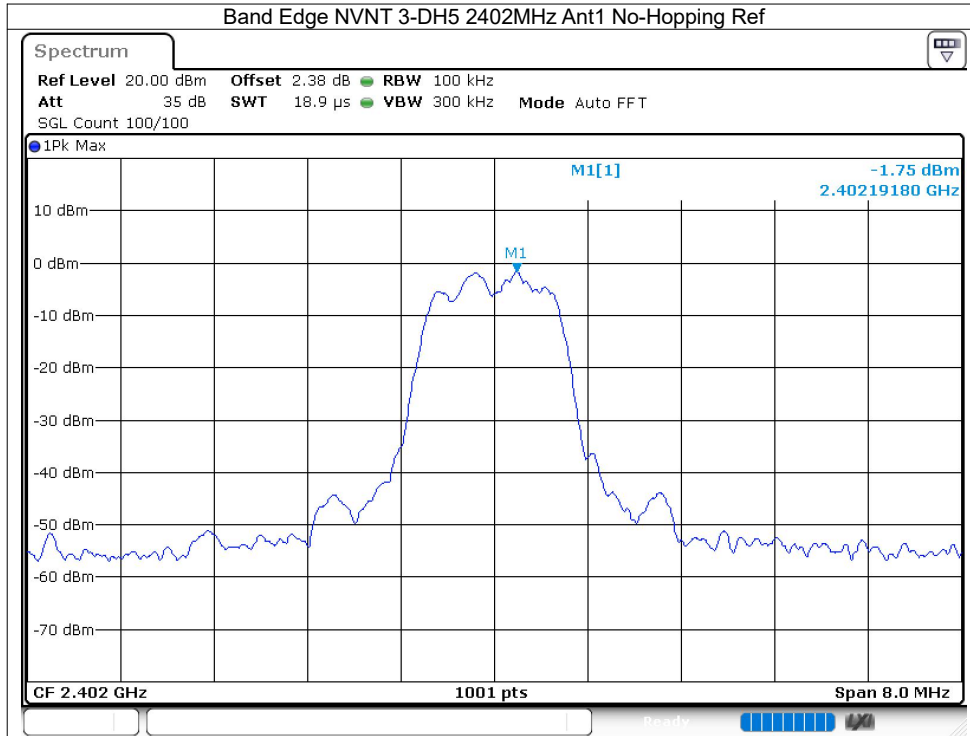

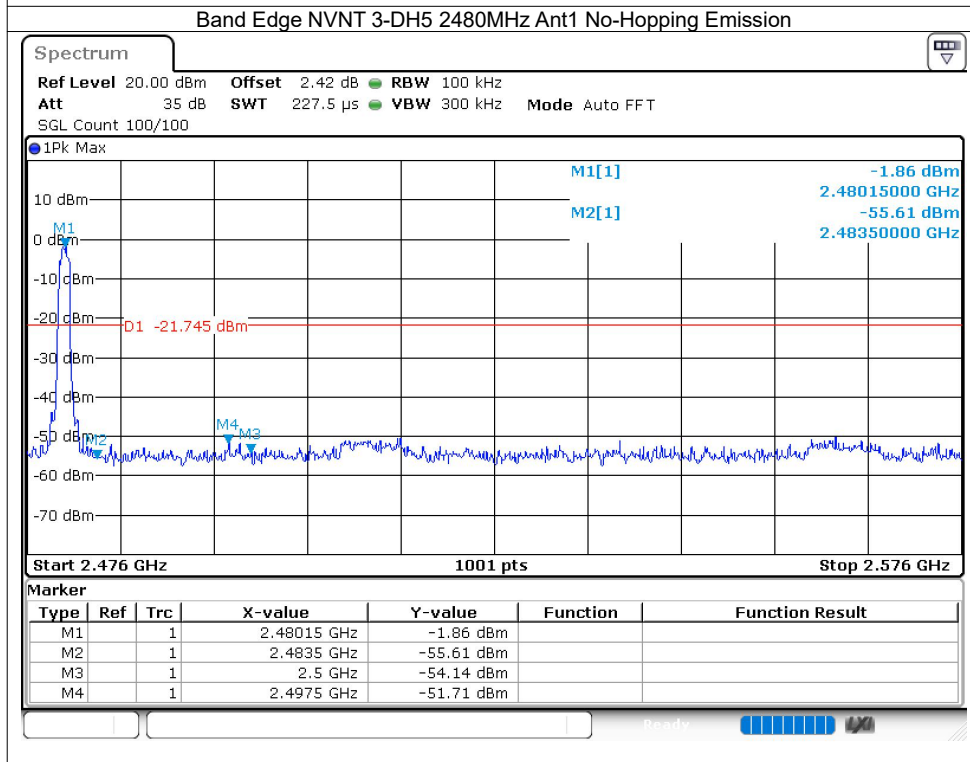

8.8 **BAND EDGE(HOPPING)**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55.01	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.82	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-55.42	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-58.58	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-56.14	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-58.76	-20	Pass

