

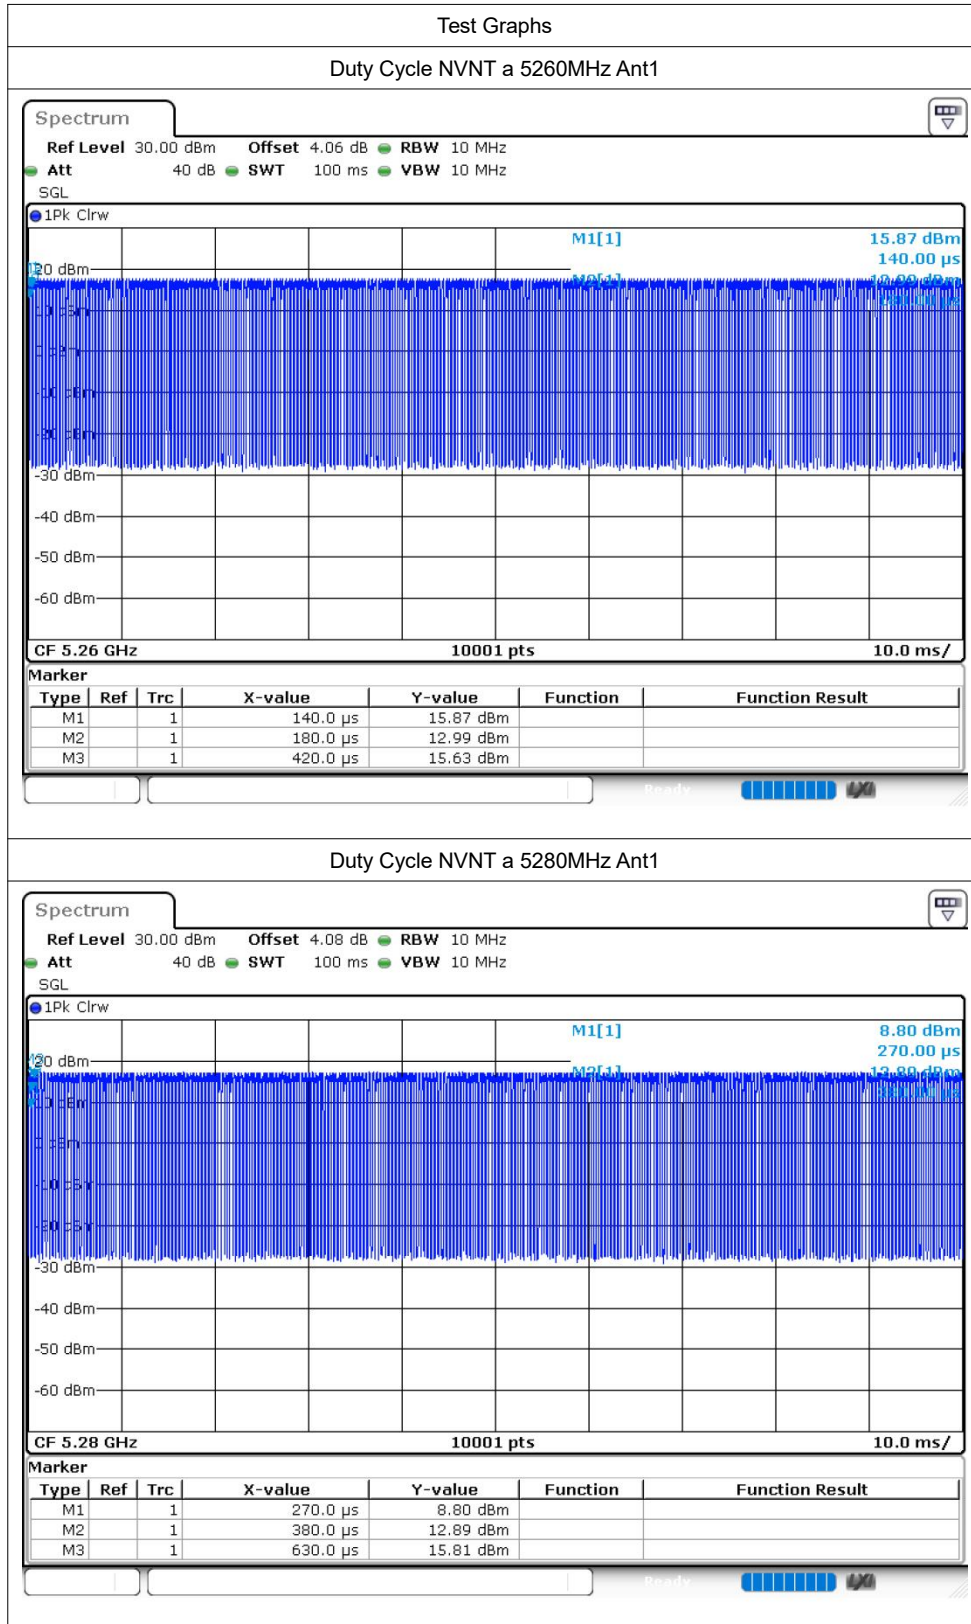



5.3G WIFI


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	73.07	1.36	4.17
NVNT	a	5280	Ant1	73.4	1.34	4
NVNT	a	5320	Ant1	71.78	1.44	4
NVNT	n20	5260	Ant1	71.82	1.44	4.35
NVNT	n20	5280	Ant1	71.9	1.43	4.35
NVNT	n20	5320	Ant1	71.47	1.46	4.35
NVNT	n40	5270	Ant1	58.17	2.35	7.69
NVNT	n40	5310	Ant1	57.93	2.37	7.69
NVNT	ac20	5260	Ant1	67.5	1.71	5
NVNT	ac20	5280	Ant1	68.57	1.64	5
NVNT	ac20	5320	Ant1	68.68	1.63	5
NVNT	ac40	5270	Ant1	56.04	2.51	8.33
NVNT	ac40	5310	Ant1	56	2.52	9.09
NVNT	ac80	5290	Ant1	45.02	3.47	14.29

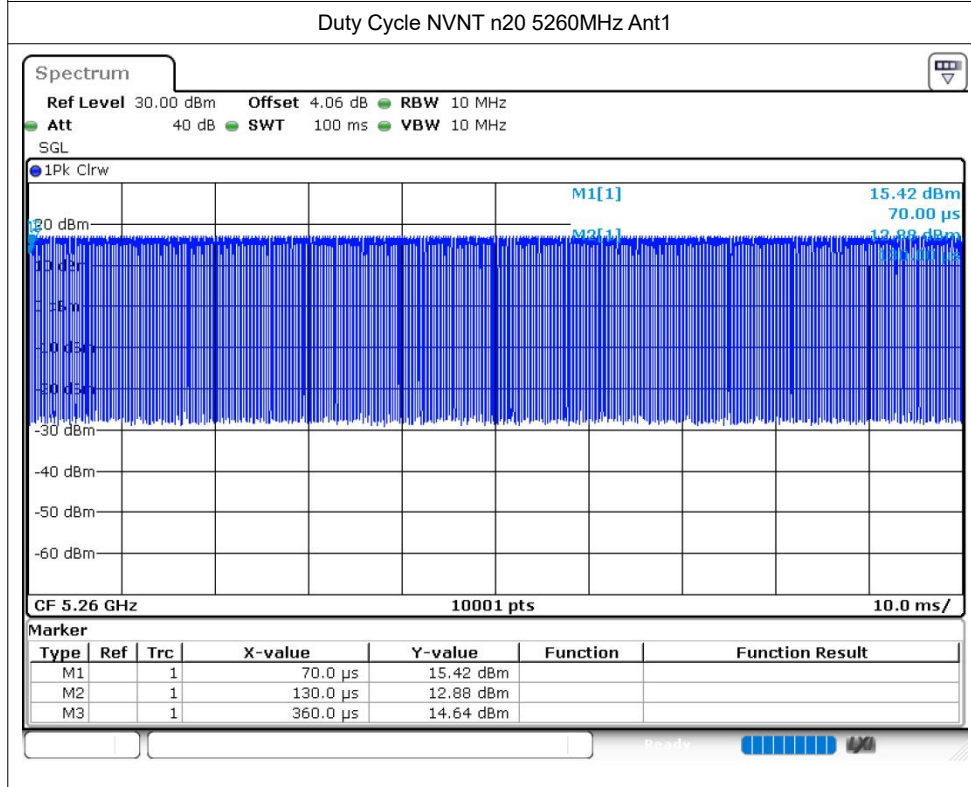

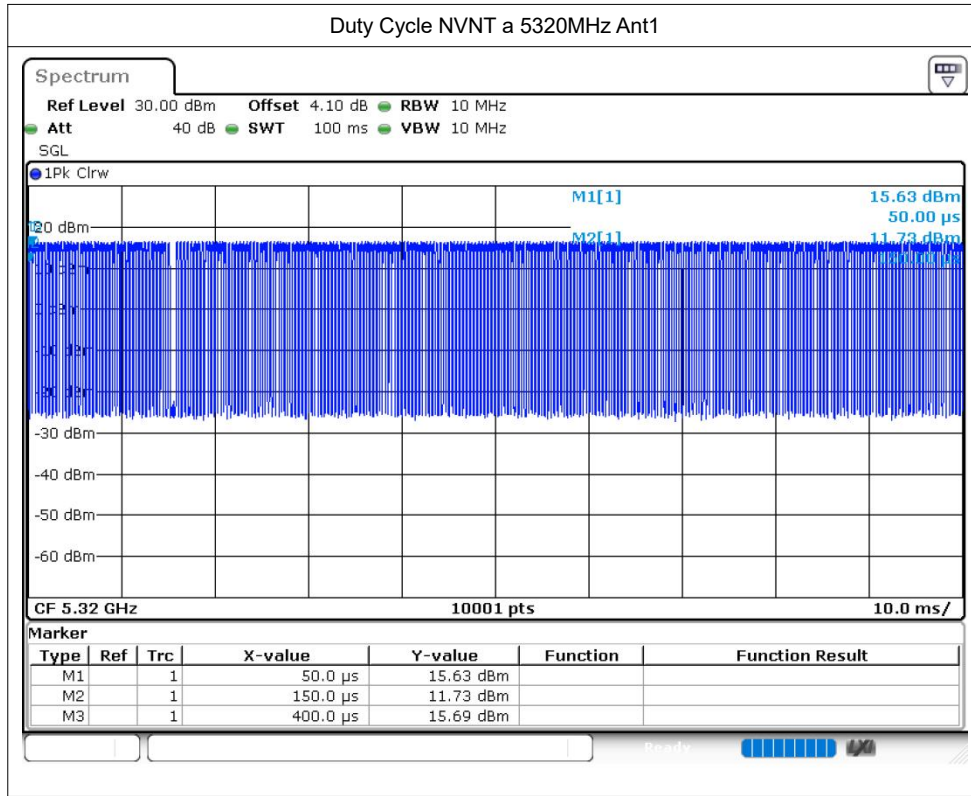

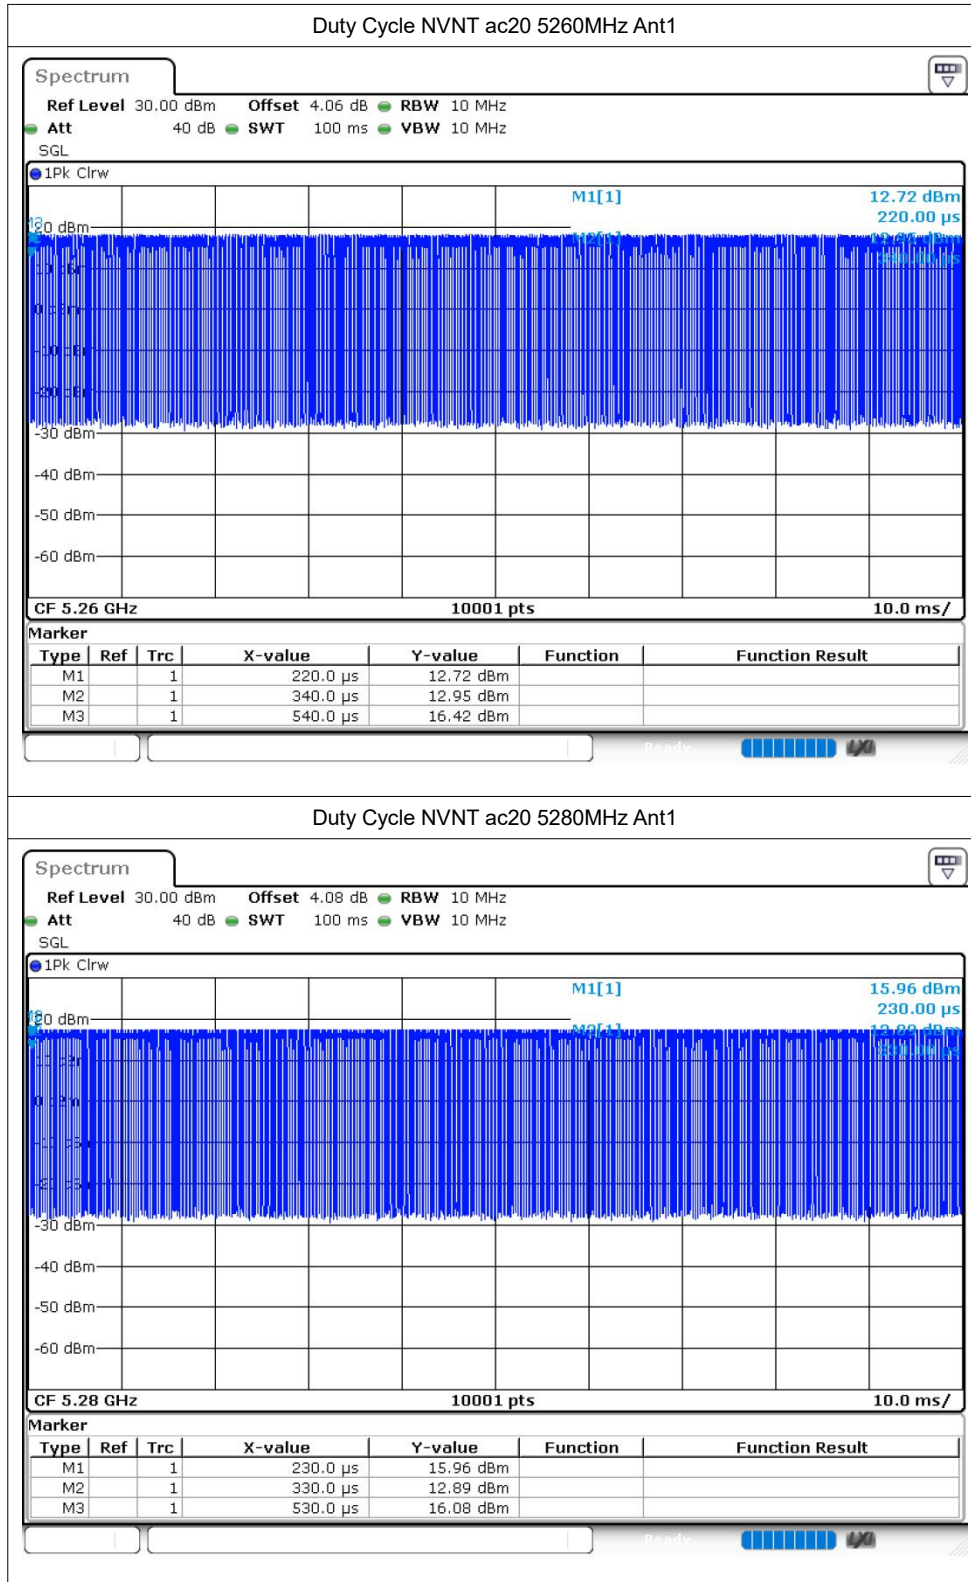

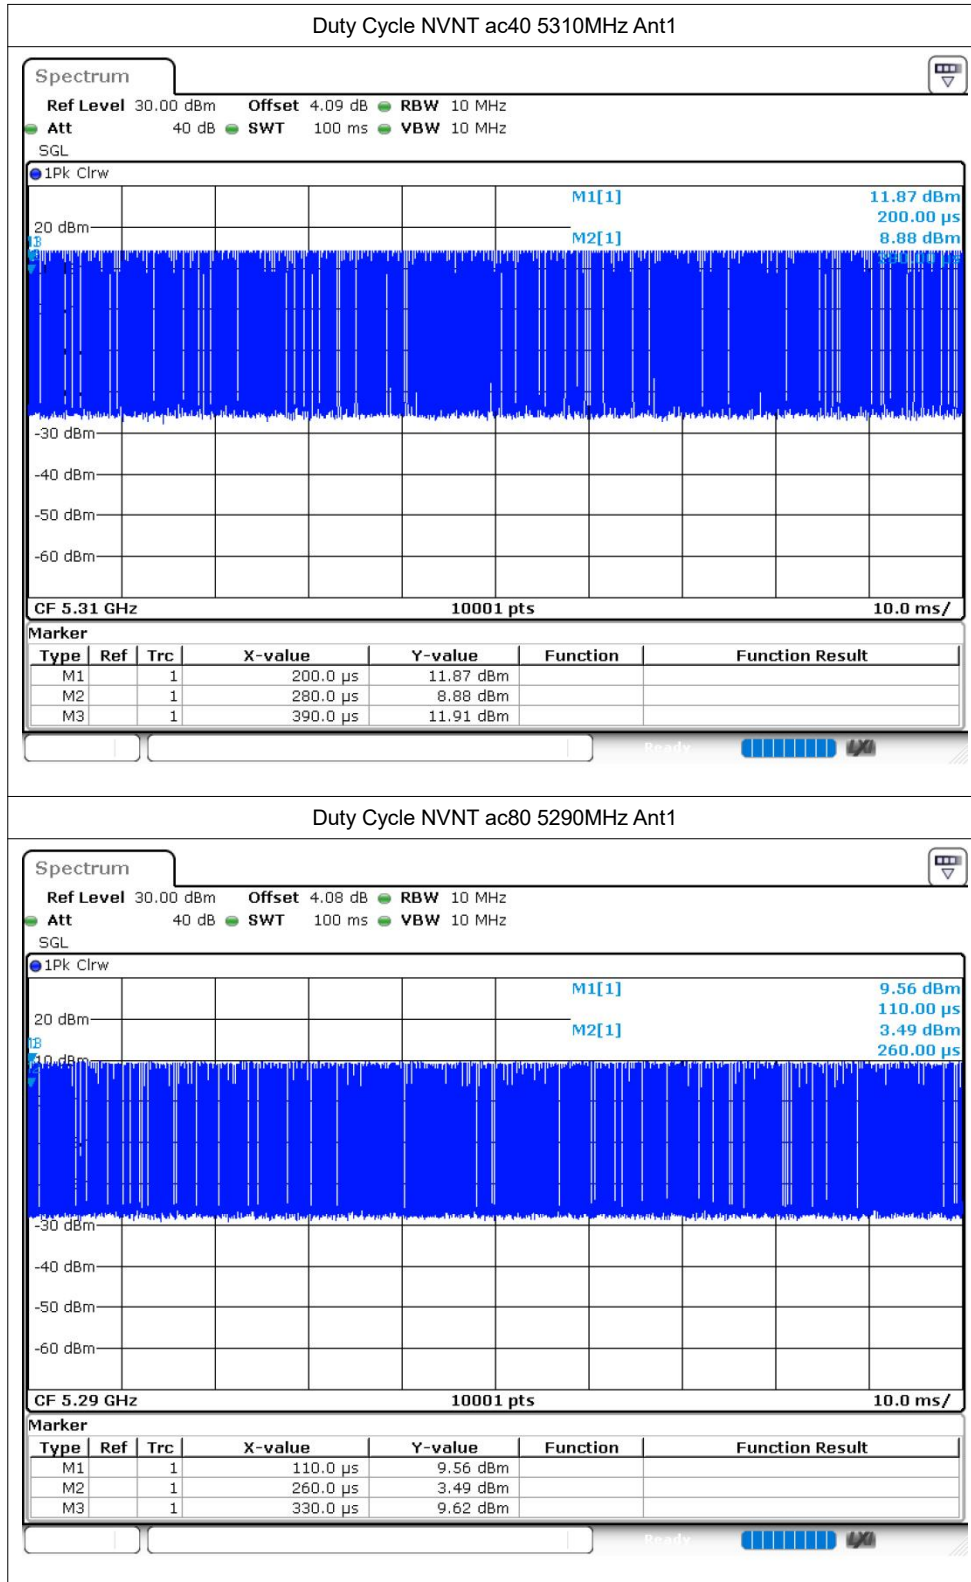

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	11.87	24	Pass
NVNT	a	5280	Ant1	11.57	24	Pass
NVNT	a	5320	Ant1	11.55	24	Pass
NVNT	n20	5260	Ant1	11.58	24	Pass
NVNT	n20	5280	Ant1	11.69	24	Pass
NVNT	n20	5320	Ant1	11.51	24	Pass
NVNT	n40	5270	Ant1	11.86	24	Pass
NVNT	n40	5310	Ant1	11.94	24	Pass
NVNT	ac20	5260	Ant1	11.83	24	Pass
NVNT	ac20	5280	Ant1	11.62	24	Pass
NVNT	ac20	5320	Ant1	11.74	24	Pass
NVNT	ac40	5270	Ant1	11.83	24	Pass
NVNT	ac40	5310	Ant1	11.89	24	Pass
NVNT	ac80	5290	Ant1	10.74	24	Pass

-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	20.559	0.5	Pass
NVNT	a	5280	Ant1	20.1	0.5	Pass
NVNT	a	5320	Ant1	19.836	0.5	Pass
NVNT	n20	5260	Ant1	20.868	0.5	Pass
NVNT	n20	5280	Ant1	20.433	0.5	Pass
NVNT	n20	5320	Ant1	20.475	0.5	Pass
NVNT	n40	5270	Ant1	41.178	0.5	Pass
NVNT	n40	5310	Ant1	41.322	0.5	Pass
NVNT	ac20	5260	Ant1	21.477	0.5	Pass
NVNT	ac20	5280	Ant1	20.643	0.5	Pass
NVNT	ac20	5320	Ant1	20.709	0.5	Pass
NVNT	ac40	5270	Ant1	41.208	0.5	Pass
NVNT	ac40	5310	Ant1	42.33	0.5	Pass
NVNT	ac80	5290	Ant1	82.536	0.5	Pass



Test Graphs



-26dB Bandwidth NVNT a 5260MHz Ant1


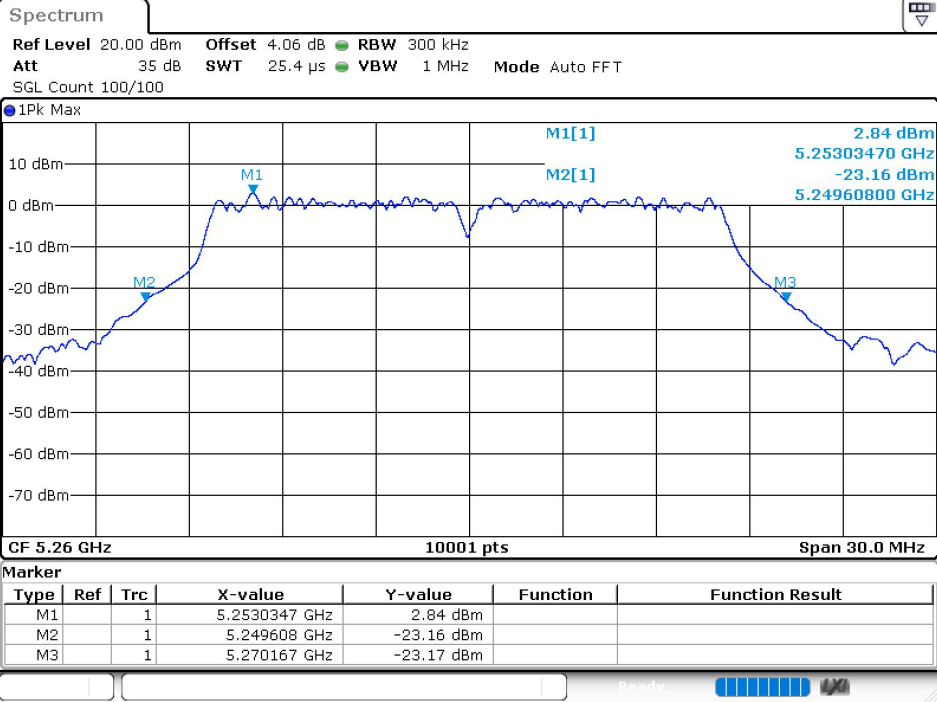




-26dB Bandwidth NVNT a 5280MHz Ant1


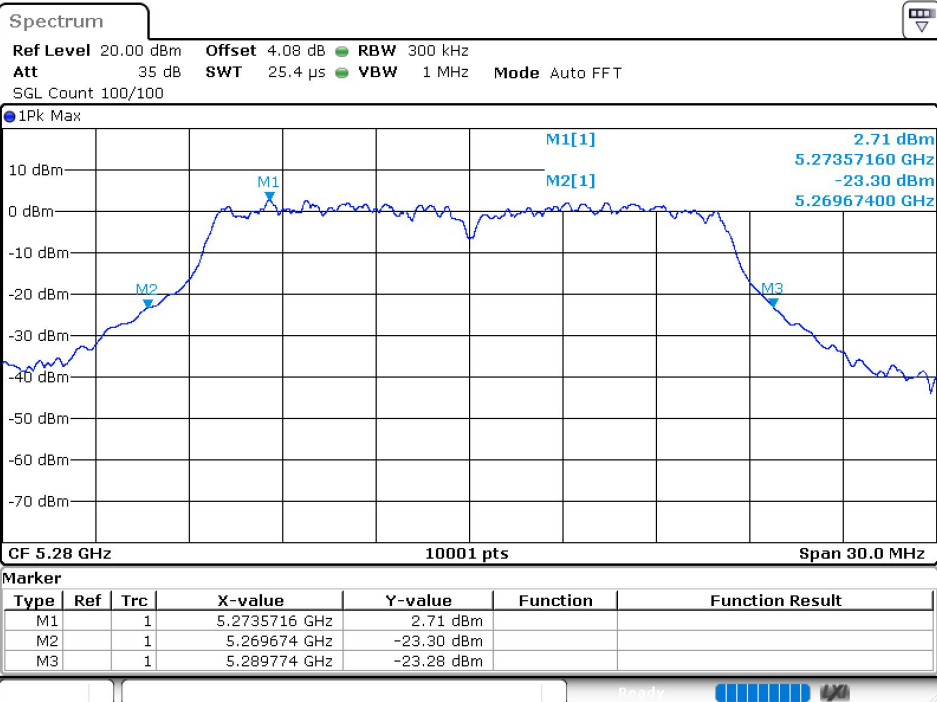


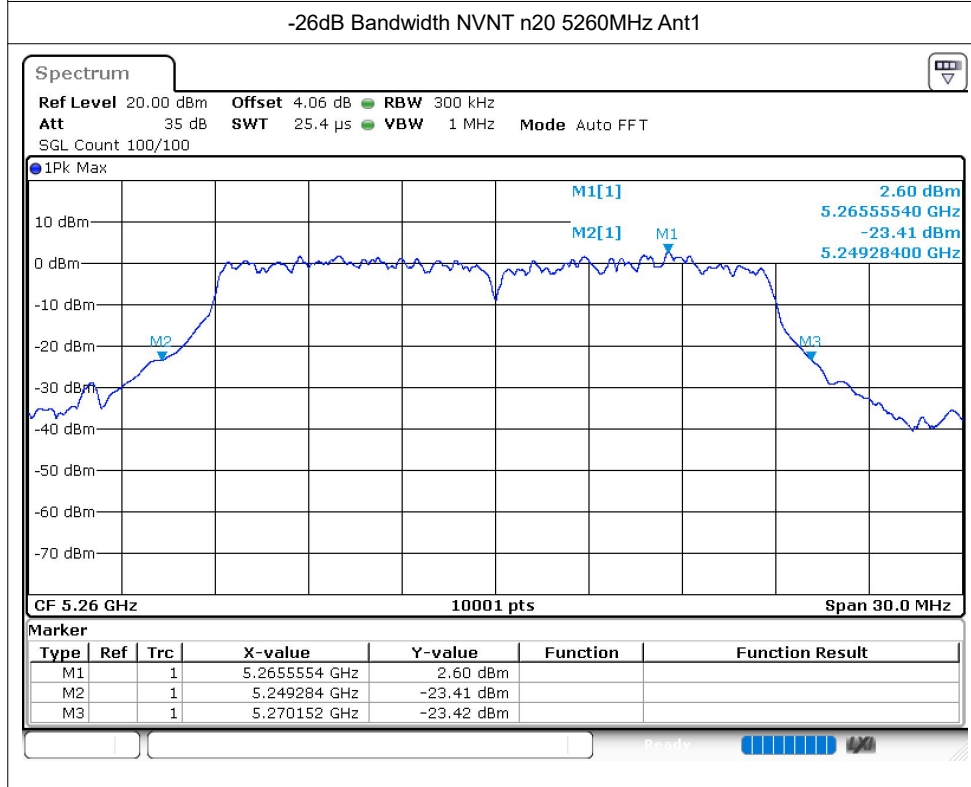
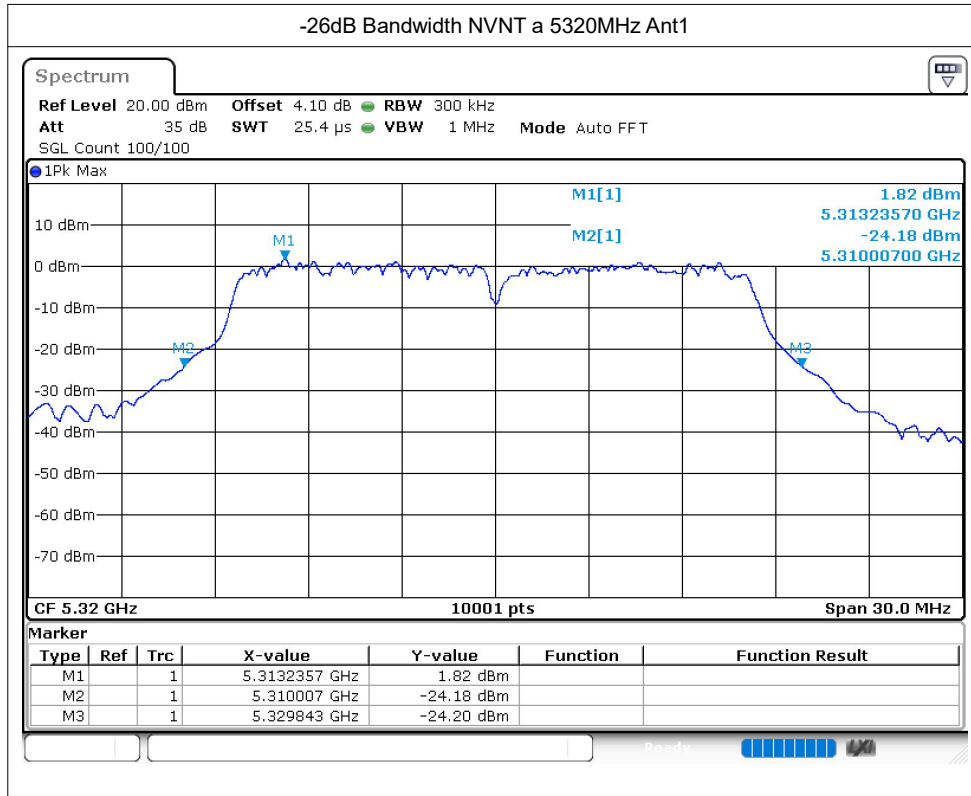


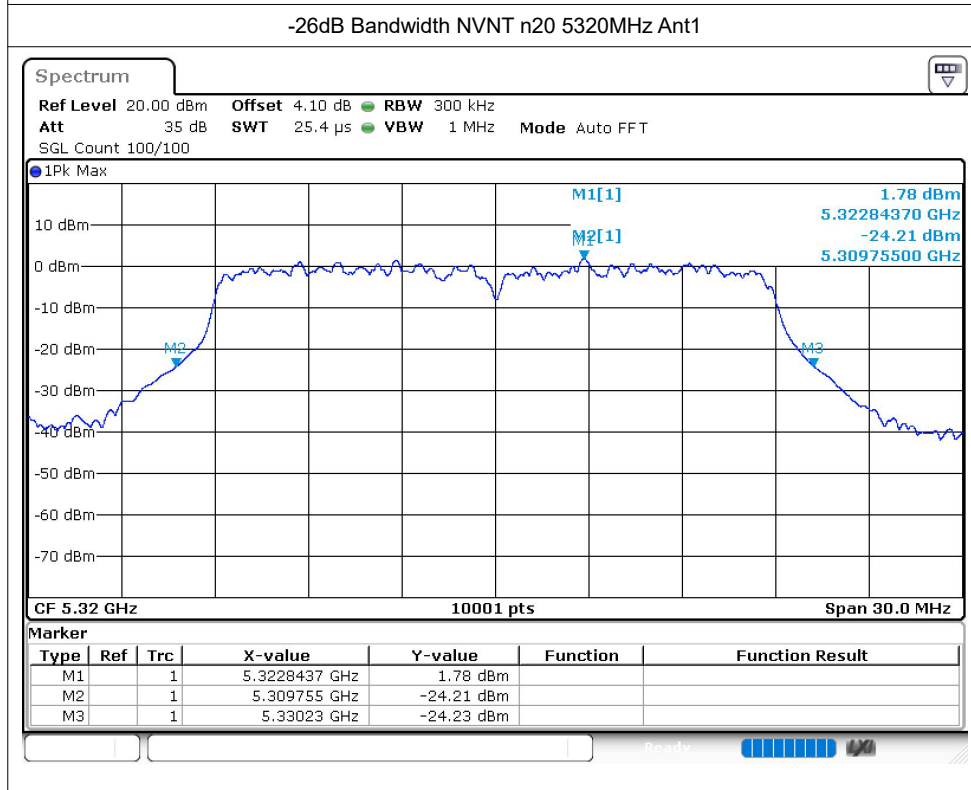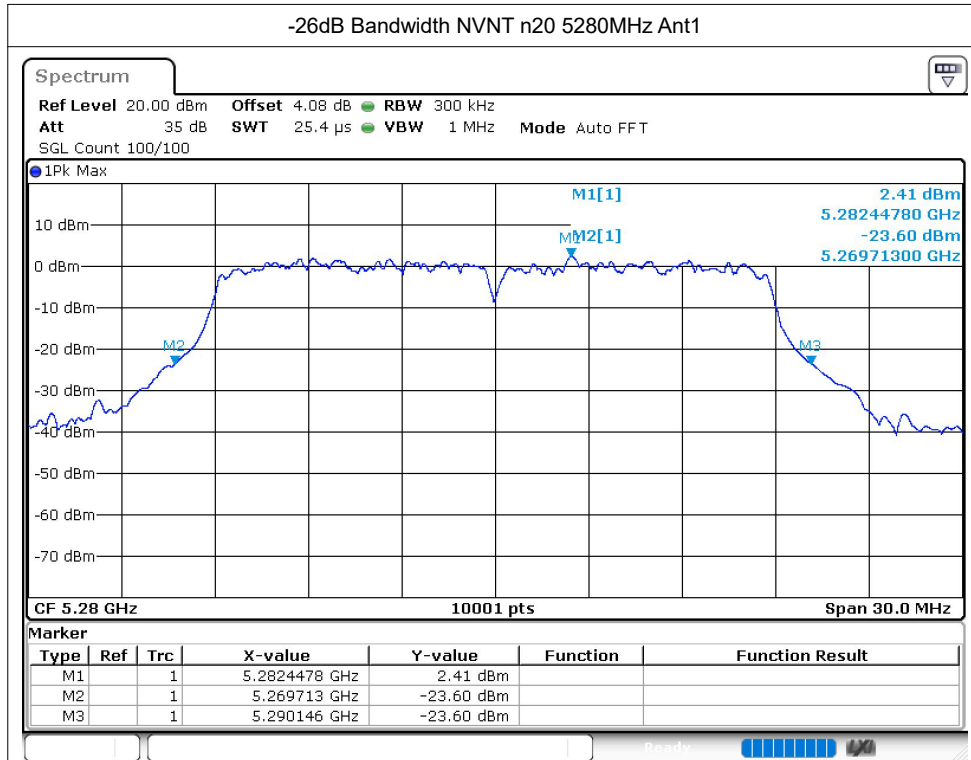

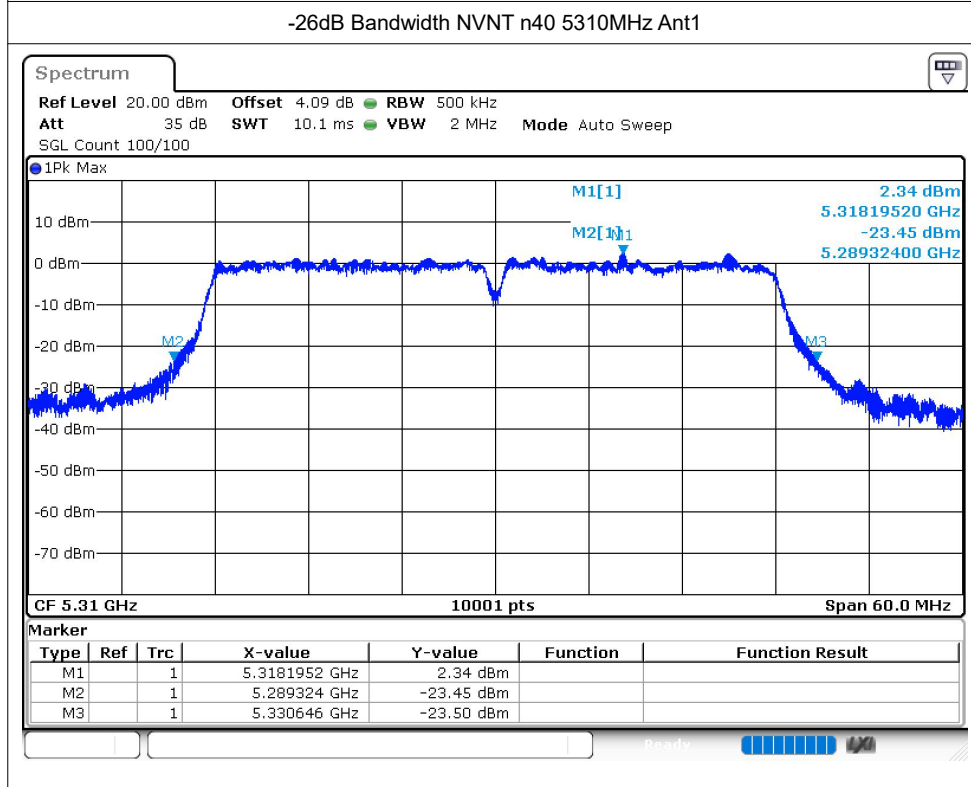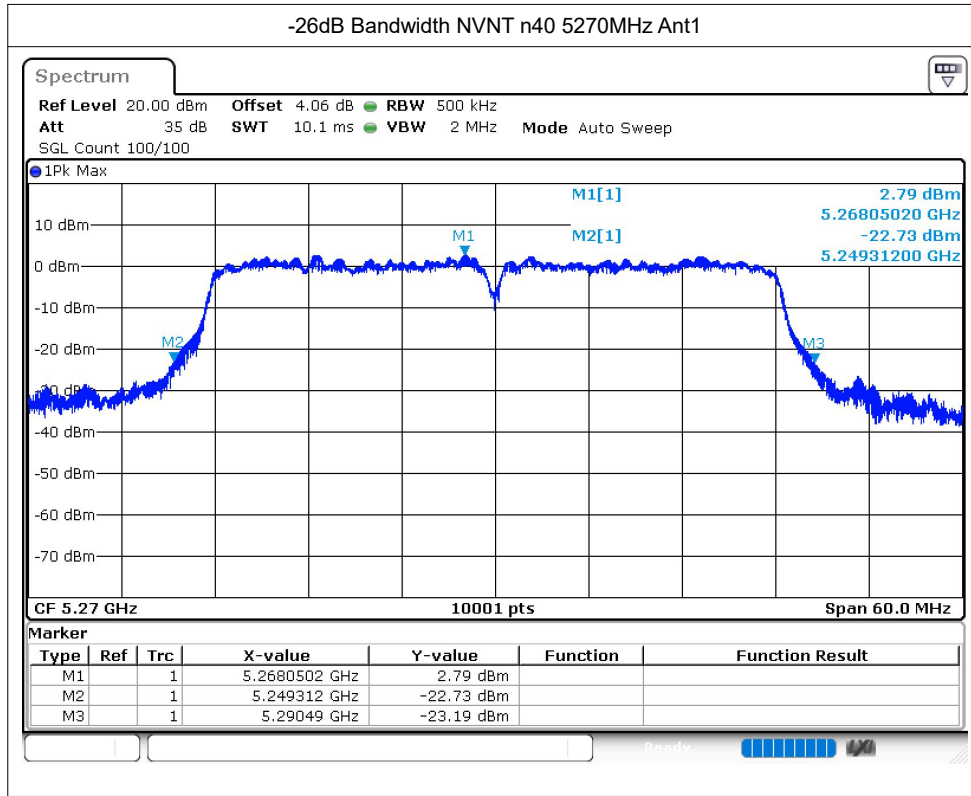

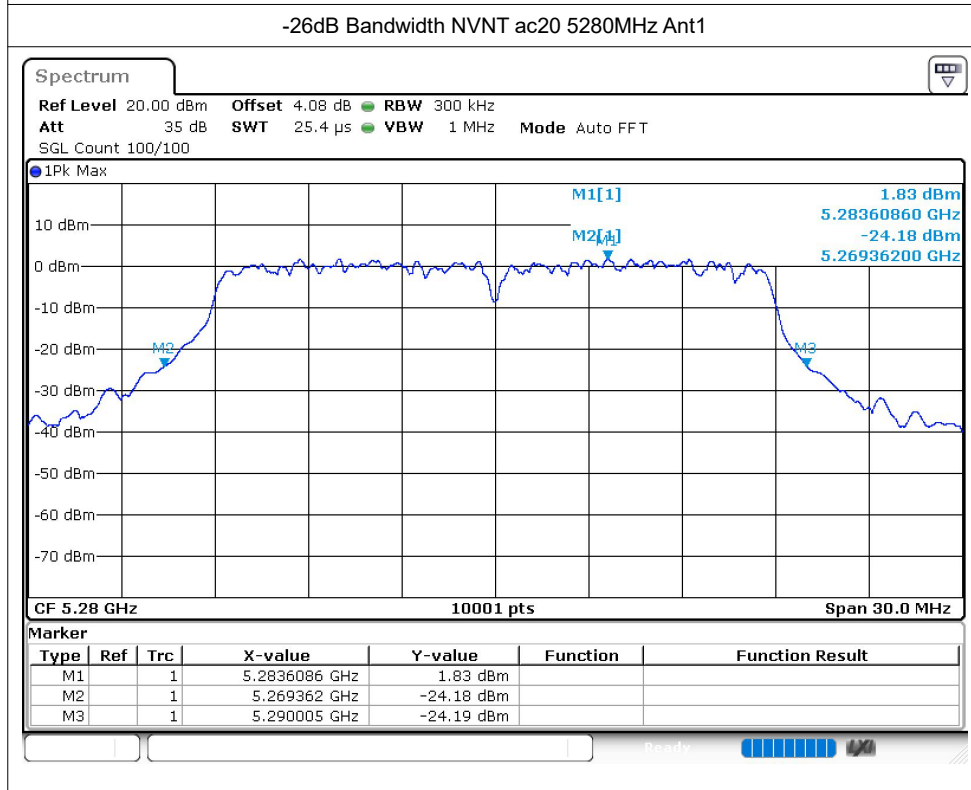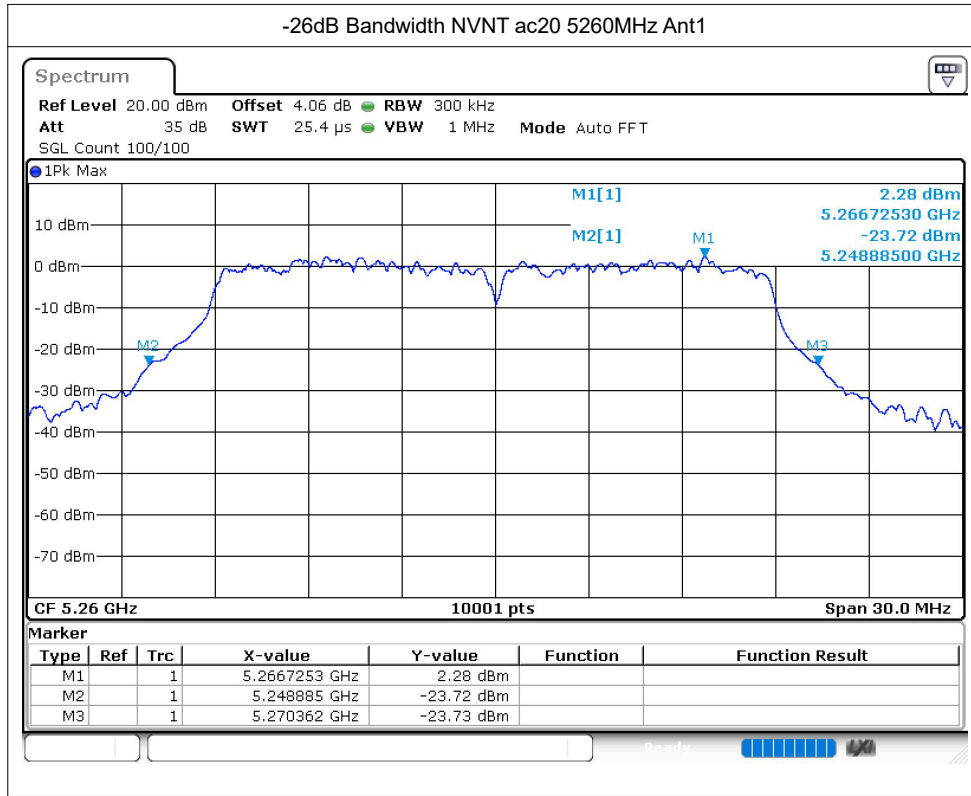

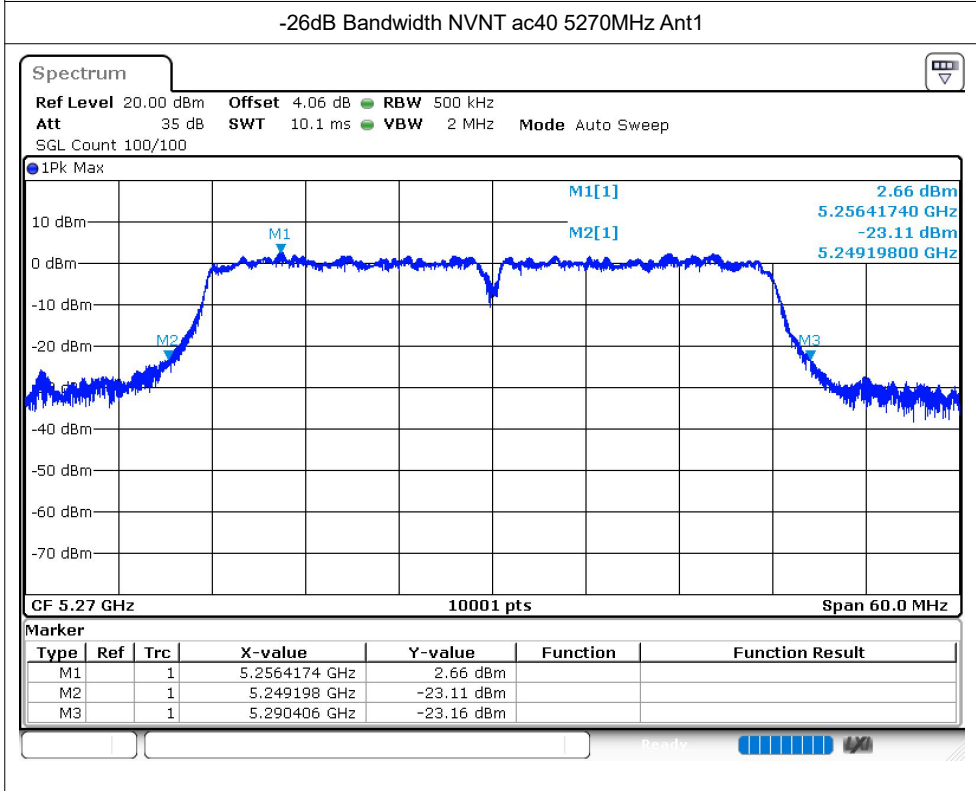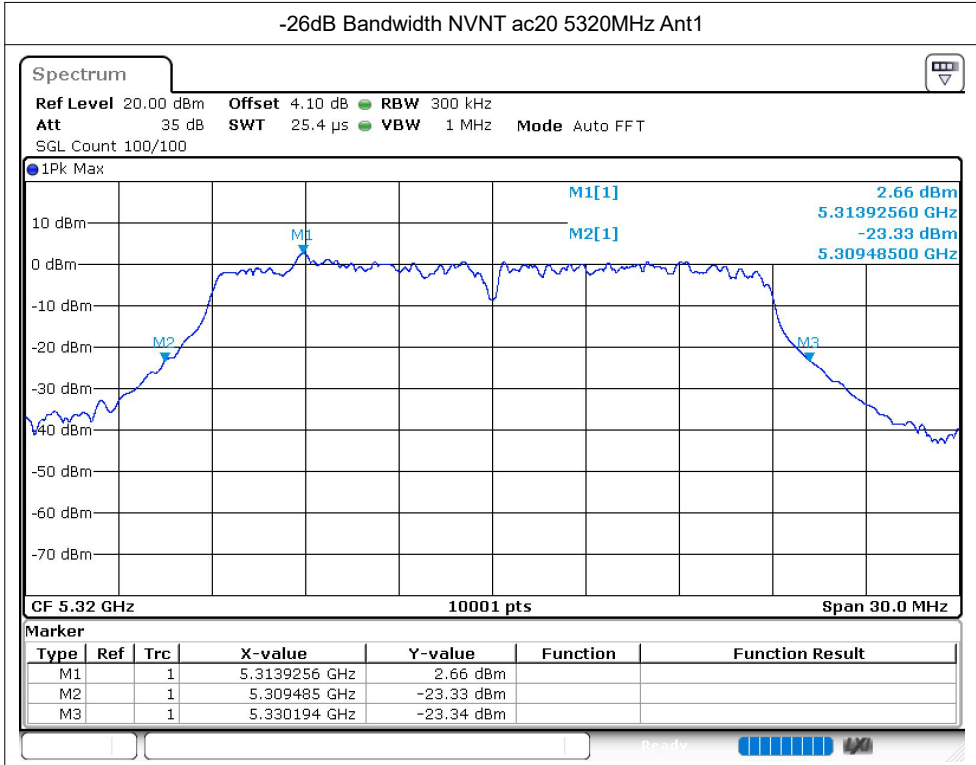

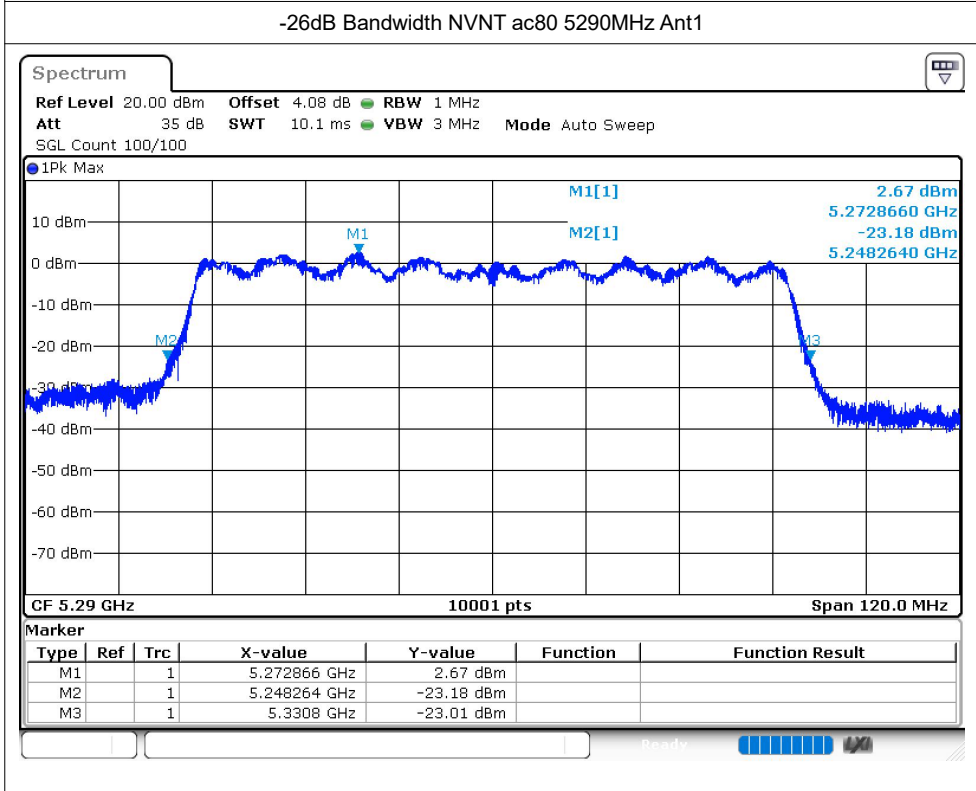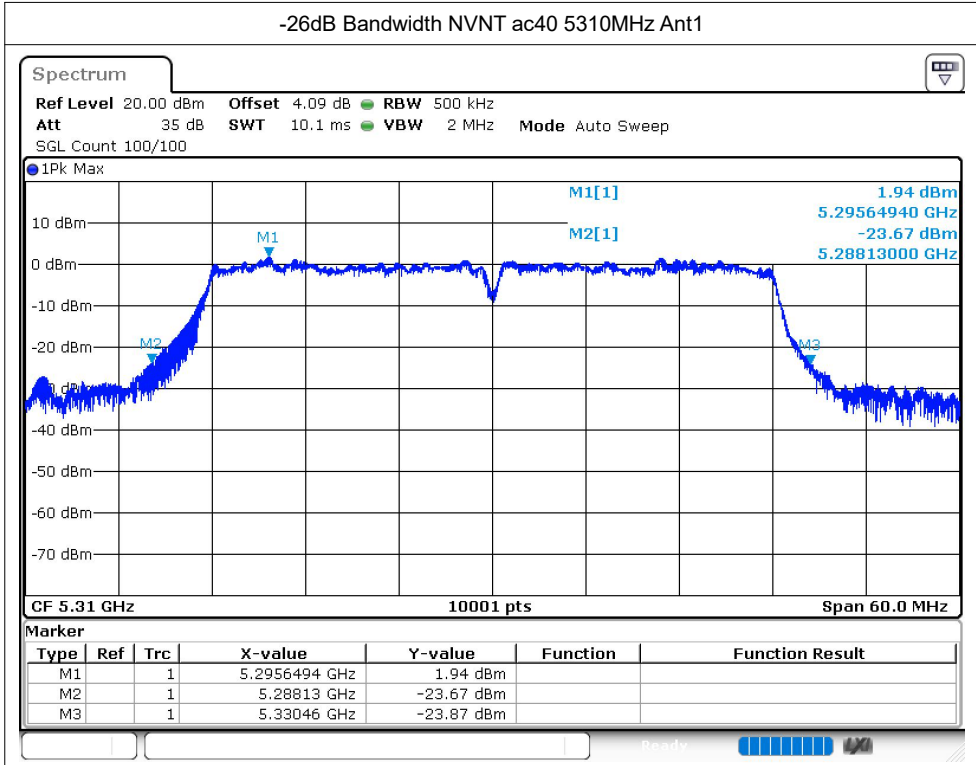

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5260	Ant1	16.465
NVNT	a	5280	Ant1	16.582
NVNT	a	5320	Ant1	16.531
NVNT	n20	5260	Ant1	17.629
NVNT	n20	5280	Ant1	17.632
NVNT	n20	5320	Ant1	17.629
NVNT	n40	5270	Ant1	36.164
NVNT	n40	5310	Ant1	36.206
NVNT	ac20	5260	Ant1	17.62
NVNT	ac20	5280	Ant1	17.572
NVNT	ac20	5320	Ant1	17.641
NVNT	ac40	5270	Ant1	36.188
NVNT	ac40	5310	Ant1	36.308
NVNT	ac80	5290	Ant1	75.628