


## Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.525
NVNT	a	5785	Ant1	16.432
NVNT	a	5825	Ant1	16.414
NVNT	n20	5745	Ant1	17.599
NVNT	n20	5785	Ant1	17.656
NVNT	n20	5825	Ant1	17.662
NVNT	n40	5755	Ant1	36.176
NVNT	n40	5795	Ant1	36.296
NVNT	ac20	5745	Ant1	17.668
NVNT	ac20	5785	Ant1	17.734
NVNT	ac20	5825	Ant1	17.677
NVNT	ac40	5755	Ant1	36.38
NVNT	ac40	5795	Ant1	36.284
NVNT	ac80	5775	Ant1	75.748



Test Graphs



OBW NVNT a 5745MHz Ant1


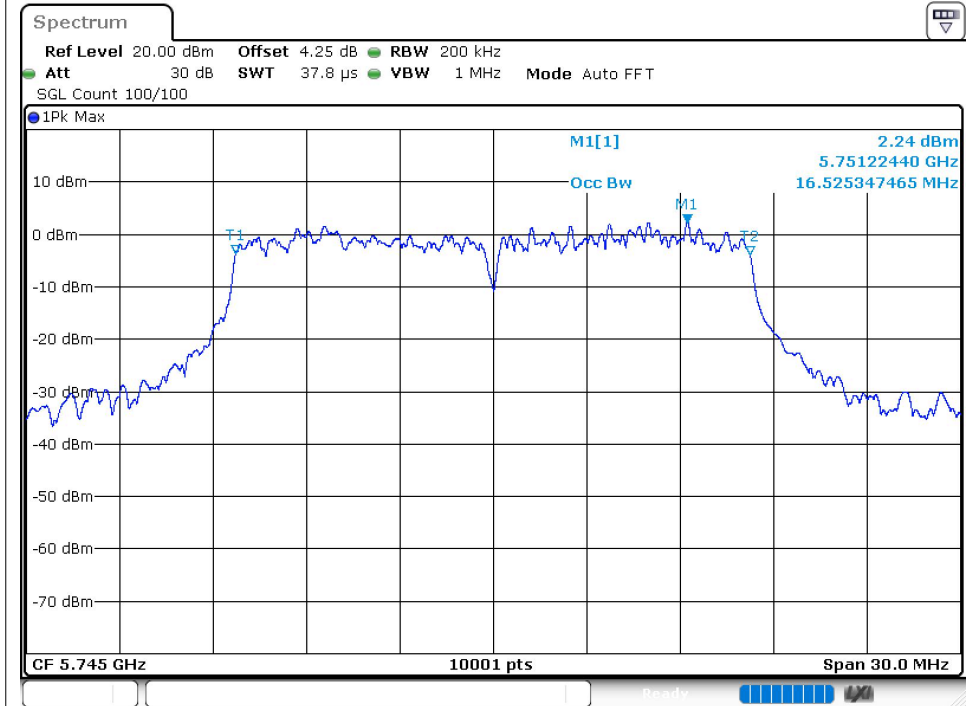




OBW NVNT a 5785MHz Ant1


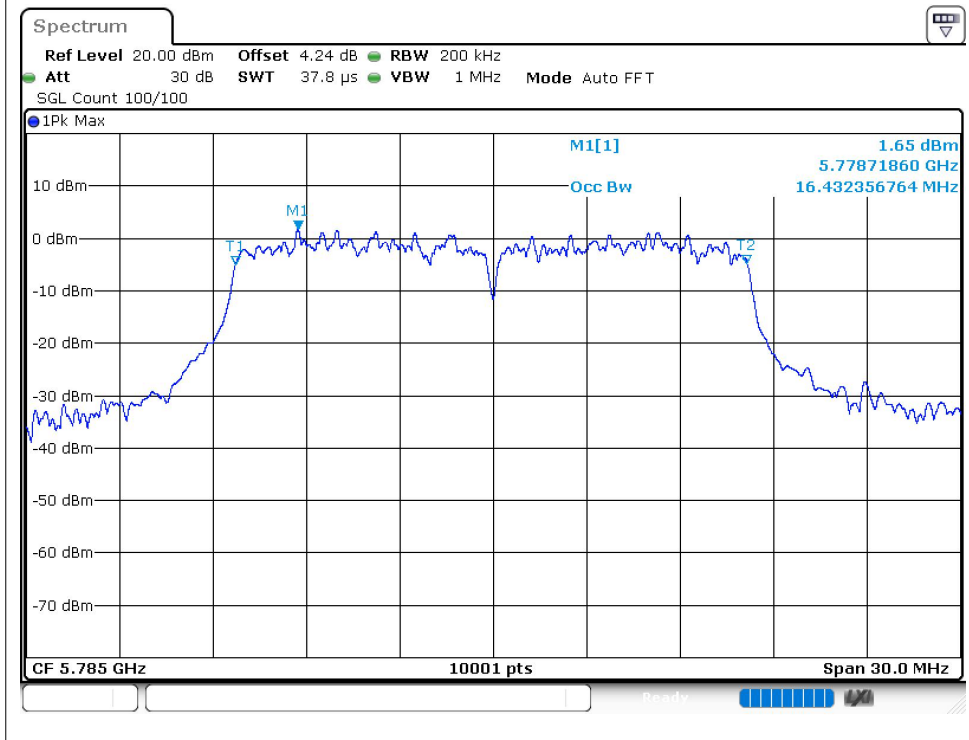


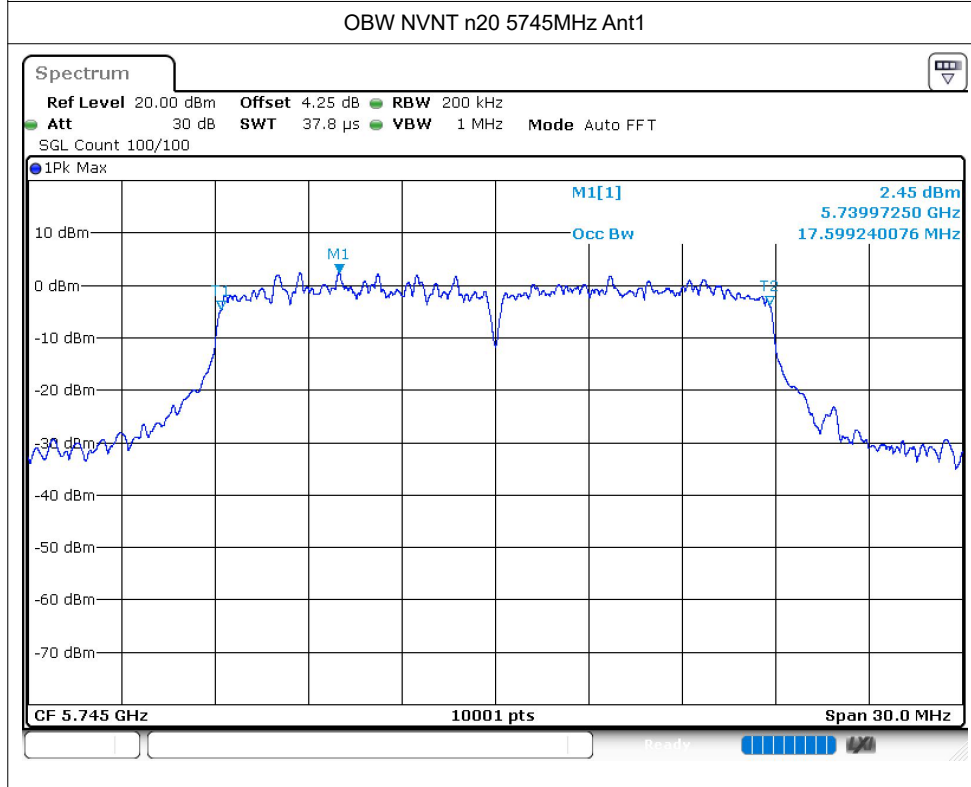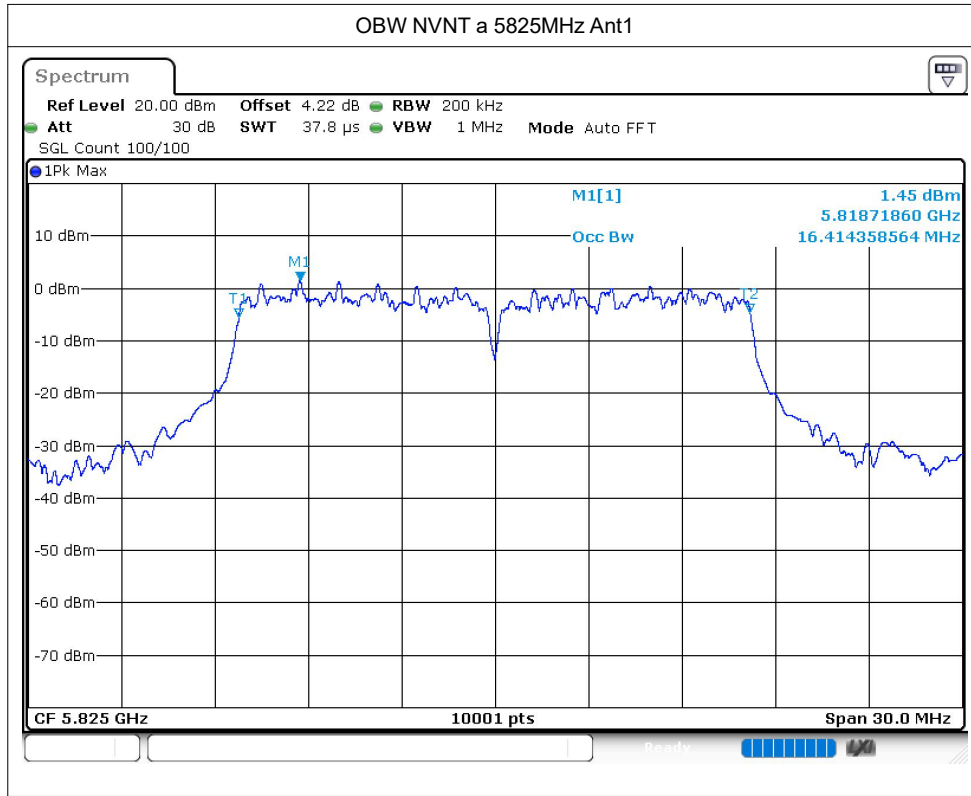

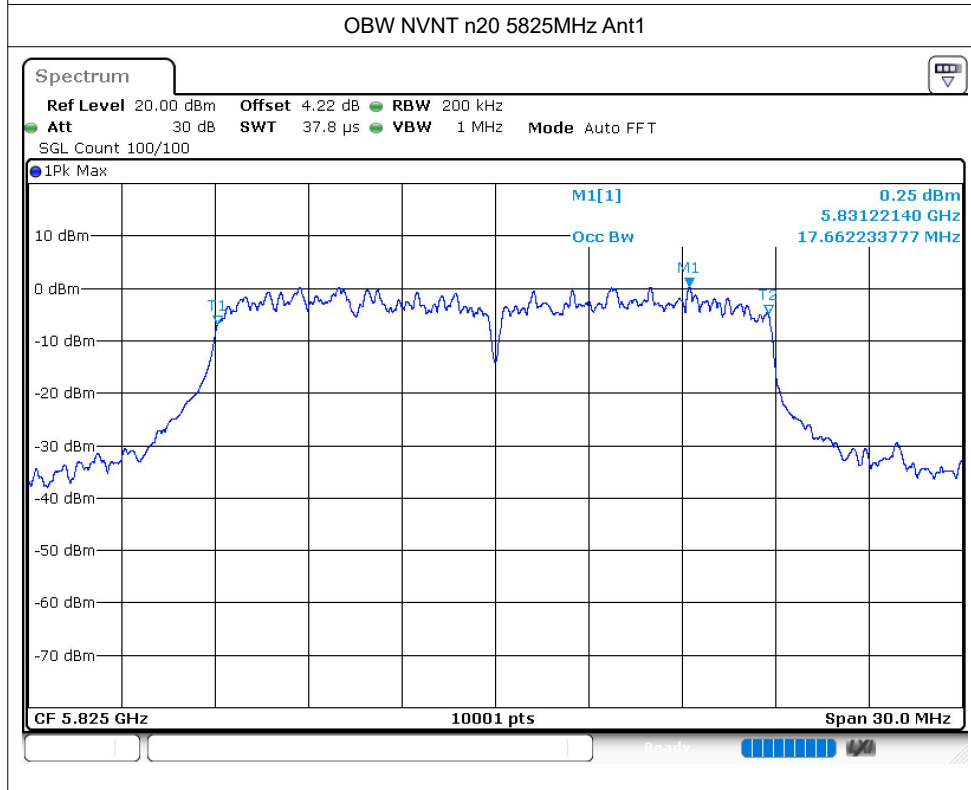
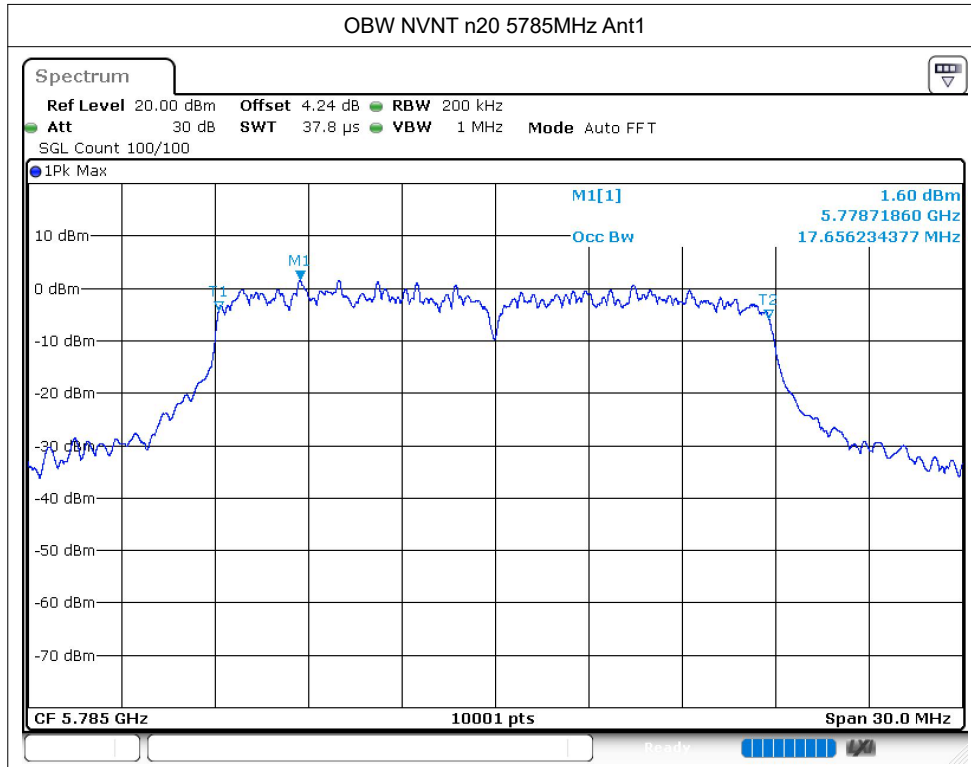


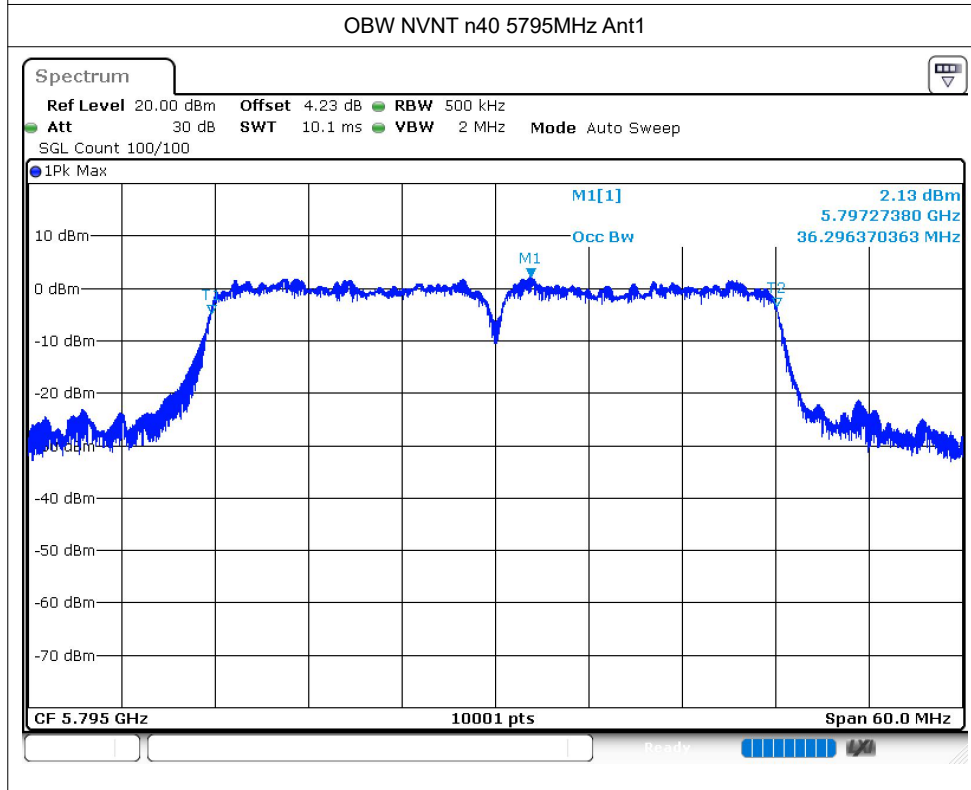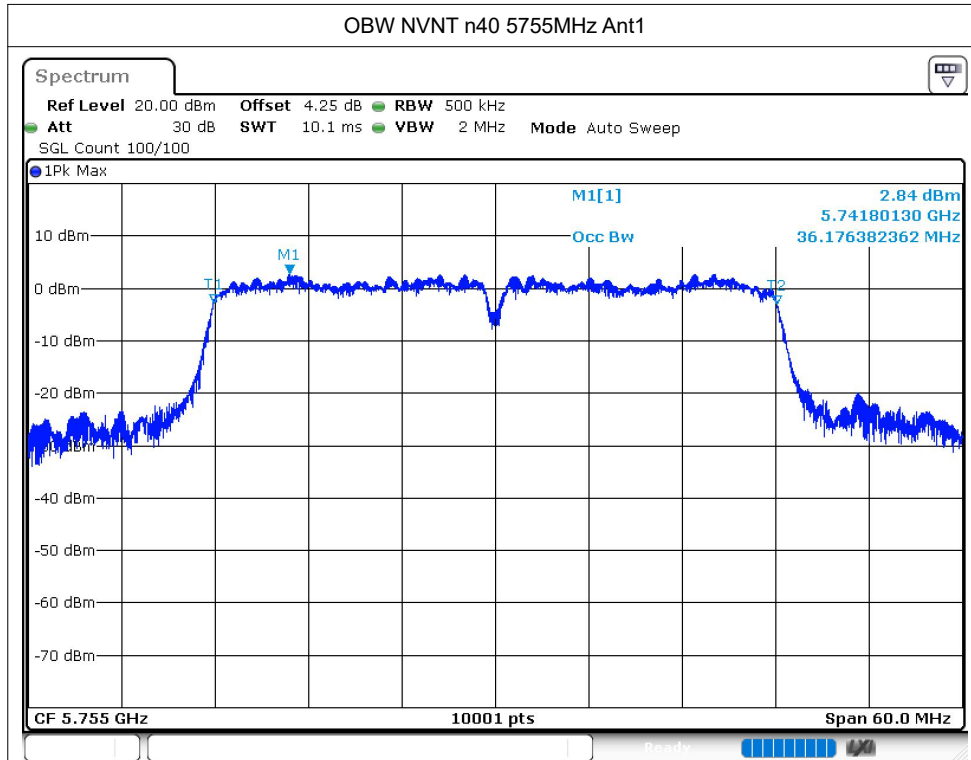

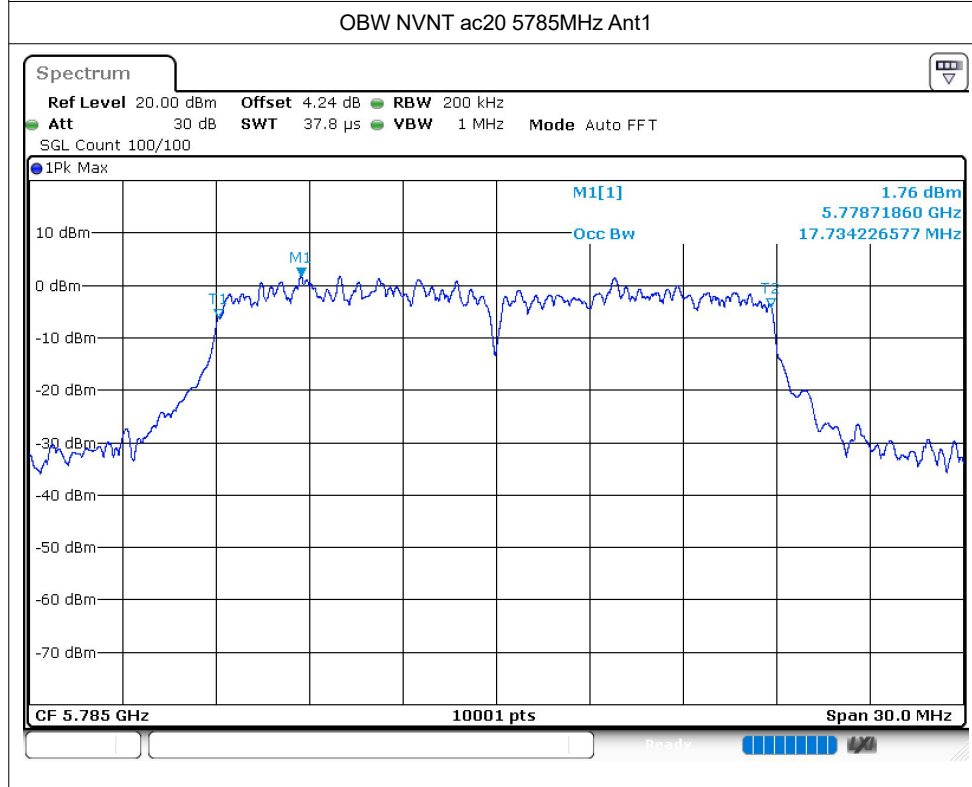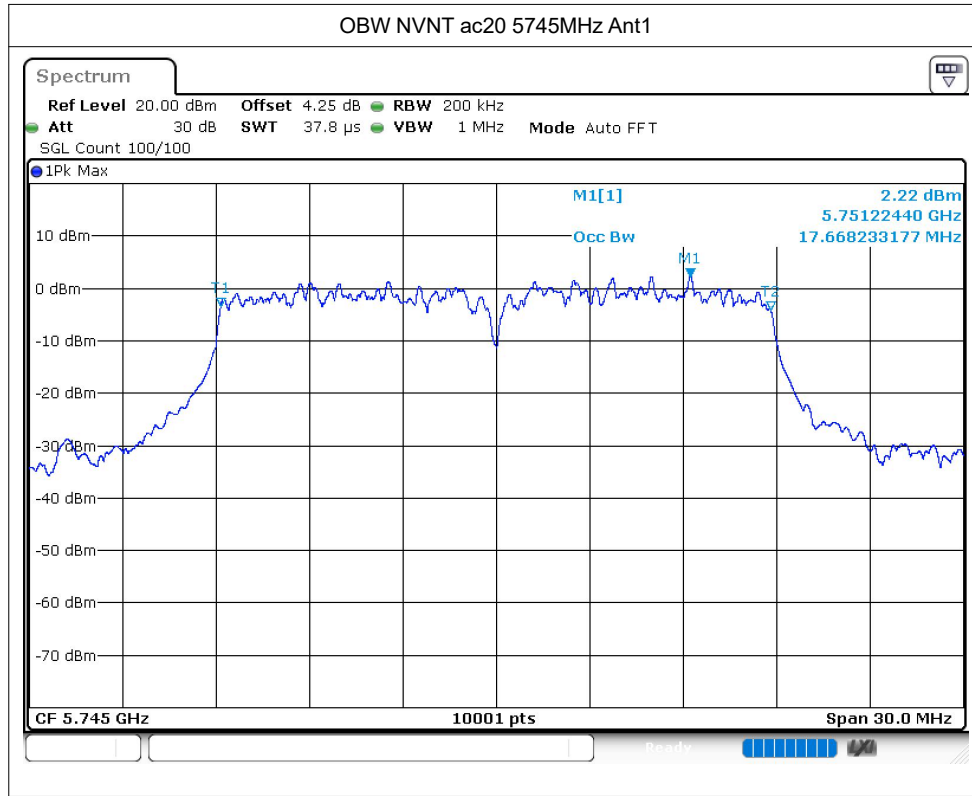

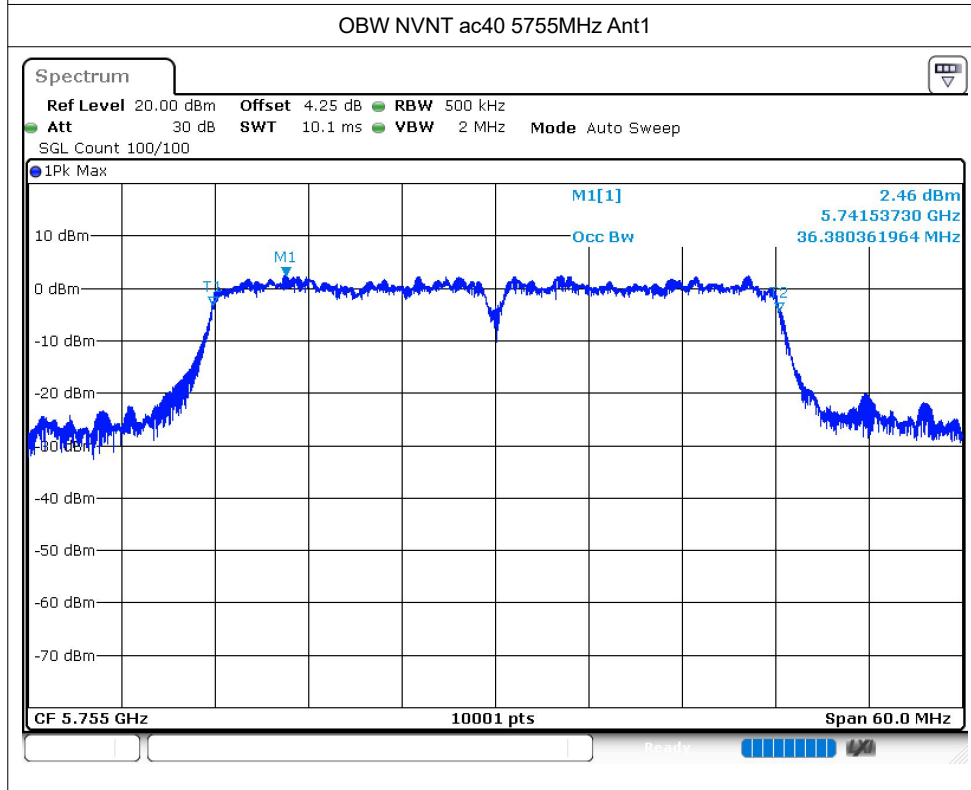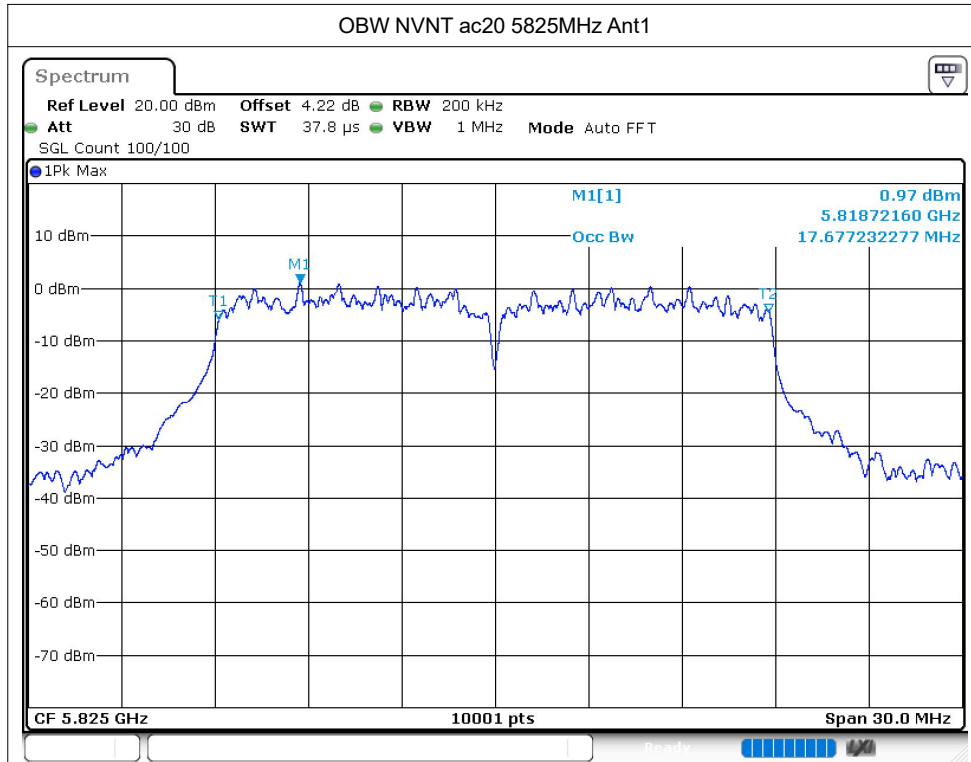



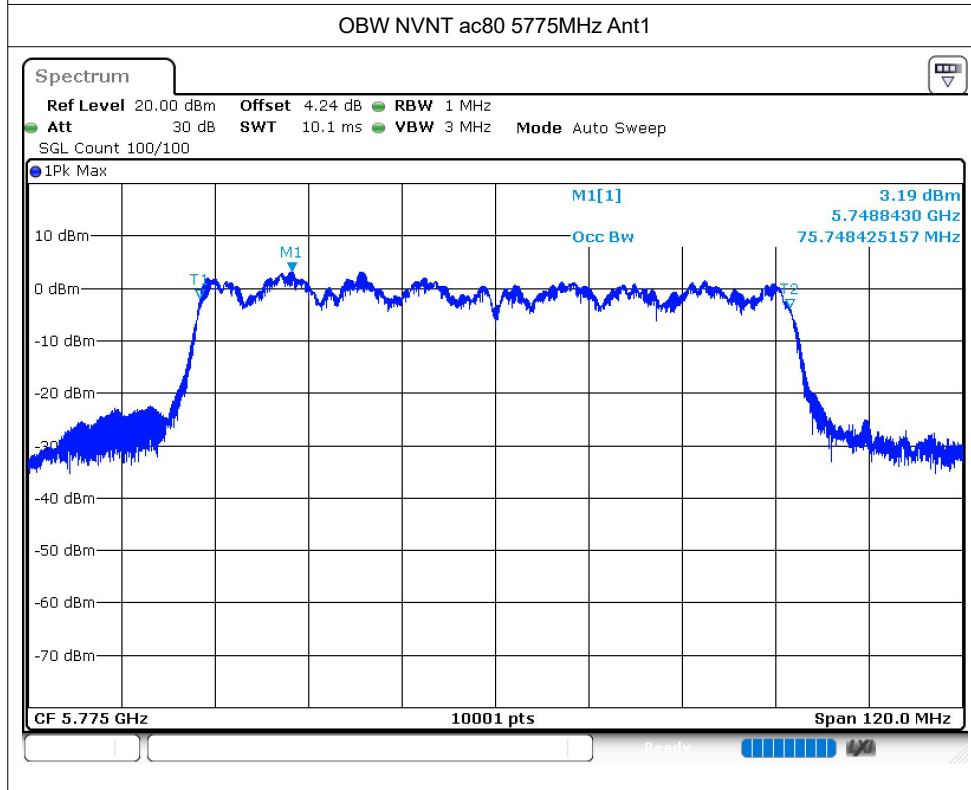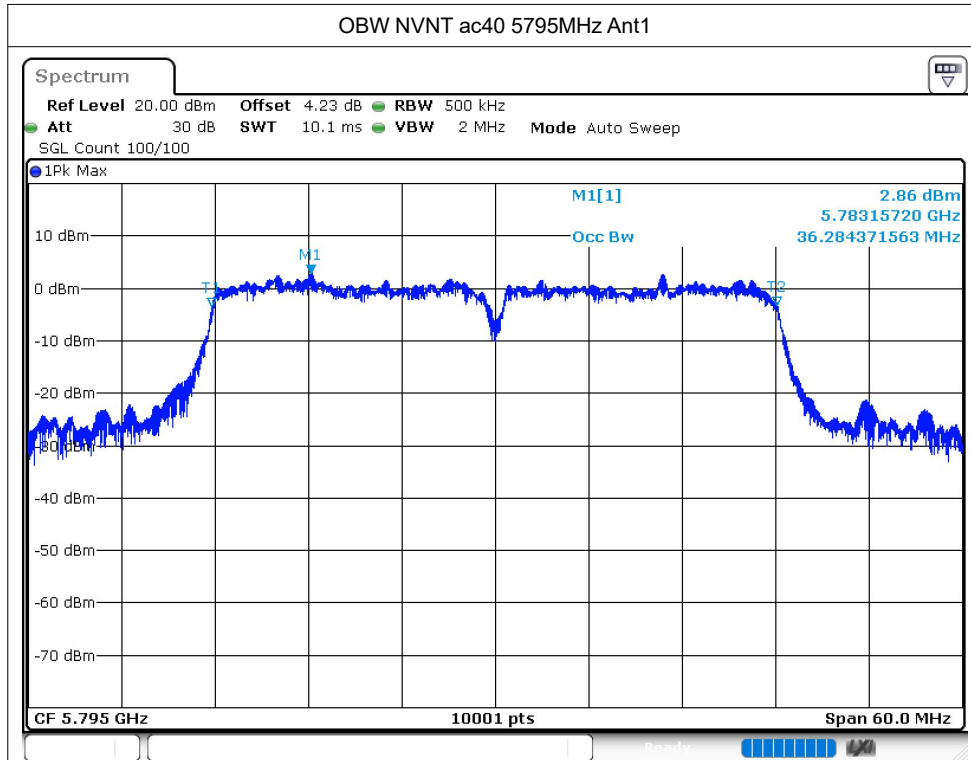


## Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-15.96	1.39	-14.57	30	Pass
NVNT	a	5785	Ant1	-16.64	1.41	-15.23	30	Pass
NVNT	a	5825	Ant1	-16.5	1.37	-15.13	30	Pass
NVNT	n20	5745	Ant1	-17.6	1.44	-16.16	30	Pass
NVNT	n20	5785	Ant1	-17.7	1.46	-16.24	30	Pass
NVNT	n20	5825	Ant1	-18.59	1.48	-17.11	30	Pass
NVNT	n40	5755	Ant1	-25.8	2.34	-23.46	30	Pass
NVNT	n40	5795	Ant1	-26.55	2.26	-24.29	30	Pass
NVNT	ac20	5745	Ant1	-19.88	1.66	-18.22	30	Pass
NVNT	ac20	5785	Ant1	-19.6	1.63	-17.97	30	Pass
NVNT	ac20	5825	Ant1	-20.09	1.66	-18.43	30	Pass
NVNT	ac40	5755	Ant1	-27.33	2.52	-24.81	30	Pass
NVNT	ac40	5795	Ant1	-27.44	2.5	-24.94	30	Pass
NVNT	ac80	5775	Ant1	-34.01	3.42	-30.59	30	Pass

Test Graphs

PSD NVNT a 5745MHz Ant1

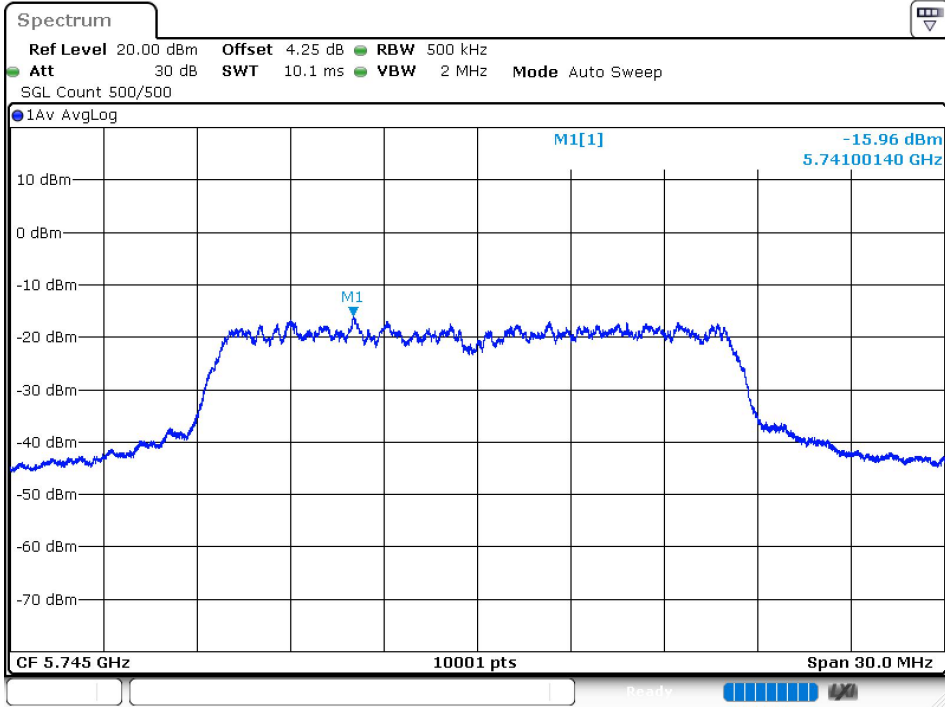

PSD NVNT a 5785MHz Ant1

