

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: **SZ105**
CUSTOMER:

客 戶 料 號: **30110-01121**
CUST P/N:

泛 亞 料 號: **FYS105023**
FINE P/N:

產 品 型 號: **φ 14x20.5-0.08x24-14Ts-45mm-C**
DESC:

日 期: **2022/8/23**
DATE:

版 本: **A.1**
Version:

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
欧亮清	蔡纪雨	丁保元	梁锦波

泛亞電子實業（HK）有限公司

FINE ELECTRONICS INDUSTRIAL (HK) LIMITED

工廠地址：東莞市石碣鎮四甲工業區

TEL: 0769-22490287 / 22452492

FAX: 0769-22499451

E-mail: fineelec@163.com


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	φ 14x20.5-0.08x24-14Ts-45mm-C	版本 Rev: A.1	客戶 CUST:	SZ105
			泛亞料号 Fine P/N:	FYS105023
			客戶料号 CUST P/N:	30110-01121

1、尺寸 DIMENSION:(mm)

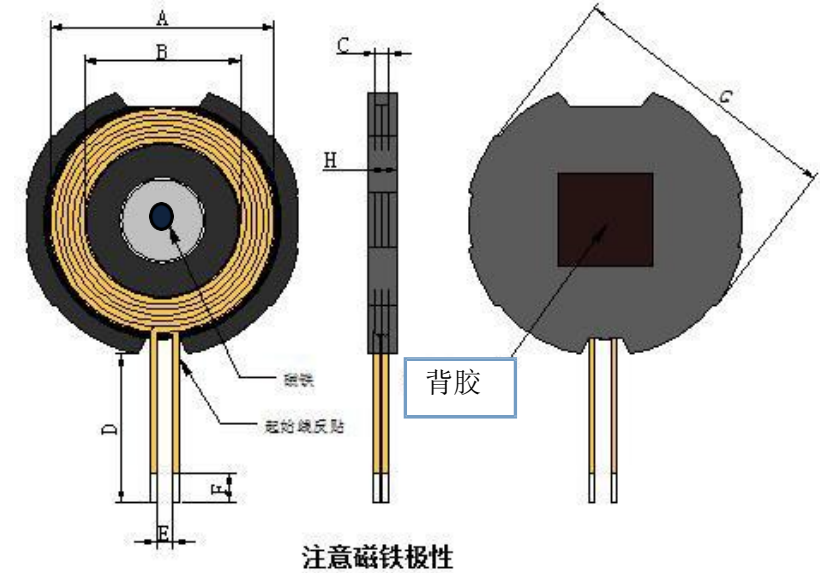

A	20.5±1.5(内控 20.5±0.3)
B	14±0.5
C	1.1±0.2
D	45±2
E	3ref
进锡 F	1-3
G	24.5±1.0
H	2.8 Max

Note:

1. Coil cross out wire backstick magnetic sheet (as shown);
2. Rubber magnetic sheet inner diameter 7.5mm, outer diameter 24.5mm, thickness 2.6mm;
3. The rubber magnetic sheet is attached to the center of the outer diameter 8.0*2.0mm magnet, with N50 magnet, Gaussian value (2800);

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	2CUTF0.08G*24P	14Ts (ref)	CCW

4. F12*12*0.3mm black adhesive on the back of magnetic sheet;
5. The N pole of the magnet is marked, and the N pole is placed face up.

2、电气特性 ELECTRICAL CHARACTERISTICS:
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	INDUCT	S-F	5.0uH±5%单独线圈	100KHZ/1V	LCZ METER 1061A
2	INDUCT	S-F	8.1uH±0.2uH 带磁片	100KHZ/1V	LCZ METER 1061A
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE	