




Thanks for your purchasing Poweradd TWS (Wireless Bluetooth Earbuds) ear buds. For best performance and safety purpose, please read this manual carefully before using this wireless ear buds. Please keep this manual for further reference.



■ **Product schematic diagram**

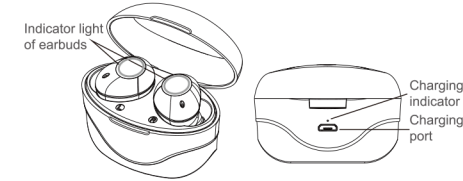

■ **Wear schematic**



■ **Specification**

Model: S9
Bluetooth version: 5.0
Power input: DC 5V/1A
Charging station battery capacity: 450mAh
Earbud battery capacity: 50mAh
Call/play time: about 4 hours
Support agreement: A2DP\AVCTP\AVDTP\AVRCP\HFP\ SPP\SMP\ATT\GAP

■ **Button Function**

Long press for 2 seconds: Power on
Long press for 3 seconds: Power off
Single press: Play/Pause/Answer/Hang Up
Double press: Next Song
Triple press: Previous Song
Long-press for 1 second: Reject the call
Long-press for 1 second while connected to an iPhone and on standby: Activate Siri
Quintuple press: Redial the most recent call


■ **How to charge**

Charge the Earbuds:

Put the earbuds into the charging station. The earbuds automatically shuts down and enter the charging state. The indicator on the earbuds will turn red, which will turn off after the earbuds are fully charged (around one hour to full).

Charge the Charging Station:

Connect the charging case with a 5V/1A adapter by using a standard USB charging cable. The indicator will flash while charging. The indicator will stop flashing and stay bright after the charging station is fully charged (around 90 minutes to full)



■ **How to connect**

1. Earbuds will power on automatically after being taken out from charging station, indicator lights of earbuds flash red and blue alternately. Then turn on the Bluetooth of your music devices, search and display "S9", then tap it to connect.
2. Earbuds will connect back with your original music device when they are turned on again.

■ **How to pair again**

1. After the left earbud and right earbud are turned on, press two earbuds button ten times in a row, and the two earbuds will turn off automatically. After that, put the two earbuds into the charging case at the same time. It can be seen that both the left earbud and the right earbud are flashing fast with red and blue lights. Double-press the button on the left earbud, that is, the two earbuds will automatically pair. When the pairing is successful, the two earbuds will flash synchronously with the red light and the blue light.
3. If you find that the pairing is still not successful, please double-press the left earbud button to match again. After the pairing is successful, the two earbuds are synchronized with the red light and the blue light.

■ **Pay attention**

1. Please avoid using this product in the shower or in the rain, and please store in a dry and ventilated environment to avoid affecting product performance.
2. To ensure great connection performance, please keep the bluetooth distance within 10m.

3. If you can not find "S9" in bluetooth on your music device, please remove all recorded bluetooth pairing data, then turn on bluetooth again to search for "S9".
4. If signal is disconnected sometimes even if earbuds are fully charged, please turn the earbuds off, then turn them on to connect the music device again.

■ **Package list**

- 1. Bluetooth Earbuds x 2pc
- 2. Charging station x 1pc
- 3. Earbuds cap x 6pcs(2pcs on earphones)
- 4. USB charging cable x1pc
- 5. User manual x1pc

■ **Warranty**

All POWERADD products come with full 2-year limited warranty from the date of purchase(accessories are out of warranty). It will be out of guarantee if damaged due to incorrect use or force majeure.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.