



# RADIO TEST REPORT

Report No: STS1612070F01


Issued for

Shenzhen YQT Electronic Technology Co.,Ltd

F5, Bldg4, Hua Feng No.1 Science & Technology Zone,  
Xixiang, Bao'an, Shenzhen, China

<b>Product Name:</b>	smart watch
<b>Brand Name:</b>	N/A
<b>Model Name:</b>	Q730
<b>Series Model:</b>	Q750, Q760, Q50, Q523, Q528, Q60, C1, C2, C3
<b>FCC ID:</b>	2AKM6-Q730
<b>Test Standard:</b>	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





### TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen YQT Electronic Technology Co.,Ltd  
**Address**..... : F5, Bldg4, Hua Feng No.1 Science & Technology Zone, Xixiang, Bao'an, Shenzhen, China  
**Manufacture's Name** ..... : Shenzhen YQT Electronic Technology Co.,Ltd  
**Address**..... : F5, Bldg4, Hua Feng No.1 Science & Technology Zone, Xixiang, Bao'an, Shenzhen, China  
**Product name**..... : smart watch  
**Brand name** ..... : N/A  
**Model and/or type reference** .. : Q730  
**Standards** ..... : FCC Part 22H and 24E  
**Test procedure** ..... ANSI/TIA 603-D (2010)

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

**Date of performance of tests** ..... 12 Dec. 2016 ~03 Jan. 2017  
**Date of Issue** ..... 04 Jan. 2017  
**Test Result** ..... **Pass**

Testing Engineer :

(Leo li)

Technical Manager :

(Tony liu)

Authorized Signatory :

(Bovey Yang)





<b>TABLE OF CONTENTS</b>	<b>Page</b>
<b>1 INTRODUCTION</b>	<b>6</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 PRODUCT INFORMATION</b>	<b>7</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>8</b>
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>9</b>
<b>5 TEST ITEMS</b>	<b>10</b>
5.1 CONDUCTED OUTPUT POWER	10
5.2 PEAK TO AVERAGE RATIO	11
5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	12
5.4 OCCUPIED BANDWIDTH	13
5.5 FREQUENCY STABILITY	14
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	15
5.7 BAND EDGE	16
5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	17
<b>APPENDIX A TEST RESULT</b>	<b>19</b>
A1 CONDUCTED OUTPUT POWER	19
A2 PEAK-TO-AVERAGE RATIO	22
A3 TRANSMITTER RADIATED POWER (EIRP/ERP)	23
A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)	26
A5 FREQUENCY STABILITY	36
A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	41
A7 BAND EDGE	49
A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	57
<b>APPENDIX B PHOTOS OF TEST SETUP</b>	<b>65</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	04 Jan. 2017	STS1612070F01	ALL	Initial Issue



**SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D: 2010, KDB 971168 D01 v02r02 and KDB 648474 D03 v01r04

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1049	Conducted Output Power	Reporting Only	PASS	
2.0146 24.232	Peak-to-Average Ratio	< 13 dB	PASS	
2.1046 22.913 24.232	Effective Radiated Power/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24)	PASS	
2.1049 22.917 24.238	Occupied Bandwidth	Reporting Only	PASS	
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)	PASS	
2.1051 22.917 24.238	Spurious Emission at Antenna Terminals	< 43+10log <sub>10</sub> (P[Watts])	PASS	
2.1053 22.917 24.238	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	
2.1051 22.917 24.238	Band Edge	< 43+10log <sub>10</sub> (P[Watts])	PASS	



## 1 INTRODUCTION

### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC Registration No.: 842334; IC Registration No.: 12108A-1

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance. °

No.	Item	Uncertainty
1	RF power,conducted	$\pm 0.70\text{dB}$
2	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



## 2 PRODUCT INFORMATION

Product Designation:	smart watch
Hardware version number:	G75-MB-V1.3
Software version number:	G75-SW-V1.0
FCC ID:	2AKM6-Q730
Tx Frequency:	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency:	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
Max RF Output Power:	GSM850:31.89dBm,PCS1900:28.65dBm GPRS850:31.87dBm,GPRS1900:28.49dBm EDGE850:31.86dBm,EDGE1900:28.48dBm WCDMABand V:22.48dBm,WCDMA Band II:21.90dBm
Type of Emission:	GSM(850): 321KGXW; GSM(1900): 326KGXW GPRS(850): 321KGXW; GPRS(1900): 323KGXW EDGE(850): 320KG7W; EDGE(1900): 322KG7W WCDMA850: 4M64F9W WCDMA1900: 6M00F9W
SIM Card:	Support single card
Antenna:	PIFA Antenna
Antenna gain:	GSM 850: 0.5dBi, PCS 1900: 0.5dBi WCDMA 850: 0.5dBi, WCDMA1900: 0.5dBi
Power Supply:	DC 3.7V by battery
Battery parameter:	Capacity: 650mAh, Rated Voltage: 3.7V
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC3.4 V to 4.25 V (Nominal DC3.7V )
Extreme Temp. Tolerance:	-20°C to +45°C
<b>** Note: The High Voltage 4.25 V and Low Voltage 3.4 V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.</b>	



### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

BAND	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
GSM 850	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
GSM 1900	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK





4 MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Signal Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Communication Tester	Agilent	8960	MY48360751	2016.10.23	2017.10.22
Communication Tester	R&S	CMU200	112012	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	102086	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Bilog Antenna (Calibration antenna)	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
Horn Antenna (Calibration antenna)	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
MXA SIGNAL Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Double Ridge Horn Antenna	COM-POWER CORPORATION	AH-840	AHA-840	2016.03.06	2017.03.05
Low frequency cable	N/A	R01	N/A	NCR	NCR
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	NCR	NCR
Vector signal generator	Agilent	E8257D-521	MY45141029	2016.10.23	2017.10.22
Power amplifier	DESAY	ZHL-42W	9638	2016.10.23	2017.10.22
Band Reject filter(1920-1980MHz)	COM-MW	ZBSF-1920-1980	0092	2016.10.23	2017.10.22
Band Reject filter(880-915MHz)	COM-MW	ZBSF-C897.5-35	707	2016.10.23	2017.10.22
Band Reject filter(1710-1785MHz)	COM-MW	ZBSF-C1747.5-75	708	2016.10.23	2017.10.22
Band Reject filter(1850-1910MHz)	COM-MW	ZBSF-C1880-60	709	2016.10.23	2017.10.22
Band Reject filter(2500-2570MHz)	COM-MW	ZBSF-C2535-70	710	2016.10.23	2017.10.22
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	2016.10.23	2017.10.22

Equipment with a calibration date of “NCR” shown in this list was not used to make direct calibrated measurements.

## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER


#### Test overview

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### Test procedures

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### Test setup

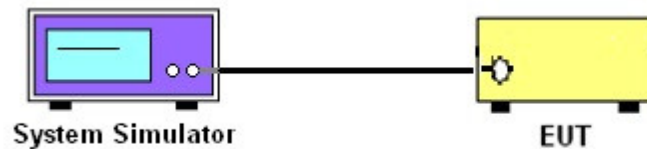

## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows fcckdb 971168 v02r02 section
2. The eut was connected to the and peak and av system simulator& spectrum analysis reads
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

### TEST SETUP

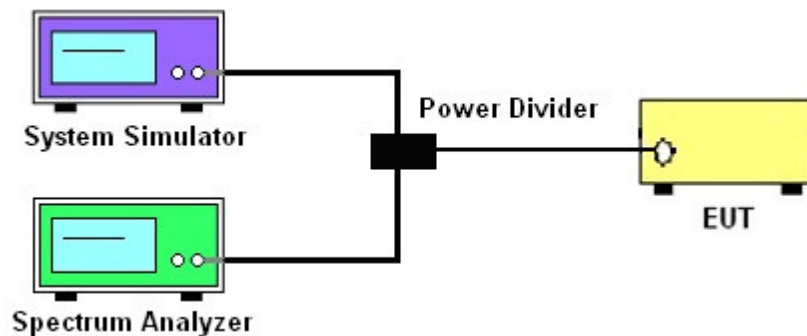



### 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

#### TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### TEST PROCEDURE

1. The testing follows FCC KDB 971168 D01 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  
$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$
  
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub> as, typically dBW or dBm);  
P<sub>Meas</sub>(PK) = measured transmitter output power or PSD, in dBm or dBW;  
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

## 5.4 OCCUPIED BANDWIDTH

### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 - 5\%$  of the expected OBW
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### TEST SETUP

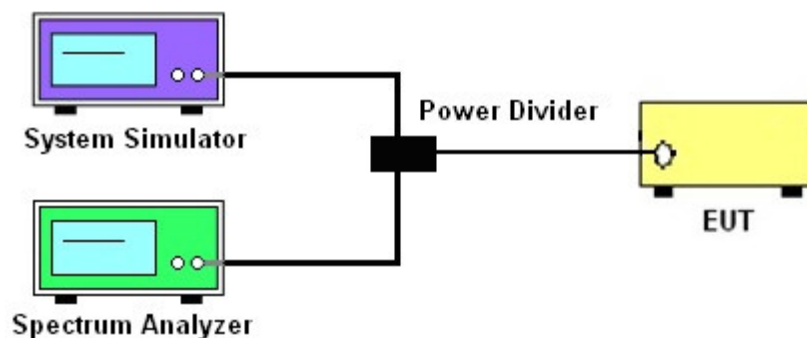

## 5.5 FREQUENCY STABILITY

### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### Test Procedure


#### Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^\circ\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

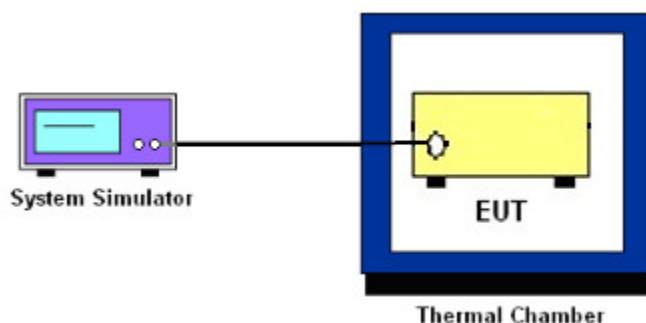

## 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Overview


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### Test procedure

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### Test Setup

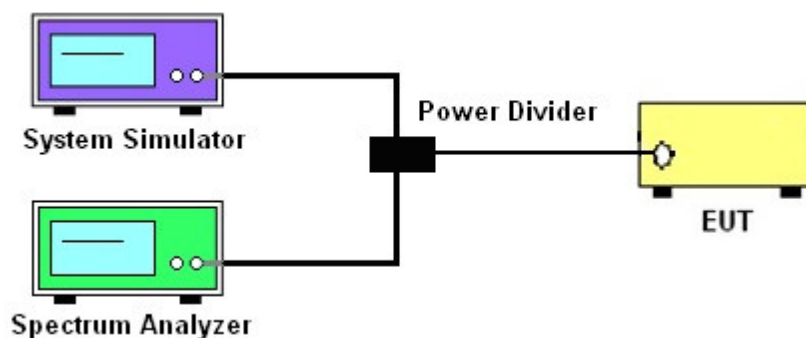



## 5.7 BAND EDGE

### OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$   
 $= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$   
 $= -13\text{dBm}.$

### TEST SETUP

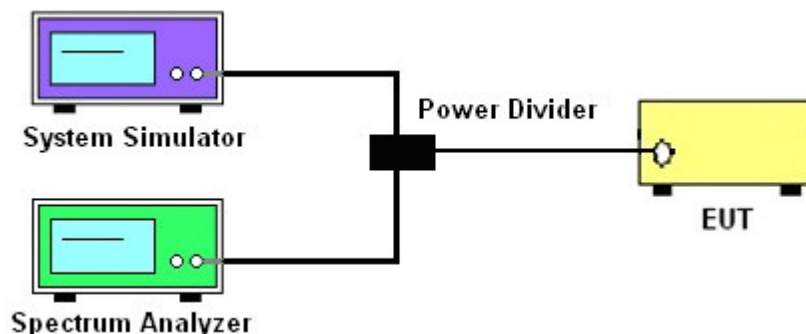





## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### Test procedure


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010-Section 2.2.12.2(b)
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  
$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$
  
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub>, typically dBW or dBm);  
P.SG = measured transmitter output power or PSD, in dBm or dBW;  
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

### TEST SETUP

For radiated test from 30MHz to 1GHz

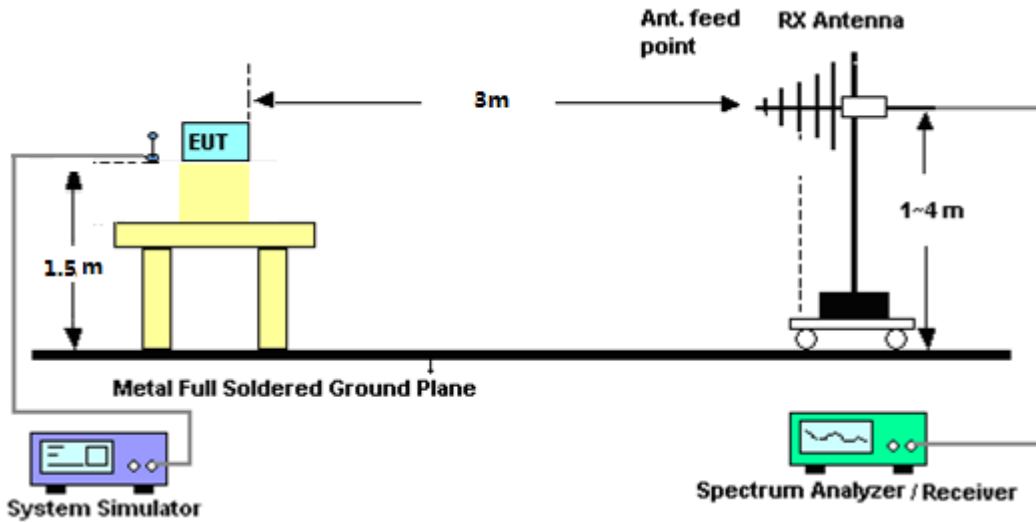

For radiated test from above 1GHz

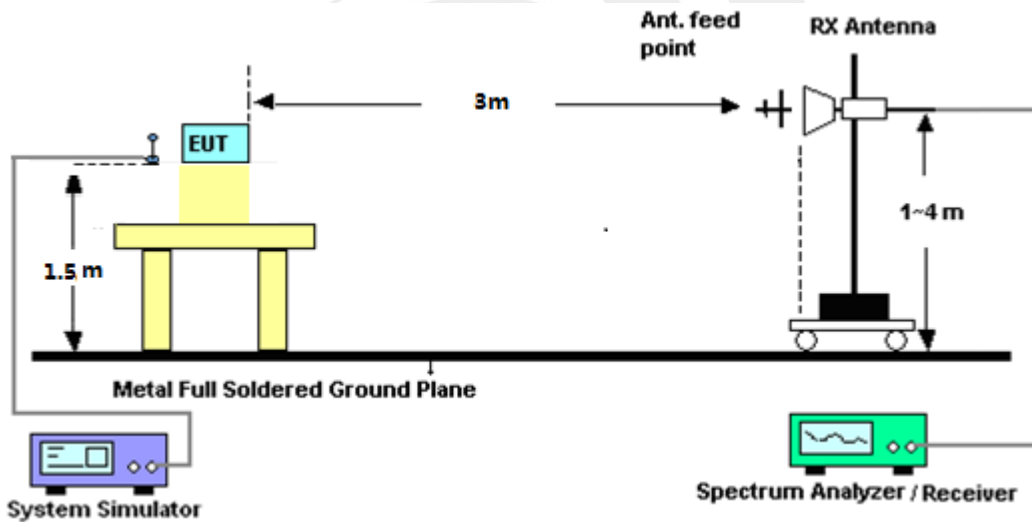

APPENDIX A TEST RESULT  
A1 CONDUCTED OUTPUT POWER

GSM 850:

Mode	Frequency (MHz)	AVG Power
GSM850	824.2	31.78
	836.6	31.86
	848.8	<b>31.89</b>
GPRS850	824.2	31.76
	836.6	31.83
	848.8	<b>31.87</b>
EDGE850 (1 Slot)	824.2	31.75
	836.6	31.82
	848.8	<b>31.86</b>

PCS 1900:

Mode	Frequency (MHz)	AVG Power
GSM1900	1850.2	28.49
	1880	28.51
	1909.8	<b>28.65</b>
GPRS1900	1850.2	28.45
	1880	<b>28.49</b>
	1909.8	28.42
EDGE1900 (1 Slot)	1850.2	28.44
	1880	<b>28.48</b>
	1909.8	28.41



UMTS BAND V

Mode	Frequency(MHz)	AVG Power
WCDMA 850 RMC	826.4	<b>22.48</b>
	836.6	22.26
	846.6	22.35
HSDPA Subtest 1	826.4	22.43
	836.6	22.23
	846.6	22.32
HSDPA Subtest 2	826.4	21.99
	836.6	21.80
	846.6	21.92
HSDPA Subtest 3	826.4	21.68
	836.6	21.35
	846.6	21.56
HSDPA Subtest 4	826.4	21.25
	836.6	21.00
	846.6	21.15
HSUPA Subtest 1	826.4	22.36
	836.6	22.20
	846.6	21.91
HSUPA Subtest 2	826.4	21.47
	836.6	21.26
	846.6	20.92
HSUPA Subtest 3	826.4	21.44
	836.6	20.86
	846.6	20.55
HSUPA Subtest 4	826.4	20.99
	836.6	20.36
	846.6	20.08
HSUPA Subtest 5	826.4	19.56
	836.6	18.91
	846.6	18.63



## UMTS BAND II

Mode	Frequency(MHz)	AVG Power
WCDMA 1900 RMC	1852.4	21.01
	1880	<b>21.90</b>
	1907.6	20.83
HSDPA Subtest 1	1852.4	20.98
	1880	21.85
	1907.6	20.75
HSDPA Subtest 2	1852.4	20.55
	1880	21.37
	1907.6	20.27
HSDPA Subtest 3	1852.4	20.23
	1880	20.95
	1907.6	19.87
HSDPA Subtest 4	1852.4	19.89
	1880	20.64
	1907.6	19.43
HSUPA Subtest 1	1852.4	20.89
	1880	21.84
	1907.6	20.28
HSUPA Subtest 2	1852.4	19.97
	1880	20.90
	1907.6	19.32
HSUPA Subtest 3	1852.4	19.95
	1880	20.49
	1907.6	18.86
HSUPA Subtest 4	1852.4	19.60
	1880	20.01
	1907.6	18.37
HSUPA Subtest 5	1852.4	18.20
	1880	18.54
	1907.6	16.90



## A2 PEAK-TO-AVERAGE RADIO

## PCS 1900:

Mode	Frequency (MHz)	PEAK Power	AVG Power	PAR
PCS1900	1850.2	28.59	28.49	0.10
	1880	28.62	28.51	0.11
	1909.8	<b>28.68</b>	<b>28.65</b>	0.03
GPRS1900	1850.2	28.56	28.45	0.11
	1880	28.59	28.49	0.10
	1909.8	28.53	28.42	0.11
EDGE1900 (1 Slot)	1850.2	28.54	28.44	0.10
	1880	28.58	28.48	0.10
	1909.8	28.52	28.41	0.11

## UMTS BAND II:

Mode	Frequency (MHz)	PEAK Power	AVG Power	PAR
WCDMA 1900 RMC	1852.4	<b>22.79</b>	21.01	1.78
	1880	23.76	<b>21.90</b>	1.86
	1907.6	22.62	20.83	1.79
HSDPA 1900	1852.4	22.73	20.98	1.75
	1880	23.72	21.85	1.87
	1907.6	22.56	20.75	1.81
HSUPA 1900	1852.4	22.62	20.89	1.73
	1880	23.69	21.84	1.85
	1907.6	22.32	20.28	2.04



A3 TRANSMITTER RADIATED POWER (EIRP/ERP)

Radiated Power (ERP) for GSM 850 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
GSM850	824.2	23.27	0.44	6.5	29.33	Horizontal	Pass
	824.2	25.22	0.44	6.5	31.28	Vertical	Pass
	836.6	23.45	0.45	6.5	29.50	Horizontal	Pass
	836.6	25.31	0.45	6.5	31.36	Vertical	Pass
	848.8	23.36	0.46	6.5	29.40	Horizontal	Pass
	848.8	25.35	0.46	6.5	31.39	Vertical	Pass
GPRS850	824.2	23.36	0.44	6.5	29.42	Horizontal	Pass
	824.2	24.98	0.44	6.5	31.04	Vertical	Pass
	836.6	23.32	0.45	6.5	29.37	Horizontal	Pass
	836.6	25.14	0.45	6.5	31.19	Vertical	Pass
	848.8	23.46	0.46	6.5	29.50	Horizontal	Pass
	848.8	25.06	0.46	6.5	31.10	Vertical	Pass
EDGE850	824.2	23.24	0.44	6.5	29.30	Horizontal	Pass
	824.2	25.07	0.44	6.5	31.13	Vertical	Pass
	836.6	23.40	0.45	6.5	29.45	Horizontal	Pass
	836.6	25.27	0.45	6.5	31.32	Vertical	Pass
	848.8	23.47	0.46	6.5	29.51	Horizontal	Pass
	848.8	25.06	0.46	6.5	31.10	Vertical	Pass



Radiated Power (EIRP) for PCS 1900 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max.EIRP.	
PCS1900	1850.2	17.9	2.41	10.35	25.84	Horizontal	Pass
	1850.2	19.74	2.41	10.35	27.68	Vertical	Pass
	1880.0	18.27	2.42	10.35	26.20	Horizontal	Pass
	1880.0	20.09	2.42	10.35	28.02	Vertical	Pass
	1909.8	18.27	2.43	10.35	26.19	Horizontal	Pass
	1909.8	20.23	2.43	10.35	28.15	Vertical	Pass
GPRS1900	1850.2	17.93	2.41	10.35	25.87	Horizontal	Pass
	1850.2	19.52	2.41	10.35	27.46	Vertical	Pass
	1880.0	18.16	2.42	10.35	26.09	Horizontal	Pass
	1880.0	19.97	2.42	10.35	27.90	Vertical	Pass
	1909.8	18.33	2.43	10.35	26.25	Horizontal	Pass
	1909.8	20.12	2.43	10.35	28.04	Vertical	Pass
EDGE1900	1850.2	17.83	2.41	10.35	25.77	Horizontal	Pass
	1850.2	19.71	2.41	10.35	27.65	Vertical	Pass
	1880.0	18.31	2.42	10.35	26.24	Horizontal	Pass
	1880.0	20.06	2.42	10.35	27.99	Vertical	Pass
	1909.8	18.43	2.43	10.35	26.35	Horizontal	Pass
	1909.8	20.02	2.43	10.35	27.94	Vertical	Pass





Radiated Power (ERP) for WCDMA Band V							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P (dBm)	Polarization Of Max.ERP	
Band V	826.4	14.20	0.44	6.5	20.26	Horizontal	Pass
	826.4	15.92	0.44	6.5	21.98	Vertical	Pass
	836.6	13.87	0.45	6.5	19.92	Horizontal	Pass
	836.6	15.72	0.45	6.5	21.77	Vertical	Pass
	846.6	13.88	0.46	6.5	19.92	Horizontal	Pass
	846.6	15.81	0.46	6.5	21.85	Vertical	Pass

Radiated Power (EIRP) for WCDMA Band II							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max.EIRP	
Band II	1852.4	10.7	2.41	10.35	18.64	Horizontal	Pass
	1852.4	12.57	2.41	10.35	20.51	Vertical	Pass
	1880.0	11.6	2.42	10.35	19.53	Horizontal	Pass
	1880.0	13.46	2.42	10.35	21.39	Vertical	Pass
	1907.6	10.71	2.43	10.35	18.63	Horizontal	Pass
	1907.6	12.43	2.43	10.35	20.35	Vertical	Pass



## A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)

<b>Occupied Bandwidth for GSM 850 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	246.51	319.09
Middle Channel	836.6	245.79	315.4
High Channel	848.8	242.69	321.4
<b>Occupied Bandwidth for GPRS 850 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	243.29	320.8
Middle Channel	836.6	246.65	312.7
High Channel	848.8	244.19	311.1
<b>Occupied Bandwidth for EGPRS 850 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	245.03	317.0
Middle Channel	836.6	243.44	317.6
High Channel	848.8	247.66	320.0



<b>Occupied Bandwidth for GSM1900 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	246.09	314.8
Middle Channel	1880.0	244.87	316.1
High Channel	1909.8	244.19	326.3

<b>Occupied Bandwidth for GPRS 1900 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	245.46	315.0
Middle Channel	1880.0	247.06	318.2
High Channel	1909.8	243.13	323.2


<b>Occupied Bandwidth for EDGE 1900 band</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	245.63	314.2
Middle Channel	1880.0	245.04	317.1
High Channel	1909.8	244.23	321.6

<b>Occupied Bandwidth for UMTS band V</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.1490	4.641
Middle Channel	836.6	4.1458	4.639
High Channel	846.6	4.1298	4.630


<b>Occupied Bandwidth for UMTS band II</b>			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	1852.4	4.2986	6.000
Middle Channel	1880	4.1643	4.689
High Channel	1907.6	4.3272	5.997




### GSM 850 CH 128

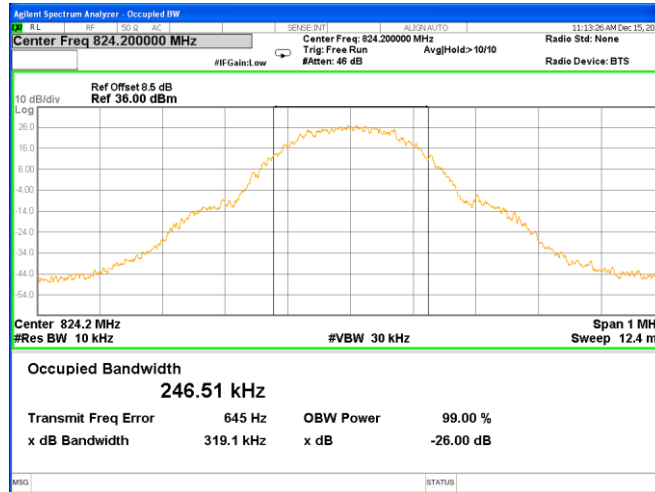

### GSM 850 CH 190

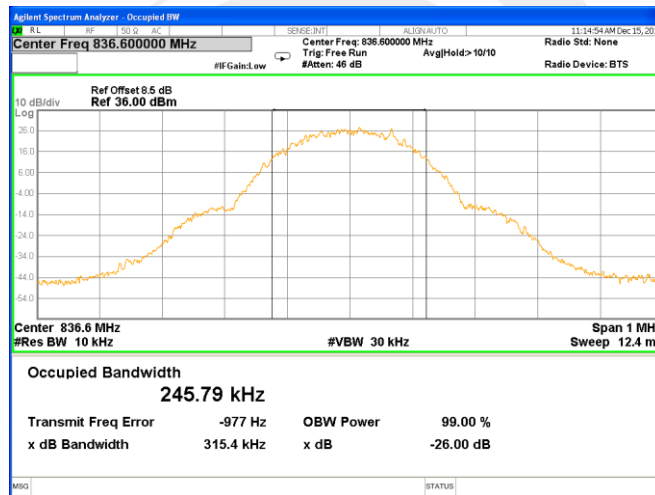


### GSM 850 CH 251

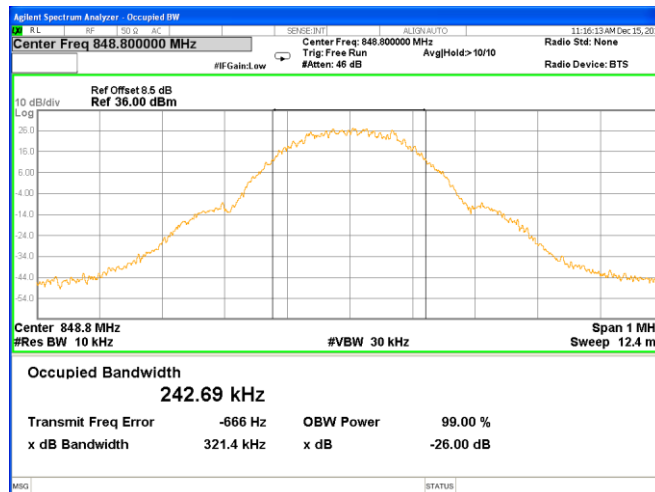





### GPRS 850 CH 128

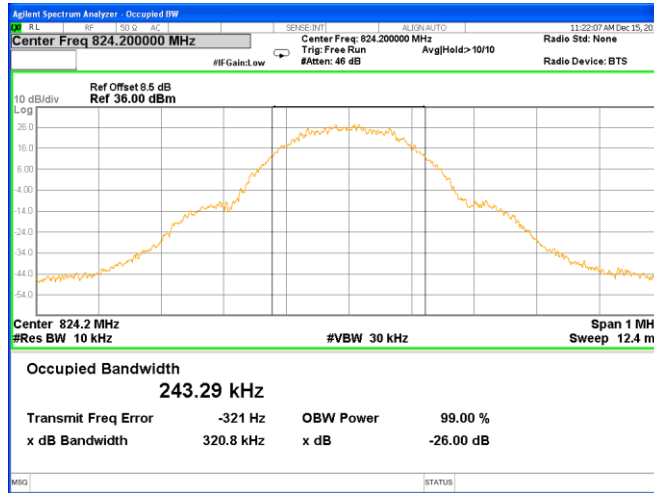

### GPRS 850 CH 190

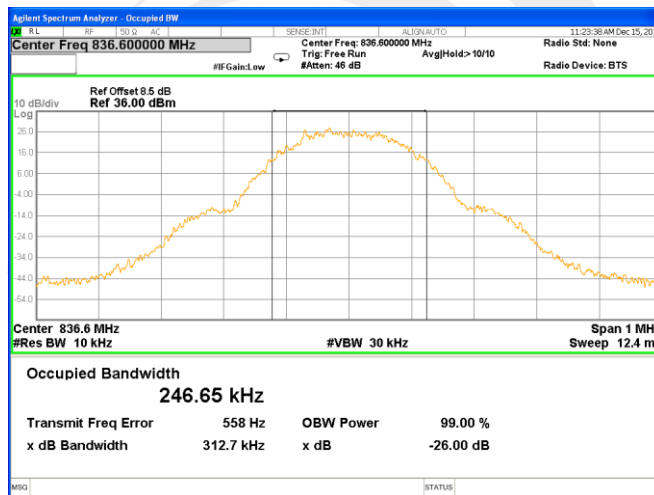


### GPRS 850 CH 251

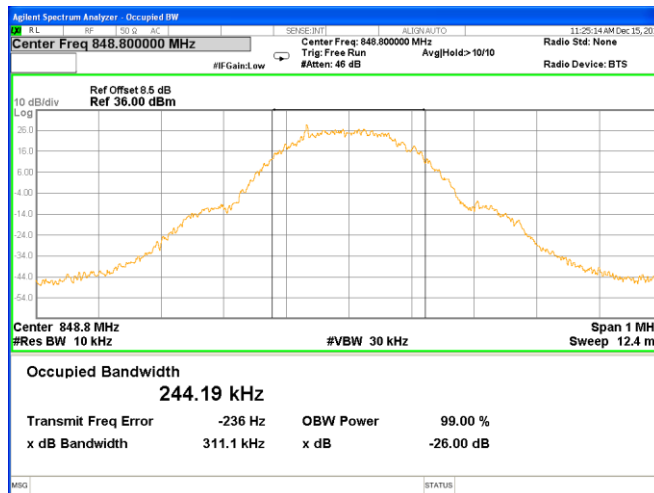





### EDGE 850 CH 128

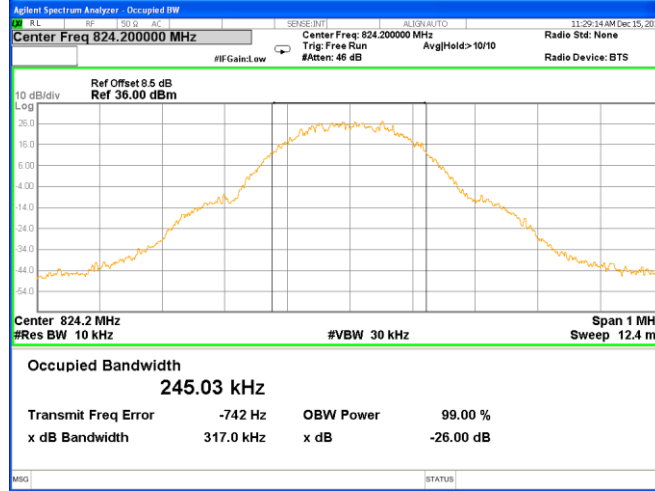

### EDGE 850 CH 190

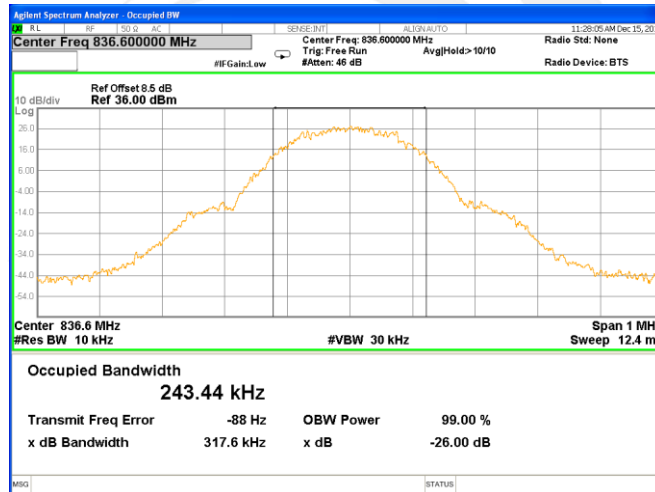


### EDGE 850 CH 251

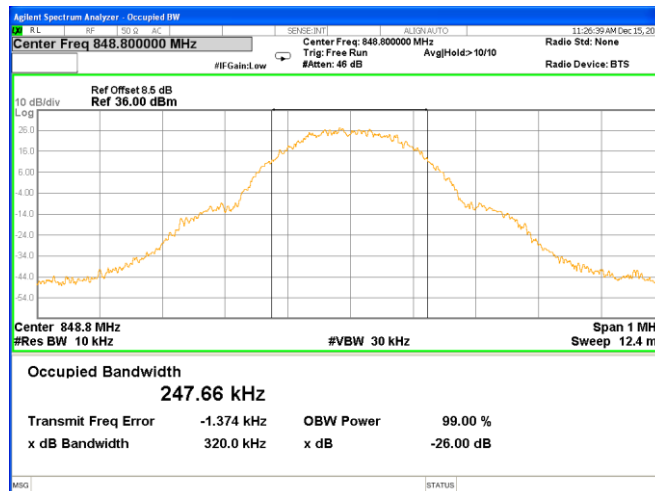





### PCS 1900 CH 512

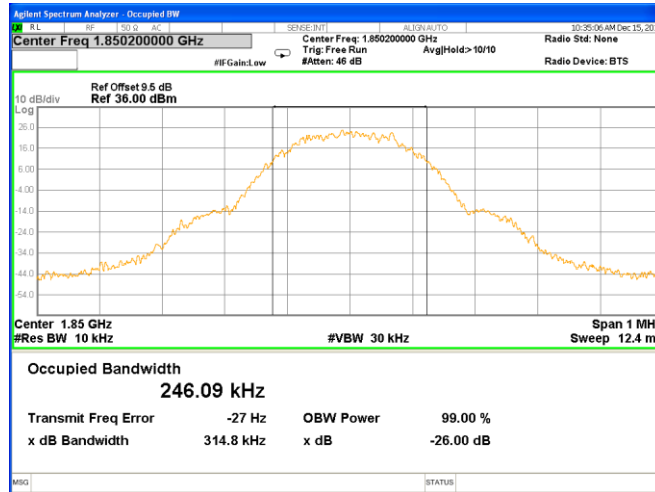

### PCS 1900 CH 661

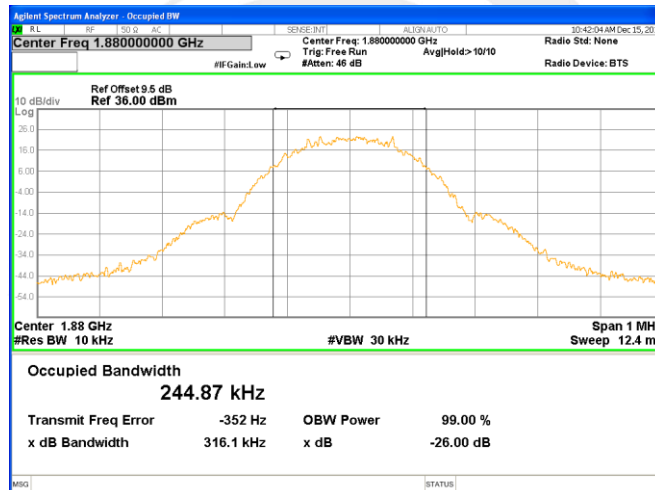


### PCS 1900 CH 810

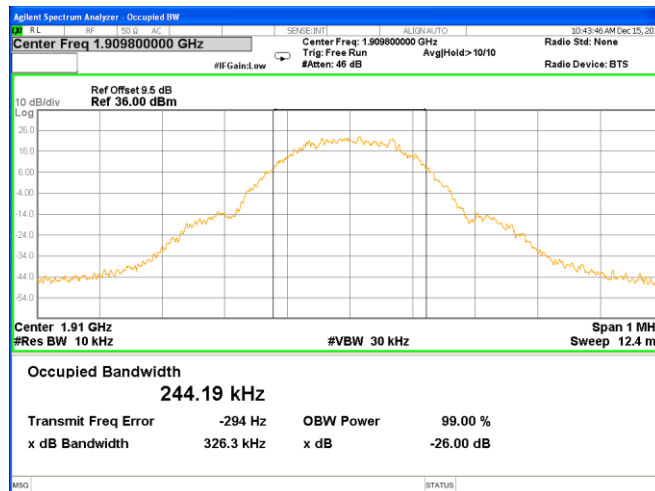





### GPRS 1900 CH 512

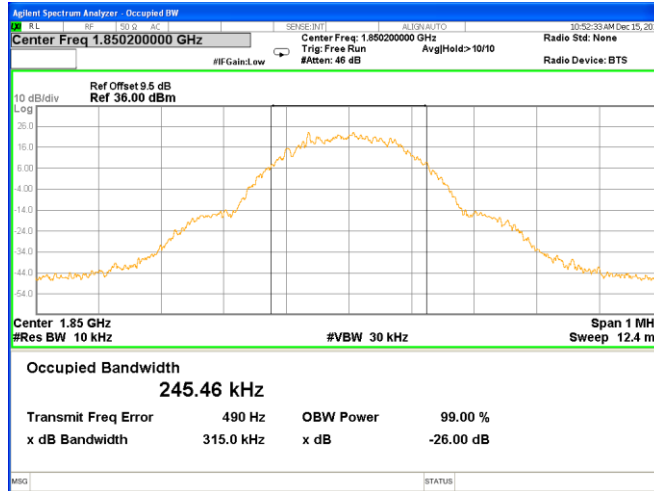

### GPRS 1900 CH 661

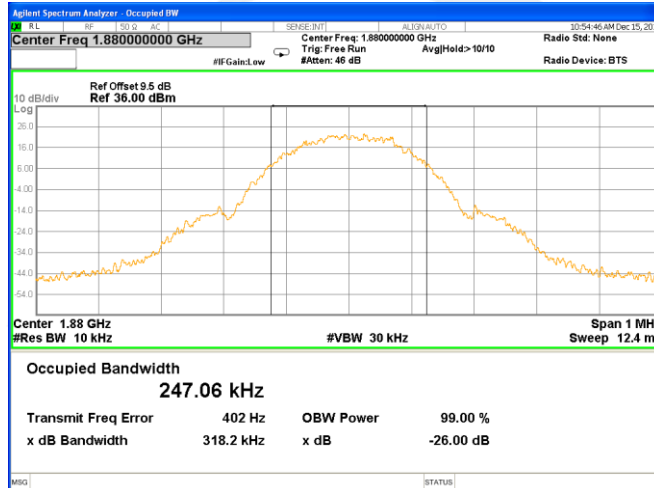


### GPRS 1900 CH 810

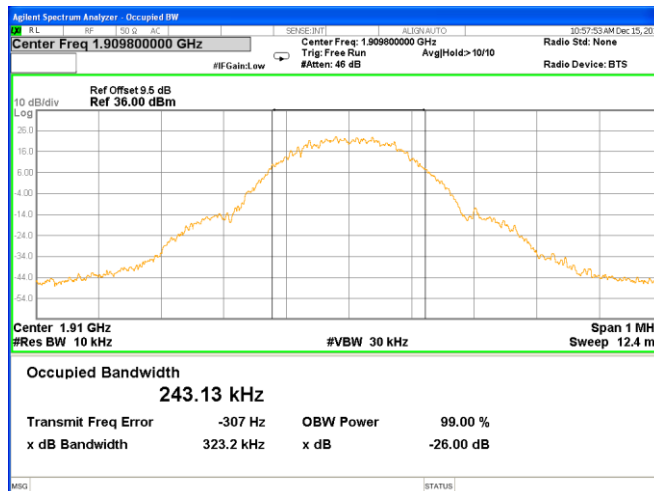







### EDGE 1900 CH 512

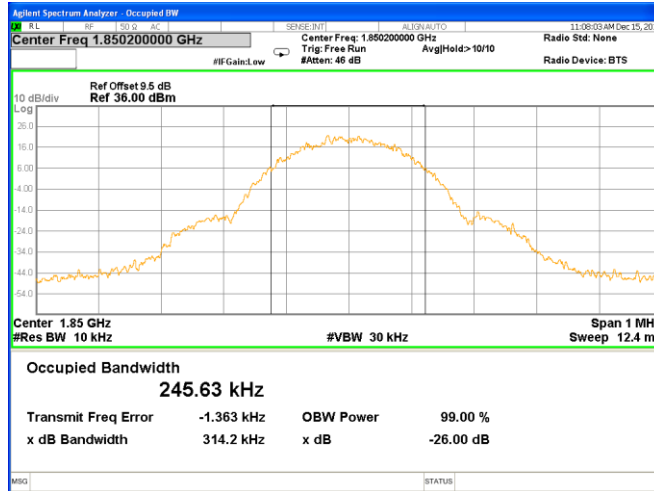

### EDGE 1900 CH 661

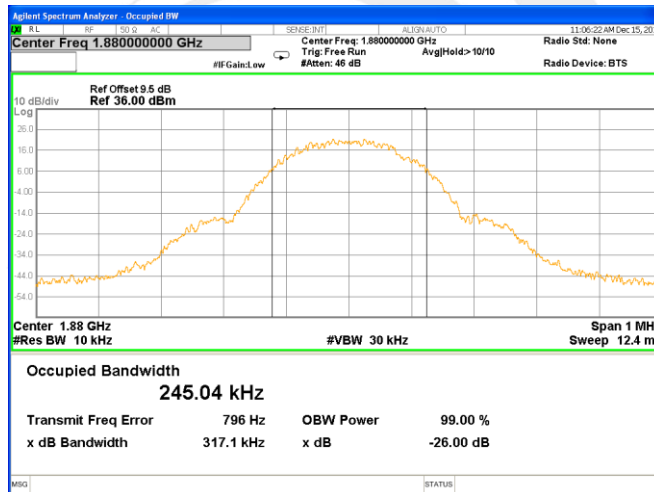


### EDGE 1900 CH 810

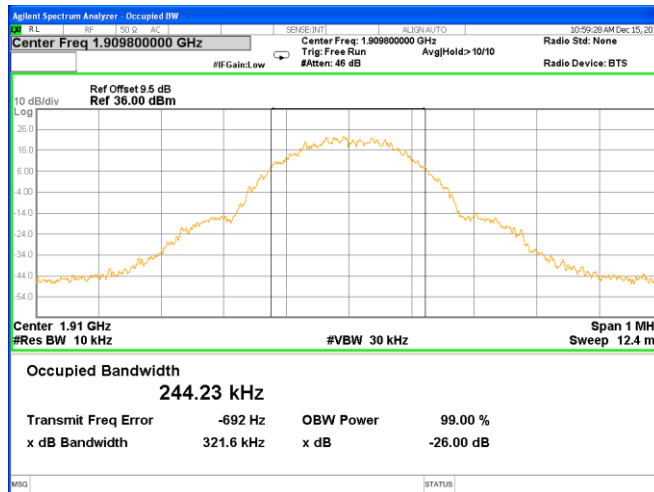





### UMTS BAND V CH 4132

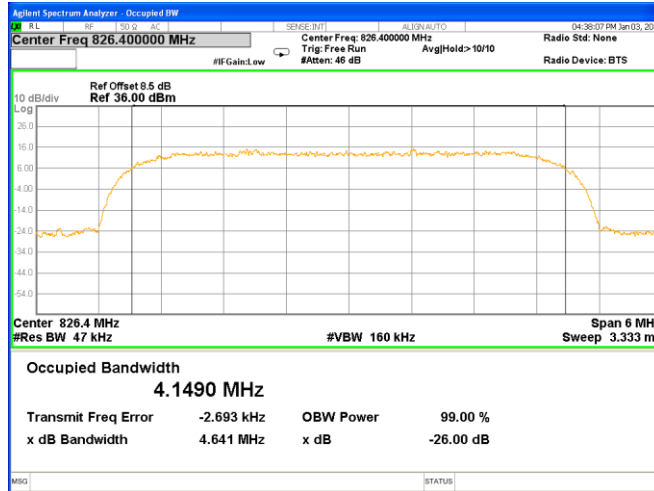

### UMTS BAND V CH 4183

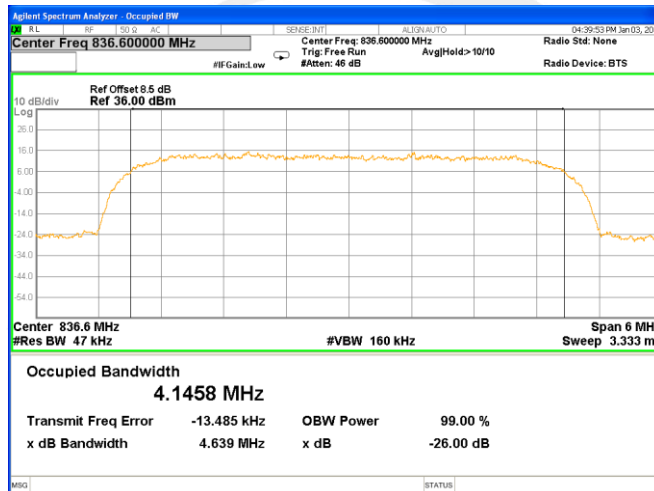


### UMTS BAND V CH 4233

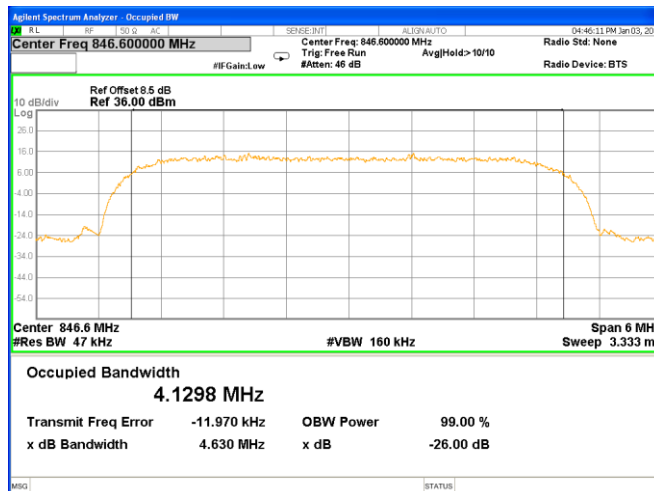





### UMTS BAND II CH 9262

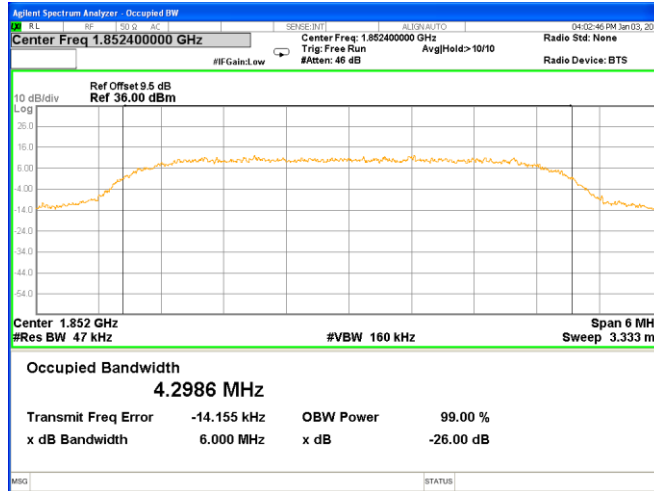

### UMTS BAND II CH 9400

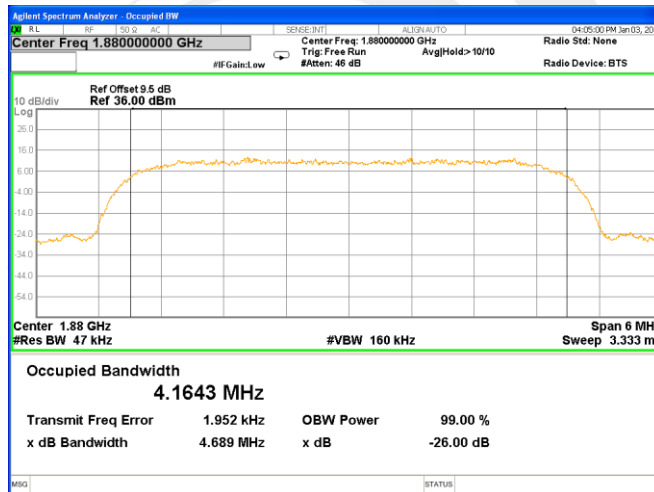

### UMTS BAND II CH 9538

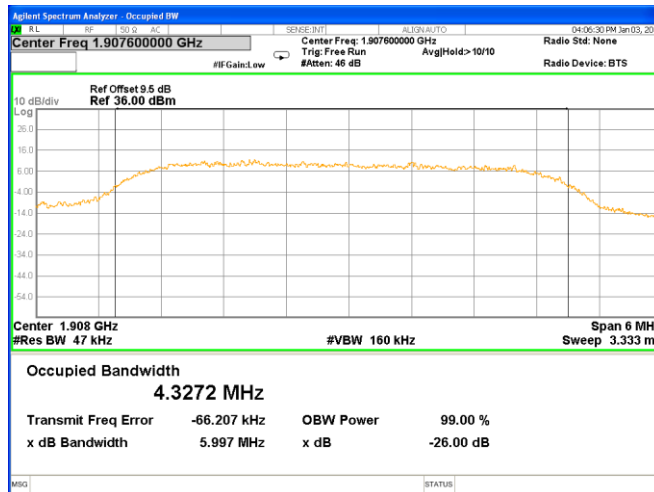



A5 FREQUENCY STABILITY

Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.4 V.; Maximum Voltage =4.25 V

GSM 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	16.69	0.199	2.5ppm	PASS
40		23.39	0.280		
30		32.91	0.393		
20		21.47	0.257		
10		28.97	0.346		
0		25.44	0.304		
-10		33.47	0.400		
-20		34.00	0.406		
-30		19.42	0.232		
25		Maximum Voltage	33.50		
25	BEP	35.32	0.422		

GPRS 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	35.45	0.424	2.5ppm	PASS
40		18.18	0.217		
30		25.75	0.308		
20		32.67	0.391		
10		26.36	0.315		
0		22.95	0.274		
-10		22.30	0.267		
-20		25.43	0.304		
-30		23.04	0.275		
25		Maximum Voltage	29.91		
25	BEP	29.71	0.014		



EDGE 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	25.54	0.305	2.5ppm	PASS
40		14.66	0.175		
30		19.99	0.239		
20		32.91	0.393		
10		25.32	0.303		
0		12.67	0.151		
-10		36.37	0.435		
-20		21.40	0.256		
-30		32.28	0.386		
25		Maximum Voltage	28.26		
25	BEP	27.41	0.014		



GSM 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	24.49	0.013	Within Authorized Band	PASS
40		22.93	0.012		
30		24.29	0.013		
20		34.26	0.018		
10		18.23	0.010		
0		15.36	0.008		
-10		32.16	0.017		
-20		31.12	0.017		
-30		14.15	0.008		
25		Maximum Voltage	36.23		
25	BEP	18.10	0.010		

GPRS 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	36.28	0.019	Within Authorized Band	PASS
40		27.87	0.015		
30		35.10	0.019		
20		32.72	0.017		
10		34.50	0.018		
0		23.68	0.013		
-10		35.49	0.019		
-20		16.08	0.009		
-30		13.94	0.007		
25		Maximum Voltage	14.43		
25	BEP	27.77	0.015		



EDGE 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	20.26	0.011	Within Authorized Band	PASS
40		23.26	0.012		
30		13.72	0.007		
20		33.83	0.018		
10		24.07	0.013		
0		17.64	0.009		
-10		25.99	0.014		
-20		16.98	0.009		
-30		14.12	0.008		
25		Maximum Voltage	35.46		
25	BEP	15.74	0.008		



WCDMA V Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	34.01	0.407	2.5ppm	PASS
40		33.48	0.400		
30		28.40	0.339		
20		16.67	0.199		
10		14.72	0.176		
0		34.08	0.407		
-10		34.83	0.416		
-20		24.44	0.292		
-30		31.80	0.380		
25		Maximum Voltage	14.58		
25	BEP	35.86	0.429		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

WCDMA II Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	25.44	0.014	Within Authorized Band	PASS
40		36.25	0.019		
30		12.43	0.007		
20		23.10	0.012		
10		34.75	0.018		
0		24.15	0.013		
-10		20.45	0.011		
-20		23.51	0.013		
-30		34.69	0.018		
25		Maximum Voltage	11.75		
25	BEP	33.43	0.018		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.







# A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

## GSM 850 BAND


### Lowest Channel

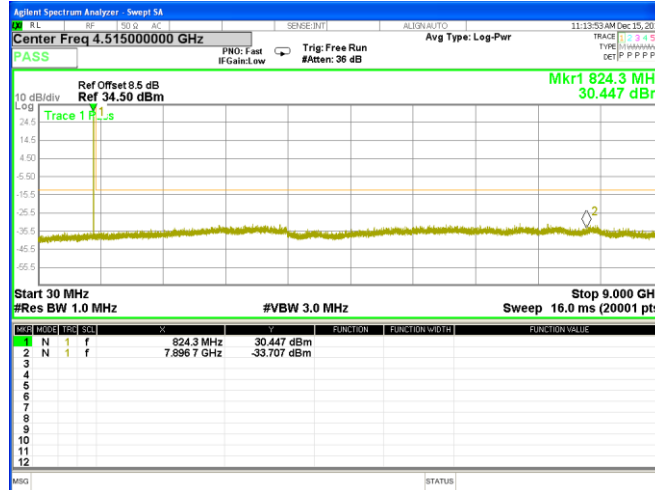

Middle Channel

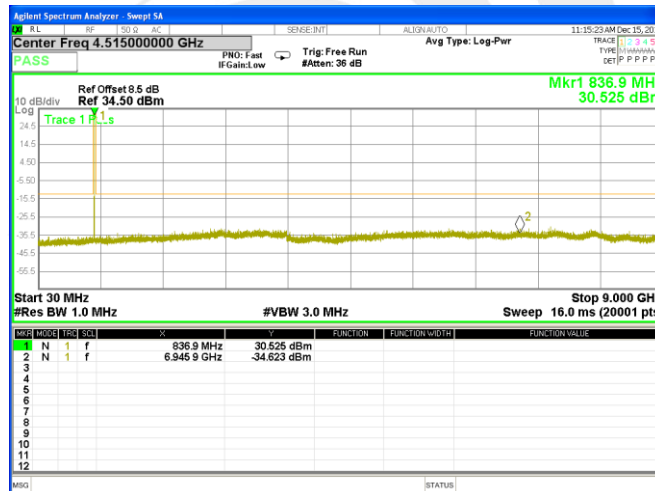

Highest Channel

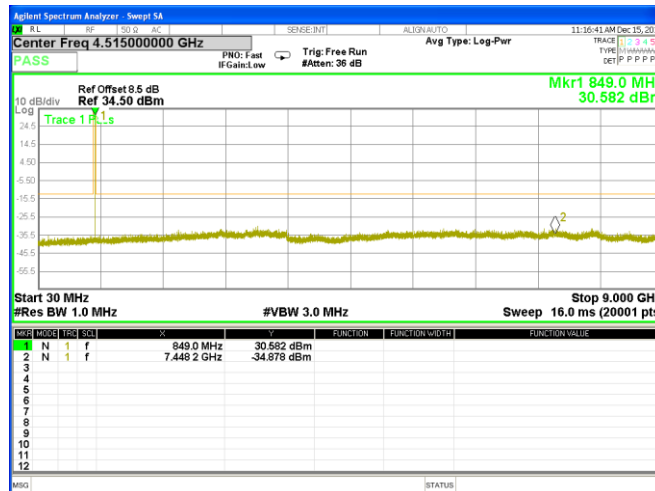




### GPRS 850 BAND


#### Lowest Channel



#### Middle Channel

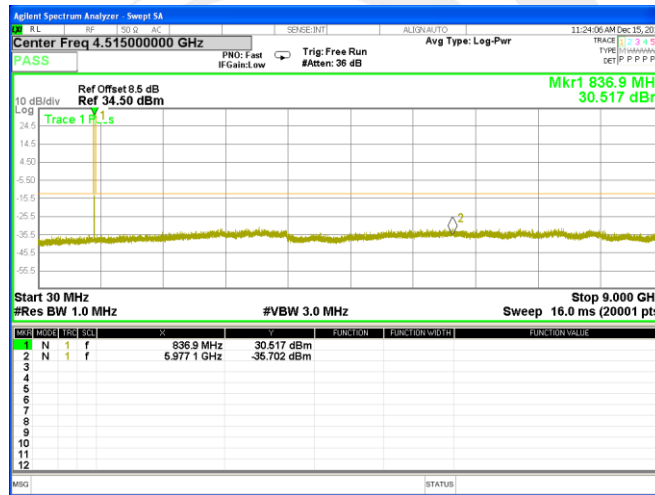

#### Highest Channel

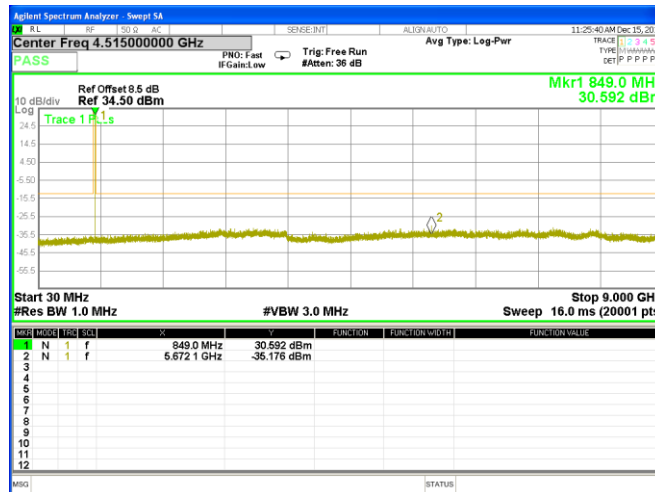




### EDGE 850 BAND


#### Lowest Channel



#### Middle Channel

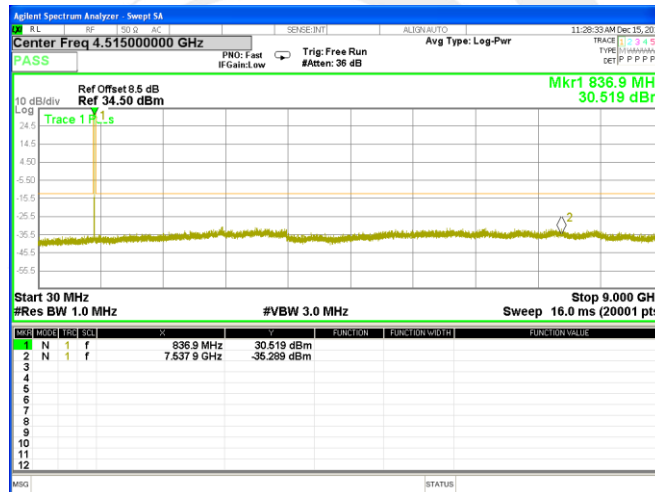


#### Highest Channel

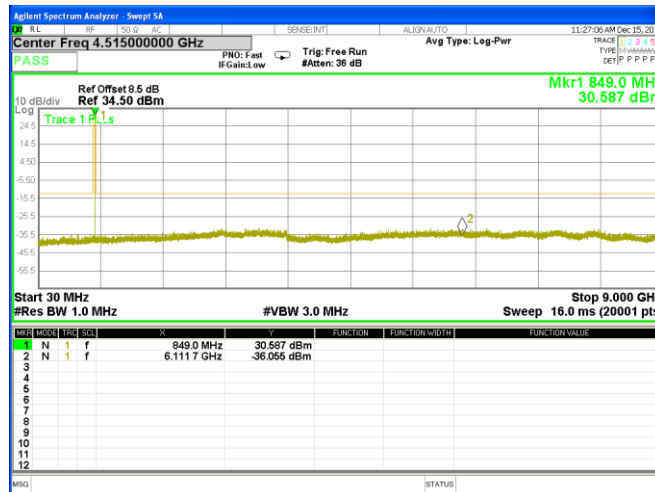




### GSM1900 BAND(30M-20G)


#### Lowest Channel

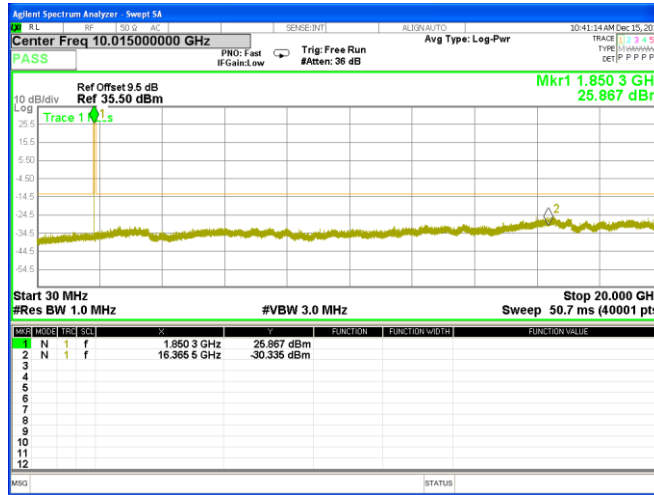

#### Middle Channel

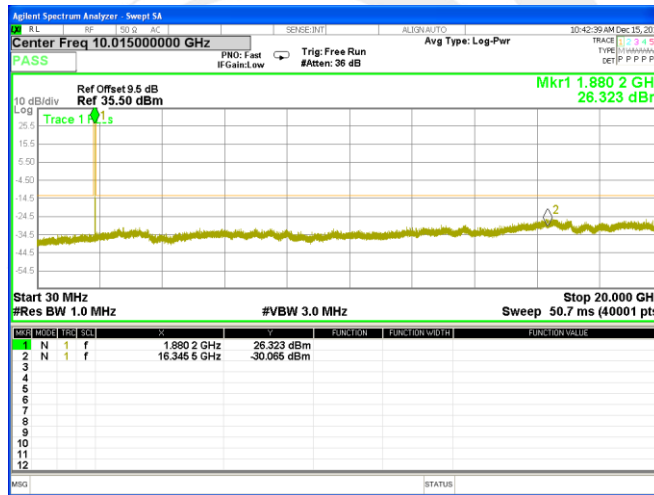


#### Highest Channel

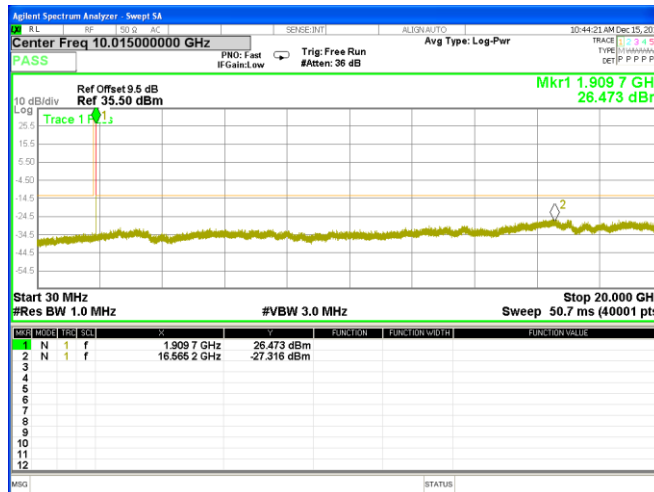




### GPRS1900 BAND(30M-20G)


#### Lowest Channel

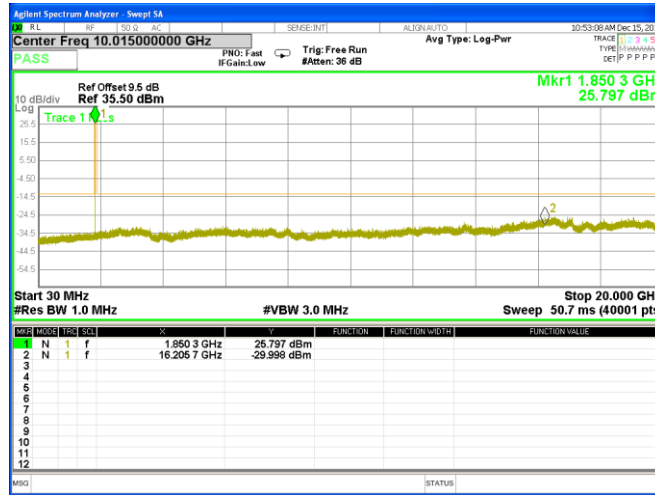

#### Middle Channel

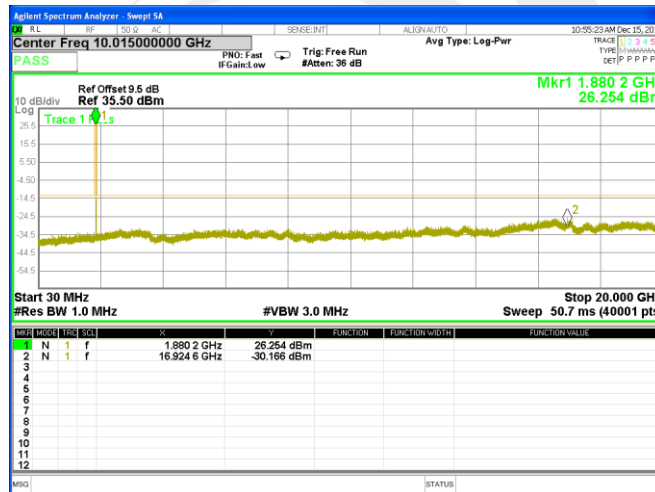


#### Highest Channel

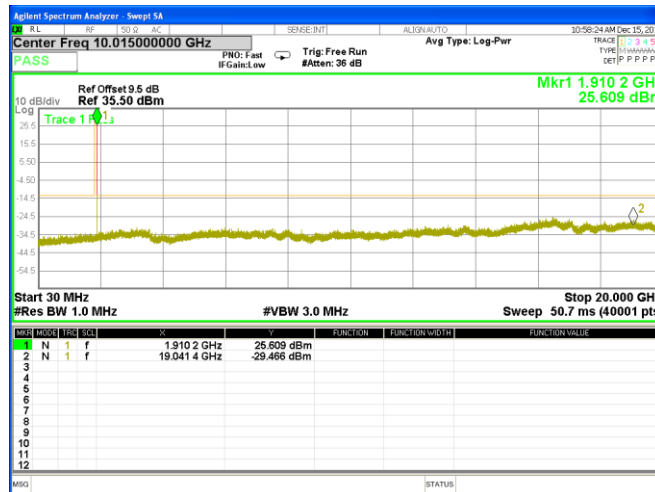




### EDGE 1900 BAND(30M-20G)


#### Lowest Channel

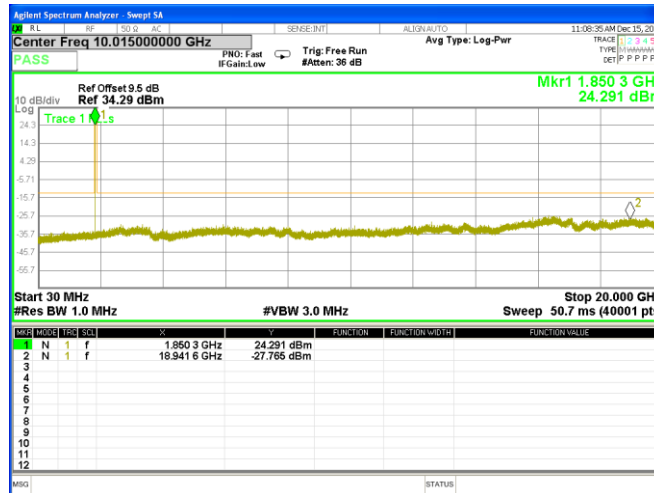

#### Middle Channel

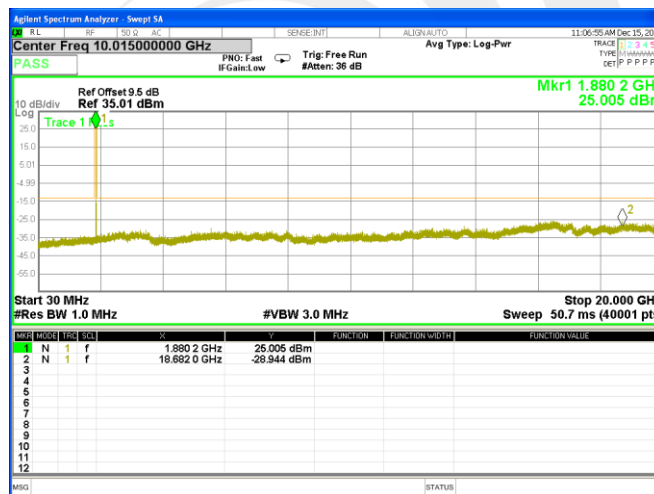


#### Highest Channel

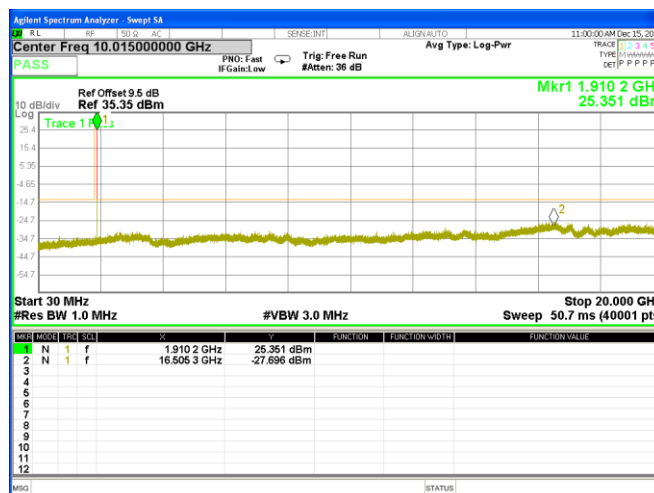





### WCDMA Band V (RMC 12.2Kbps) Lowest Channel

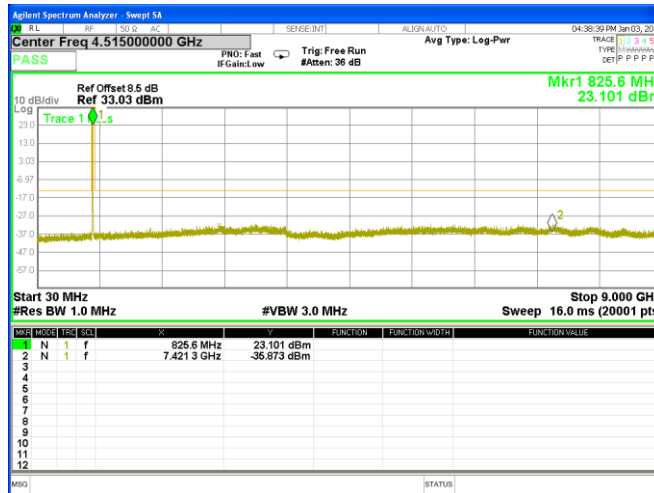

### Middle Channel

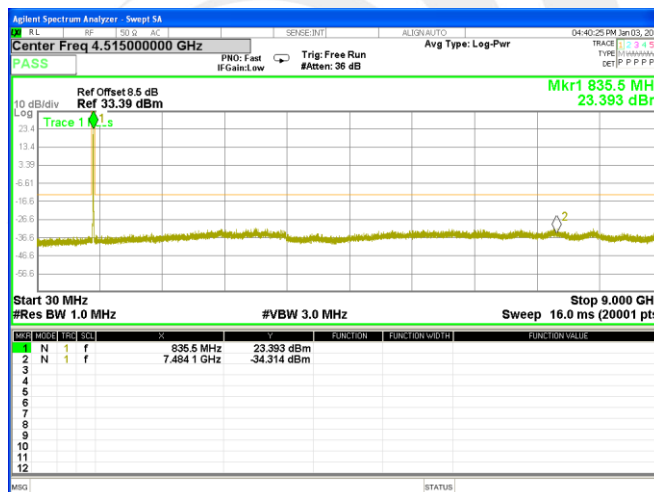


### Highest Channel

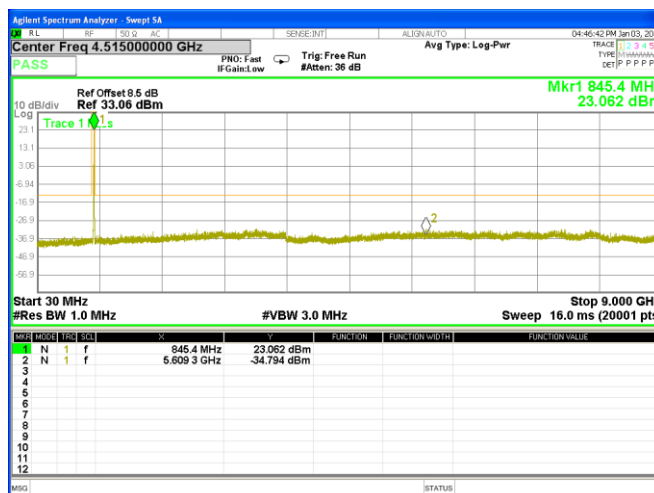




### WCDMA Band II (RMC 12.2Kbps)(30M-20G)


#### Lowest Channel

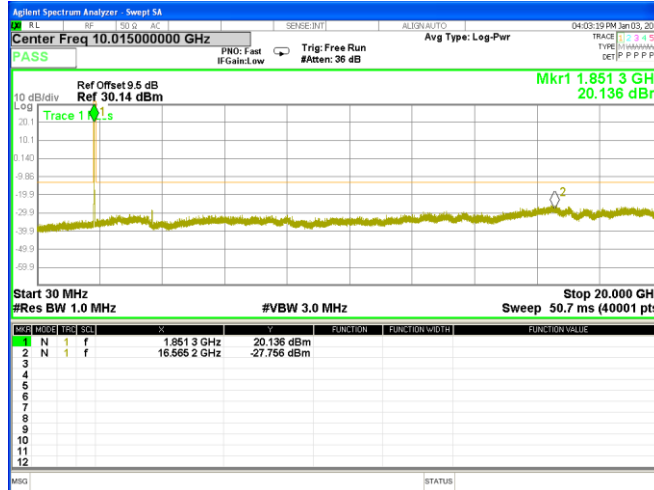

#### Middle Channel

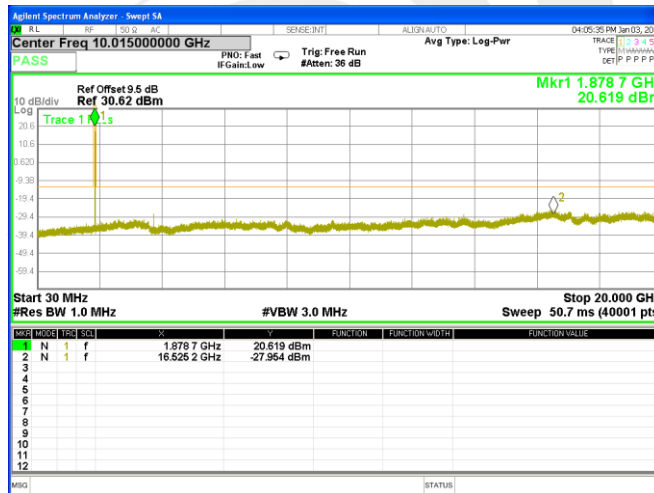

#### Highest Channel

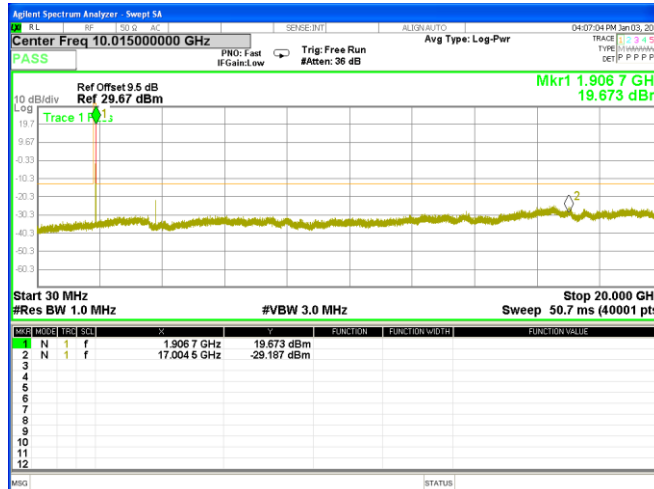






A7 BAND EDGE


GSM 850

Lowest Band Edge

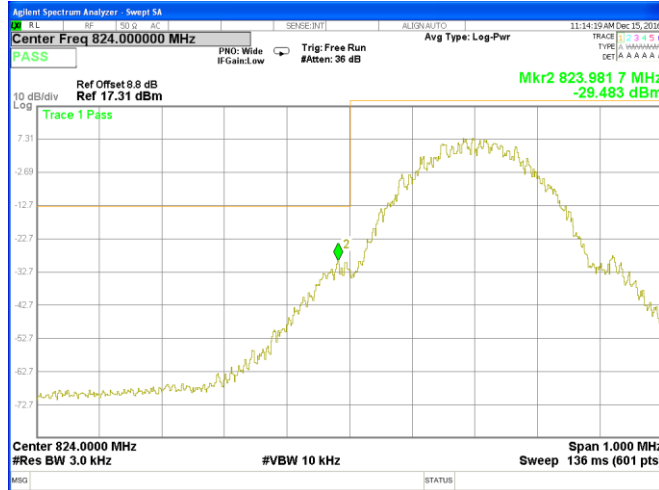

Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB

Highest Band Edge

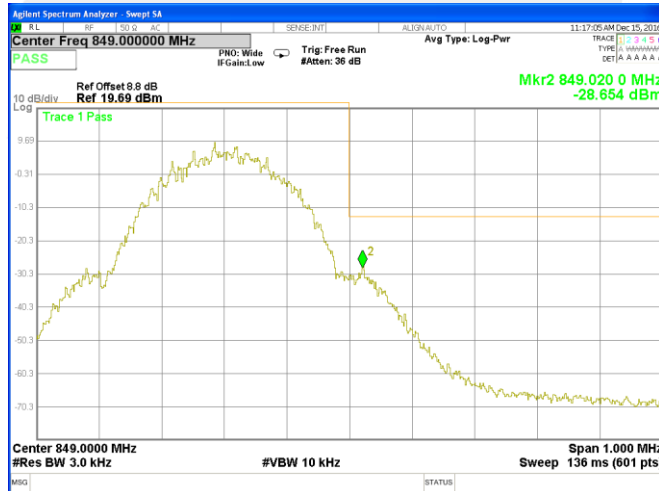


Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB




### GPRS 850

#### Lowest Band Edge

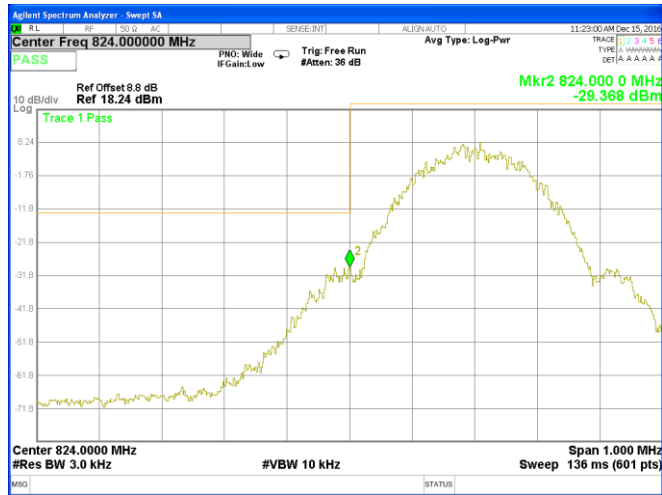

Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB

#### Highest Band Edge

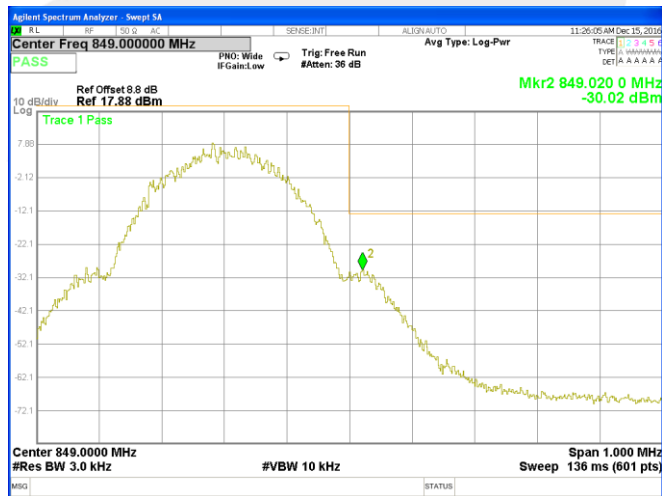


Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB




### EDGE 850

#### Lowest Band Edge

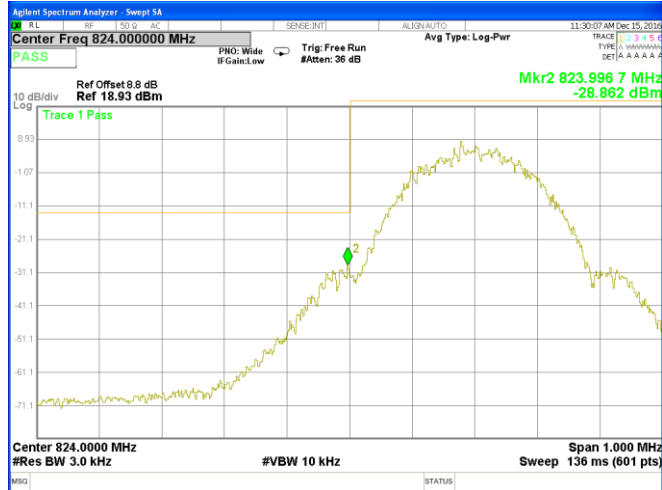

Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB

#### Highest Band Edge

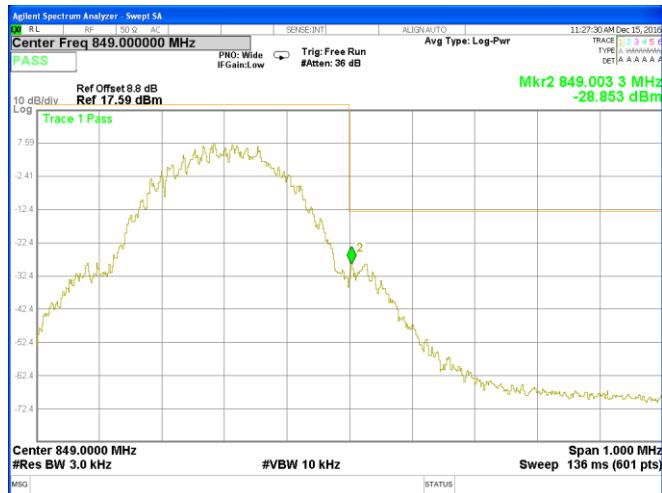


Note: Offset=Cable loss(8.5)+10log(3.2/3)=8.5+0.3=8.8 dB



### GSM 1900

#### Lowest Band Edge

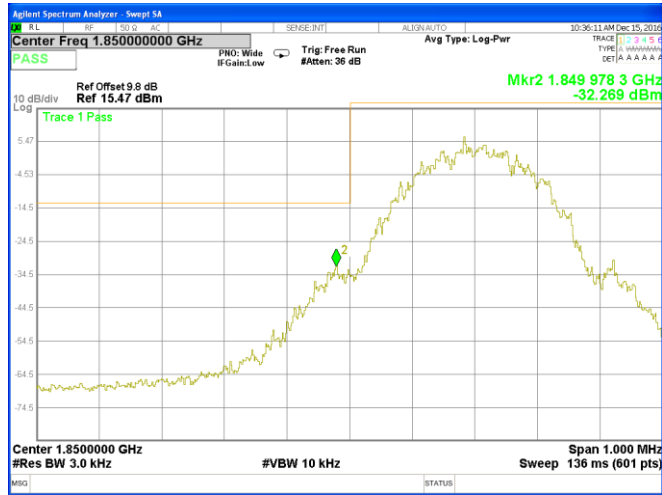

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

#### Highest Band Edge




Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB



### GPRS 1900

#### Lowest Band Edge

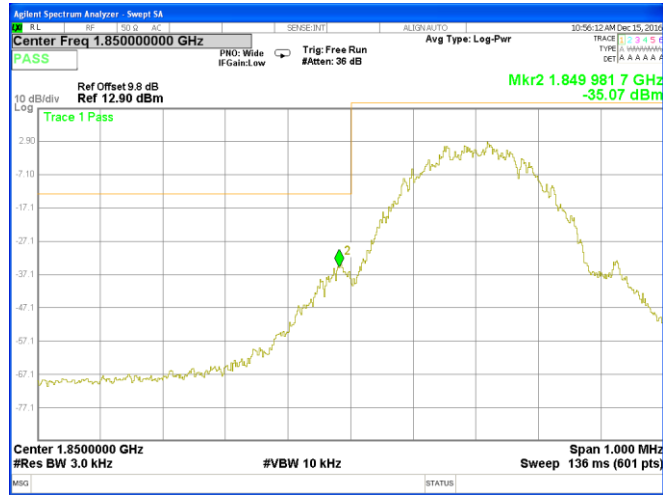

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

#### Highest Band Edge




Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




### EDGE 1900

#### Lowest Band Edge

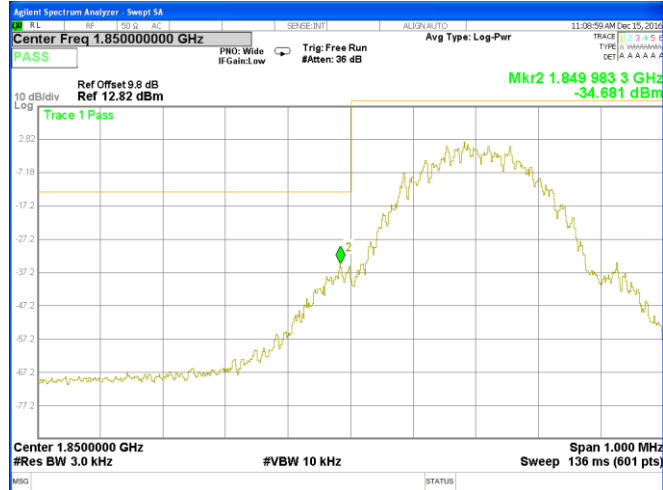

Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB

#### Highest Band Edge

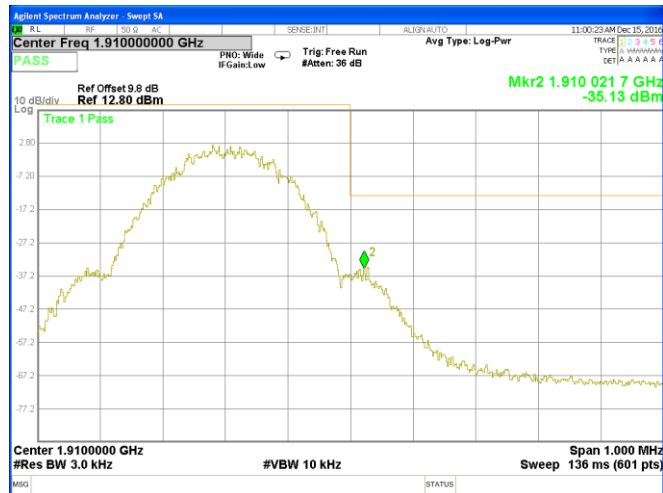


Note: Offset=Cable loss(9.5)+10log(3.2/3)=9.5+0.3=9.8 dB




### WCDMA Band VRMC 12.2Kbps

#### Lowest Band Edge

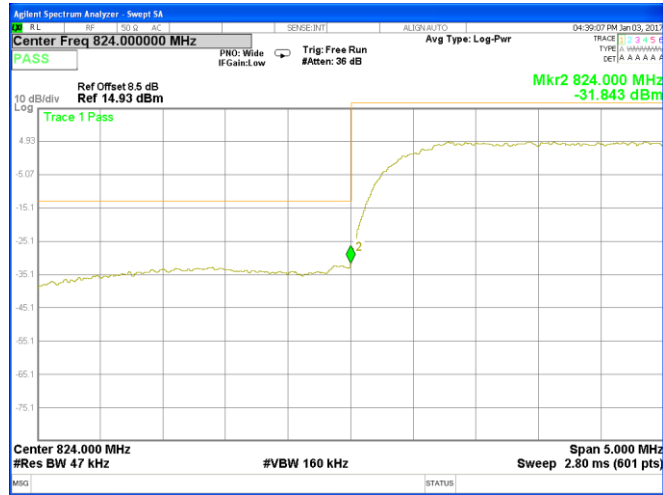


#### Highest Band Edge

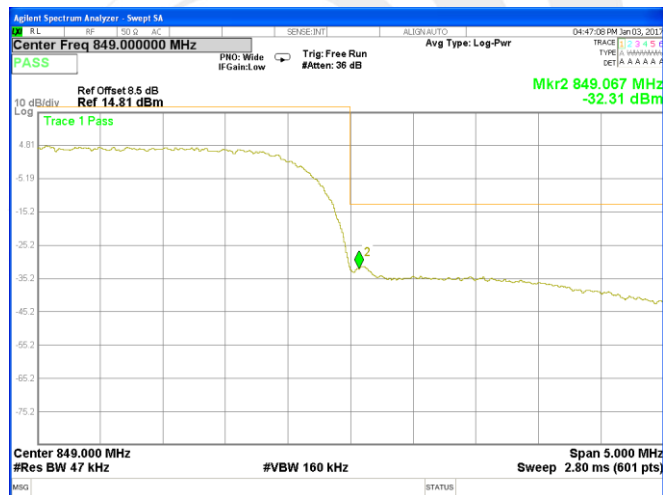




### WCDMA Band IIRMC 12.2Kbps

#### Lowest Band Edge

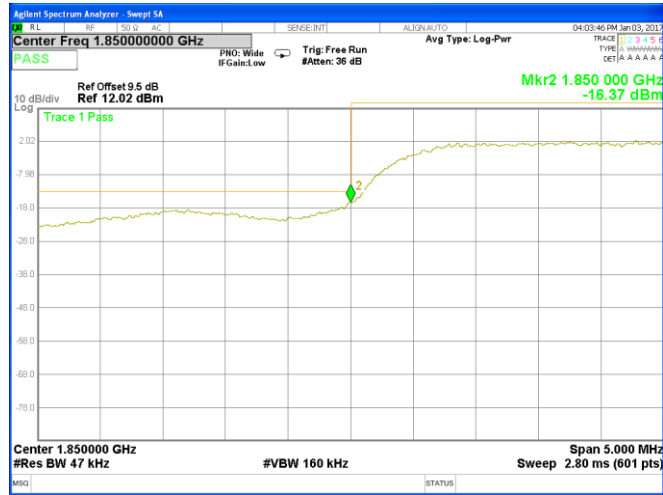

#### Highest Band Edge

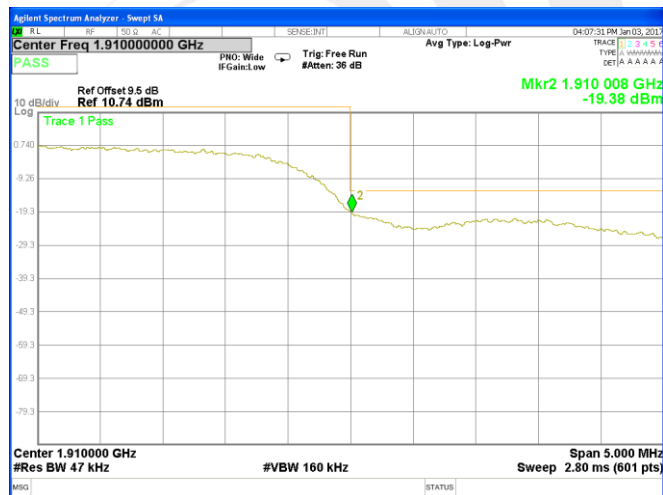





A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

GSM 850: (30-9000)MHz

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.26	-40.55	9.40	4.75	-35.90	-13.00	-22.90	H
2472.22	-40.11	10.60	8.39	-37.90	-13.00	-24.90	H
3296.43	-31.16	12.00	11.79	-30.95	-13.00	-17.95	H
1648.40	-43.60	9.40	4.75	-38.95	-13.00	-25.95	V
2472.22	-45.13	10.60	8.39	-42.92	-13.00	-29.92	V
3296.60	-43.87	12.00	11.79	-43.66	-13.00	-30.66	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.24	-40.85	9.50	4.76	-36.11	-13.00	-23.11	H
2509.76	-39.78	10.70	8.40	-37.48	-13.00	-24.48	H
3346.18	-31.94	12.20	11.80	-31.54	-13.00	-18.54	H
1673.07	-43.61	9.40	4.75	-38.96	-13.00	-25.96	V
2509.70	-44.78	10.60	8.39	-42.57	-13.00	-29.57	V
3345.97	-43.93	12.20	11.82	-43.55	-13.00	-30.55	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.29	-41.03	9.60	4.77	-36.20	-13.00	-23.20	H
2546.16	-40.27	10.80	8.50	-37.97	-13.00	-24.97	H
3394.96	-31.43	12.50	11.90	-30.83	-13.00	-17.83	H
1697.61	-43.76	9.60	4.77	-38.93	-13.00	-25.93	V
2546.26	-44.84	10.80	8.50	-42.54	-13.00	-29.54	V
3395.13	-43.89	12.50	11.90	-43.29	-13.00	-30.29	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



GPRS 850: (30-9000)MHz

GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.41	-40.82	9.40	4.75	-36.17	-13.00	-23.17	H
2472.51	-39.86	10.60	8.39	-37.65	-13.00	-24.65	H
3296.60	-31.29	12.00	11.79	-31.08	-13.00	-18.08	H
1648.16	-44.07	9.40	4.75	-39.42	-13.00	-26.42	V
2472.54	-44.70	10.60	8.39	-42.49	-13.00	-29.49	V
3296.53	-43.63	12.00	11.79	-43.42	-13.00	-30.42	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.21	-40.49	9.50	4.76	-35.75	-13.00	-22.75	H
2509.90	-39.86	10.70	8.40	-37.56	-13.00	-24.56	H
3345.97	-30.94	12.20	11.80	-30.54	-13.00	-17.54	H
1672.89	-44.00	9.40	4.75	-39.35	-13.00	-26.35	V
2509.79	-44.67	10.60	8.39	-42.46	-13.00	-29.46	V
3346.06	-43.95	12.20	11.82	-43.57	-13.00	-30.57	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.38	-41.27	9.60	4.77	-36.44	-13.00	-23.44	H
2546.54	-39.68	10.80	8.50	-37.38	-13.00	-24.38	H
3395.28	-31.78	12.50	11.90	-31.18	-13.00	-18.18	H
1697.67	-43.94	9.60	4.77	-39.11	-13.00	-26.11	V
2546.31	-44.04	10.80	8.50	-41.74	-13.00	-28.74	V
3395.30	-42.63	12.50	11.90	-42.03	-13.00	-29.03	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



EDGE 850: (30-9000)MHz

EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.46	-40.27	9.40	4.75	-35.62	-13.00	-22.62	H
2472.42	-39.18	10.60	8.39	-36.97	-13.00	-23.97	H
3296.54	-31.65	12.00	11.79	-31.44	-13.00	-18.44	H
1648.27	-43.69	9.40	4.75	-39.04	-13.00	-26.04	V
2472.49	-44.80	10.60	8.39	-42.59	-13.00	-29.59	V
3296.66	-42.84	12.00	11.79	-42.63	-13.00	-29.63	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.12	-41.05	9.50	4.76	-36.31	-13.00	-23.31	H
2509.76	-40.07	10.70	8.40	-37.77	-13.00	-24.77	H
3345.99	-31.27	12.20	11.80	-30.87	-13.00	-17.87	H
1672.83	-43.70	9.40	4.75	-39.05	-13.00	-26.05	V
2509.64	-44.07	10.60	8.39	-41.86	-13.00	-28.86	V
3346.44	-43.63	12.20	11.82	-43.25	-13.00	-30.25	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.31	-41.08	9.60	4.77	-36.25	-13.00	-23.25	H
2546.15	-39.68	10.80	8.50	-37.38	-13.00	-24.38	H
3394.88	-31.24	12.50	11.90	-30.64	-13.00	-17.64	H
1697.39	-44.56	9.60	4.77	-39.73	-13.00	-26.73	V
2546.11	-44.07	10.80	8.50	-41.77	-13.00	-28.77	V
3395.05	-42.64	12.50	11.90	-42.04	-13.00	-29.04	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



PCS 1900: (30-20000)MHz

DCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.05	-33.53	12.60	12.93	-33.86	-13.00	-20.86	H
5550.40	-34.32	13.10	17.11	-38.33	-13.00	-25.33	H
7400.65	-32.62	11.50	22.20	-43.32	-13.00	-30.32	H
3700.51	-35.19	12.60	12.93	-35.52	-13.00	-22.52	V
5550.24	-35.00	13.10	17.11	-39.01	-13.00	-26.01	V
7400.89	-32.44	11.50	22.20	-43.14	-13.00	-30.14	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.95	-34.30	12.60	12.93	-34.63	-13.00	-21.63	H
5639.91	-34.78	13.10	17.11	-38.79	-13.00	-25.79	H
7520.21	-32.20	11.50	22.20	-42.90	-13.00	-29.90	H
3760.14	-35.25	12.60	12.93	-35.58	-13.00	-22.58	V
5639.97	-33.84	13.10	17.11	-37.85	-13.00	-24.85	V
7520.27	-32.70	11.50	22.20	-43.40	-13.00	-30.40	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.49	-34.75	12.60	12.93	-35.08	-13.00	-22.08	H
5729.26	-34.51	13.10	17.11	-38.52	-13.00	-25.52	H
7638.95	-33.39	11.50	22.20	-44.09	-13.00	-31.09	H
3819.69	-35.60	12.60	12.93	-35.93	-13.00	-22.93	V
5729.40	-33.88	13.10	17.11	-37.89	-13.00	-24.89	V
7638.91	-32.94	11.50	22.20	-43.64	-13.00	-30.64	V

- Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



GPRS 1900: (30-20000)MHz

GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.32	-33.99	12.60	12.93	-34.32	-13.00	-21.32	H
5550.38	-34.92	13.10	17.11	-38.93	-13.00	-25.93	H
7400.94	-32.52	11.50	22.20	-43.22	-13.00	-30.22	H
3700.51	-35.08	12.60	12.93	-35.41	-13.00	-22.41	V
5550.37	-34.95	13.10	17.11	-38.96	-13.00	-25.96	V
7400.61	-32.13	11.50	22.20	-42.83	-13.00	-29.83	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.04	-34.89	12.60	12.93	-35.22	-13.00	-22.22	H
5639.92	-34.83	13.10	17.11	-38.84	-13.00	-25.84	H
7519.98	-33.35	11.50	22.20	-44.05	-13.00	-31.05	H
3759.89	-34.91	12.60	12.93	-35.24	-13.00	-22.24	V
5639.93	-33.85	13.10	17.11	-37.86	-13.00	-24.86	V
7520.14	-33.20	11.50	22.20	-43.90	-13.00	-30.90	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.35	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5729.03	-35.11	13.10	17.11	-39.12	-13.00	-26.12	H
7638.87	-32.21	11.50	22.20	-42.91	-13.00	-29.91	H
3819.74	-34.87	12.60	12.93	-35.20	-13.00	-22.20	V
5729.53	-34.07	13.10	17.11	-38.08	-13.00	-25.08	V
7639.09	-32.32	11.50	22.20	-43.02	-13.00	-30.02	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



EDGE 1900: (30-20000)MHz

EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.41	-34.41	12.60	12.93	-34.74	-13.00	-21.74	H
5550.41	-34.39	13.10	17.11	-38.40	-13.00	-25.40	H
7400.77	-33.13	11.50	22.20	-43.83	-13.00	-30.83	H
3700.51	-35.15	12.60	12.93	-35.48	-13.00	-22.48	V
5550.43	-34.31	13.10	17.11	-38.32	-13.00	-25.32	V
7400.71	-32.67	11.50	22.20	-43.37	-13.00	-30.37	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.17	-34.50	12.60	12.93	-34.83	-13.00	-21.83	H
5640.03	-35.28	13.10	17.11	-39.29	-13.00	-26.29	H
7519.93	-32.73	11.50	22.20	-43.43	-13.00	-30.43	H
3760.10	-34.81	12.60	12.93	-35.14	-13.00	-22.14	V
5640.25	-33.93	13.10	17.11	-37.94	-13.00	-24.94	V
7519.83	-32.79	11.50	22.20	-43.49	-13.00	-30.49	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.68	-34.46	12.60	12.93	-34.79	-13.00	-21.79	H
5729.17	-34.28	13.10	17.11	-38.29	-13.00	-25.29	H
7639.11	-32.48	11.50	22.20	-43.18	-13.00	-30.18	H
3819.81	-35.77	12.60	12.93	-36.10	-13.00	-23.10	V
5729.39	-35.15	13.10	17.11	-39.16	-13.00	-26.16	V
7639.14	-31.76	11.50	22.20	-42.46	-13.00	-29.46	V

- Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



UMTS band V(30-9000)MHz

WCDMA Band V: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1652.02	-40.98	9.40	4.75	-36.33	-13.00	-23.33	H
2479.40	-40.41	10.60	8.39	-38.20	-13.00	-25.20	H
3305.54	-30.92	12.00	11.79	-30.71	-13.00	-17.71	H
1652.08	-43.88	9.40	4.75	-39.23	-13.00	-26.23	V
2479.48	-44.90	10.60	8.39	-42.69	-13.00	-29.69	V
3305.81	-43.96	12.00	11.79	-43.75	-13.00	-30.75	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.85	-41.48	9.50	4.76	-36.74	-13.00	-23.74	H
2509.83	-39.94	10.70	8.40	-37.64	-13.00	-24.64	H
3346.31	-31.36	12.20	11.80	-30.96	-13.00	-17.96	H
1672.93	-44.31	9.40	4.75	-39.66	-13.00	-26.66	V
2509.45	-45.28	10.60	8.39	-43.07	-13.00	-30.07	V
3346.31	-42.99	12.20	11.82	-42.61	-13.00	-29.61	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1693.30	-41.13	9.60	4.77	-36.30	-13.00	-23.30	H
2539.21	-39.44	10.80	8.50	-37.14	-13.00	-24.14	H
3385.90	-32.32	12.50	11.90	-31.72	-13.00	-18.72	H
1693.47	-43.77	9.60	4.77	-38.94	-13.00	-25.94	V
2539.48	-45.41	10.80	8.50	-43.11	-13.00	-30.11	V
3386.12	-43.76	12.50	11.90	-43.16	-13.00	-30.16	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 3GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.





UMTS band II(30-20000)MHz


WCDMA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	( dBm )	(dBm)	
3704.12	-34.86	12.60	12.93	-35.19	-13.00	-22.19	H
5557.44	-34.61	13.10	17.11	-38.62	-13.00	-25.62	H
7409.88	-33.52	11.50	22.20	-44.22	-13.00	-31.22	H
3704.19	-34.80	12.60	12.93	-35.13	-13.00	-22.13	V
5557.49	-34.89	13.10	17.11	-38.90	-13.00	-25.90	V
7409.59	-32.41	11.50	22.20	-43.11	-13.00	-30.11	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	( dBm )	(dBm)	
3759.91	-33.49	12.60	12.93	-33.82	-13.00	-20.82	H
5640.06	-34.98	13.10	17.11	-38.99	-13.00	-25.99	H
7519.95	-32.16	11.50	22.20	-42.86	-13.00	-29.86	H
3760.16	-35.02	12.60	12.93	-35.35	-13.00	-22.35	V
5640.06	-34.30	13.10	17.11	-38.31	-13.00	-25.31	V
7519.93	-32.99	11.50	22.20	-43.69	-13.00	-30.69	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	( dBm )	(dBm)	
3815.33	-33.73	12.60	12.93	-34.06	-13.00	-21.06	H
5722.22	-35.25	13.10	17.11	-39.26	-13.00	-26.26	H
7630.03	-32.30	11.50	22.20	-43.00	-13.00	-30.00	H
3815.39	-34.83	12.60	12.93	-35.16	-13.00	-22.16	V
5722.44	-33.88	13.10	17.11	-37.89	-13.00	-24.89	V
7629.90	-32.73	11.50	22.20	-43.43	-13.00	-30.43	V

**Note:** (1)Below 30MHz no Spurious found is the worst condition.  
 (2)Above 6GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.



APPENDIX B PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION

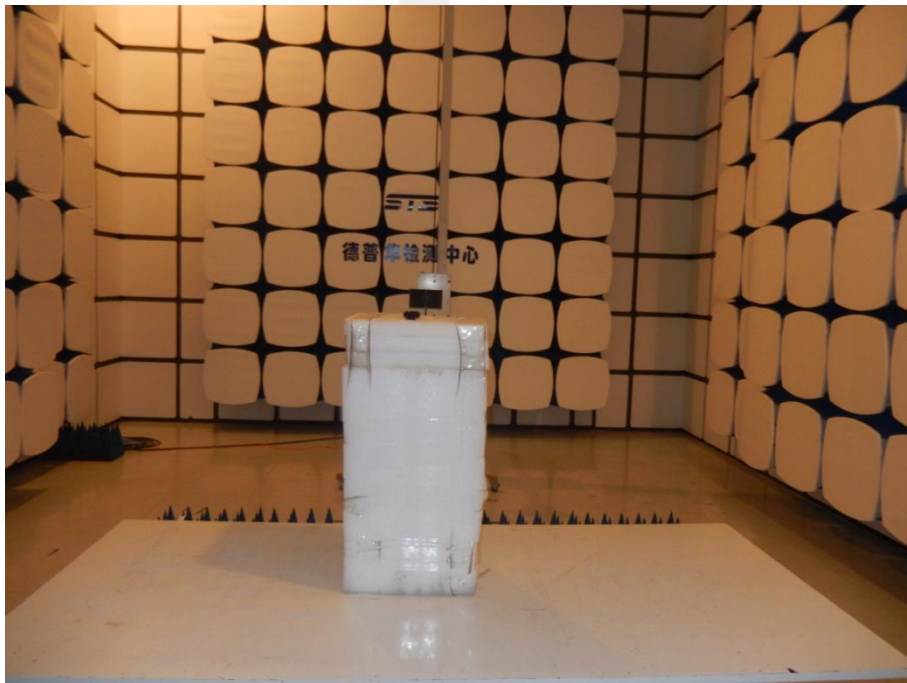

※※※※END OF THE REPORT※※※※