

Appendix B

RF Test Data for BT 4.0(BLE) (Conducted Measurement)

Product Name: Neckband wireless earphone

Trade Mark: N/A


Test Model: NE03

Environmental Conditions

Temperature:	23.5 ° C
Relative Humidity:	52.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Jayden.zhao
Supervised by:	Tom.Liu


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

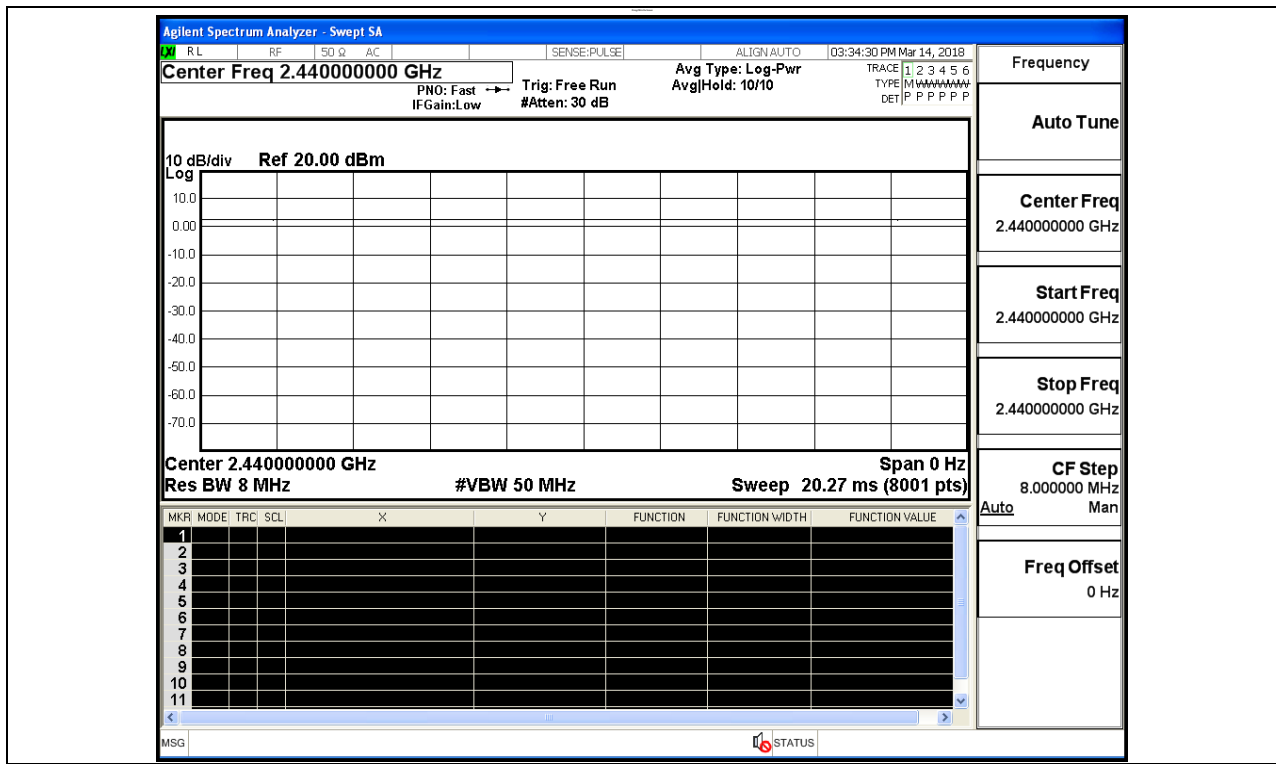


B.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-3.435	30	PASS
BT LE	MCH	-3.379	30	PASS
BT LE	HCH	-3.567	30	PASS

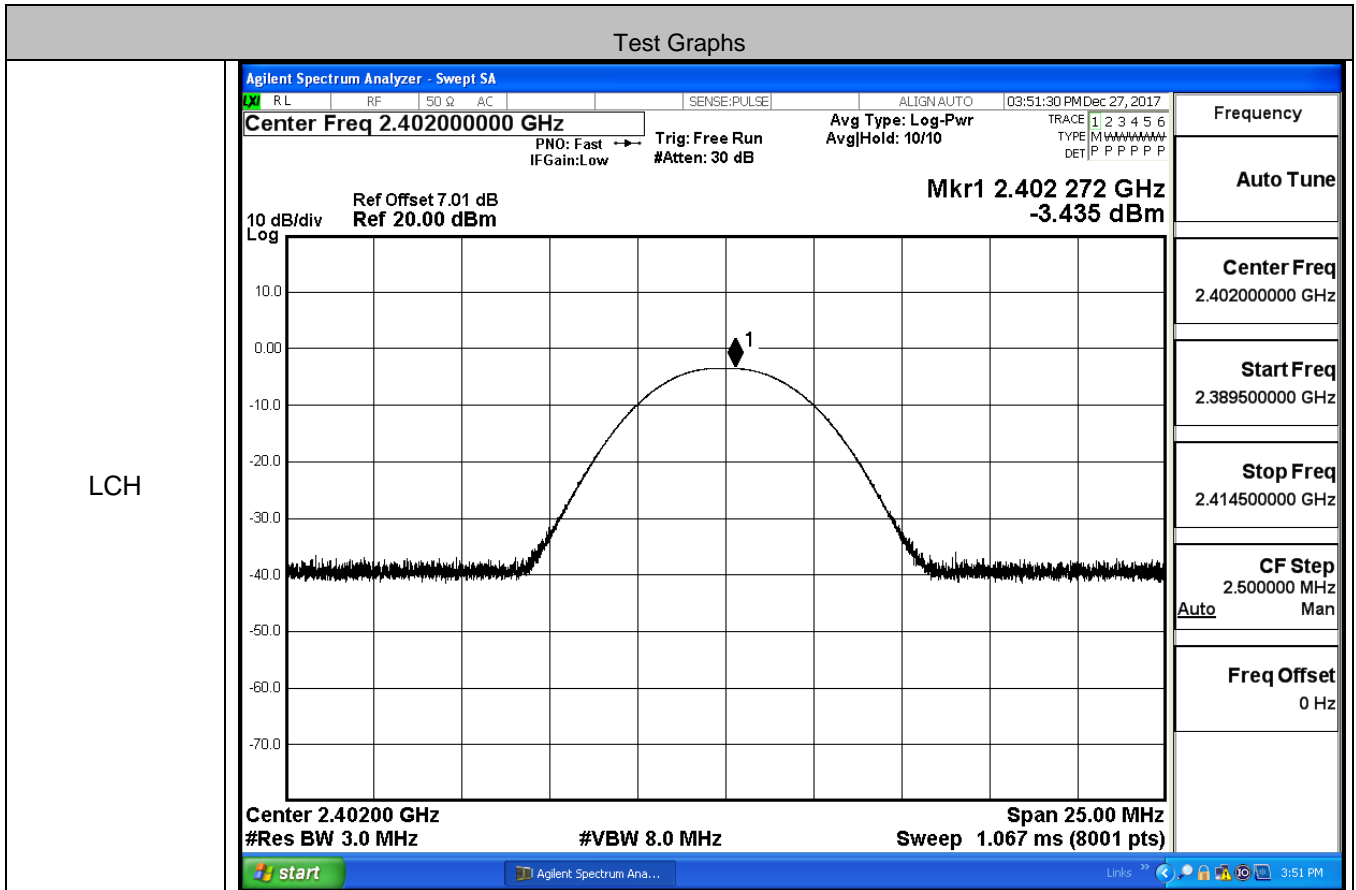

MCH

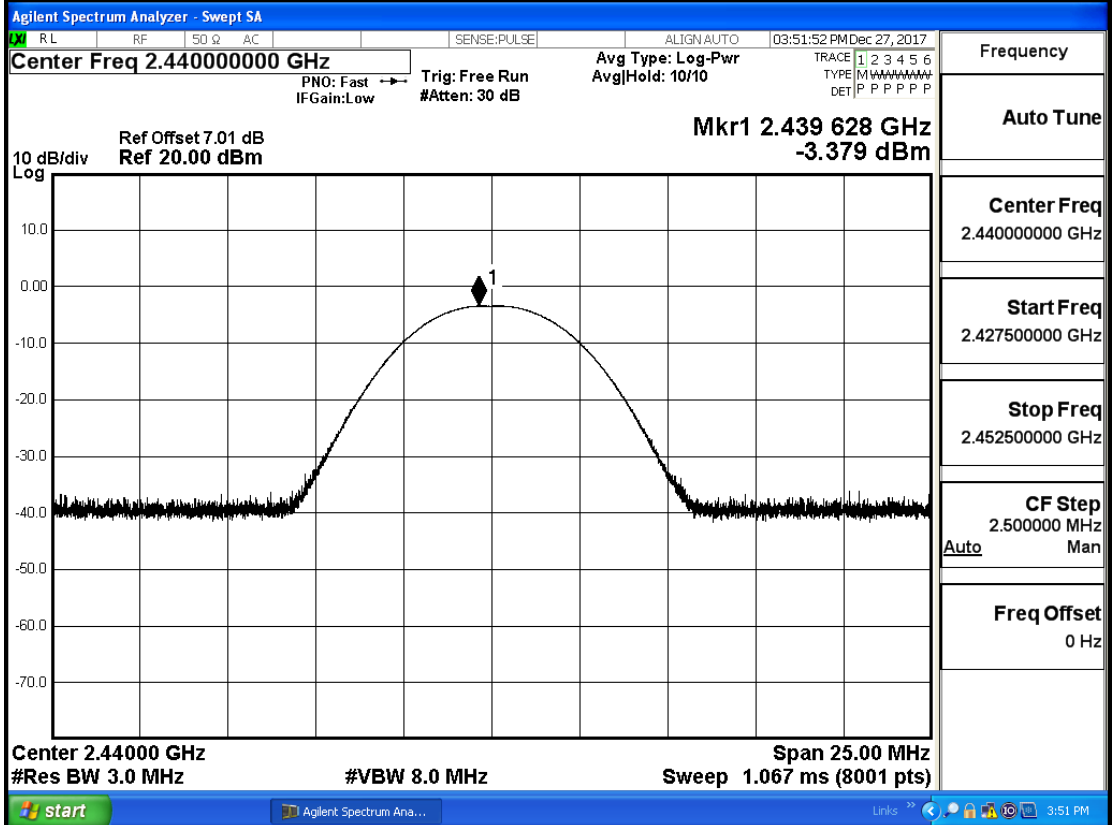



HCH

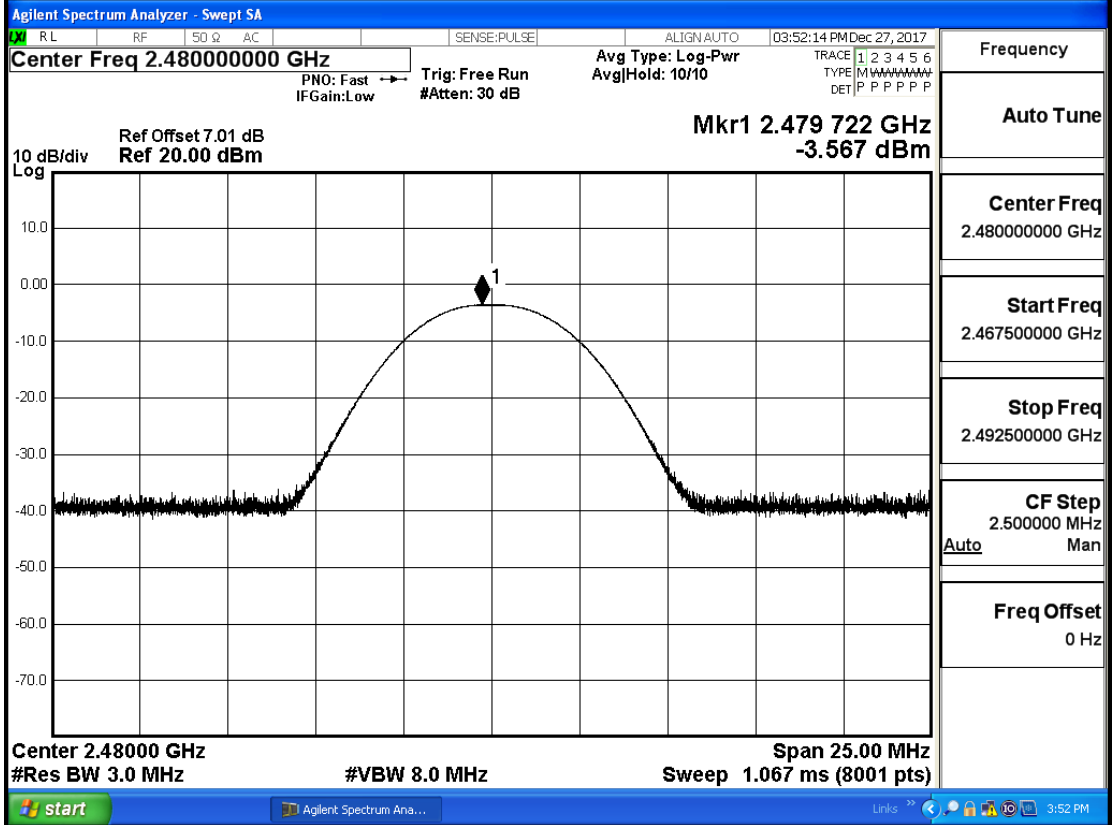

B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-6.588	8	PASS
BT LE	MCH	-6.516	8	PASS
BT LE	HCH	-6.487	8	PASS

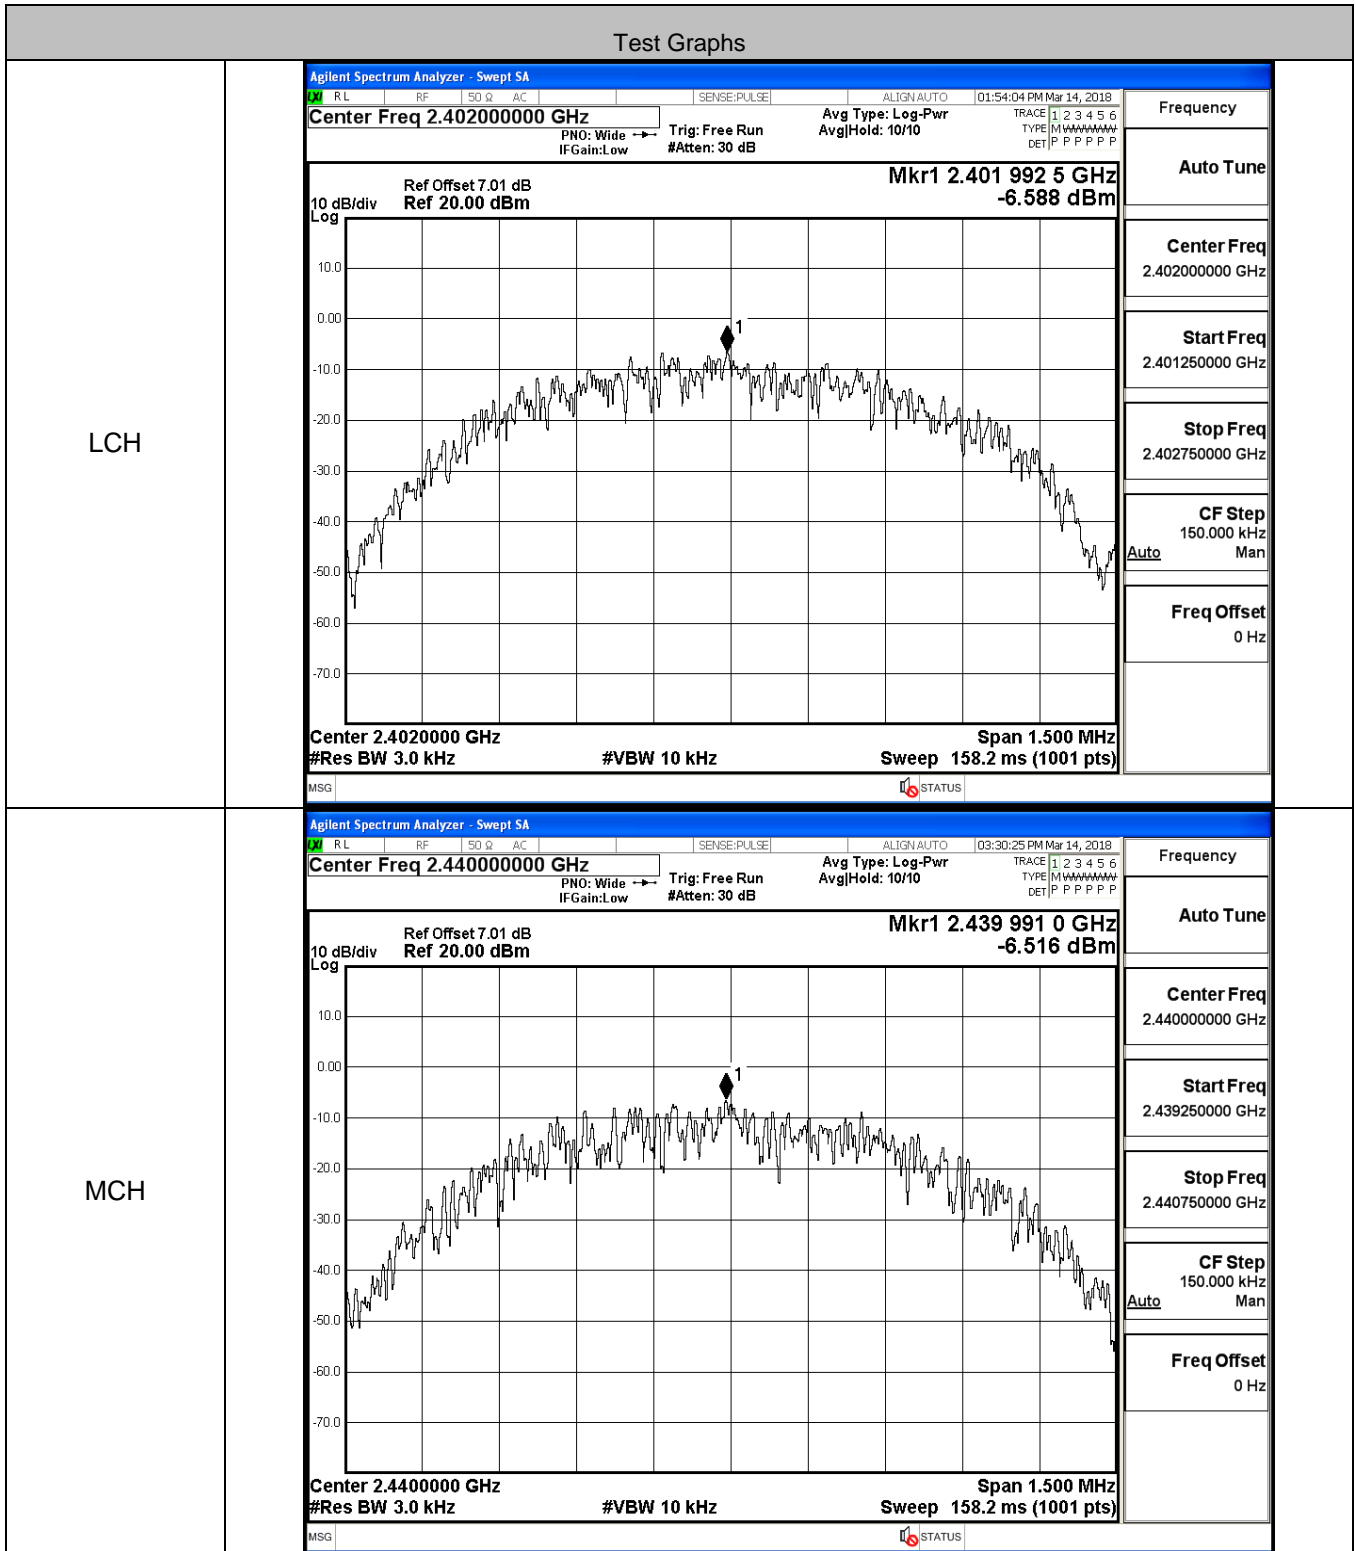

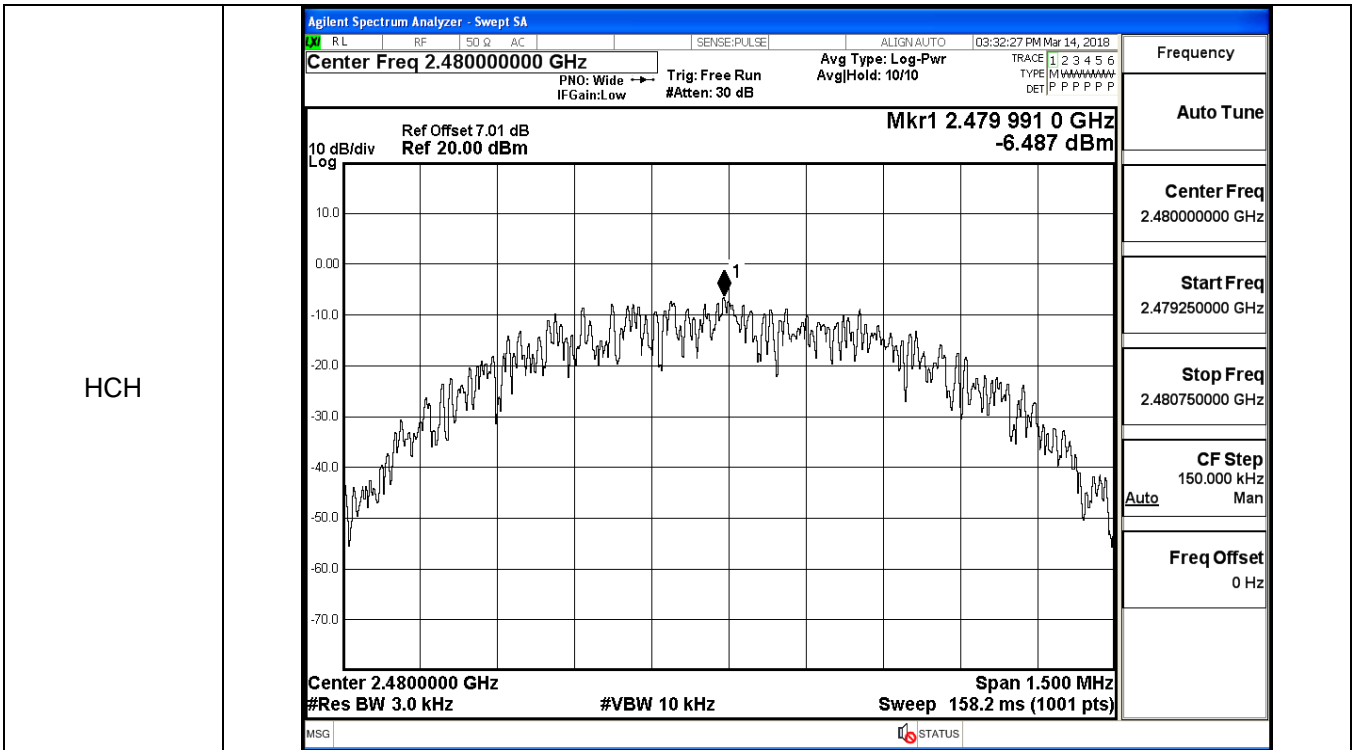


B.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6918	≥0.5	PASS
BT LE	MCH	0.6904	≥0.5	PASS
BT LE	HCH	0.6838	≥0.5	PASS

Test Graphs													
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 01:53:40 PM Mar 14, 2018</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="font-size: x-small;">10 dB/div Log</p> </div> <div style="width: 50%;"> <p style="text-align: right;">Mkr1 2.402003 GHz 8.6539 dBm</p> </div> </div> <p style="font-size: x-small; margin-top: 5px;">Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">15.3 dBm</td> </tr> <tr> <td style="text-align: center;">1.0467 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 10px;"> <div>Frequency</div> <div>Center Freq 2.402000000 GHz</div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 10px;"> <div>CF Step 300.000 kHz Auto Man</div> <div>Freq Offset 0 Hz</div> </div>	Occupied Bandwidth	Total Power	15.3 dBm	1.0467 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	15.3 dBm											
1.0467 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 03:30:01 PM Mar 14, 2018</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="font-size: x-small;">10 dB/div Log</p> </div> <div style="width: 50%;"> <p style="text-align: right;">Mkr1 2.440003 GHz 9.1691 dBm</p> </div> </div> <p style="font-size: x-small; margin-top: 5px;">Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">15.8 dBm</td> </tr> <tr> <td style="text-align: center;">1.0449 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 10px;"> <div>Frequency</div> <div>Center Freq 2.440000000 GHz</div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 10px;"> <div>CF Step 300.000 kHz Auto Man</div> <div>Freq Offset 0 Hz</div> </div>	Occupied Bandwidth	Total Power	15.8 dBm	1.0449 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	15.8 dBm											
1.0449 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											


HCH

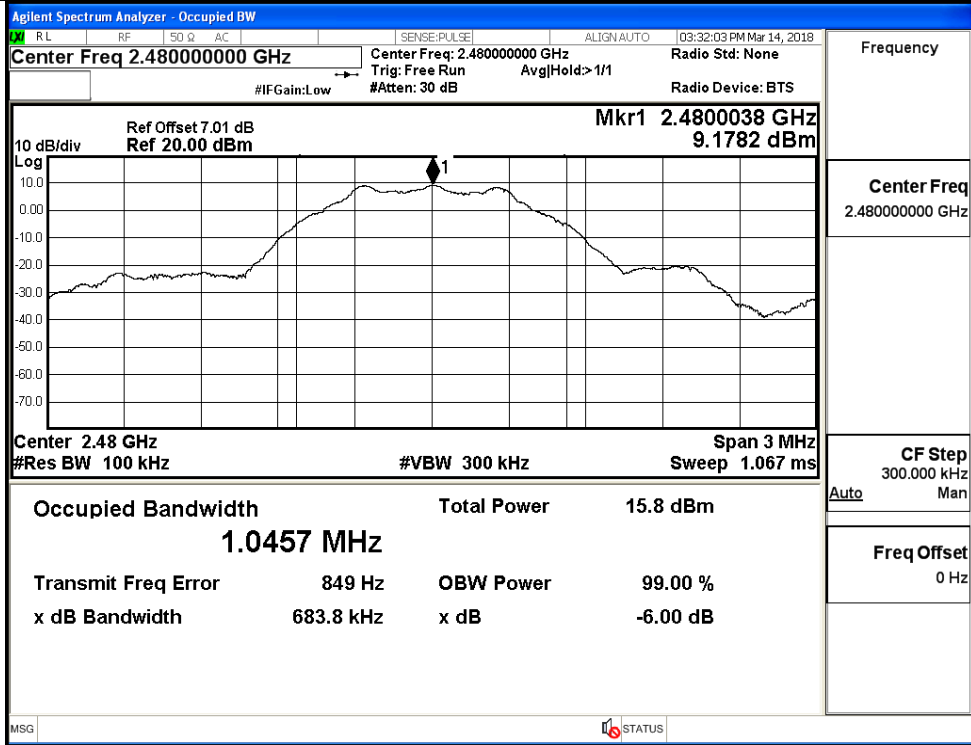

B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	8.653	-43.469	-11.347	PASS
BT LE	MCH	9.146	-45.451	-10.854	PASS
BT LE	HCH	9.163	-42.074	-10.837	PASS

BT LE_LCH_Graphs

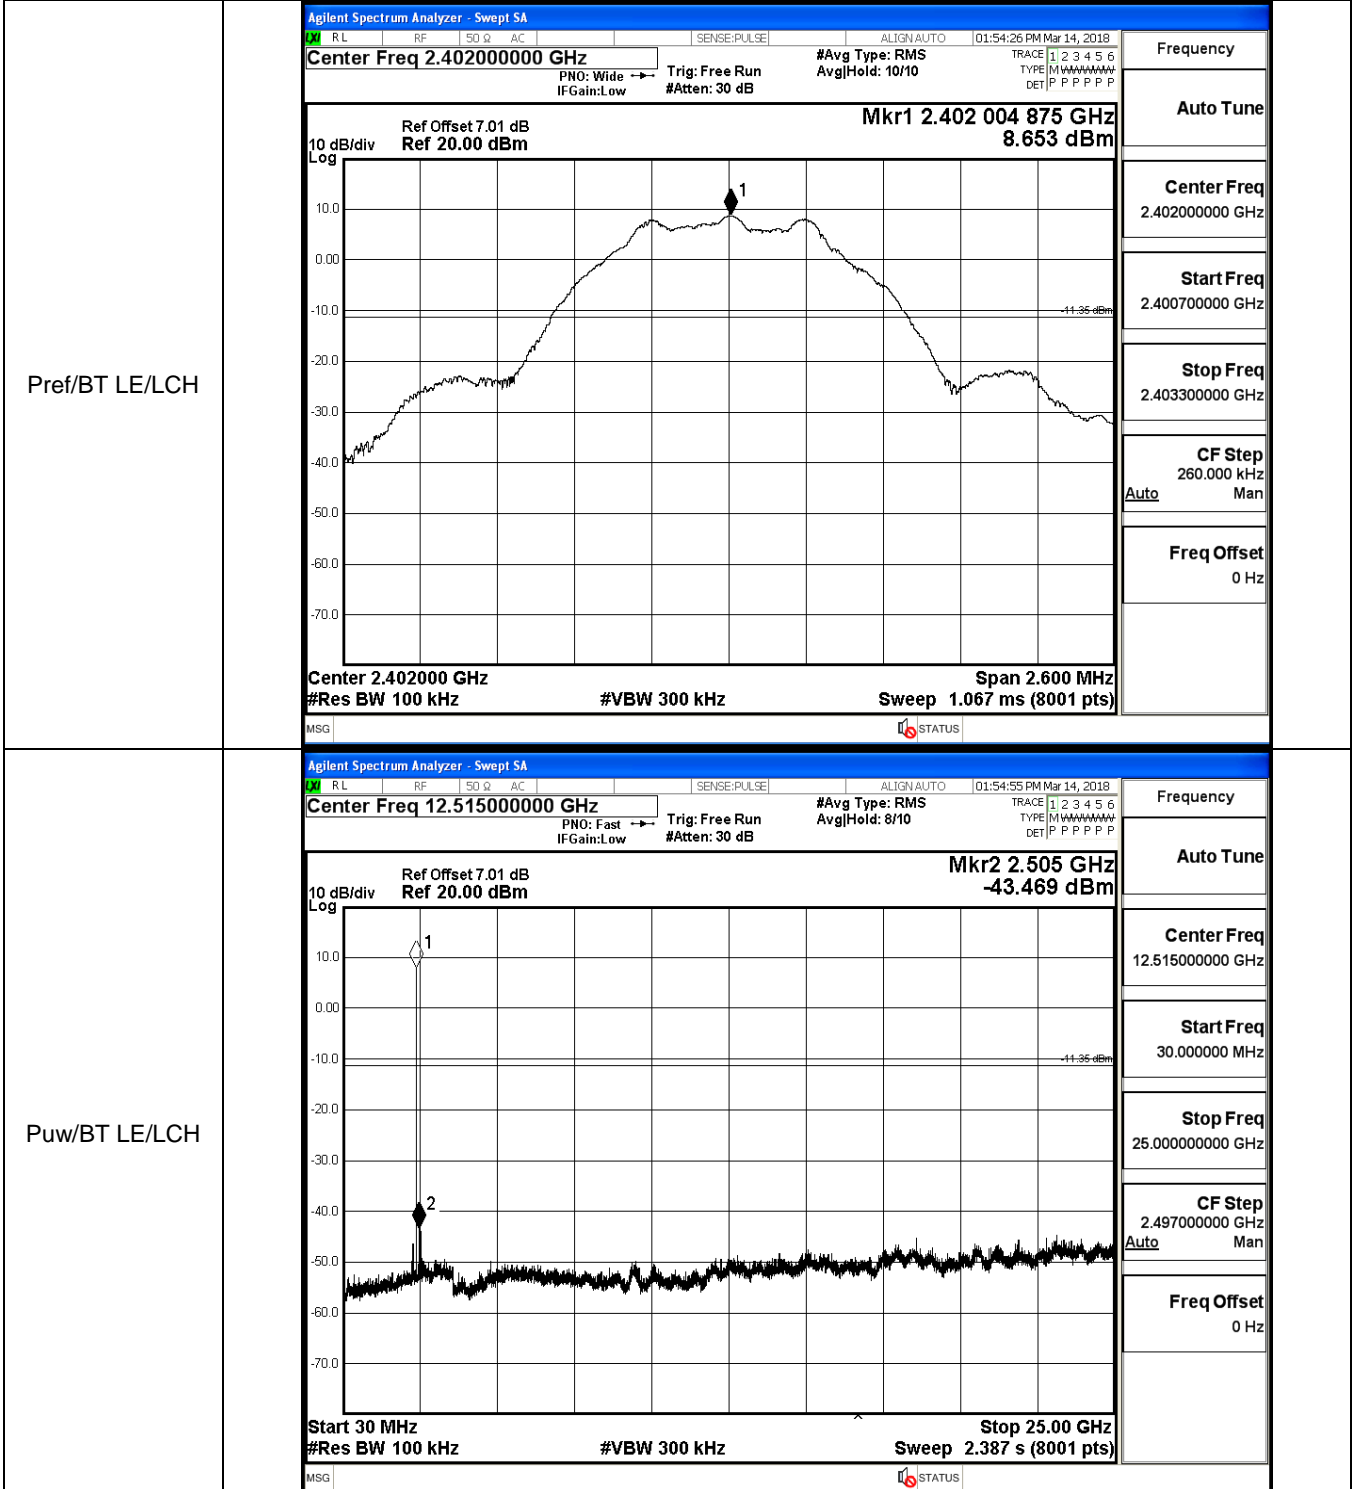


BT LE_MCH_Graphs

Pref/BT LE/MCH

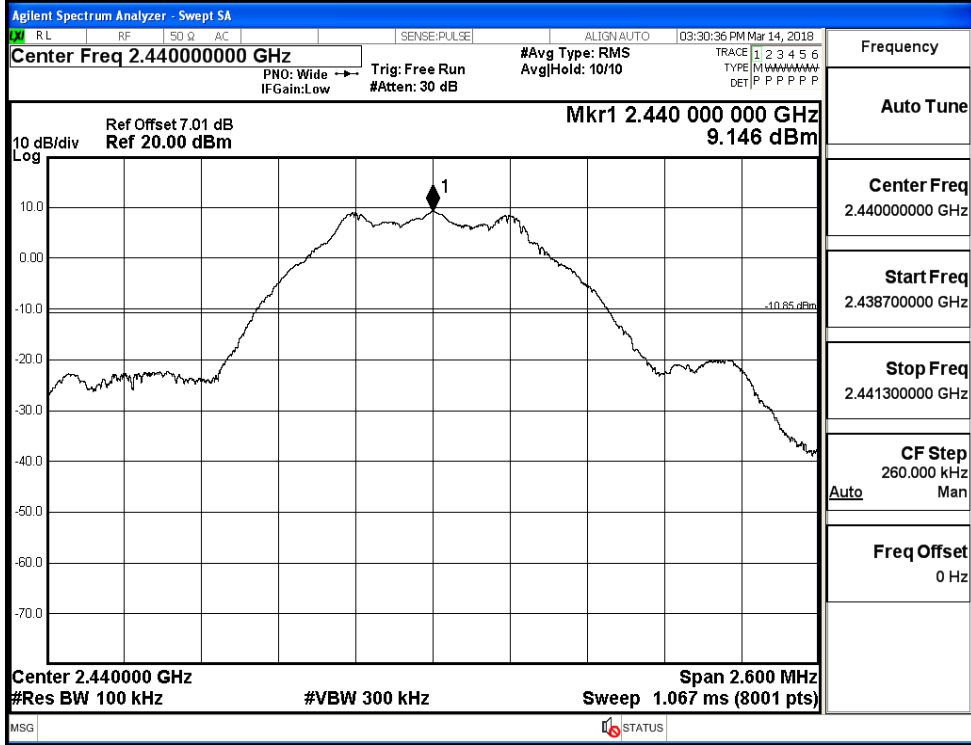


Puw/BT LE/MCH

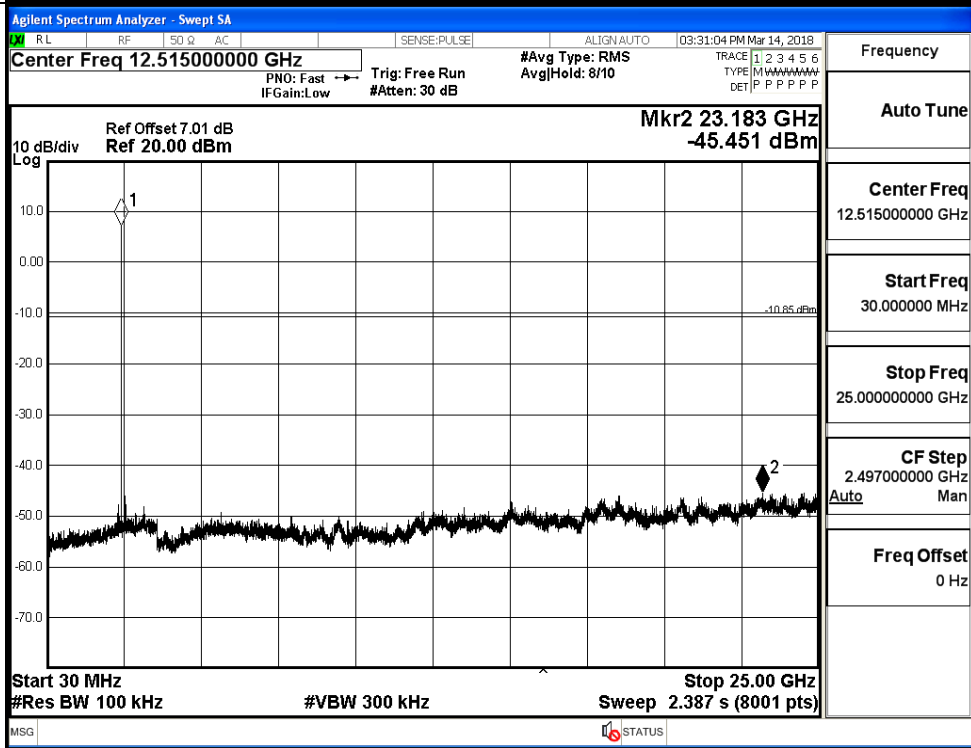


BT LE_HCH_Graphs

Pref/BT LE/HCH

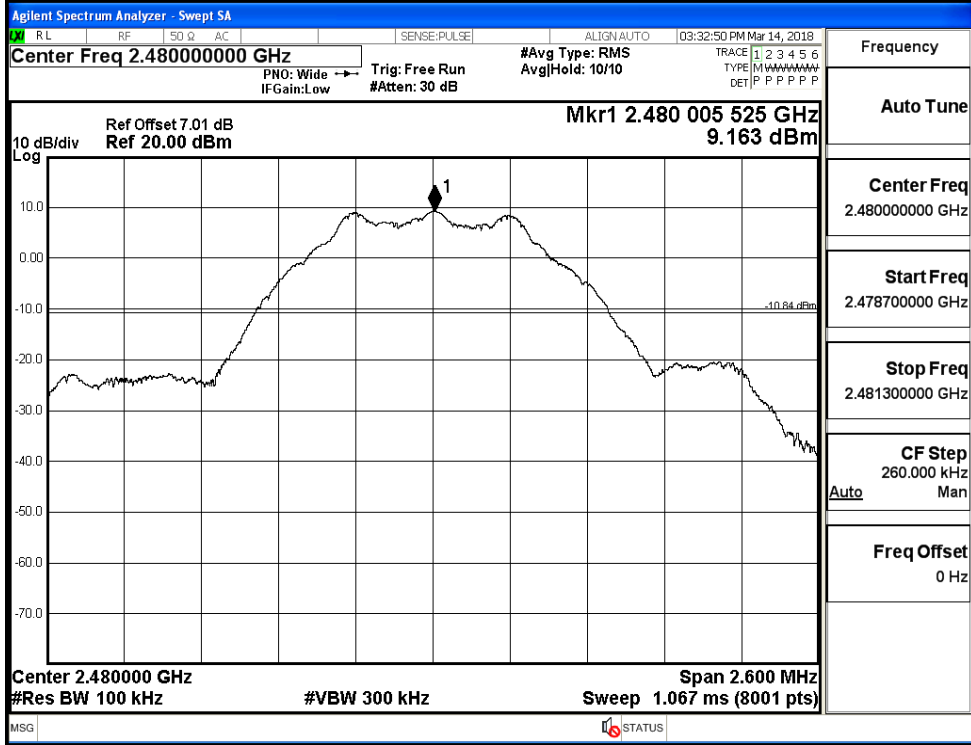



Puw/BT LE/HCH

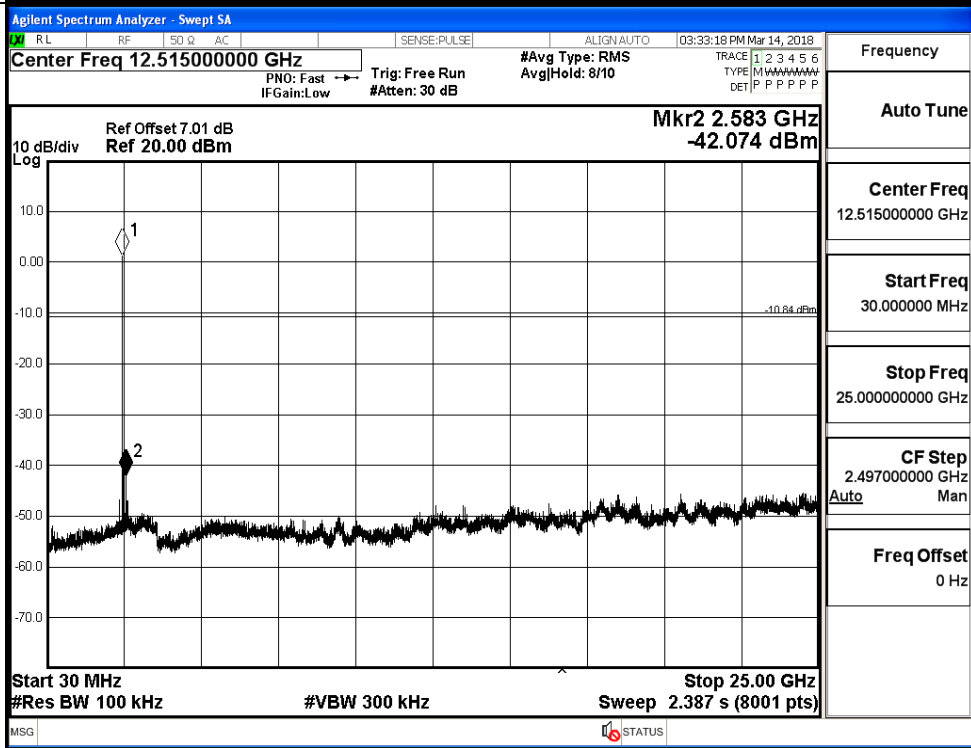

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	8.785	-51.250	-11.22	PASS
BT LE	HCH	9.308	-44.943	-10.69	PASS


Test Graphs

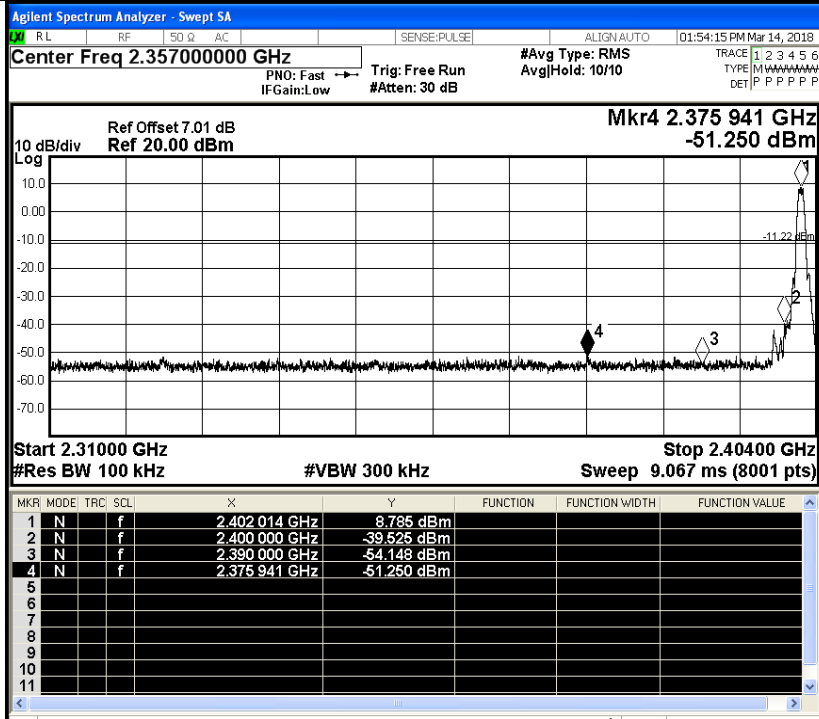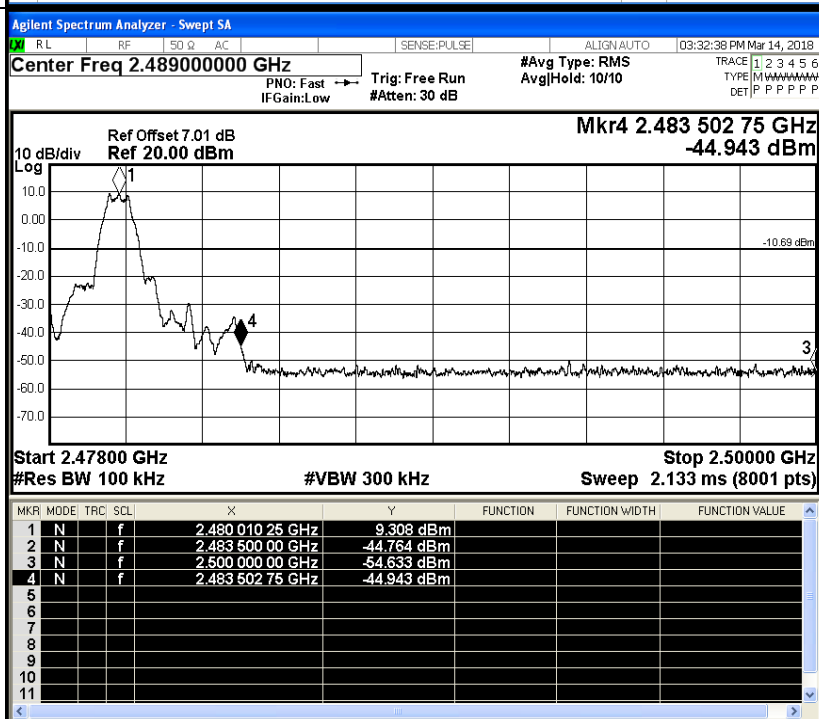LCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
HCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-44.85	2.0	0	52.40	PEAK	74	PASS
		Ant1	2310.0	-55.00	2.0	0	42.26	AV	54	PASS
		Ant1	2390.0	-45.00	2.0	0	52.25	PEAK	74	PASS
		Ant1	2390.0	-54.73	2.0	0	42.53	AV	54	PASS
	2480	Ant1	2483.5	-32.33	2.0	0	64.93	PEAK	74	PASS
		Ant1	2483.5	-50.75	2.0	0	46.51	AV	54	PASS
		Ant1	2500.0	-44.49	2.0	0	52.77	PEAK	74	PASS
		Ant1	2500.0	-54.51	2.0	0	42.75	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

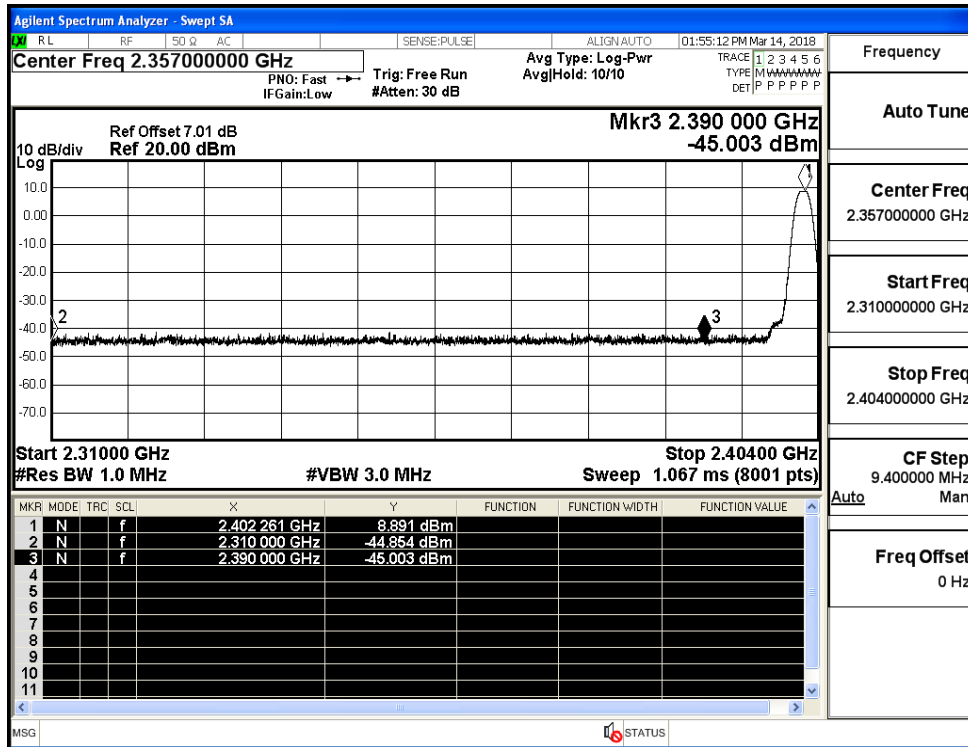

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

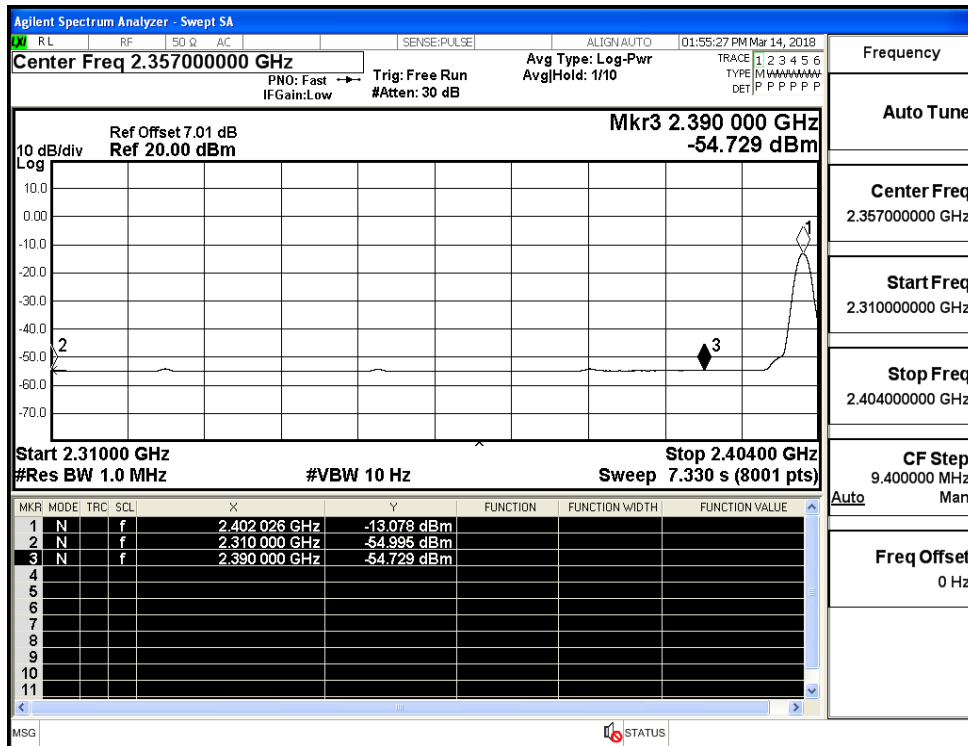

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

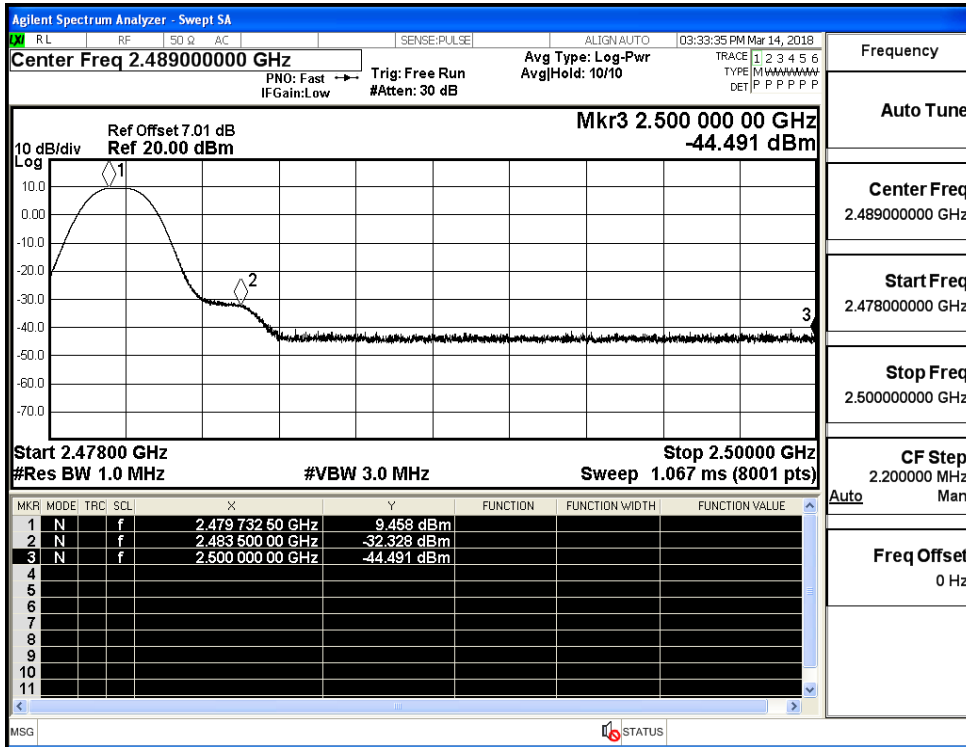

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

