

# FCC REPORT

**Applicant:** Wocao Technology (Shenzhen) Co., Ltd.  
**Address of Applicant:** Room 510, Building A, Huafeng Bao'an Zhigu Technology Innovation Park, Yintian Road, Xixiang Street, Bao'an District, Shenzhen, Guangdong, P.R.China, 518102

## Equipment Under Test (EUT)

**Product Name:** SwitchBot Smart Humidifier  
**Model No.:** W0801800, W0801801, W0801802, W0801803, W0801804, W0801805  
**Trade mark:** SwitchBot  
**FCC ID:** 2AKXB-W0801800  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B  
**Date of sample receipt:** 16 Aug., 2019  
**Date of Test:** 17 Aug., to 23 Sep., 2019  
**Date of report issued:** 24 Sep., 2019  
**Test Result:** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	24 Sep., 2019	Original

*Tested by:* Yoyo Wu *Date:* 24 Sep., 2019  
**Test Engineer**

*Reviewed by:* Winner Zhang *Date:* 24 Sep., 2019  
**Project Engineer**

## 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 TEST SUMMARY.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T. ....	5
5.3 TEST MODE.....	5
5.4 MEASUREMENT UNCERTAINTY.....	5
5.5 DESCRIPTION OF SUPPORT UNITS .....	6
5.6 RELATED SUBMITTAL(S) / GRANT (S).....	6
5.7 DESCRIPTION OF CABLE USED .....	6
5.8 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD .....	6
5.9 LABORATORY FACILITY .....	6
5.10 LABORATORY LOCATION.....	6
5.11 TEST INSTRUMENTS LIST .....	7
<b>6 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>8</b>
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION .....	11
<b>7 TEST SETUP PHOTO .....</b>	<b>17</b>
<b>8 EUT CONSTRUCTIONAL DETAILS .....</b>	<b>18</b>

## 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	Pass
Radiated Emission	Part 15.109	Pass
<b>Remark:</b> 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: The EUT not applicable of the test item.		
Test Method:	ANSI C63.4:2014	

## 5 General Information

### 5.1 Client Information

Applicant:	Wocao Technology (Shenzhen) Co., Ltd.
Address:	Room 510, Building A, Huafeng Bao'an Zhigu Technology Innovation Park, Yintian Road, Xixiang Street, Bao'an District, Shenzhen, Guangdong, P.R.China, 518102
Manufacturer/ Factory:	Wocao Technology (Shenzhen) Co., Ltd.
Address:	Room 510, Building A, Huafeng Bao'an Zhigu Technology Innovation Park, Yintian Road, Xixiang Street, Bao'an District, Shenzhen, Guangdong, P.R.China, 518102

### 5.2 General Description of E.U.T.

Product Name:	SwitchBot Smart Humidifier
Model No.:	W0801800, W0801801, W0801802, W0801803, W0801804, W0801805
AC adapter :	Model No.: FJ-SW126G2401000U Input: AC100-240V, 50/60Hz 0.6A Output: DC 24.0V, 1.0A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	The Model No.: W0801800, W0801801, W0801802, W0801803, W0801804, W0801805 are identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

### 5.3 Test Mode

Operating mode	Detail description
Working mode	Keep the EUT in Working mode
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

### 5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

## 5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
Apple	Phone	A1586	DNPNW2NWG5MW	DoC

## 5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

## 5.7 Description of Cable Used

N/A

## 5.8 Additions to, deviations, or exclusions from the method

No

## 5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**  
Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- **ISED – CAB identifier.: CN0021**  
The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- **CNAS - Registration No.: CNAS L6048**  
Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.
- **A2LA - Registration No.: 4346.01**  
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.10 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366  
Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

## 5.11 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2021
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

## 6 Test results and Measurement Data


### 6.1 Conducted Emission

Test Requirement:	FCC Part 15 B Section 15.107		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dB $\mu$ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.</li> </ol>		
Test Instruments:	Refer to section 5.11 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		



Measurement data:

Product name:	SwitchBot Smart Humidifier	Product model:	W0801800
Test by:	Yaro	Test mode:	Working mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

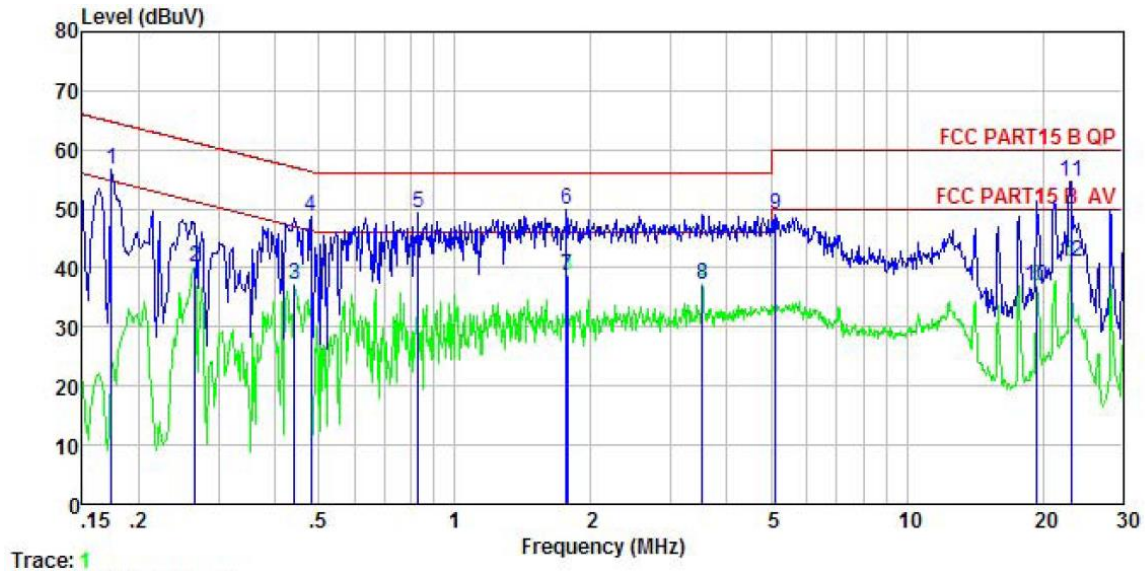


Trace: 1

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.174	46.34	-0.43	10.77	56.68	64.77	-8.09	QP
2	0.266	29.93	-0.39	10.75	40.29	51.25	-10.96	Average
3	0.442	26.97	-0.38	10.74	37.33	47.02	-9.69	Average
4	0.481	38.32	-0.39	10.75	48.68	56.32	-7.64	QP
5	0.830	38.82	-0.38	10.82	49.26	56.00	-6.74	QP
6	1.762	39.35	-0.40	10.94	49.89	56.00	-6.11	QP
7	1.772	28.24	-0.40	10.94	38.78	46.00	-7.22	Average
8	3.528	26.83	-0.45	10.90	37.28	46.00	-8.72	Average
9	5.112	38.75	-0.48	10.85	49.12	60.00	-10.88	QP
10	19.428	26.99	-0.94	10.93	36.98	50.00	-13.02	Average
11	23.018	44.64	-1.02	10.89	54.51	60.00	-5.49	QP
12	23.018	31.10	-1.02	10.89	40.97	50.00	-9.03	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

<b>Product name:</b>	SwitchBot Smart Humidifier	<b>Product model:</b>	W0801800
<b>Test by:</b>	Yaro	<b>Test mode:</b>	Working mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C      Huni: 55%

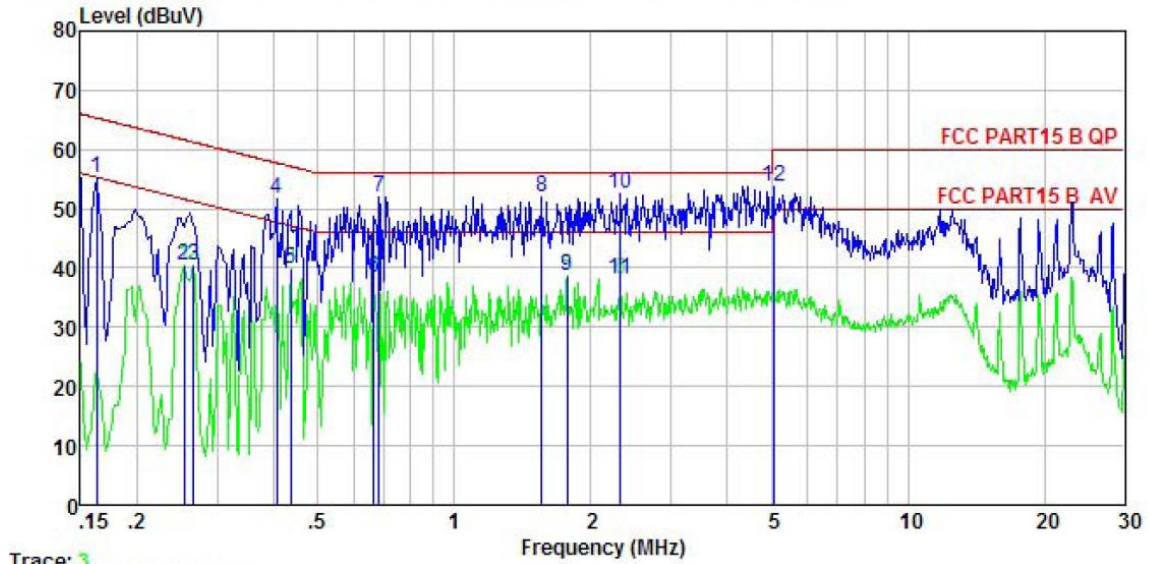

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	45.23	-0.68	10.77	55.32	65.34	-10.02	QP
2	0.253	30.45	-0.65	10.75	40.55	51.64	-11.09	Average
3	0.266	30.44	-0.65	10.75	40.54	51.25	-10.71	Average
4	0.406	41.57	-0.64	10.72	51.65	57.73	-6.08	QP
5	0.435	29.76	-0.64	10.73	39.85	47.15	-7.30	Average
6	0.665	28.30	-0.64	10.77	38.43	46.00	-7.57	Average
7	0.683	41.94	-0.64	10.77	52.07	56.00	-3.93	QP
8	1.560	41.82	-0.66	10.93	52.09	56.00	-3.91	QP
9	1.772	28.54	-0.66	10.94	38.82	46.00	-7.18	Average
10	2.321	42.24	-0.67	10.94	52.51	56.00	-3.49	QP
11	2.321	27.93	-0.67	10.94	38.20	46.00	-7.80	Average
12	5.058	43.74	-0.72	10.85	53.87	60.00	-6.13	QP

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

## 6.2 Radiated Emission


Test Requirement:	FCC Part 15 B Section 15.109				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	Above 1GHz	54.0			Average Value
74.0			Peak Value		
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> </ol>				

	<p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
Test Instruments:	Refer to section 5.11 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor , which were no recorded

**Measurement Data:**

**Below 1GHz:**

<b>Product Name:</b>	SwitchBot Smart Humidifier	<b>Product Model:</b>	W0801800
<b>Test By:</b>	Yaro	<b>Test mode:</b>	Working mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

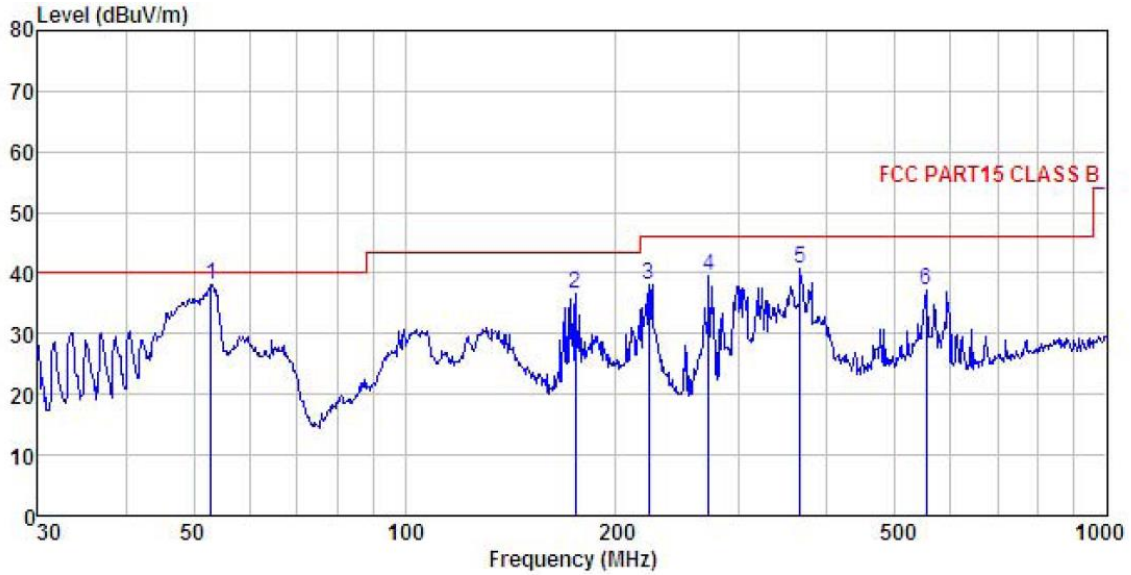


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Loss	Line	Limit	Remark				
MHz	dBuV	dB/m	dB	dB					
1	52.945	54.86	11.80	1.32	29.81	38.17	40.00	-1.83	QP
2	175.037	53.07	9.81	2.69	29.01	36.56	43.50	-6.94	QP
3	222.950	52.41	11.63	2.84	28.69	38.19	46.00	-7.81	QP
4	271.325	51.96	13.10	2.86	28.50	39.42	46.00	-6.58	QP
5	365.539	51.50	14.82	3.09	28.63	40.78	46.00	-5.22	QP
6	552.883	44.01	18.45	3.89	29.09	37.26	46.00	-8.74	QP

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	SwitchBot Smart Humidifier	<b>Product Model:</b>	W0801800
<b>Test By:</b>	Yaro	<b>Test mode:</b>	Working mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C      Huni: 57%

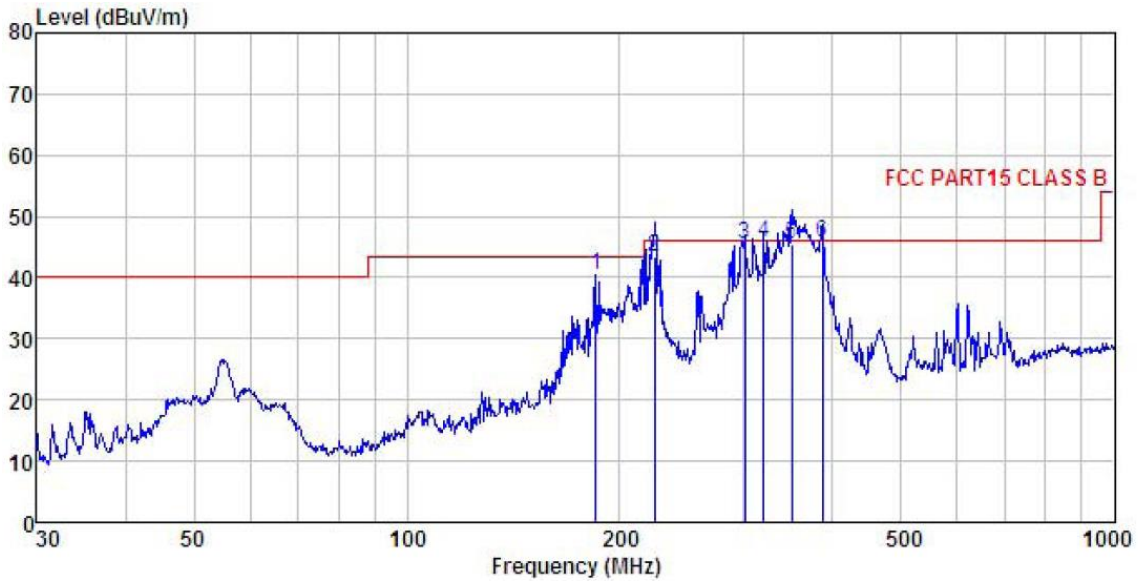


	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Loss	Factor	Line	Limit	Remark			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	185.138	56.42	10.13	2.77	28.93	40.39	43.50	-3.11	QP
2	223.733	57.51	11.63	2.84	28.69	43.29	46.00	-2.71	QP
3	300.367	57.24	13.63	2.94	28.45	45.36	46.00	-0.64	QP
4	319.937	57.11	14.03	3.00	28.50	45.64	46.00	-0.36	QP
5	350.477	56.40	14.60	3.10	28.56	45.54	46.00	-0.46	QP
6	386.634	56.21	15.12	3.09	28.72	45.70	46.00	-0.30	QP

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

**Above 1GHz:**

<b>Product Name:</b>	SwitchBot Smart Humidifier	<b>Product Model:</b>	W0801800
<b>Test By:</b>	Yaro	<b>Test mode:</b>	Working mode
<b>Test Frequency:</b>	1 GHz ~ 6 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Humi: 57%

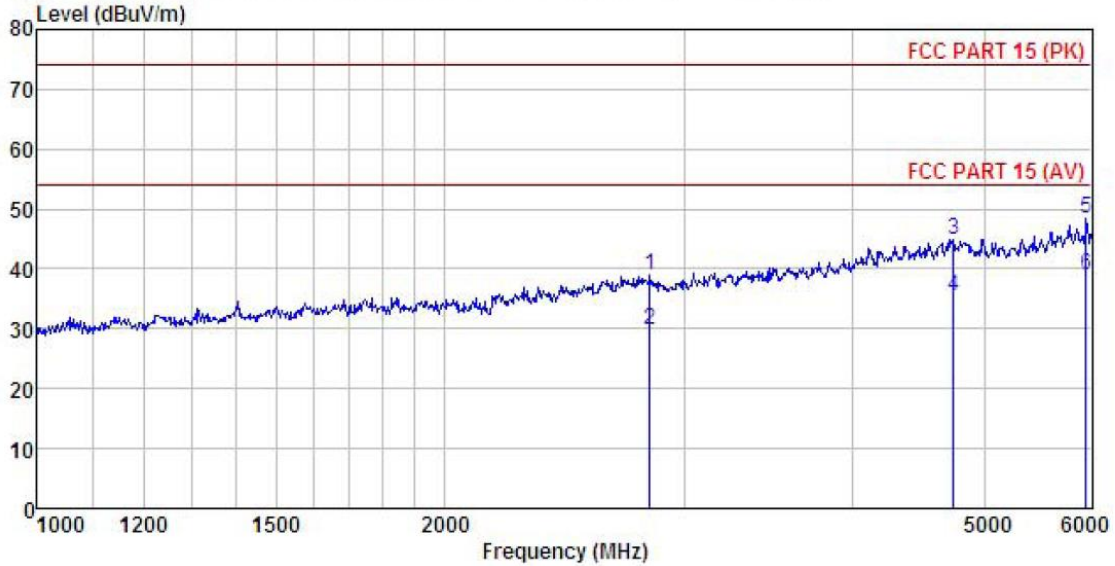


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2832.082	47.26	28.29	5.17	41.63	39.09	74.00	-34.91 Peak
2	2832.082	37.91	28.29	5.17	41.63	29.74	54.00	-24.26 Average
3	4744.751	48.58	31.50	6.83	41.90	45.01	74.00	-28.99 Peak
4	4744.751	38.94	31.50	6.83	41.90	35.37	54.00	-18.63 Average
5	5946.487	49.23	33.21	7.92	42.04	48.32	74.00	-25.68 Peak
6	5946.487	39.81	33.21	7.92	42.04	38.90	54.00	-15.10 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	SwitchBot Smart Humidifier	<b>Product Model:</b>	W0801800
<b>Test By:</b>	Yaro	<b>Test mode:</b>	Working mode
<b>Test Frequency:</b>	1 GHz ~ 6 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C    Huni: 57%

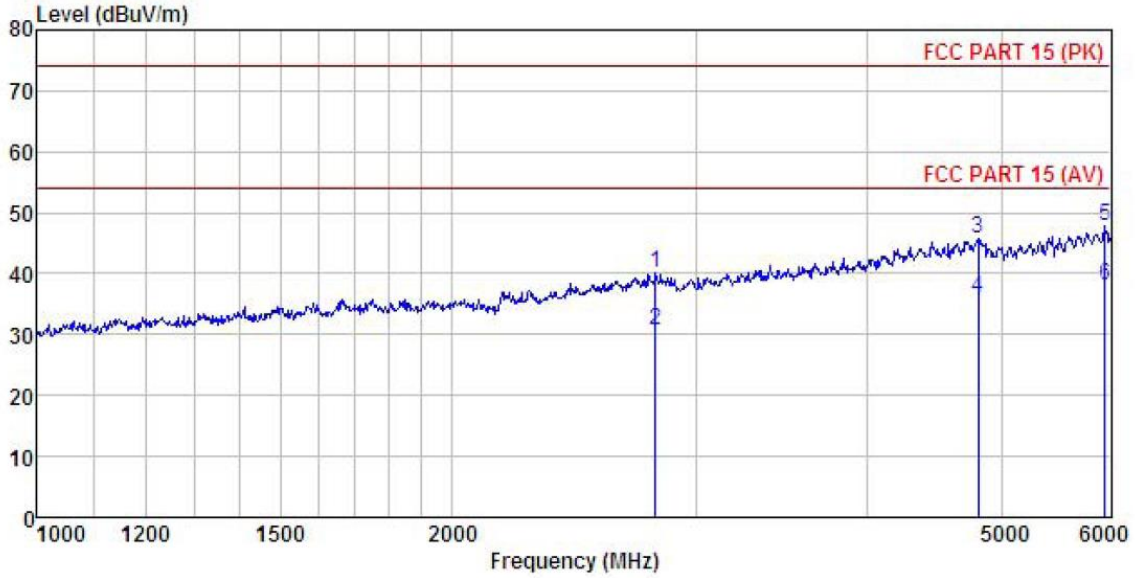

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Loss	Factor	Line	Limit	Remark			
-----	-----	-----	-----	-----	-----	-----			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	2806.823	48.52	28.24	5.14	41.65	40.25	74.00	-33.75	Peak
2	2806.823	38.93	28.24	5.14	41.65	30.66	54.00	-23.34	Average
3	4813.252	49.21	31.61	6.81	41.82	45.81	74.00	-28.19	Peak
4	4813.252	39.48	31.61	6.81	41.82	36.08	54.00	-17.92	Average
5	5946.487	48.59	33.21	7.92	42.04	47.68	74.00	-26.32	Peak
6	5946.487	38.93	33.21	7.92	42.04	38.02	54.00	-15.98	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamp Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.