



# CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 <http://www.sz-ctc.org.cn>

## TEST REPORT

**Report No.** ..... : **CTC20231714E07**

**FCC ID**..... : **2AKXB-W3902310**

**Applicant** ..... : **Woan Technology (Shenzhen) Co., Ltd.**

Address..... : Room 1101, Qiancheng Commercial Center, No. 5 Haicheng Road, Mabu Community, Xixiang Sub-district, Bao'an District, Shenzhen, Guangdong, P.R.China, 518100

Manufacturer..... : Woan Technology (Shenzhen) Co., Ltd.

Address..... : Room 1101, Qiancheng Commercial Center, No. 5 Haicheng Road, Mabu Community, Xixiang Sub-district, Bao'an District, Shenzhen, Guangdong, P.R.China, 518100

**Product Name** ..... : **SwitchBot Evaporative Humidifier (Auto-refill)**

Trade Mark ..... : SwitchBot

Model/Type reference..... : W3902310

Listed Model(s) ..... : W3902311, W3902312, W3902313, W3902314, W3902310-RT

**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Aug. 14, 2023

Date of testing..... : Aug. 14, 2023 to Oct. 25, 2023

Date of issue..... : Oct. 26, 2023

**Result**..... : **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang

Supervised by:

(Printed name+signature)

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

- 1. TEST SUMMARY ..... 3
  - 1.1. TEST STANDARDS..... 3
  - 1.2. REPORT VERSION ..... 3
  - 1.3. TEST DESCRIPTION..... 3
  - 1.4. TEST FACILITY ..... 4
  - 1.5. MEASUREMENT UNCERTAINTY ..... 5
  - 1.6. ENVIRONMENTAL CONDITIONS..... 5
- 2. GENERAL INFORMATION ..... 6
  - 2.1. CLIENT INFORMATION ..... 6
  - 2.2. GENERAL DESCRIPTION OF EUT ..... 6
  - 2.3. ACCESSORY EQUIPMENT INFORMATION ..... 7
  - 2.4. OPERATION STATE ..... 8
  - 2.5. MEASUREMENT INSTRUMENTS LIST ..... 9
- 3. TEST ITEM AND RESULTS ..... 11
  - 3.1. CONDUCTED EMISSION..... 11
  - 3.2. RADIATED EMISSION ..... 14
  - 3.3. BAND EDGE EMISSIONS (RADIATED) ..... 31
  - 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... 48
  - 3.5. DTS BANDWIDTH..... 56
  - 3.6. PEAK OUTPUT POWER ..... 62
  - 3.7. POWER SPECTRAL DENSITY ..... 66
  - 3.8. DUTY CYCLE ..... 70
  - 3.9. ANTENNA REQUIREMENT ..... 76



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 2](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

Revised No.	Date of issue	Description
01	Oct. 26, 2023	Original

## 1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
6dB Bandwidth	15.247(a)(2)	RSS-247 5.2 (a)	Pass	Jim Jiang
Conducted Max Output Power	15.247(b)(3)	RSS-247 5.4 (d)	Pass	Jim Jiang
Power Spectral Density	15.247(e)	RSS-247 5.2 (b)	Pass	Jim Jiang
Transmitter Radiated Spurious	15.209&15.247(d)	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Woan Technology (Shenzhen) Co., Ltd.
Address:	Room 1101, Qiancheng Commercial Center, No. 5 Haicheng Road, Mabu Community, Xixiang Sub-district, Bao'an District, Shenzhen, Guangdong, P.R.China, 518100
Manufacturer:	Woan Technology (Shenzhen) Co., Ltd.
Address:	Room 1101, Qiancheng Commercial Center, No. 5 Haicheng Road, Mabu Community, Xixiang Sub-district, Bao'an District, Shenzhen, Guangdong, P.R.China, 518100

### 2.2. General Description of EUT

Product Name:	SwitchBot Evaporative Humidifier (Auto-refill)
Trade Mark:	SwitchBot
Model/Type reference:	W3902310
Listed Model(s):	W3902311, W3902312, W3902313, W3902314, W3902310-RT
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is model name.
Power Supply:	Input: 100-240V~, 50/60Hz, 1.0A
Hardware Version:	V1.0
Software Version:	V1.0
Sample ID:	CTC230721-049-S002



2.4G WiFi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel Number:	802.11b/g/n(HT20): 11 channels 802.11n(HT40): 7 channels
Channel Separation:	5MHz
Antenna Type:	PCB Antenna
Directional Gain:	4.28dBi

### 2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
EspRFTestTool	v2.8	/	/



## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40).

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.





## 2.5. Measurement Instruments List

Tonscend RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
2	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
4	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 16, 2023
5	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 22, 2024
6	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 16, 2023
7	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 16, 2023
8	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 16, 2023
9	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 16, 2023
10	Wideband Radio Communication Tester	R&S	CMW500	102257	May 25, 2024
11	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 16, 2023
12	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 24, 2024
13	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 14, 2024
14	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 14, 2024
15	Test Software	Tonscend	JS1120-3	V2.6.88.0346	/

Radiated Emission (3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
5	Pre-Amplifier	SONOMA	310	186194	Dec. 16, 2023
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 16, 2023
7	Test Receiver	R&S	ESC17	100967	Dec. 16, 2023
8	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2024
9	Test Software	FARA	EZ-EMC	FA-03A2	/

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China  
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 16, 2023
2	LISN	R&S	ENV216	101113	Dec. 16, 2023
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 16, 2023
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 16, 2023
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 16, 2023
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

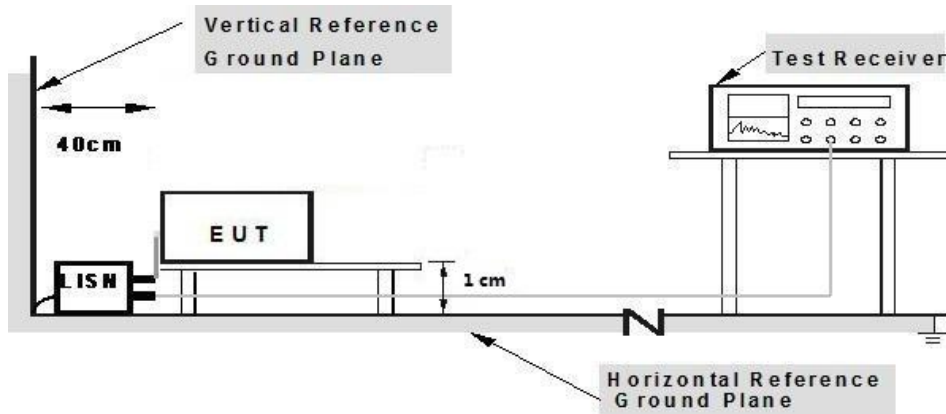

**Note: 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


**Test Mode**

Please refer to the clause 2.4.



**Test Result**

<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Remark:</b>	Only worse case is reported

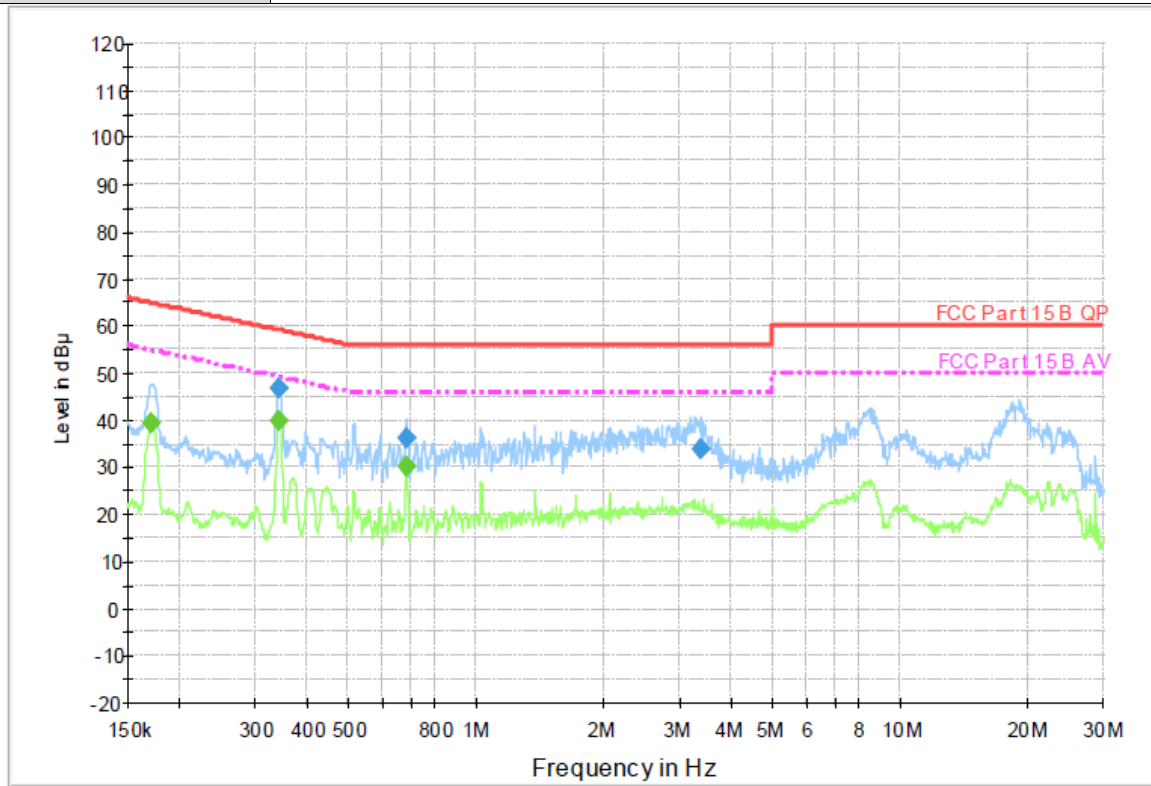

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.341380	46.7	1000.00	9.000	On	L1	9.5	12.5	59.2	
0.681030	36.1	1000.00	9.000	On	L1	9.5	19.9	56.0	
3.375880	33.7	1000.00	9.000	On	L1	9.5	22.3	56.0	

**Final Measurement Detector 2**


Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.170440	39.3	1000.00	9.000	On	L1	9.4	15.6	54.9	
0.341380	40.0	1000.00	9.000	On	L1	9.5	9.2	49.2	
0.683760	30.4	1000.00	9.000	On	L1	9.5	15.6	46.0	

Emission Level = Read Level + Correct Factor





<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Remark:</b>	Only worse case is reported

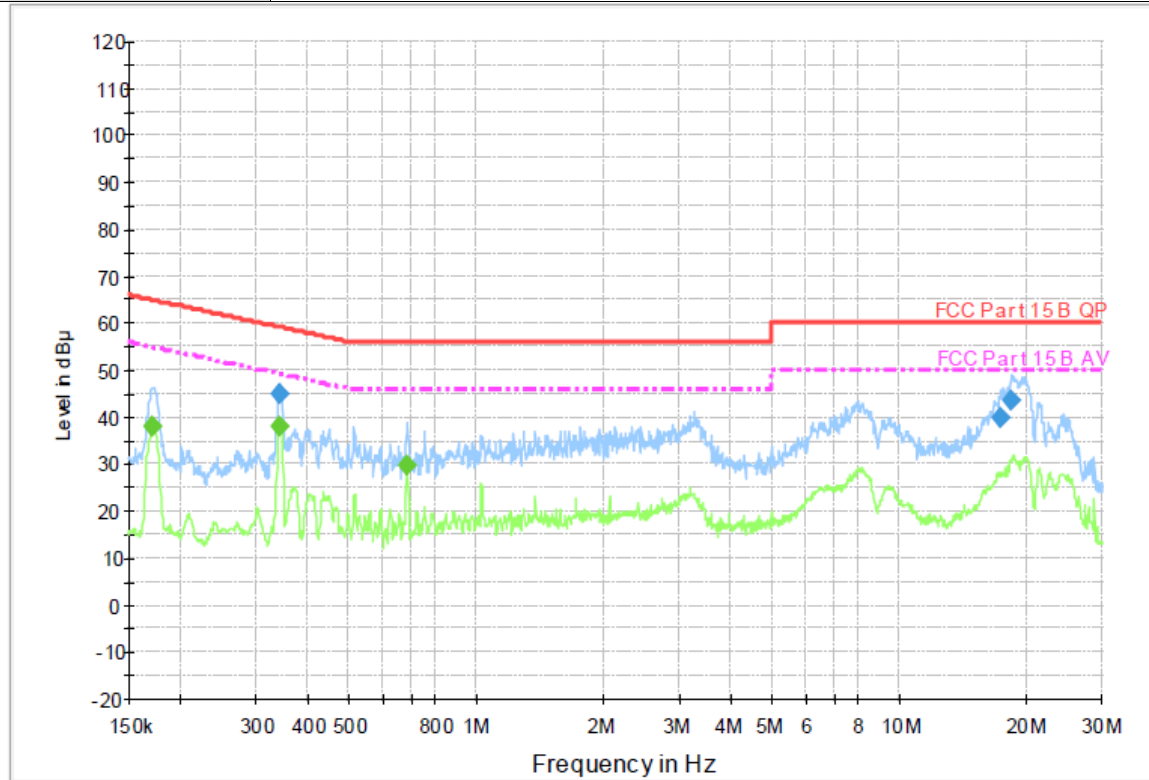

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.341380	45.1	1000.00	9.000	On	N	9.4	14.1	59.2	
17.277310	39.7	1000.00	9.000	On	N	9.5	20.3	60.0	
18.416860	43.4	1000.00	9.000	On	N	9.5	16.6	60.0	

### Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.171120	38.0	1000.00	9.000	On	N	9.3	16.9	54.9	
0.342740	38.2	1000.00	9.000	On	N	9.4	10.9	49.1	
0.683760	29.5	1000.00	9.000	On	N	9.4	16.5	46.0	

Emission Level = Read Level + Correct Factor

### 3.2. Radiated Emission

**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBµV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBµV/m)=20log Emission Level (µV/m).

**Test Configuration**

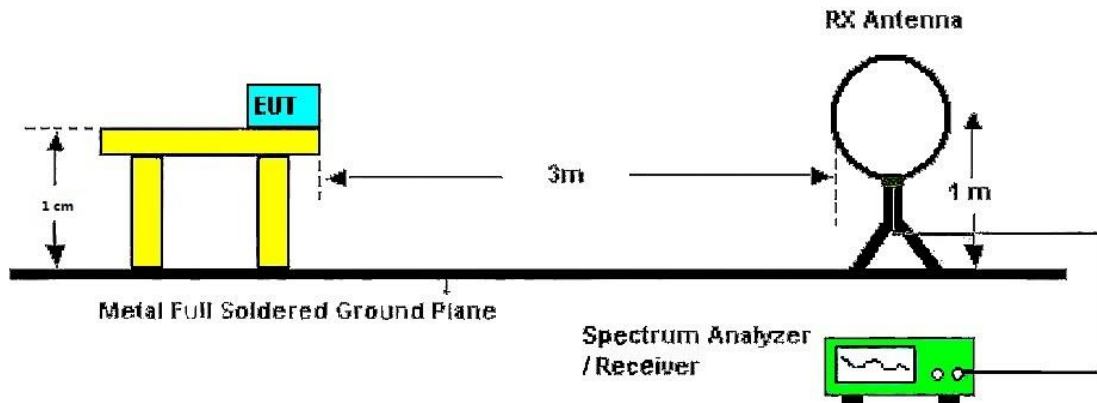


Below 30MHz Test Setup



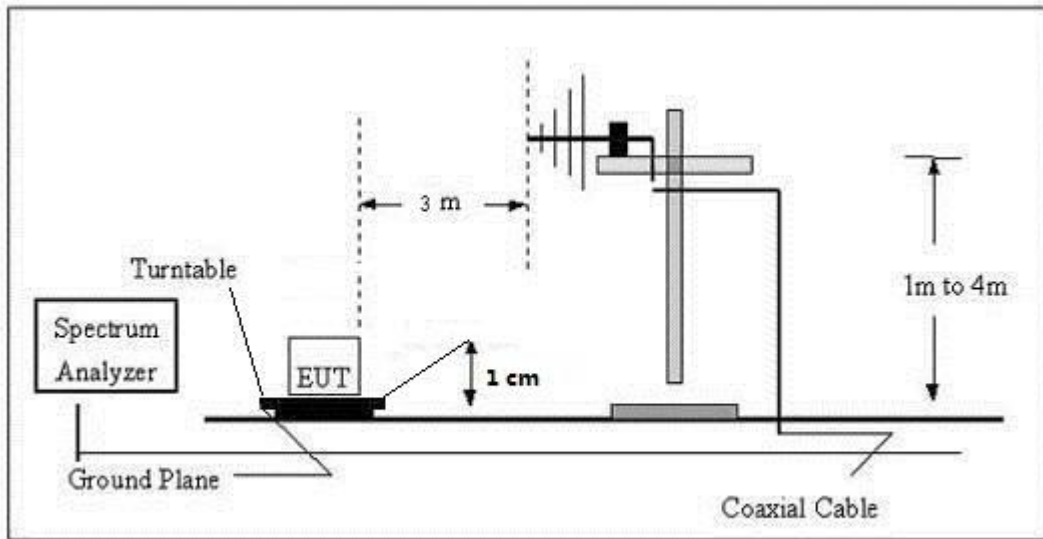

30-1000MHz Test Setup

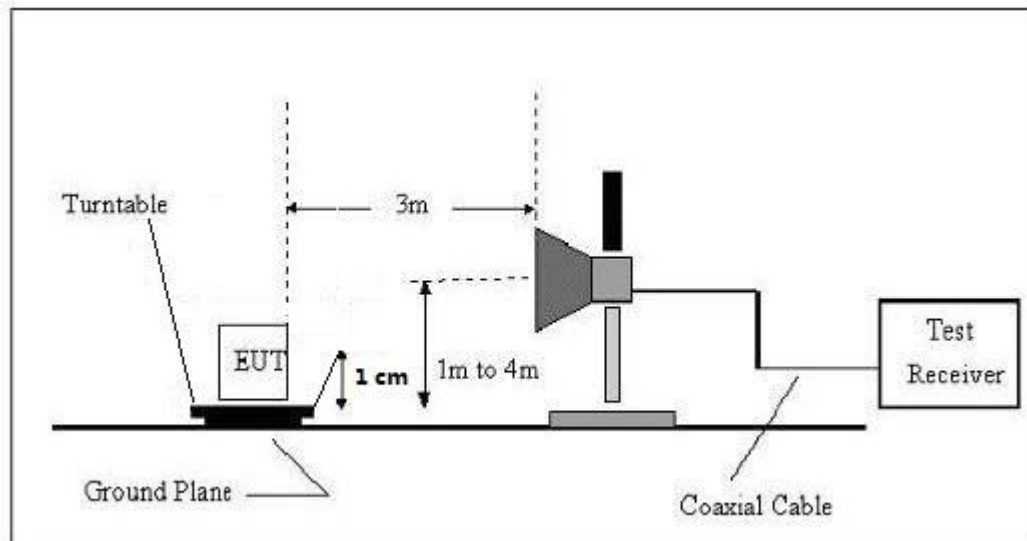

Above 1GHz Test Setup

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) 9k – 150kHz:  
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
  - (3) 0.15M – 30MHz:  
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold



(4) 30M - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**

#### **9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.

Note:


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Pre-scan all antenna, only show the test data for worse case antenna on the test report.





30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

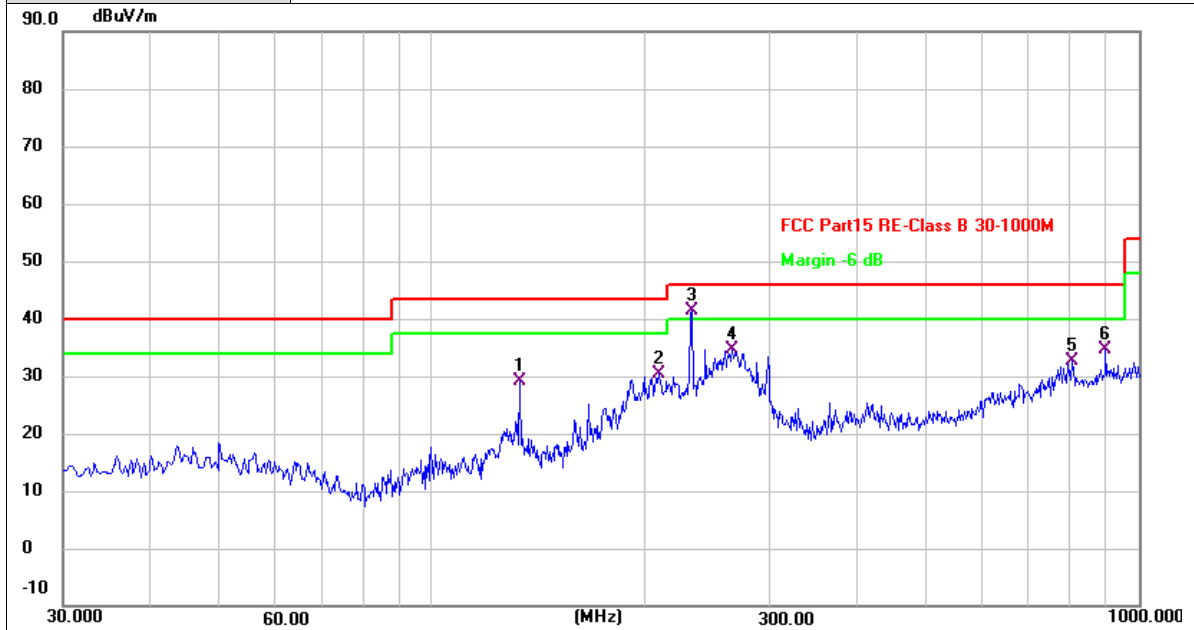


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.1433	48.60	-19.38	29.22	43.50	-14.28	QP
2	209.7733	45.97	-15.69	30.28	43.50	-13.22	QP
3 *	233.3766	56.49	-14.99	41.50	46.00	-4.50	QP
4	266.3566	48.68	-14.17	34.51	46.00	-11.49	QP
5	804.7066	36.76	-4.24	32.52	46.00	-13.48	QP
6	897.5033	37.51	-3.00	34.51	46.00	-11.49	QP

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11b Mode 2412MHz
<b>Remark:</b>	Only worse case is reported.

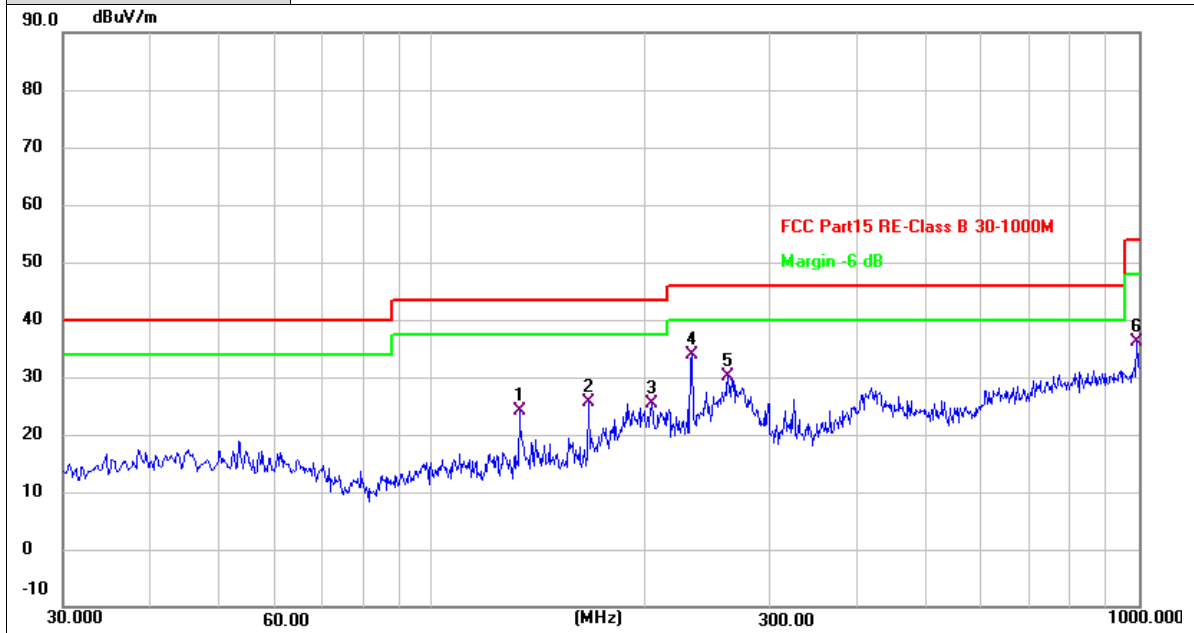

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	132.8200	43.54	-19.37	24.17	43.50	-19.33	QP
2	166.4466	44.27	-18.66	25.61	43.50	-17.89	QP
3	204.9233	41.24	-15.82	25.42	43.50	-18.08	QP
4 *	233.3766	48.86	-14.99	33.87	46.00	-12.13	QP
5	262.8000	44.33	-14.24	30.09	46.00	-15.91	QP
6	993.8566	38.22	-2.05	36.17	54.00	-17.83	QP

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



## Above 1GHz

<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11b Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4823.787</td> <td>49.04</td> <td>2.11</td> <td>51.15</td> <td>54.00</td> <td>-2.85</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4823.813</td> <td>53.62</td> <td>2.11</td> <td>55.73</td> <td>74.00</td> <td>-18.27</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	4823.787	49.04	2.11	51.15	54.00	-2.85	AVG	2	4823.813	53.62	2.11	55.73	74.00	-18.27	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	4823.787	49.04	2.11	51.15	54.00	-2.85	AVG																								
2	4823.813	53.62	2.11	55.73	74.00	-18.27	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11b Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4823.690</td> <td>48.56</td> <td>2.11</td> <td>50.67</td> <td>74.00</td> <td>-23.33</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4823.830</td> <td>41.94</td> <td>2.11</td> <td>44.05</td> <td>54.00</td> <td>-9.95</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	4823.690	48.56	2.11	50.67	74.00	-23.33	peak	2 *	4823.830	41.94	2.11	44.05	54.00	-9.95	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	4823.690	48.56	2.11	50.67	74.00	-23.33	peak																								
2 *	4823.830	41.94	2.11	44.05	54.00	-9.95	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11b Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.777	53.17	2.18	55.35	74.00	-18.65	peak
2 *	4873.783	48.58	2.18	50.76	54.00	-3.24	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11b Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.733	45.65	2.18	47.83	74.00	-26.17	peak
2 *	4873.822	37.85	2.18	40.03	54.00	-13.97	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11b Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.653	53.42	2.26	55.68	74.00	-18.32	peak
2 *	4923.780	48.57	2.26	50.83	54.00	-3.17	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11b Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.767	44.75	2.26	47.01	74.00	-26.99	peak
2 *	4923.828	36.17	2.26	38.43	54.00	-15.57	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11g Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.828</td> <td>43.65</td> <td>2.11</td> <td>45.76</td> <td>74.00</td> <td>-28.24</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4824.918</td> <td>30.28</td> <td>2.11</td> <td>32.39</td> <td>54.00</td> <td>-21.61</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4824.828	43.65	2.11	45.76	74.00	-28.24	peak	2 *	4824.918	30.28	2.11	32.39	54.00	-21.61	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4824.828	43.65	2.11	45.76	74.00	-28.24	peak																								
2 *	4824.918	30.28	2.11	32.39	54.00	-21.61	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11g Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4824.273</td> <td>27.55</td> <td>2.11</td> <td>29.66</td> <td>54.00</td> <td>-24.34</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4824.363</td> <td>42.12</td> <td>2.11</td> <td>44.23</td> <td>74.00</td> <td>-29.77</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4824.273	27.55	2.11	29.66	54.00	-24.34	AVG	2	4824.363	42.12	2.11	44.23	74.00	-29.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4824.273	27.55	2.11	29.66	54.00	-24.34	AVG																								
2	4824.363	42.12	2.11	44.23	74.00	-29.77	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11g Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4874.400	29.84	2.18	32.02	54.00	-21.98	AVG
2	4874.610	43.21	2.18	45.39	74.00	-28.61	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11g Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.968	40.63	2.18	42.81	74.00	-31.19	peak
2 *	4876.198	26.61	2.17	28.78	54.00	-25.22	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11g Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.518	42.89	2.26	45.15	74.00	-28.85	peak
2 *	4925.080	29.69	2.25	31.94	54.00	-22.06	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11g Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.863	40.99	2.26	43.25	74.00	-30.75	peak
2 *	4924.930	26.82	2.26	29.08	54.00	-24.92	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4824.265</td> <td>29.49</td> <td>2.11</td> <td>31.60</td> <td>54.00</td> <td>-22.40</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4824.667</td> <td>43.66</td> <td>2.11</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4824.265	29.49	2.11	31.60	54.00	-22.40	AVG	2	4824.667	43.66	2.11	45.77	74.00	-28.23	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4824.265	29.49	2.11	31.60	54.00	-22.40	AVG																								
2	4824.667	43.66	2.11	45.77	74.00	-28.23	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2412MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.538</td> <td>41.65</td> <td>2.11</td> <td>43.76</td> <td>74.00</td> <td>-30.24</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4825.107</td> <td>27.42</td> <td>2.10</td> <td>29.52</td> <td>54.00</td> <td>-24.48</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4824.538	41.65	2.11	43.76	74.00	-30.24	peak	2 *	4825.107	27.42	2.10	29.52	54.00	-24.48	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4824.538	41.65	2.11	43.76	74.00	-30.24	peak																								
2 *	4825.107	27.42	2.10	29.52	54.00	-24.48	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.827	43.13	2.18	45.31	74.00	-28.69	peak
2 *	4874.300	29.82	2.18	32.00	54.00	-22.00	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.822	40.55	2.18	42.73	74.00	-31.27	peak
2 *	4875.125	27.62	2.17	29.79	54.00	-24.21	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.748	28.62	2.26	30.88	54.00	-23.12	AVG
2	4924.467	42.16	2.26	44.42	74.00	-29.58	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 2462MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.283	40.23	2.26	42.49	74.00	-31.51	peak
2 *	4924.382	26.56	2.26	28.82	54.00	-25.18	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2422MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4843.205</td> <td>27.96</td> <td>2.12</td> <td>30.08</td> <td>54.00</td> <td>-23.92</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4843.395</td> <td>40.42</td> <td>2.13</td> <td>42.55</td> <td>74.00</td> <td>-31.45</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4843.205	27.96	2.12	30.08	54.00	-23.92	AVG	2	4843.395	40.42	2.13	42.55	74.00	-31.45	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4843.205	27.96	2.12	30.08	54.00	-23.92	AVG																								
2	4843.395	40.42	2.13	42.55	74.00	-31.45	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2422MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.977</td> <td>41.03</td> <td>2.13</td> <td>43.16</td> <td>74.00</td> <td>-30.84</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4845.120</td> <td>27.53</td> <td>2.13</td> <td>29.66</td> <td>54.00</td> <td>-24.34</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4844.977	41.03	2.13	43.16	74.00	-30.84	peak	2 *	4845.120	27.53	2.13	29.66	54.00	-24.34	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4844.977	41.03	2.13	43.16	74.00	-30.84	peak																								
2 *	4845.120	27.53	2.13	29.66	54.00	-24.34	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.816	27.30	2.18	29.48	54.00	-24.52	AVG
2	4873.861	40.54	2.18	42.72	74.00	-31.28	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2437MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.592	27.42	2.18	29.60	54.00	-24.40	AVG
2	4874.957	40.74	2.18	42.92	74.00	-31.08	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2452MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.621	27.63	2.22	29.85	54.00	-24.15	AVG
2	4904.179	40.90	2.22	43.12	74.00	-30.88	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 2452MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4904.372	27.10	2.22	29.32	54.00	-24.68	AVG
2	4904.883	41.28	2.22	43.50	74.00	-30.50	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value


### 3.3. Band Edge Emissions (Radiated)

**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB $\mu$ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

**Test Configuration**

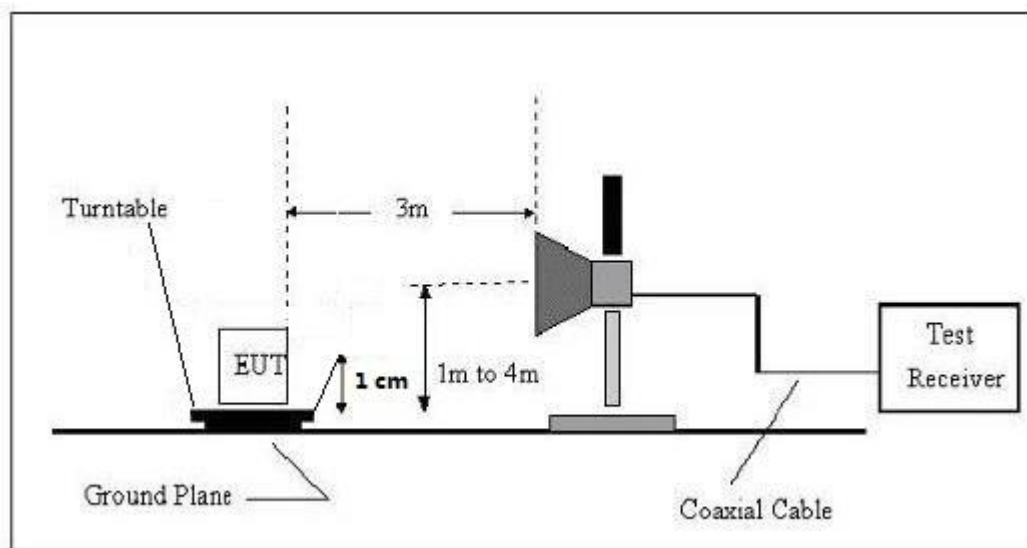

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


**Test Mode**

Please refer to the clause 2.4.



Test Result

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz

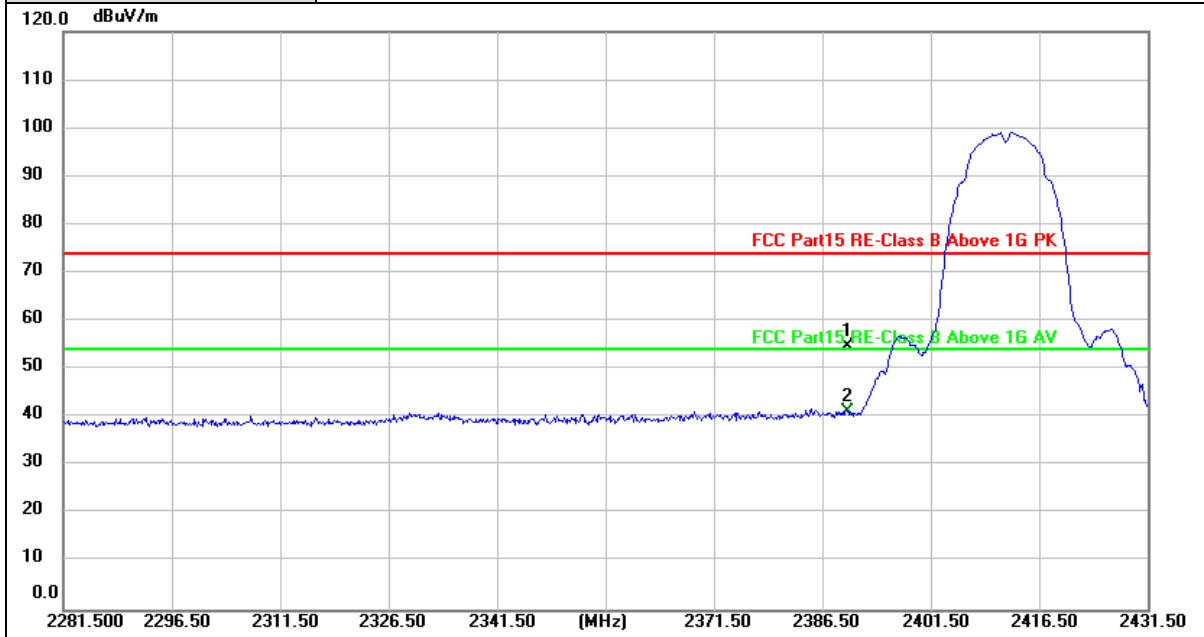

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	23.44	31.31	54.75	74.00	-19.25	peak
2 *	2390.000	9.93	31.31	41.24	54.00	-12.76	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz

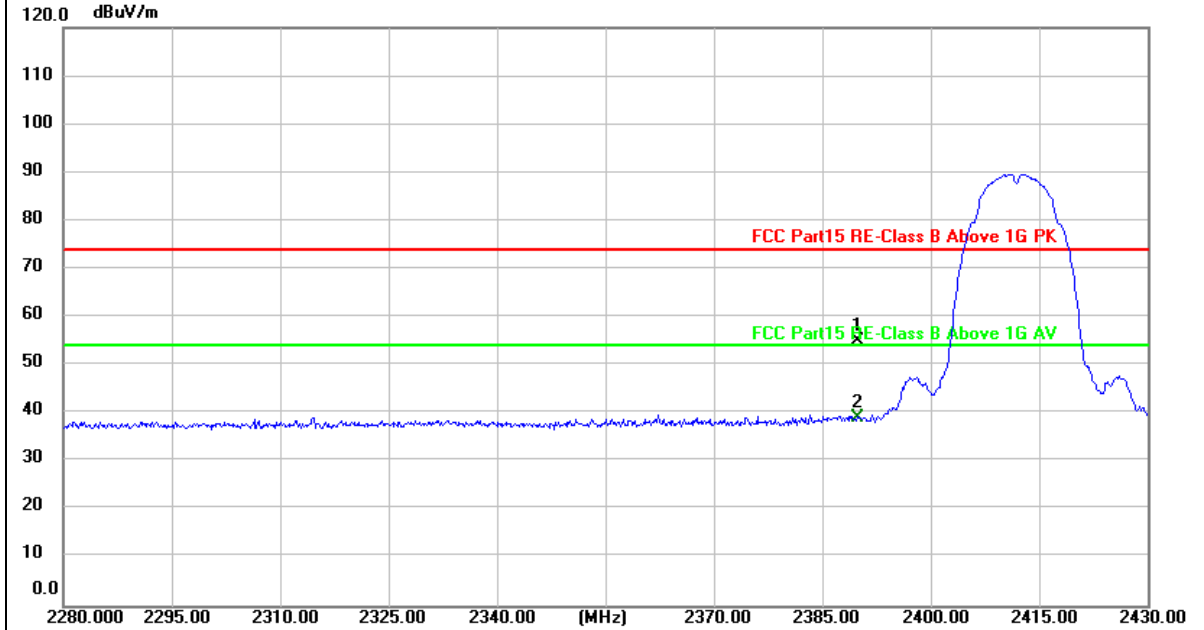

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	23.60	31.31	54.91	74.00	-19.09	peak
2 *	2390.000	7.93	31.31	39.24	54.00	-14.76	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz

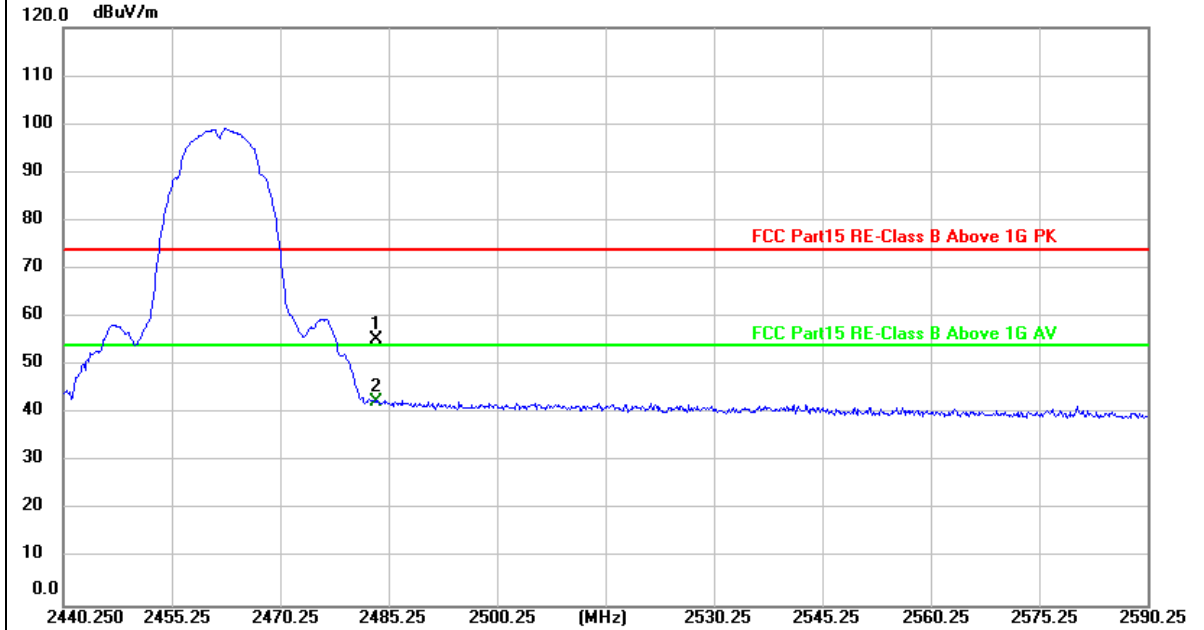

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	23.99	31.48	55.47	74.00	-18.53	peak
2 *	2483.500	11.00	31.48	42.48	54.00	-11.52	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz

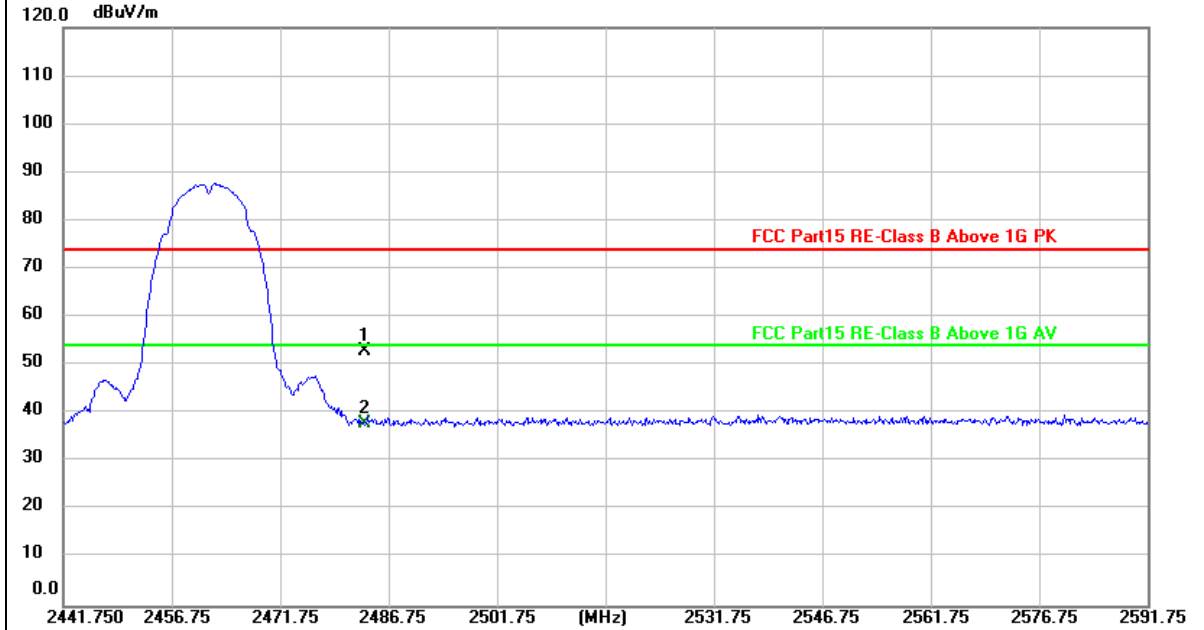


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.53	31.48	53.01	74.00	-20.99	peak
2 *	2483.500	6.53	31.48	38.01	54.00	-15.99	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz

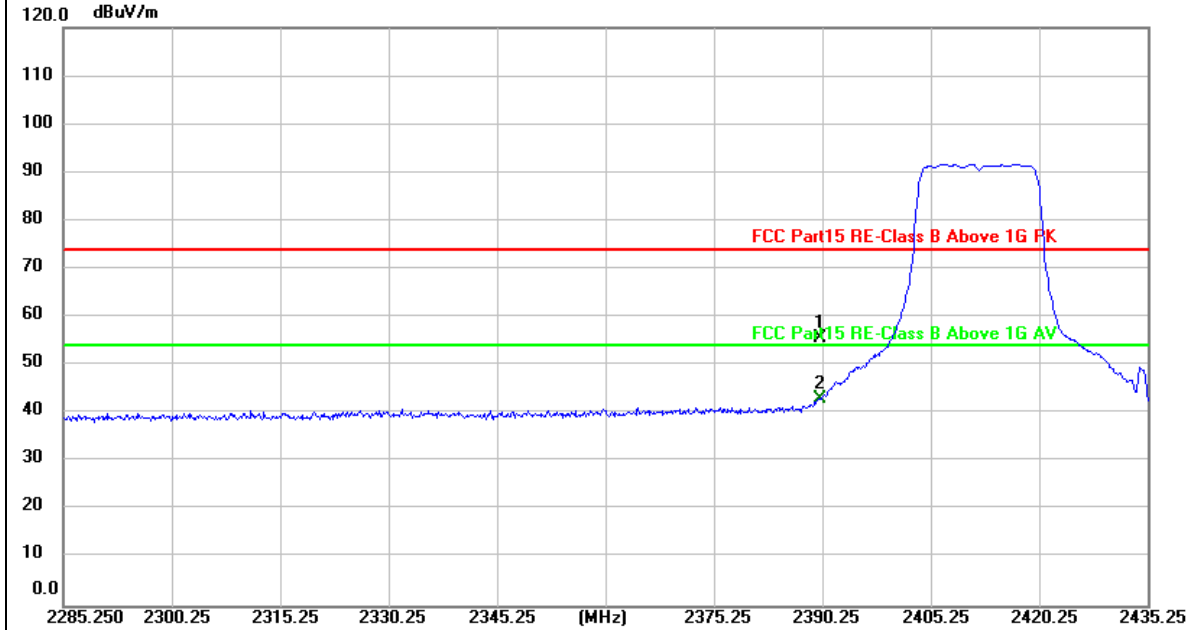


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	24.49	31.31	55.80	74.00	-18.20	peak
2 *	2390.000	11.74	31.31	43.05	54.00	-10.95	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz

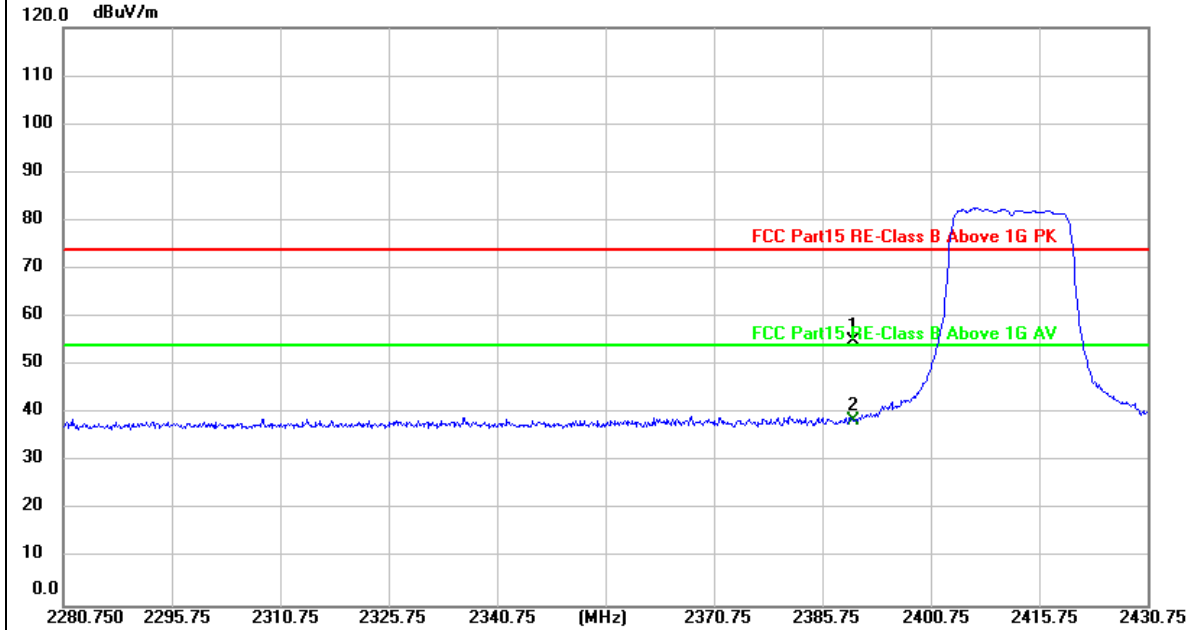

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	23.76	31.31	55.07	74.00	-18.93	peak
2 *	2390.000	7.38	31.31	38.69	54.00	-15.31	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz

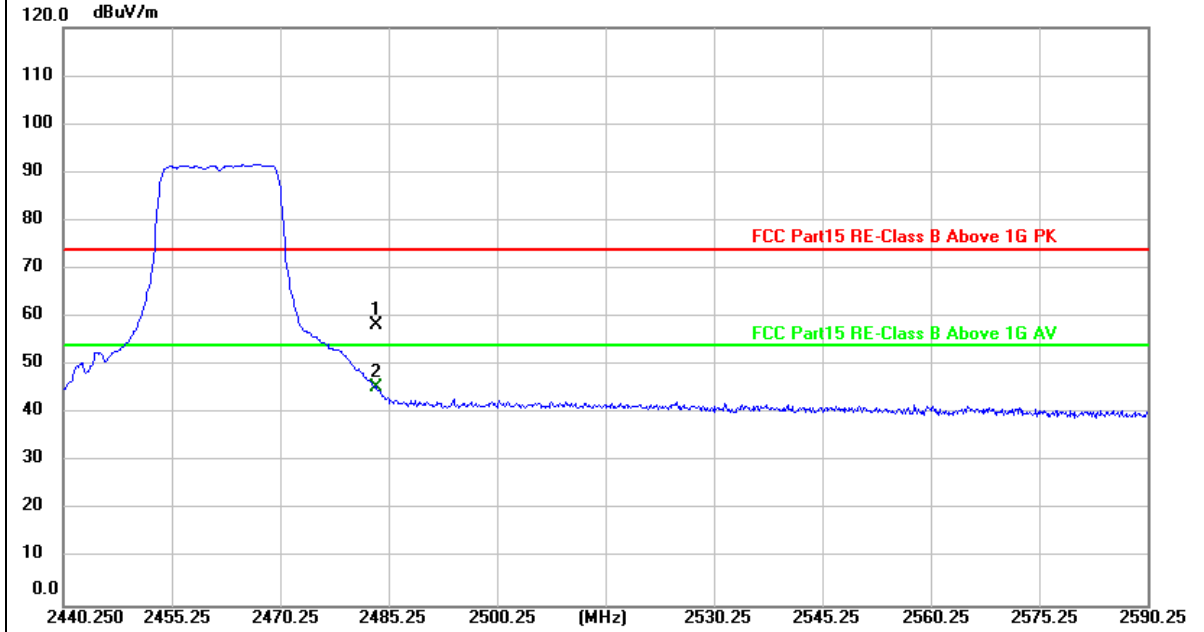

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	26.91	31.48	58.39	74.00	-15.61	peak
2 *	2483.500	13.95	31.48	45.43	54.00	-8.57	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz

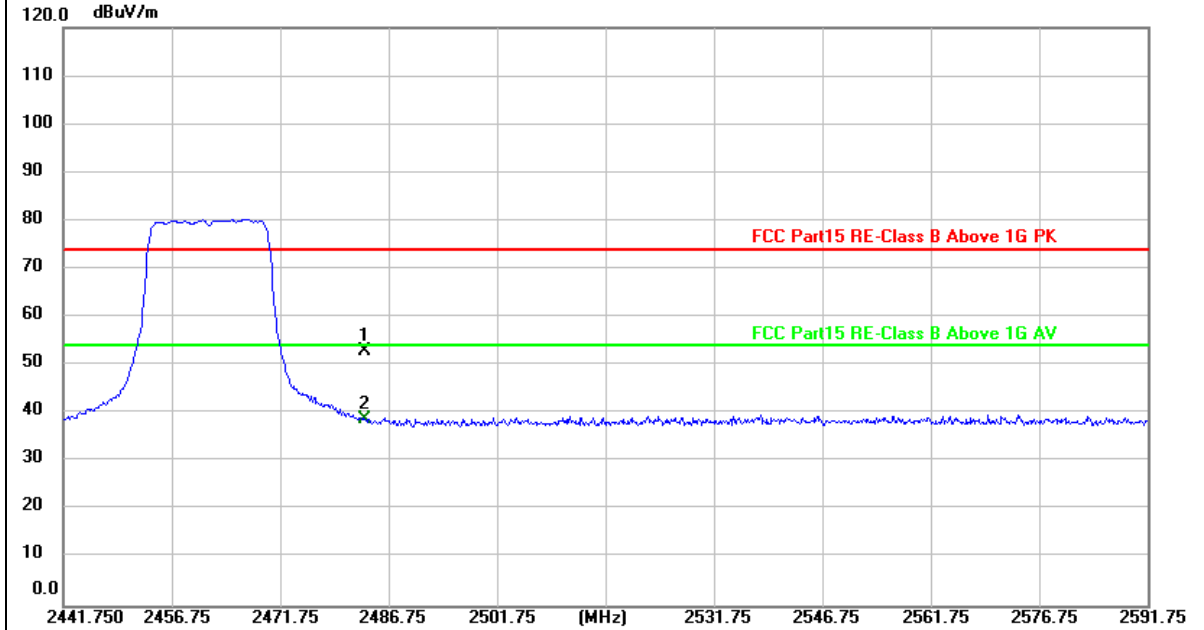


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	21.60	31.48	53.08	74.00	-20.92	peak
2 *	2483.500	7.41	31.48	38.89	54.00	-15.11	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

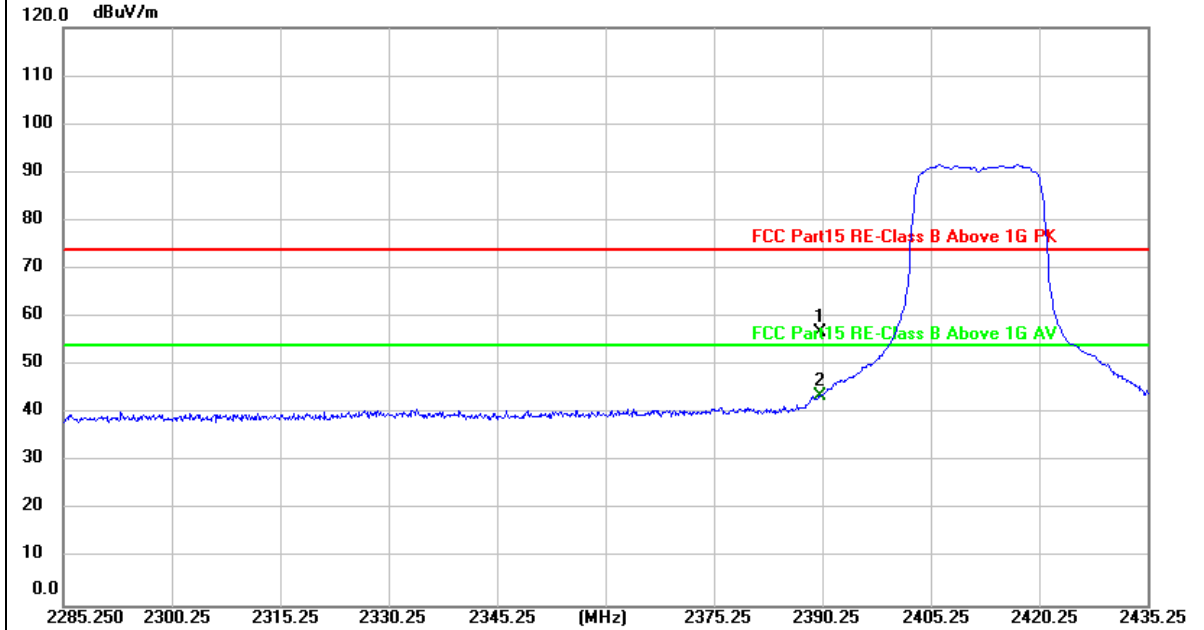

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	25.67	31.31	56.98	74.00	-17.02	peak
2 *	2390.000	12.45	31.31	43.76	54.00	-10.24	AVG

Remarks:


- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value







Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

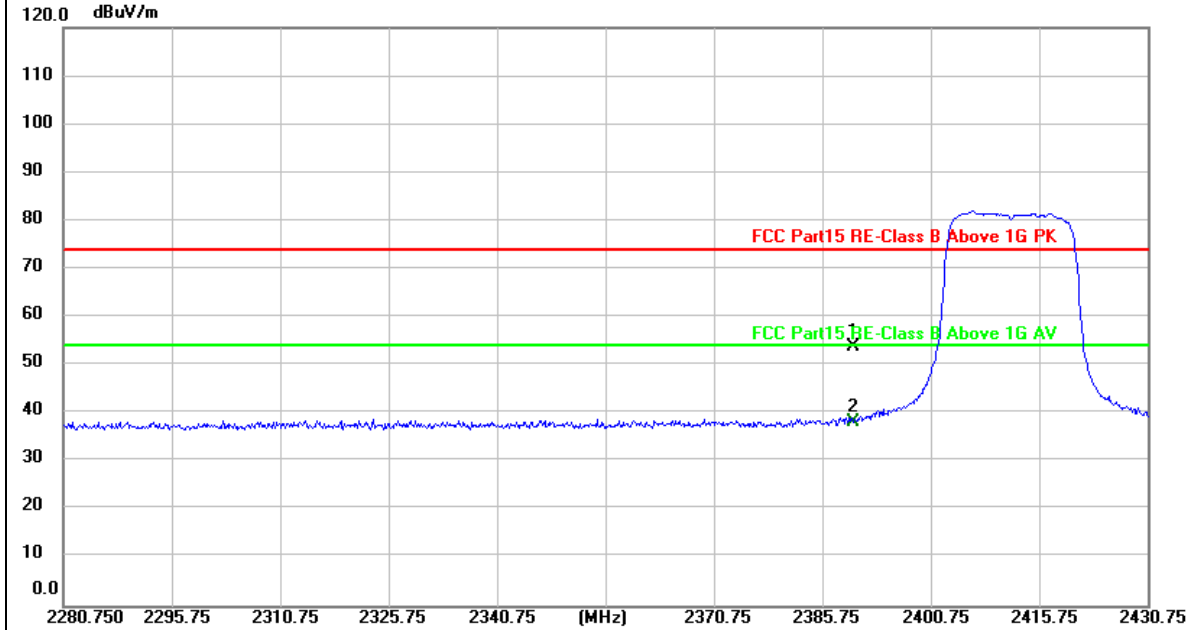


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	22.50	31.31	53.81	74.00	-20.19	peak
2 *	2390.000	7.08	31.31	38.39	54.00	-15.61	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

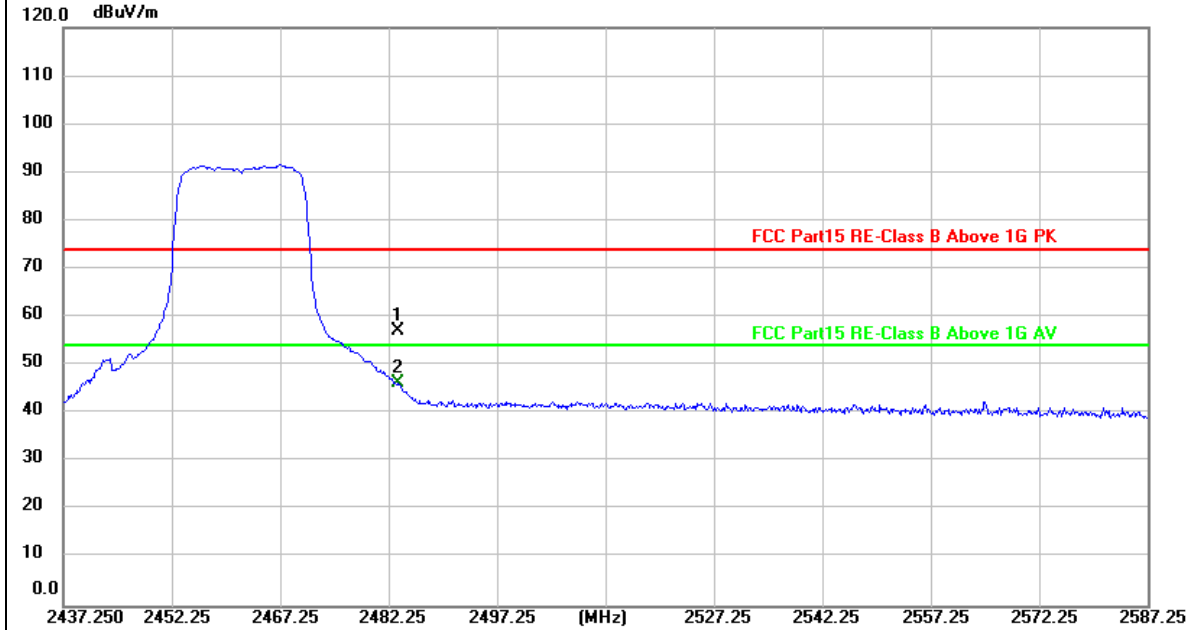

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	25.56	31.48	57.04	74.00	-16.96	peak
2 *	2483.500	14.77	31.48	46.25	54.00	-7.75	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

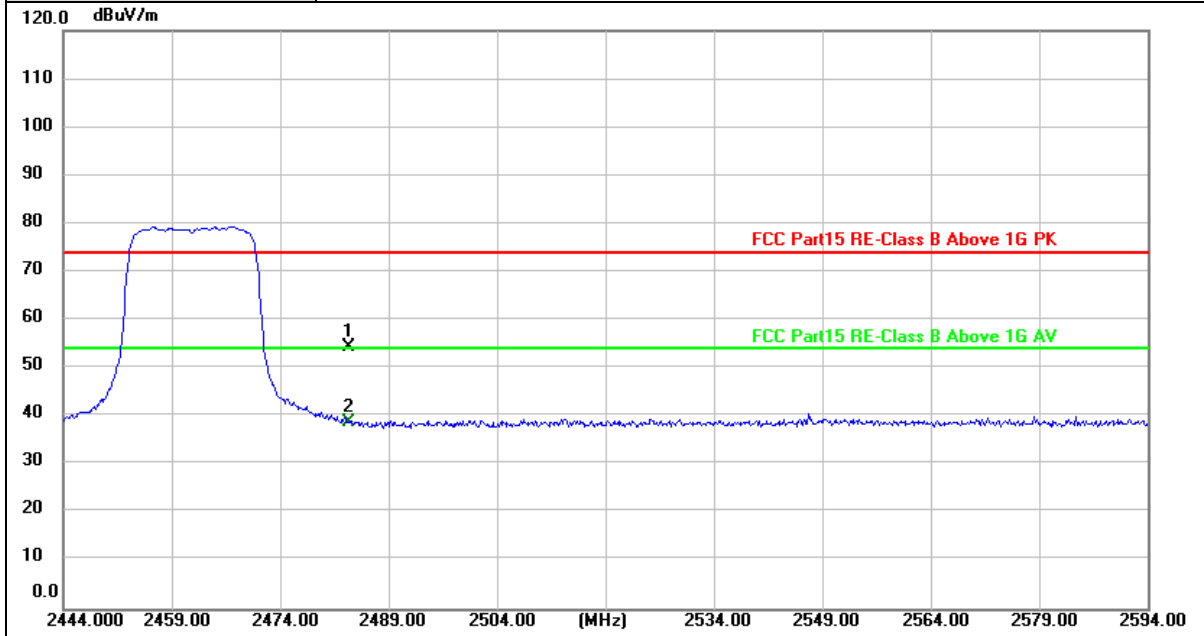


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	23.00	31.48	54.48	74.00	-19.52	peak
2 *	2483.500	7.30	31.48	38.78	54.00	-15.22	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

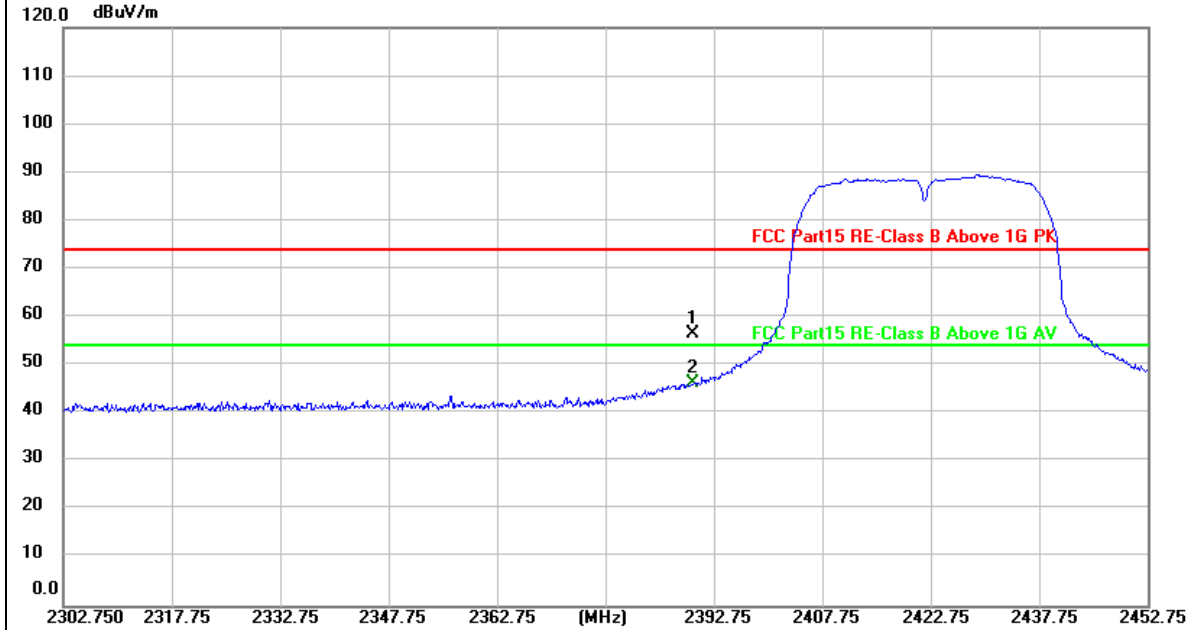


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	25.23	31.31	56.54	74.00	-17.46	peak
2 *	2390.000	15.13	31.31	46.44	54.00	-7.56	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

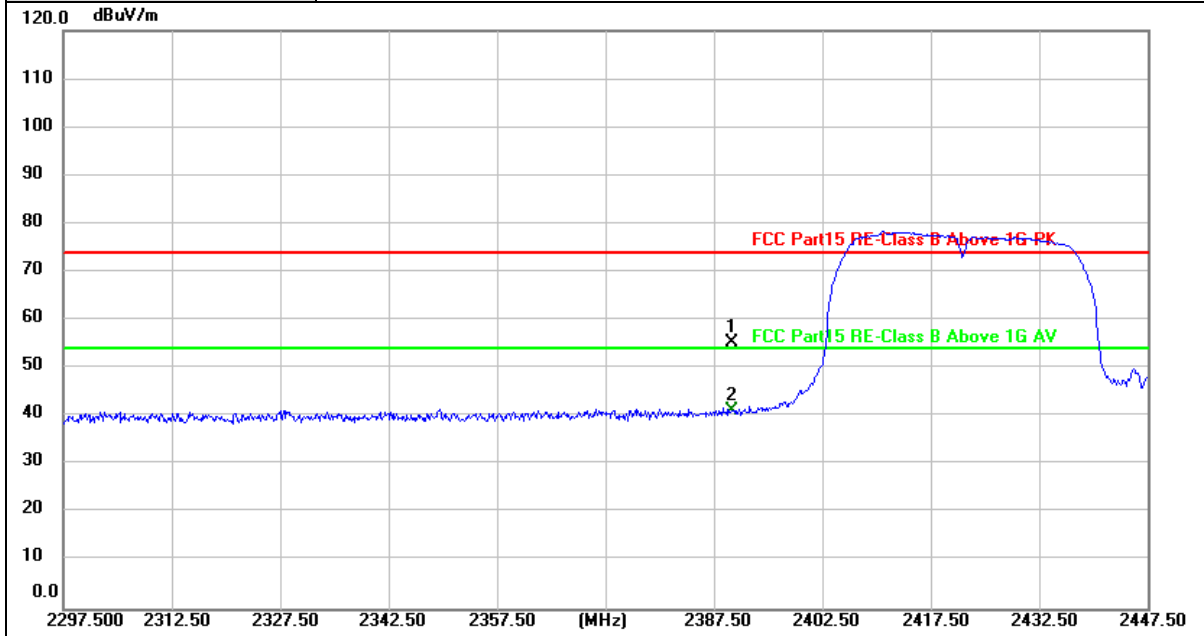


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	23.89	31.31	55.20	74.00	-18.80	peak
2 *	2390.000	10.01	31.31	41.32	54.00	-12.68	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

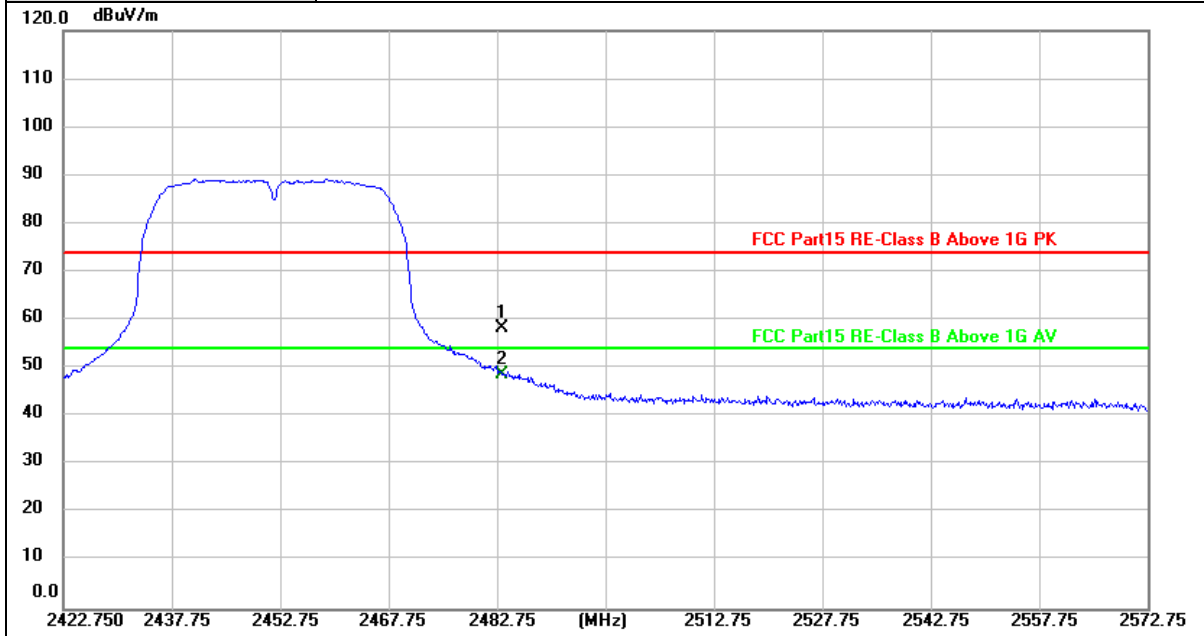


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	26.89	31.48	58.37	74.00	-15.63	peak
2 *	2483.500	17.16	31.48	48.64	54.00	-5.36	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

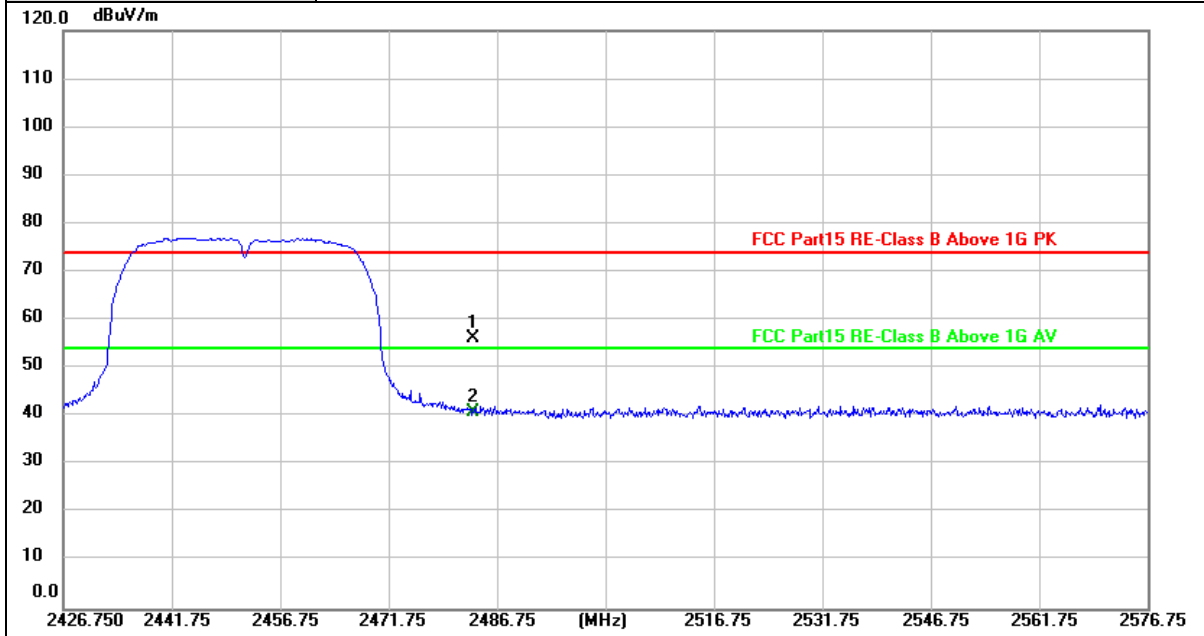

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	24.91	31.48	56.39	74.00	-17.61	peak
2 *	2483.500	9.50	31.48	40.98	54.00	-13.02	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value




### 3.4. Band Edge and Spurious Emissions (Conducted)

#### Limit

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### Test Configuration

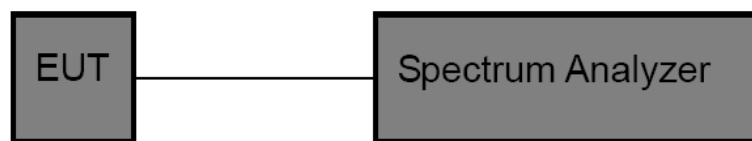

#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.



**Test Result**


Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
IEEE 802.11b	1	2400.00	-46.573	-21.83	-24.743	PASS	
		2398.40	-45.678	-21.83	-23.848	PASS	
		3215.60	-29.522	-21.83	-7.692	PASS	
	6	3249.34	-28.964	-19.58	-9.384	PASS	
		11	2483.50	-47.442	-17.41	-30	PASS
			3282.42	-29.884	-17.41	-12.474	PASS
IEEE 802.11g	1	2400.00	-40.640	-25.8	-15	PASS	
		3216.25	-29.473	-25.8	-3.673	PASS	
	6	3249.34	-28.762	-23.94	-4.822	PASS	
		11	2483.50	-49.242	-21.88	-27	PASS
	3282.42		-29.556	-21.88	-7.676	PASS	
	IEEE 802.11n_20	1	2400.00	-39.185	-25.89	-13	PASS
3216.25			-29.503	-25.89	-3.613	PASS	
6		3249.34	-28.827	-24.0	-4.827	PASS	
		11	2483.50	-46.936	-21.87	-25	PASS
3282.42			-29.698	-21.87	-7.828	PASS	
IEEE 802.11n_40		3	2400.00	-35.306	-26.79	-8.516	PASS
	3229.36		-43.159	-26.79	-16.369	PASS	
	6	79.94	-41.448	-25.58	-15.868	PASS	
		9	2483.50	-44.712	-24.28	-20.432	PASS
	3269.31		-29.065	-24.28	-4.785	PASS	




Test plot as follows:




In-Band Reference Level  
IEEE 802.11b Channel 1 20MHz Antenna 0

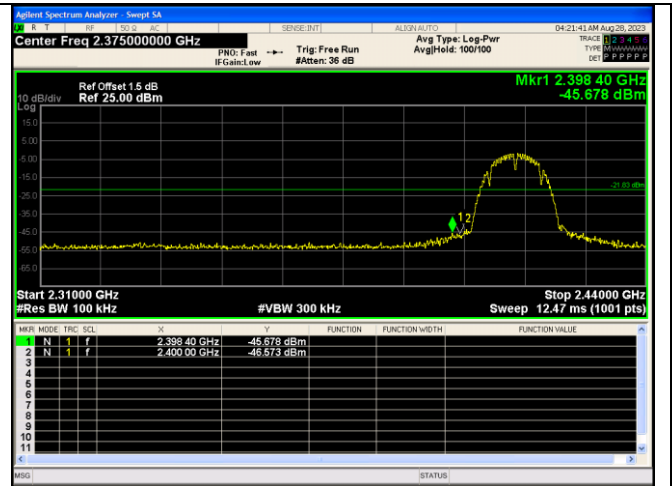


Out Of Band Emission  
IEEE 802.11b Channel 1 20MHz Antenna 0

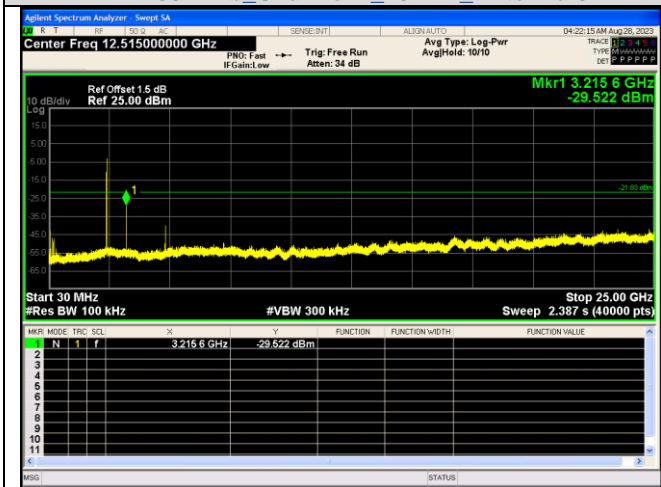


Spurious Emission  
IEEE 802.11b Channel 1 20MHz Antenna 0

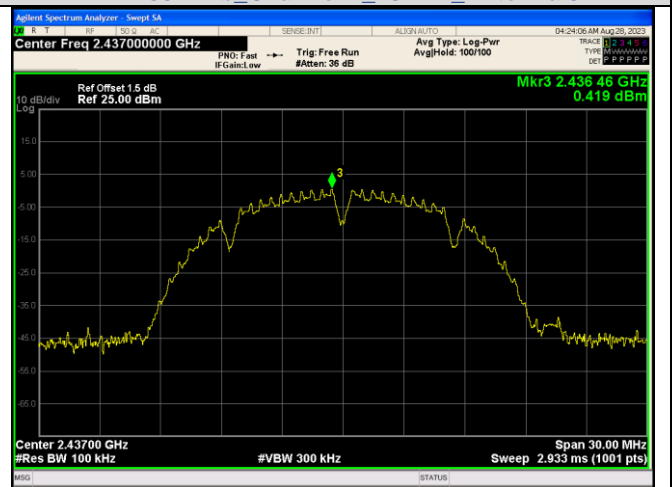


In-Band Reference Level  
IEEE 802.11b Channel 6 20MHz Antenna 0

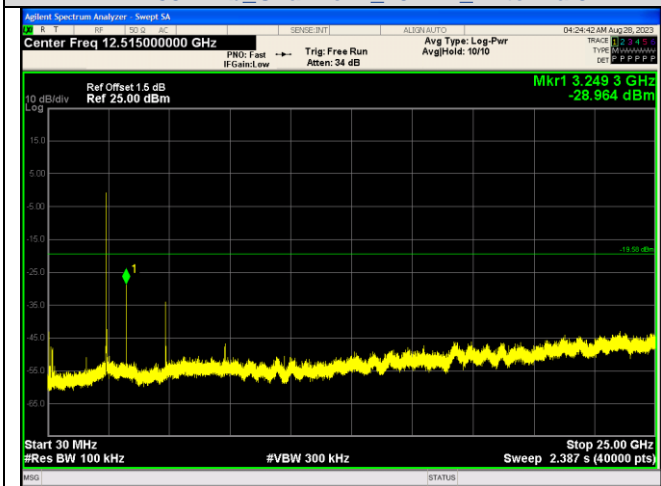


Spurious Emissions  
IEEE 802.11b Channel 6 20MHz Antenna 0

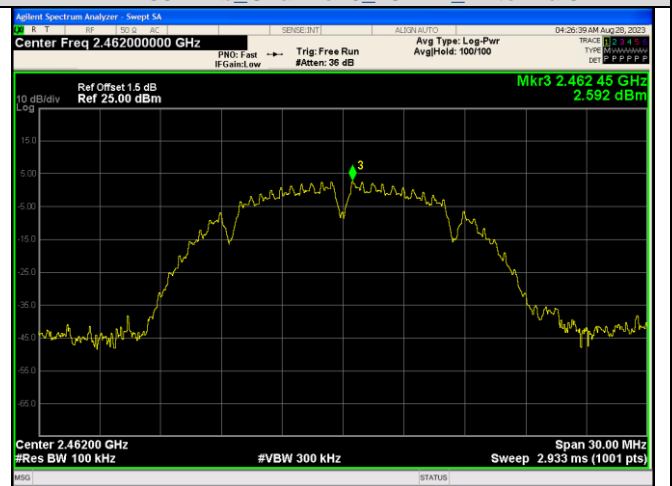


In-Band Reference Level  
IEEE 802.11b Channel 11 20MHz Antenna 0

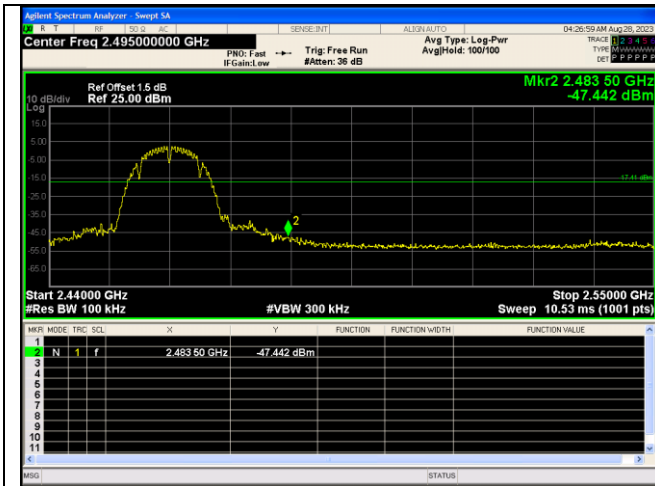


Out Of Band Emission  
IEEE 802.11b Channel 11\_20MHz\_Antenna 0

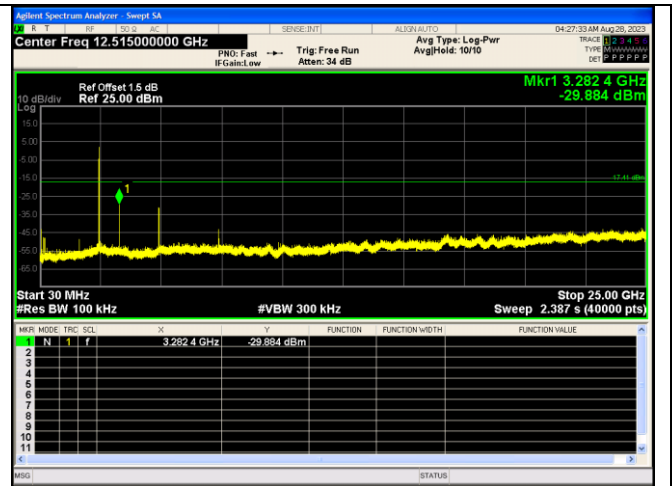


Spurious Emission  
IEEE 802.11b Channel 11\_20MHz\_Antenna 0

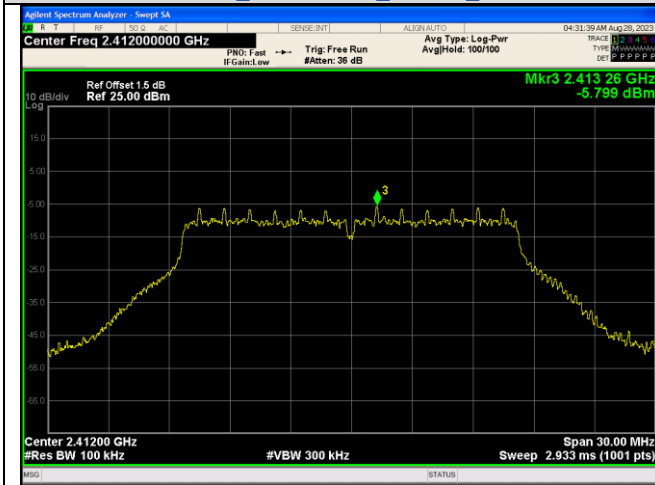


In-Band Reference Level  
IEEE 802.11g Channel 1\_20MHz\_Antenna 0

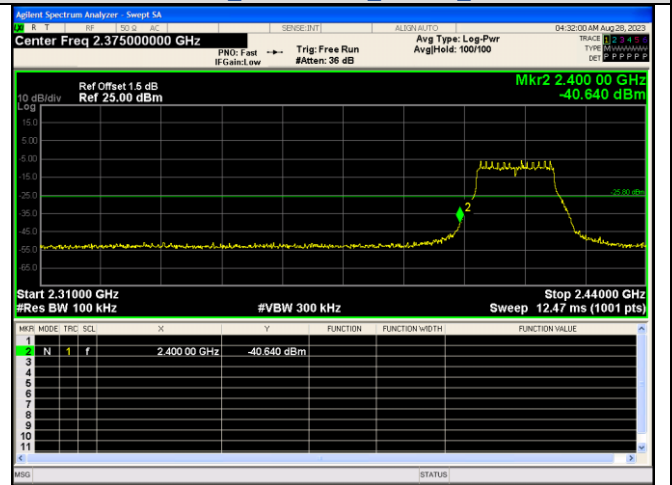

Out Of Band Emission  
IEEE 802.11g Channel 1\_20MHz\_Antenna 0

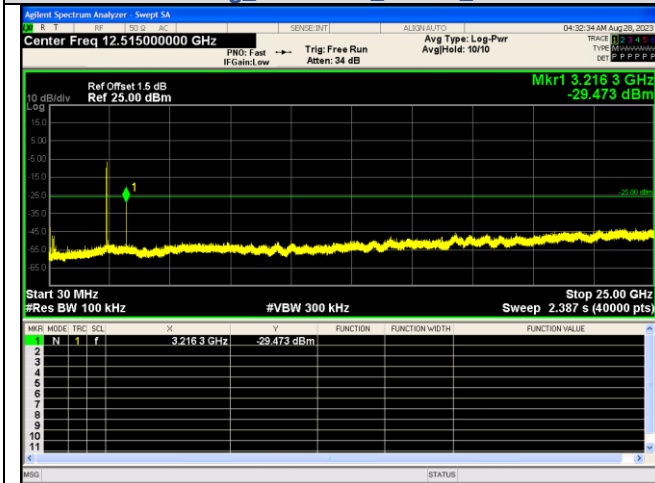


Spurious Emission  
IEEE 802.11g Channel 1\_20MHz\_Antenna 0

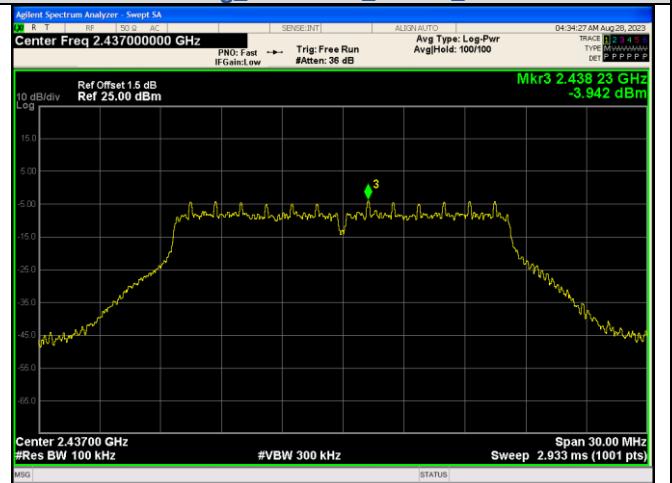


In-Band Reference Level  
IEEE 802.11g Channel 6\_20MHz\_Antenna 0




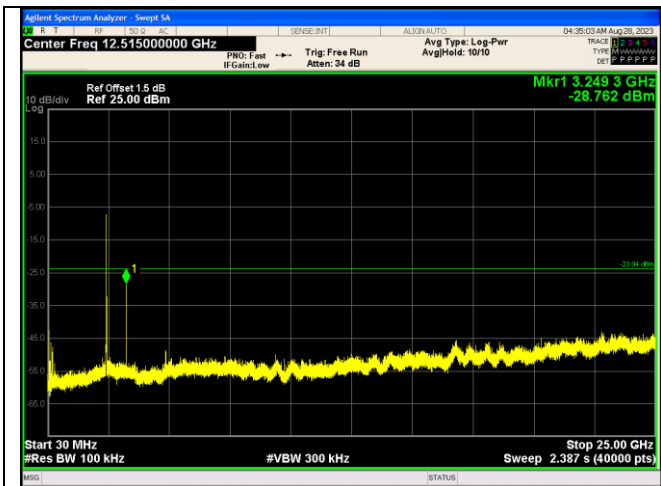


Spurious Emissions  
IEEE 802.11g Channel 6 20MHz Antenna 0

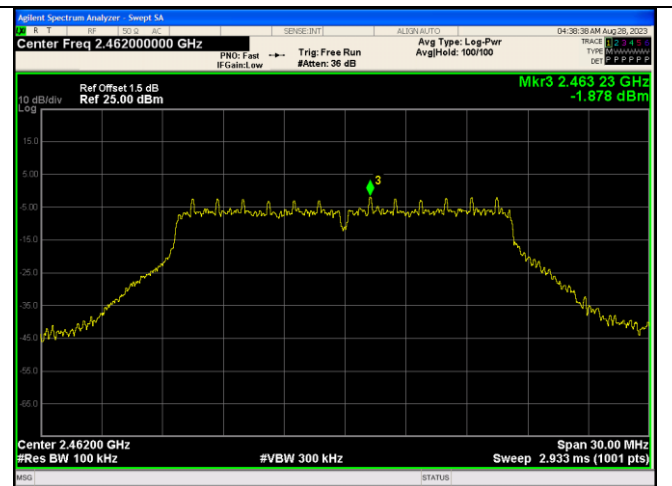


In-Band Reference Level  
IEEE 802.11g Channel 11 20MHz Antenna 0

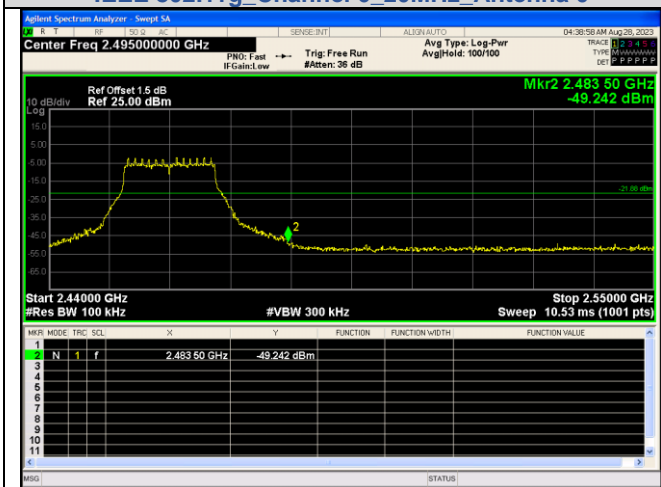


Out of Band Emission  
IEEE 802.11g Channel 11 20MHz Antenna 0

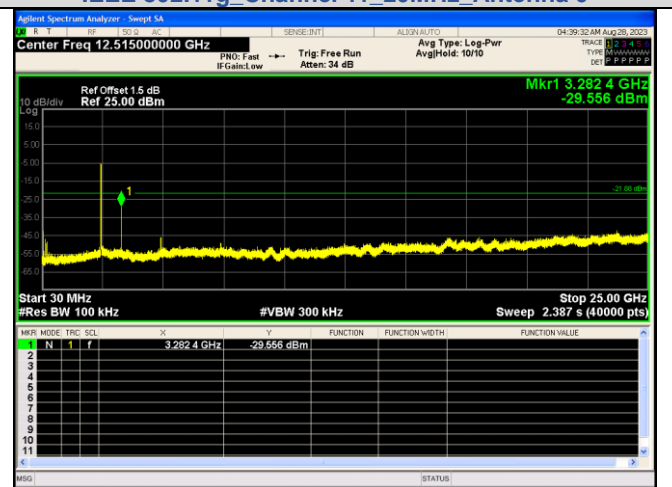

Spurious Emission  
IEEE 802.11g Channel 11 20MHz Antenna 0

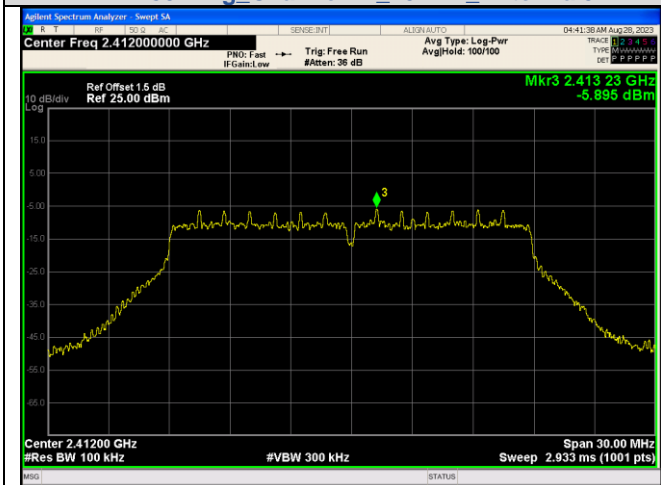


In-Band Reference Level  
IEEE 802.11n Channel 1 20MHz Antenna 0

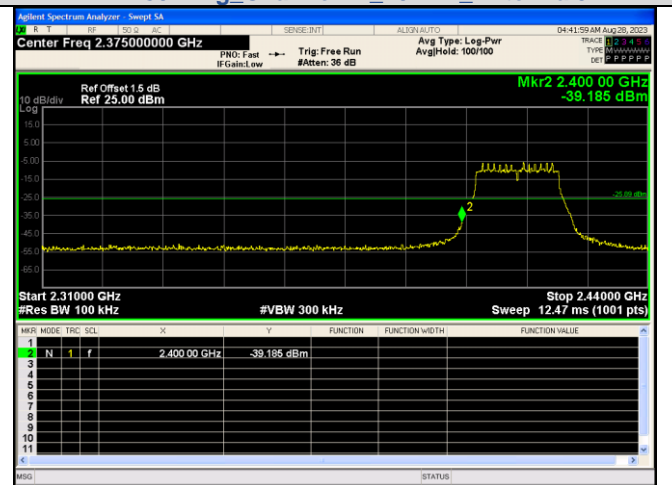


Out of Band Emission  
IEEE 802.11n Channel 1 20MHz Antenna 0




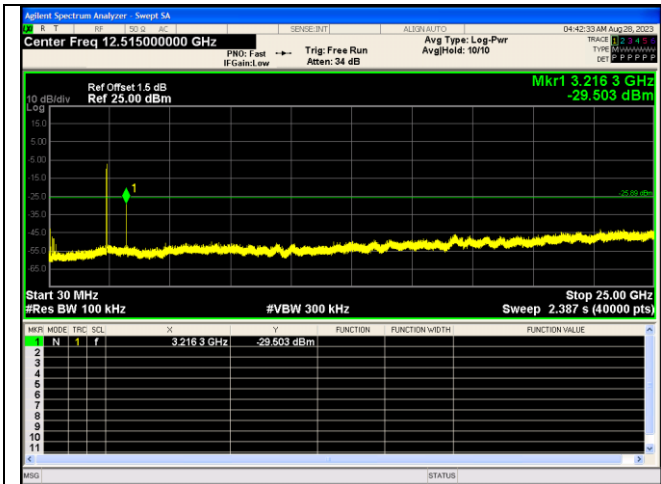


Spurious Emission  
IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0

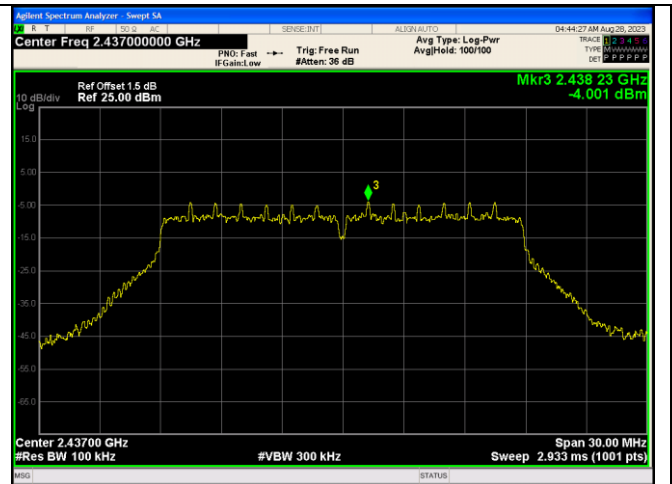


In-Band Reference Level  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0

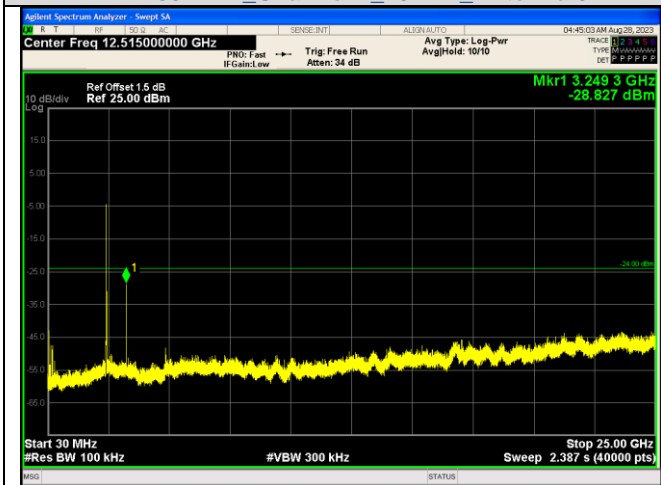


Spurious Emissions  
IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0

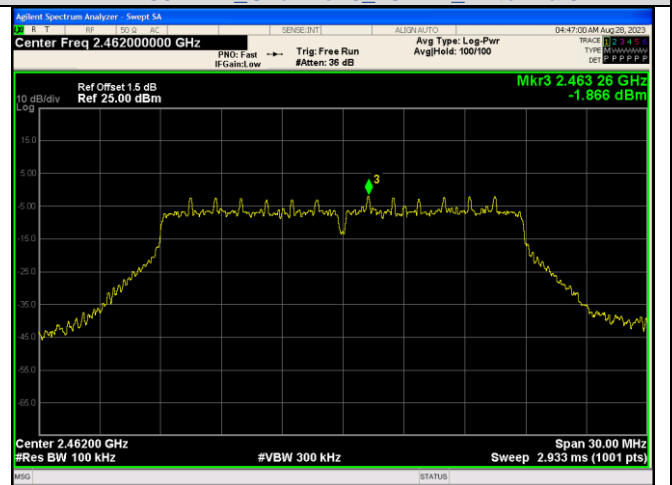


In-Band Reference Level  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

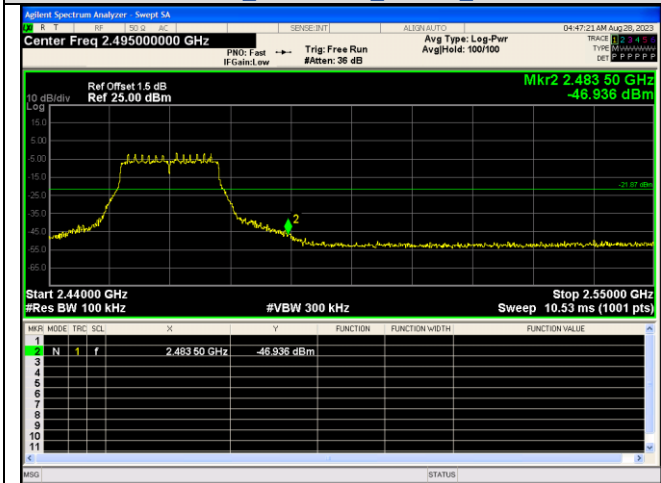


Out Of Band Emission  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

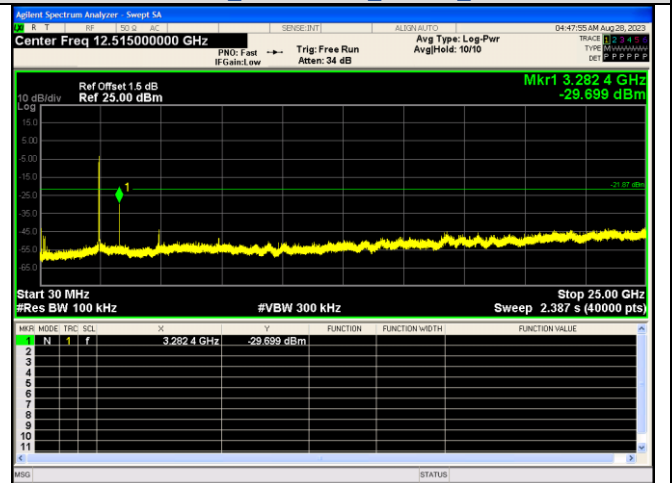


Spurious Emission  
IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

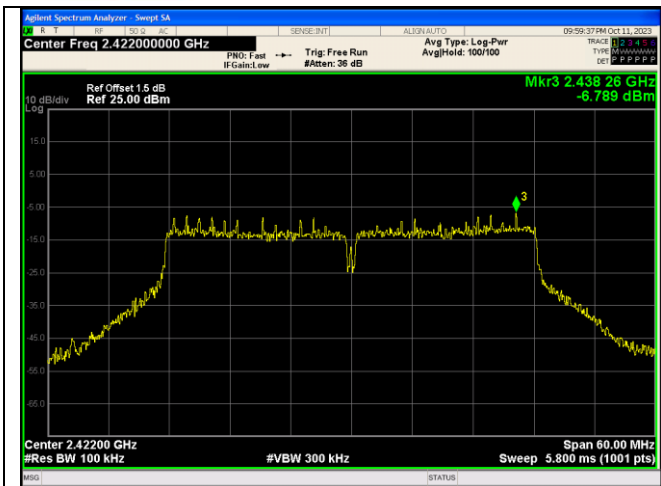


In-Band Reference Level  
IEEE 802.11n Channel 3 40MHz Antenna 0

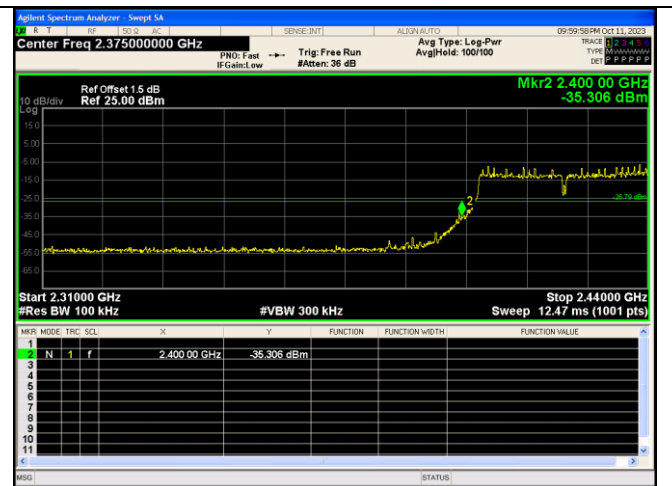


Out Of Band Emission  
IEEE 802.11n Channel 3 40MHz Antenna 0

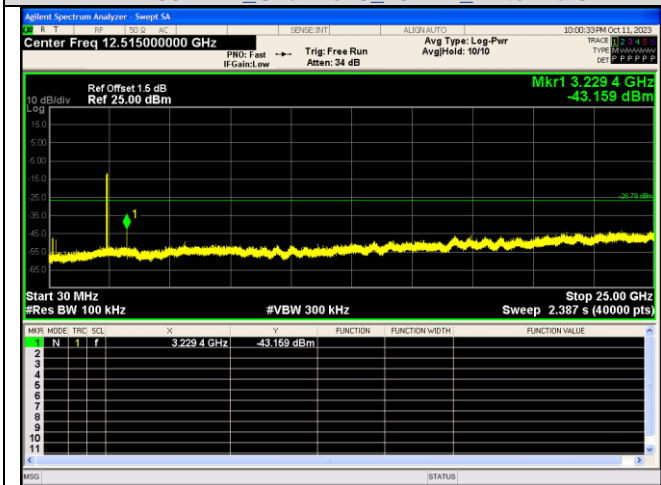


Spurious Emission  
IEEE 802.11n Channel 3 40MHz Antenna 0

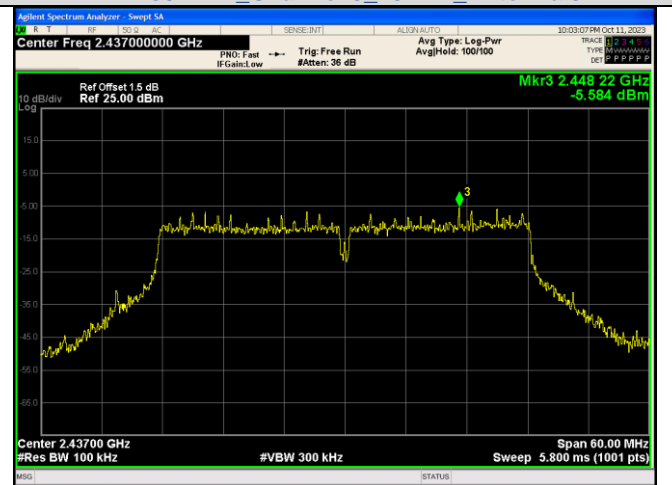

In-Band Reference Level  
IEEE 802.11n Channel 6 40MHz Antenna 0

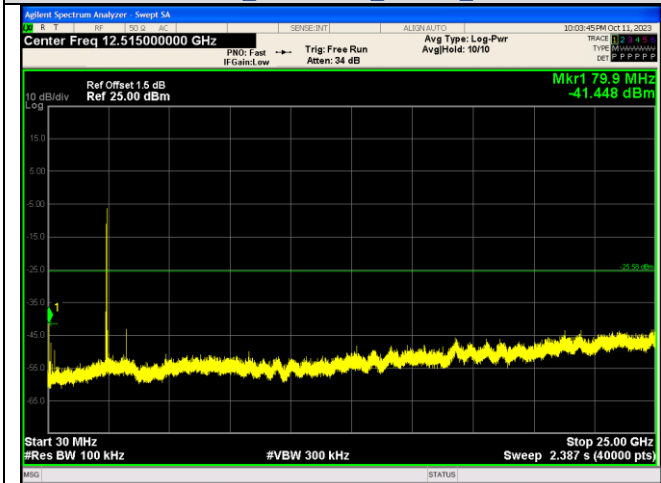


Spurious Emissions  
IEEE 802.11n Channel 6 40MHz Antenna 0

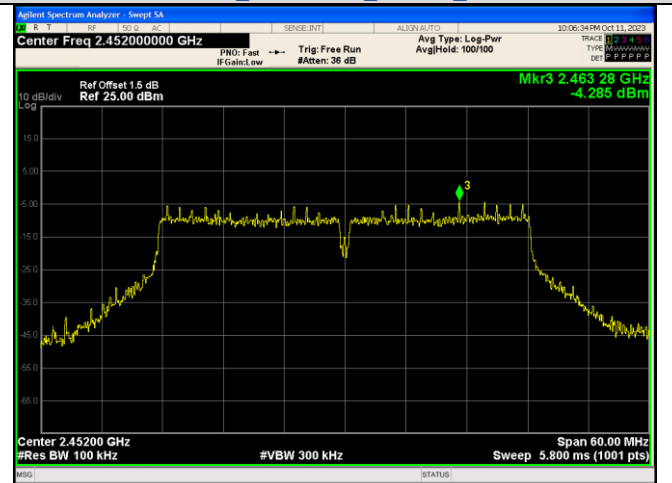


In-Band Reference Level  
IEEE 802.11n Channel 9 40MHz Antenna 0



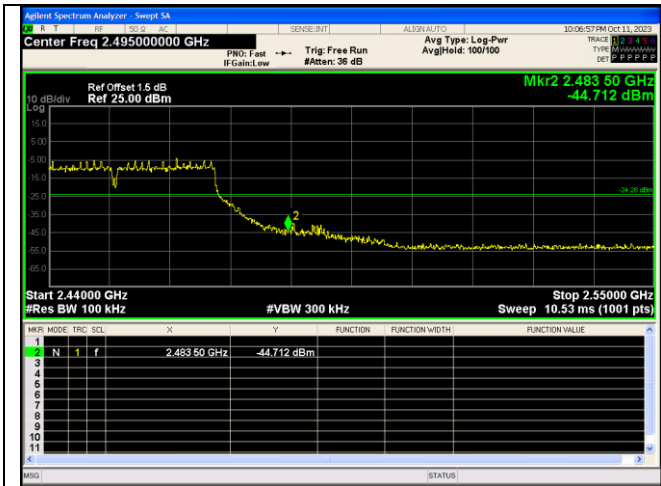

Out Of Band Emission  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

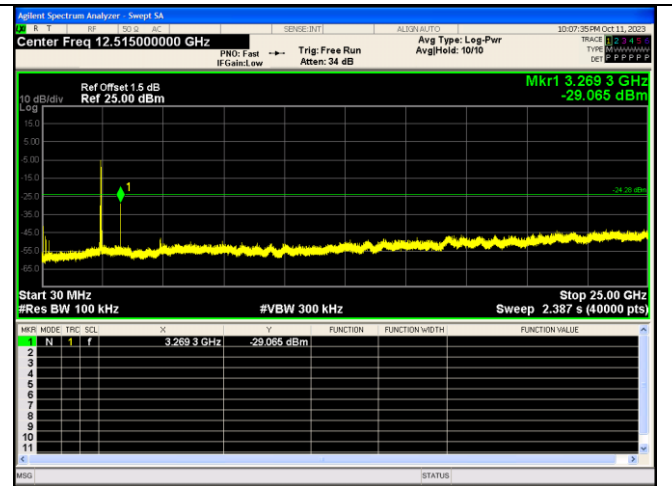

Spurious Emission  
IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

