

RF Test Report

Applicant : Emplus Technologies, Inc
Product Type : 4x4 AX Dual-band AP
Trade Name : emplus
Model Number : WAP380
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : May 13, 2020
Test Period : Jun. 03 ~ Jul. 10, 2020
Issued Date : Aug. 19, 2020

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Frequency Range : 9 kHz to 40 GHz

Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Rev.	Issued Date	Revisions	Revised By
00	Jul. 23, 2020	Initial Issue	Yu Chiang
01	Aug. 19, 2020	Update model number and model description (P.1/P.3/P.7/P.9) Update chapter 3.3 (P.17/P.18) Update Test Results (P.32~P.35/P.241~P.242/P.349~P.350) Update Test Setup Photographs	Snow Wang

Verification of Compliance

Applicant : Emplus Technologies, Inc
Product Type : 4x4 AX Dual-band AP
Trade Name : emplus
Model Number : WAP380
FCC ID : 2AL6XWAP380
EUT Rated Voltage : DC 12 V, 2.5 A (DC Power Adapter)
DC 54 V, 0.6 A (PoE injector (802.3af/at))
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied


Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

:

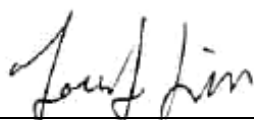

(Manager)

(Jeremy Lin)



TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology.....	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step.....	16
3.3.	Configuration of Test System Details.....	17
3.4.	Test Instruments	19
3.5.	Test Site Environment.....	20
4	Measurement Procedure.....	21
4.1.	AC Power Line Conducted Emission Measurement.....	21
4.2.	Radiated Emission Measurement.....	23
4.3.	Maximum Conducted Output Power Measurement.....	27
4.4.	6 dB RF Bandwidth Measurement.....	28
4.5.	Maximum Power Spectral Density Measurement	29
4.6.	Out of Band Conducted Emissions Measurement.....	30
4.7.	Antenna Measurement	31
5	Test Results	32
	Annex A. Conducted Emission	32
	Annex B. Conducted Test Results	36
	Annex C. Radiated Emission Measurement.....	241



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)



1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.68
Radiated Emission	9 kHz ~ 30 MHz	2.14
	30 MHz ~ 1000 MHz	4.99
	1000 MHz ~ 18000 MHz	4.99
	18000 MHz ~ 26500 MHz	4.23
	26500 MHz ~ 40000 MHz	4.39
Conducted Output Power	0.92 dB	
RF Bandwidth	4.79 %	
Power Spectral Density	0.92 dB	



2 EUT Description

Applicant	Emplus Technologies, Inc Bld B, 10F, No.209 Nangang Rd., Taipei City, Taiwan			
Manufacturer	Emplus Technologies., Inc. 10F., Building B, No.209, Sec. 1, Nangang Rd., Nangang Dist., Taipei City 115, Taiwan (R.O.C.)			
Product Type	4x4 AX Dual-band AP			
Trade Name	emplus			
Model Number	WAP380			
FCC ID	2AL6XWAP380			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM (256QAM)	20 MHz	Up to 364.8 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM (256QAM)	40 MHz	Up to 800 Mbps
IEEE 802.11ax 2.4 GHz 20 MHz	2412 ~ 2452	OFDMA	20 MHz	MCS11
IEEE 802.11ax 2.4 GHz 40 MHz	2422 ~ 2452	OFDMA	40 MHz	MCS11
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)
	ANT-0	5718A0514300	PIFA Antenna	3.70
	ANT-1	5718A0515300	PIFA Antenna	4.08
	ANT-2	5718A0516300	PIFA Antenna	4.12
	ANT-3	5718A0517300	PIFA Antenna	5.01
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +40 °C			



Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.089
IEEE 802.11g	0.334
IEEE 802.11n 2.4 GHz 20 MHz	0.329
IEEE 802.11n 2.4 GHz 40 MHz	0.226
IEEE 802.11ax 2.4 GHz 20 MHz	0.332
IEEE 802.11ax 2.4 GHz 40 MHz	0.186

Beamforming on

Frequency Band	Max. RF Output Power (W)
IEEE 802.11n 2.4 GHz 20 MHz	0.078
IEEE 802.11n 2.4 GHz 40 MHz	0.051
IEEE 802.11ax 2.4 GHz 20 MHz	0.079
IEEE 802.11ax 2.4 GHz 40 MHz	0.042

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode
Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode
Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note1: Ant-1 is worst case in Mode 2.

Note 2: EUT only supports Full RU.

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
Mode 2	V	V	V	V	
Mode 3	V	V	V	V	V
Mode 4	V	V	V	V	V
Mode 5	V	V	V	V	V
Mode 6	V	V	V	V	V
Mode 7	V	V	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	1TX(Diversity)	1	1, 6, 11
Mode 3	4TX(CDD)	6	1, 6, 11
Mode 4	4TX (STBC/Beamforming on)	26	1, 6, 11
Mode 5	4TX (STBC/Beamforming on)	54	3, 6, 9
Mode 6	4TX (STBC/Beamforming on)	MCS0	1, 6, 11
Mode 7	4TX (STBC/Beamforming on)	MCS0	3, 6, 9



Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412	1.368	2.112	0.648	1.886	0.731
Mode 3	2412	1.992	2.096	0.950	0.221	0.502
Mode 4	2412	5.460	5.670	0.963	0.164	0.183
Mode 5	2422	5.460	5.655	0.966	0.152	0.183
Mode 6	2412	5.475	5.670	0.966	0.152	0.183
Mode 7	2422	5.475	5.745	0.953	0.209	0.183

Beamforming on


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 4	2412	5.460	5.670	0.963	0.164	0.183
Mode 5	2422	5.460	5.655	0.966	0.152	0.183
Mode 6	2412	5.475	5.670	0.966	0.152	0.183
Mode 7	2422	5.475	5.745	0.953	0.209	0.183

Duty Cycle Graphs

Mode 2: IEEE 802.11b Continuous TX mode

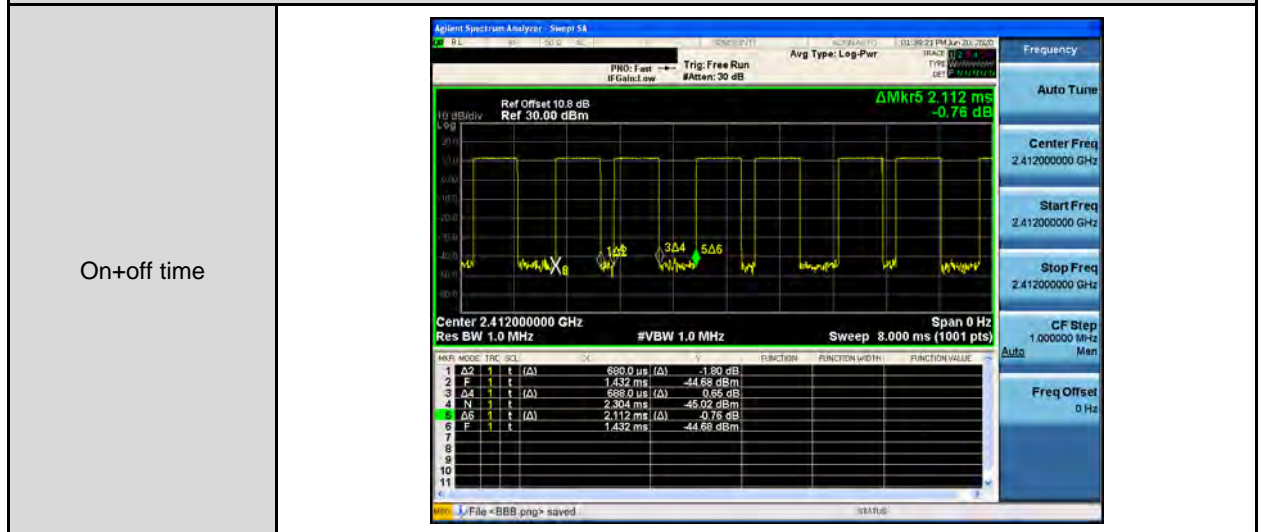


Mode 3: IEEE 802.11g Continuous TX mode

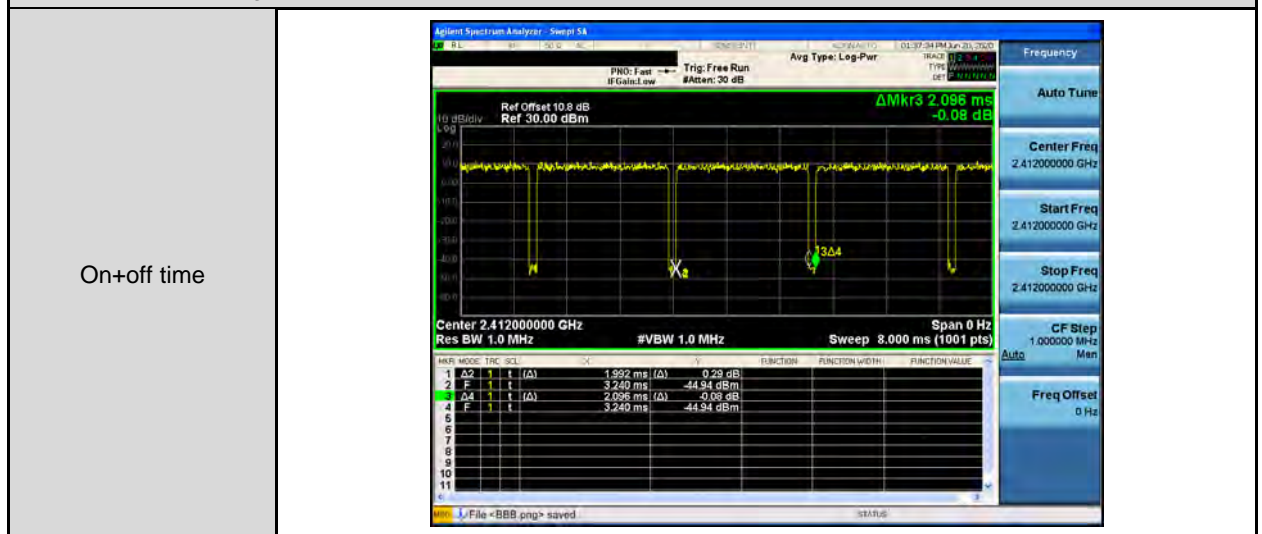


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode

On+off time

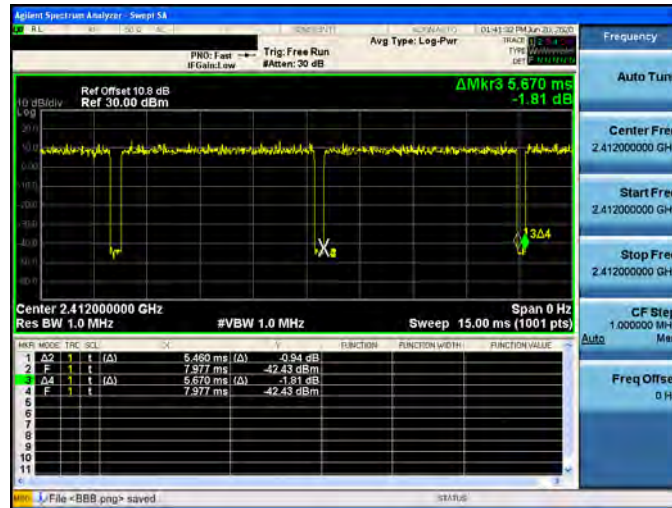


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode

On+off time

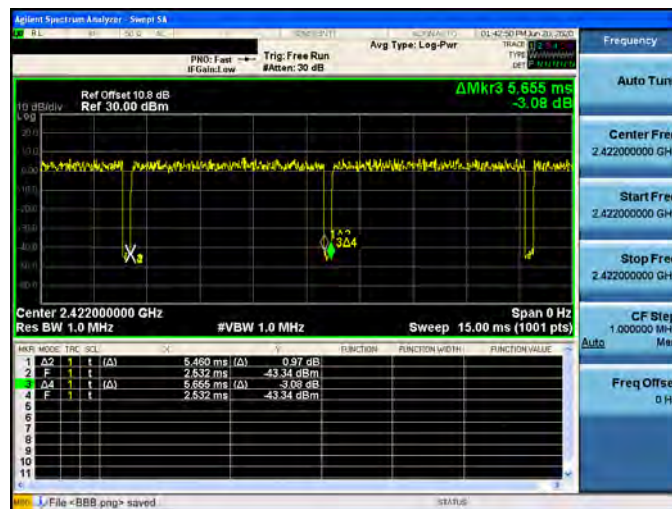


Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode

On+off time

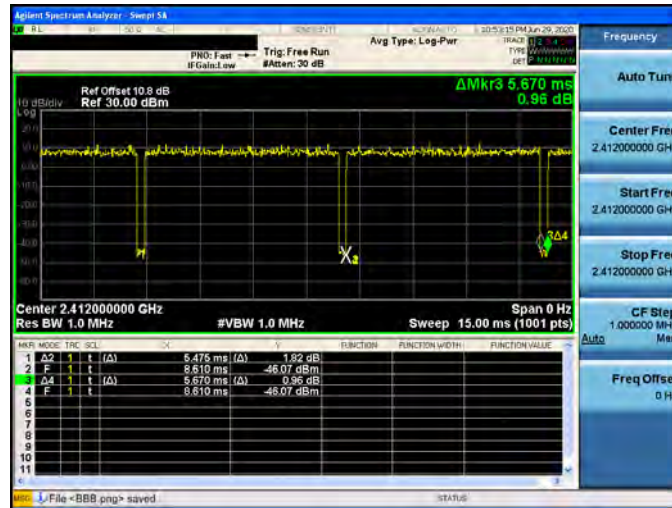


Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode

On+off time

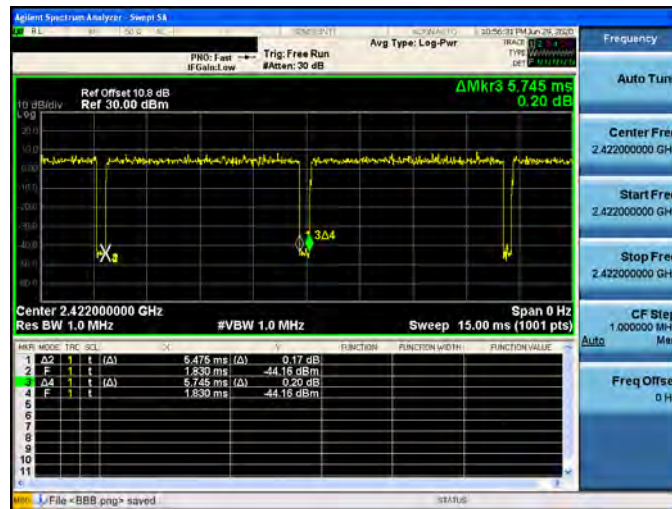


Beamforming on

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode

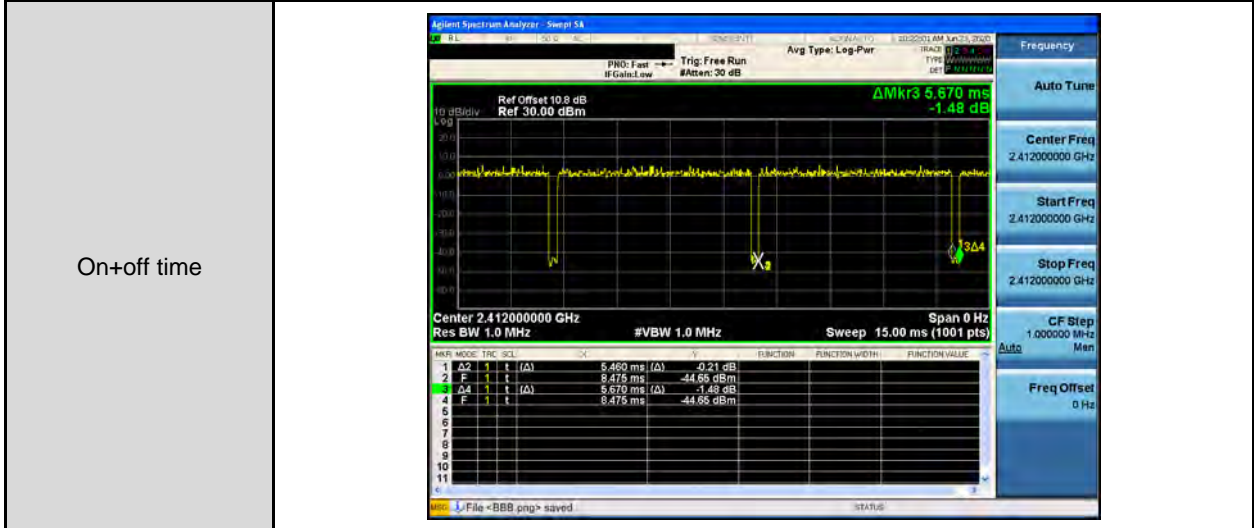


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode

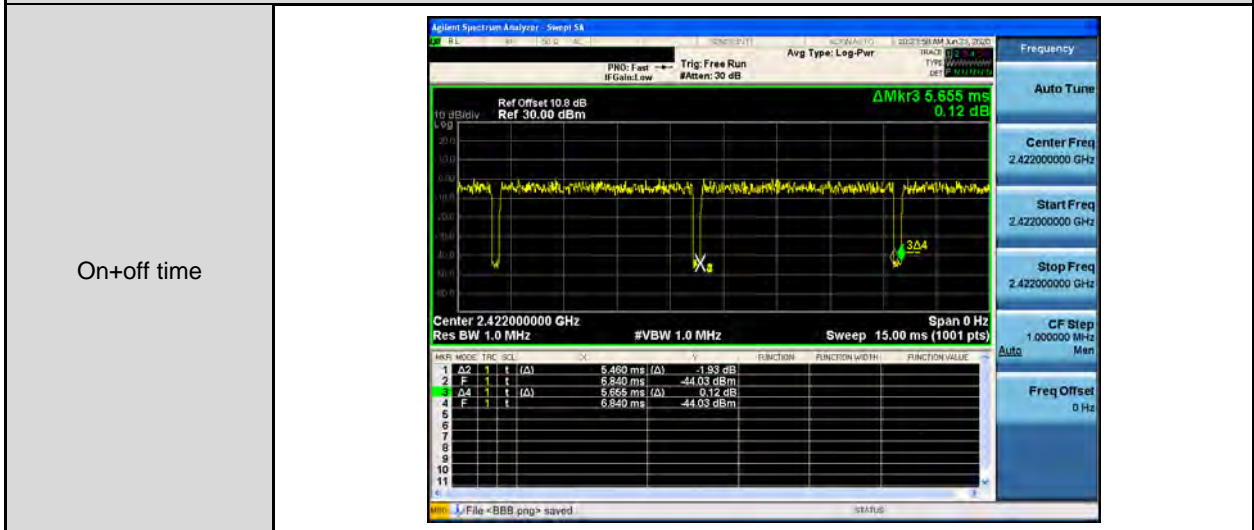


Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode

On+off time

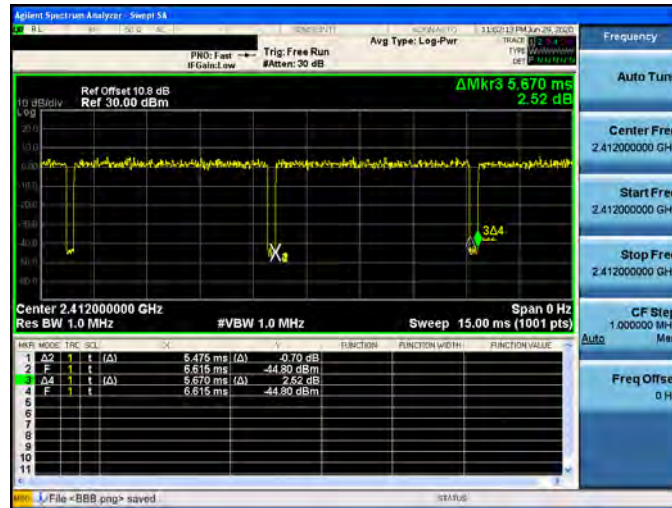

Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode

On+off time

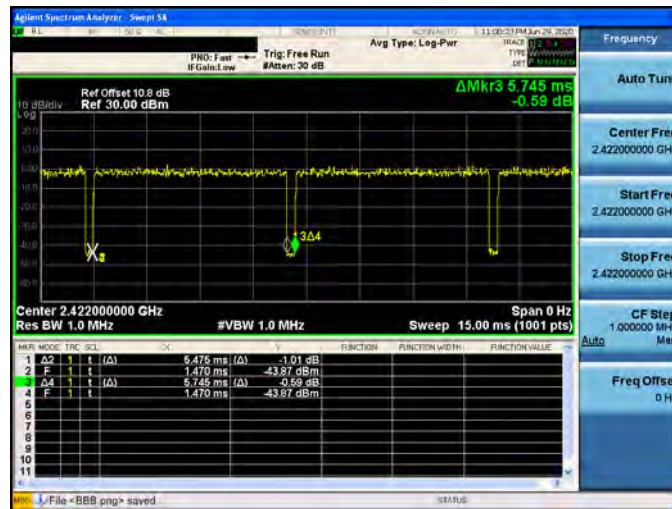




3.2. EUT Test Step

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

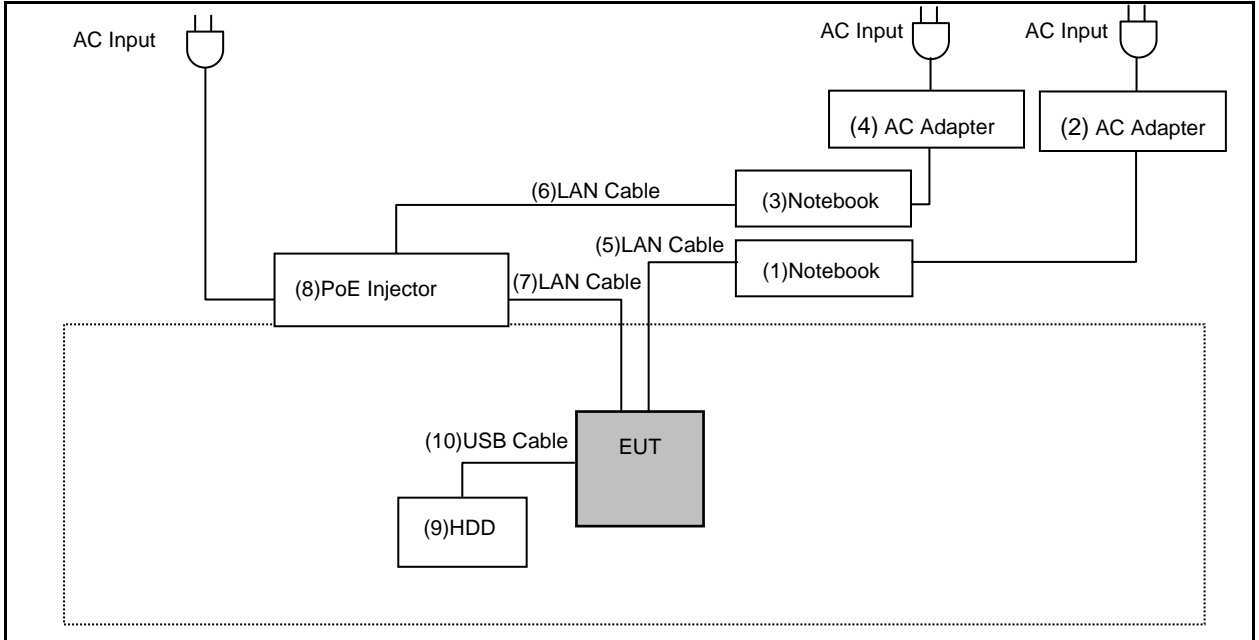

Radiated Emissions

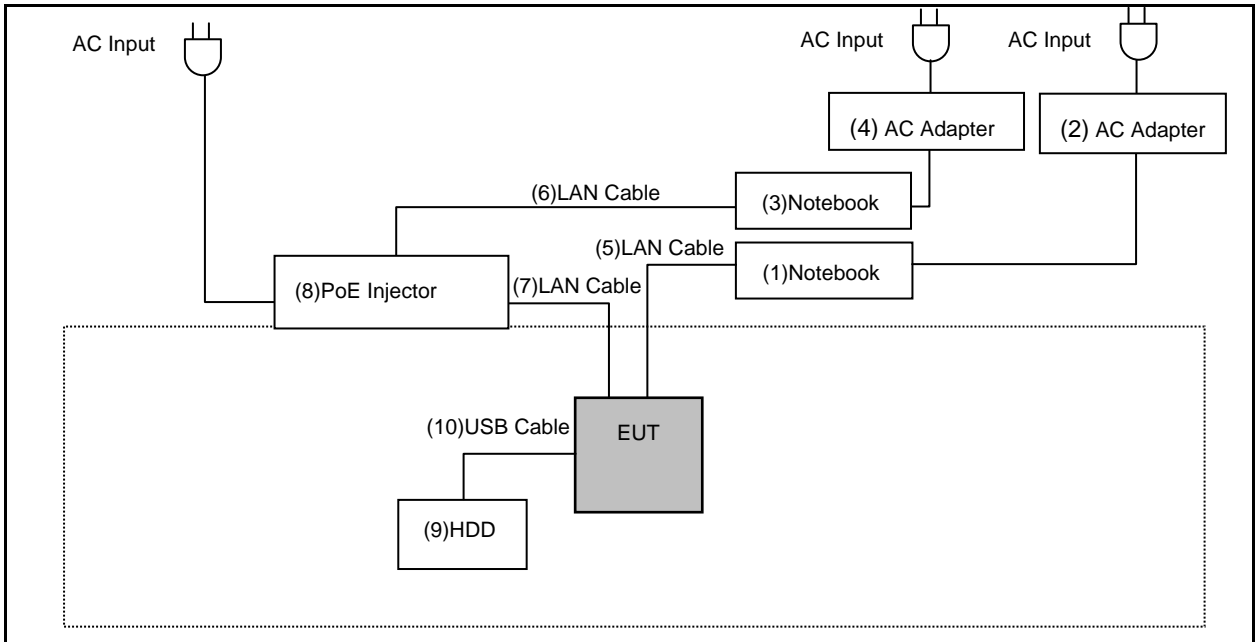



Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Remark
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	INPUT : 100-240 VAC, 50/60 Hz, 1.7 A OUTPUT : 19.5 VDC, 3.34 A Non-Shielded, 1.7 m
(3)	Notebook	DELL	LATITUDE E6440	48GBD72	---
(4)	AC Adapter	DELL	HA65NM130	---	INPUT : 100-240 VAC, 50/60 Hz, 1.7 A OUTPUT : 19.5 VDC, 3.34 A Non-Shielded, 1.7 m
(5)	LAN Cable	WINKEY ENTERPRISE CO., LTD.	CY-SZ-141224	---	---
(6)	LAN Cable	WINKEY ENTERPRISE CO., LTD.	CY-SZ-141224	---	---
(7)	LAN Cable	HUAWEI	UL2464	---	---
(8)	PoE Injector	emplus	EPA5006GAT	---	INPUT : 100-240 VAC, 50-60 Hz, 0.8 A OUTPUT : 54 VDC, 0.6 A
(9)	HDD	Transend	TS1TSJ25A3K-RU	D72654-0611	---
(10)	USB Cable	Transend	TS1TSJ25A3K-RU	D72654-0611	---
(11)	AC Adapter	SPC	ZZU1588-250120-2A	---	INPUT : 100-240 VAC, 50-60 Hz, 1.5 A OUTPUT : 12.0 VDC, 2.5 A

Note: The device used (11)AC Adapter and (8)PoE Injector to evaluation AC Power line Conducted Emission, (8)POE Injector is worst case to perform testing.



3.4. Test Instruments

For Conducted Emission

Test Period: Jul. 10, 2020

Testing Engineer: Paul Chiu

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/25/2020	1 year
LISN	R&S	ENV216	101040	03/23/2020	1 year
LISN	R&S	ENV216	101041	04/06/2020	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/25/2020	1 year

For Radiated Emissions

Test Period: Jun. 03 ~ Jun. 29, 2020

Testing Engineer: Ricky Liu, Marc Yeh

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/13/2020	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/18/2019	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/15/2020	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/23/2019	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/22/2019	1 year
Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/14/2019	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/27/2020	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2020	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/29/2019	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2020	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Jun. 20 ~ Jul. 01, 2020

Testing Engineer: Peter Shui

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	09/02/2019	1 year
Power Meter	Anritsu	ML2495A	1135009	09/02/2019	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/18/2019	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75
Barometric pressure (mbar)	860-1060	990-1005


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

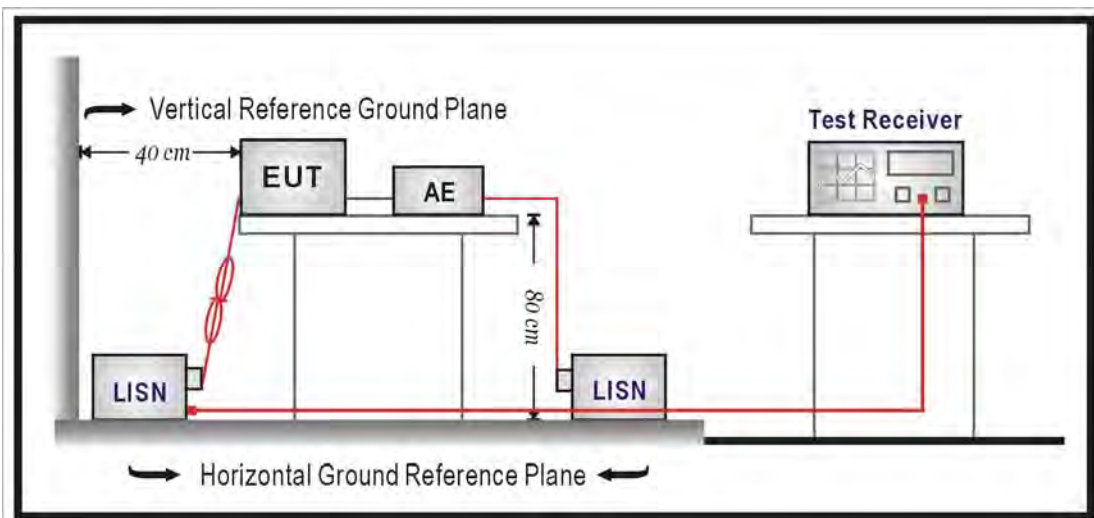

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

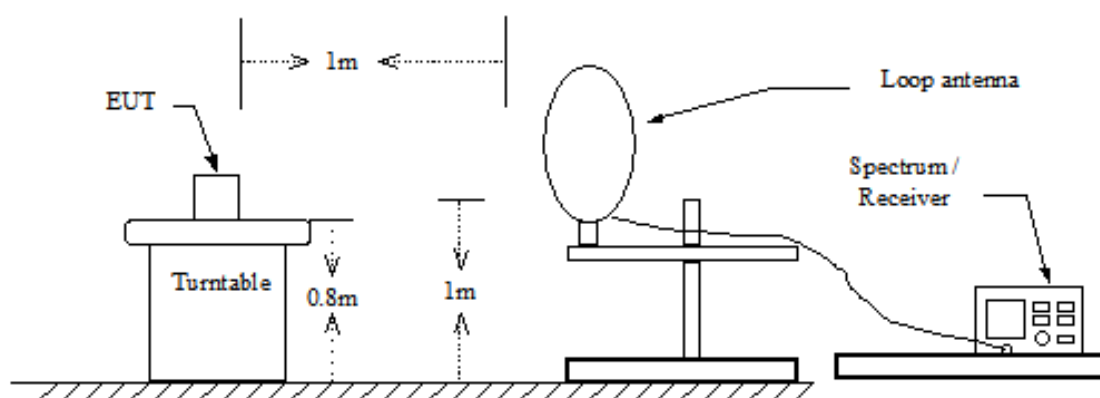

Below 1 GHz

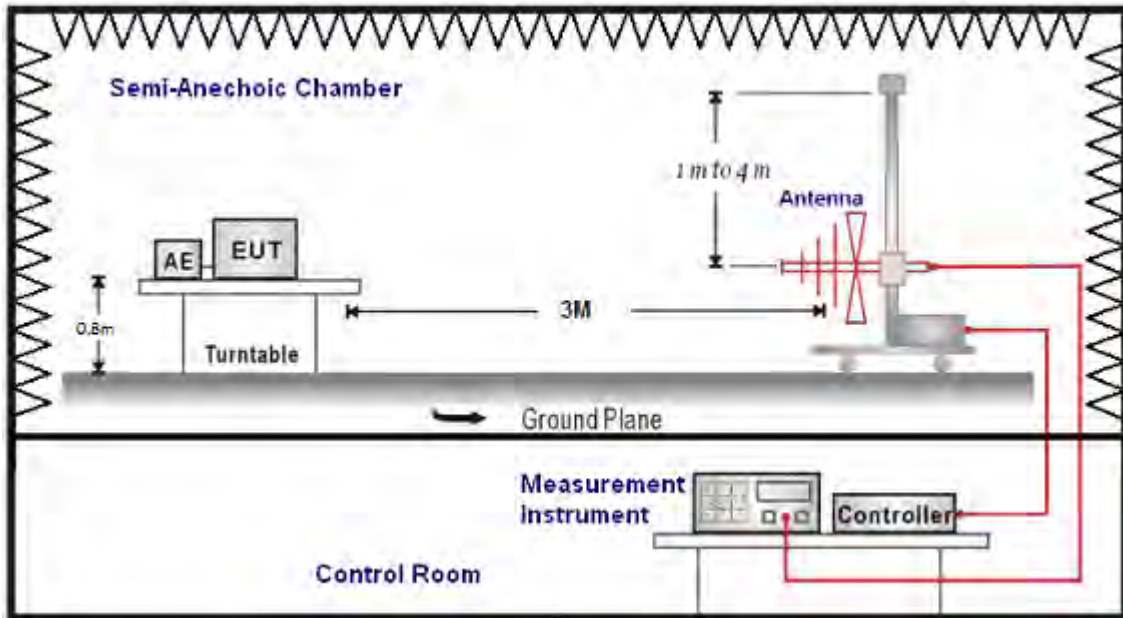

Above 1 GHz

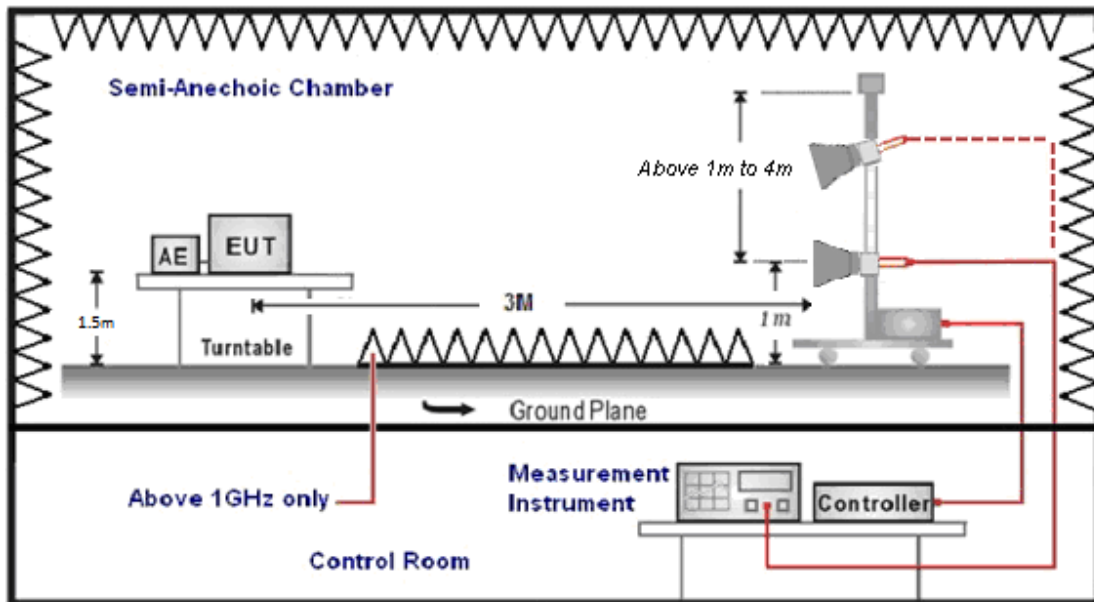



■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ **Limit**

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Diversity mode:

Directional = Max. Gain : 4.08 dBi < 6 dBi

CDD and STBC mode:


Directional = $G_{ANT} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 4.25 \text{ dBi} < 6 \text{ dBi}$

BF mode:

Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 10.26 \text{ dBi} > 6 \text{ dBi}$

* power limit shall be reduced = 30 – 4.26 = 25.74 dBm

■ **Test Setup**

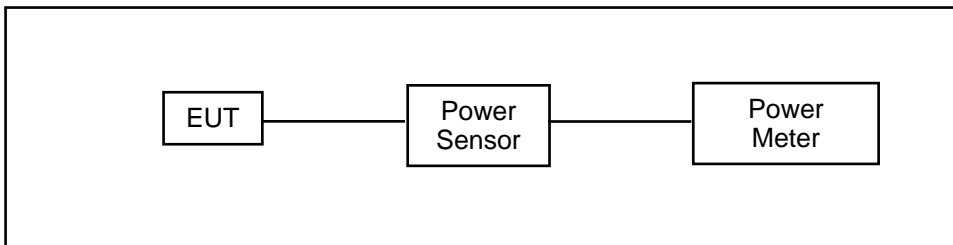

■ **Test Procedure**

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ **Test Setup**

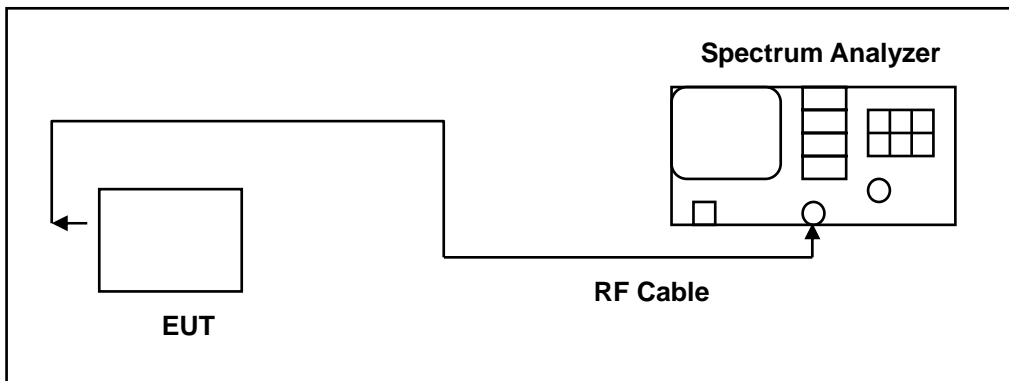

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Spectral Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Diversity mode:

Directional = Max. Gain : 4.08 dBi < 6dBi

STBC mode:

Directional = $G_{ANT} = 10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{ANT}\} = 4.25 \text{ dBi} < 6 \text{ dBi}$

■ Test Setup

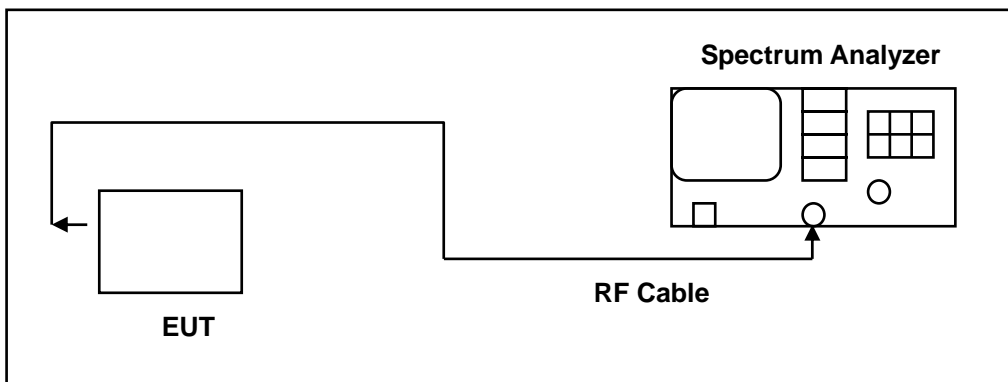

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ **Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ **Test Setup**

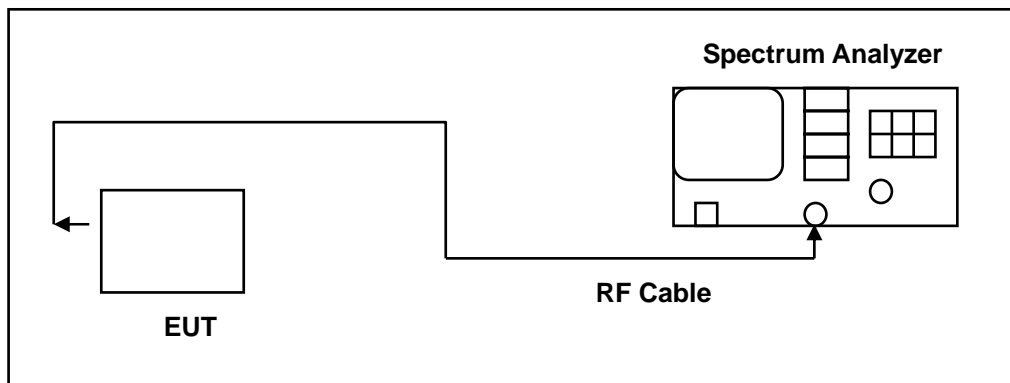

■ **Test Procedure**

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.



4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Description

See section 2 – antenna information.

■ Directional Gain Calculated

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	4.08
IEEE 802.11g	4.25
IEEE 802.11n 2.4 GHz 20 MHz	4.25
IEEE 802.11n 2.4 GHz 40 MHz	4.25
IEEE 802.11ax 2.4 GHz 40 MHz	4.25
IEEE 802.11ax 2.4 GHz 40 MHz	4.25

Beamforming on


Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11n 2.4 GHz 20 MHz	10.26
IEEE 802.11n 2.4 GHz 40 MHz	10.26
IEEE 802.11ax 2.4 GHz 20 MHz	10.26
IEEE 802.11ax 2.4 GHz 40 MHz	10.26

5 Test Results

Annex A. Conducted Emission

POE Injector

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

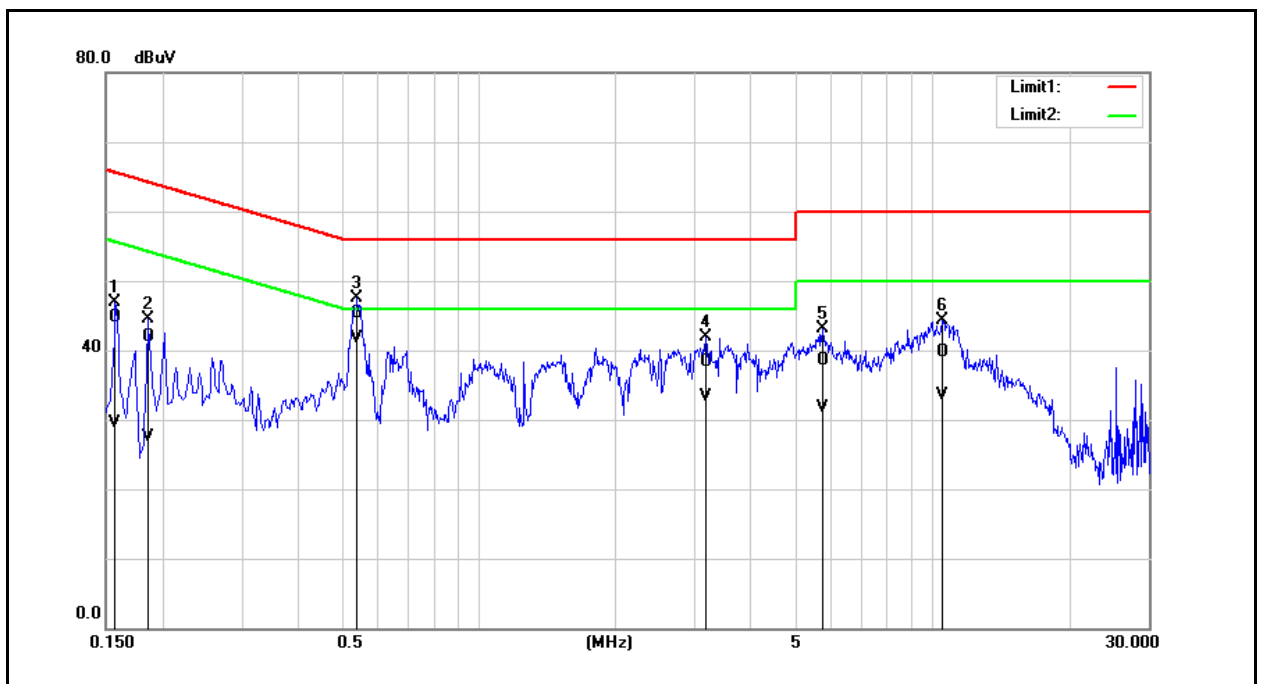


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	34.99	19.84	9.65	44.64	29.49	65.57	55.57	-20.93	-26.08	Pass
2	0.1860	32.32	17.90	9.64	41.96	27.54	64.21	54.21	-22.25	-26.67	Pass
3	0.5380	35.61	32.07	9.66	45.27	41.73	56.00	46.00	-10.73	-4.27	Pass
4	3.1580	28.47	23.47	9.75	38.22	33.22	56.00	46.00	-17.78	-12.78	Pass
5	5.7340	28.66	21.80	9.82	38.48	31.62	60.00	50.00	-21.52	-18.38	Pass
6	10.5300	29.86	23.66	9.91	39.77	33.57	60.00	50.00	-20.23	-16.43	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

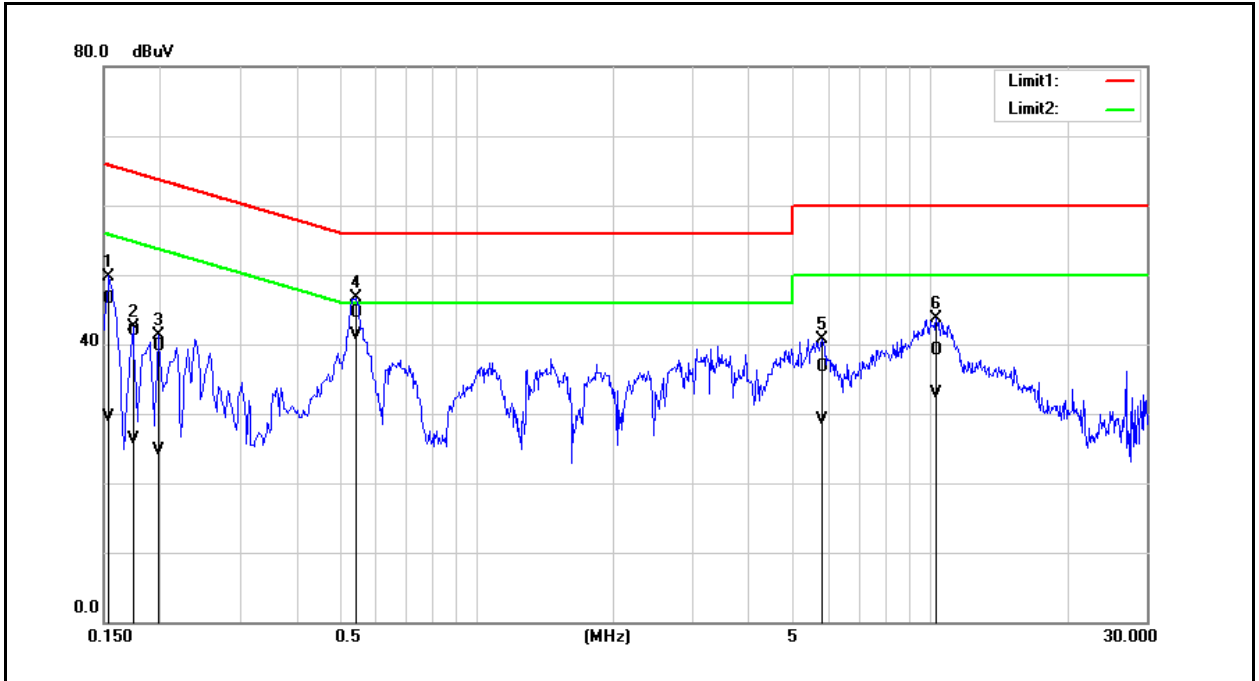


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	36.87	19.88	9.68	46.55	29.56	65.78	55.78	-19.23	-26.22	Pass
2	0.1740	32.21	16.61	9.68	41.89	26.29	64.77	54.77	-22.88	-28.48	Pass
3	0.1980	30.10	15.13	9.67	39.77	24.80	63.69	53.69	-23.92	-28.89	Pass
4	0.5420	34.88	31.65	9.69	44.57	41.34	56.00	46.00	-11.43	-4.66	Pass
5	5.7660	26.84	19.29	9.86	36.70	29.15	60.00	50.00	-23.30	-20.85	Pass
6	10.3260	29.21	22.97	9.96	39.17	32.93	60.00	50.00	-20.83	-17.07	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

AC Adapter


Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

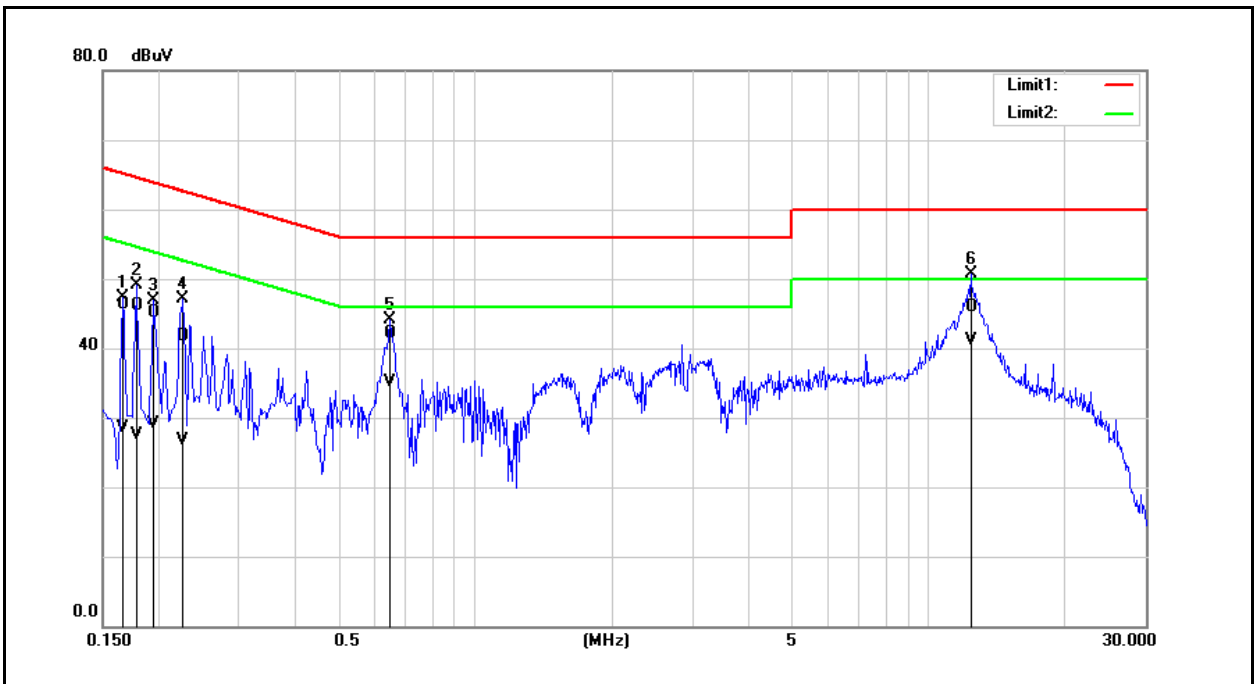

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	36.57	18.79	9.65	46.22	28.44	65.16	55.16	-18.94	-26.72	Pass
2	0.1780	36.43	17.95	9.64	46.07	27.59	64.58	54.58	-18.51	-26.99	Pass
3	0.1940	35.56	19.43	9.64	45.20	29.07	63.86	53.86	-18.66	-24.79	Pass
4	0.2260	32.07	17.05	9.64	41.71	26.69	62.60	52.60	-20.89	-25.91	Pass
5	0.6460	32.38	25.49	9.66	42.04	35.15	56.00	46.00	-13.96	-10.85	Pass
6	12.3380	35.92	31.13	9.93	45.85	41.06	60.00	50.00	-14.15	-8.94	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1		
Description:			

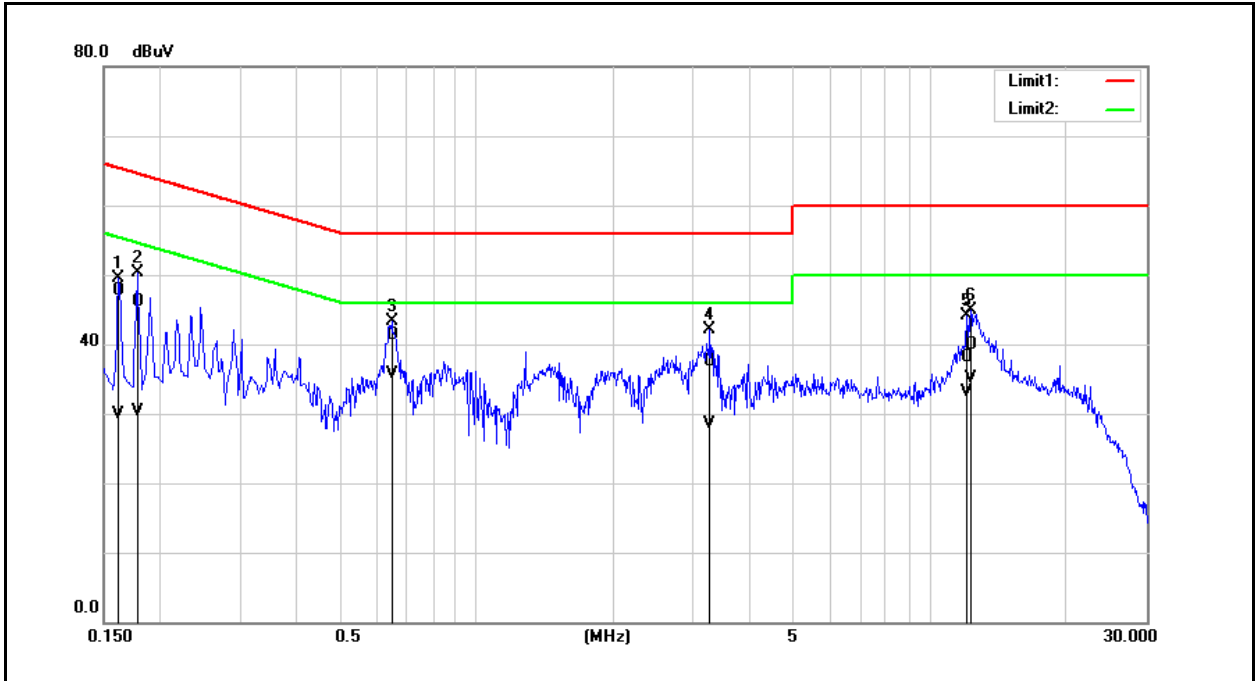

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	38.09	20.30	9.68	47.77	29.98	65.36	55.36	-17.59	-25.38	Pass
2	0.1780	36.35	20.62	9.67	46.02	30.29	64.58	54.58	-18.56	-24.29	Pass
3	0.6500	31.63	26.05	9.69	41.32	35.74	56.00	46.00	-14.68	-10.26	Pass
4	3.2700	27.77	18.72	9.78	37.55	28.50	56.00	46.00	-18.45	-17.50	Pass
5	12.0580	28.12	23.17	10.02	38.14	33.19	60.00	50.00	-21.86	-16.81	Pass
6	12.2780	29.91	25.02	10.02	39.93	35.04	60.00	50.00	-20.07	-14.96	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

ANT-0					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	19.28	0.085	≤ 30
	2437		19.21	0.083	≤ 30
	2462		19.32	0.086	≤ 30
Mode 3	2412	6 M	16.66	0.046	≤ 30
	2437		19.24	0.084	≤ 30
	2462		16.74	0.047	≤ 30
Mode 4	2412	26 M	17.34	0.054	≤ 30
	2437		19.31	0.085	≤ 30
	2462		16.77	0.048	≤ 30
Mode 5	2422	54 M	16.81	0.048	≤ 30
	2437		17.54	0.057	≤ 30
	2452		15.44	0.035	≤ 30
Mode 6	2412	MCS0	16.72	0.047	≤ 30
	2437		19.21	0.083	≤ 30
	2462		14.74	0.030	≤ 30
Mode 7	2422	MCS0	15.82	0.038	≤ 30
	2437		16.54	0.045	≤ 30
	2452		14.41	0.028	≤ 30

Note: The relevant measured result has the offset with cable loss already.



ANT-1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	19.42	0.087	≤ 30
	2437		19.24	0.084	≤ 30
	2462		19.49	0.089	≤ 30
Mode 3	2412	6 M	16.82	0.048	≤ 30
	2437		19.35	0.086	≤ 30
	2462		16.83	0.048	≤ 30
Mode 4	2412	26 M	17.28	0.053	≤ 30
	2437		19.34	0.086	≤ 30
	2462		16.62	0.046	≤ 30
Mode 5	2422	54 M	16.84	0.048	≤ 30
	2437		17.57	0.057	≤ 30
	2452		15.52	0.036	≤ 30
Mode 6	2412	MCS0	16.81	0.048	≤ 30
	2437		19.32	0.086	≤ 30
	2462		14.82	0.030	≤ 30
Mode 7	2422	MCS0	15.96	0.039	≤ 30
	2437		16.71	0.047	≤ 30
	2452		14.58	0.029	≤ 30

Note: The relevant measured result has the offset with cable loss already.



ANT-2					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	19.14	0.082	≤ 30
	2437		18.91	0.078	≤ 30
	2462		18.94	0.078	≤ 30
Mode 3	2412	6 M	16.58	0.045	≤ 30
	2437		19.15	0.082	≤ 30
	2462		16.69	0.047	≤ 30
Mode 4	2412	26 M	16.84	0.048	≤ 30
	2437		19.02	0.080	≤ 30
	2462		16.42	0.044	≤ 30
Mode 5	2422	54 M	16.82	0.048	≤ 30
	2437		17.49	0.056	≤ 30
	2452		15.47	0.035	≤ 30
Mode 6	2412	MCS0	16.54	0.045	≤ 30
	2437		19.14	0.082	≤ 30
	2462		14.58	0.029	≤ 30
Mode 7	2422	MCS0	15.81	0.038	≤ 30
	2437		16.74	0.047	≤ 30
	2452		14.52	0.028	≤ 30

Note: The relevant measured result has the offset with cable loss already.



ANT-3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 2	2412	1 M	19.09	0.081	≤ 30
	2437		18.92	0.078	≤ 30
	2462		19.04	0.080	≤ 30
Mode 3	2412	6 M	16.64	0.046	≤ 30
	2437		19.14	0.082	≤ 30
	2462		16.71	0.047	≤ 30
Mode 4	2412	26 M	16.81	0.048	≤ 30
	2437		18.94	0.078	≤ 30
	2462		16.54	0.045	≤ 30
Mode 5	2422	54 M	16.74	0.047	≤ 30
	2437		17.51	0.056	≤ 30
	2452		15.42	0.035	≤ 30
Mode 6	2412	MCS0	16.58	0.045	≤ 30
	2437		19.08	0.081	≤ 30
	2462		14.64	0.029	≤ 30
Mode 7	2422	MCS0	15.88	0.039	≤ 30
	2437		16.66	0.046	≤ 30
	2452		14.51	0.028	≤ 30

Note: The relevant measured result has the offset with cable loss already.

ANT-0+1+2+3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 3	2412	6 M	22.70	0.186	≤ 30
	2437		25.24	0.334	≤ 30
	2462		22.76	0.189	≤ 30
Mode 4	2412	26 M	23.09	0.204	≤ 30
	2437		25.18	0.329	≤ 30
	2462		22.61	0.182	≤ 30
Mode 5	2422	54 M	22.82	0.192	≤ 30
	2437		23.55	0.226	≤ 30
	2452		21.48	0.141	≤ 30
Mode 6	2412	MCS0	22.68	0.186	≤ 30
	2437		25.21	0.332	≤ 30
	2462		20.72	0.118	≤ 30
Mode 7	2422	MCS0	21.89	0.154	≤ 30
	2437		22.68	0.186	≤ 30
	2452		20.53	0.113	≤ 30

Note: The relevant measured result has the offset with cable loss already.

Beamforming on

ANT-0					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 4	2412	26 M	10.76	0.012	≤ 25.74
	2437		13.01	0.020	≤ 25.74
	2462		10.58	0.011	≤ 25.74
Mode 5	2422	54 M	10.42	0.011	≤ 25.74
	2437		11.14	0.013	≤ 25.74
	2452		9.06	0.008	≤ 25.74
Mode 6	2412	MCS0	10.34	0.011	≤ 25.74
	2437		13.04	0.020	≤ 25.74
	2462		8.23	0.007	≤ 25.74
Mode 7	2422	MCS0	9.46	0.009	≤ 25.74
	2437		10.21	0.010	≤ 25.74
	2452		8.06	0.006	≤ 25.74

ANT-1					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 4	2412	26 M	10.84	0.012	≤ 25.74
	2437		13.04	0.020	≤ 25.74
	2462		10.39	0.011	≤ 25.74
Mode 5	2422	54 M	10.45	0.011	≤ 25.74
	2437		11.19	0.013	≤ 25.74
	2452		8.99	0.008	≤ 25.74
Mode 6	2412	MCS0	10.32	0.011	≤ 25.74
	2437		13.04	0.020	≤ 25.74
	2462		8.46	0.007	≤ 25.74
Mode 7	2422	MCS0	9.42	0.009	≤ 25.74
	2437		10.28	0.011	≤ 25.74
	2452		8.11	0.006	≤ 25.74

Note: The relevant measured result has the offset with cable loss already.

ANT-2					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 4	2412	26 M	10.42	0.011	≤ 25.74
	2437		12.74	0.019	≤ 25.74
	2462		9.86	0.010	≤ 25.74
Mode 5	2422	54 M	10.26	0.011	≤ 25.74
	2437		10.91	0.012	≤ 25.74
	2452		8.85	0.008	≤ 25.74
Mode 6	2412	MCS0	10.22	0.011	≤ 25.74
	2437		12.94	0.020	≤ 25.74
	2462		8.18	0.007	≤ 25.74
Mode 7	2422	MCS0	9.29	0.008	≤ 25.74
	2437		10.04	0.010	≤ 25.74
	2452		7.99	0.006	≤ 25.74

ANT-3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 4	2412	26 M	10.59	0.011	≤ 25.74
	2437		12.72	0.019	≤ 25.74
	2462		9.92	0.010	≤ 25.74
Mode 5	2422	54 M	10.49	0.011	≤ 25.74
	2437		10.94	0.012	≤ 25.74
	2452		8.95	0.008	≤ 25.74
Mode 6	2412	MCS0	10.25	0.011	≤ 25.74
	2437		12.91	0.020	≤ 25.74
	2462		8.14	0.007	≤ 25.74
Mode 7	2422	MCS0	9.42	0.009	≤ 25.74
	2437		10.13	0.010	≤ 25.74
	2452		8.02	0.006	≤ 25.74

Note: The relevant measured result has the offset with cable loss already.

ANT-0+1+2+3					
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Limit
			Measurement Results		
			dBm	W	dBm
Mode 4	2412	26 M	16.68	0.047	≤ 25.74
	2437		18.90	0.078	≤ 25.74
	2462		16.22	0.042	≤ 25.74
Mode 5	2422	54 M	16.43	0.044	≤ 25.74
	2437		17.07	0.051	≤ 25.74
	2452		14.98	0.032	≤ 25.74
Mode 6	2412	MCS0	16.30	0.043	≤ 25.74
	2437		19.00	0.079	≤ 25.74
	2462		14.27	0.027	≤ 25.74
Mode 7	2422	MCS0	15.42	0.035	≤ 25.74
	2437		16.19	0.042	≤ 25.74
	2452		14.07	0.026	≤ 25.74

Note: The relevant measured result has the offset with cable loss already.



6 dB RF Bandwidth Measurement

ANT-0			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 3	2412	16390	≥ 500
	2437	16370	≥ 500
	2462	16390	≥ 500
Mode 4	2412	17580	≥ 500
	2437	17390	≥ 500
	2462	17190	≥ 500
Mode 5	2412	35420	≥ 500
	2437	36180	≥ 500
	2462	35350	≥ 500
Mode 6	2412	18740	≥ 500
	2437	18270	≥ 500
	2462	18370	≥ 500
Mode 7	2422	37450	≥ 500
	2437	37780	≥ 500
	2452	36910	≥ 500



ANT-1			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 2	2412	7613	≥ 500
	2437	7127	≥ 500
	2462	7149	≥ 500
Mode 3	2412	16380	≥ 500
	2437	16350	≥ 500
	2462	16370	≥ 500
Mode 4	2412	17600	≥ 500
	2437	17580	≥ 500
	2462	17600	≥ 500
Mode 5	2422	35750	≥ 500
	2437	34550	≥ 500
	2452	35710	≥ 500
Mode 6	2412	19000	≥ 500
	2437	18890	≥ 500
	2462	18920	≥ 500
Mode 7	2422	37810	≥ 500
	2437	37800	≥ 500
	2452	37900	≥ 500



ANT-2			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 3	2412	16330	≥ 500
	2437	16020	≥ 500
	2462	16340	≥ 500
Mode 4	2412	17580	≥ 500
	2437	17550	≥ 500
	2462	17570	≥ 500
Mode 5	2412	35720	≥ 500
	2437	35730	≥ 500
	2462	36130	≥ 500
Mode 6	2412	19020	≥ 500
	2437	18910	≥ 500
	2462	18950	≥ 500
Mode 7	2422	37820	≥ 500
	2437	38000	≥ 500
	2452	37890	≥ 500

ANT-3			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 3	2412	16360	≥ 500
	2437	16350	≥ 500
	2462	16330	≥ 500
Mode 4	2412	17610	≥ 500
	2437	17580	≥ 500
	2462	17570	≥ 500
Mode 5	2412	35720	≥ 500
	2437	35970	≥ 500
	2462	36020	≥ 500
Mode 6	2412	18800	≥ 500
	2437	18750	≥ 500
	2462	18950	≥ 500
Mode 7	2422	37340	≥ 500
	2437	37680	≥ 500
	2452	37950	≥ 500



Beamforming on

ANT-0			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 4	2412	17570	≥ 500
	2437	17310	≥ 500
	2462	17580	≥ 500
Mode 5	2412	35640	≥ 500
	2437	36100	≥ 500
	2462	36340	≥ 500
Mode 6	2412	18960	≥ 500
	2437	18700	≥ 500
	2462	18800	≥ 500
Mode 7	2422	37150	≥ 500
	2437	37800	≥ 500
	2452	37260	≥ 500

ANT-1			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 4	2412	17610	≥ 500
	2437	17640	≥ 500
	2462	17620	≥ 500
Mode 5	2412	35500	≥ 500
	2437	36340	≥ 500
	2462	35150	≥ 500
Mode 6	2412	18910	≥ 500
	2437	19030	≥ 500
	2462	19000	≥ 500
Mode 7	2422	37830	≥ 500
	2437	37830	≥ 500
	2452	37950	≥ 500



ANT-2			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 4	2412	17580	≥ 500
	2437	17570	≥ 500
	2462	17590	≥ 500
Mode 5	2412	35430	≥ 500
	2437	35400	≥ 500
	2462	36100	≥ 500
Mode 6	2412	18930	≥ 500
	2437	19010	≥ 500
	2462	18820	≥ 500
Mode 7	2422	38130	≥ 500
	2437	37940	≥ 500
	2452	37740	≥ 500


ANT-3			
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Mode 4	2412	17580	≥ 500
	2437	17580	≥ 500
	2462	17620	≥ 500
Mode 5	2412	36130	≥ 500
	2437	36010	≥ 500
	2462	36390	≥ 500
Mode 6	2412	18850	≥ 500
	2437	18940	≥ 500
	2462	18840	≥ 500
Mode 7	2422	37930	≥ 500
	2437	37850	≥ 500
	2452	38060	≥ 500



■ Test Graphs

Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

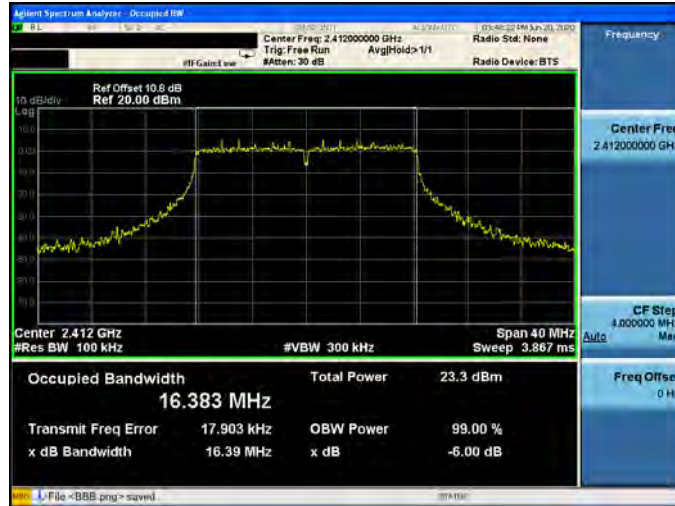

2437 MHz




2462 MHz

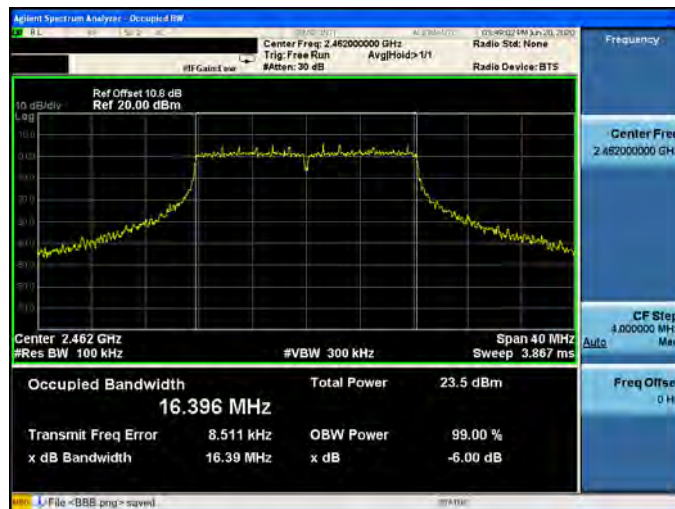


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

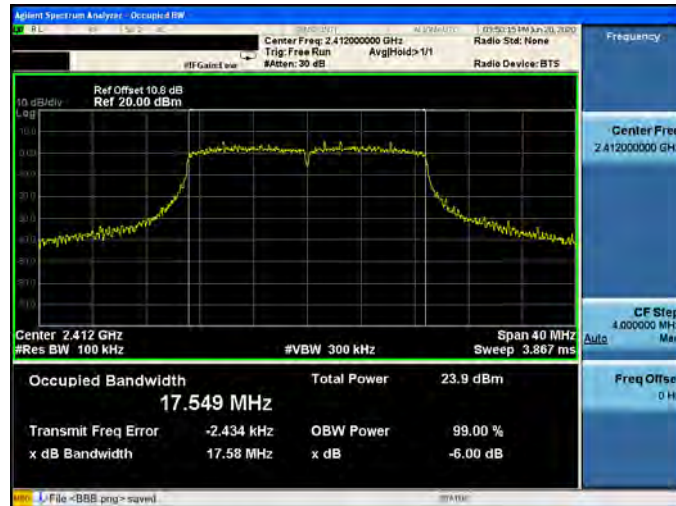

2437 MHz

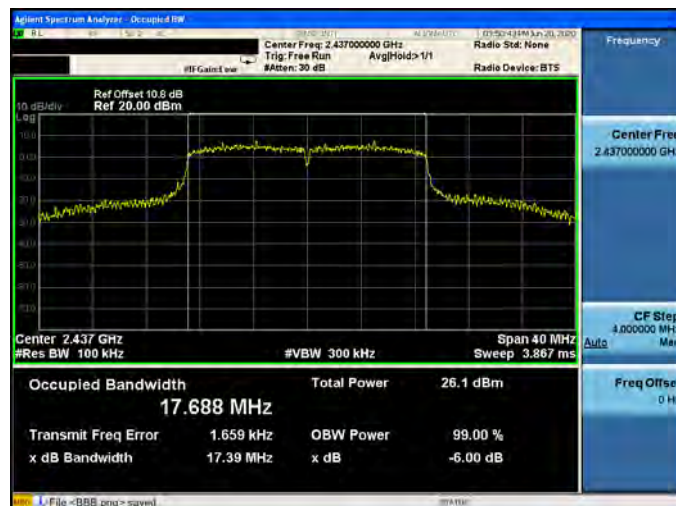


2462 MHz

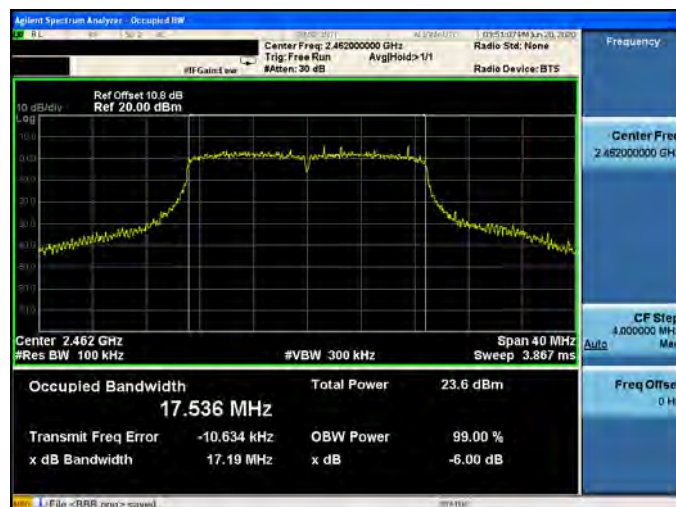




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

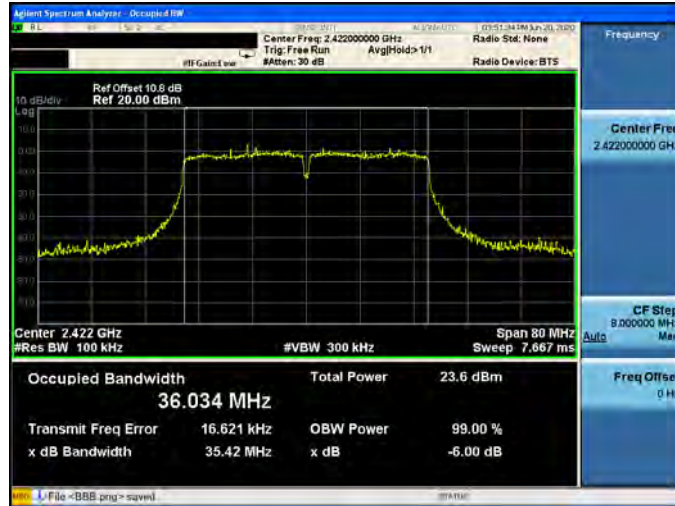

2437 MHz

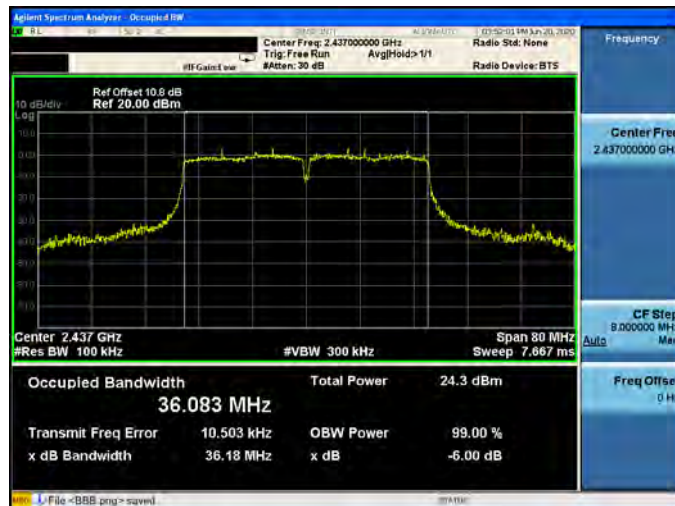

2452 MHz

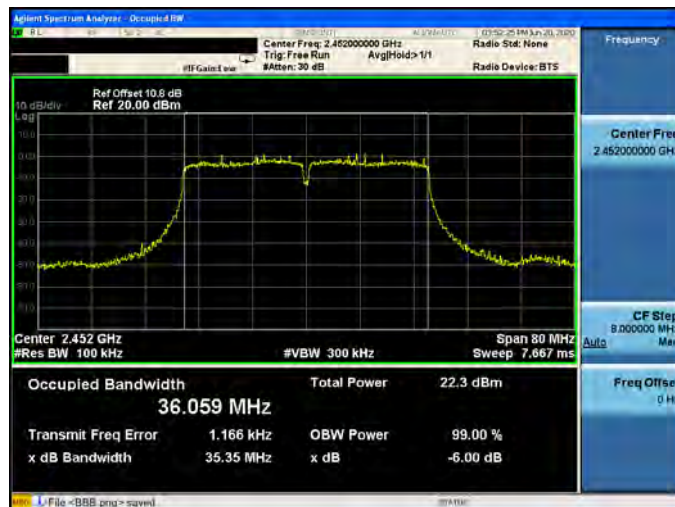



Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-0

<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>24.2 dBm</td> </tr> <tr> <td>18.864 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>11.375 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.74 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	24.2 dBm	18.864 MHz			Transmit Freq Error	OBW Power	99.00 %	11.375 kHz	x dB	-6.00 dB	x dB Bandwidth			18.74 MHz		
Occupied Bandwidth	Total Power	24.2 dBm																	
18.864 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
11.375 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.74 MHz																			
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>26.4 dBm</td> </tr> <tr> <td>18.964 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>7.897 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.27 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	26.4 dBm	18.964 MHz			Transmit Freq Error	OBW Power	99.00 %	7.897 kHz	x dB	-6.00 dB	x dB Bandwidth			18.27 MHz		
Occupied Bandwidth	Total Power	26.4 dBm																	
18.964 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
7.897 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.27 MHz																			
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.9 dBm</td> </tr> <tr> <td>18.834 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-6.968 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.37 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	21.9 dBm	18.834 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.968 kHz	x dB	-6.00 dB	x dB Bandwidth			18.37 MHz		
Occupied Bandwidth	Total Power	21.9 dBm																	
18.834 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-6.968 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.37 MHz																			




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-0

<p>2422 MHz</p>	<p>Center Freq: 2.42200000 GHz</p> <p>Occupied Bandwidth: 37.651 MHz</p> <p>Total Power: 23.2 dBm</p> <p>Transmit Freq Error: 25.084 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 37.45 MHz</p> <p>x dB: -6.00 dB</p>
<p>2437 MHz</p>	<p>Center Freq: 2.43700000 GHz</p> <p>Occupied Bandwidth: 37.644 MHz</p> <p>Total Power: 23.9 dBm</p> <p>Transmit Freq Error: -13.250 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 37.78 MHz</p> <p>x dB: -6.00 dB</p>
<p>2452 MHz</p>	<p>Center Freq: 2.45200000 GHz</p> <p>Occupied Bandwidth: 37.588 MHz</p> <p>Total Power: 21.8 dBm</p> <p>Transmit Freq Error: -8.724 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 36.91 MHz</p> <p>x dB: -6.00 dB</p>




Mode 2: IEEE 802.11b Continuous TX mode_ANT-1


2412 MHz

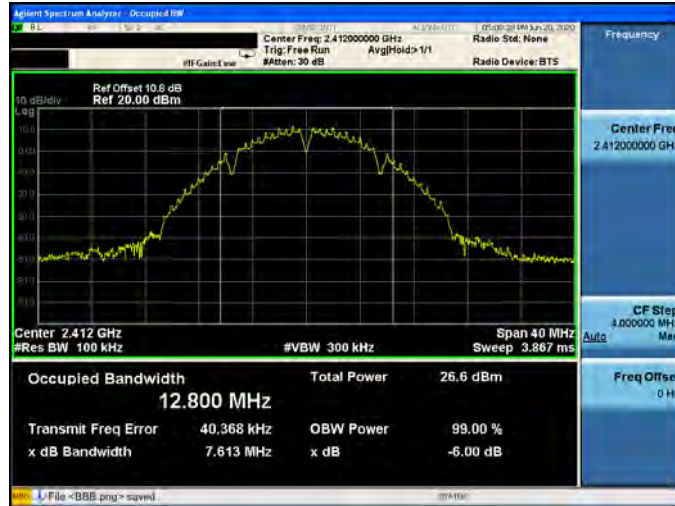

2437 MHz

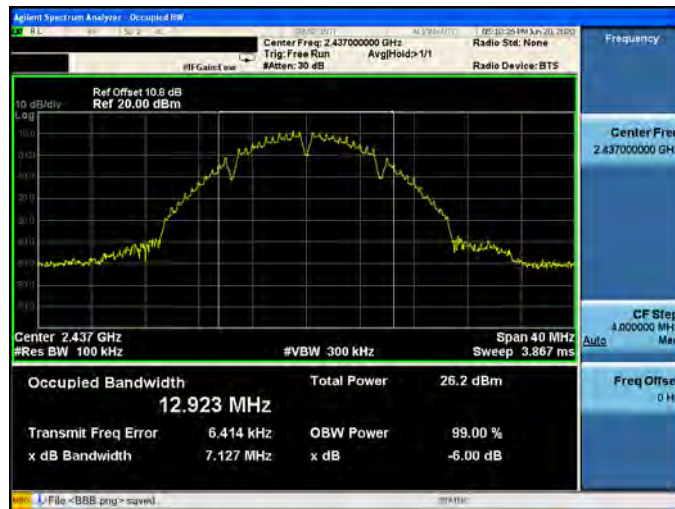


2462 MHz

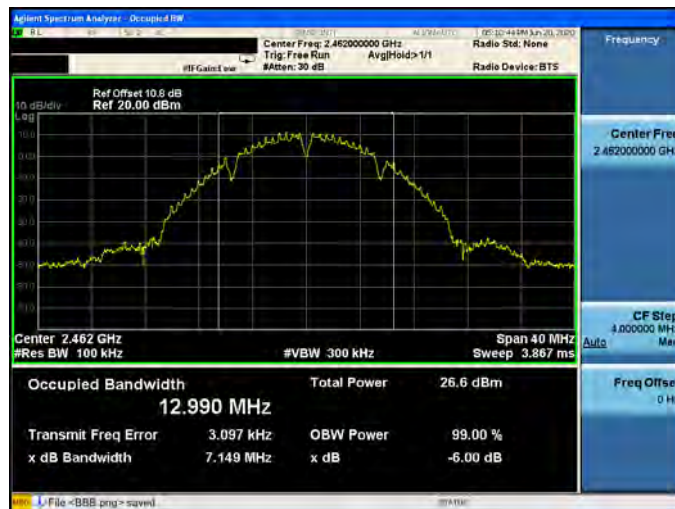




Mode 3: IEEE 802.11g Continuous TX mode_ANT-1

2412 MHz

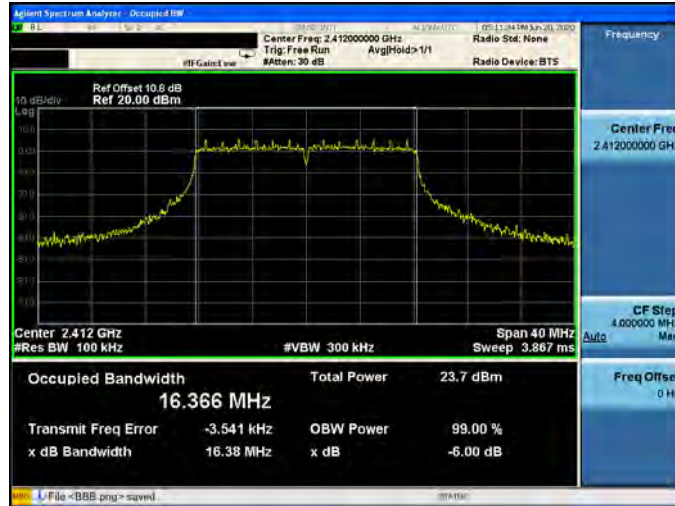

2437 MHz

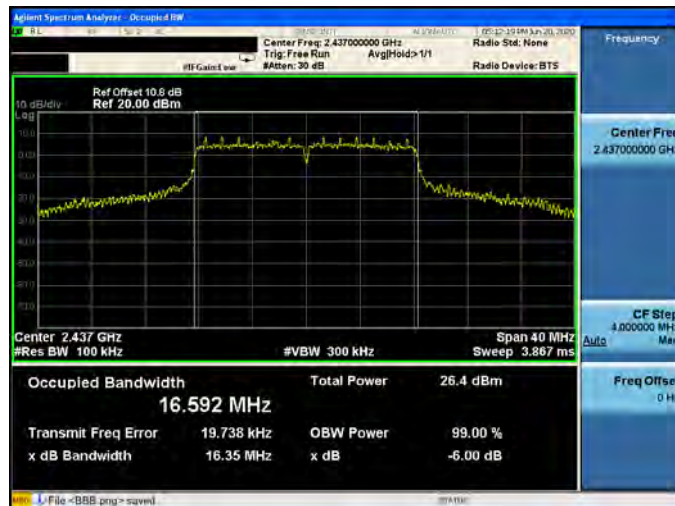


2462 MHz






Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1

2412 MHz

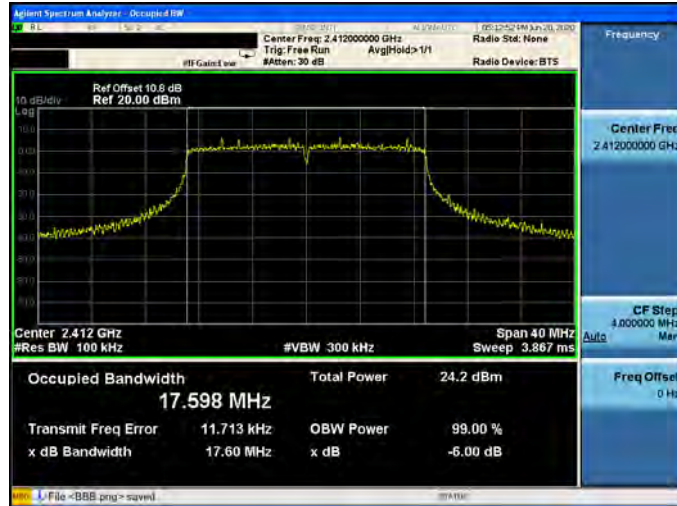

2437 MHz

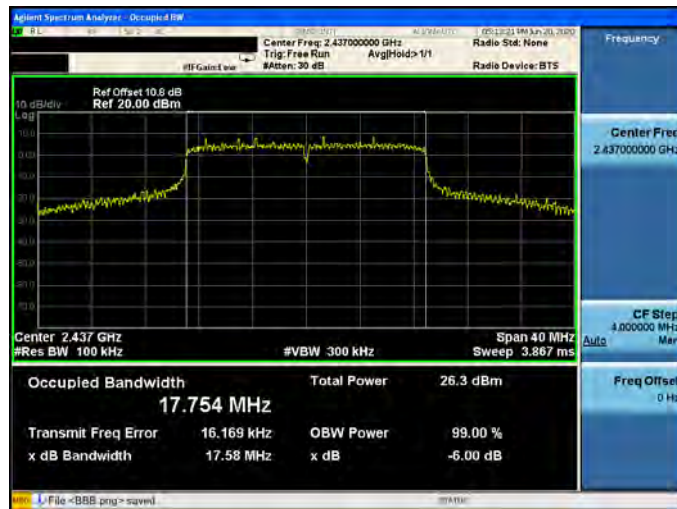


2462 MHz






Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

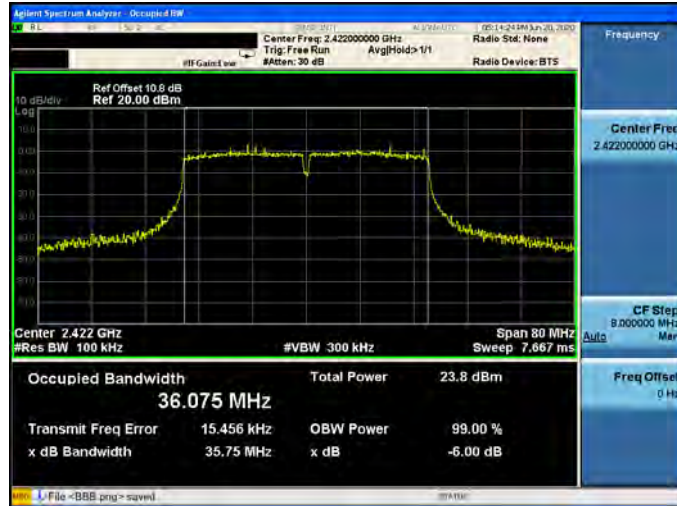

2437 MHz

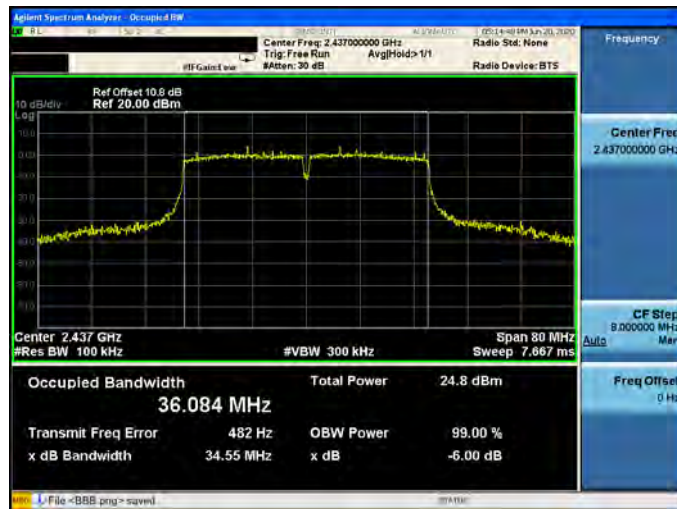

2452 MHz

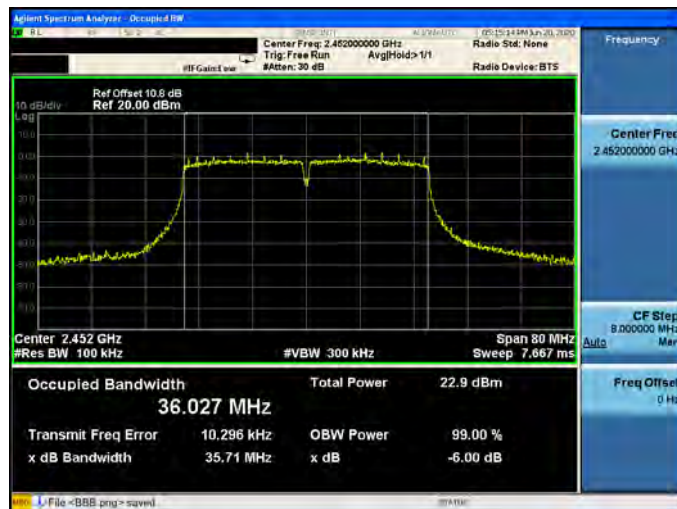




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-1

<p>2412 MHz</p>	<p>Center Freq: 2.412000000 GHz Total Power: 24.0 dBm Occupied Bandwidth: 18.938 MHz Transmit Freq Error: 3.386 kHz x dB Bandwidth: 19.00 MHz</p>
<p>2437 MHz</p>	<p>Center Freq: 2.437000000 GHz Total Power: 26.7 dBm Occupied Bandwidth: 19.096 MHz Transmit Freq Error: -1.031 kHz x dB Bandwidth: 18.89 MHz</p>
<p>2462 MHz</p>	<p>Center Freq: 2.462000000 GHz Total Power: 22.3 dBm Occupied Bandwidth: 18.939 MHz Transmit Freq Error: 2.551 kHz x dB Bandwidth: 18.92 MHz</p>



Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

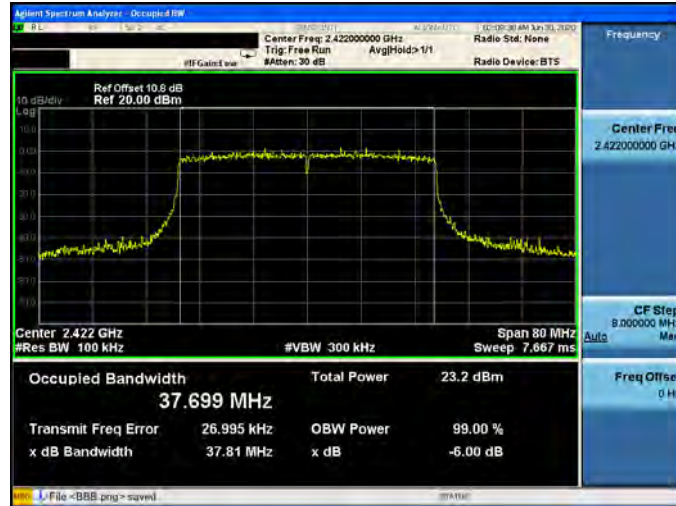

2437 MHz




2452 MHz

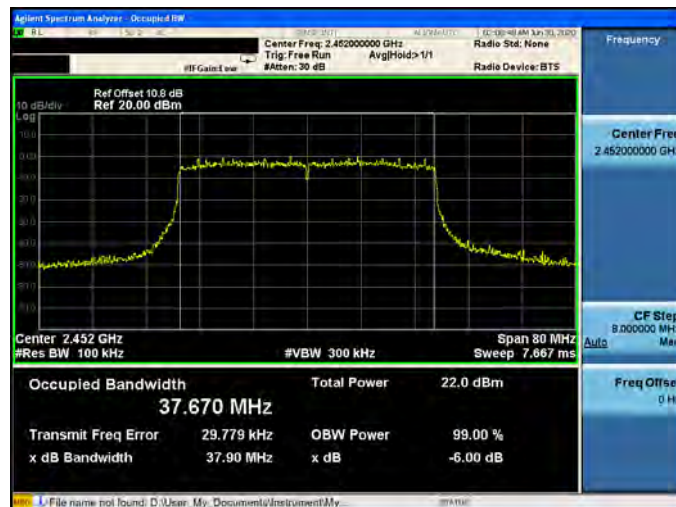



Mode 3: IEEE 802.11g Continuous TX mode_ANT-2


2412 MHz

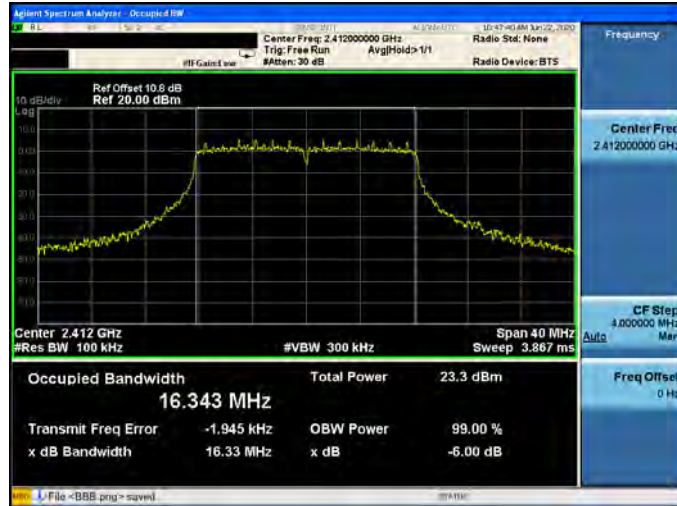

2437 MHz




2462 MHz

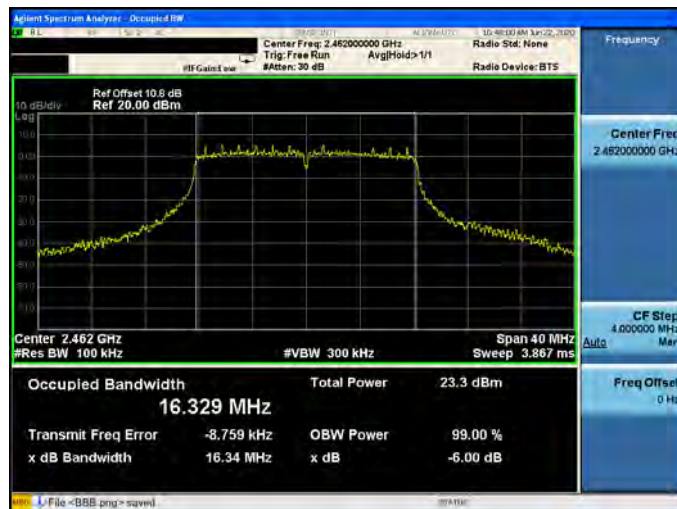




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-2

2412 MHz

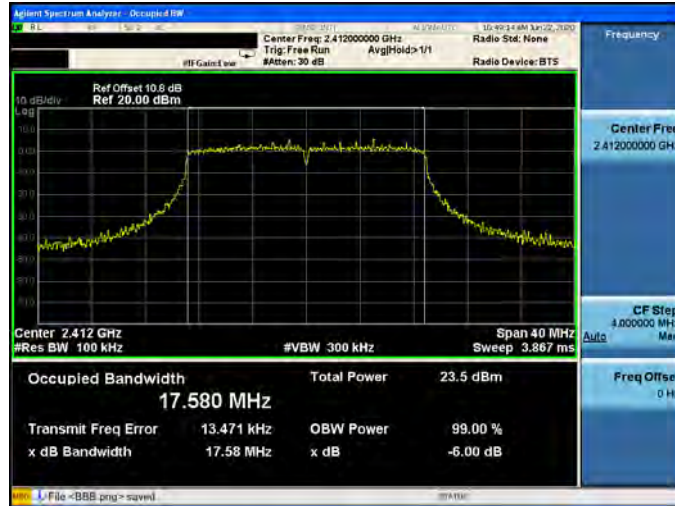

2437 MHz

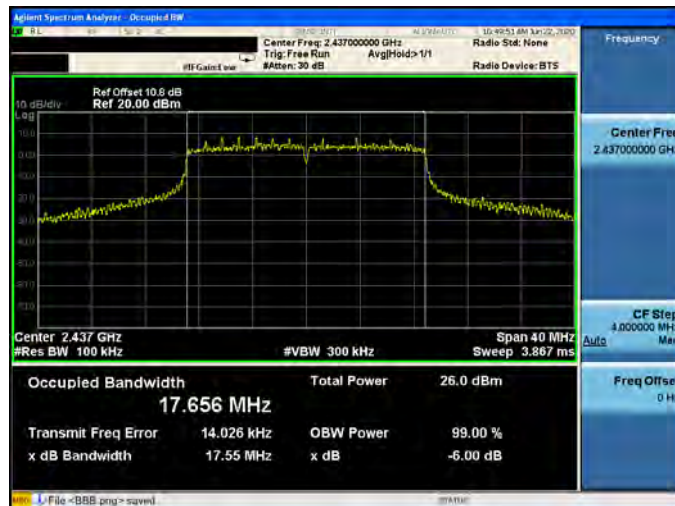


2462 MHz





Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-2


2422 MHz

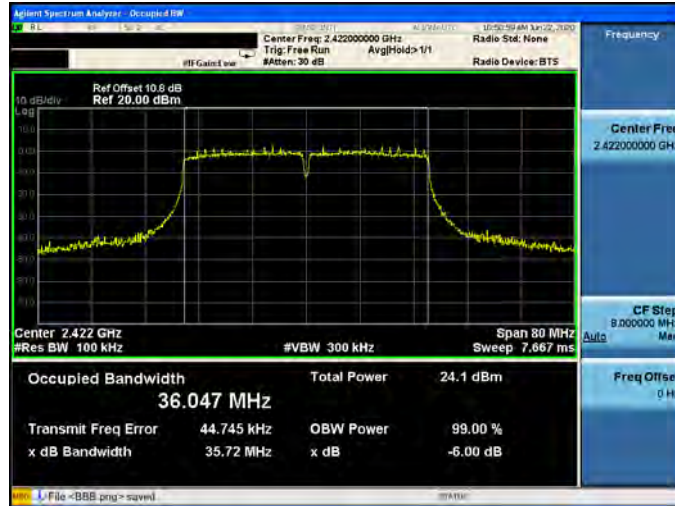

2437 MHz




2452 MHz

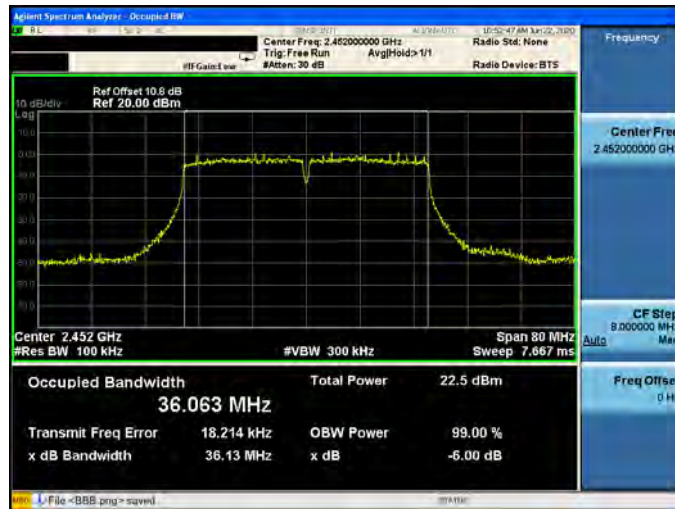




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-2


2412 MHz

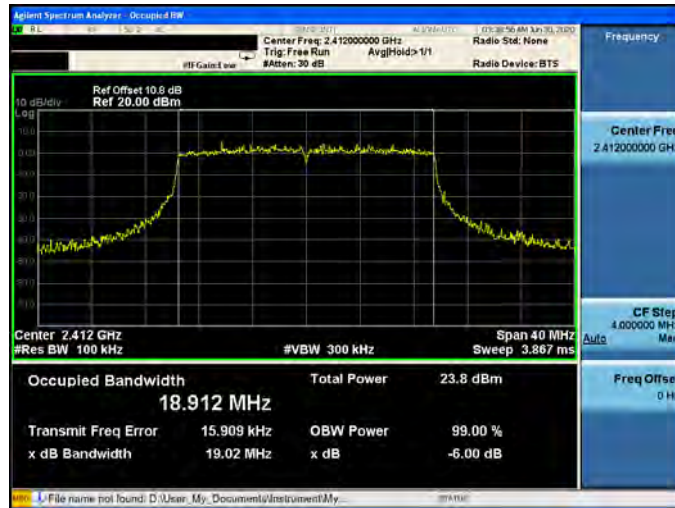

2437 MHz

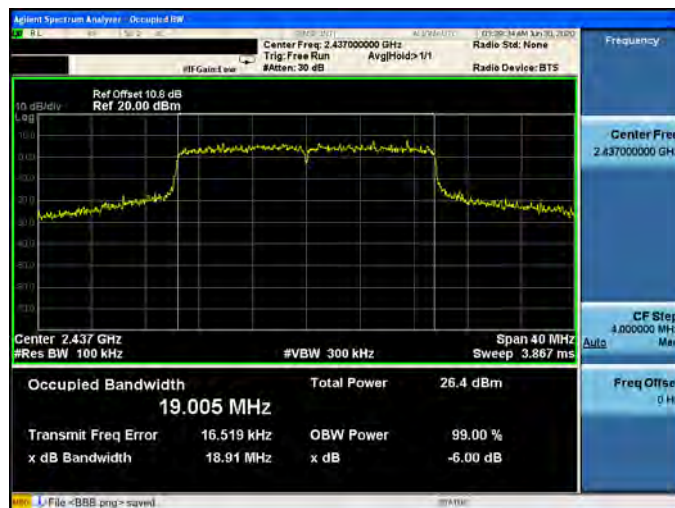

2462 MHz

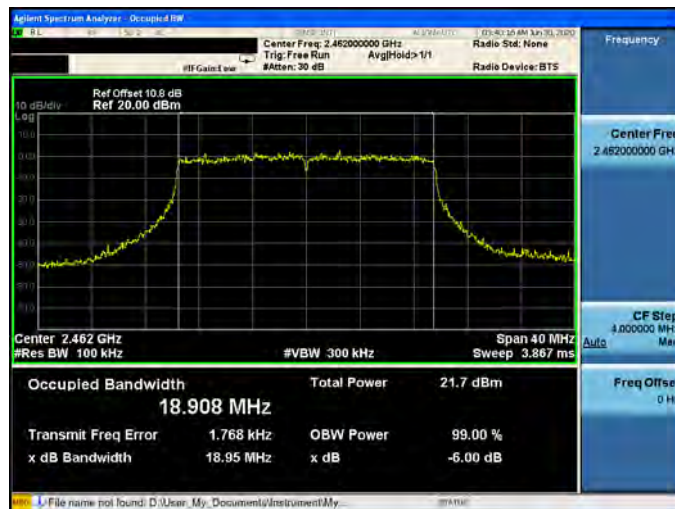




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-2

<p>2422 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth 37.700 MHz</p> <p>Total Power 23.2 dBm</p> <p>Transmit Freq Error 9.741 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 37.82 MHz</p> <p>x dB -6.00 dB</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth 37.703 MHz</p> <p>Total Power 24.2 dBm</p> <p>Transmit Freq Error 16.189 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 38.00 MHz</p> <p>x dB -6.00 dB</p>
<p>2452 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth 37.679 MHz</p> <p>Total Power 22.3 dBm</p> <p>Transmit Freq Error 38.479 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 37.89 MHz</p> <p>x dB -6.00 dB</p>




Mode 3: IEEE 802.11g Continuous TX mode_ANT-3


2412 MHz

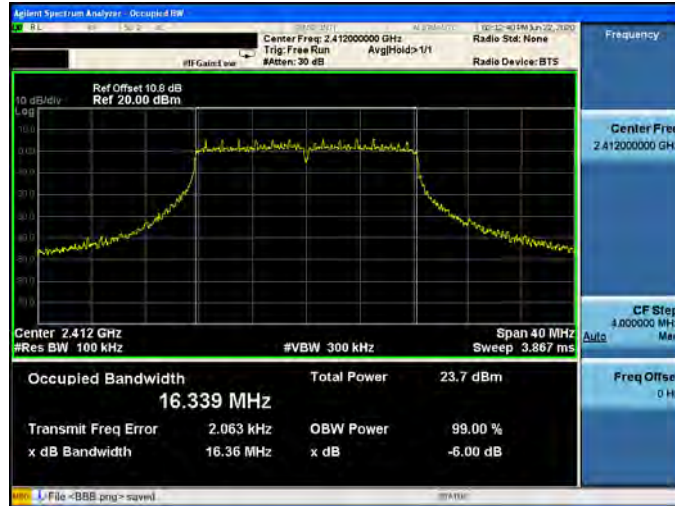

2437 MHz

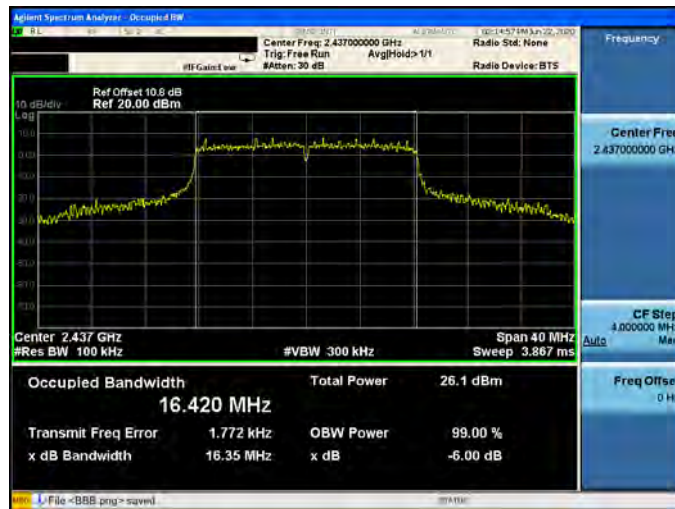


2462 MHz

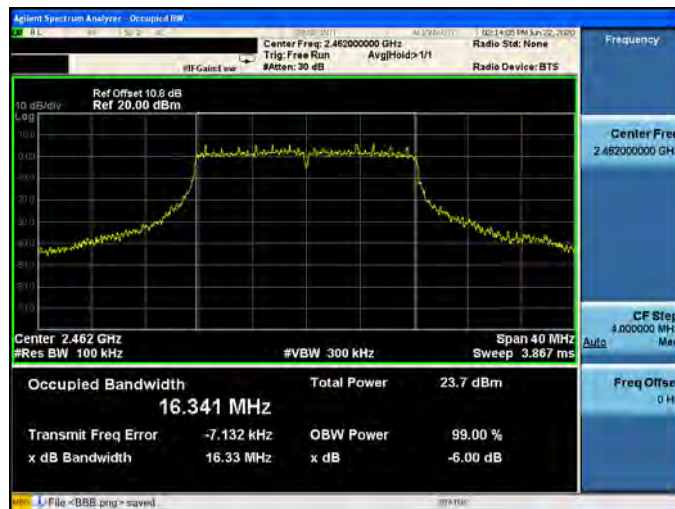



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-3


2412 MHz

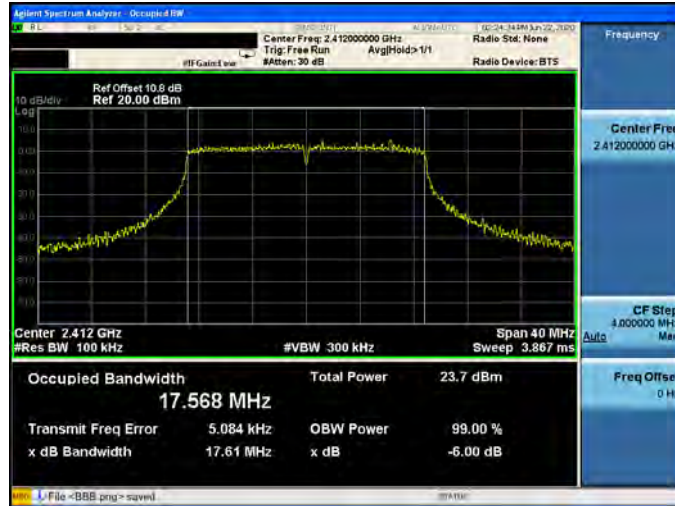

2437 MHz




2462 MHz

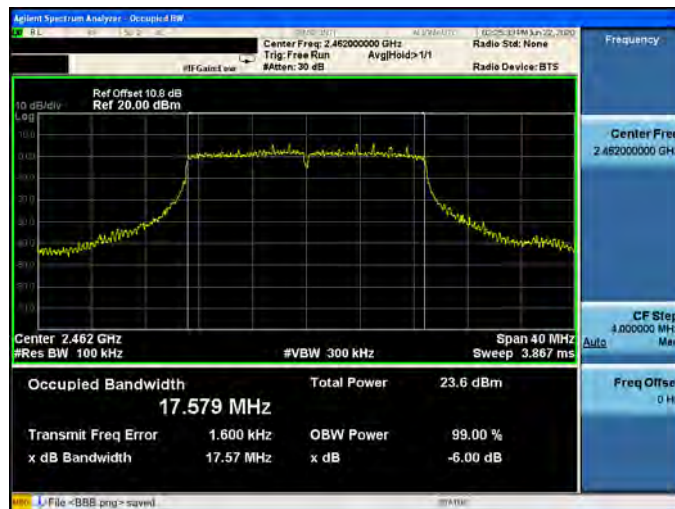




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-3


2422 MHz

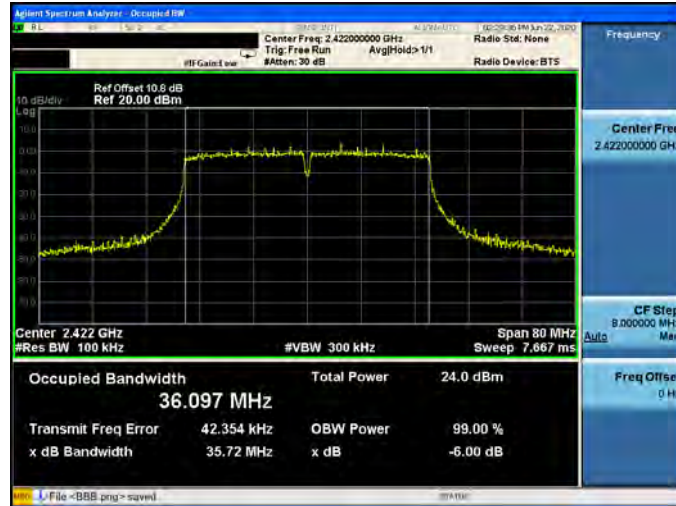

2437 MHz

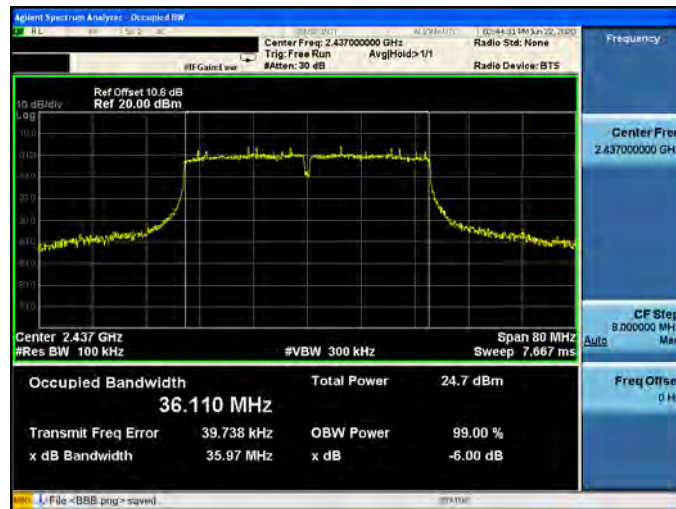


2452 MHz

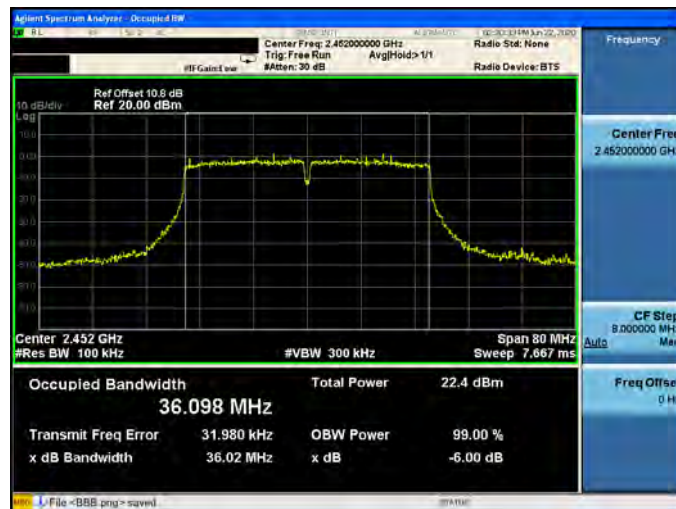




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-3

2412 MHz

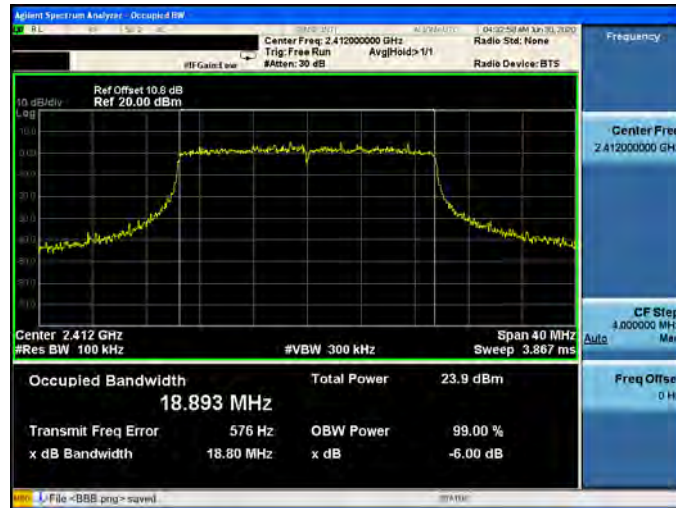

2437 MHz

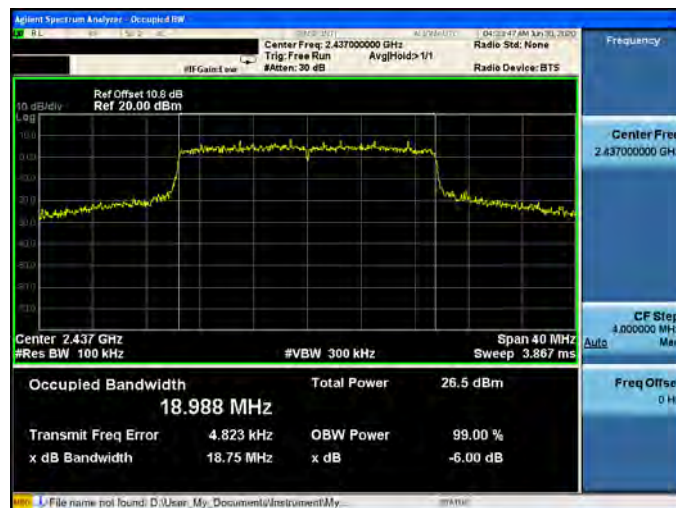

2462 MHz








Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-3

<p>2422 MHz</p>	<p>Center Freq: 2.42200000 GHz</p> <p>Occupied Bandwidth: 37.729 MHz</p> <p>Total Power: 23.2 dBm</p> <p>Transmit Freq Error: 38.726 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 37.34 MHz</p> <p>x dB: -6.00 dB</p>
<p>2437 MHz</p>	<p>Center Freq: 2.43700000 GHz</p> <p>Occupied Bandwidth: 37.700 MHz</p> <p>Total Power: 23.9 dBm</p> <p>Transmit Freq Error: 26.084 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 37.68 MHz</p> <p>x dB: -6.00 dB</p>
<p>2452 MHz</p>	<p>Center Freq: 2.45200000 GHz</p> <p>Occupied Bandwidth: 37.690 MHz</p> <p>Total Power: 22.0 dBm</p> <p>Transmit Freq Error: 21.419 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 37.95 MHz</p> <p>x dB: -6.00 dB</p>

Beamforming on


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

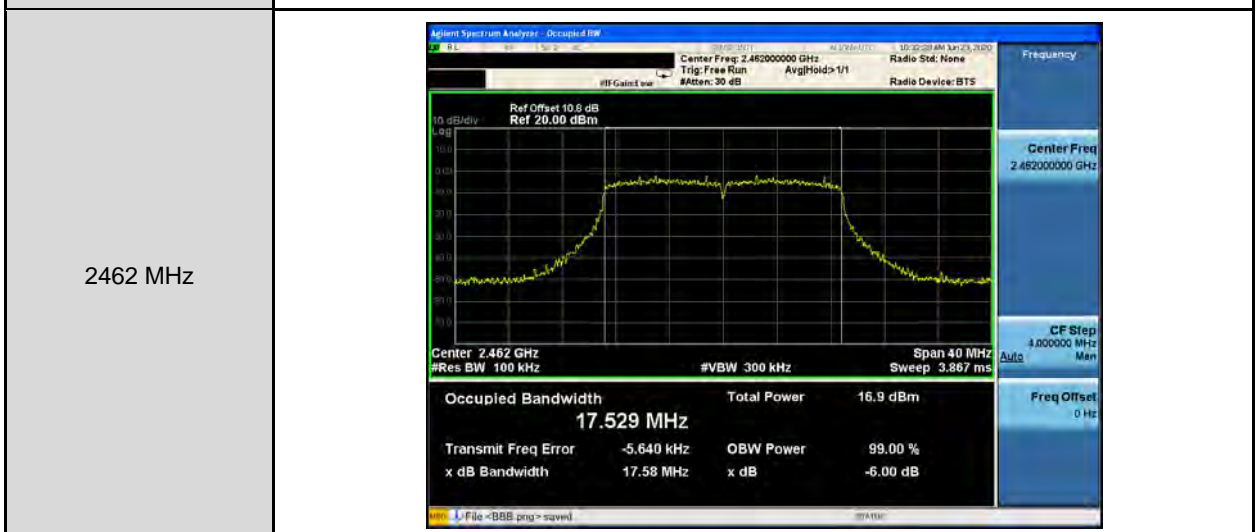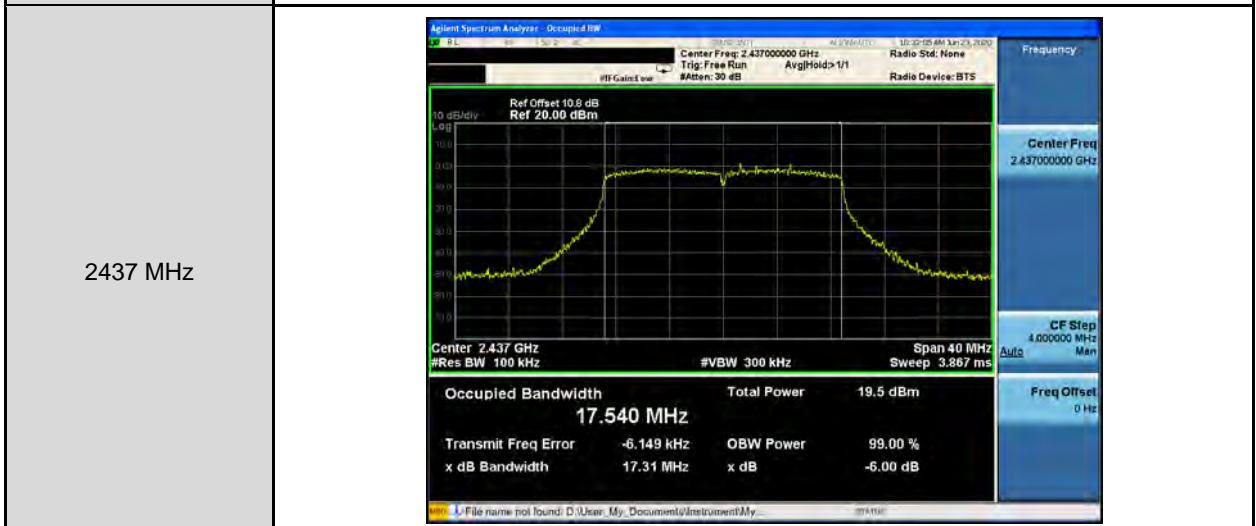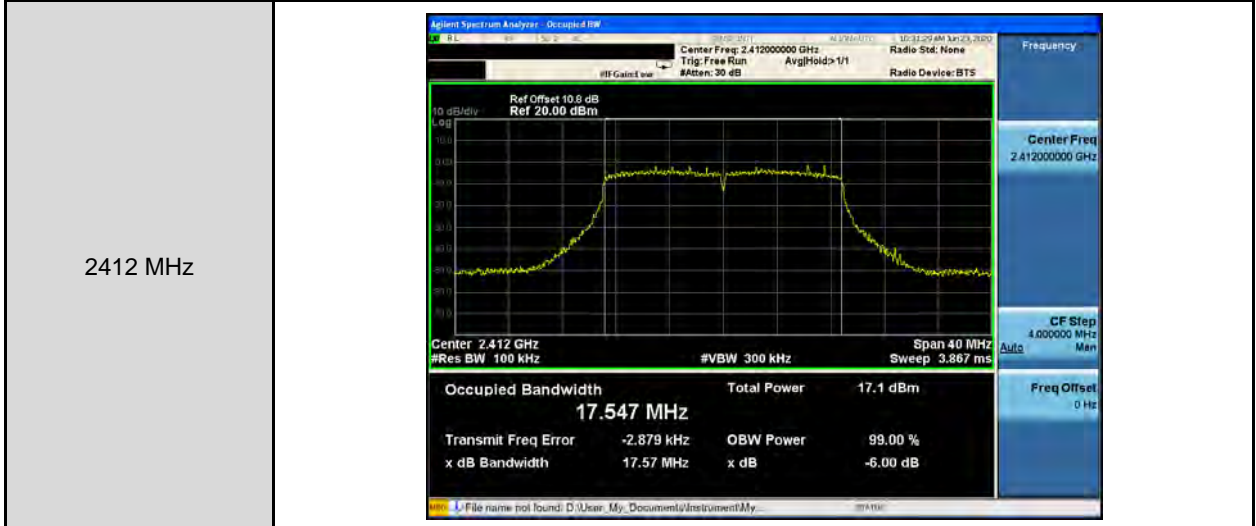



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

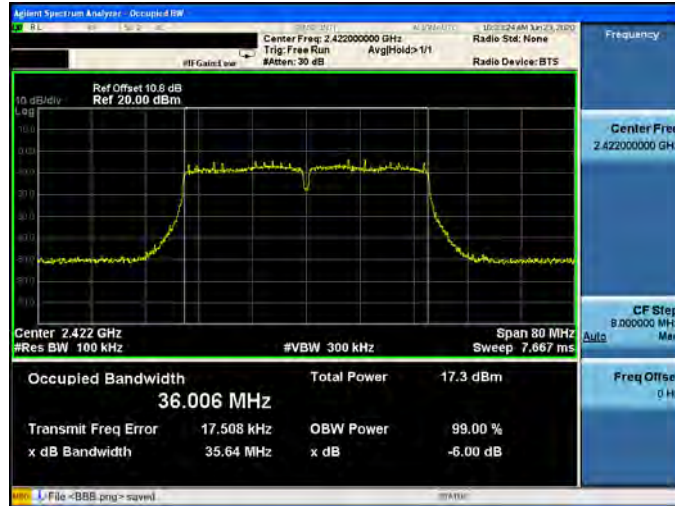

2437 MHz



2452 MHz

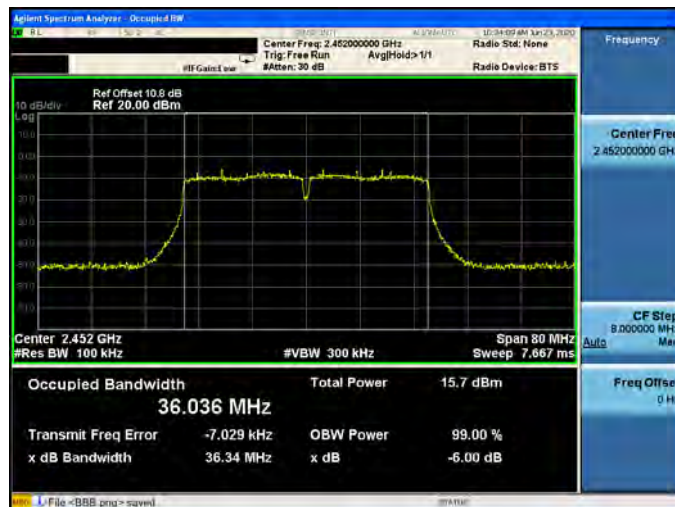




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-0

<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.6 dBm</td> </tr> <tr> <td>18.901 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>3.873 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.96 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.6 dBm	18.901 MHz			Transmit Freq Error	OBW Power	99.00 %	3.873 kHz	x dB	-6.00 dB	x dB Bandwidth			18.96 MHz		
Occupied Bandwidth	Total Power	17.6 dBm																	
18.901 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
3.873 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.96 MHz																			
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.5 dBm</td> </tr> <tr> <td>18.829 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>9.853 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.70 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.5 dBm	18.829 MHz			Transmit Freq Error	OBW Power	99.00 %	9.853 kHz	x dB	-6.00 dB	x dB Bandwidth			18.70 MHz		
Occupied Bandwidth	Total Power	20.5 dBm																	
18.829 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
9.853 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.70 MHz																			
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.5 dBm</td> </tr> <tr> <td>18.855 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.654 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>18.80 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.5 dBm	18.855 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.654 kHz	x dB	-6.00 dB	x dB Bandwidth			18.80 MHz		
Occupied Bandwidth	Total Power	15.5 dBm																	
18.855 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.654 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
18.80 MHz																			



Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

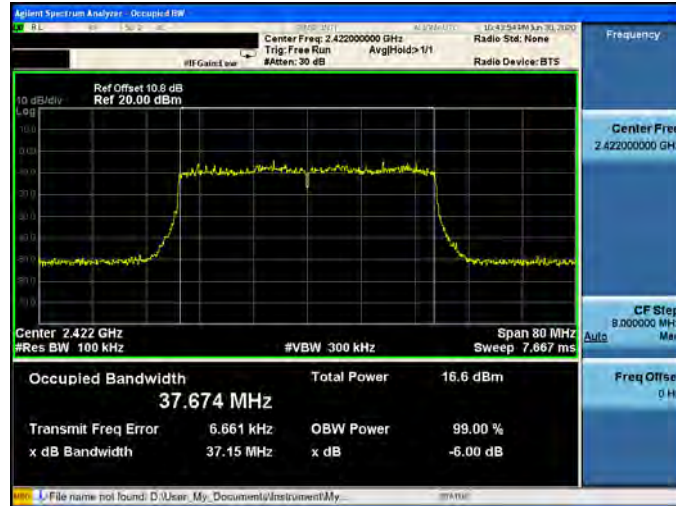

2437 MHz




2452 MHz

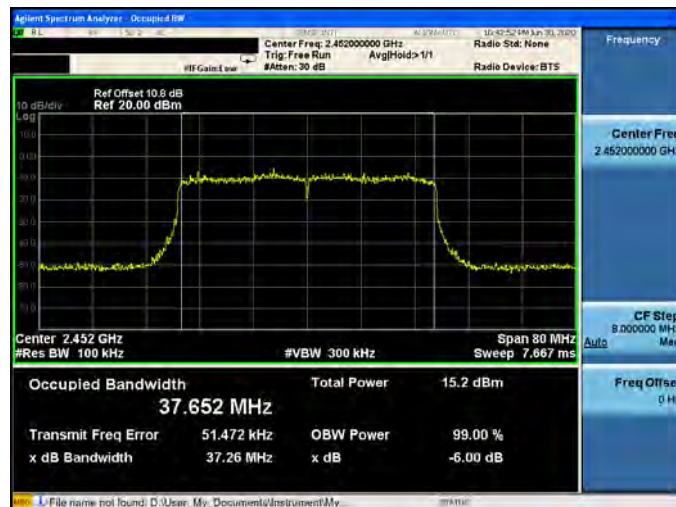



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

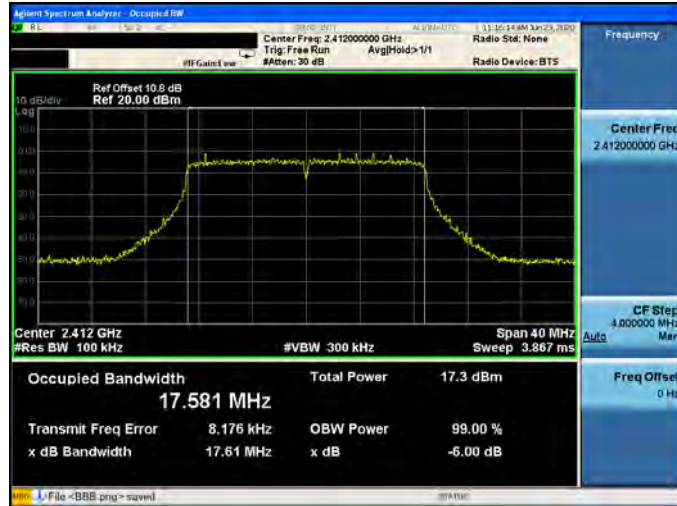

2437 MHz




2462 MHz

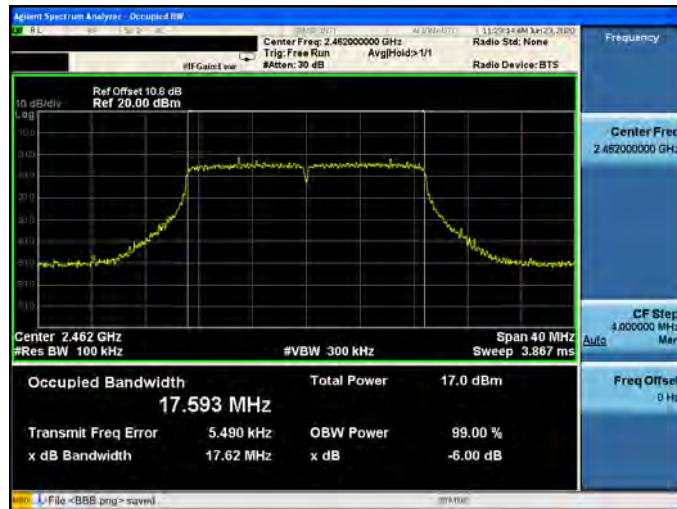


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

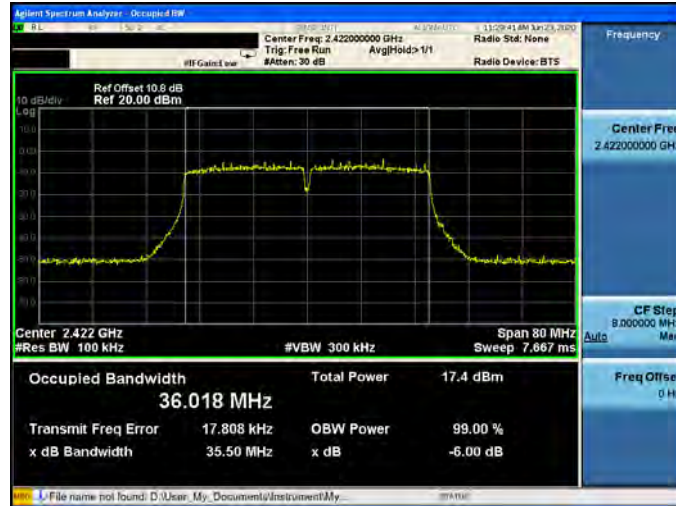

2437 MHz

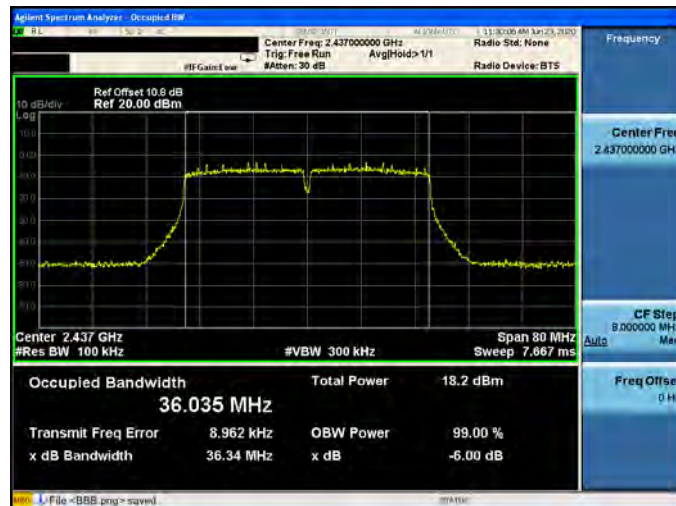


2452 MHz

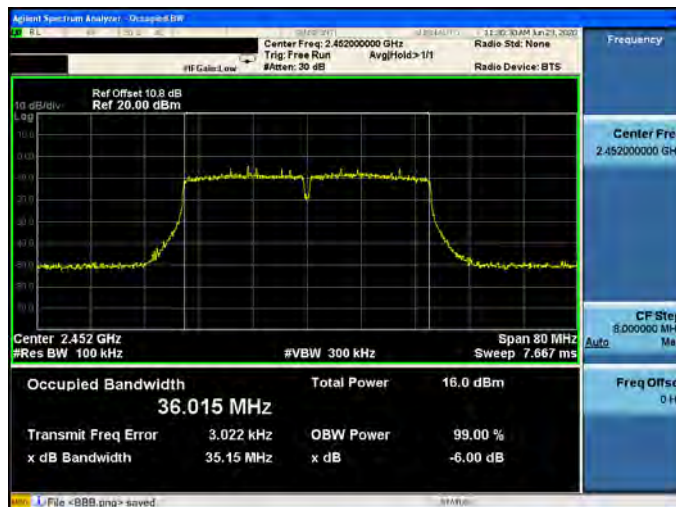




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

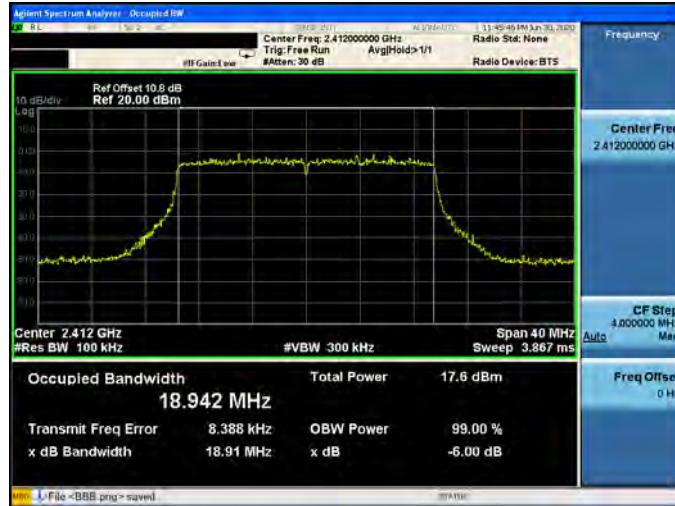

2437 MHz

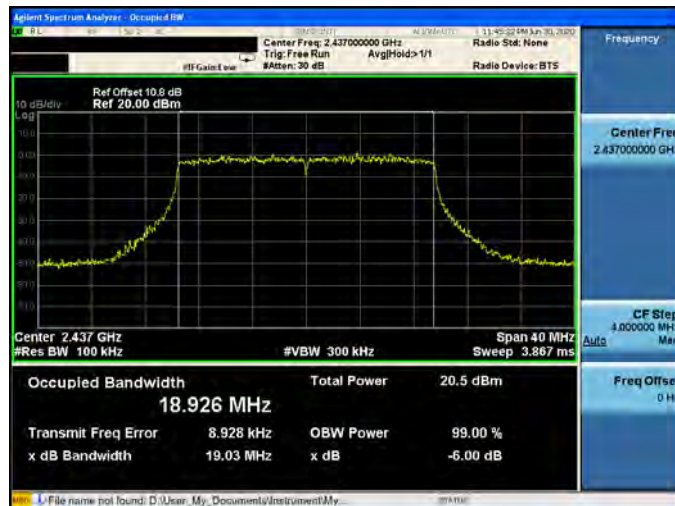


2462 MHz

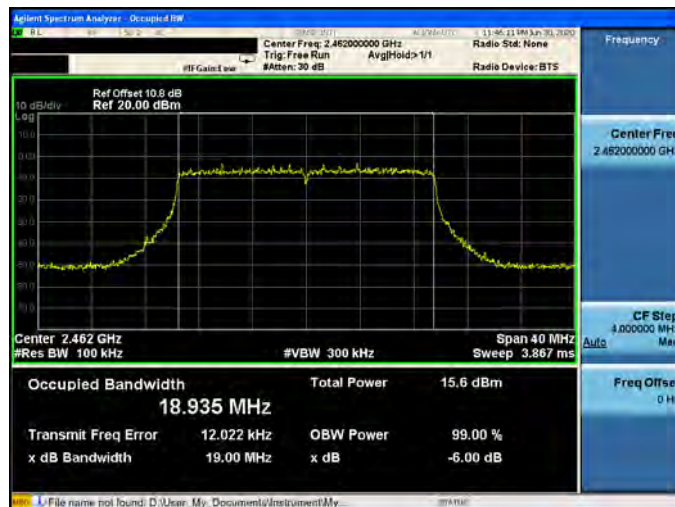




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

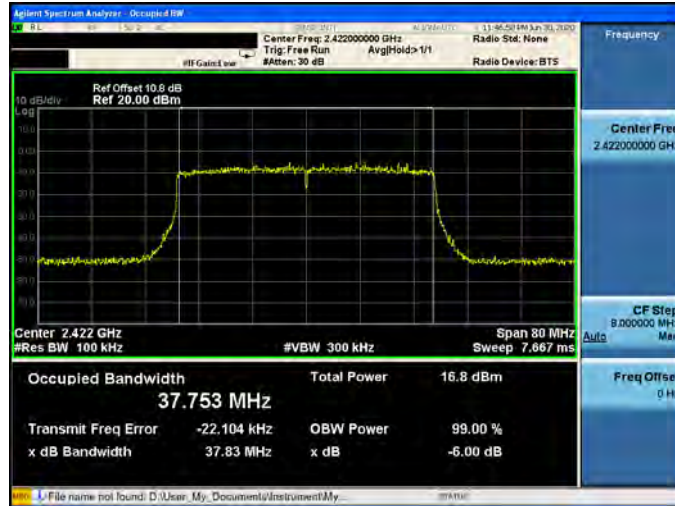

2437 MHz

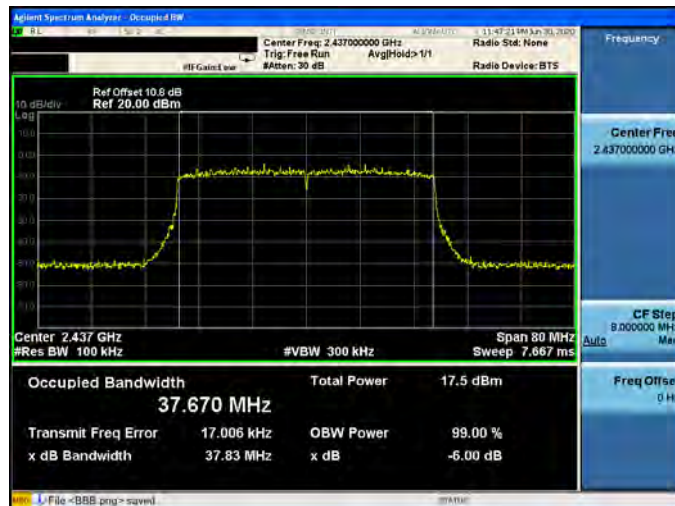


2452 MHz

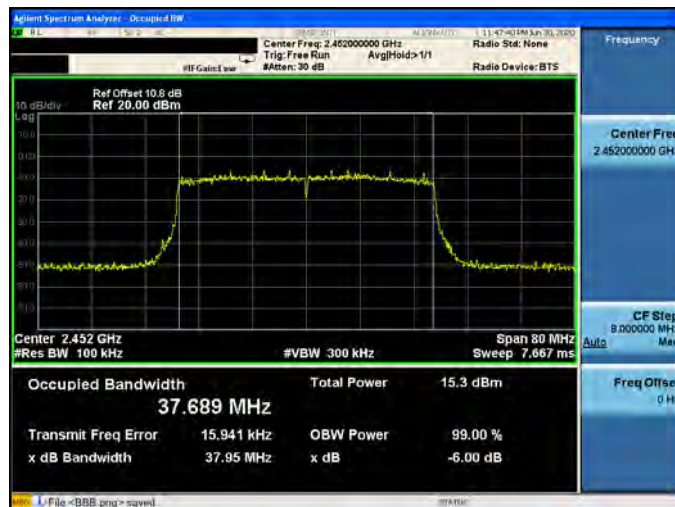




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-2


2412 MHz

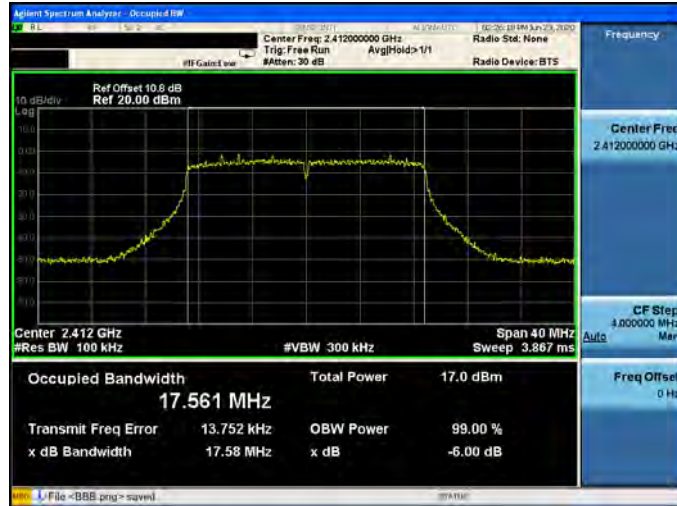

2437 MHz

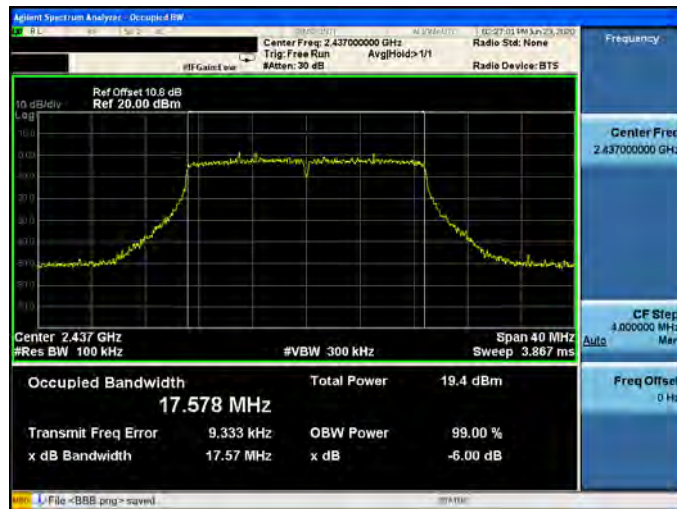


2462 MHz

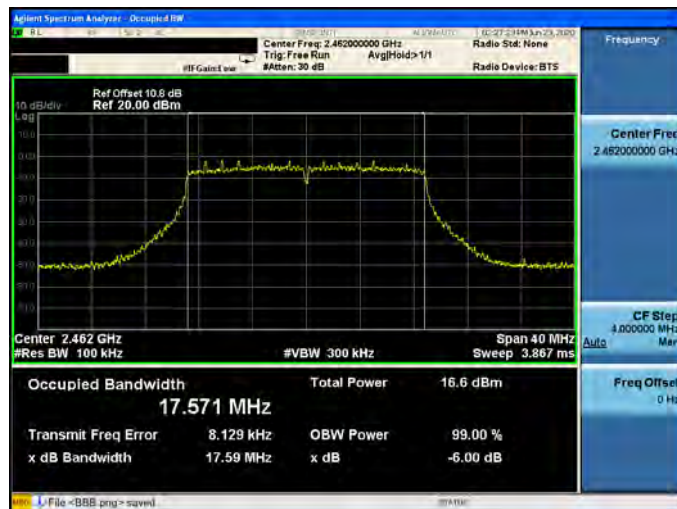




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-2


2422 MHz

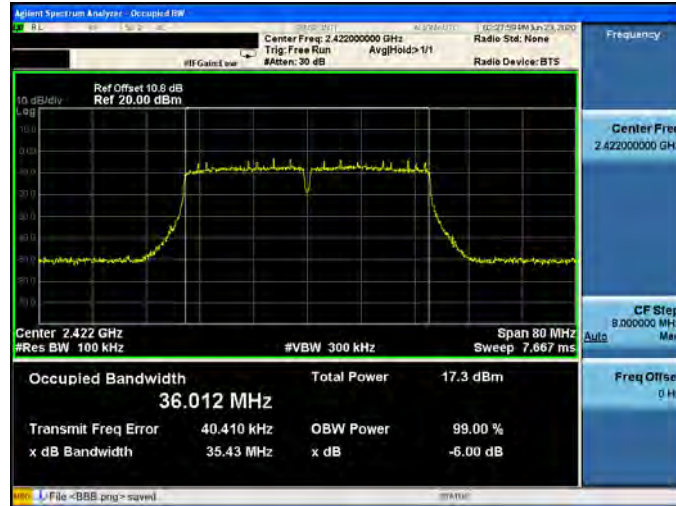

2437 MHz

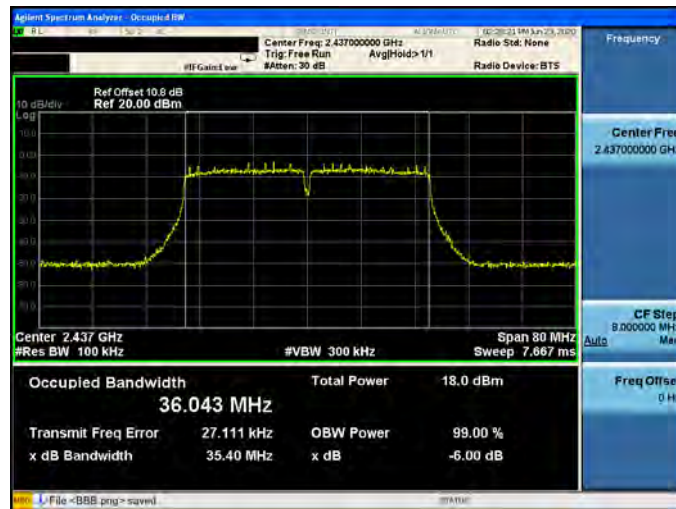

2452 MHz

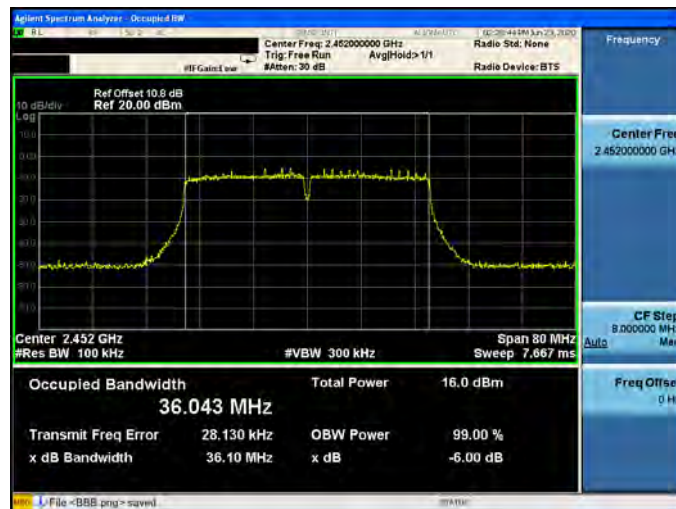




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-2

<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.884 MHz Total Power 17.3 dBm</p> <p>Transmit Freq Error 15.603 kHz OBW Power 99.00 % x dB Bandwidth 18.93 MHz x dB -6.00 dB</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.915 MHz Total Power 20.2 dBm</p> <p>Transmit Freq Error 10.751 kHz OBW Power 99.00 % x dB Bandwidth 19.01 MHz x dB -6.00 dB</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB AvgHold: 1/1 Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.881 MHz Total Power 15.2 dBm</p> <p>Transmit Freq Error 6.887 kHz OBW Power 99.00 % x dB Bandwidth 18.82 MHz x dB -6.00 dB</p>




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-2


2422 MHz

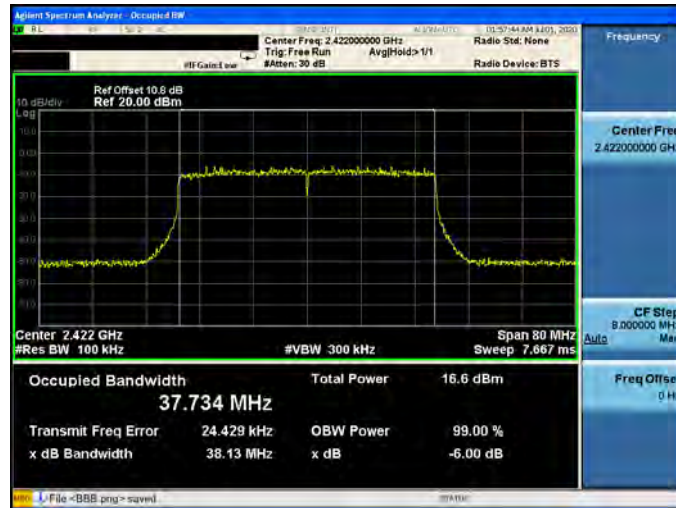

2437 MHz

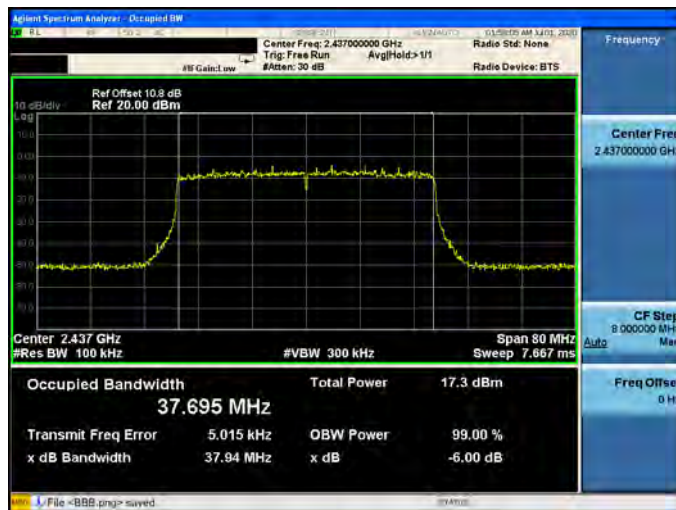


2452 MHz

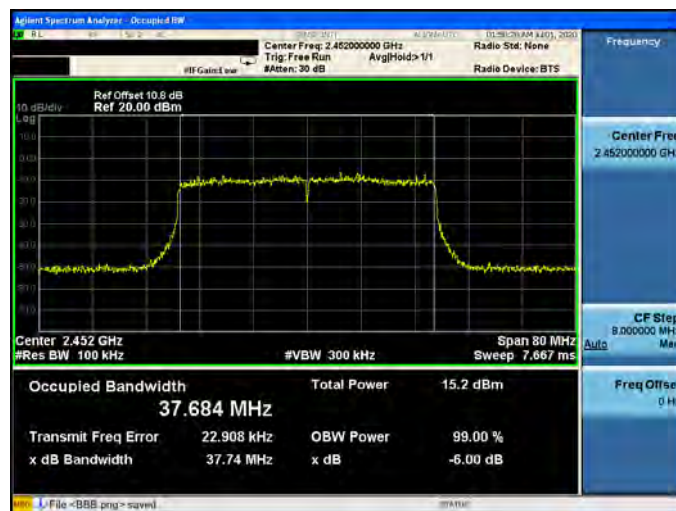


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-3


2412 MHz

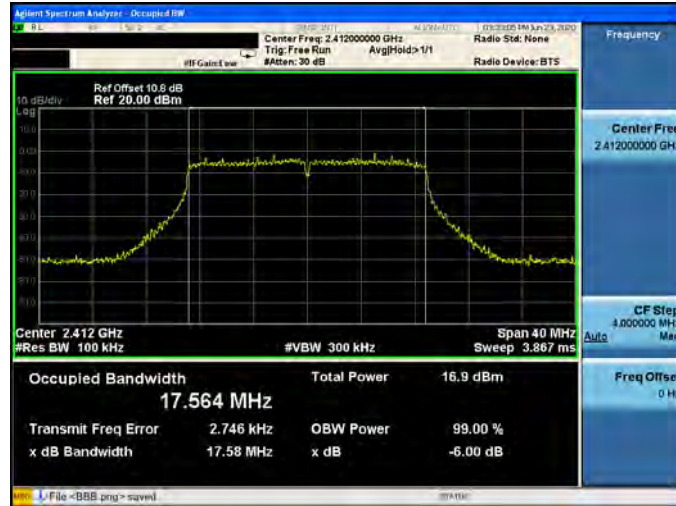

2437 MHz

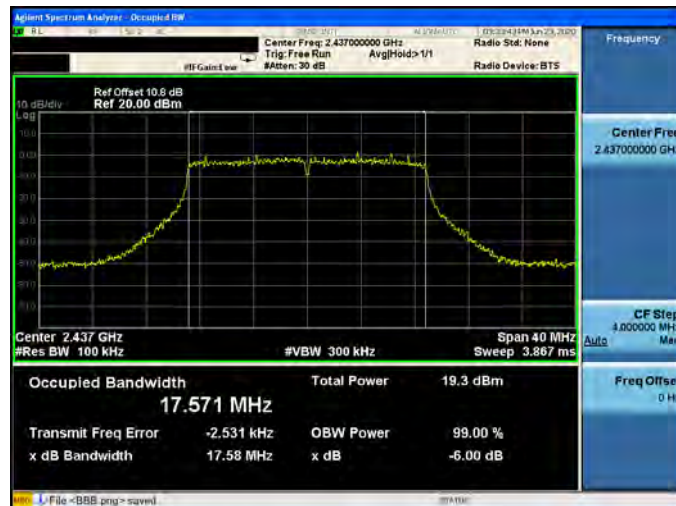


2462 MHz

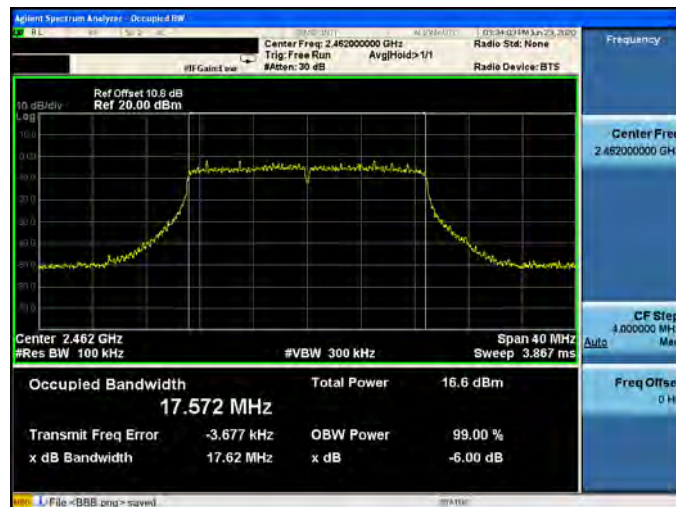




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-3


2422 MHz

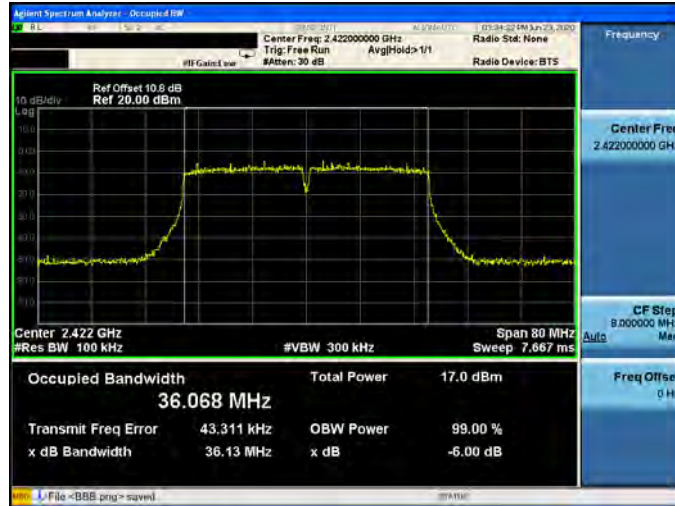

2437 MHz

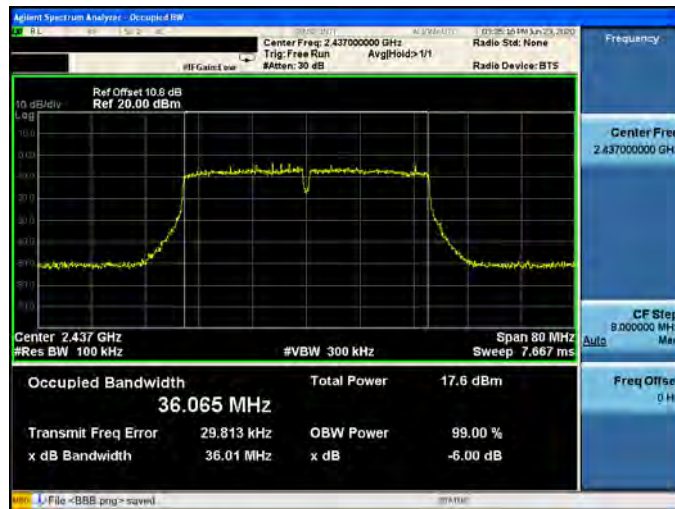

2452 MHz

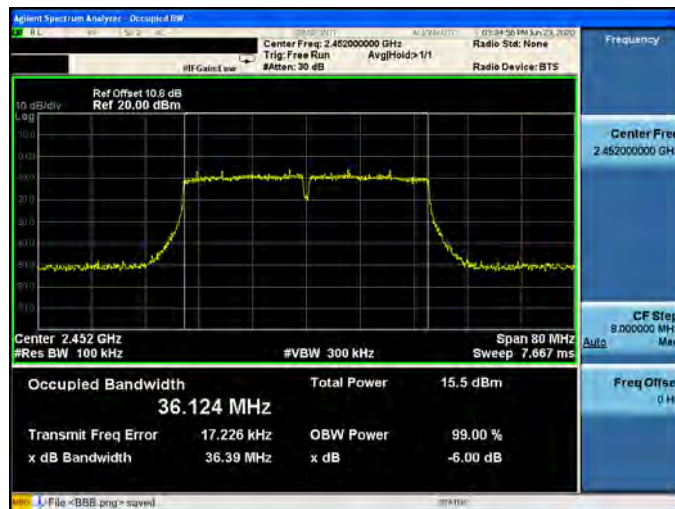




Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-3

<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.879 MHz Total Power 17.3 dBm Transmit Freq Error -4.053 kHz OBW Power 99.00 % x dB Bandwidth 18.85 MHz x dB -6.00 dB</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.901 MHz Total Power 20.1 dBm Transmit Freq Error 10.009 kHz OBW Power 99.00 % x dB Bandwidth 18.94 MHz x dB -6.00 dB</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Radio-Std: None Radio Device: BTS</p> <p>Ref Offset 10.6 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 18.914 MHz Total Power 14.9 dBm Transmit Freq Error -12.346 kHz OBW Power 99.00 % x dB Bandwidth 18.84 MHz x dB -6.00 dB</p>




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-3


2422 MHz

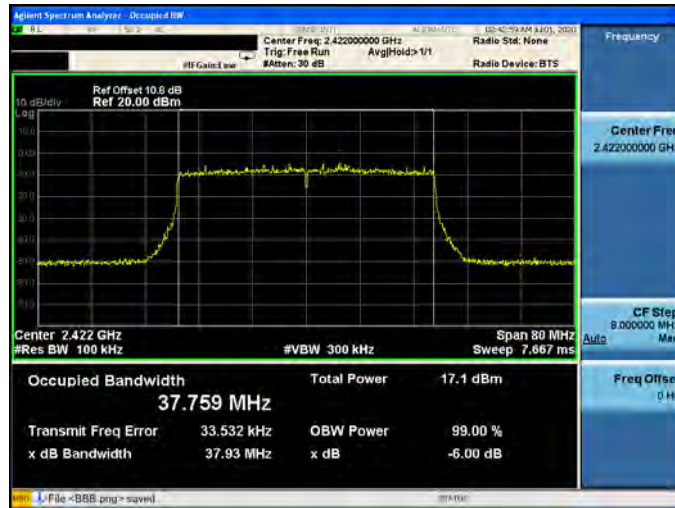

2437 MHz

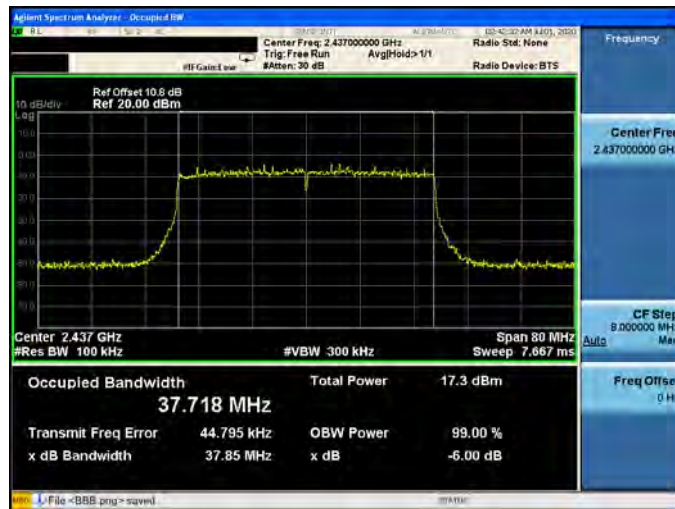

2452 MHz

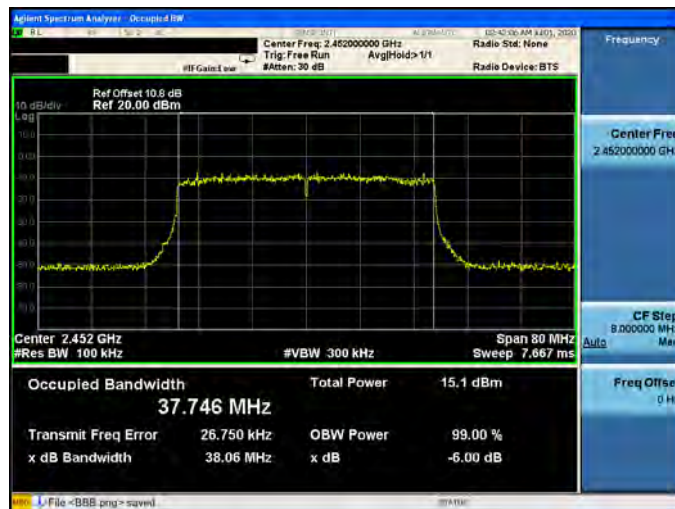



Maximum Power Spectral Density Measurement

ANT-0			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 3	2412	-9.455	≤ 3.74
	2437	-7.305	≤ 3.74
	2462	-9.377	≤ 3.74
Mode 4	2412	-8.160	≤ 8
	2437	-6.260	≤ 8
	2462	-8.853	≤ 8
Mode 5	2422	-11.713	≤ 8
	2437	-10.316	≤ 8
	2452	-11.891	≤ 8
Mode 6	2412	-9.465	≤ 8
	2437	-6.663	≤ 8
	2462	-11.598	≤ 8
Mode 7	2422	-13.591	≤ 8
	2437	-12.182	≤ 8
	2452	-14.360	≤ 8



ANT-1			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 2	2412	-2.877	≤ 8
	2437	-3.006	≤ 8
	2462	-3.323	≤ 8
Mode 3	2412	-8.801	≤ 3.74
	2437	-6.666	≤ 3.74
	2462	-8.744	≤ 3.74
Mode 4	2412	-8.597	≤ 8
	2437	-6.294	≤ 8
	2462	-7.984	≤ 8
Mode 5	2422	-10.686	≤ 8
	2437	-10.386	≤ 8
	2452	-12.632	≤ 8
Mode 6	2412	-9.088	≤ 8
	2437	-6.632	≤ 8
	2462	-11.369	≤ 8
Mode 7	2422	-13.557	≤ 8
	2437	-12.333	≤ 8
	2452	-14.359	≤ 8



ANT-2			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 3	2412	-9.549	≤ 3.74
	2437	-7.449	≤ 3.74
	2462	-8.952	≤ 3.74
Mode 4	2412	-9.130	≤ 8
	2437	-6.777	≤ 8
	2462	-9.387	≤ 8
Mode 5	2422	-12.052	≤ 8
	2437	-11.014	≤ 8
	2452	-12.735	≤ 8
Mode 6	2412	-9.682	≤ 8
	2437	-6.991	≤ 8
	2462	-11.492	≤ 8
Mode 7	2422	-13.102	≤ 8
	2437	-12.135	≤ 8
	2452	-14.146	≤ 8

ANT-3			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 3	2412	-9.357	≤ 3.74
	2437	-7.830	≤ 3.74
	2462	-8.755	≤ 3.74
Mode 4	2412	-8.972	≤ 8
	2437	-6.940	≤ 8
	2462	-9.011	≤ 8
Mode 5	2422	-11.395	≤ 8
	2437	-10.217	≤ 8
	2452	-12.775	≤ 8
Mode 6	2412	-9.346	≤ 8
	2437	-6.976	≤ 8
	2462	-11.392	≤ 8
Mode 7	2422	-12.820	≤ 8
	2437	-11.992	≤ 8
	2452	-14.121	≤ 8



ANT-0+1+2+3			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 3	2412	-3.260	≤ 3.74
	2437	-1.271	≤ 3.74
	2462	-2.929	≤ 3.74
Mode 4	2412	-2.678	≤ 8
	2437	-0.537	≤ 8
	2462	-2.757	≤ 8
Mode 5	2422	-5.411	≤ 8
	2437	-4.452	≤ 8
	2452	-6.472	≤ 8
Mode 6	2412	-3.369	≤ 8
	2437	-0.792	≤ 8
	2462	-5.441	≤ 8
Mode 7	2422	-7.235	≤ 8
	2437	-6.138	≤ 8
	2452	-8.224	≤ 8



Beamforming on

ANT-0			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 4	2412	-15.310	≤ 3.74
	2437	-13.218	≤ 3.74
	2462	-15.182	≤ 3.74
Mode 5	2422	-18.032	≤ 3.74
	2437	-17.001	≤ 3.74
	2452	-19.091	≤ 3.74
Mode 6	2412	-16.039	≤ 3.74
	2437	-12.991	≤ 3.74
	2462	-17.987	≤ 3.74
Mode 7	2422	-19.322	≤ 3.74
	2437	-18.549	≤ 3.74
	2452	-20.009	≤ 3.74

ANT-1			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 4	2412	-15.106	≤ 3.74
	2437	-13.558	≤ 3.74
	2462	-15.940	≤ 3.74
Mode 5	2422	-17.975	≤ 3.74
	2437	-17.203	≤ 3.74
	2452	-19.403	≤ 3.74
Mode 6	2412	-16.127	≤ 3.74
	2437	-12.901	≤ 3.74
	2462	-18.151	≤ 3.74
Mode 7	2422	-18.257	≤ 3.74
	2437	-19.024	≤ 3.74
	2452	-20.170	≤ 3.74



ANT-2			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 4	2412	-15.487	≤ 3.74
	2437	-12.908	≤ 3.74
	2462	-16.052	≤ 3.74
Mode 5	2422	-18.180	≤ 3.74
	2437	-16.901	≤ 3.74
	2452	-19.465	≤ 3.74
Mode 6	2412	-16.577	≤ 3.74
	2437	-12.817	≤ 3.74
	2462	-17.584	≤ 3.74
Mode 7	2422	-19.263	≤ 3.74
	2437	-18.599	≤ 3.74
	2452	-20.184	≤ 3.74

ANT-3			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 4	2412	-15.589	≤ 3.74
	2437	-13.132	≤ 3.74
	2462	-15.603	≤ 3.74
Mode 5	2422	-18.062	≤ 3.74
	2437	-17.721	≤ 3.74
	2452	-19.604	≤ 3.74
Mode 6	2412	-15.531	≤ 3.74
	2437	-12.866	≤ 3.74
	2462	-17.786	≤ 3.74
Mode 7	2422	-19.394	≤ 3.74
	2437	-18.139	≤ 3.74
	2452	-20.070	≤ 3.74




ANT-0+1+2+3			
Test Mode	Frequency (MHz)	Measurement (dBm/3 kHz)	Limit (dBm/ 3 kHz)
Mode 4	2412	-9.349	≤ 3.74
	2437	-7.177	≤ 3.74
	2462	-9.660	≤ 3.74
Mode 5	2422	-12.041	≤ 3.74
	2437	-11.175	≤ 3.74
	2452	-13.366	≤ 3.74
Mode 6	2412	-10.032	≤ 3.74
	2437	-6.873	≤ 3.74
	2462	-11.851	≤ 3.74
Mode 7	2422	-13.012	≤ 3.74
	2437	-12.546	≤ 3.74
	2452	-14.087	≤ 3.74



Mode 3: IEEE 802.11g Continuous TX mode_ANT-0


2412 MHz

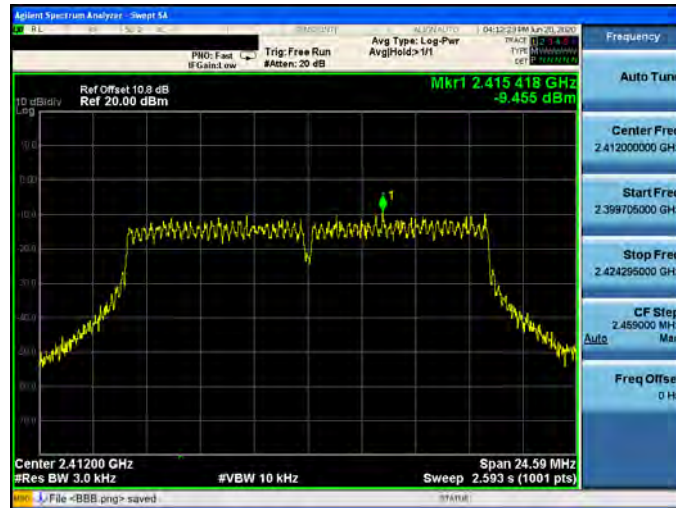

2437 MHz




2462 MHz

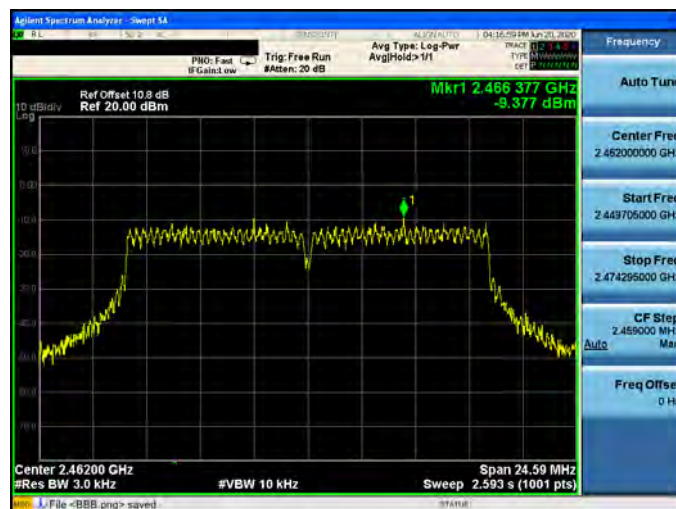



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

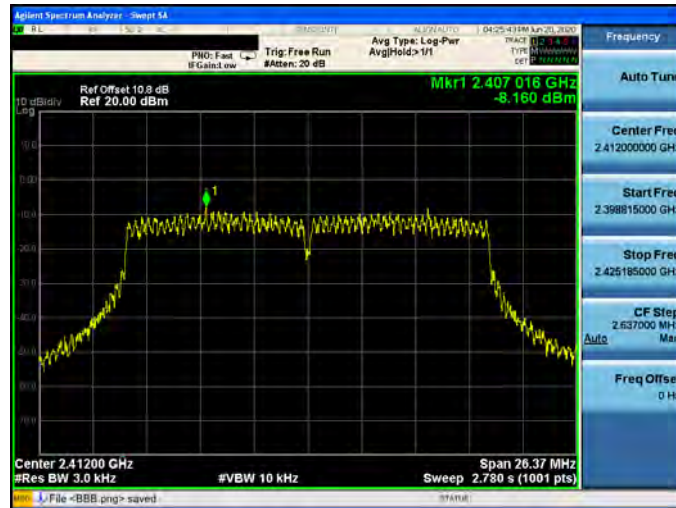

2437 MHz




2462 MHz

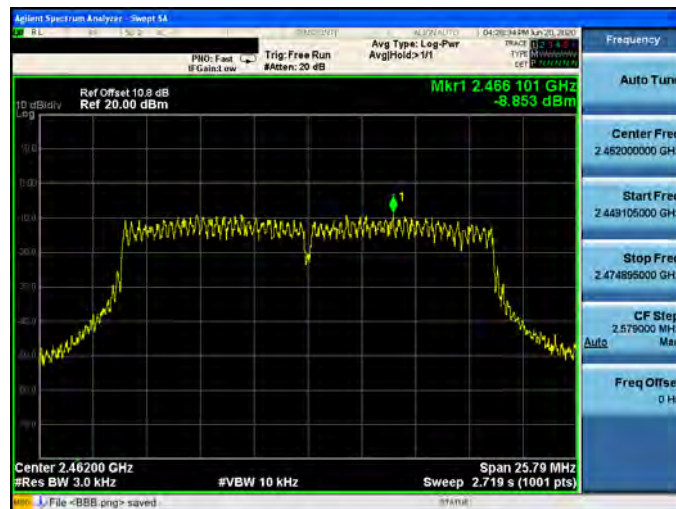




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0


2422 MHz

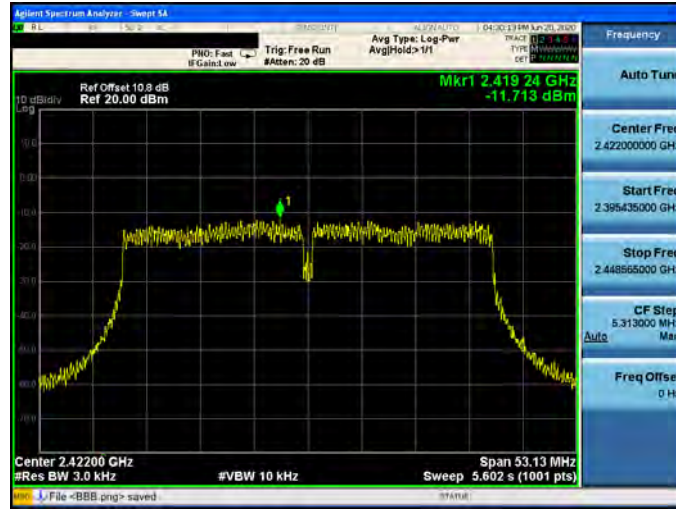

2437 MHz

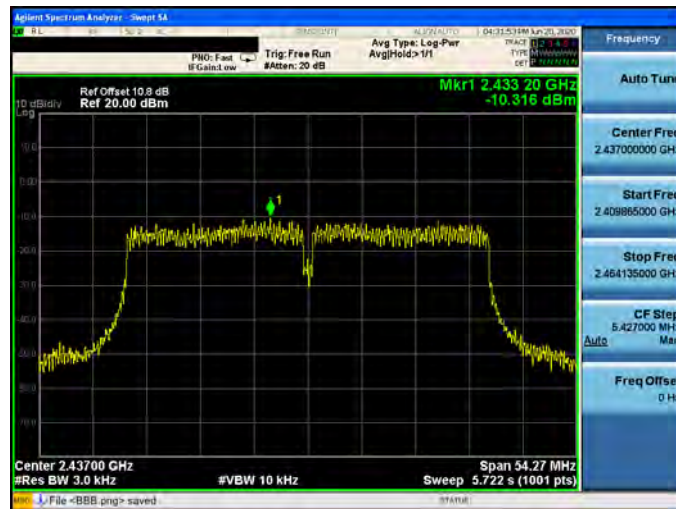


2452 MHz

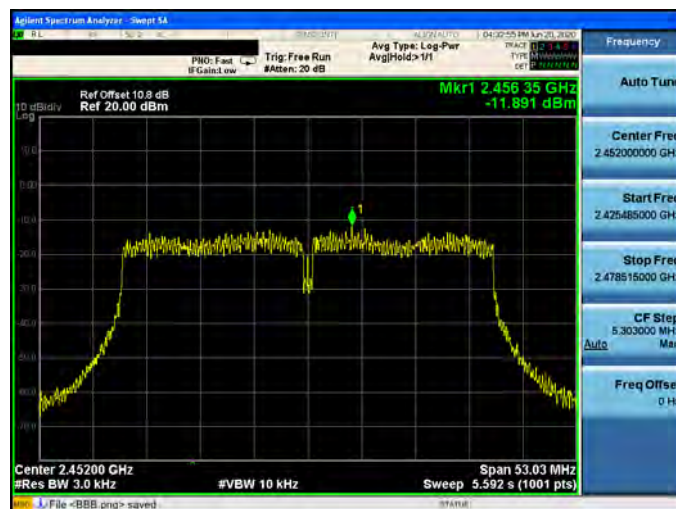



Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-0


2412 MHz

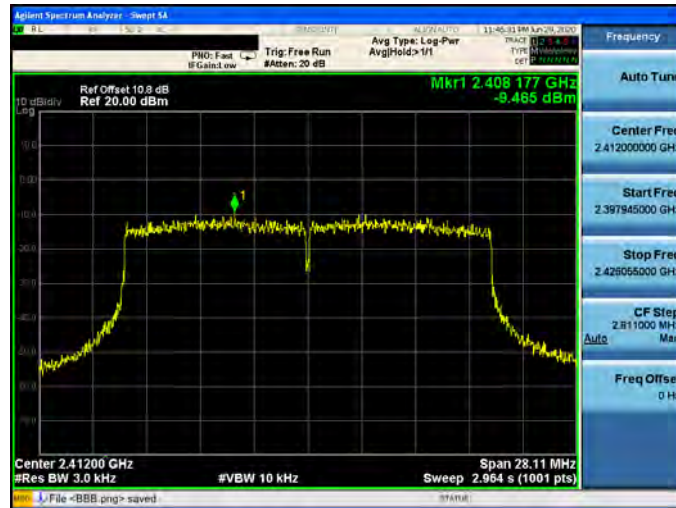

2437 MHz



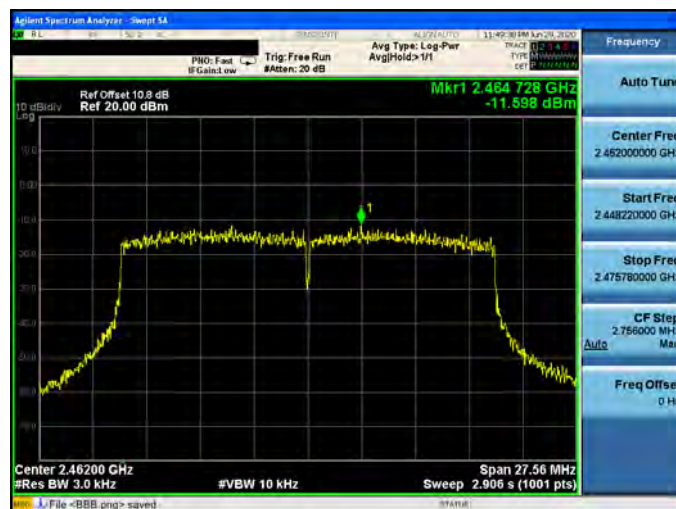


2462 MHz





Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-0

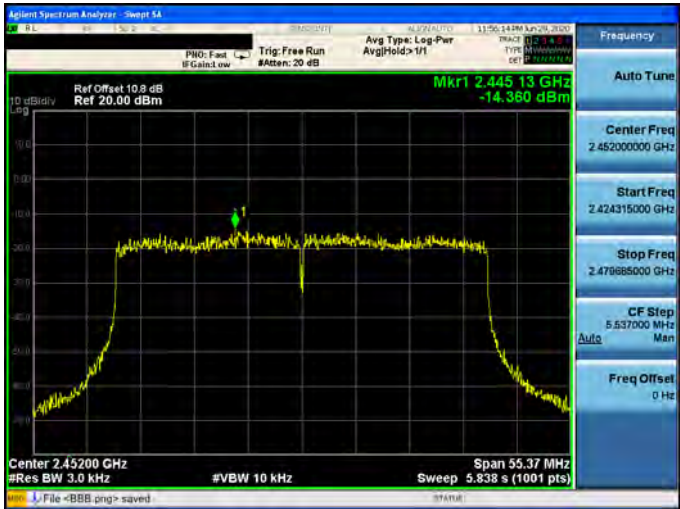2422 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref 20.00 dBm</p> <p>Mkr1 2.424 02 GHz -13.591 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 56.18 MHz Sweep 5.924 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.393910000 GHz</p> <p>Stop Freq 2.450090000 GHz</p> <p>CF Step 5.618000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2437 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref 20.00 dBm</p> <p>Mkr1 2.441 87 GHz -12.182 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 56.67 MHz Sweep 5.975 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.408665000 GHz</p> <p>Stop Freq 2.465335000 GHz</p> <p>CF Step 5.667000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2452 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref 20.00 dBm</p> <p>Mkr1 2.445 13 GHz -14.360 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 55.37 MHz Sweep 5.838 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.424315000 GHz</p> <p>Stop Freq 2.479685000 GHz</p> <p>CF Step 5.637000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>



Mode 2: IEEE 802.11b Continuous TX mode_ANT-1

2412 MHz



2437 MHz



2462 MHz






Mode 3: IEEE 802.11g Continuous TX mode_ANT-1


2412 MHz



2437 MHz

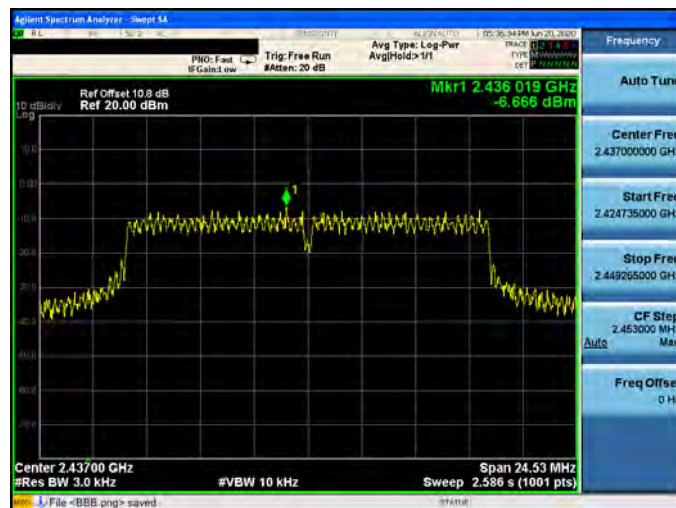


2462 MHz

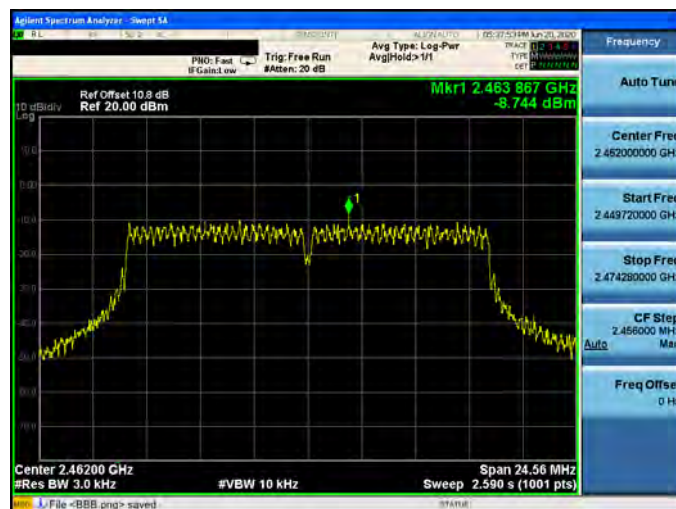



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1


2412 MHz

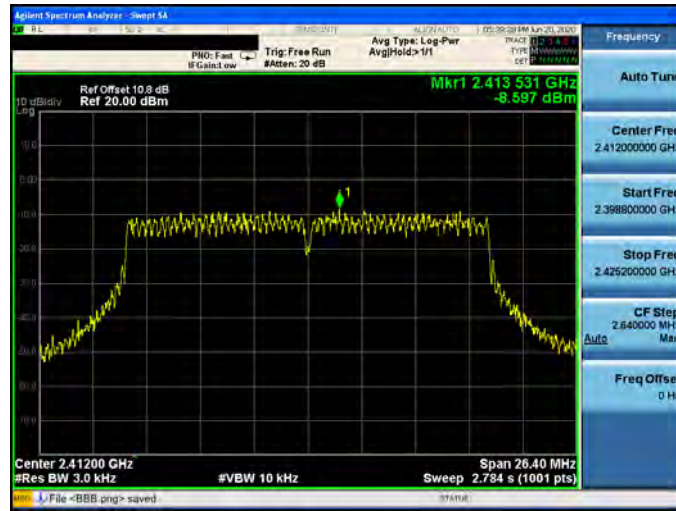

2437 MHz



2462 MHz

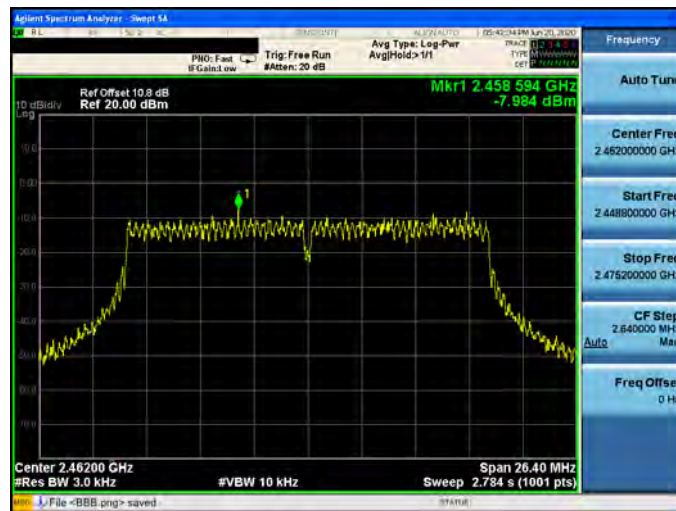




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz



2437 MHz

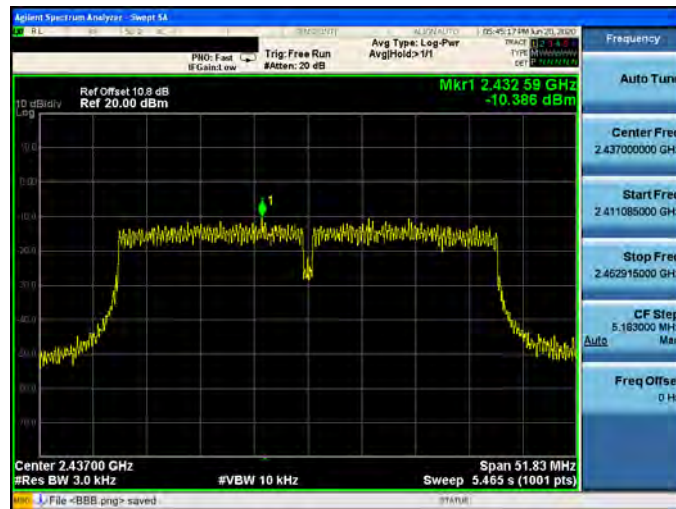

2452 MHz

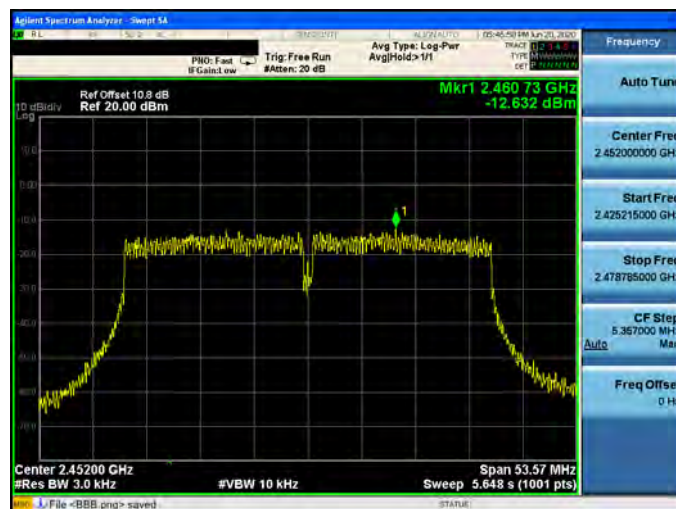



Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-1

2412 MHz



2437 MHz




2462 MHz






Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-1


2422 MHz

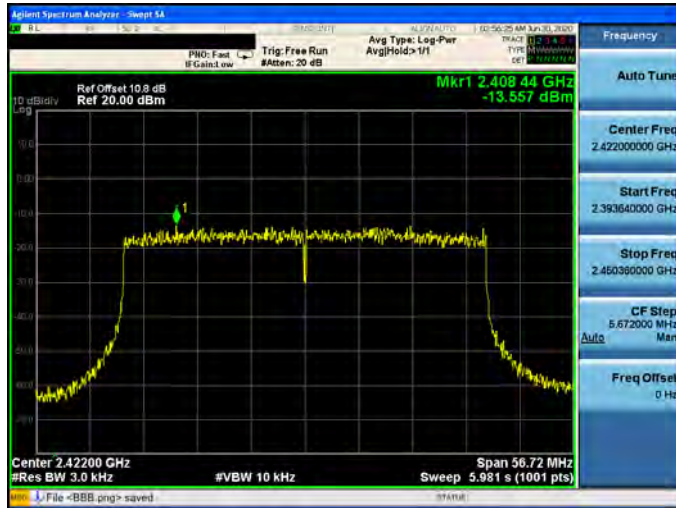

2437 MHz

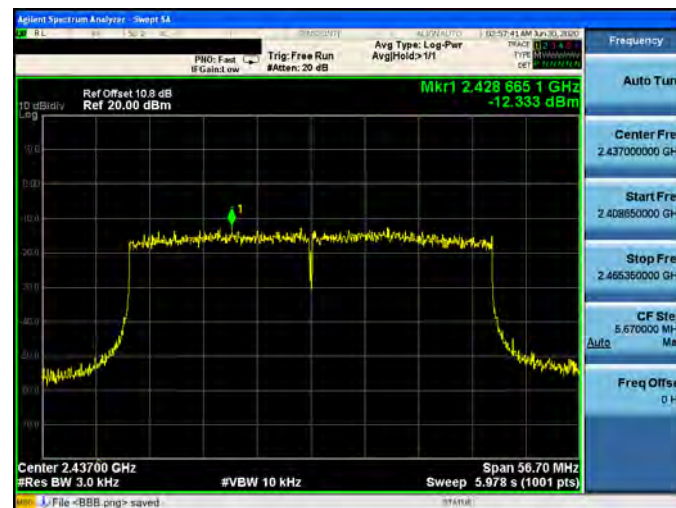

2452 MHz

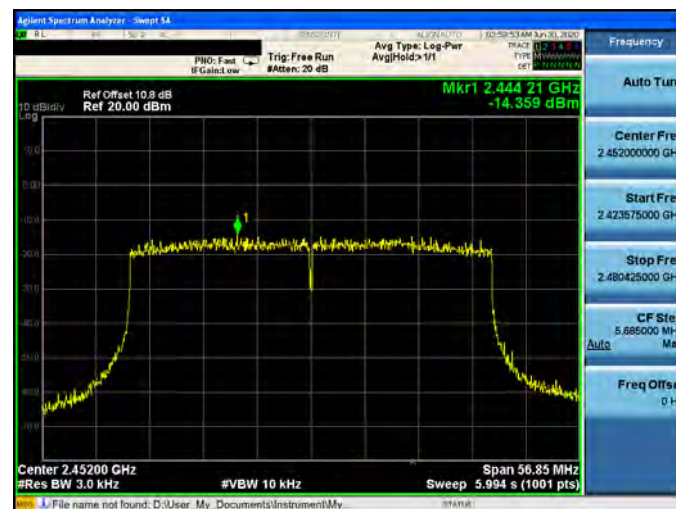



Mode 3: IEEE 802.11g Continuous TX mode_ANT-2


2412 MHz



2437 MHz




2462 MHz

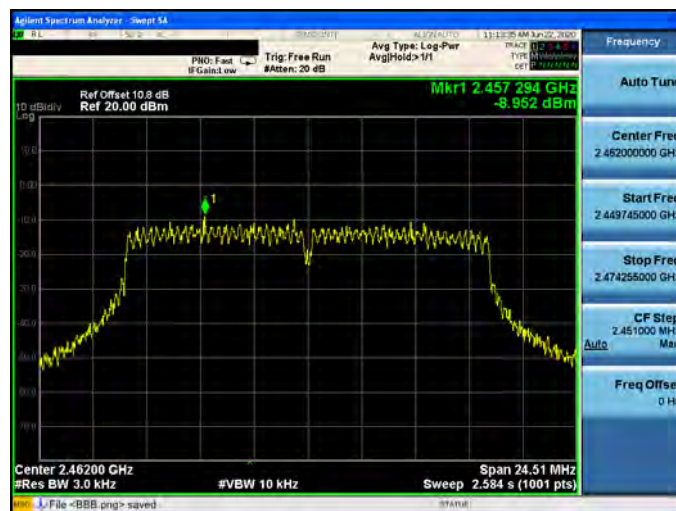



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-2


2412 MHz

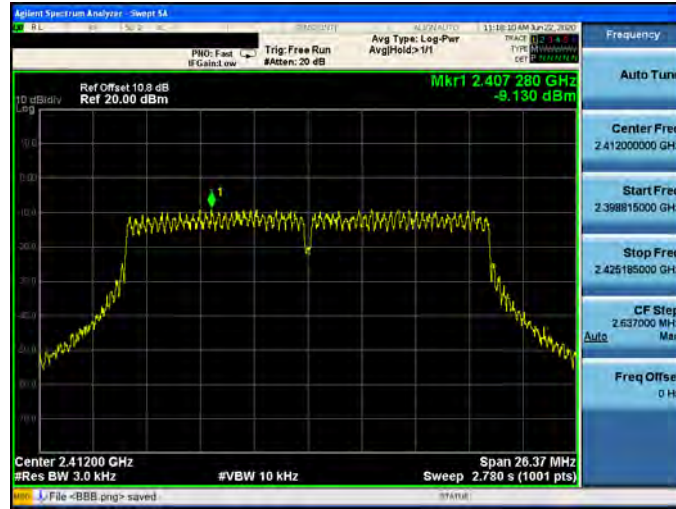

2437 MHz



2462 MHz

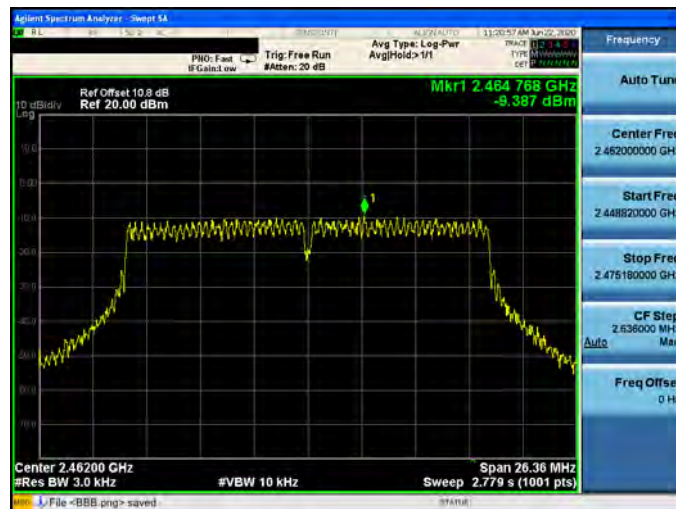




Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-2


2422 MHz



2437 MHz

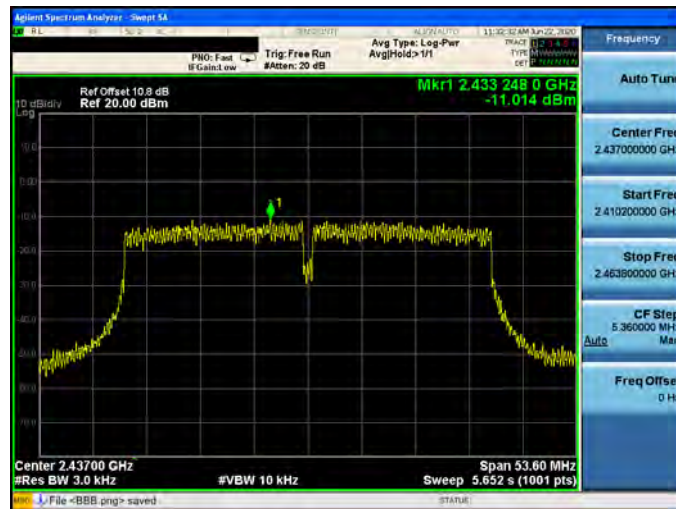


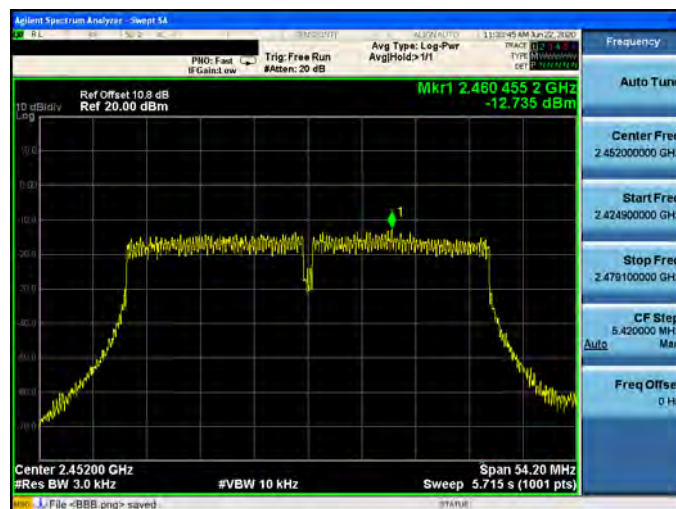

2452 MHz



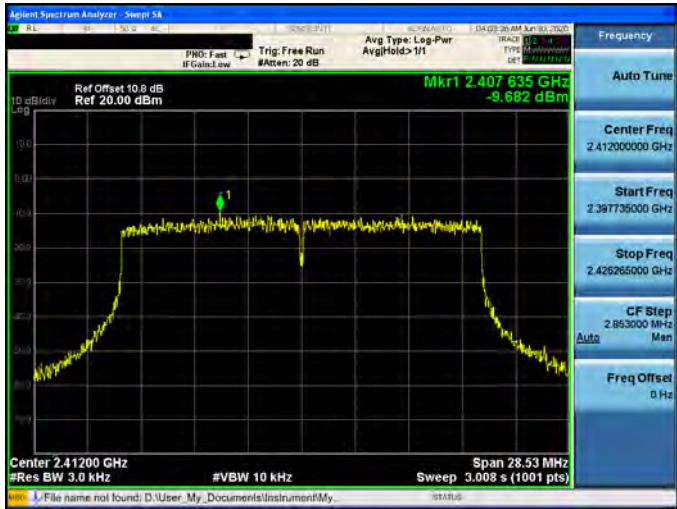

Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-2

2412 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.407 835 GHz -9.682 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 28.53 MHz Sweep 3.008 s (1001 pts)</p>
2437 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.436 007 GHz -6.991 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 28.37 MHz Sweep 2.991 s (1001 pts)</p>
2462 MHz	 <p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset: 10.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.463 166 GHz -11.492 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 28.43 MHz Sweep 2.998 s (1001 pts)</p>




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-2


2422 MHz



2437 MHz

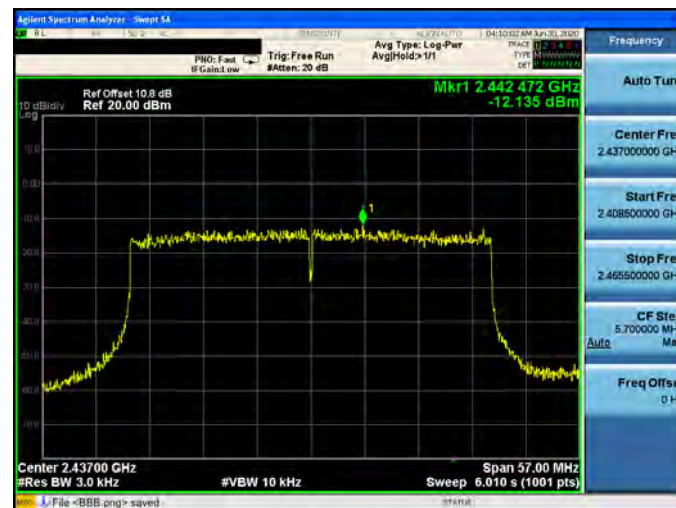


2452 MHz

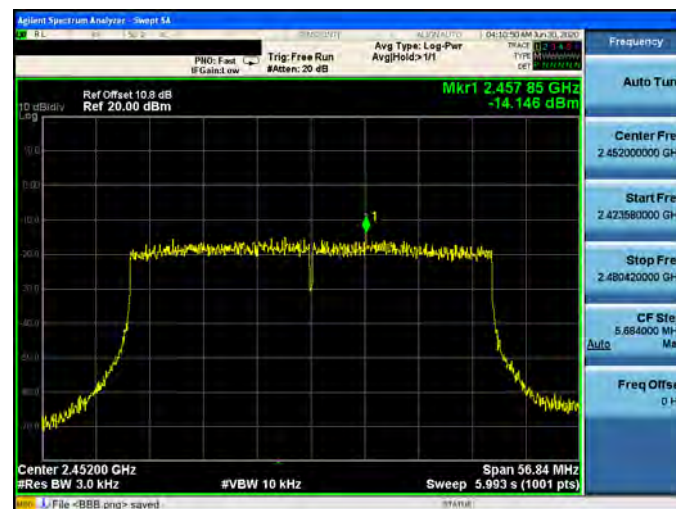




Mode 3: IEEE 802.11g Continuous TX mode_ANT-3


2412 MHz

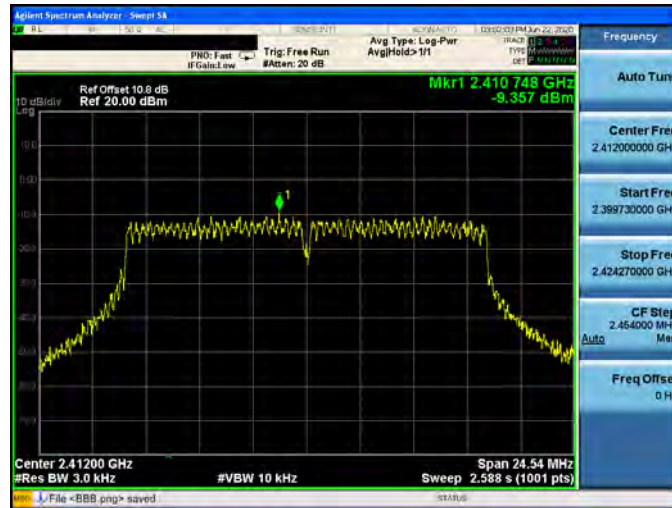

2437 MHz

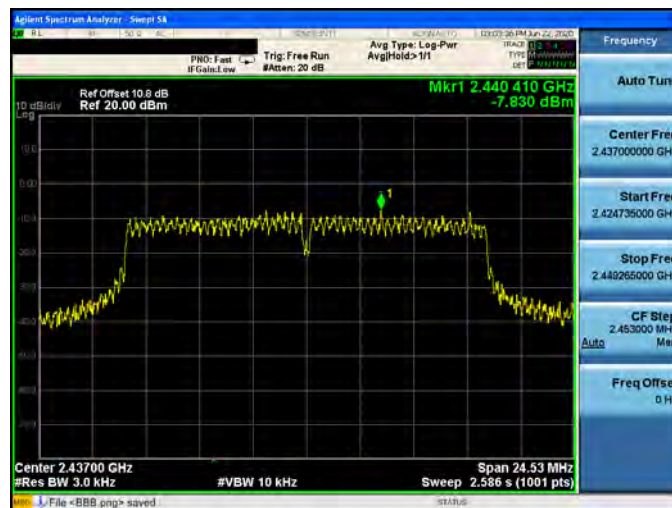


2462 MHz

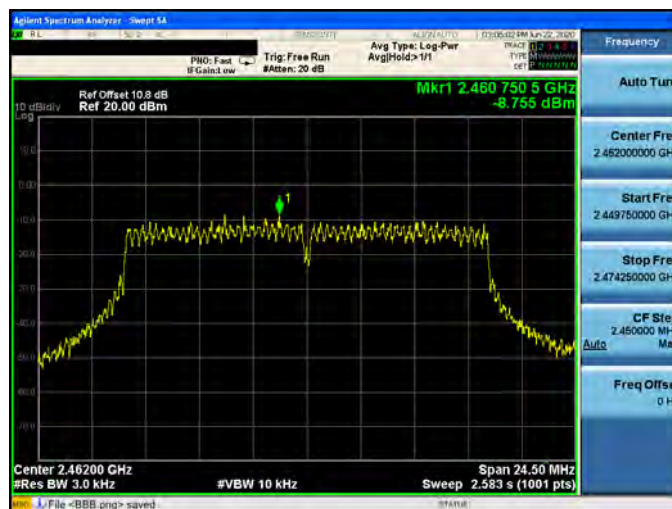



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-3


2412 MHz

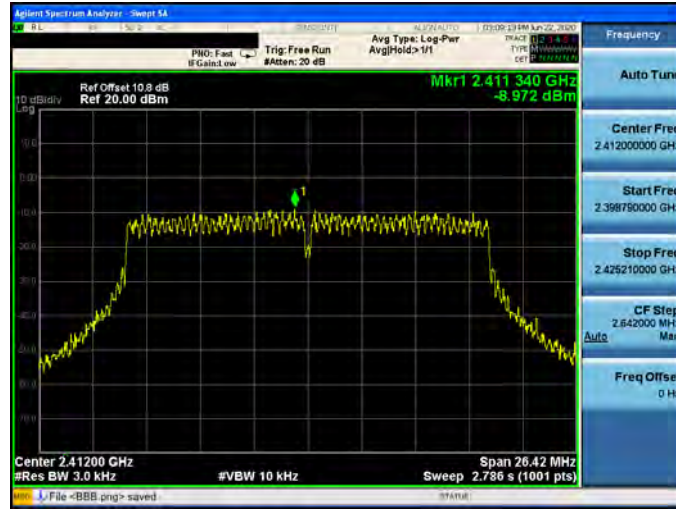

2437 MHz



2462 MHz

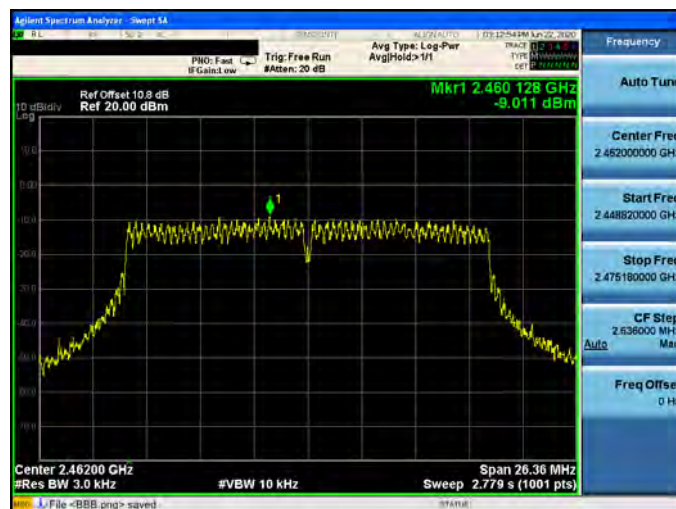



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-3


2422 MHz



2437 MHz




2452 MHz

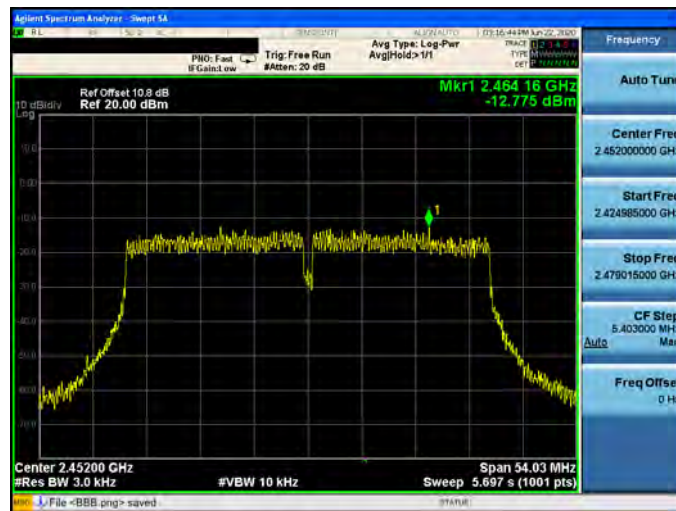



Mode 6: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX mode_ANT-3


2412 MHz

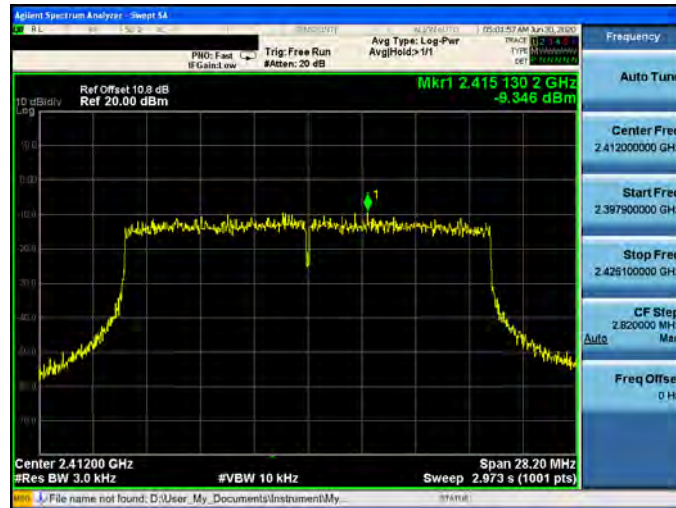

2437 MHz




2462 MHz

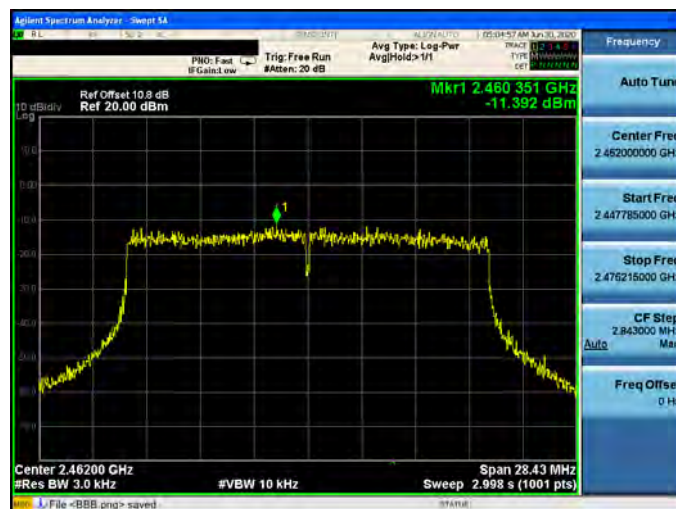




Mode 7: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX mode_ANT-3

2422 MHz

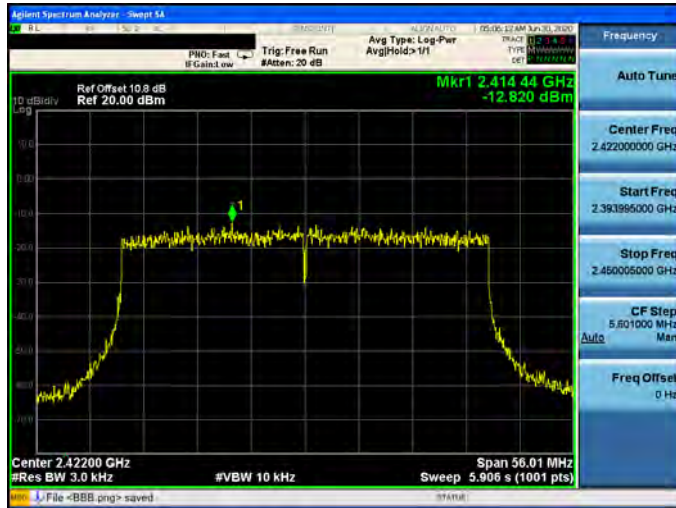

2437 MHz

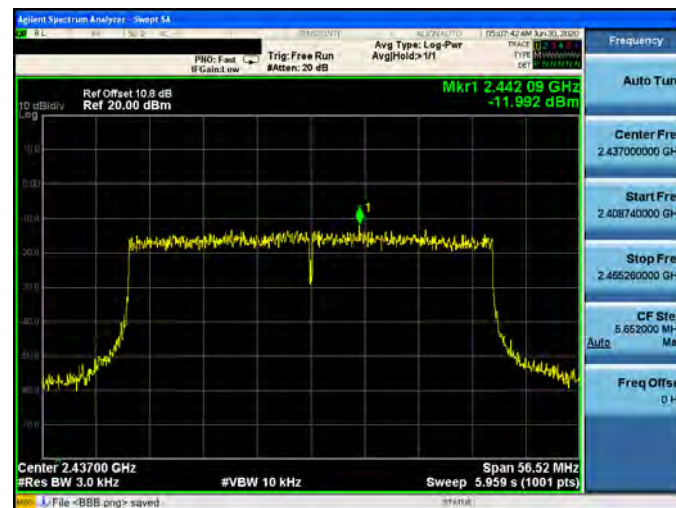

2452 MHz

