

TEST REPORT

Product Name: WEIGHTED NECKWRAP SPEAKER
FCC ID: 2ALCFAU086
Trademark: *TRAXX*
Model Number: TXBTNCKWRP-FB, XY-AU086
Prepared For: Dongguan Xing Yue Electronic co., Ltd
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China
Manufacturer: Dongguan Xing Yue Electronic co., Ltd
Address: #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 08, 2023
Sample tested Date: Oct. 08, 2023 to Oct. 20, 2023
Issue Date: Oct. 20, 2023
Report No.: CTB231016006RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.
Compiled by: Reviewed by: Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47

- 13. DWELL TIME** 49
- 13.1 Block Diagram Of Test Setup 49
- 13.2 Limit 49
- 13.3 Test procedure 49
- 13.4 Test Result 50
- 14. PSEUDORANDOM FREQUENCY** 54
- 14.1 Limit 54
- 14.2 Test procedure 54
- 14.3 Test Result 55
- 15. ANTENNA REQUIREMENT** 56
- 16. EUT TEST SETUP PHOTOGRAPHS** 57

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB231016006RFX	Oct. 20, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): TXBTNCKWRP-FB, XY-AU086

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: TXBTNCKWRP-FB

Bluetooth Version: Bluetooth 5.0

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 1.861dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: PCB antenna

Antenna Gain: Bluetooth: -0.68dBi

Ratings: DC 5V charging from adapter
DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

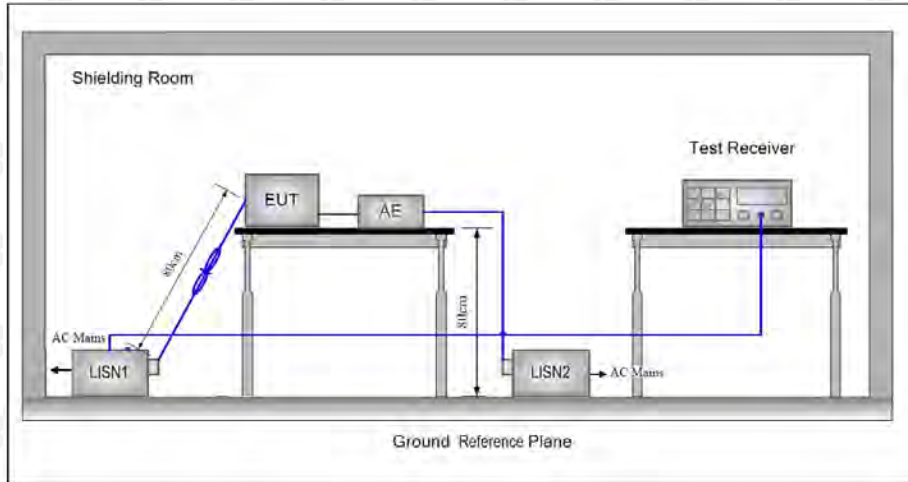

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

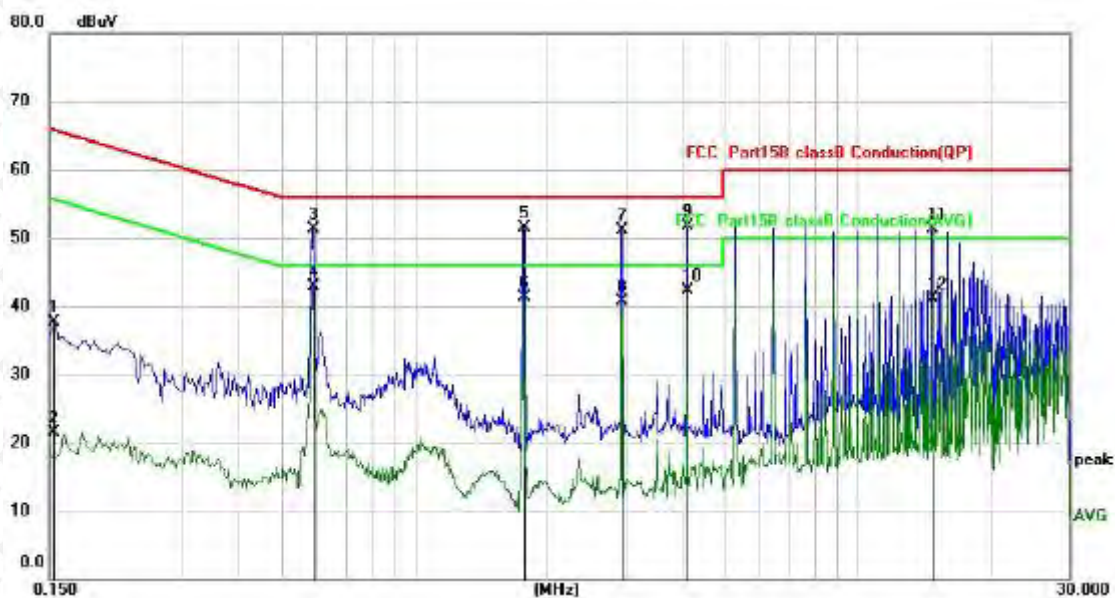


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	27.83	9.95	37.78	65.79	-28.01	QP
2		0.1539	11.52	9.95	21.47	55.79	-34.32	AVG
3		0.5899	41.22	10.00	51.22	56.00	-4.78	QP
4	*	0.5899	32.88	10.00	42.88	46.00	-3.12	AVG
5		1.7660	41.40	10.07	51.47	56.00	-4.53	QP
6		1.7660	31.25	10.07	41.32	46.00	-4.68	AVG
7		2.9460	40.88	10.18	51.06	56.00	-4.94	QP
8		2.9460	30.54	10.18	40.72	46.00	-5.28	AVG
9		4.1219	41.35	10.30	51.65	56.00	-4.35	QP
10		4.1219	31.97	10.30	42.27	46.00	-3.73	AVG
11		14.7179	40.62	10.72	51.34	60.00	-8.66	QP
12		14.7179	30.38	10.72	41.10	50.00	-8.90	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

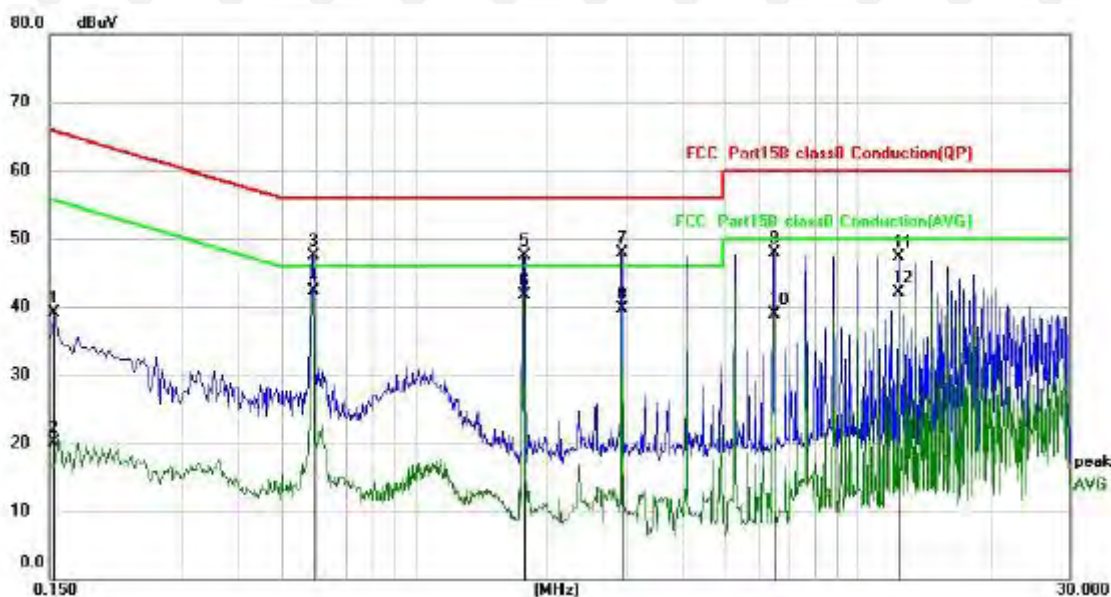

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1539	29.19	9.95	39.14	65.79	-26.65	QP
2		0.1539	10.24	9.95	20.19	55.79	-35.60	AVG
3		0.5899	37.53	10.00	47.53	56.00	-8.47	QP
4	*	0.5899	32.31	10.00	42.31	46.00	-3.69	AVG
5		1.7660	37.44	10.07	47.51	56.00	-8.49	QP
6		1.7660	31.57	10.07	41.64	46.00	-4.36	AVG
7		2.9420	37.63	10.18	47.81	56.00	-8.19	QP
8		2.9420	29.53	10.18	39.71	46.00	-6.29	AVG
9		6.4739	37.47	10.48	47.95	60.00	-12.05	QP
10		6.4739	28.51	10.48	38.99	50.00	-11.01	AVG
11		12.3579	36.73	10.65	47.38	60.00	-12.62	QP
12		12.3579	31.36	10.65	42.01	50.00	-7.99	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

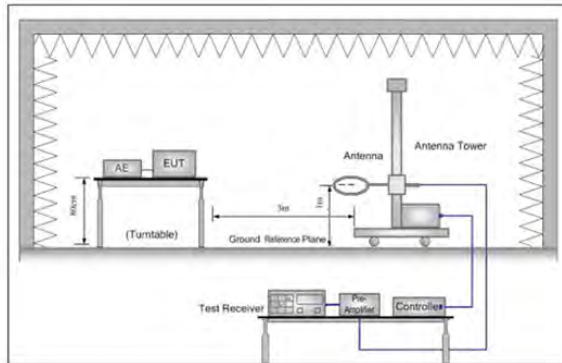


Figure 1. Below 30MHz

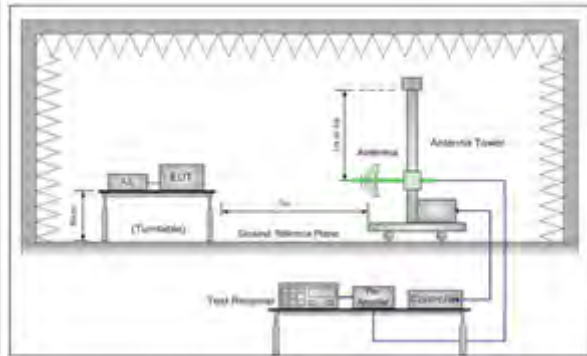


Figure 2. 30MHz to 1GHz

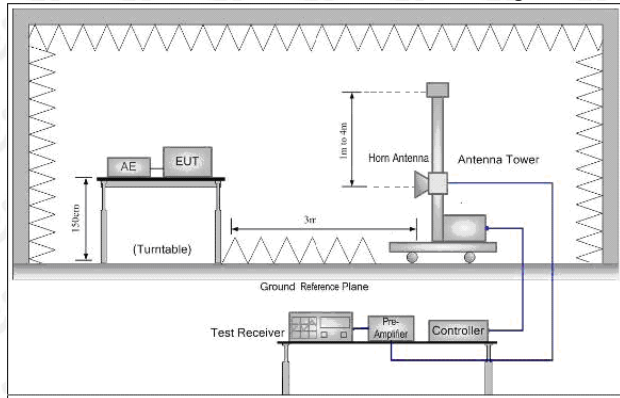


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.1202	35.90	-5.54	30.36	40.00	-9.64	QP
2		67.7939	27.94	-7.76	20.18	40.00	-19.82	QP
3		150.5378	33.72	-3.19	30.53	43.50	-12.97	QP
4		195.8220	32.94	-7.51	25.43	43.50	-18.07	QP
5		300.8943	36.18	-4.72	31.46	46.00	-14.54	QP
6	*	775.5169	34.77	5.96	40.73	46.00	-5.27	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	39.3981	42.56	-4.93	37.63	40.00	-2.37	QP
2	!	54.9310	40.81	-6.68	34.13	40.00	-5.87	QP
3		149.2239	33.03	-3.26	29.77	43.50	-13.73	QP
4		300.8943	31.27	-4.72	26.55	46.00	-19.45	QP
5		565.6297	32.08	1.74	33.82	46.00	-12.18	QP
6		775.5169	33.90	5.96	39.86	46.00	-6.14	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.99	-3.65	54.34	74.00	-19.66	peak
4804	48.68	-3.65	45.03	54.00	-8.97	AVG
7206	58.90	-0.95	57.95	74.00	-16.05	peak
7206	42.55	-0.95	41.60	54.00	-12.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.52	-3.65	53.87	74.00	-20.13	peak
4804	49.30	-3.65	45.65	54.00	-8.35	AVG
7206	60.57	-0.95	59.62	74.00	-14.38	peak
7206	41.54	-0.95	40.59	54.00	-13.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.45	-3.54	55.91	74.00	-18.09	peak
4882.00	47.62	-3.54	44.08	54.00	-9.92	AVG
7323.00	56.04	-0.81	55.23	74.00	-18.77	peak
7323.00	42.44	-0.81	41.63	54.00	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.48	-3.54	53.94	74.00	-20.06	peak
4882.00	50.43	-3.54	46.89	54.00	-7.11	AVG
7323.00	56.92	-0.81	56.11	74.00	-17.89	peak
7323.00	42.44	-0.81	41.63	54.00	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.58	-3.43	54.15	74.00	-19.85	peak
4960	48.92	-3.44	45.48	54.00	-8.52	AVG
7440	60.06	-0.77	59.29	74.00	-14.71	peak
7440	40.17	-0.77	39.40	54.00	-14.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	59.23	-3.43	55.80	74.00	-18.20	peak
4960	48.53	-3.44	45.09	54.00	-8.91	AVG
7440	60.87	-0.77	60.10	74.00	-13.90	peak
7440	41.19	-0.77	40.42	54.00	-13.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz)
 Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.82	-5.81	52.01	74.00	-21.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.51	-5.84	50.67	74.00	-23.33	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - l limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.25	-5.81	51.44	74.00	-22.56	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.39	-5.84	49.55	74.00	-24.45	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	54.28	-5.81	48.47	74.00	-25.53	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.71	-6.06	48.65	74.00	-25.35	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.91	-5.81	51.10	74.00	-22.90	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.04	-6.06	48.98	74.00	-25.02	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.27	-5.81	49.46	74.00	-24.54	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.26	-5.84	47.42	74.00	-26.58	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.29	-5.81	50.48	74.00	-23.52	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.39	-5.84	48.55	74.00	-25.45	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.60	-5.81	51.79	74.00	-22.21	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.44	-6.06	50.38	74.00	-23.62	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.76	-5.81	49.95	74.00	-24.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.02	-6.06	47.96	74.00	-26.04	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

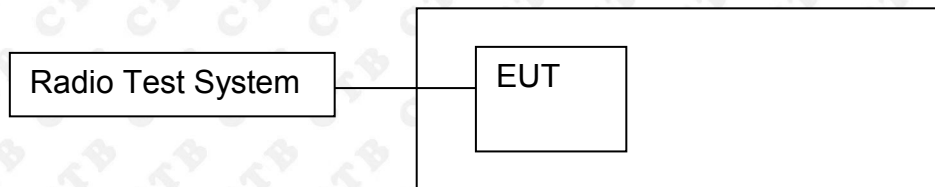


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Blow 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

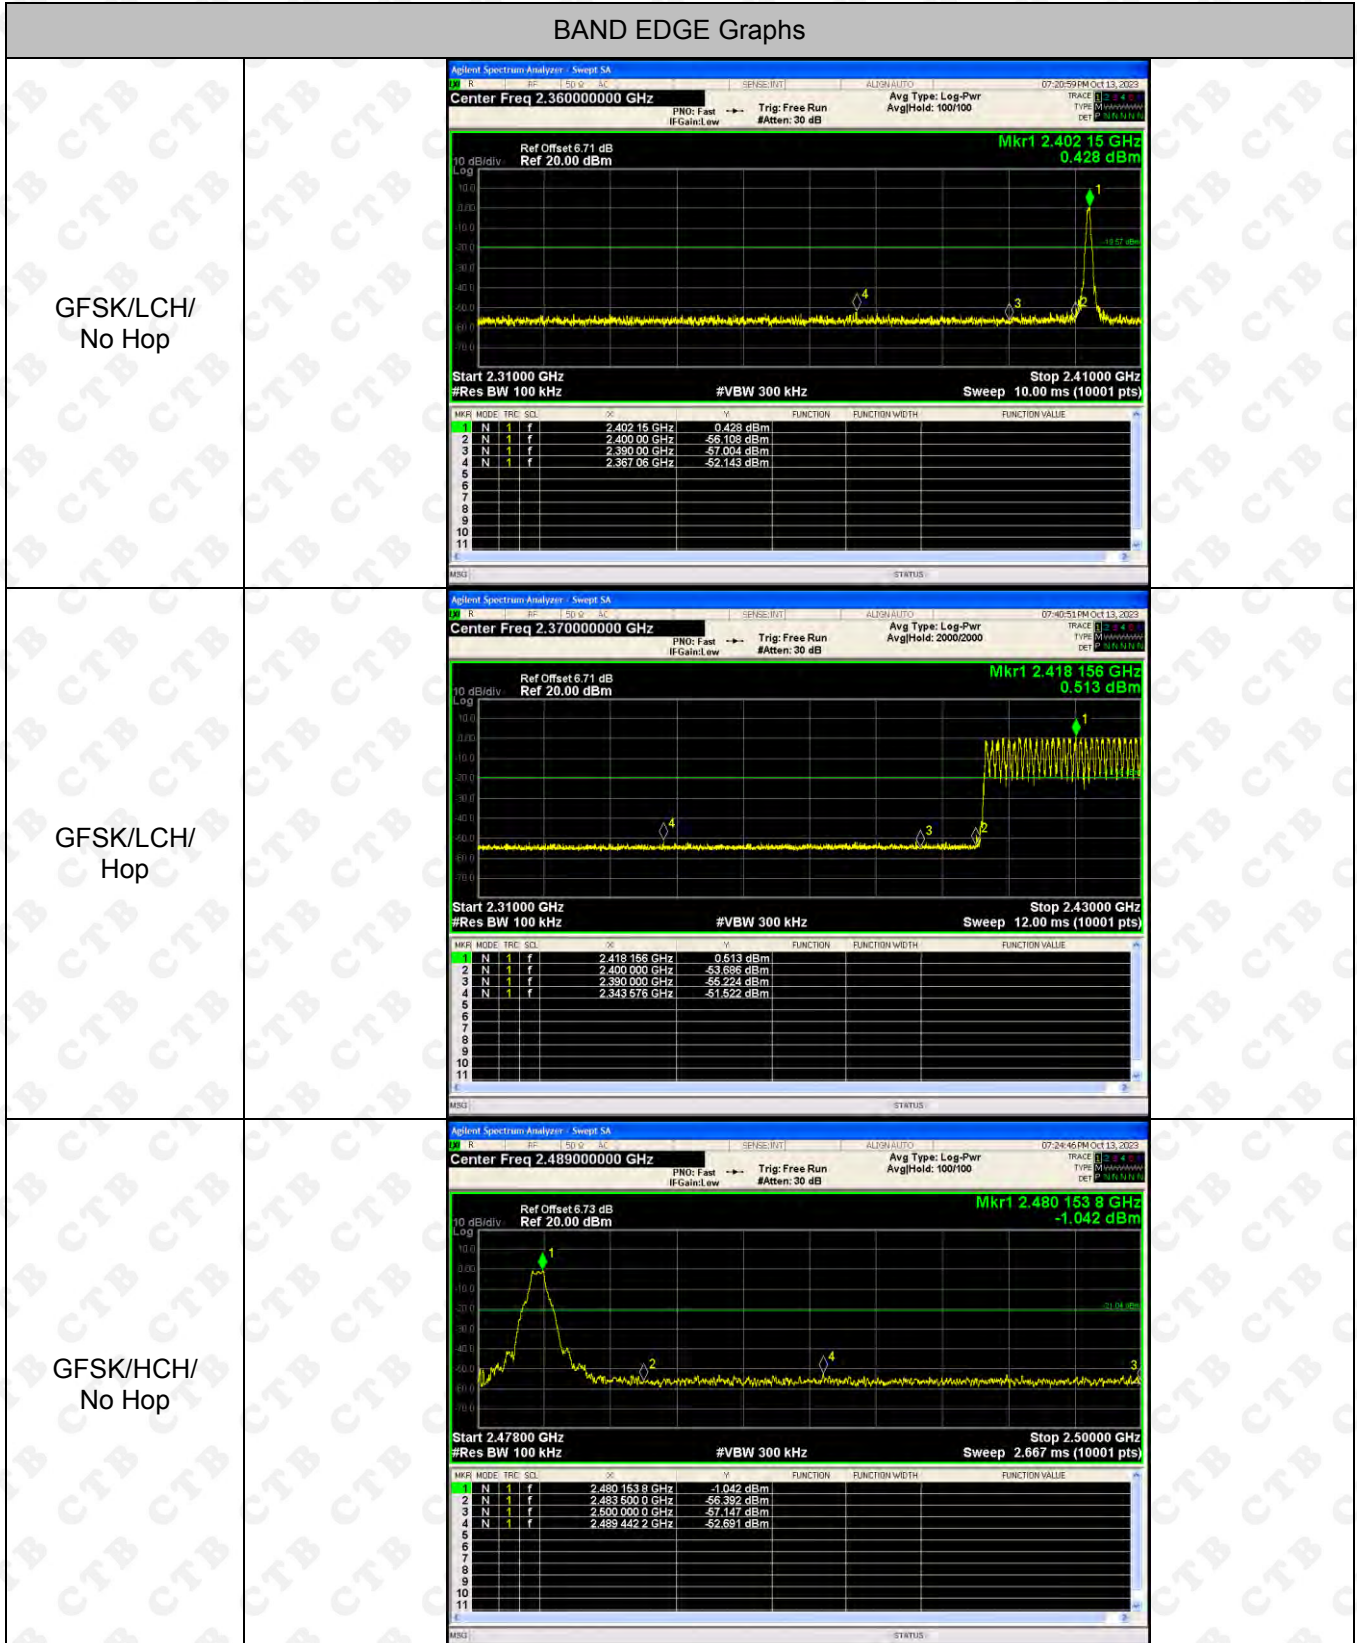


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.43815625 GHz 0.259 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.43815625 GHz</td> <td></td> <td></td> <td>0.259 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.48350000 GHz</td> <td></td> <td></td> <td>-54.617 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.49000000 GHz</td> <td></td> <td></td> <td>-53.488 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.49277500 GHz</td> <td></td> <td></td> <td>-50.784 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.43815625 GHz			0.259 dBm	2	N	1	f		2.48350000 GHz			-54.617 dBm	3	N	1	f		2.49000000 GHz			-53.488 dBm	4	N	1	f		2.49277500 GHz			-50.784 dBm
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.43815625 GHz			0.259 dBm																																						
2	N	1	f		2.48350000 GHz			-54.617 dBm																																						
3	N	1	f		2.49000000 GHz			-53.488 dBm																																						
4	N	1	f		2.49277500 GHz			-50.784 dBm																																						
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40202 GHz -2.610 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40202 GHz</td> <td></td> <td></td> <td>-2.610 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40000 GHz</td> <td></td> <td></td> <td>-54.198 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.39900 GHz</td> <td></td> <td></td> <td>-56.617 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.38776 GHz</td> <td></td> <td></td> <td>-52.193 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.40202 GHz			-2.610 dBm	2	N	1	f		2.40000 GHz			-54.198 dBm	3	N	1	f		2.39900 GHz			-56.617 dBm	4	N	1	f		2.38776 GHz			-52.193 dBm
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.40202 GHz			-2.610 dBm																																						
2	N	1	f		2.40000 GHz			-54.198 dBm																																						
3	N	1	f		2.39900 GHz			-56.617 dBm																																						
4	N	1	f		2.38776 GHz			-52.193 dBm																																						
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.424840 GHz 0.466 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.424840 GHz</td> <td></td> <td></td> <td>0.466 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40000 GHz</td> <td></td> <td></td> <td>-54.245 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.39000 GHz</td> <td></td> <td></td> <td>-54.699 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.37116 GHz</td> <td></td> <td></td> <td>-51.626 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.424840 GHz			0.466 dBm	2	N	1	f		2.40000 GHz			-54.245 dBm	3	N	1	f		2.39000 GHz			-54.699 dBm	4	N	1	f		2.37116 GHz			-51.626 dBm
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.424840 GHz			0.466 dBm																																						
2	N	1	f		2.40000 GHz			-54.245 dBm																																						
3	N	1	f		2.39000 GHz			-54.699 dBm																																						
4	N	1	f		2.37116 GHz			-51.626 dBm																																						

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.479 804 0 GHz -2.522 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 804 0 GHz</td> <td>-2.522 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.708 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-55.544 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 312 0 GHz</td> <td>-52.707 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 804 0 GHz	-2.522 dBm				2	N	1	f	2.483 500 0 GHz	-54.708 dBm				3	N	1	f	2.500 000 0 GHz	-55.544 dBm				4	N	1	f	2.493 312 0 GHz	-52.707 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 804 0 GHz	-2.522 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.708 dBm																																									
3	N	1	f	2.500 000 0 GHz	-55.544 dBm																																									
4	N	1	f	2.493 312 0 GHz	-52.707 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46875000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.439 987 50 GHz -0.480 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 987 50 GHz</td> <td>-0.480 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-54.384 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-53.493 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.486 593 75 GHz</td> <td>-51.525 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 987 50 GHz	-0.480 dBm				2	N	1	f	2.483 500 00 GHz	-54.384 dBm				3	N	1	f	2.500 000 00 GHz	-53.493 dBm				4	N	1	f	2.486 593 75 GHz	-51.525 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.439 987 50 GHz	-0.480 dBm																																									
2	N	1	f	2.483 500 00 GHz	-54.384 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.493 dBm																																									
4	N	1	f	2.486 593 75 GHz	-51.525 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.36000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.401 83 GHz -0.175 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 83 GHz</td> <td>-0.175 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-54.446 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-58.349 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 32 GHz</td> <td>-52.715 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 83 GHz	-0.175 dBm				2	N	1	f	2.400 00 GHz	-54.446 dBm				3	N	1	f	2.390 00 GHz	-58.349 dBm				4	N	1	f	2.378 32 GHz	-52.715 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 83 GHz	-0.175 dBm																																									
2	N	1	f	2.400 00 GHz	-54.446 dBm																																									
3	N	1	f	2.390 00 GHz	-58.349 dBm																																									
4	N	1	f	2.378 32 GHz	-52.715 dBm																																									


<p>8DPSK /LCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.428152 GHz 0.297 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.428152 GHz</td> <td>0.297 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-53.189 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-54.448 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.384148 GHz</td> <td>-51.448 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428152 GHz	0.297 dBm				2	N	1	f	2.400000 GHz	-53.189 dBm				3	N	1	f	2.390000 GHz	-54.448 dBm				4	N	1	f	2.384148 GHz	-51.448 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.428152 GHz	0.297 dBm																																									
2	N	1	f	2.400000 GHz	-53.189 dBm																																									
3	N	1	f	2.390000 GHz	-54.448 dBm																																									
4	N	1	f	2.384148 GHz	-51.448 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.4798084 GHz -2.275 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4798084 GHz</td> <td>-2.275 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-53.279 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490000 GHz</td> <td>-57.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480650 GHz</td> <td>-52.277 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4798084 GHz	-2.275 dBm				2	N	1	f	2.483500 GHz	-53.279 dBm				3	N	1	f	2.490000 GHz	-57.452 dBm				4	N	1	f	2.480650 GHz	-52.277 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4798084 GHz	-2.275 dBm																																									
2	N	1	f	2.483500 GHz	-53.279 dBm																																									
3	N	1	f	2.490000 GHz	-57.452 dBm																																									
4	N	1	f	2.480650 GHz	-52.277 dBm																																									
<p>8DPSK /HCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.4389750 GHz -0.707 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4389750 GHz</td> <td>-0.707 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-54.050 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-52.391 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48354375 GHz</td> <td>-51.316 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4389750 GHz	-0.707 dBm				2	N	1	f	2.483500 GHz	-54.050 dBm				3	N	1	f	2.500000 GHz	-52.391 dBm				4	N	1	f	2.48354375 GHz	-51.316 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4389750 GHz	-0.707 dBm																																									
2	N	1	f	2.483500 GHz	-54.050 dBm																																									
3	N	1	f	2.500000 GHz	-52.391 dBm																																									
4	N	1	f	2.48354375 GHz	-51.316 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH


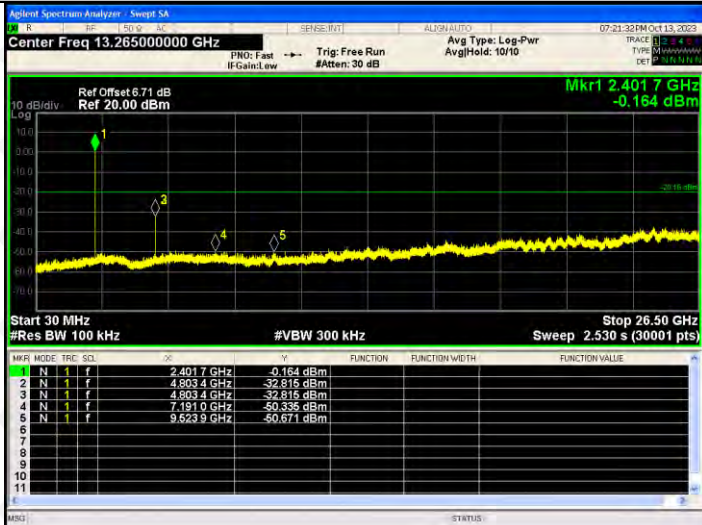


GFSK/MCH

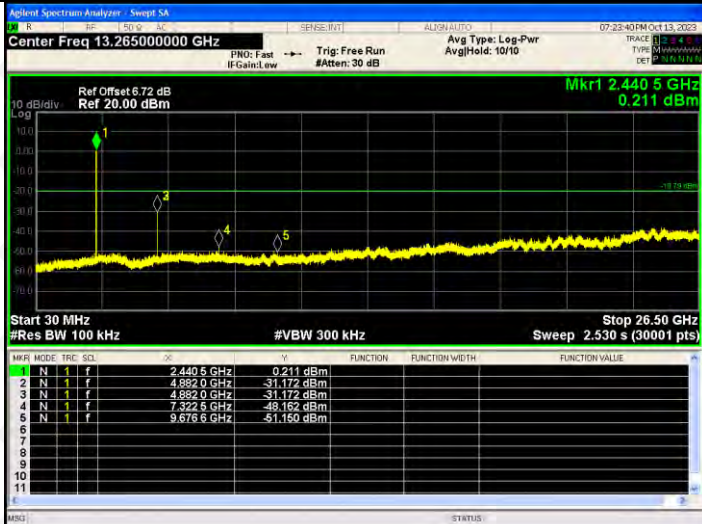

GFSK/HCH

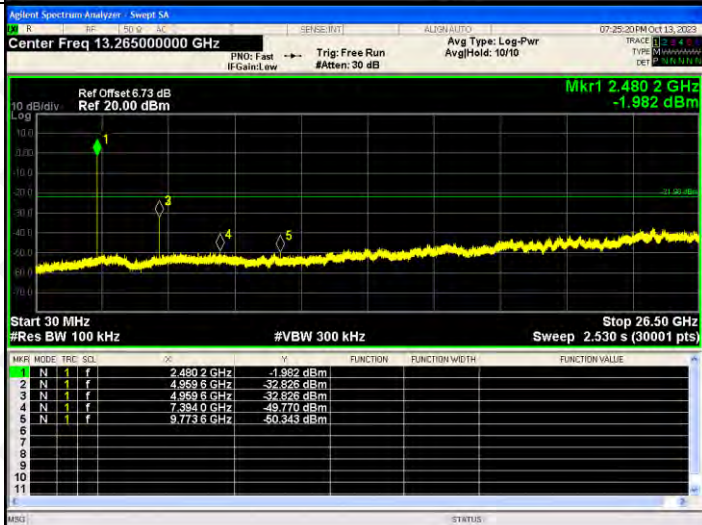

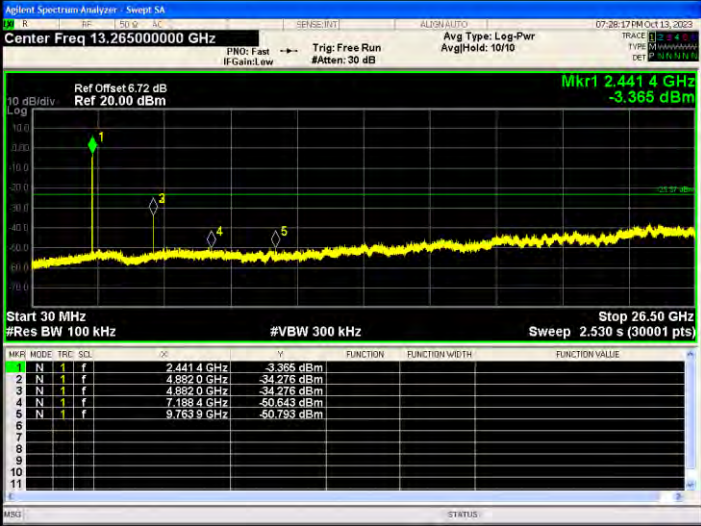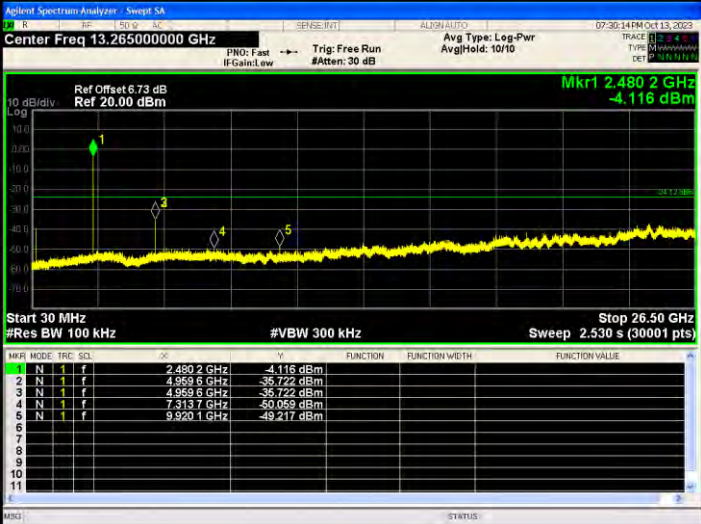
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-3.895 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8034 GHz</td> <td>-36.232 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1575 GHz</td> <td>-50.722 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6424 GHz</td> <td>-50.351 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-3.895 dBm				2	N	1	f	4.8034 GHz	-36.232 dBm				4	N	1	f	7.1575 GHz	-50.722 dBm				5	N	1	f	9.6424 GHz	-50.351 dBm												
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-3.895 dBm																																																		
2	N	1	f	4.8034 GHz	-36.232 dBm																																																		
4	N	1	f	7.1575 GHz	-50.722 dBm																																																		
5	N	1	f	9.6424 GHz	-50.351 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-3.385 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8820 GHz</td> <td>-34.276 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1884 GHz</td> <td>-50.643 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-50.793 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-3.385 dBm				2	N	1	f	4.8820 GHz	-34.276 dBm				4	N	1	f	7.1884 GHz	-50.643 dBm				5	N	1	f	9.7639 GHz	-50.793 dBm												
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-3.385 dBm																																																		
2	N	1	f	4.8820 GHz	-34.276 dBm																																																		
4	N	1	f	7.1884 GHz	-50.643 dBm																																																		
5	N	1	f	9.7639 GHz	-50.793 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.116 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9606 GHz</td> <td>-36.722 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9606 GHz</td> <td>-36.722 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4317 GHz</td> <td>-50.059 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-49.217 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-4.116 dBm				2	N	1	f	4.9606 GHz	-36.722 dBm				3	N	1	f	4.9606 GHz	-36.722 dBm				4	N	1	f	7.4317 GHz	-50.059 dBm				5	N	1	f	9.9201 GHz	-49.217 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-4.116 dBm																																																		
2	N	1	f	4.9606 GHz	-36.722 dBm																																																		
3	N	1	f	4.9606 GHz	-36.722 dBm																																																		
4	N	1	f	7.4317 GHz	-50.059 dBm																																																		
5	N	1	f	9.9201 GHz	-49.217 dBm																																																		

<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 7 GHz</td> <td>-2.967 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.633 9 GHz</td> <td>-37.754 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.804 3 GHz</td> <td>-37.246 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.124 0 GHz</td> <td>-49.521 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.607 7 GHz</td> <td>-48.009 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-2.967 dBm				2	N	1	f	24.633 9 GHz	-37.754 dBm				3	N	1	f	4.804 3 GHz	-37.246 dBm				4	N	1	f	7.124 0 GHz	-49.521 dBm				5	N	1	f	9.607 7 GHz	-48.009 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-2.967 dBm																																																		
2	N	1	f	24.633 9 GHz	-37.754 dBm																																																		
3	N	1	f	4.804 3 GHz	-37.246 dBm																																																		
4	N	1	f	7.124 0 GHz	-49.521 dBm																																																		
5	N	1	f	9.607 7 GHz	-48.009 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 5 GHz</td> <td>-2.605 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.621 5 GHz</td> <td>-36.974 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.892 0 GHz</td> <td>-33.655 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.185 6 GHz</td> <td>-50.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.763 9 GHz</td> <td>-48.677 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-2.605 dBm				2	N	1	f	24.621 5 GHz	-36.974 dBm				3	N	1	f	4.892 0 GHz	-33.655 dBm				4	N	1	f	7.185 6 GHz	-50.540 dBm				5	N	1	f	9.763 9 GHz	-48.677 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 5 GHz	-2.605 dBm																																																		
2	N	1	f	24.621 5 GHz	-36.974 dBm																																																		
3	N	1	f	4.892 0 GHz	-33.655 dBm																																																		
4	N	1	f	7.185 6 GHz	-50.540 dBm																																																		
5	N	1	f	9.763 9 GHz	-48.677 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 4 GHz</td> <td>-5.129 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-36.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-36.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.302 2 GHz</td> <td>-50.621 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.920 1 GHz</td> <td>-48.941 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 4 GHz	-5.129 dBm				2	N	1	f	4.960 5 GHz	-36.427 dBm				3	N	1	f	4.960 5 GHz	-36.427 dBm				4	N	1	f	7.302 2 GHz	-50.621 dBm				5	N	1	f	9.920 1 GHz	-48.941 dBm			
Mk1	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.479 4 GHz	-5.129 dBm																																																		
2	N	1	f	4.960 5 GHz	-36.427 dBm																																																		
3	N	1	f	4.960 5 GHz	-36.427 dBm																																																		
4	N	1	f	7.302 2 GHz	-50.621 dBm																																																		
5	N	1	f	9.920 1 GHz	-48.941 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

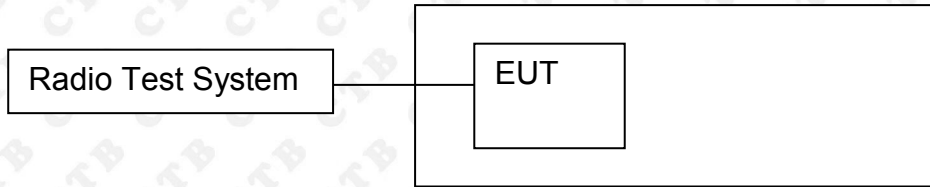

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.




9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.806	20.97	PASS
	MCH	0.615	20.97	PASS
	HCH	-0.592	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.494	20.97	PASS
	MCH	1.233	20.97	PASS
	HCH	0.016	20.97	PASS
EDR mode (8DPSK)	LCH	1.861	20.97	PASS
	MCH	1.639	20.97	PASS
	HCH	0.425	20.97	PASS

Test Graph:

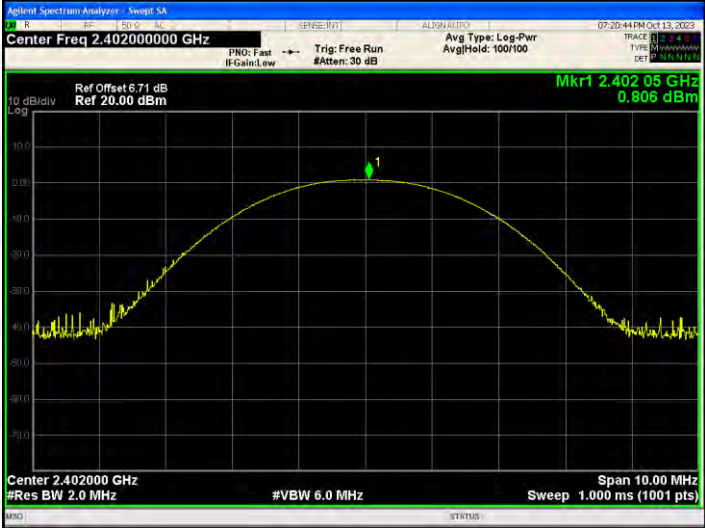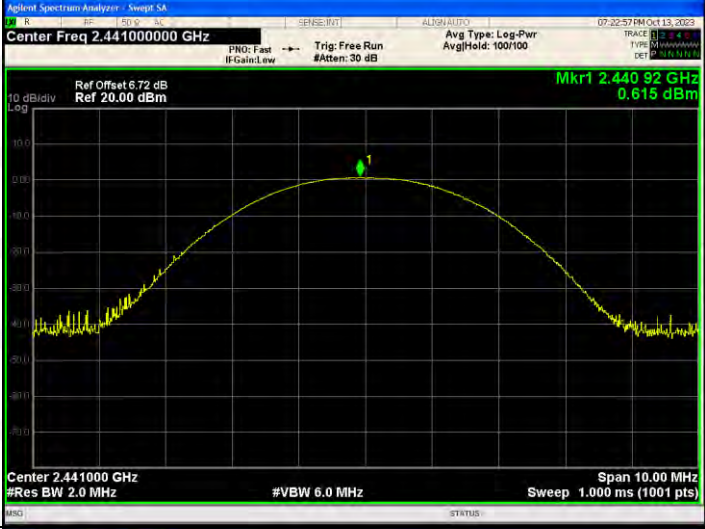
Graphs	
GFSK/LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.402 05 GHz 0.806 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.440 92 GHz 0.615 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.479 88 GHz -0.592 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset: 6.71 dB Ref 20.00 dBm Mkr1 2.402 08 GHz 1.494 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset: 6.72 dB Ref 20.00 dBm Mkr1 2.441 03 GHz 1.233 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset: 6.73 dB Ref 20.00 dBm Mkr1 2.480 08 GHz 0.016 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40189 GHz 1.861 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44090 GHz 1.639 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47995 GHz 0.425 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

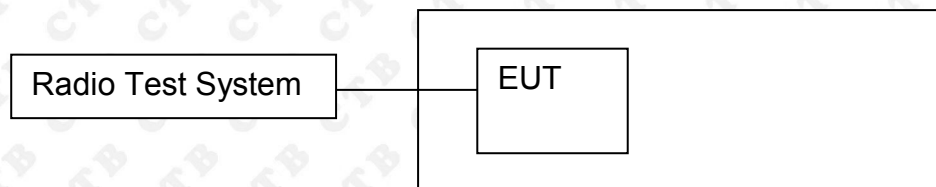

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.881	PASS
	Mid channel	0.909	PASS
	High channel	0.872	PASS
$\pi/4$ DQPSK	Low channel	1.283	PASS
	Mid channel	1.312	PASS
	High channel	1.277	PASS
8DPSK	Low channel	1.272	PASS
	Mid channel	1.293	PASS
	High channel	1.274	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.71 dB</p> <p>Ref 26.71 dBm</p> <p>Mkr3 2.402418 GHz</p> <p>-21.315 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 810.53 kHz</p> <p>Total Power 7.62 dBm</p> <p>Transmit Freq Error -22.130 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 880.8 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.72 dB</p> <p>Ref 26.72 dBm</p> <p>Mkr3 2.441434 GHz</p> <p>-21.593 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 833.62 kHz</p> <p>Total Power 6.96 dBm</p> <p>Transmit Freq Error -20.272 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 909.3 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.73 dB</p> <p>Ref 26.73 dBm</p> <p>Mkr3 2.480416 GHz</p> <p>-22.993 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 830.81 kHz</p> <p>Total Power 5.79 dBm</p> <p>Transmit Freq Error -20.196 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 872.4 kHz</p> <p>x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.71 dB</p> <p>Ref 26.71 dBm</p> <p>Mkr3 2.402623 GHz</p> <p>-21.379 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1705 MHz</p> <p>Total Power 6.59 dBm</p> <p>Transmit Freq Error -18.598 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.283 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.72 dB</p> <p>Ref 26.72 dBm</p> <p>Mkr3 2.44164 GHz</p> <p>-23.940 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1756 MHz</p> <p>Total Power 6.19 dBm</p> <p>Transmit Freq Error -16.235 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.312 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.73 dB</p> <p>Ref 26.73 dBm</p> <p>Mkr3 2.480618 GHz</p> <p>-22.318 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1704 MHz</p> <p>Total Power 5.20 dBm</p> <p>Transmit Freq Error -20.759 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.277 MHz</p> <p>x dB -20.00 dB</p>

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.71 dB</p> <p>Ref: 26.71 dBm</p> <p>Mkr3: 2.402621 GHz</p> <p>-24.190 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1902 MHz</p> <p>Total Power: 6.73 dBm</p> <p>Transmit Freq Error: -14.748 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.272 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.441626 GHz</p> <p>-21.994 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1866 MHz</p> <p>Total Power: 6.33 dBm</p> <p>Transmit Freq Error: -20.352 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.293 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.73 dB</p> <p>Ref: 26.73 dBm</p> <p>Mkr3: 2.480618 GHz</p> <p>-24.717 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1801 MHz</p> <p>Total Power: 5.57 dBm</p> <p>Transmit Freq Error: -19.608 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.274 MHz</p> <p>x dB: -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

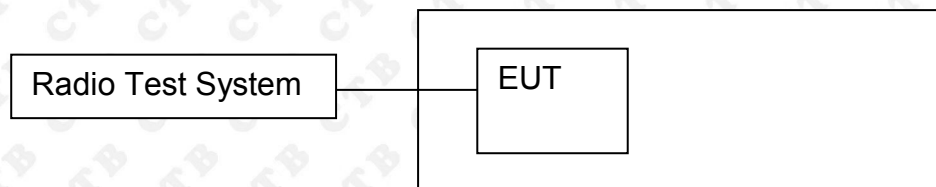

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.587	PASS
GFSK	MCH	0.994	0.606	PASS
GFSK	HCH	1.004	0.581	PASS
$\pi/4$ DQPSK	LCH	0.998	0.855	PASS
$\pi/4$ DQPSK	MCH	1.002	0.875	PASS
$\pi/4$ DQPSK	HCH	1.002	0.851	PASS
8DPSK	LCH	1.008	0.848	PASS
8DPSK	MCH	0.998	0.862	PASS
8DPSK	HCH	1.006	0.849	PASS

Test Graph




<p>$\pi/4$DQPSK/LCH</p>	 <table border="1" data-bbox="592 616 1299 761"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>Δf</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>998 kHz</td> <td>(Δ)</td> <td></td> <td></td> <td>0.278 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401820 GHz</td> <td></td> <td></td> <td></td> <td>-4.148 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	998 kHz	(Δ)			0.278 dB	2	F	1	f		2.401820 GHz				-4.148 dBm	
MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ2	1	f	(Δ)	998 kHz	(Δ)			0.278 dB																							
2	F	1	f		2.401820 GHz				-4.148 dBm																							
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1" data-bbox="592 1142 1299 1288"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>Δf</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>0.196 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440814 GHz</td> <td></td> <td></td> <td></td> <td>-4.405 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)			0.196 dB	2	F	1	f		2.440814 GHz				-4.405 dBm	
MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)			0.196 dB																							
2	F	1	f		2.440814 GHz				-4.405 dBm																							
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1" data-bbox="592 1668 1299 1814"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>Δf</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>-0.014 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478992 GHz</td> <td></td> <td></td> <td></td> <td>-4.511 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)			-0.014 dB	2	F	1	f		2.478992 GHz				-4.511 dBm	
MNR	MODE	TRC	SC1	SC2	Δf	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)			-0.014 dB																							
2	F	1	f		2.478992 GHz				-4.511 dBm																							

<p>8DPSK/LCH</p>	 <table border="1" data-bbox="592 607 1299 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.008 MHz (Δ)</td> <td></td> <td></td> <td>1.347 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401988 GHz</td> <td></td> <td></td> <td>-4.434 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.008 MHz (Δ)			1.347 dB	2	F	1	f		2.401988 GHz			-4.434 dBm	
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		1.008 MHz (Δ)			1.347 dB																					
2	F	1	f		2.401988 GHz			-4.434 dBm																					
<p>8DPSK /MCH</p>	 <table border="1" data-bbox="592 1133 1299 1290"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>998 kHz (Δ)</td> <td></td> <td></td> <td>-0.054 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441010 GHz</td> <td></td> <td></td> <td>-4.307 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		998 kHz (Δ)			-0.054 dB	2	F	1	f		2.441010 GHz			-4.307 dBm	
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		998 kHz (Δ)			-0.054 dB																					
2	F	1	f		2.441010 GHz			-4.307 dBm																					
<p>8DPSK /HCH</p>	 <table border="1" data-bbox="592 1659 1299 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.006 MHz (Δ)</td> <td></td> <td></td> <td>0.209 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478988 GHz</td> <td></td> <td></td> <td>-4.716 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.006 MHz (Δ)			0.209 dB	2	F	1	f		2.478988 GHz			-4.716 dBm	
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		1.006 MHz (Δ)			0.209 dB																					
2	F	1	f		2.478988 GHz			-4.716 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

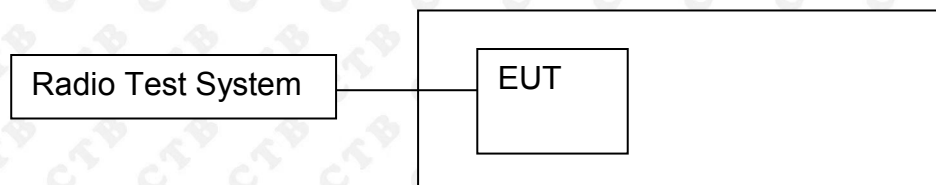

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Test Graph

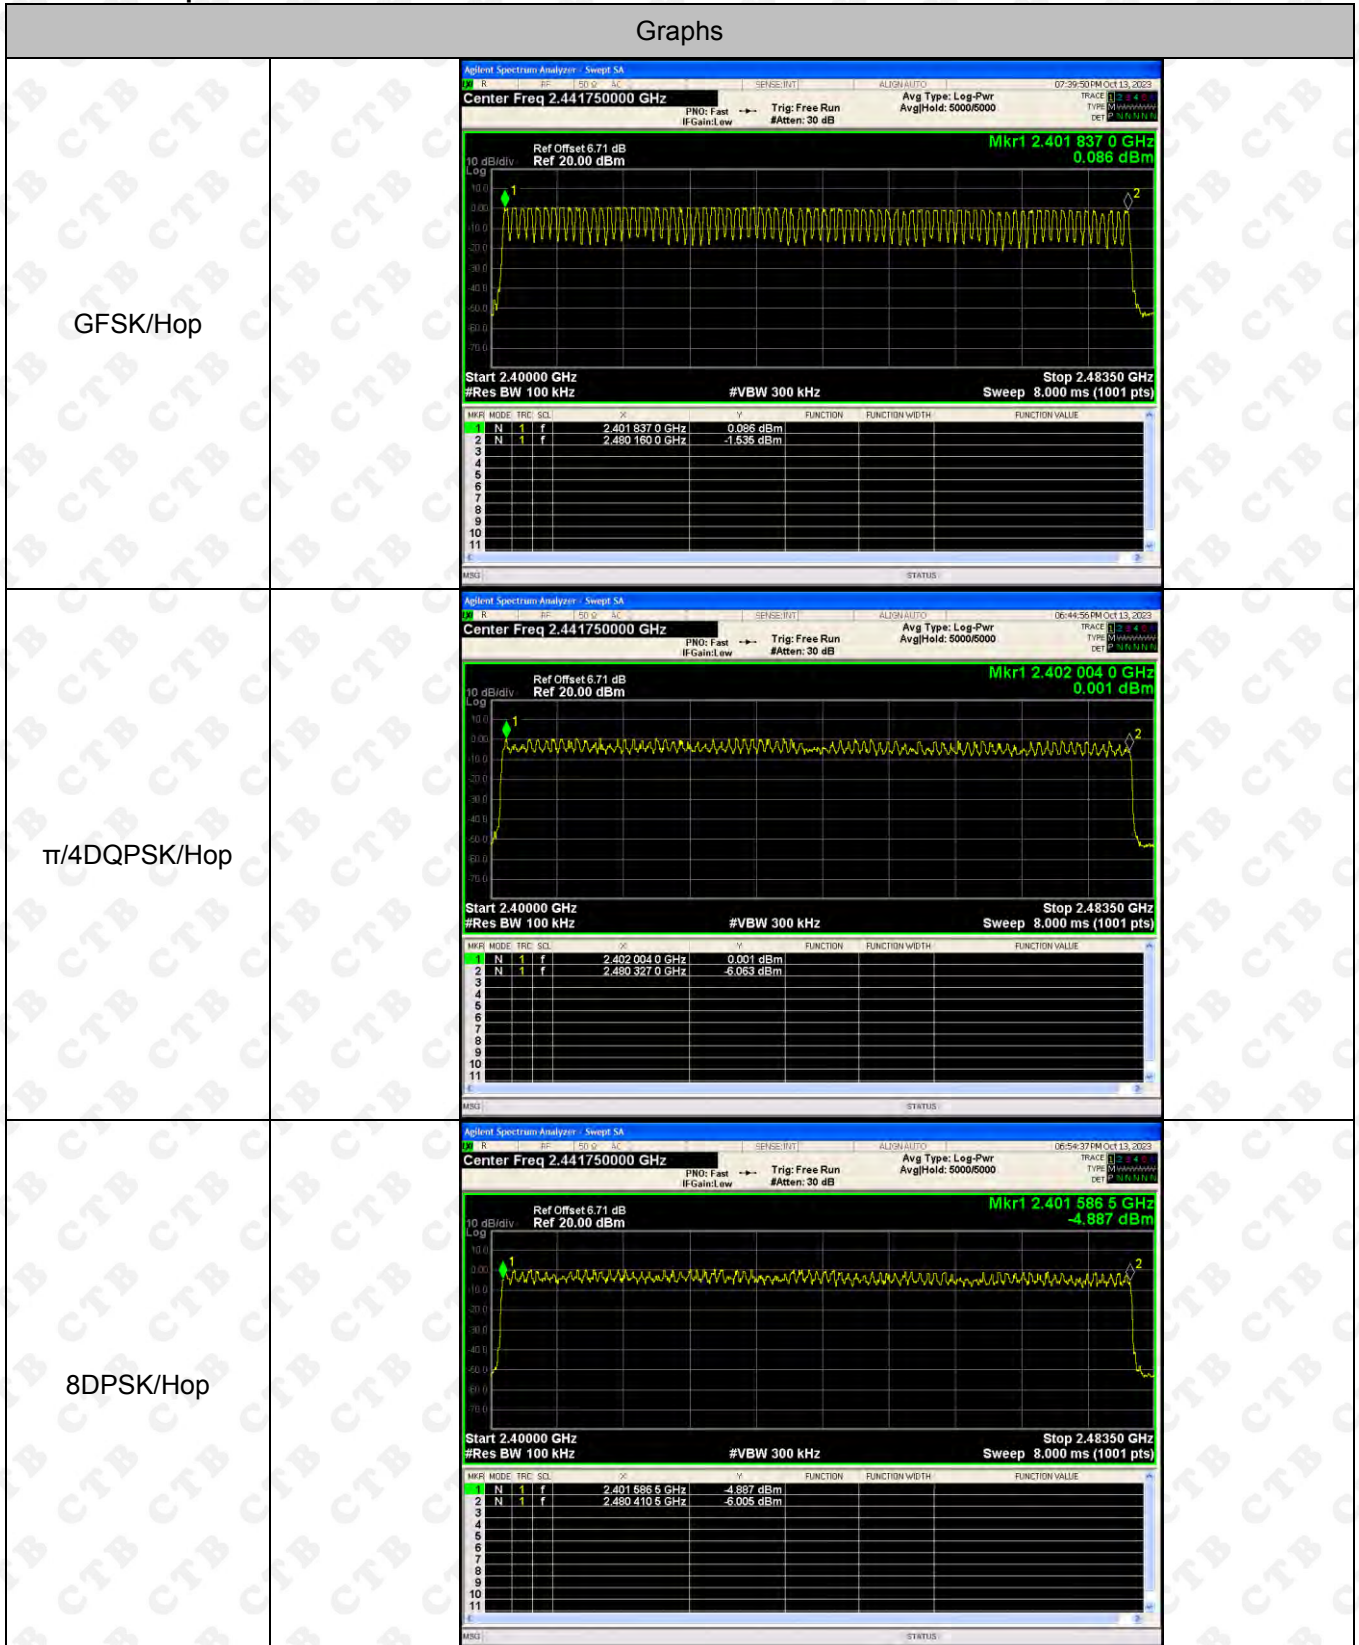

13. DWELL TIME

13.1 Block Diagram Of Test Setup

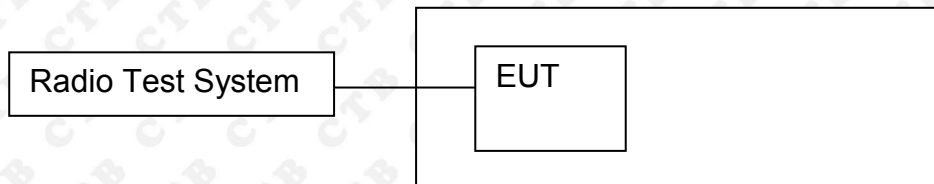

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.403	128.96	400	PASS
	DH1	MCH	0.403	128.96	400	PASS
	DH1	HCH	0.403	128.96	400	PASS
	DH3	LCH	1.665	266.4	400	PASS
	DH3	MCH	1.665	266.4	400	PASS
	DH3	HCH	1.665	266.4	400	PASS
	DH5	LCH	2.916	311.04	400	PASS
	DH5	MCH	2.917	311.147	400	PASS
	DH5	HCH	2.917	311.147	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

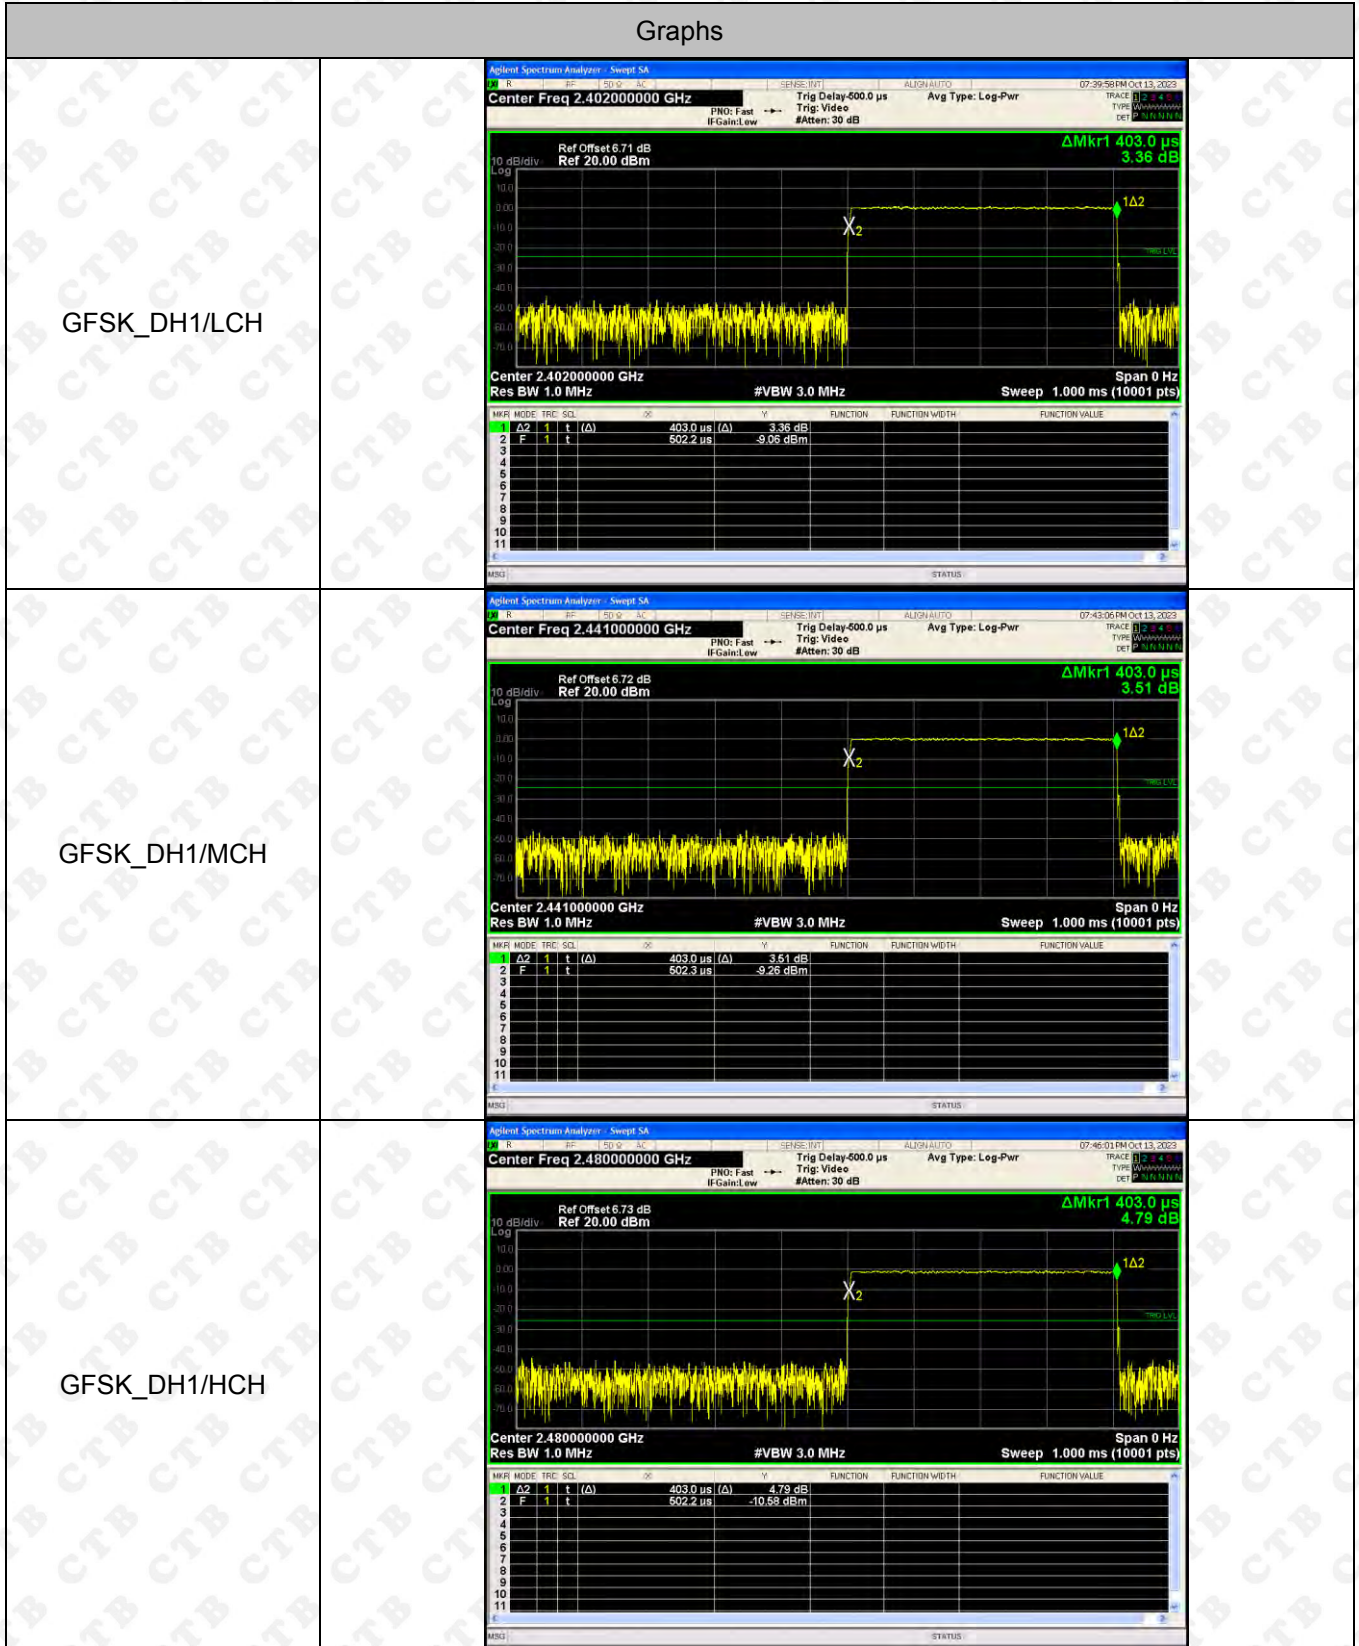


GFSK_DH3/LCH

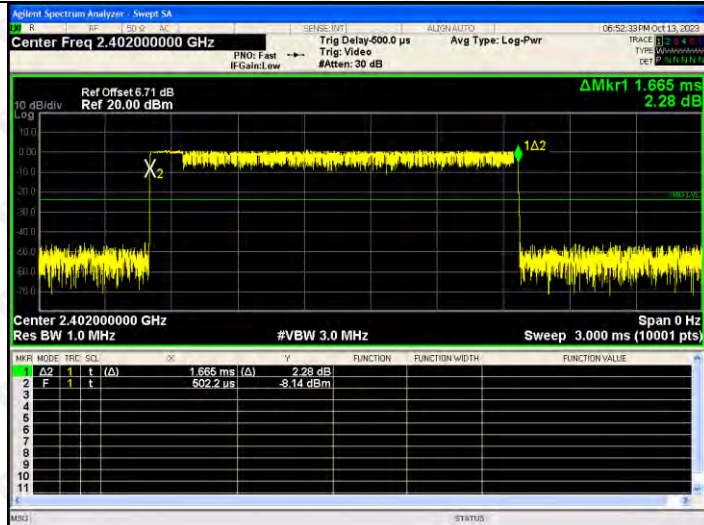

GFSK_DH3/MCH

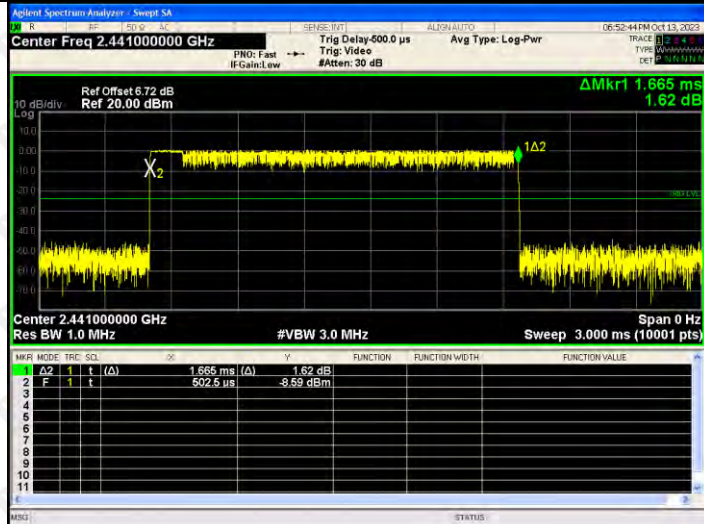

GFSK_DH3/HCH

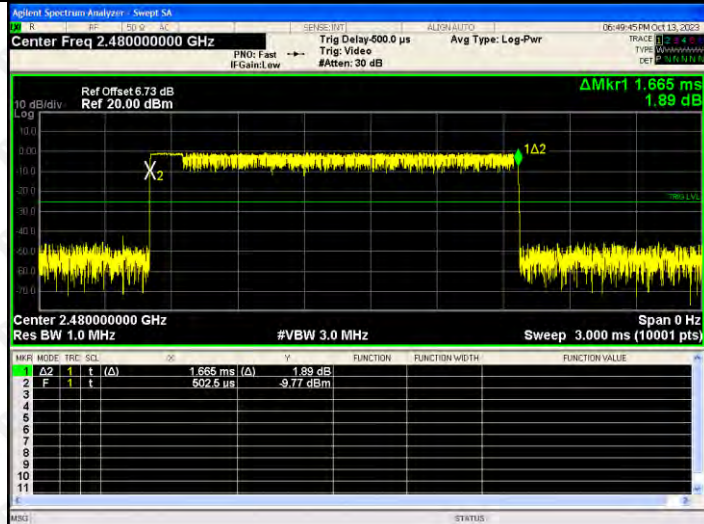

<p>GFSK_DH5/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.40200000 GHz</p> <p>Ref Offset: 6.71 dB Ref: 20.00 dBm</p> <p>Delta Marker 1: 2.916 ms 2.48 dB</p> <p>Center: 2.40200000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td></td> <td></td> <td>2.916 ms (A)</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td></td> <td></td> <td>502.0 μs</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-7.66 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)			2.916 ms (A)	2	F	1	t				502.0 μs	3							-7.66 dBm
MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	A2	1	t	(A)			2.916 ms (A)																										
2	F	1	t				502.0 μs																										
3							-7.66 dBm																										
<p>GFSK_DH5/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.44100000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 20.00 dBm</p> <p>Delta Marker 1: 2.917 ms -4.29 dB</p> <p>Center: 2.44100000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td></td> <td></td> <td>2.917 ms (A)</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td></td> <td></td> <td>502.6 μs</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-8.04 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)			2.917 ms (A)	2	F	1	t				502.6 μs	3							-8.04 dBm
MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	A2	1	t	(A)			2.917 ms (A)																										
2	F	1	t				502.6 μs																										
3							-8.04 dBm																										
<p>GFSK_DH5/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.48000000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p>Delta Marker 1: 2.917 ms -2.50 dB</p> <p>Center: 2.48000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td></td> <td></td> <td>2.917 ms (A)</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td></td> <td></td> <td>502.0 μs</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-9.60 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)			2.917 ms (A)	2	F	1	t				502.0 μs	3							-9.60 dBm
MKR	MODE	TRC	SCL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	A2	1	t	(A)			2.917 ms (A)																										
2	F	1	t				502.0 μs																										
3							-9.60 dBm																										

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

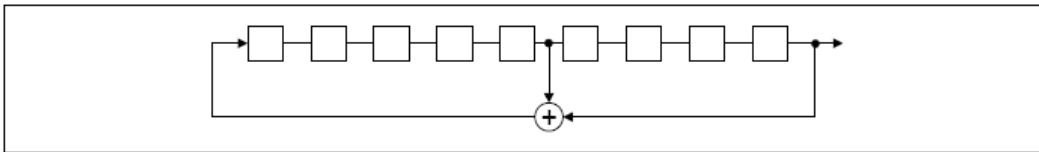

An example of Pseudorandom Frequency Hopping Sequence as follow:

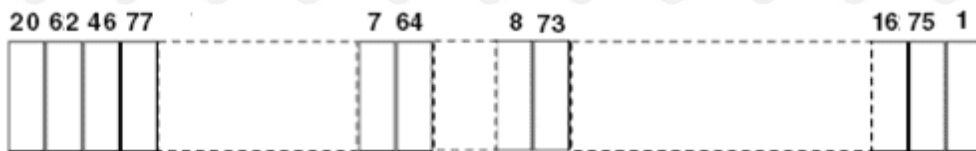

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.68dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

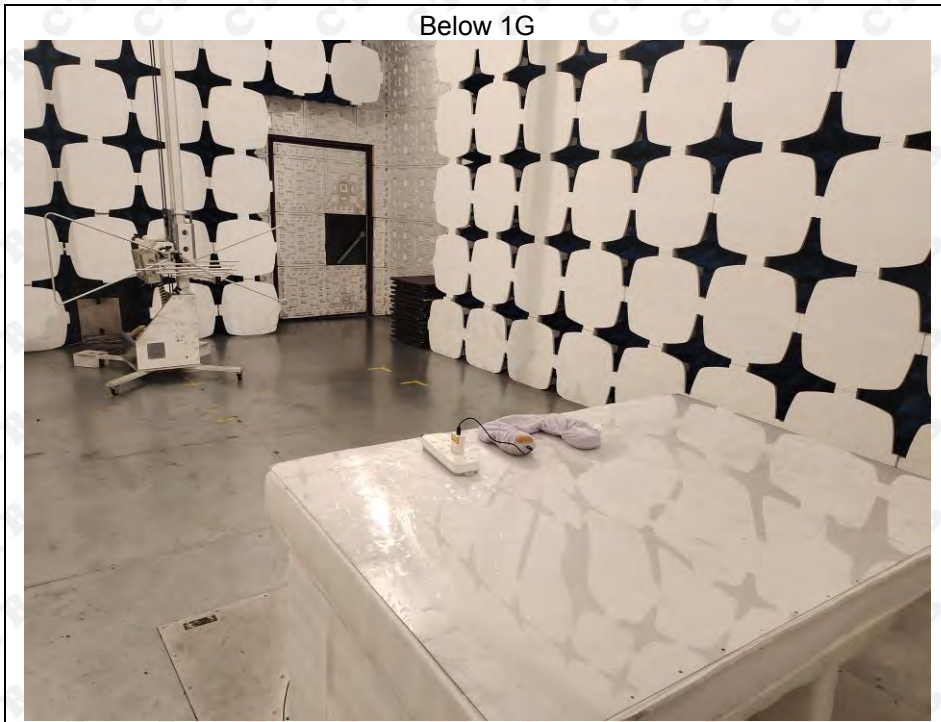

Above 1G

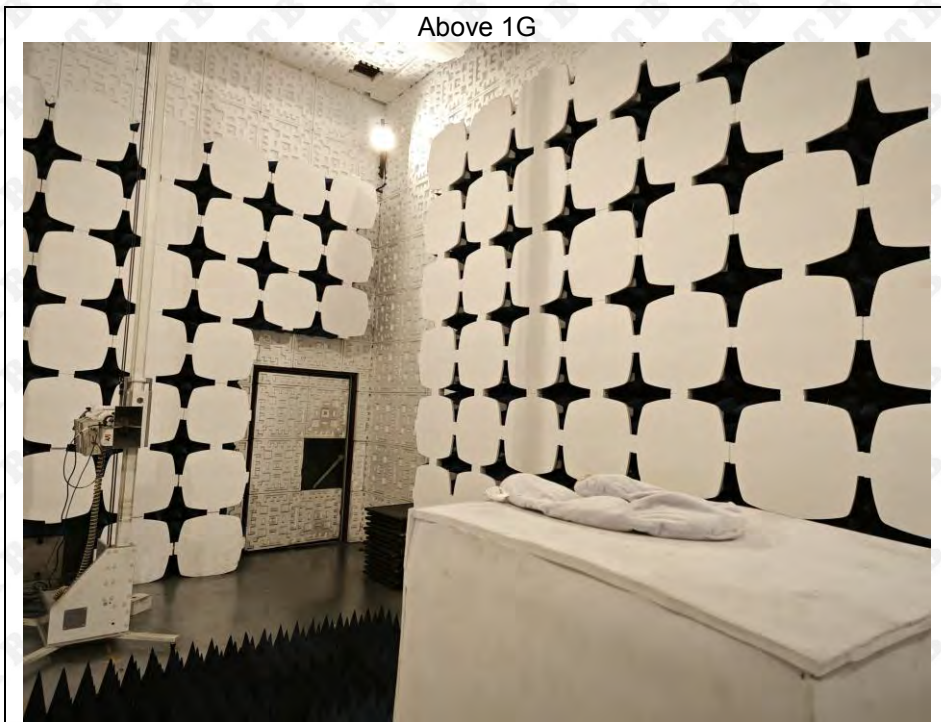

Conducted emissions

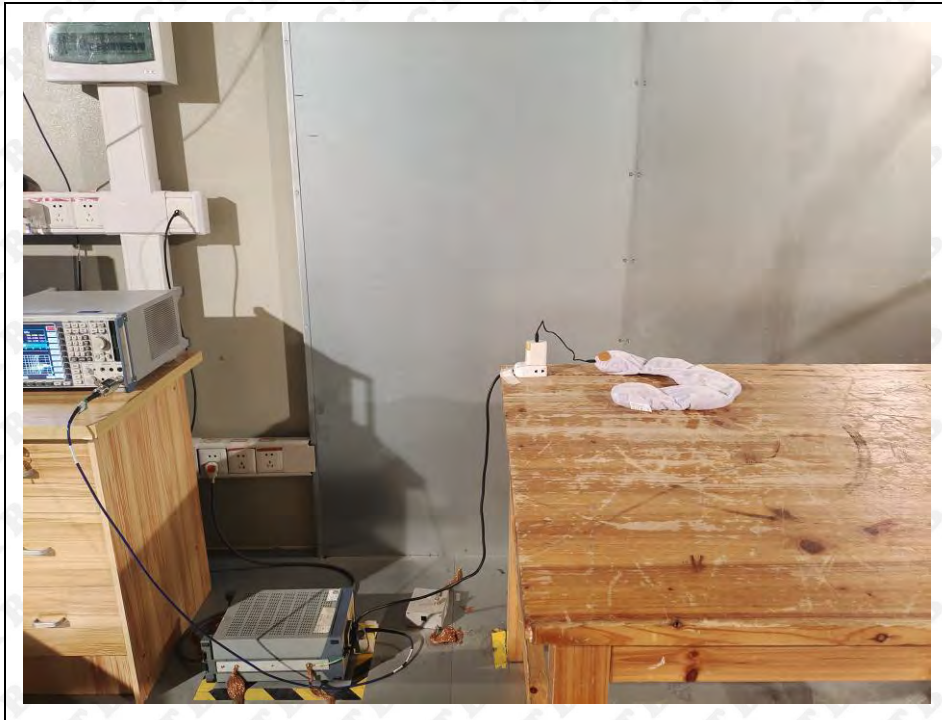

※※※※ END OF REPORT ※※※※