



EMEET OfficeCore Luna Plus




English | 日本語 | Deutsch | Français | Español | Italiano | Русский | 繁體中文 | 简体中文
User Manual/产品说明书


CONTENTS

English.....	01
日本語.....	08
Deutsch.....	15
Français.....	22
Español.....	29
Italiano.....	36
Русский.....	43
繁體中文.....	50
简体中文.....	57


Luna Plus Kit

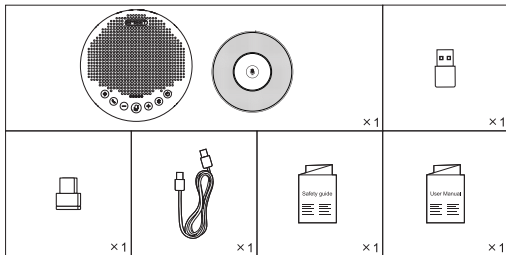

Luna Plus

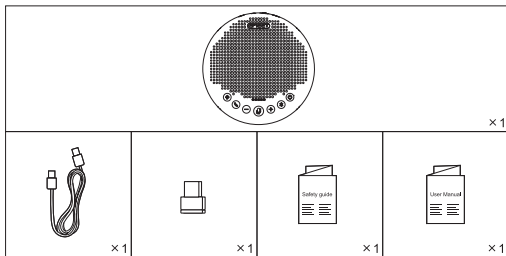



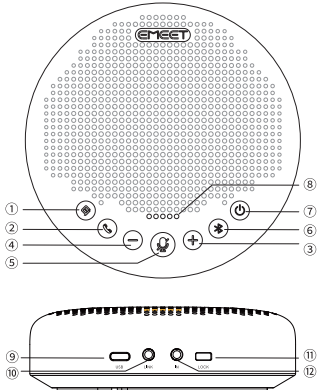



Overview











- ① AI noise reduction on/off
- ② Answer/End phone call
- ③ Volume up
- ④ Volume down
- ⑤ Mute/Unmute microphone
- ⑥ Bluetooth button
- ⑦ Power button
- ⑧ Status indicator
- ⑨ USB port
- ⑩ Daisy Chain port
- ⑪ LOCK port
- ⑫ Port for connecting expansion microphone

Button Controls

Diagram	Action	Description
	Press	AI noise reduction on/off
	Press and hold	Power on/off
	In power-on state, press	Display battery level

	Press	Turn up/down the volume by a single grid
	Press and hold	Turn up/down the volume continuously
	Press	Answer/End phone call
	Incoming call, press and hold	Reject phone call
	Press	MIC mute/unmute
	Press and hold	Search Bluetooth
	Press	Bluetooth closed
		Bluetooth reconnected

Status LED

Status	Color	Display
USB connection	Steady green	
Search Bluetooth	Flash blue	
The Bluetooth connection is established.	Steady blue	
The Bluetooth is closed/being reconnected.	Steady white	
Daisy Chain	Steady ice blue	
MIC muted	Steady red	
Caller display	Flash green	
Battery low display	Flash red	

Operating Instructions

1 Power On/Off

- Manual on/off

Press and hold the power button for 2 seconds to power on or power off the product.

- Auto on/off

- Connect the product to a PC via a USB cable to power it on or off automatically.


- The product will power off automatically if no connection or operation is performed in 1 hour.

Note: The auto-off duration can be modified in EMEETLINK software.

2 Connection

- USB connection

Connect the product to a PC via a USB to power it on automatically. Plug-and-play is supported



- Bluetooth connection

The product can be connected to mobile devices such as PCs or mobile phones through Bluetooth pairing after it's powered on.

Note: When the product is powered on, it will reconnect to the last connected device via Bluetooth (if enabled on the device) The product cannot be found if its Bluetooth is closed.



- USB Dongle connection

The Bluetooth will connect instantly and automatically after the product is powered on if it's connected to a PC via the USB Dongle connection.



3 Battery Display

- Check battery level

The status indicators will indicate the battery level if the power button is short pressed when powered on.

Battery	Color	Display
0%-20%	Green	● ○ ○ ○ ○
20%-40%	Green	● ● ○ ○ ○
40%-60%	Green	● ● ● ○ ○
60%-80%	Green	● ● ● ● ○
80%-100%	Green	● ● ● ● ●

- Low battery

In power-on state, the 5 lights of the status indicators will flash red for 5 seconds and then go out.

- Charging

Status	Color	Display
Charging in power-off state	Yellow-green	○ ○ ● [*] ○ ○
Fully charged in power-off state	Yellow-green	○ ○ ● ○ ○


4 Volume Display

20%	● ○ ○ ○ ○
40%	● ● ○ ○ ○
60%	● ● ● ○ ○
80%	● ● ● ● ○
100%	● ● ● ● ●


5 Daisy Chain Cable

- Daisy Chain can be carried out by connecting the ports of two products using a Daisy Chain cable.
- The Status indicator turns ice blue when Daisy Chain is connected.

Note: Please use the EMEET dedicated Daisy Chain cable to connect the devices. EMEET Daisy Chain cables must be purchased separately.



5-10 persons can be connected
without the Daisy Chain connection.




10-18 persons can be connected
with the Daisy Chain connection.


6 Connecting Expansion Microphone

- The expansion microphone can pick up sound after its 3.5mm audio port is connected to the port for connecting such a microphone on the product.

Note : Please use the EMEET dedicated expansion microphone to connect the devices.




5-10 persons can be connected before the expansion microphone is connected.



8-14 persons can be connected after the expansion microphone is connected.

7 Lock Port Setting



- The product can be locked through the LOCK port to prevent theft.
- Note: The LOCK port is of a Kensington type which requires the user to buy a lock otherwise.



8 Download Application

- Visit www.emeet.com to download the EMEETLINK PC desktop app for software updates.

Note: The device can operate normally even if EMEETLINK is not downloaded.



Product Parameters


Note: In case of any changes in the specifications, official website information shall prevail.

Charging input	5V \pm 1A
Output rating	5W
Charging time	3-4 hours
Speaker frequency range	20Hz-20KHz
Bluetooth version	V5.3
Bluetooth range	20m (in an open environment)
Product size	130*130*36.5mm

Contact Us

Official website: www.emeet.com

概観

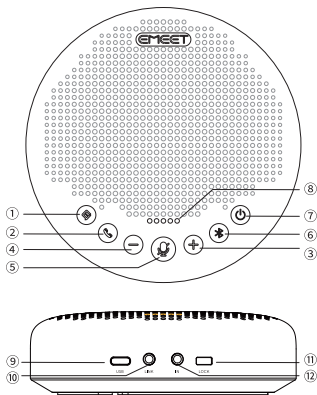

- ① AIノイズリダクションオン/オフ
- ② 電話に出る/切る
- ③ 音量アップ
- ④ 音量ダウン
- ⑤ マイクのミュート/ミュート解除
- ⑥ Bluetoothボタン
- ⑦ 電源ボタン
- ⑧ ステータスインジケータ
- ⑨ USBポート
- ⑩ デイジーチェーン/AUX OUT端子
- ⑪ LOCKポート
- ⑫ AUX IN端子

ボタンによるコントロール

図	アクション	説明
	押す	AIノイズリダクションオン/オフ
	押したままにする	電源オン/オフ
	電源オンの状態で、押す	バッテリーレベルの表示

⊕/⊖	押す	1段階ずつ音量を上げる／下げる
	押しただままにする	連続して音量を上げる／下げる
☎	押す	電話に出る／切る
	着信中に押しただままにする	着信拒否
🎤	押す	マイクミュート／ミュート解除
* Bluetooth	押しただままにする	Bluetoothを探す
	押す	Bluetooth終了
		Bluetooth再接続

ステータスLED

ステータス	色	表示
USB接続	緑色の点灯	○ ○ ● ○ ○
Bluetoothを探す	青色の点滅	○ ○ 🌟 ○ ○
Bluetooth接続が確立されました	青色の点灯	○ ○ ● ○ ○
Bluetoothはオフ／再接続中です	白色の点灯	○ ○ ● ○ ○
デジチューン	淡青色の点灯	○ ○ ● ○ ○
マイクミュート	赤色の点灯	● ● ● ● ●
発呼者の表示	緑色の点滅	🌟 🌟 🌟 🌟 🌟
バッテリー残量少の表示	赤色の点滅	🌟 🌟 🌟 🌟 🌟

操作の説明

1 電源オン/オフ

- 手動でオン/オフ

電源ボタンを2秒間押しただままにして、本製品の電源をオン/オフします

- 自動オン/オフ

- USBケーブルを介して本製品をPCに接続すると、自動的に電源をオン/オフできます


- 1時間以上接続や操作が行われないと、自動的に電源がオフになります

注: 自動電源オフモードは、EMEETLINKソフトウェアで変更できます

2 接続

- USB接続

USBを介して本製品をPCに接続すると、自動的に電源オンになります。プラグアンドプレイ対応



- Bluetooth接続


本製品は、電源オンのとき、Bluetoothペアリングにより、PCや携帯電話などの携帯機器に接続できます

注: 本製品をオンにすると、最後に接続した機器とBluetoothを介して再接続されます (機器でBluetoothが有効になっている場合)。本製品は、Bluetoothがオフの場合は、表示されません



- USB Dongle接続

USB Dongleを介してPCに接続されている場合、Bluetoothは、本製品が電源オンになった後、即座に自動的に接続されます



3 バッテリーの表示

- バッテリーレベルの確認

電源オンのとき、電源ボタンを短く押すと、ステータスインジケータにより、バッテリーレベルが表示されます

バッテリー	色	表示
0%-20%	緑色	● ○ ○ ○ ○
20%-40%	緑色	● ● ○ ○ ○
40%-60%	緑色	● ● ● ○ ○
60%-80%	緑色	● ● ● ● ○
80%-100%	緑色	● ● ● ● ●

- バッテリー残量少

電源オンの状態で、ステータスインジケータの5つのライトが5秒間赤色に点滅し、その後消灯します

- 充電中

ステータス	色	表示
電源オフの状態で充電中	黄緑色	○ ○ ● [*] ○ ○
電源オフの状態で満充電	黄緑色	○ ○ ● ○ ○


4 音量表示

20%	● ○ ○ ○ ○
40%	● ● ○ ○ ○
60%	● ● ● ○ ○
80%	● ● ● ● ○
100%	● ● ● ● ●


5 デイジーチェーンケーブル

- デイジーチェーンは、デイジーチェーンケーブルを使用して、2つの製品のポートを接続することにより、実行されます
- ステータスインジケータは、デイジーチェーンが接続されると淡青色に変わります

注: デバイスの接続には、EMEET 専用のデイジーチェーンケーブルを使用してください。EMEET デイジーチェーンケーブルは、別途購入する必要があります



デイジーチェーン接続
なしで5～10名まで対応




デイジーチェーン接続
ありで10～18名まで対応

6 拡張マイクの接続

- 拡張マイクは、3.5mm AUX IN端子を本製品の拡張マイク接続用端子に接続すると、音を拾うことができます

注: EMEET 専用の拡張マイクを使用してデバイスに接続してください。



拡張マイク接続前は5～10名まで対応




拡張マイク接続後は8～14名まで対応

7 LOCKポートの設定

- 本製品は、LOCKポートにより、ロックして、盗難を防止することができます


注: LOCKポートは、Kensingtonタイプで、ユーザーはロックを別途購入する必要があります



8 アプリケーションのダウンロード

- ソフトウェアの更新のために、www.emeeet.comにアクセスして、EMEETLINK PCデスクトップアプリをダウンロードします


注: 本製品は、EMEETLINKがダウンロードされていない場合でも、正常に動作します



Windows

Download

* For Windows 7/8/10 and above



macOS

Download

* For Mac 10.14 and above