

# RF MEASUREMENT REPORT

---

**FCC ID:** 2ALJ3AP45X  
**Applicant:** HAN Networks Co., Ltd.  
**Product:** HAN Access Point  
**Model No.:** AP451  
**Brand Name:** HANNETWORKS; HAN NETWORKS  
**FCC Classification:** 15E 6GHz Low Power Indoor Access Point (6ID)  
**FCC Rule Part(s):** Part 15 Subpart E (Section 15.407)  
**Result:** Complies  
**Test Date:** 2022-04-20 ~ 2022-07-01

**Reviewed By:**

\_\_\_\_\_

**Approved By:**

\_\_\_\_\_



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU065-U5	Rev. 01	Initial Report	2022-09-20	Valid

Note: This report is a copy report of original report 2203RSU064-U5. Only applicant information and Product information (name & model No. & brand name) has changed.

---

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>6</b>
1.1. Applicant.....	6
1.2. Manufacturer .....	6
1.3. Testing Facility.....	6
1.4. Product Information .....	7
1.5. Radio Specification under test .....	7
1.6. Working Frequencies .....	8
1.7. Antenna Details .....	10
<b>2. Test Configuration.....</b>	<b>11</b>
2.1. Test Mode.....	11
2.2. Test System Connection Diagram.....	11
2.3. Test Software.....	12
2.4. Applied Standards .....	12
2.5. Test Environment Condition .....	12
<b>3. Antenna Requirements .....</b>	<b>13</b>
<b>4. Measuring Instrument.....</b>	<b>14</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>15</b>
5.1. Decision Rules .....	15
5.2. Measurement Uncertainty .....	15
<b>6. Test Result .....</b>	<b>16</b>
6.1. Summary .....	16
6.2. 26dB Bandwidth Measurement.....	17
6.2.1. Test Limit .....	17
6.2.2. Test Procedure .....	17
6.2.3. Test Setting.....	17
6.2.4. Test Setup .....	18
6.2.5. Test Result.....	18
6.3. Output Power Measurement .....	19
6.3.1. Test Limit .....	19
6.3.2. Test Procedure .....	19
6.3.3. Test Setting.....	19
6.3.4. Test Setup .....	20
6.3.5. Test Result.....	20
6.4. Power Spectral Density Measurement.....	21
6.4.1. Test Limit .....	21

---

6.4.2.	Test Procedure .....	21
6.4.3.	Test Setting.....	21
6.4.4.	Test Setup .....	22
6.4.5.	Test Result.....	22
6.5.	In-Band Emission Measurement.....	23
6.5.1.	Test Limit .....	23
6.5.2.	Test Procedure .....	23
6.5.3.	Test Setting.....	23
6.5.4.	Test Setup .....	24
6.5.5.	Test Result.....	24
6.6.	Frequency Stability Measurement .....	25
6.6.1.	Test Limit .....	25
6.6.2.	Test Procedure .....	25
6.6.3.	Test Setup .....	25
6.6.4.	Test Result.....	26
6.7.	Contention Based Protocol Measurement .....	27
6.7.1.	Test Limit .....	27
6.7.2.	Test Procedure .....	27
6.7.3.	Test Setting.....	27
6.7.4.	Test Setup .....	28
6.7.5.	Test Result.....	28
6.8.	Radiated Spurious Emission Measurement.....	29
6.8.1.	Test Limit .....	29
6.8.2.	Test Procedure .....	29
6.8.3.	Test Setting.....	30
6.8.4.	Test Setup .....	32
6.8.5.	Test Result.....	32
6.9.	Radiated Restricted Band Edge Measurement .....	33
6.9.1.	Test Limit .....	33
6.9.2.	Test Procedure .....	35
6.9.3.	Test Setting.....	35
6.9.4.	Test Setup .....	36
6.9.5.	Test Result.....	36
6.10.	AC Conducted Emissions Measurement .....	37
6.10.1.	Test Limit .....	37
6.10.2.	Test Setup .....	37
6.10.3.	Test Result.....	37
<b>Appendix A – Test Result.....</b>		<b>38</b>

---

A.1	Duty Cycle Test Result.....	38
A.2	26dB Bandwidth Test Result.....	39
A.3	Output Power Test Result .....	48
A.4	Power Spectral Density Test Result .....	50
A.5	In-Band Emission Measurement .....	59
A.6	Frequency Stability Test Result.....	123
A.7	Contention Based Protocol Test Result .....	124
A.8	Radiated Spurious Emission Test Result .....	132
A.9	Radiated Restricted Band Edge Test Result.....	177
A.10	AC Conducted Emissions Test Result .....	209
<b>Appendix B – Test Setup Photograph .....</b>		<b>211</b>
<b>Appendix C – EUT Photograph .....</b>		<b>212</b>



#### 1.4. Product Information

Product Name	HAN Access Point
Model No.	AP451
EUT Identification No.	20220324Sanmple#09 (Radiated) 20220324Sanmple#10 (Conducted)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	V5.1 Single Mode
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Accessories	
AC Adapter	Model: ADP-50GR B Input: 100-240V ~ 50/60Hz, 1.3A Output: 48.0V, 1.042A, 50.1W MAX
PoE Injector	Model: POE60U-1BT-X Input: 100-240V ~ 1.5A, 50/60Hz Output: 56.0V, 0.535A, 30W PIN 3, 6+ PIN 1, 2 Return Output: 56.0V, 0.535A, 30W PIN 4, 5+ PIN 7, 8 Return
Remark:	
<ol style="list-style-type: none"> <li>The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</li> <li>AC Power Adapter and PoE Injector are not sold with Product.</li> <li>For this report, we select AC Adapter for testing.</li> </ol>	

#### 1.5. Radio Specification under test

Frequency Range	For 802.11ax-HE20: 5955 ~ 7095MHz For 802.11ax-HE40: 5965 ~ 7085MHz For 802.11ax-HE80: 5985 ~ 7025MHz For 802.11ax-HE160: 6025 ~ 6985MHz
Type of Modulation	802.11ax: OFDMA
Data Rate	802.11ax: up to 4804Mbps

Note: For other features of this EUT, test report will be issued separately.

## 1.6. Working Frequencies

802.11ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--



## 802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

## 802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
07	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

## 802.11ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

### 1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Tx Paths	Antenna Gain (dBi)		Directional Gain (dBi)		Beamforming Directional Gain (dBi)
			Max	Min	For Power	For PSD	
<b>Wi-Fi Antennas</b>							
PIFA	2400 ~ 2483.5	4	3.9	3.4	3.9	9.92	9.92
PIFA & Dipole	5150 ~ 5850	8	3.9	3.5	BW≥40M, 3.9 BW=20M, 6.9	12.93	12.93
Dipole	5925 ~ 7125	4	3.8	3.4	3.8	9.82	9.82
<b>Scan Antenna</b>							
Dipole	2400 ~ 2483.5	1	3.5		3.5	3.5	--
Dipole	5150 ~ 5250 & 5725 ~5850	1	3.9		3.9	3.9	--
<b>Bluetooth Antenna</b>							
Dipole	2400 ~ 2483.5	1	3.5		3.5	3.5	--
Remark: <ol style="list-style-type: none"> <li>The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated. For CDD transmissions, directional gain is calculated as follows. Directional gain = <math>G_{ANT\ Max} + \text{Array Gain}</math>, where Array Gain is as follows.               <ul style="list-style-type: none"> <li>For power spectral density (PSD) measurements on all devices, Array Gain = <math>10 \log (N_{ANT} / N_{SS})</math> dB;</li> <li>For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for <math>N_{ANT} \leq 4</math>; Array Gain = 0 dB for channel widths <math>\geq 40</math> MHz for any <math>N_{ANT}</math>; Array Gain = <math>5 \log(N_{ANT} / N_{SS})</math> dB or 3 dB, whichever is less, for 20MHz channel widths with <math>N_{ANT} \geq 5</math>.</li> </ul> </li> <li>The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Beamforming Directional gain = <math>G_{ANT\ Max} + 10 \log (N_{ANT} / N_{SS})</math>.</li> </ol>							


## 2. Test Configuration

### 2.1. Test Mode

Mode 1: Transmit by 802.11ax-HE20 (MCS0) – CDD Mode
Mode 2: Transmit by 802.11ax-HE40 (MCS0) – CDD Mode
Mode 3: Transmit by 802.11ax-HE80 (MCS0) – CDD Mode
Mode 4: Transmit by 802.11 ax-HE160 (MCS0) – CDD Mode
Remark:
<ol style="list-style-type: none"> <li>1. For radiated spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li> <li>2. This device supports 4 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1.</li> <li>3. After preliminary scan designated by the manufacturer, CDD mode is determined to be the worst case compared to Beamforming mode, hence, all the radiated test is performed in CDD mode.</li> <li>4. For beamforming operation, manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.</li> <li>5. EUT supports one configuration only in 802.11ax full RU mode.</li> </ol>

### 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

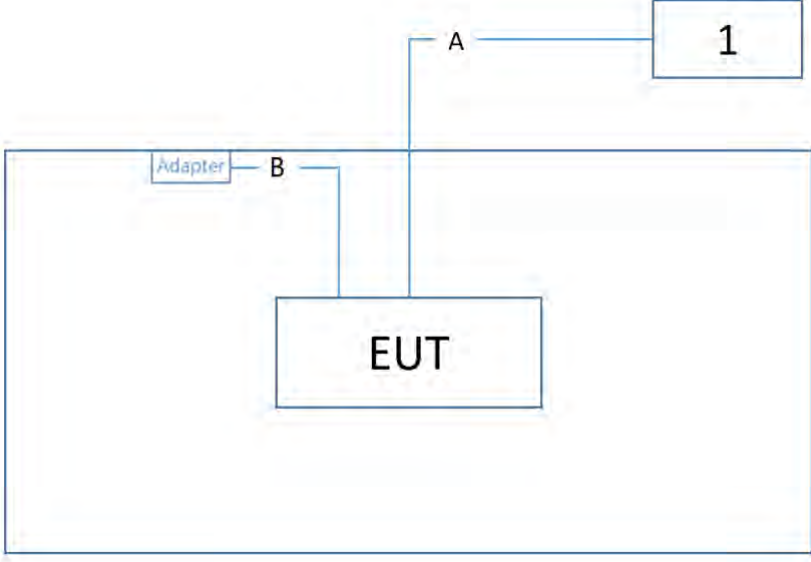Connection Diagram – Radiated Emission testing & AC Conducted Emissions		
		
Cable Type	Cable Description	
A	LAN Cable	Non shielded, > 10m
B	Power Cable	Non shielded, 1.25m

Product		Manufacturer	Model No.
1	Notebook	Dell	Latitude 5491

### 2.3. Test Software

The test utility software used during testing was “QSPR”, and the version was 5.0-00099.

### 2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v01r01
- FCC KDB 987594 D04v01
- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

### 2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

### 3. Antenna Requirements

Excerpt from §15.407(a)(9) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022-06-09	SIP-AC3
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2023-06-08	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2022-11-09	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2022-09-12	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2022-11-02	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2022-11-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2023-01-13	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2022-08-26	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2022-12-23	SIP-AC3
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2023-03-14	SIP-AC3
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022-06-08	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2023-06-04	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	N/A	N/A	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2022-06-28	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2023-06-06	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2022-10-13	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022-11-01	WZ-SR2
USB Power Sensor	Agilent	U2021XA	MRTSUE06030	1 year	2022-10-10	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2022-06-28	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Generator	Keysight	M9384B	MRTSUE06994	1 year	2022-09-24	WZ-SR5
Power Divider	MVE	MVE8576	MRTSUE06259	1 year	2022-10-28	WZ-SR5
Directional Coupler	narda	4226-10	MRTSUE06562	1 year	2022-10-28	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2022-06-24	WZ-SR5/WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5/WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11072	1 year	2022-06-10	WZ-SR5/WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11072	1 year	2023-06-09	WZ-SR5/WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022-10-10	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022-06-28	WZ-TR3

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna&turntable
BenchVue Power Meter	2021	Power

## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
<b>Radiated Disturbance</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(g)	Frequency Stability		Pass
15.407(a)(5), (a)(6)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P)	Radiated	Pass
15.407(a)(5), (a)(6)	Peak Power Spectral Density (E.I.R.P)		Pass
15.407(b)(6)	Unwanted Emissions		Pass
15.407(b)(9), (b)(10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

#### Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- EUT supports one configuration only in 802.11ax full RU mode.



## 6.2. 26dB & 99% Bandwidth Measurement

### 6.2.1. Test Limit

N/A

### 6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

### 6.2.3. Test Setting


#### 26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

#### 6.2.4. Test Setup

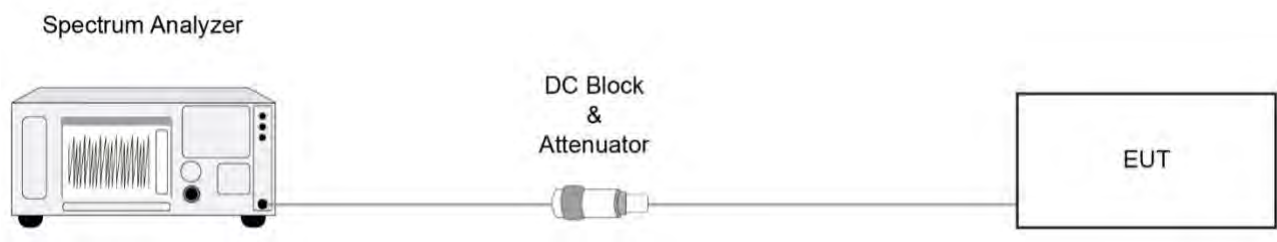

#### 6.2.5. Test Result

Refer to Appendix A.2.

### **6.3. Output Power Measurement**

#### **6.3.1. Test Limit**

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

#### **6.3.2. Test Procedure**


KDB 789033D02v02r01- Section E)2)d) Method SA-2

#### **6.3.3. Test Setting**

1. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
2. Set RBW = 1 MHz
3. Set VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq 2 \times$  span / RBW
5. Sweep time = auto
6. Detector = power averaging (rms)
7. Allow the sweep to "free run"
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Use the Channel Power function of the instrument.

Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

### 6.3.4. Test Setup

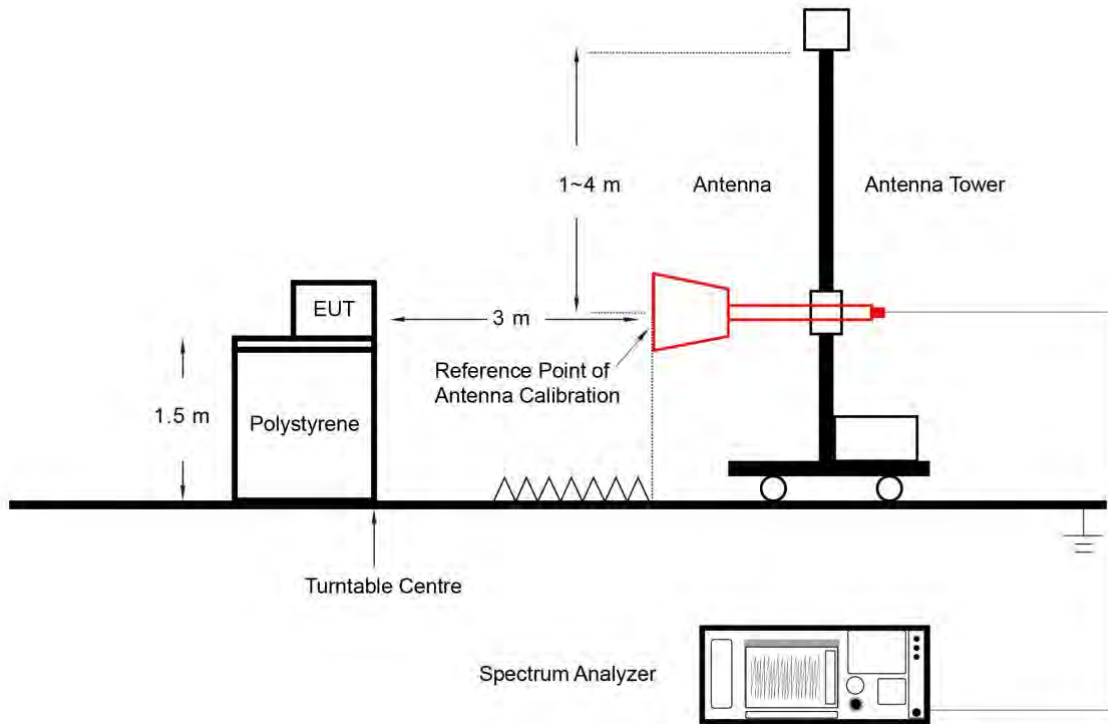

### 6.3.5. Test Result

Refer to Appendix A.3.

## 6.4. Power Spectral Density Measurement

### 6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band.


### 6.4.2. Test Procedure

KDB 789033 D02v02r01-SectionF

### 6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add  $10 \cdot \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \cdot \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### 6.4.4. Test Setup

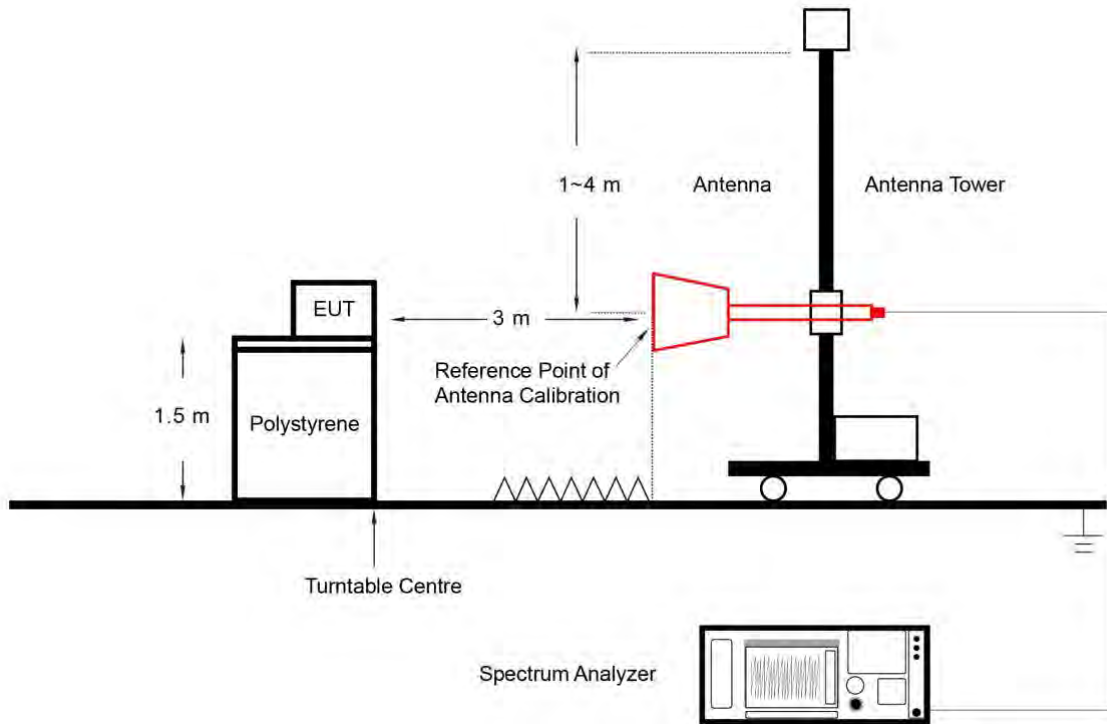

#### 6.4.5. Test Result

Refer to Appendix A.4.

## **6.5. In-Band Emission Measurement**

### **6.5.1. Test Limit**

Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

### **6.5.2. Test Procedure**

KDB 987594 D02v01r01- Section J

### **6.5.3. Test Setting**


#### Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW  $\geq 3 \times$  RBW.
4. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

#### In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

#### 6.5.4. Test Setup

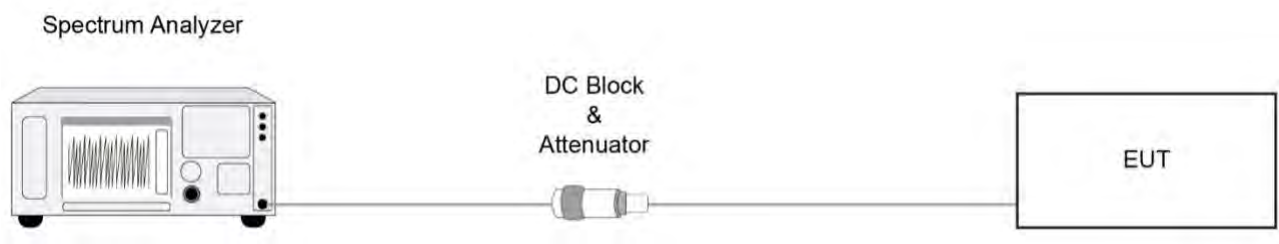

#### 6.5.5. Test Result

Refer to Appendix A.5.



## 6.6. Frequency Stability Measurement

### 6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 6.6.2. Test Procedure

#### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 6.6.3. Test Setup

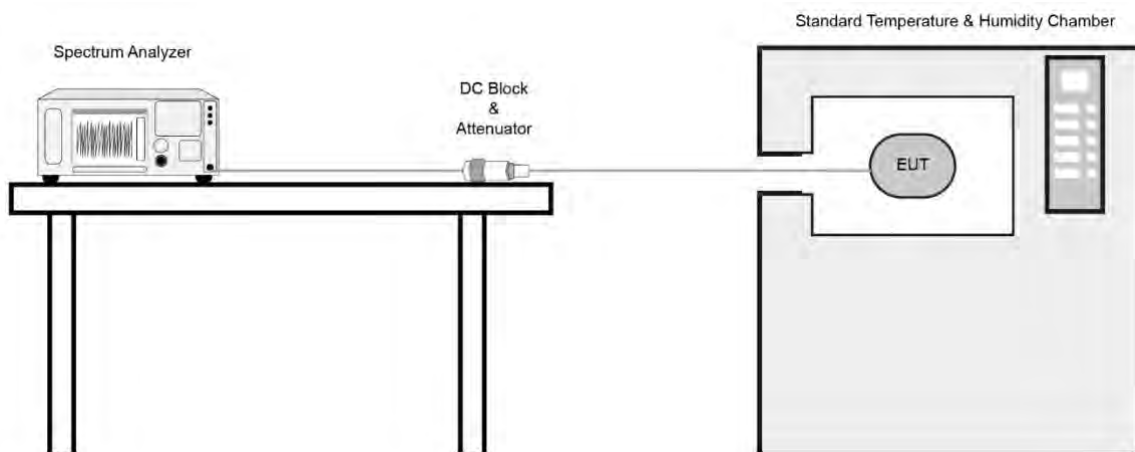

#### **6.6.4. Test Result**

Refer to Appendix A.6.

## **6.7. Contention Based Protocol Measurement**

### **6.7.1. Test Limit**

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

### **6.7.2. Test Procedure**


KDB 987594 D02v01- Section I

### **6.7.3. Test Setting**

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.  
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center

frequency for the AWGN signal and repeat the process.

#### 6.7.4. Test Setup

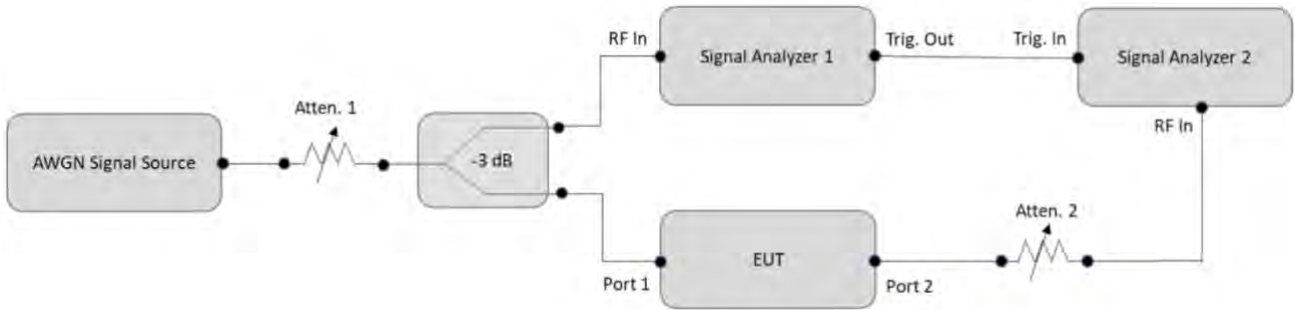

#### 6.7.5. Test Result

Refer to Appendix A.7.

**6.8. Radiated Spurious Emission Measurement**

**6.8.1. Test Limit**

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**6.8.2. Test Procedure**

KDB 789033 D02v02r01-Section II)G)

**6.8.3. Test Setting****Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.8.4. Test Setup

Below 1GHz Test Setup:

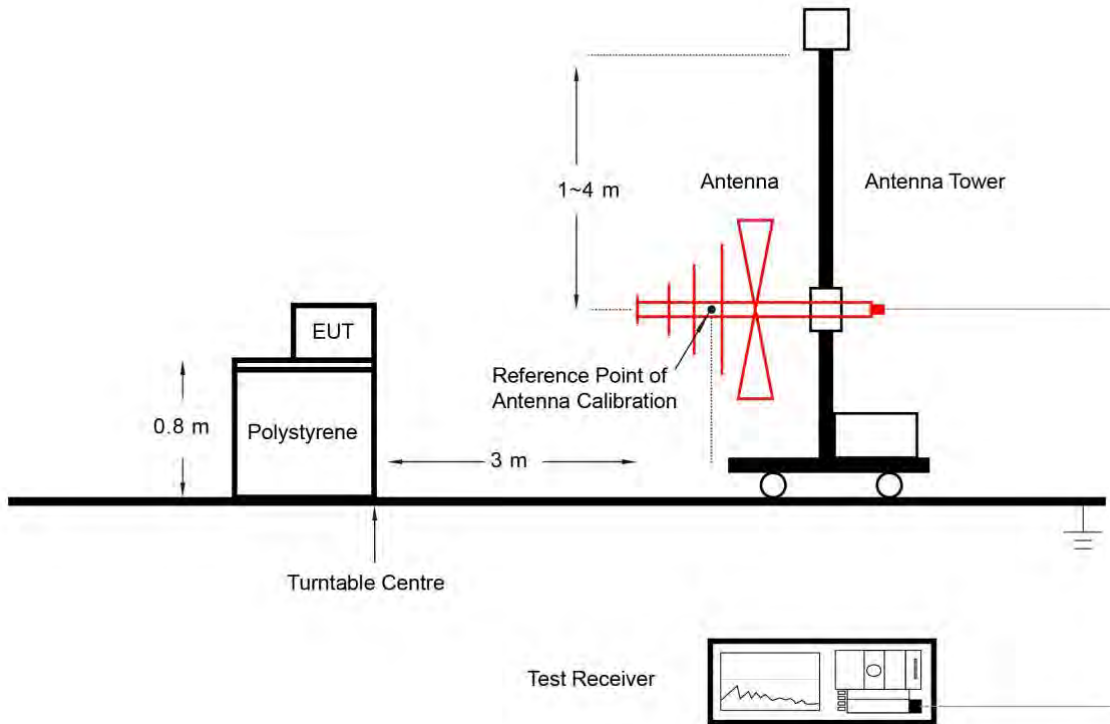

Above 1GHz Test Setup:

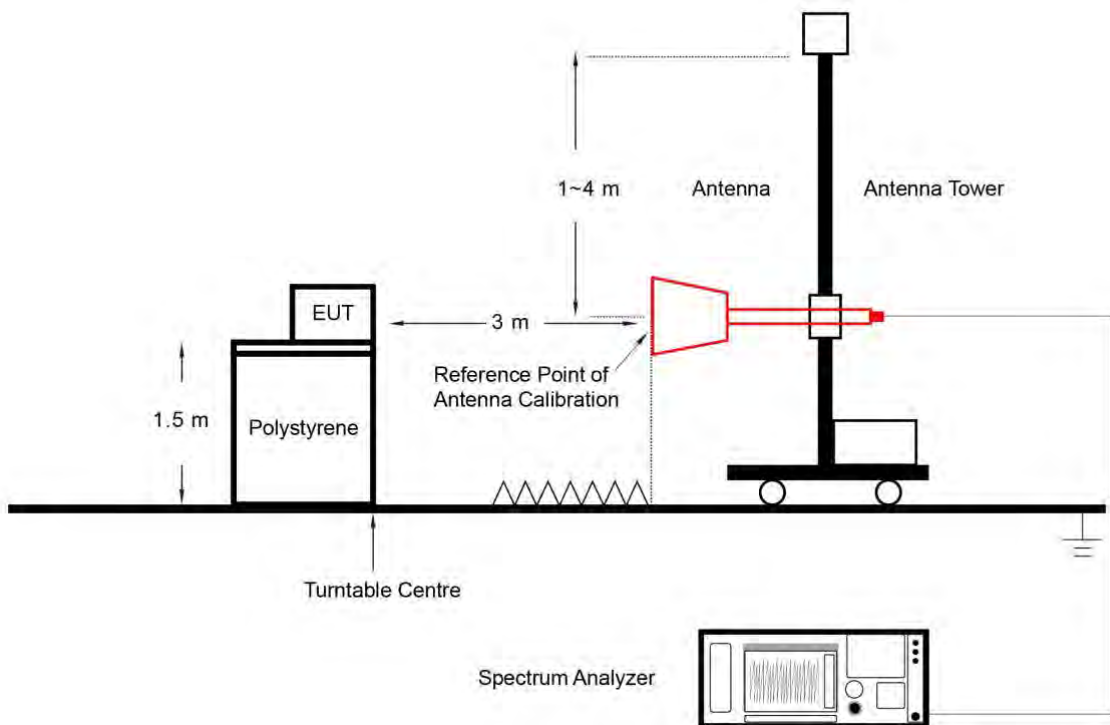

### 6.8.5. Test Result

Refer to Appendix A.8.



## 6.9. Radiated Restricted Band Edge Measurement

### 6.9.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

**For 15.407(b)(5) requirement:**

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission Measurement Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.9.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

### 6.9.3. Test Setting


#### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

#### **Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz
4. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

### 6.9.4. Test Setup

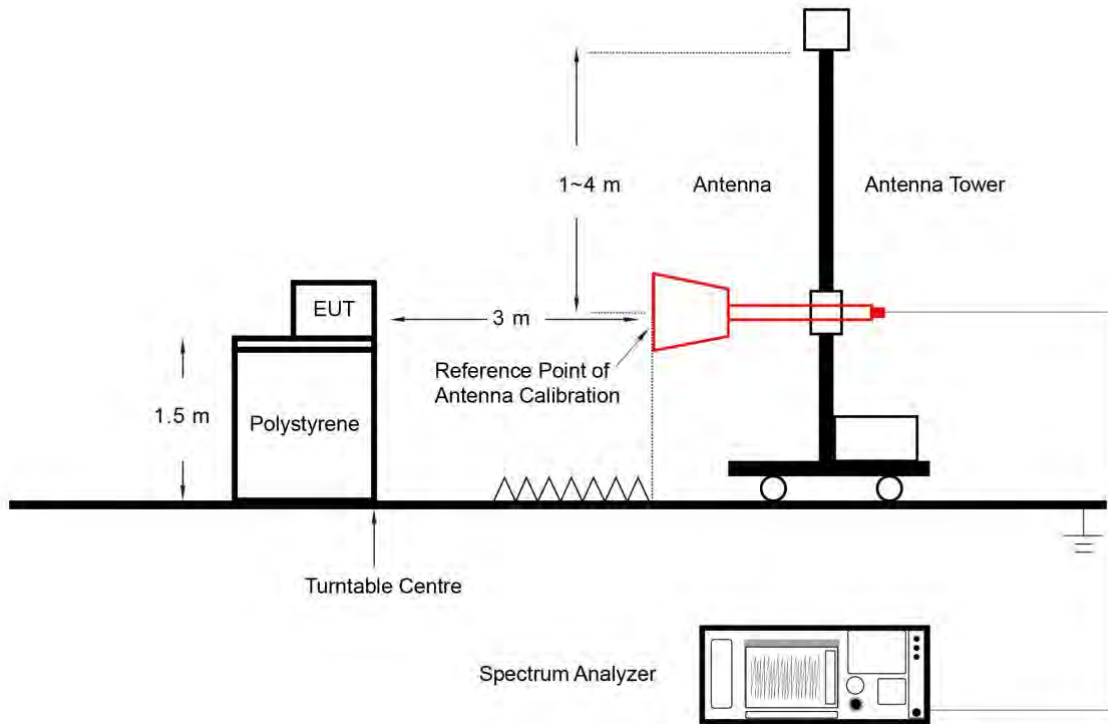

### 6.9.5. Test Result

Refer to Appendix A.9.

## 6.10. AC Conducted Emissions Measurement


### 6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.10.2. Test Setup

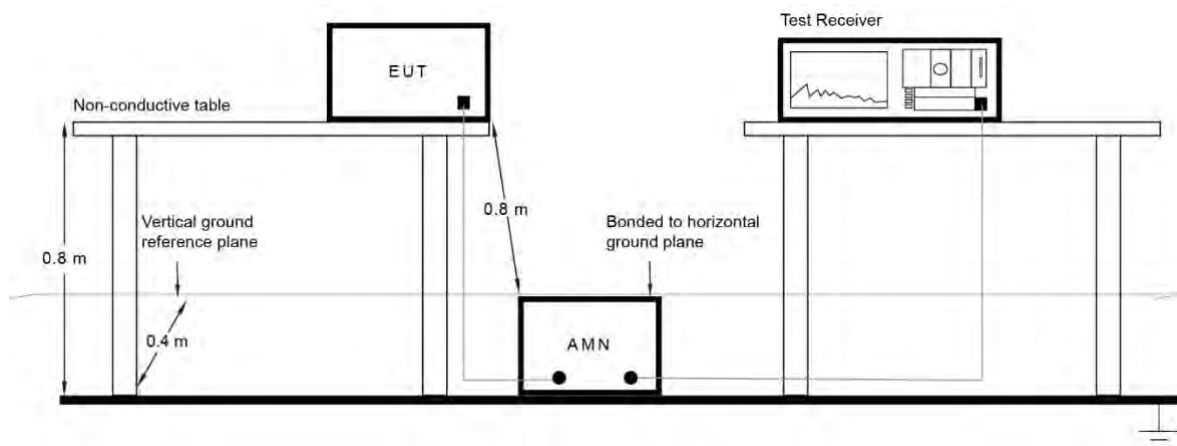

### 6.10.3. Test Result

Refer to Appendix A.10.

## Appendix A – Test Result

### A.1 Duty Cycle Test Result

Test Mode	Duty Cycle
802.11ax-HE20	86.23%
802.11ax-HE40	93.63%
802.11ax-HE80	93.88%
802.11ax-HE160	94.73%
<b>Duty Cycle (T = Transmission Duration)</b>	
802.11ax-HE20 (T = 5.450ms)	802.11ax-HE40 (T = 5.440ms)
802.11ax-HE80 (T = 5.432ms)	802.11ax-HE160 (T = 5.400ms)

**A.2 26dB & 99% Bandwidth Test Result**

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/05/06		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ax-HE20	MCS0	01	5955	21.45	19.041
802.11ax-HE20	MCS0	49	6195	21.48	19.045
802.11ax-HE20	MCS0	93	6415	21.75	19.040
802.11ax-HE20	MCS0	97	6435	21.53	19.036
802.11ax-HE20	MCS0	105	6475	22.10	19.031
802.11ax-HE20	MCS0	113	6515	21.77	19.073
802.11ax-HE20	MCS0	117	6535	21.93	19.067
802.11ax-HE20	MCS0	149	6695	21.52	19.077
802.11ax-HE20	MCS0	181	6855	22.08	19.072
802.11ax-HE20	MCS0	185	6875	22.02	19.034
802.11ax-HE20	MCS0	189	6895	21.94	19.043
802.11ax-HE20	MCS0	209	6995	22.19	19.080
802.11ax-HE20	MCS0	229	7095	21.85	19.081
802.11ax-HE40	MCS0	03	5965	40.40	37.618
802.11ax-HE40	MCS0	51	6205	40.21	37.623
802.11ax-HE40	MCS0	91	6405	40.18	37.663
802.11ax-HE40	MCS0	99	6445	40.35	37.670
802.11ax-HE40	MCS0	107	6485	40.45	37.598
802.11ax-HE40	MCS0	115	6525	40.38	37.622
802.11ax-HE40	MCS0	123	6565	40.23	37.665
802.11ax-HE40	MCS0	147	6685	40.15	37.665
802.11ax-HE40	MCS0	187	6885	40.08	37.668
802.11ax-HE40	MCS0	195	6925	40.36	37.592
802.11ax-HE40	MCS0	211	7005	40.06	37.616
802.11ax-HE40	MCS0	227	7085	40.33	37.647

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ax-HE80	MCS0	07	5985	81.64	76.989
802.11ax-HE80	MCS0	55	6225	82.29	77.070
802.11ax-HE80	MCS0	87	6385	82.61	77.035
802.11ax-HE80	MCS0	103	6465	82.29	77.111
802.11ax-HE80	MCS0	119	6545	82.41	77.058
802.11ax-HE80	MCS0	135	6625	82.58	77.119
802.11ax-HE80	MCS0	151	6705	81.96	77.112
802.11ax-HE80	MCS0	167	6785	82.47	77.040
802.11ax-HE80	MCS0	183	6865	82.40	76.993
802.11ax-HE80	MCS0	199	6945	81.66	76.996
802.11ax-HE80	MCS0	215	7025	81.88	77.019
802.11ax-HE160	MCS0	15	6025	164.0	154.74
802.11ax-HE160	MCS0	47	6185	163.5	154.54
802.11ax-HE160	MCS0	79	6345	164.0	154.89
802.11ax-HE160	MCS0	111	6505	164.2	154.20
802.11ax-HE160	MCS0	143	6665	163.6	154.80
802.11ax-HE160	MCS0	175	6825	164.0	154.52
802.11ax-HE160	MCS0	207	6985	165.2	153.68



802.11ax-HE20 26dB & 99% Bandwidth

Channel 01 (5955MHz)



Channel 49 (6195MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)




Channel 113 (6515MHz)



Channel 117 (6535MHz)



Channel 149 (6695MHz)

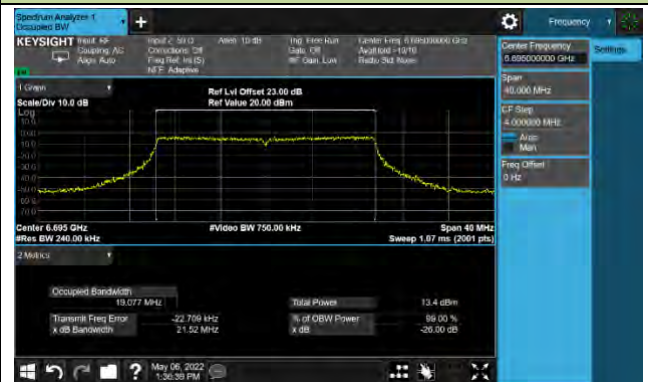

802.11ax-HE20 26dB & 99% Bandwidth


Channel 181 (6855MHz)



Channel 185 (6875MHz)



Channel 189 (6895MHz)

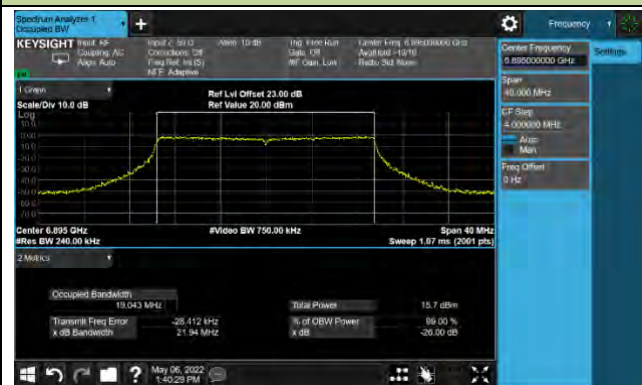

Channel 209 (6995MHz)



Channel 229 (7095MHz)





802.11ax-HE40 26dB & 99% Bandwidth

Channel 03 (5965MHz)



Channel 51 (6205MHz)



Channel 91 (6405MHz)




Channel 99 (6445MHz)



Channel 107 (6485MHz)



Channel 115 (6525MHz)

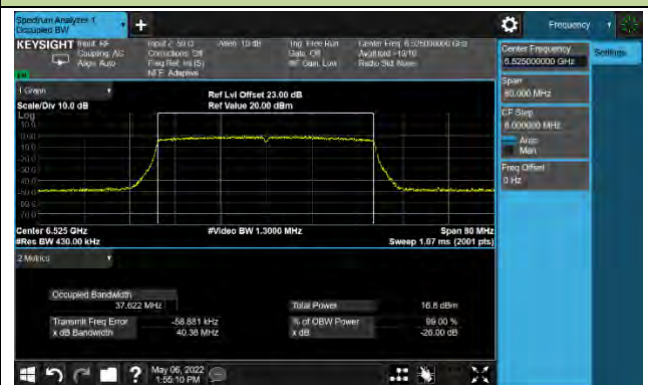

Channel 123 (6565MHz)



Channel 147 (6685MHz)



802.11ax-HE40 26dB & 99% Bandwidth

Channel 187 (6885MHz)




Channel 195 (6925MHz)



Channel 211 (7005MHz)



Channel 227 (7085MHz)

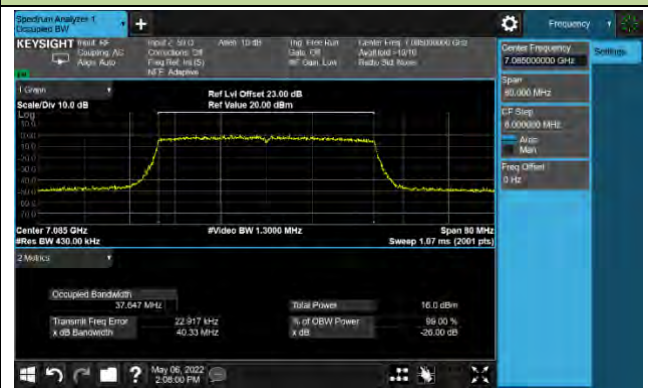



802.11ax-HE80 26dB & 99% Bandwidth

Channel 07 (5985MHz)



Channel 55 (6225MHz)




Channel 87 (6385MHz)



Channel 103 (6465MHz)



Channel 119 (6545MHz)

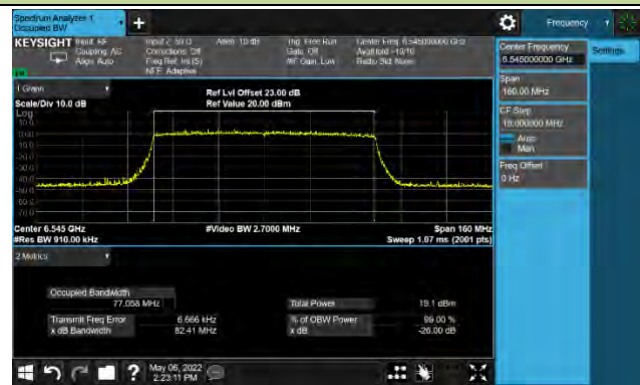

Channel 135 (6625MHz)



Channel 151 (6705MHz)



Channel 167 (6785MHz)



802.11ax-HE80 26dB & 99% Bandwidth

Channel 183 (6865MHz)



Channel 199 (6945MHz)



Channel 215 (7025MHz)





802.11ax-HE160 26dB & 99% Bandwidth

Channel 15 (6025MHz)



Channel 47 (6185MHz)




Channel 79 (6345MHz)




Channel 111 (6505MHz)



Channel 143 (6665MHz)

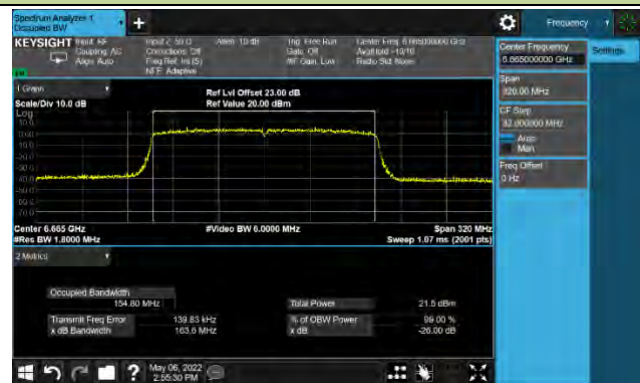

Channel 175 (6825MHz)

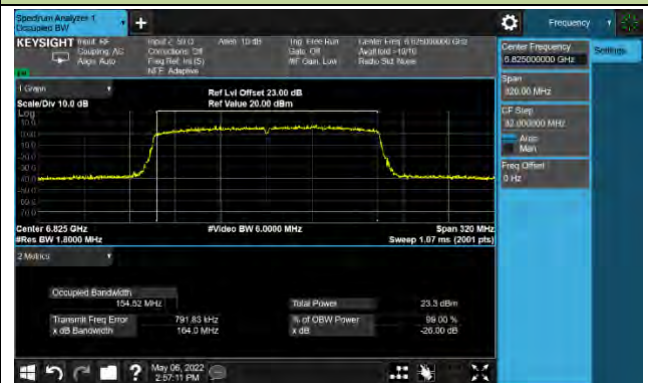

Channel 207 (6985MHz)



**A.3 Output Power Test Result**

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2022/04/21~2022/04/23		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dB $\mu$ V/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	E.I.R.P Limit (dBm)
11ax-HE20	MCS0	01	5955	106.7	11.50	86.23	12.14	≤ 30.00
11ax-HE20	MCS0	49	6195	108.2	13.00	86.23	13.64	≤ 30.00
11ax-HE20	MCS0	93	6415	106.9	11.70	86.23	12.34	≤ 30.00
11ax-HE20	MCS0	97	6435	106.7	11.50	86.23	12.14	≤ 30.00
11ax-HE20	MCS0	105	6475	108.6	13.40	86.23	14.04	≤ 30.00
11ax-HE20	MCS0	113	6515	107.4	12.20	86.23	12.84	≤ 30.00
11ax-HE20	MCS0	117	6535	107.4	12.20	86.23	12.84	≤ 30.00
11ax-HE20	MCS0	149	6695	106.8	11.60	86.23	12.24	≤ 30.00
11ax-HE20	MCS0	181	6855	107.8	12.60	86.23	13.24	≤ 30.00
11ax-HE20	MCS0	185	6875	107.5	12.30	86.23	12.94	≤ 30.00
11ax-HE20	MCS0	189	6895	106.8	11.60	86.23	12.24	≤ 30.00
11ax-HE20	MCS0	209	6995	106.2	11.00	86.23	11.64	≤ 30.00
11ax-HE20	MCS0	229	7095	105.6	10.40	86.23	11.04	≤ 30.00
11ax-HE40	MCS0	03	5965	109.3	14.10	93.63	14.39	≤ 30.00
11ax-HE40	MCS0	51	6205	109.6	14.40	93.63	14.69	≤ 30.00
11ax-HE40	MCS0	91	6405	110.6	15.40	93.63	15.69	≤ 30.00
11ax-HE40	MCS0	99	6445	110.5	15.30	93.63	15.59	≤ 30.00
11ax-HE40	MCS0	107	6485	109.4	14.20	93.63	14.49	≤ 30.00
11ax-HE40	MCS0	115	6525	109.8	14.60	93.63	14.89	≤ 30.00
11ax-HE40	MCS0	123	6565	109.5	14.30	93.63	14.59	≤ 30.00
11ax-HE40	MCS0	147	6685	109.6	14.40	93.63	14.69	≤ 30.00
11ax-HE40	MCS0	187	6885	110.5	15.30	93.63	15.59	≤ 30.00
11ax-HE40	MCS0	195	6925	110.3	15.10	93.63	15.39	≤ 30.00
11ax-HE40	MCS0	211	7005	110.1	14.90	93.63	15.19	≤ 30.00
11ax-HE40	MCS0	227	7085	109.7	14.50	93.63	14.79	≤ 30.00



Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBμV/m)	EIRP (dBm)	Duty Cycle (%)	Total EIRP (dBm)	E.I.R.P Limit (dBm)
11ax-HE80	MCS0	07	5985	113.1	17.90	93.88	18.17	≤ 30.00
11ax-HE80	MCS0	55	6225	113.4	18.20	93.88	18.47	≤ 30.00
11ax-HE80	MCS0	87	6385	114.3	19.10	93.88	19.37	≤ 30.00
11ax-HE80	MCS0	103	6465	113.6	18.40	93.88	18.67	≤ 30.00
11ax-HE80	MCS0	119	6545	113.2	18.00	93.88	18.27	≤ 30.00
11ax-HE80	MCS0	135	6625	112.5	17.30	93.88	17.57	≤ 30.00
11ax-HE80	MCS0	151	6705	112.1	16.90	93.88	17.17	≤ 30.00
11ax-HE80	MCS0	167	6785	111.9	16.70	93.88	16.97	≤ 30.00
11ax-HE80	MCS0	183	6865	112.7	17.50	93.88	17.77	≤ 30.00
11ax-HE80	MCS0	199	6945	112.9	17.70	93.88	17.97	≤ 30.00
11ax-HE80	MCS0	215	7025	112.4	17.20	93.88	17.47	≤ 30.00
11ax-HE160	MCS0	15	6025	115.5	20.30	94.73	20.54	≤ 30.00
11ax-HE160	MCS0	47	6185	115.7	20.50	94.73	20.74	≤ 30.00
11ax-HE160	MCS0	79	6345	117.1	21.90	94.73	22.14	≤ 30.00
11ax-HE160	MCS0	111	6505	115.9	20.70	94.73	20.94	≤ 30.00
11ax-HE160	MCS0	143	6665	115.3	20.10	94.73	20.34	≤ 30.00
11ax-HE160	MCS0	175	6825	115.5	20.30	94.73	20.54	≤ 30.00
11ax-HE160	MCS0	207	6985	115.7	20.50	94.73	20.74	≤ 30.00

Note 1:  $EIRP (dBm) = EIRP (dB\mu V/m) + \text{Correction Factor @ } 3m$ ,  $\text{Correction Factor @ } 3m = 20\log(D) - 104.7$ ; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle < 98%,  $\text{Total EIRP (dBm)} = EIRP (dBm) + 10*\text{Log}(1/\text{Duty cycle})$ .

**A.4 Power Spectral Density Test Result**

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2022/04/21~2022/04/23		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	EIRP PSD (dB $\mu$ V/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE20	MCS0	01	5955	99.16	3.96	86.23	4.60	$\leq 5.00$
802.11ax-HE20	MCS0	49	6195	99.31	4.11	86.23	4.76	$\leq 5.00$
802.11ax-HE20	MCS0	93	6415	99.46	4.26	86.23	4.90	$\leq 5.00$
802.11ax-HE20	MCS0	97	6435	99.06	3.86	86.23	4.50	$\leq 5.00$
802.11ax-HE20	MCS0	105	6475	99.09	3.89	86.23	4.53	$\leq 5.00$
802.11ax-HE20	MCS0	113	6515	99.46	4.26	86.23	4.90	$\leq 5.00$
802.11ax-HE20	MCS0	117	6535	99.37	4.17	86.23	4.82	$\leq 5.00$
802.11ax-HE20	MCS0	149	6695	99.30	4.10	86.23	4.74	$\leq 5.00$
802.11ax-HE20	MCS0	181	6855	99.32	4.12	86.23	4.76	$\leq 5.00$
802.11ax-HE20	MCS0	185	6875	99.46	4.26	86.23	4.90	$\leq 5.00$
802.11ax-HE20	MCS0	189	6895	99.44	4.24	86.23	4.88	$\leq 5.00$
802.11ax-HE20	MCS0	209	6995	99.30	4.10	86.23	4.74	$\leq 5.00$
802.11ax-HE20	MCS0	229	7095	99.00	3.80	86.23	4.44	$\leq 5.00$
802.11ax-HE40	MCS0	03	5965	99.43	4.23	93.63	4.52	$\leq 5.00$
802.11ax-HE40	MCS0	51	6205	99.65	4.45	93.63	4.73	$\leq 5.00$
802.11ax-HE40	MCS0	91	6405	99.59	4.39	93.63	4.67	$\leq 5.00$
802.11ax-HE40	MCS0	99	6445	99.11	3.91	93.63	4.20	$\leq 5.00$
802.11ax-HE40	MCS0	107	6485	99.22	4.02	93.63	4.31	$\leq 5.00$
802.11ax-HE40	MCS0	115	6525	99.59	4.39	93.63	4.68	$\leq 5.00$
802.11ax-HE40	MCS0	123	6565	99.47	4.27	93.63	4.56	$\leq 5.00$
802.11ax-HE40	MCS0	147	6685	99.17	3.97	93.63	4.26	$\leq 5.00$
802.11ax-HE40	MCS0	187	6885	99.26	4.05	93.63	4.34	$\leq 5.00$
802.11ax-HE40	MCS0	195	6925	99.22	4.02	93.63	4.30	$\leq 5.00$
802.11ax-HE40	MCS0	211	7005	99.71	4.51	93.63	4.79	$\leq 5.00$
802.11ax-HE40	MCS0	227	7085	99.64	4.44	93.63	4.73	$\leq 5.00$

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m/MHz)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	Final EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
802.11ax-HE80	MCS0	07	5985	99.61	4.41	93.88	4.68	≤ 5.00
802.11ax-HE80	MCS0	55	6225	99.74	4.54	93.88	4.82	≤ 5.00
802.11ax-HE80	MCS0	87	6385	99.68	4.48	93.88	4.76	≤ 5.00
802.11ax-HE80	MCS0	103	6465	99.48	4.28	93.88	4.55	≤ 5.00
802.11ax-HE80	MCS0	119	6545	99.51	4.31	93.88	4.59	≤ 5.00
802.11ax-HE80	MCS0	135	6625	99.38	4.18	93.88	4.45	≤ 5.00
802.11ax-HE80	MCS0	151	6705	99.58	4.38	93.88	4.65	≤ 5.00
802.11ax-HE80	MCS0	167	6785	99.26	4.06	93.88	4.34	≤ 5.00
802.11ax-HE80	MCS0	183	6865	99.59	4.39	93.88	4.67	≤ 5.00
802.11ax-HE80	MCS0	199	6945	99.52	4.32	93.88	4.59	≤ 5.00
802.11ax-HE80	MCS0	215	7025	99.73	4.53	93.88	4.80	≤ 5.00
802.11ax-HE160	MCS0	15	6025	99.53	4.33	94.73	4.57	≤ 5.00
802.11ax-HE160	MCS0	47	6185	99.55	4.35	94.73	4.59	≤ 5.00
802.11ax-HE160	MCS0	79	6345	99.58	4.38	94.73	4.62	≤ 5.00
802.11ax-HE160	MCS0	111	6505	99.73	4.53	94.73	4.77	≤ 5.00
802.11ax-HE160	MCS0	143	6665	99.73	4.53	94.73	4.77	≤ 5.00
802.11ax-HE160	MCS0	175	6825	99.67	4.47	94.73	4.71	≤ 5.00
802.11ax-HE160	MCS0	207	6985	99.73	4.53	94.73	4.77	≤ 5.00

Note 1: EIRP PSD (dBm/MHz) = EIRP PSD (dBμV/m/MHz) + Correction Factor @ 3m, Correction Factor @ 3m =  $20\log(D) - 104.7$ ; where D is the measurement distance @3m = -95.2dB

Note 2: If Duty cycle < 98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) +  $10*\log(1/\text{Duty cycle})$ .

802.11ax-HE20 Power Spectral Density- Ant 0

Channel 01 (5955MHz)



Channel 49 (6195MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)



Channel 113 (6515MHz)



Channel 117 (6535MHz)



Channel 149 (6695MHz)





## 802.11ax-HE20 Power Spectral Density- Ant 0

Channel 181 (6855MHz)



Channel 185 (6875MHz)



Channel 189 (6895MHz)



Channel 209 (6995MHz)



Channel 229 (7095MHz)



802.11ax-HE40 Power Spectral Density- Ant 0

Channel 03 (5965MHz)



Channel 51 (6205MHz)



Channel 91 (6405MHz)



Channel 99 (6445MHz)



Channel 107 (6485MHz)



Channel 115 (6525MHz)



Channel 123 (6565MHz)



Channel 147 (6685MHz)





802.11ax-HE40 Power Spectral Density- Ant 0

Channel 187 (6885MHz)



Channel 195 (6925MHz)



Channel 211 (7005MHz)



Channel 227 (7085MHz)



802.11ax-HE80 Power Spectral Density- Ant 0

Channel 07 (5985MHz)



Channel 55 (6225MHz)



Channel 87 (6385MHz)



Channel 103 (6465MHz)



Channel 119 (6545MHz)



Channel 135 (6625MHz)



Channel 151 (6705MHz)




Channel 167 (6785MHz)





802.11ax-HE80 Power Spectral Density- Ant 0


Channel 183 (6865MHz)

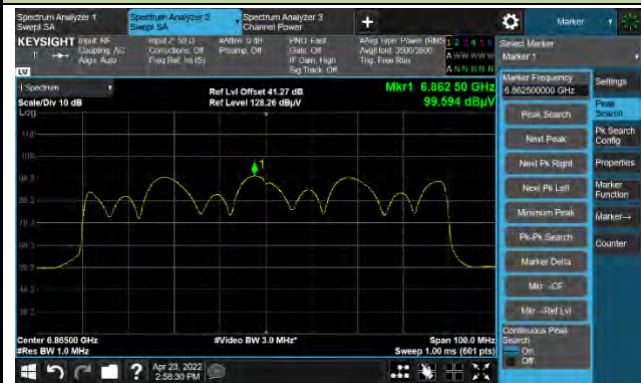

Channel 199 (6945MHz)




Channel 215 (7025MHz)

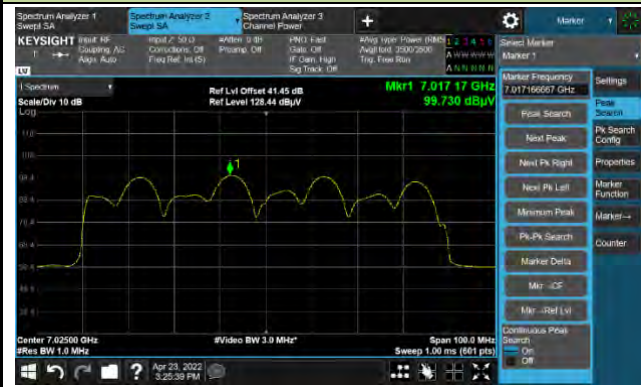


802.11ax-HE160 Power Spectral Density- Ant 0

Channel 15 (6025MHz)

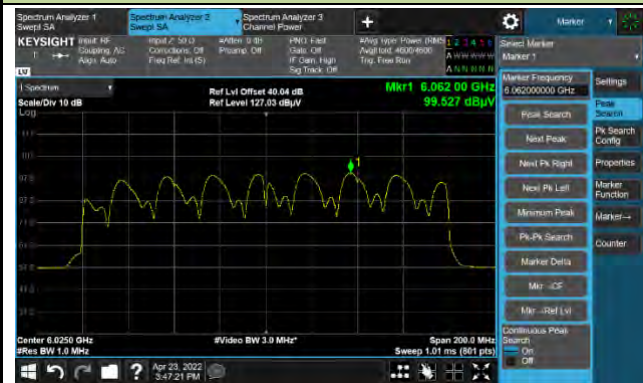

Channel 47 (6185MHz)

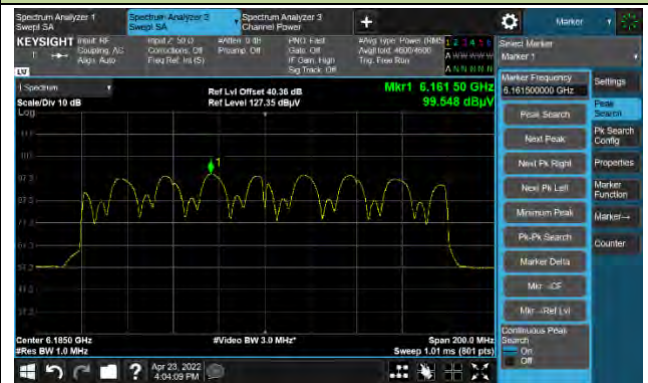

Channel 79 (6345MHz)




Channel 111 (6505MHz)




Channel 143 (6665MHz)



Channel 175 (6825MHz)

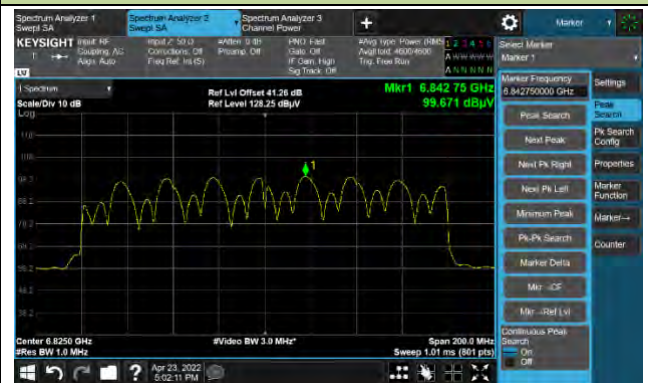






Channel 207 (6985MHz)

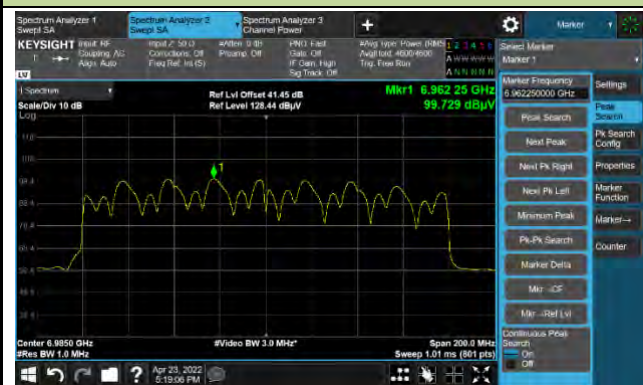



**A.5 In-Band Emission Measurement**


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/05/06~2022/05/09		

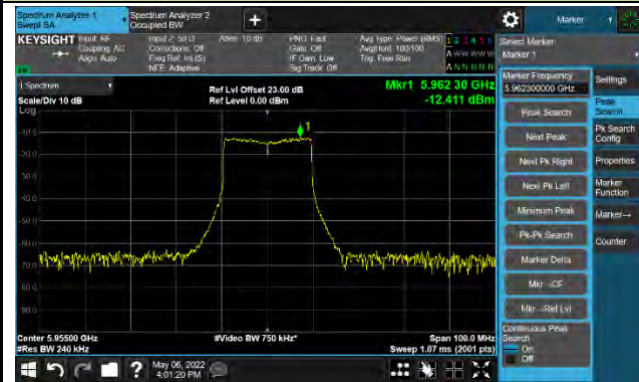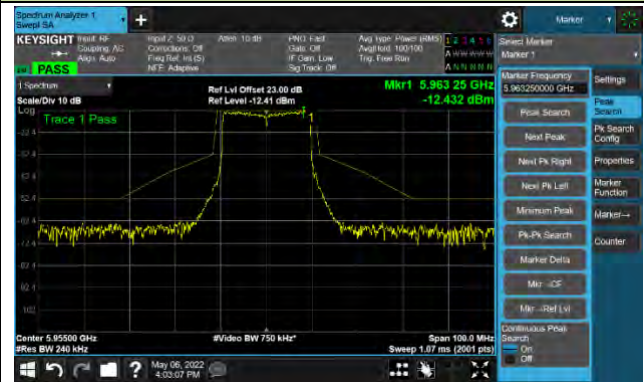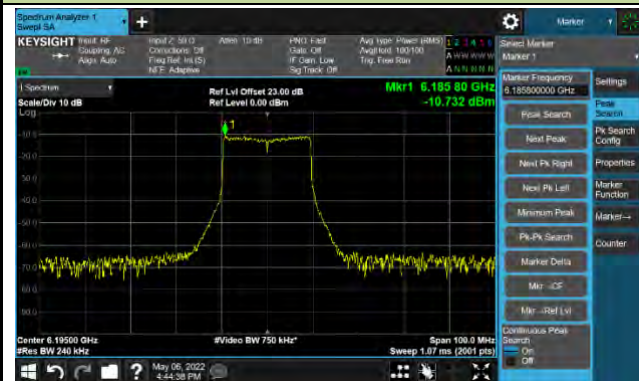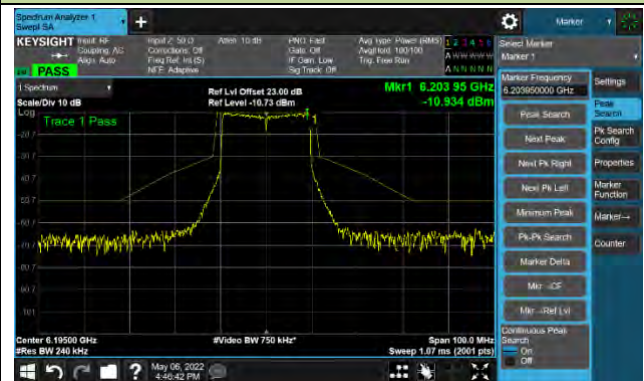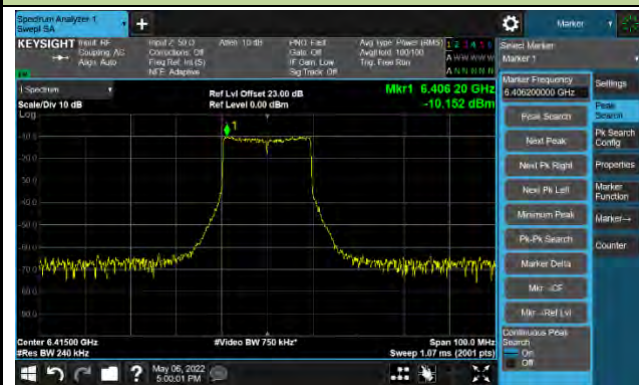**802.11ax-HE20 - Ant 0**
**Channel 01 (5955MHz)**
**The Reference Level**

**The Mask Data**

**Channel 49 (6195MHz)**
**The Reference Level**

**The Mask Data**

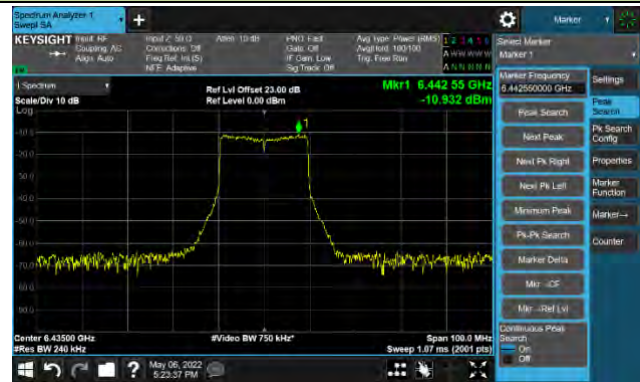**Channel 93 (6415MHz)**
**The Reference Level**

**The Mask Data**



802.11ax-HE20 Ant 0

Channel 97 (6435MHz)

The Reference Level



The Mask Data

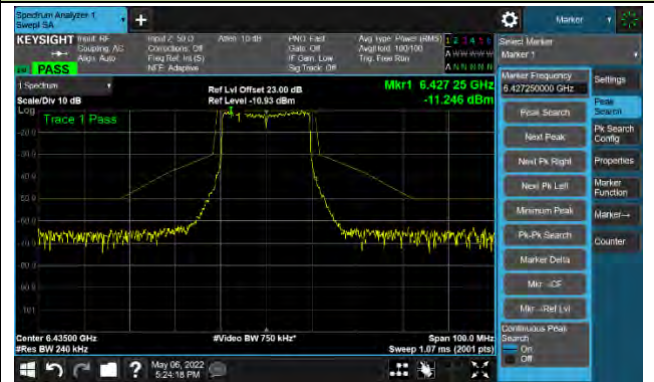


Channel 105 (6475MHz)

The Reference Level




The Mask Data

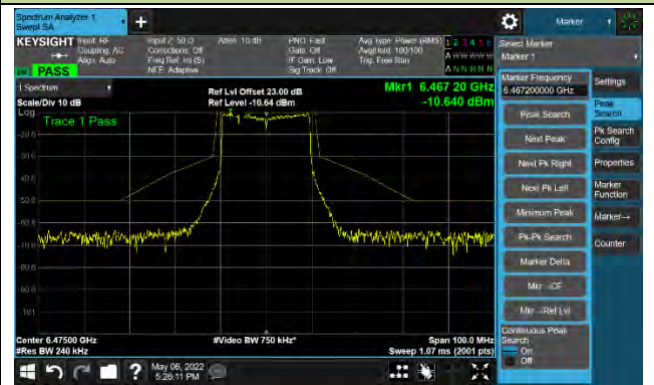


Channel 113 (6515MHz)

The Reference Level

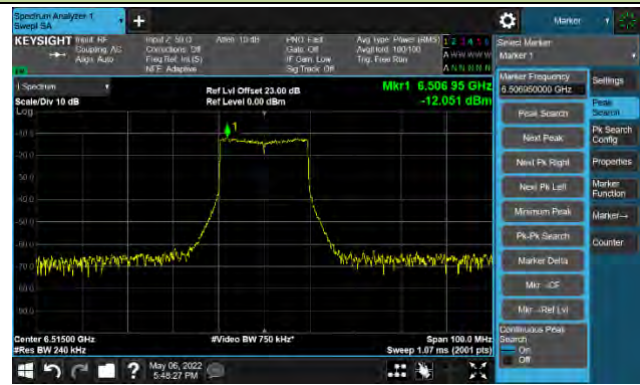

The Mask Data

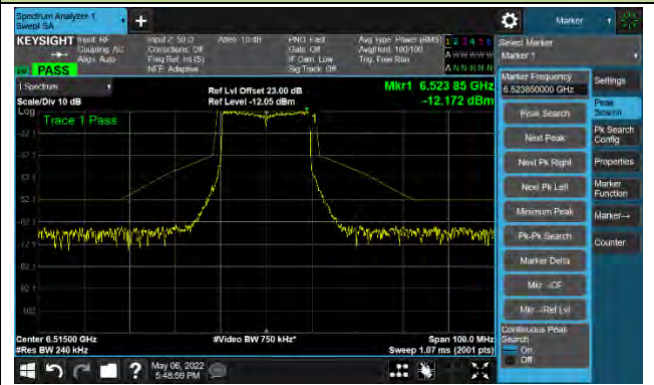





802.11ax-HE20 Ant 0

Channel 117 (6535MHz)

The Reference Level

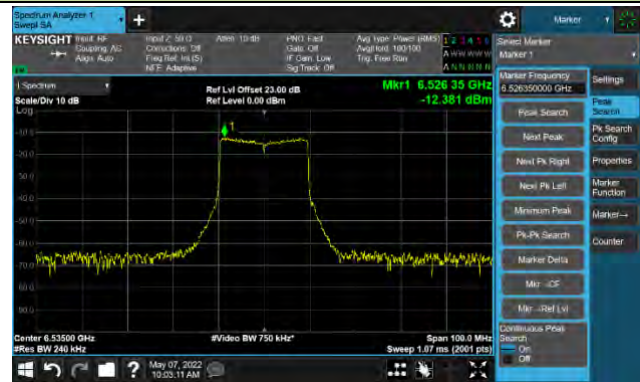

The Mask Data

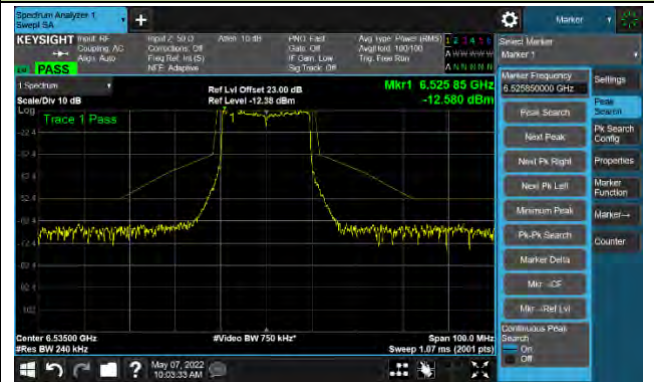


Channel 149 (6695MHz)

The Reference Level




The Mask Data

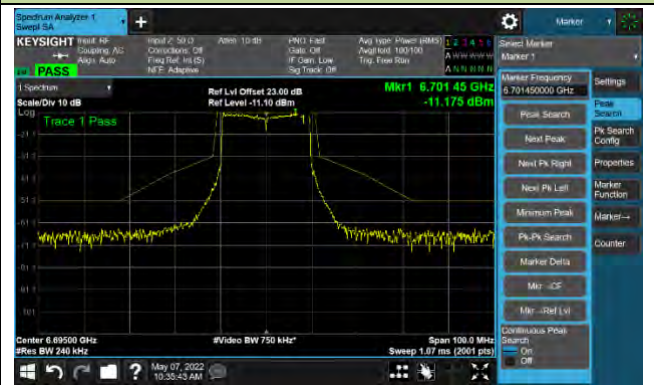


Channel 181 (6855MHz)

The Reference Level

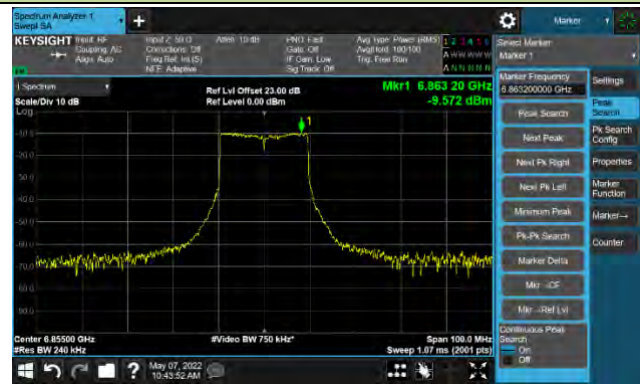


The Mask Data

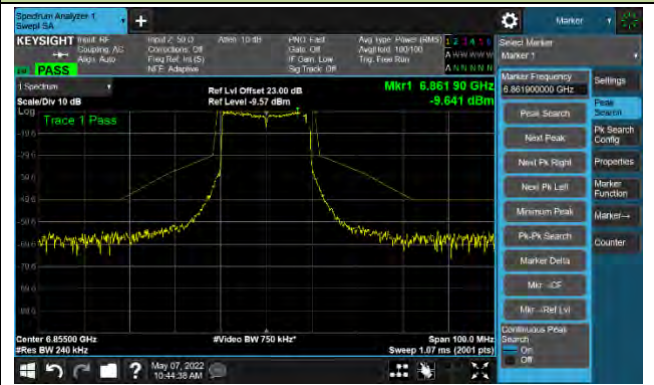


802.11ax-HE20 Ant 0

Channel 185 (6875MHz)

The Reference Level

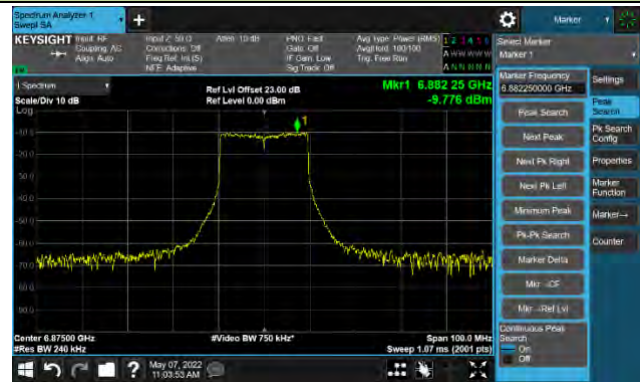


The Mask Data

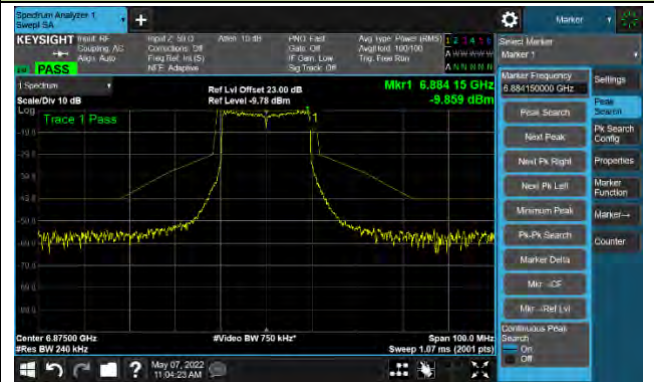


Channel 189 (6895MHz)

The Reference Level

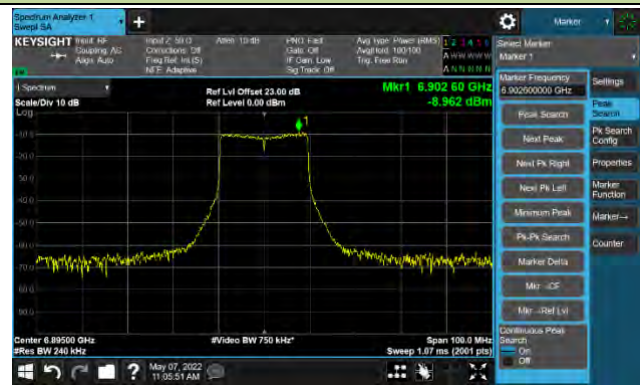

The Mask Data

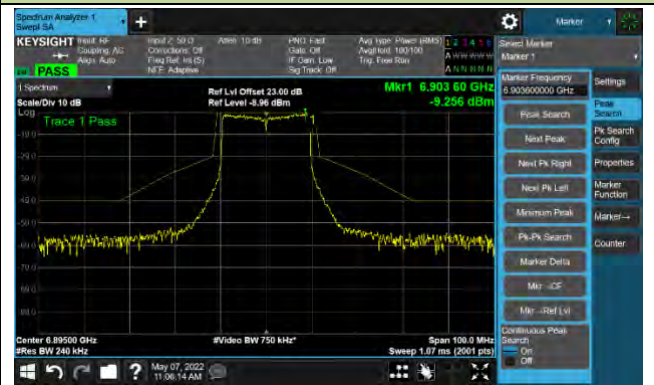


Channel 209 (6995MHz)

The Reference Level




The Mask Data

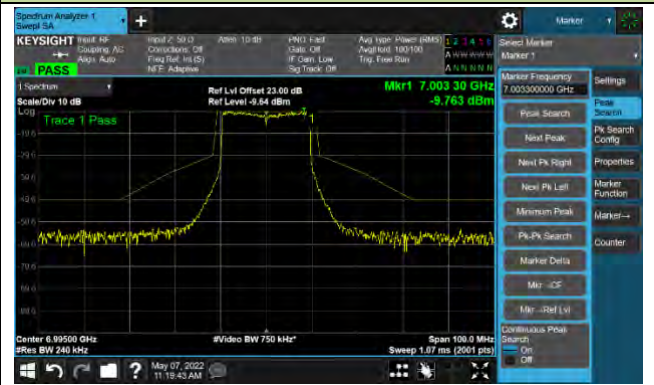

802.11ax-HE20 Ant 0

Channel 229 (7095MHz)

The Reference Level

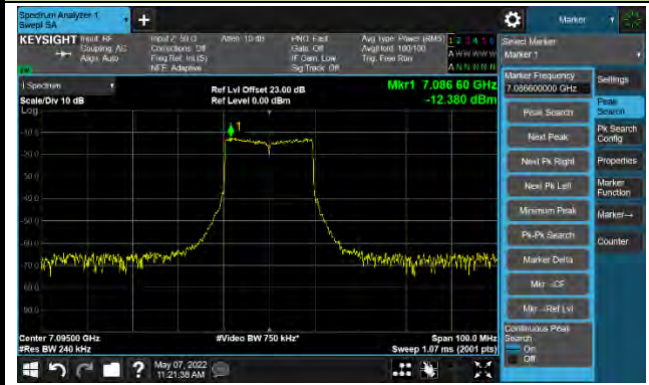

The Mask Data







802.11ax-HE40 Ant 0

Channel 03 (5965MHz)

The Reference Level

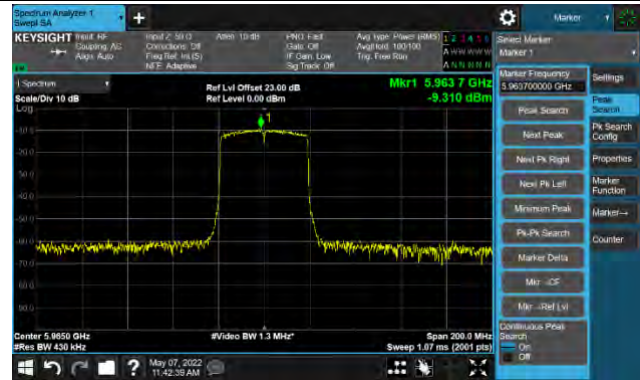

The Mask Data

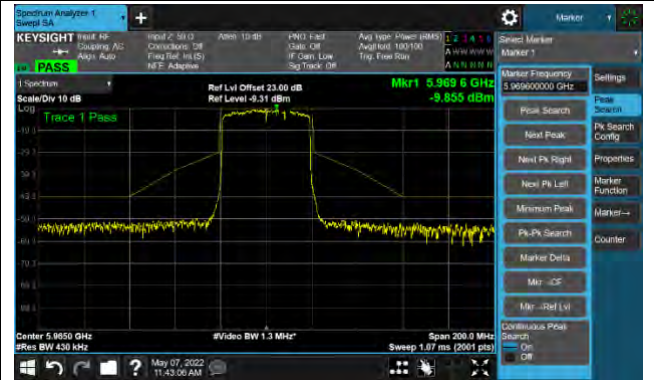


Channel 51 (6205MHz)

The Reference Level




The Mask Data

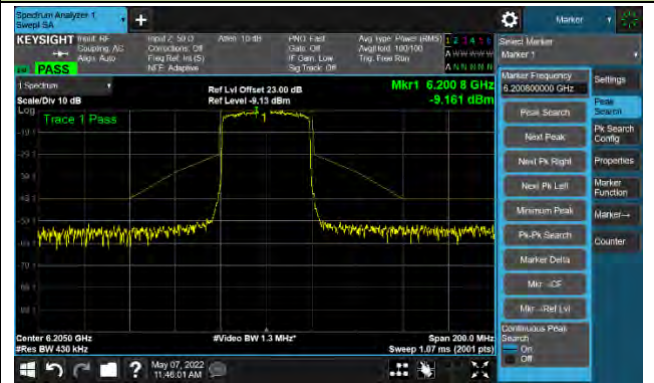


Channel 91 (6405MHz)

The Reference Level

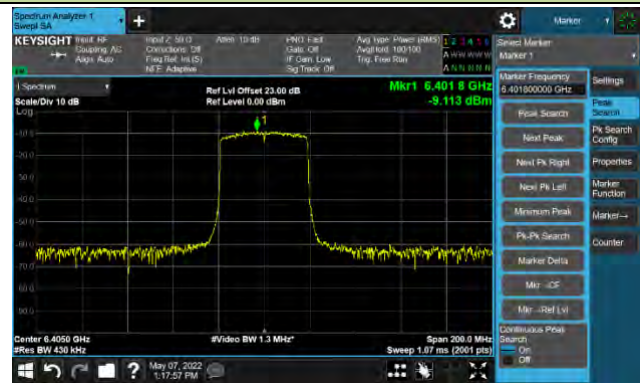

The Mask Data

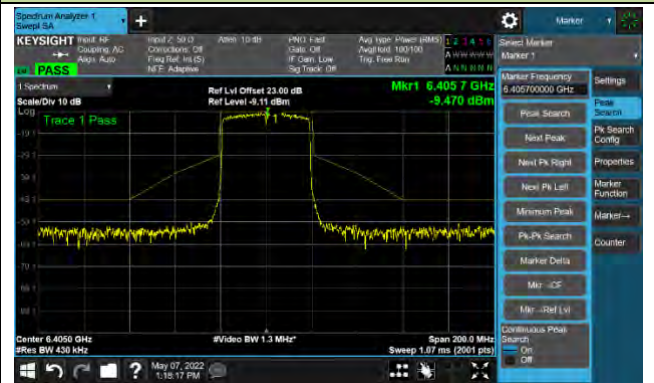




802.11ax-HE40 Ant 0

Channel 99 (6445MHz)

The Reference Level



The Mask Data

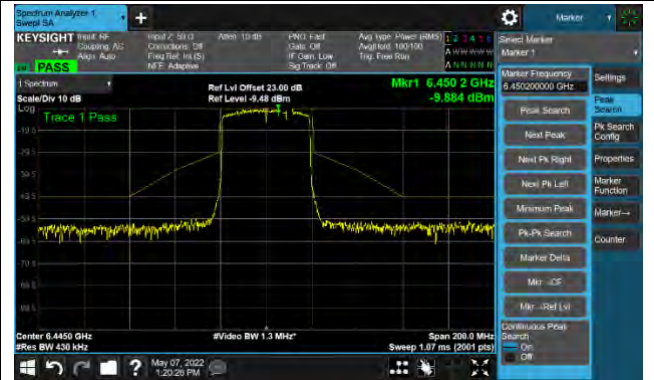


Channel 107 (6485MHz)

The Reference Level



The Mask Data

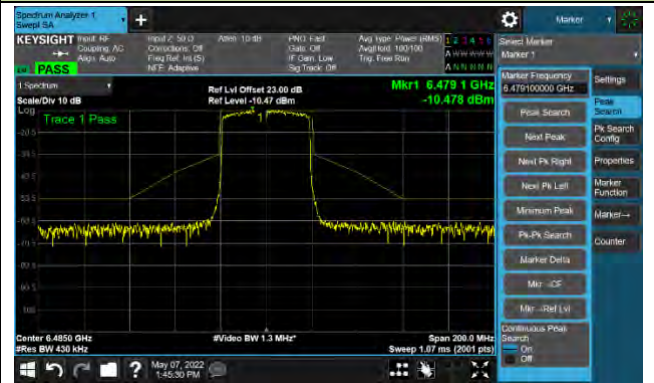


Channel 115 (6525MHz)

The Reference Level



The Mask Data

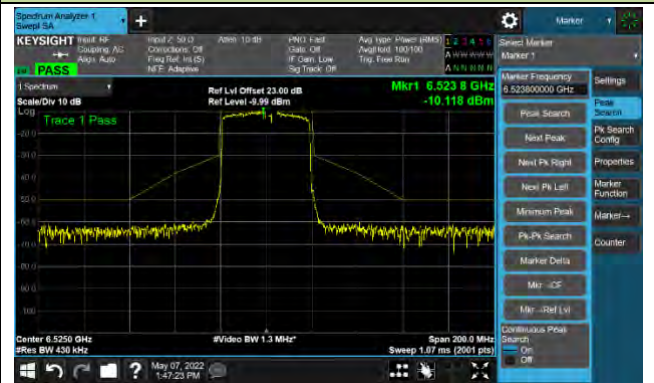


802.11ax-HE40 Ant 0

Channel 123 (6565MHz)

The Reference Level




The Mask Data

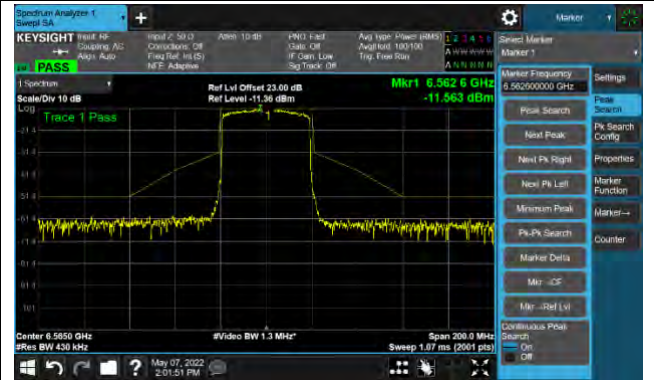

Channel 147 (6685MHz)

The Reference Level

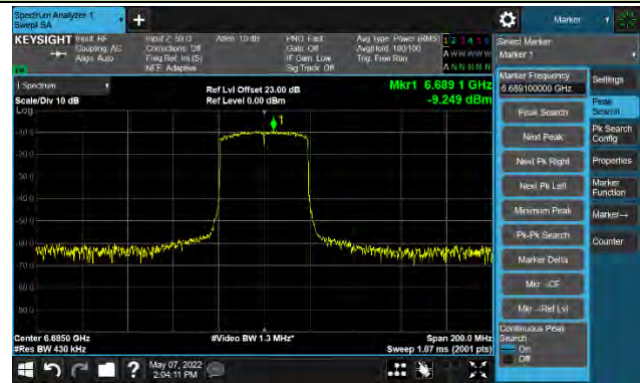


The Mask Data




Channel 187 (6885MHz)

The Reference Level

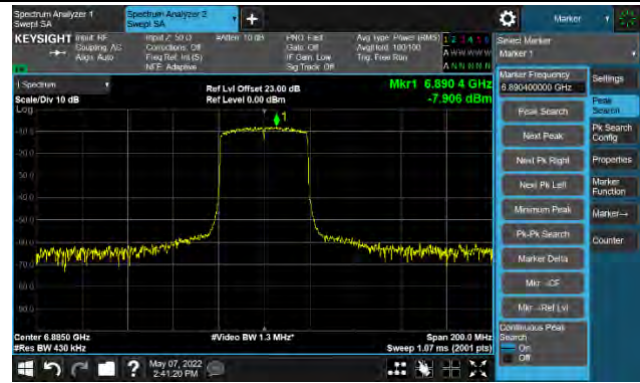

The Mask Data

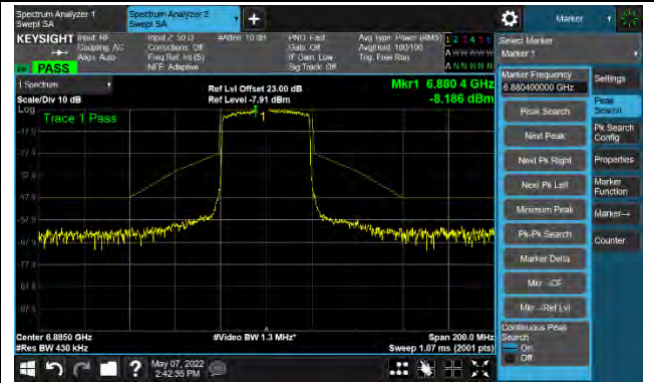




802.11ax-HE40 Ant 0

Channel 195 (6925MHz)

The Reference Level

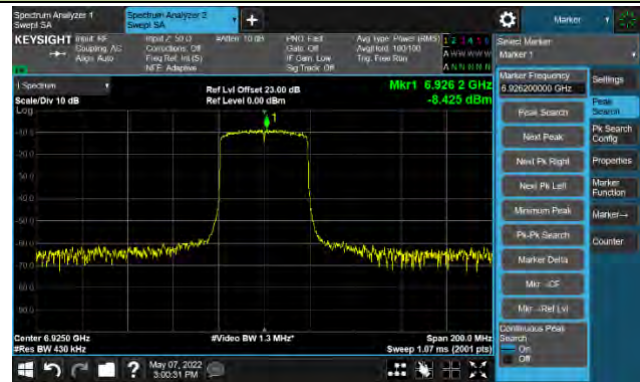

The Mask Data




Channel 211 (7005MHz)

The Reference Level




The Mask Data

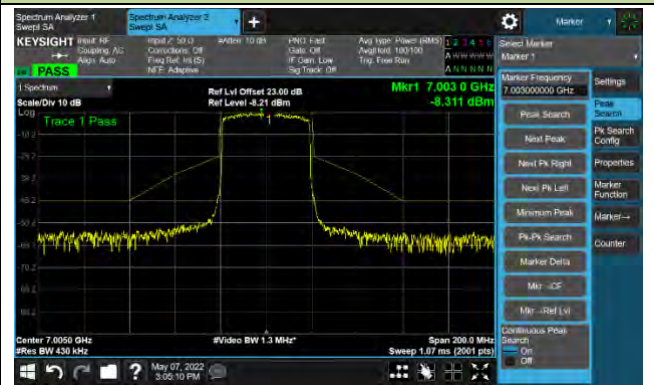


Channel 227 (7085MHz)

The Reference Level

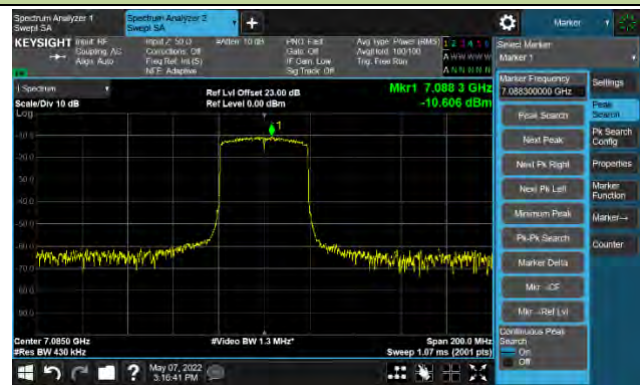


The Mask Data

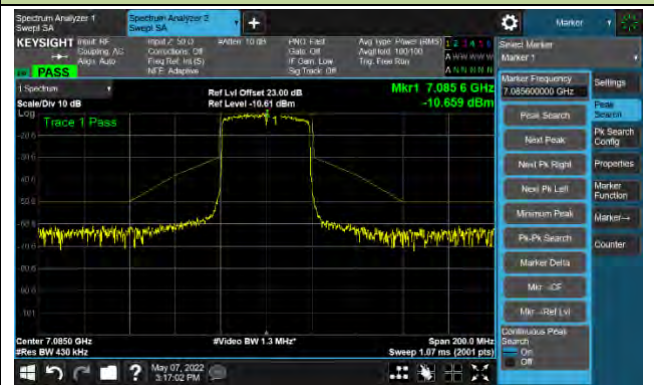


802.11ax-HE80 Ant 0

Channel 07 (5985MHz)

The Reference Level

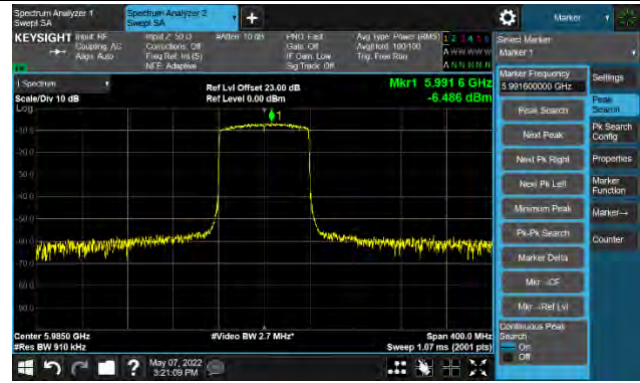

The Mask Data

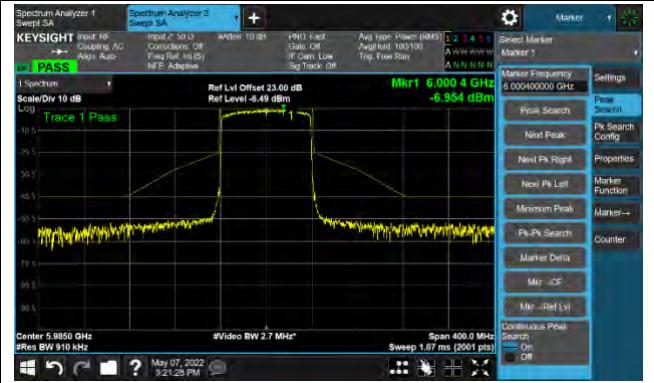


Channel 55 (6225MHz)

The Reference Level




The Mask Data

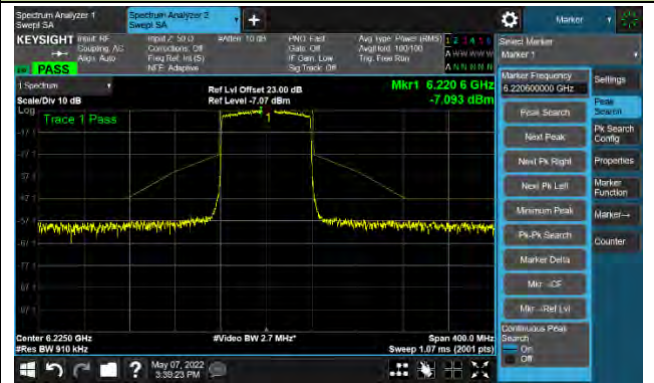


Channel 87 (6385MHz)

The Reference Level

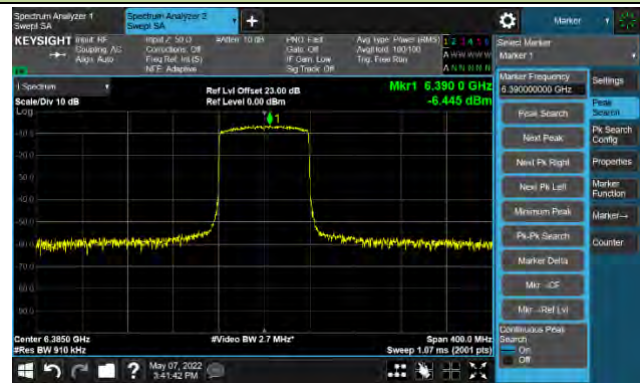

The Mask Data

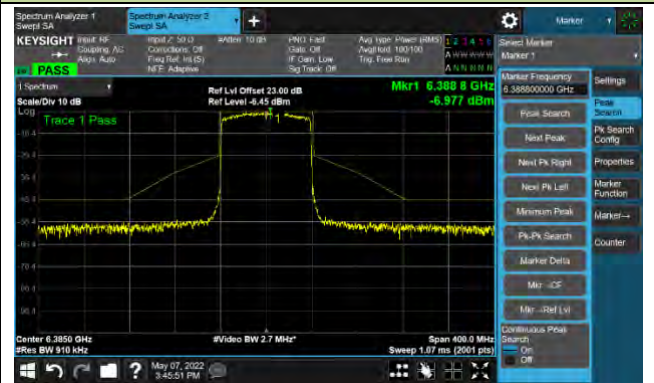





802.11ax-HE80 Ant 0

Channel 103 (6465MHz)

The Reference Level

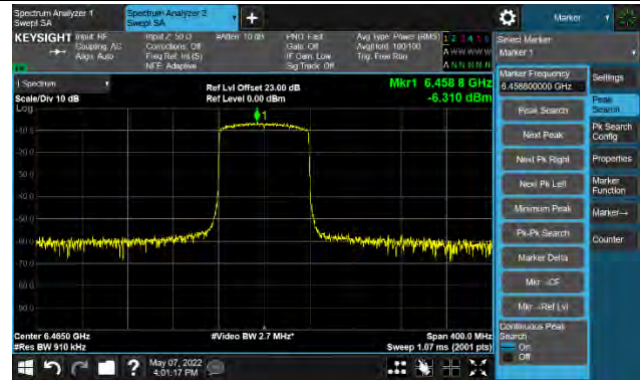


The Mask Data

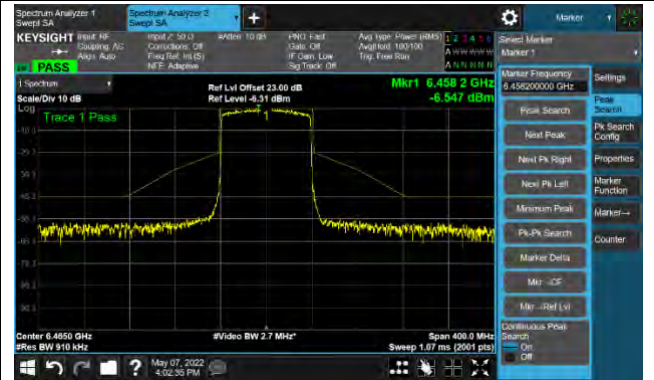


Channel 119 (6545MHz)

The Reference Level

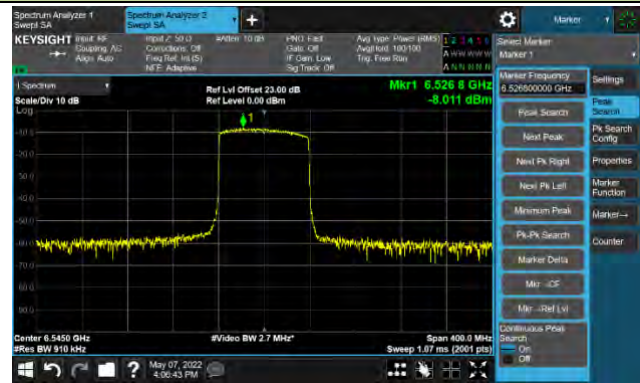


The Mask Data

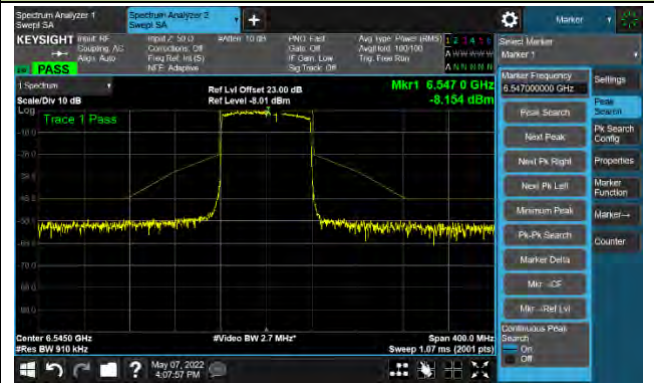


Channel 135 (6625MHz)

The Reference Level

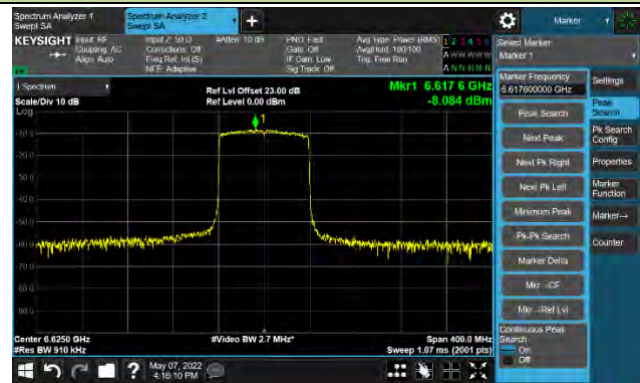


The Mask Data

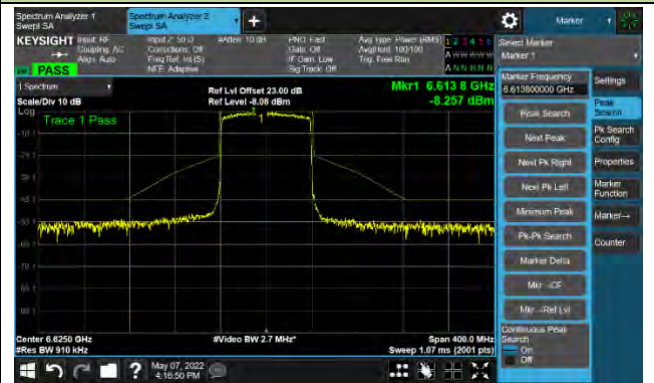


802.11ax-HE80 Ant 0

Channel 151 (6705MHz)

The Reference Level

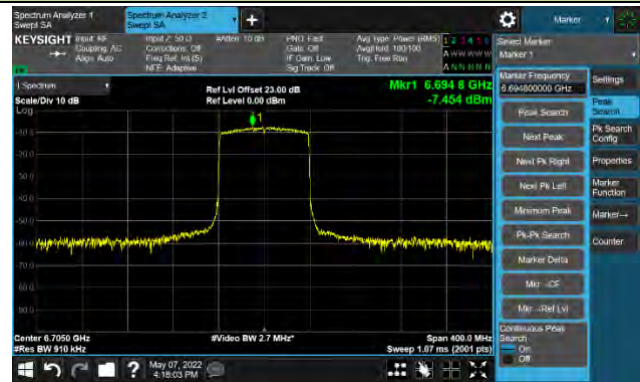


The Mask Data

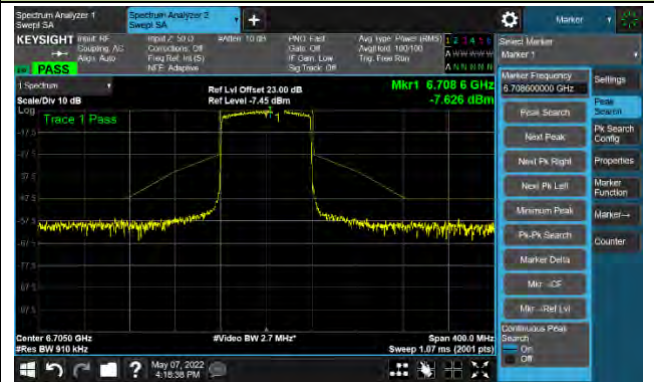


Channel 167 (6785MHz)

The Reference Level

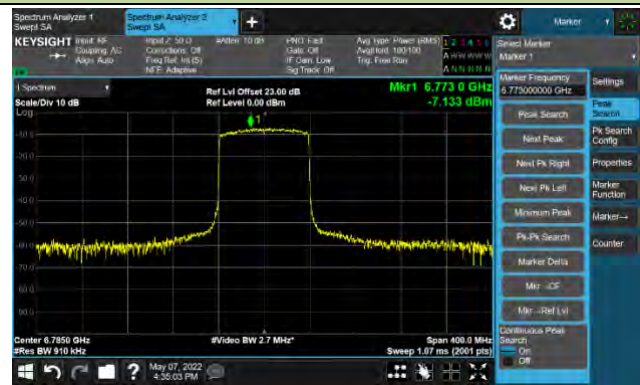


The Mask Data

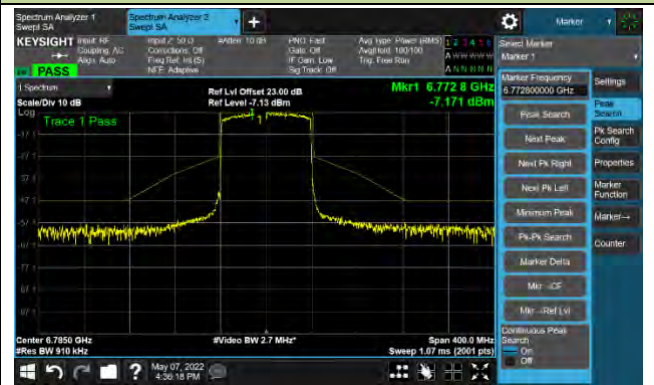


Channel 183 (6865MHz)

The Reference Level

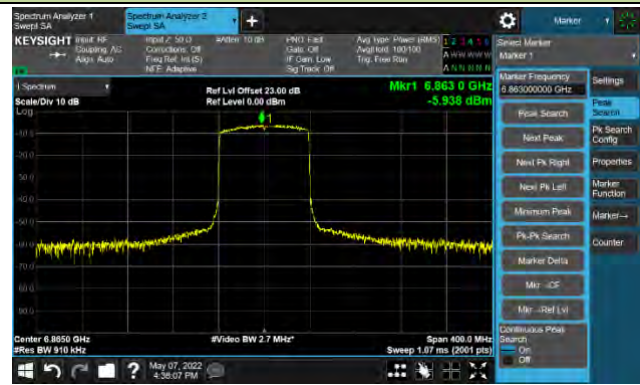

The Mask Data

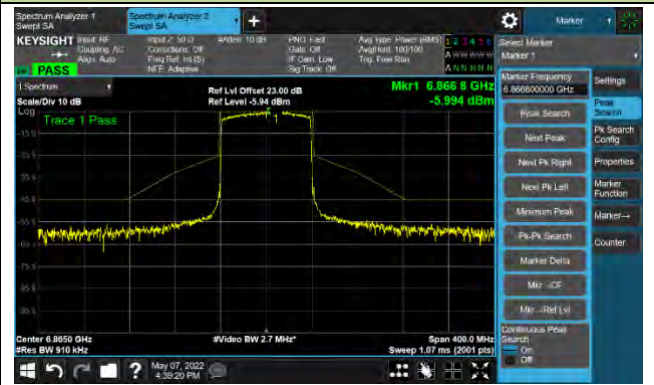





802.11ax-HE80 Ant 0

Channel 199 (6945MHz)

The Reference Level

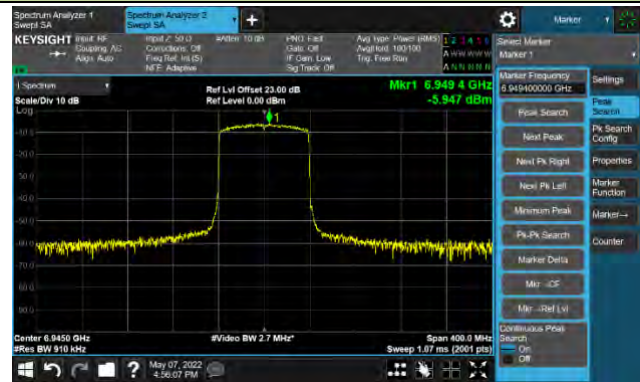


The Mask Data

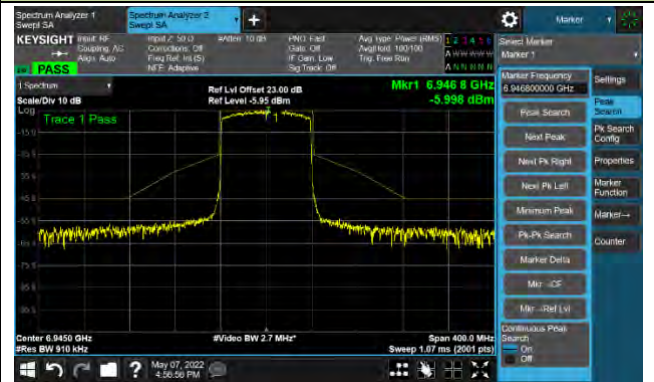


Channel 215 (7025MHz)

The Reference Level

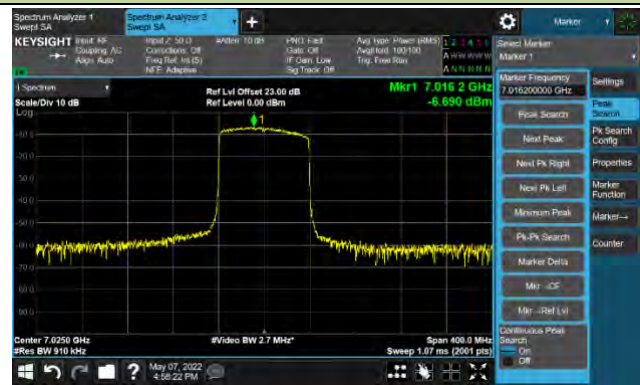


The Mask Data

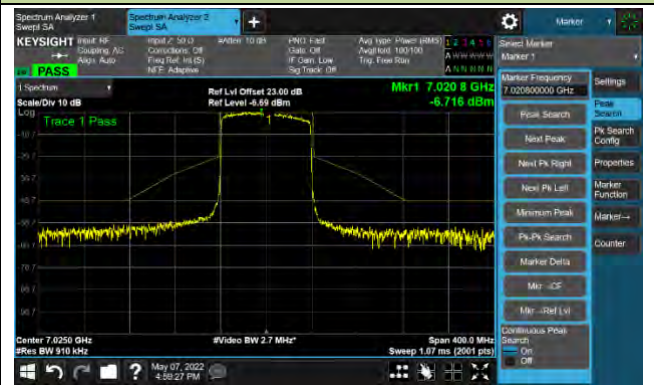


802.11ax-HE160 Ant 0

Channel 15 (6025MHz)

The Reference Level

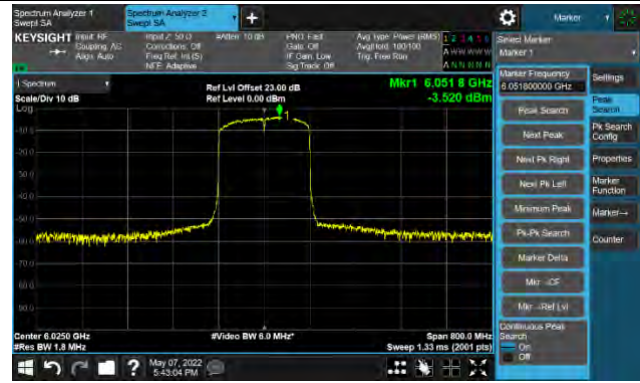


The Mask Data

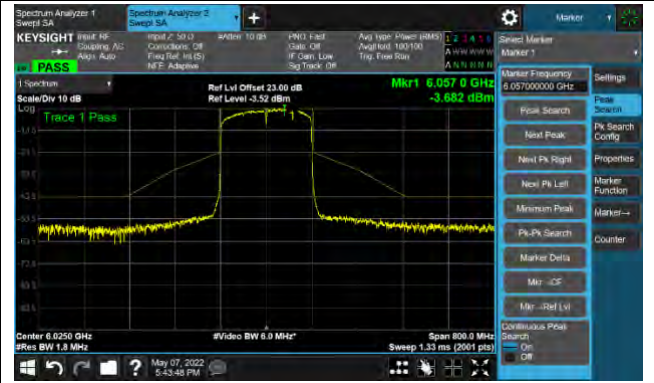


Channel 47 (6185MHz)

The Reference Level

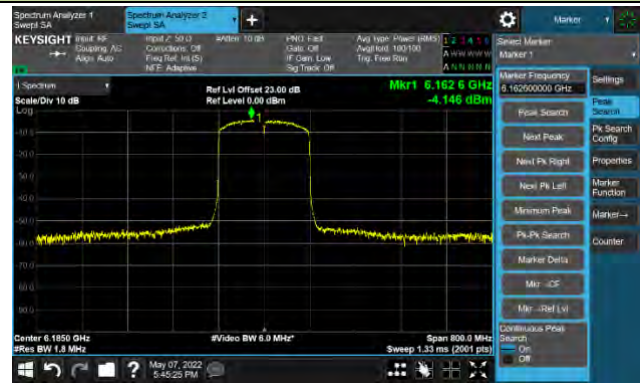

The Mask Data

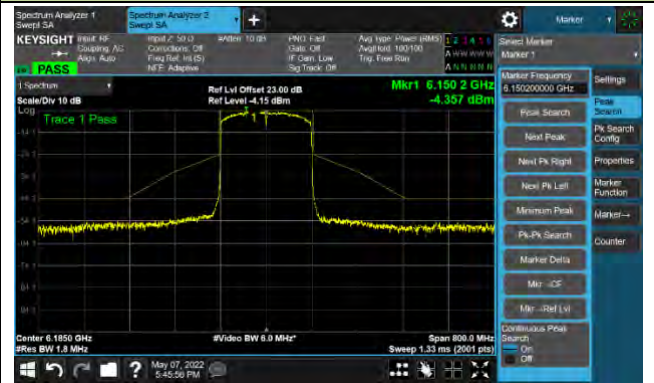


Channel 79 (6345MHz)

The Reference Level



The Mask Data

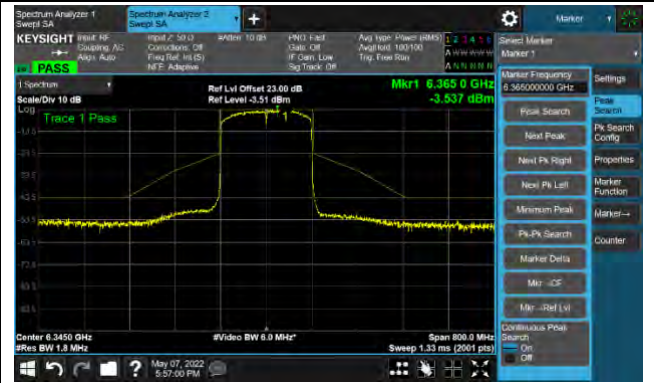





802.11ax-HE160 Ant 0

Channel 111 (6505MHz)

The Reference Level

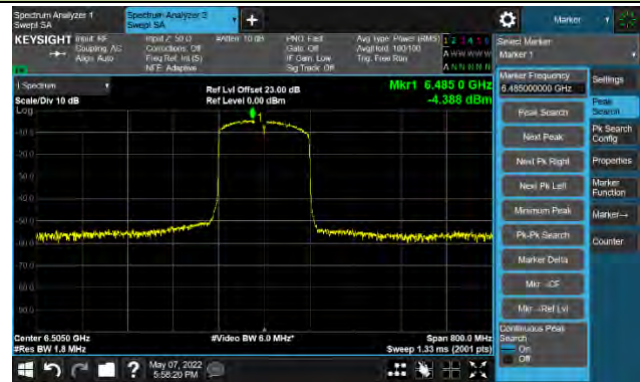


The Mask Data

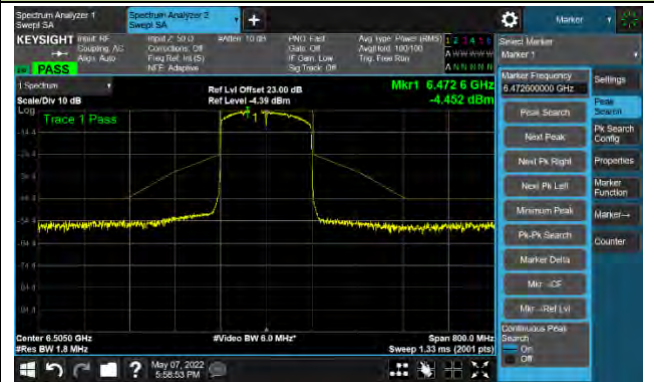


Channel 143 (6665MHz)

The Reference Level

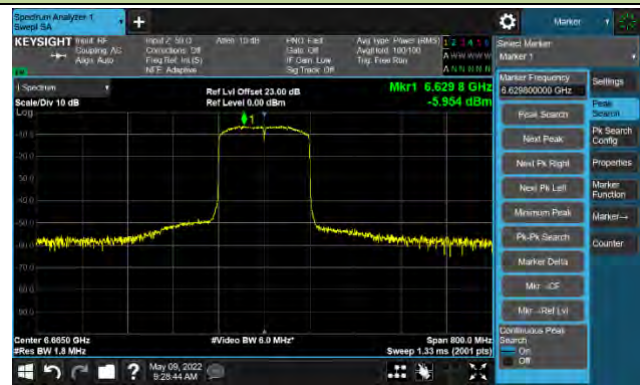


The Mask Data

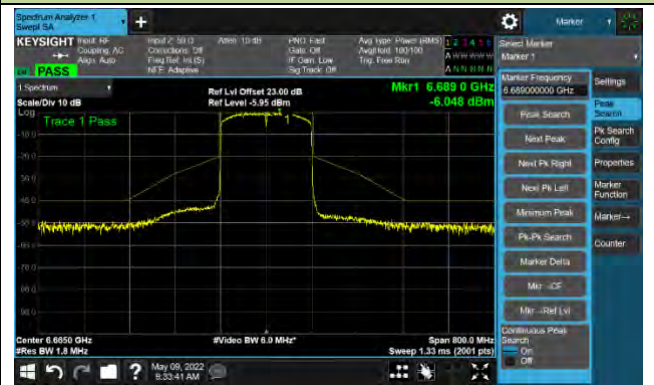


Channel 175 (6825MHz)

The Reference Level

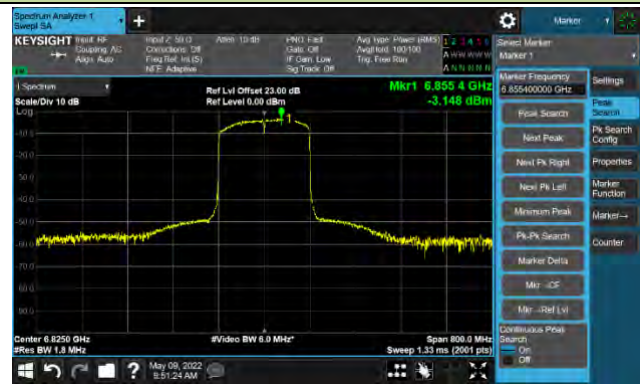


The Mask Data

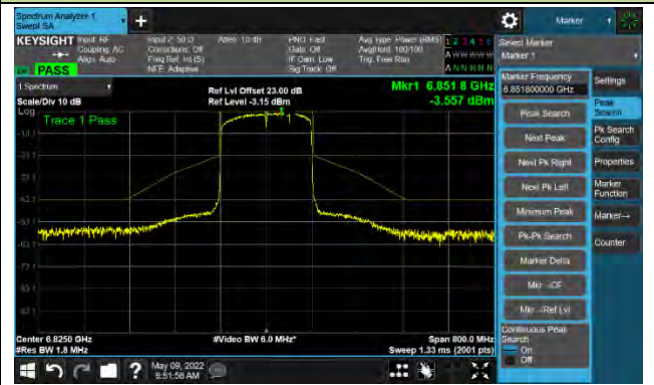


802.11ax-HE160 Ant 0

Channel 207 (6985MHz)

The Reference Level

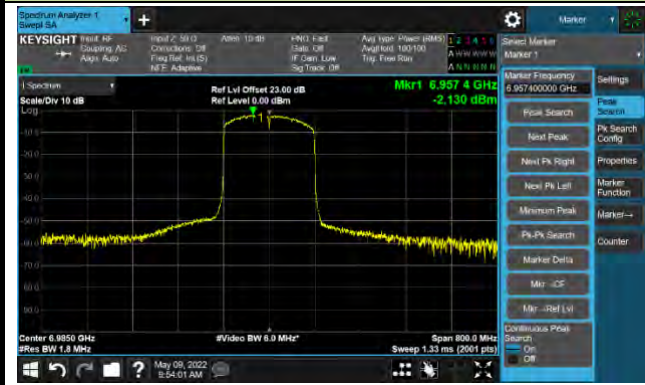


The Mask Data

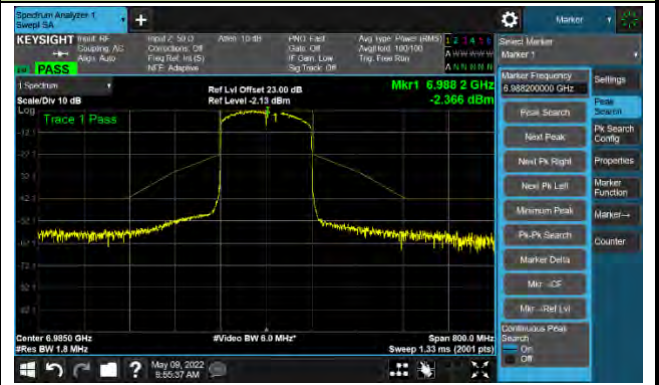


802.11ax-HE20 - Ant 1

Channel 01 (5955MHz)

The Reference Level

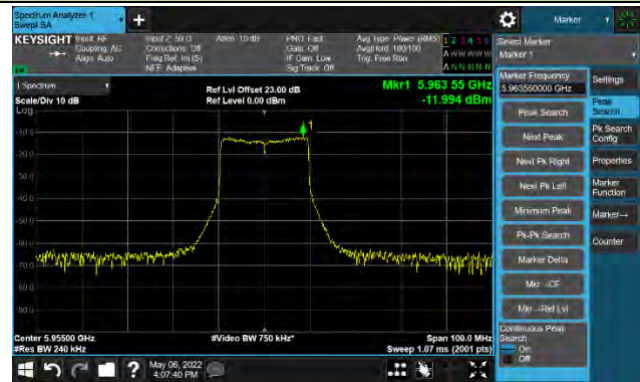


The Mask Data

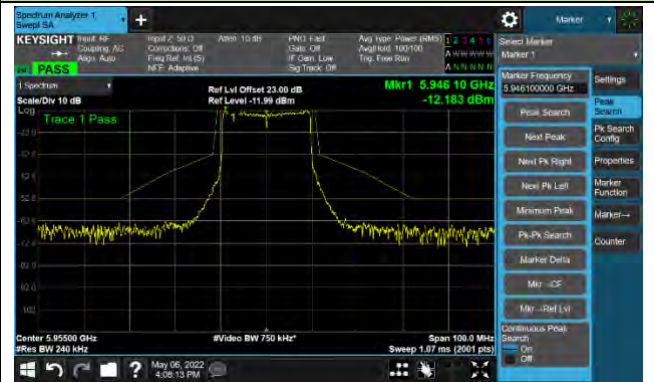


Channel 49 (6195MHz)

The Reference Level

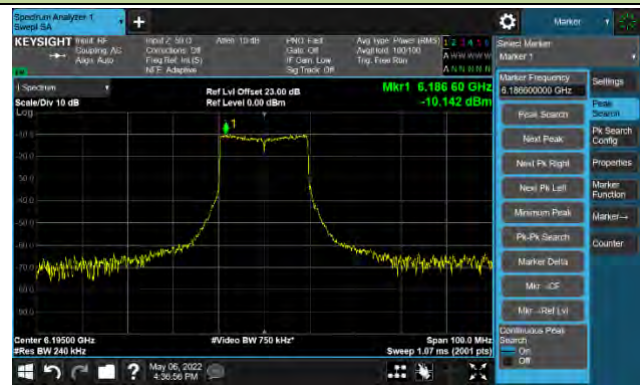


The Mask Data

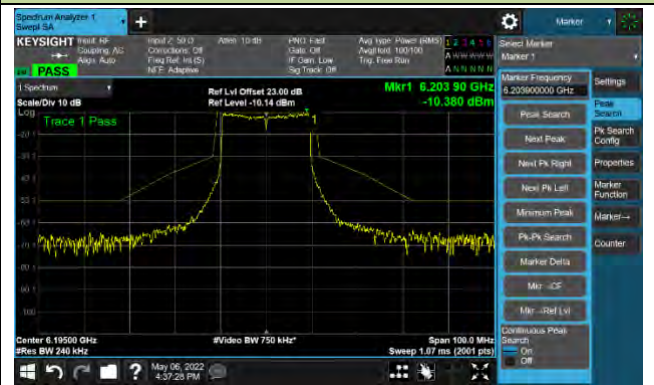


Channel 93 (6415MHz)

The Reference Level

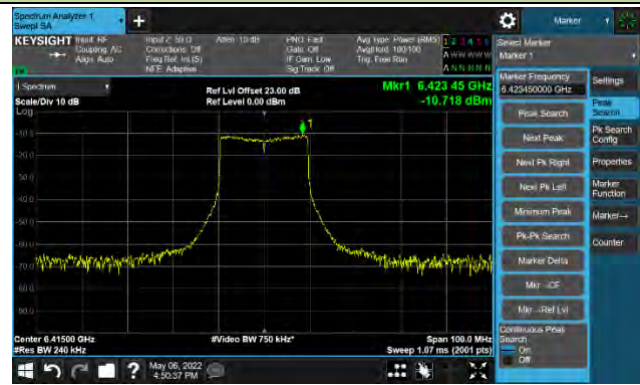

The Mask Data

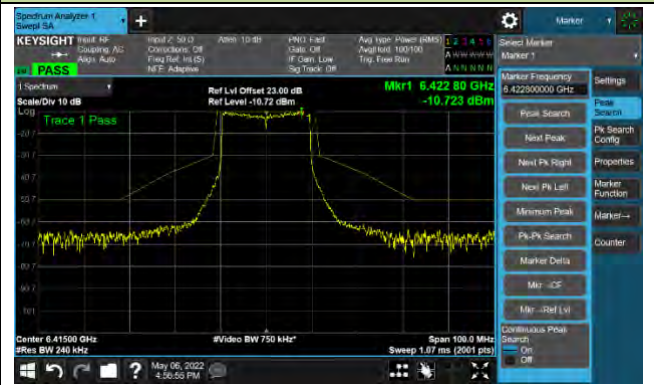





802.11ax-HE20 Ant 1

Channel 97 (6435MHz)

The Reference Level

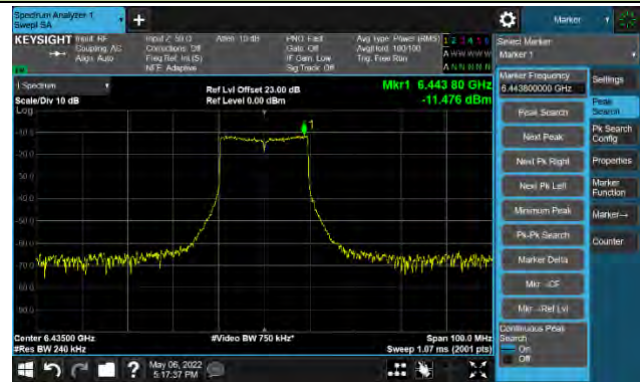


The Mask Data

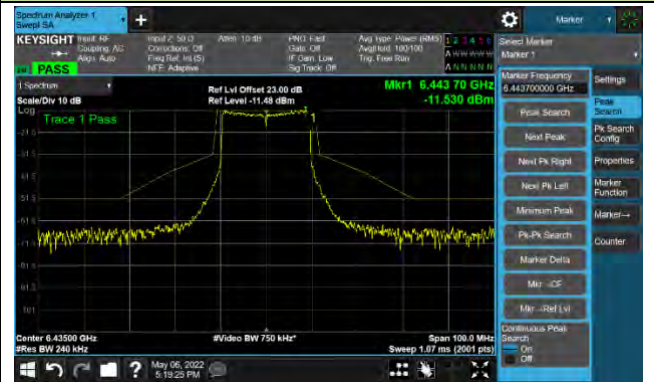


Channel 105 (6475MHz)

The Reference Level

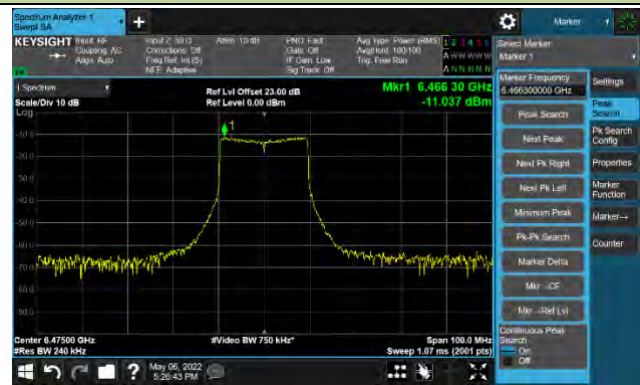


The Mask Data

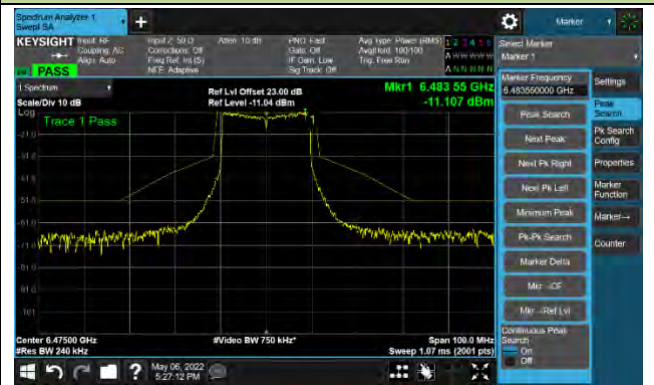


Channel 113 (6515MHz)

The Reference Level

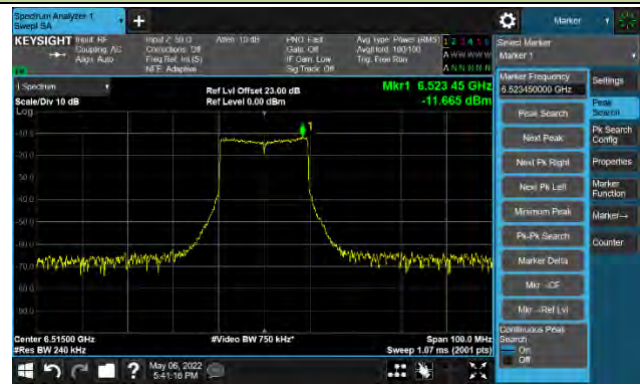


The Mask Data

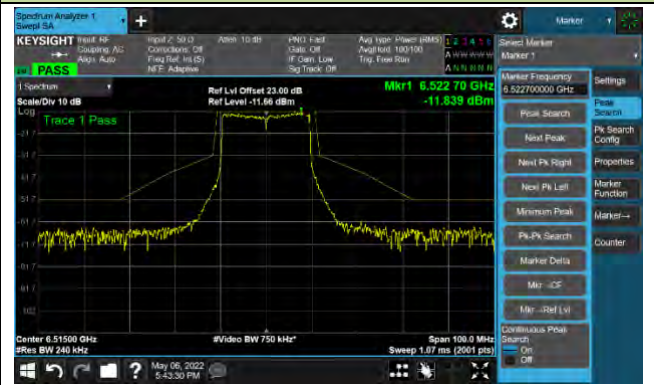


802.11ax-HE20 Ant 1

Channel 117 (6535MHz)

The Reference Level

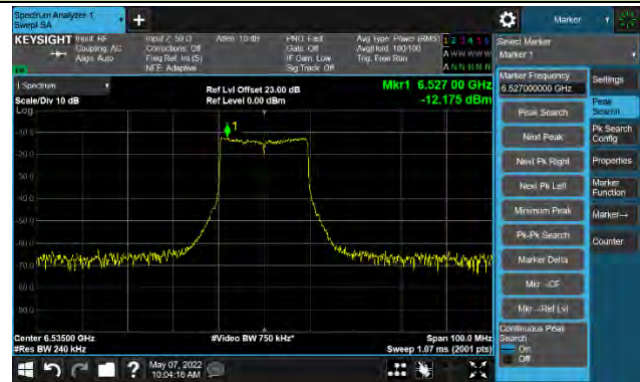


The Mask Data

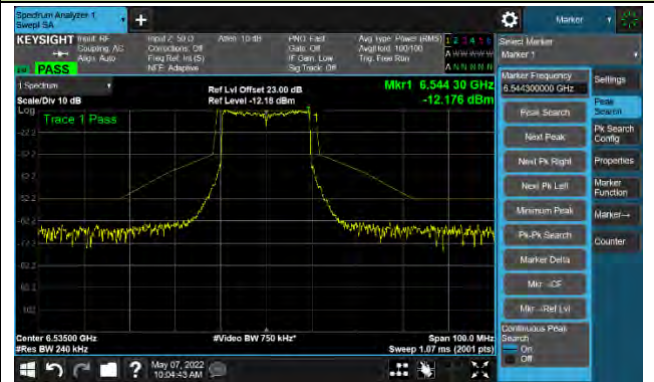


Channel 149 (6695MHz)

The Reference Level

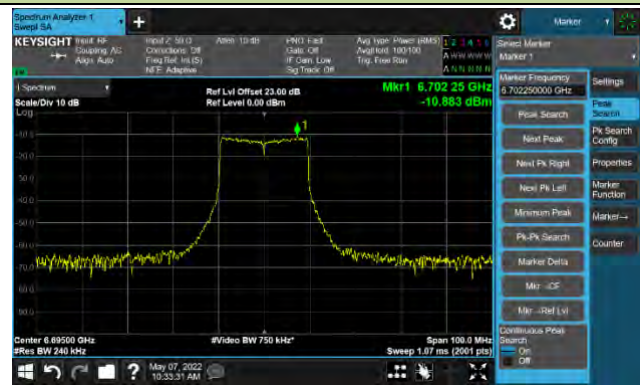

The Mask Data

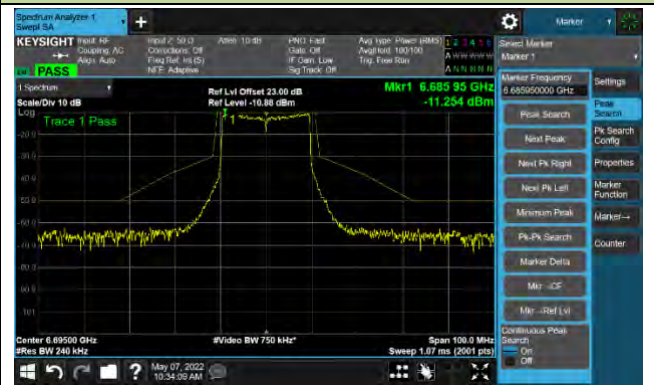


Channel 181 (6855MHz)

The Reference Level



The Mask Data

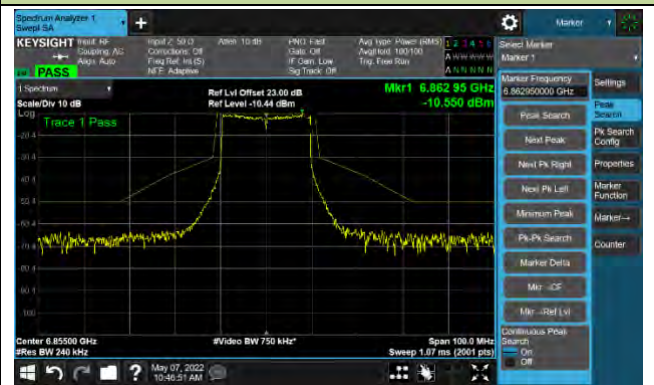





802.11ax-HE20 Ant 1

Channel 185 (6875MHz)

The Reference Level

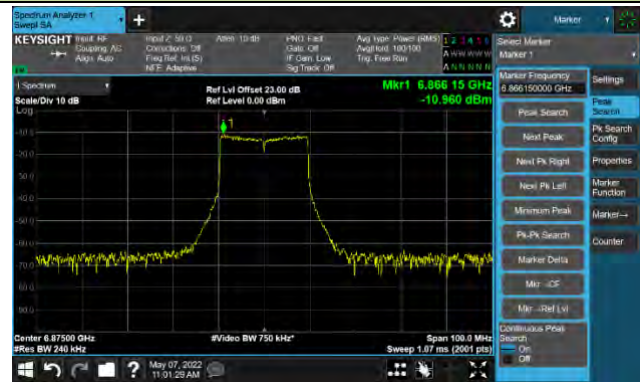


The Mask Data

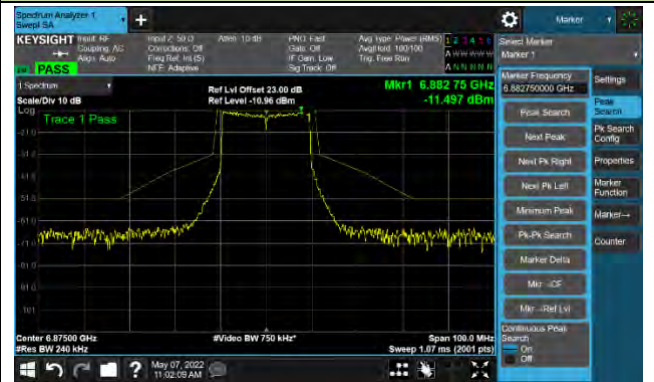


Channel 189 (6895MHz)

The Reference Level

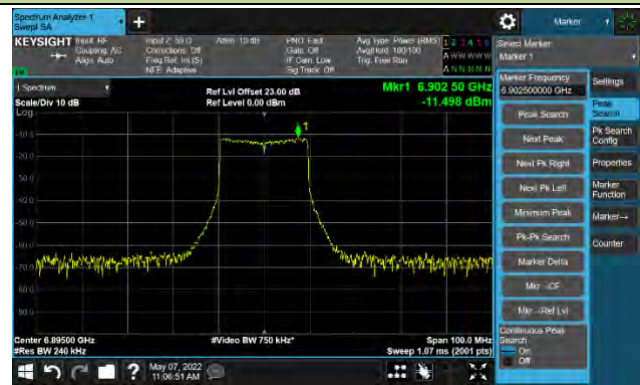


The Mask Data

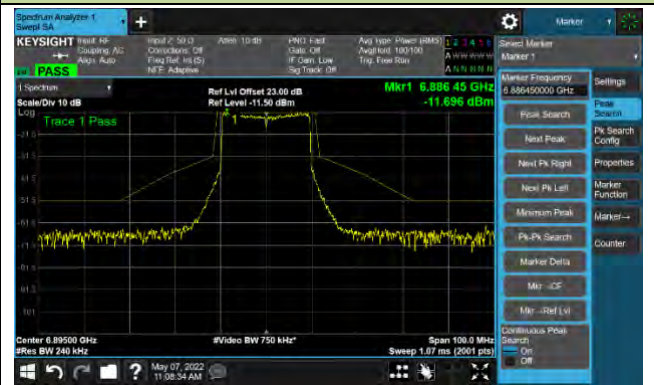


Channel 209 (6995MHz)

The Reference Level

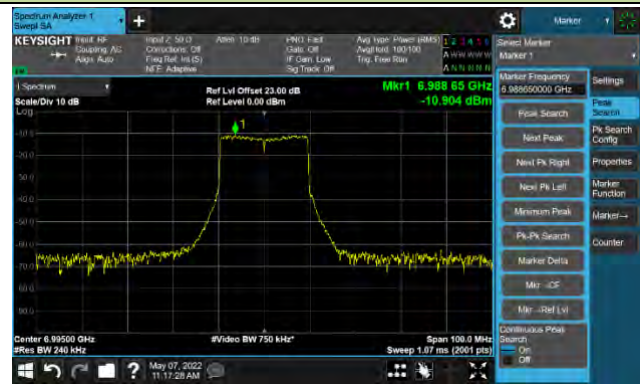

The Mask Data

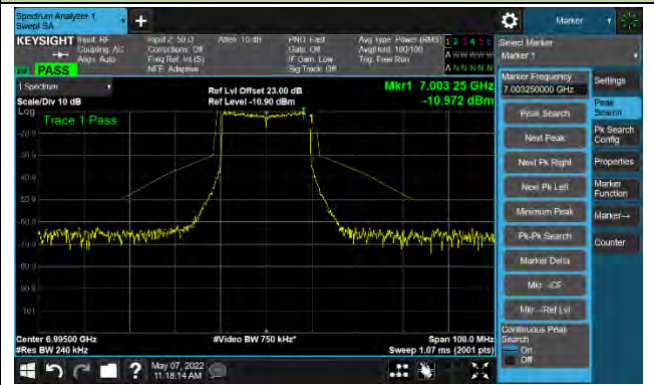





802.11ax-HE20 Ant 1

Channel 229 (7095MHz)

The Reference Level

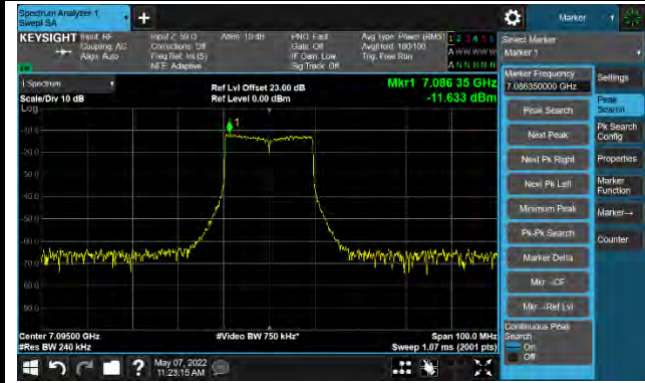


The Mask Data

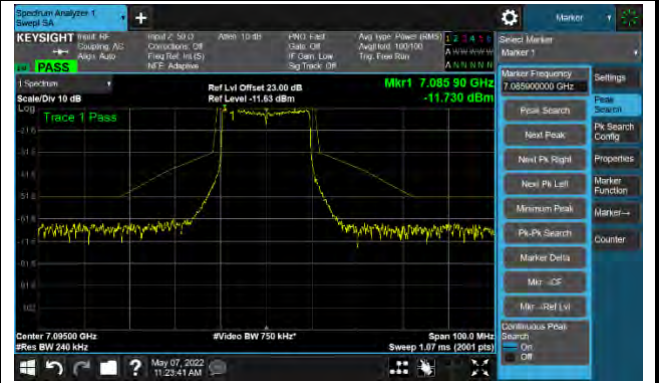


802.11ax-HE40 Ant 1

Channel 03 (5965MHz)

The Reference Level

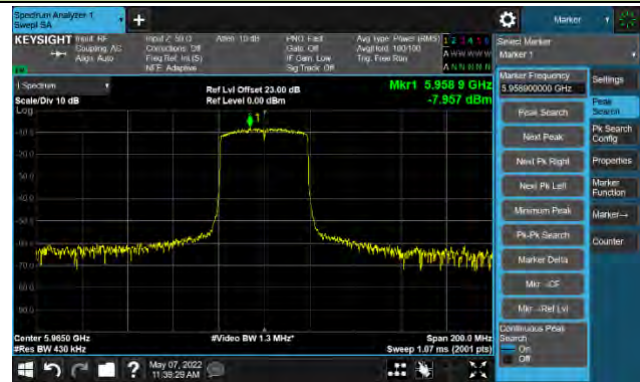

The Mask Data

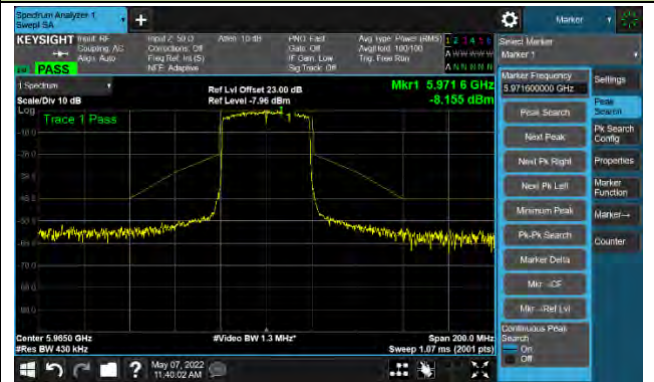


Channel 51 (6205MHz)

The Reference Level




The Mask Data

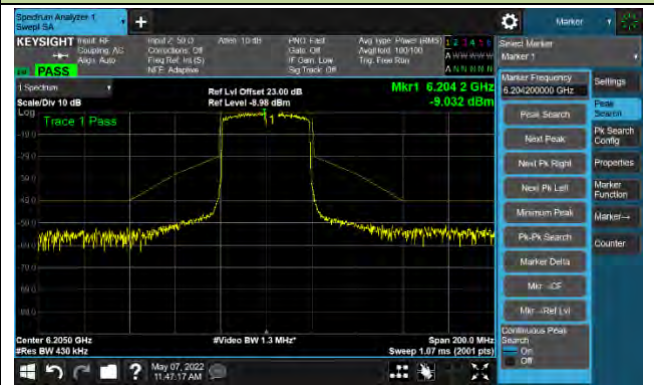


Channel 91 (6405MHz)

The Reference Level

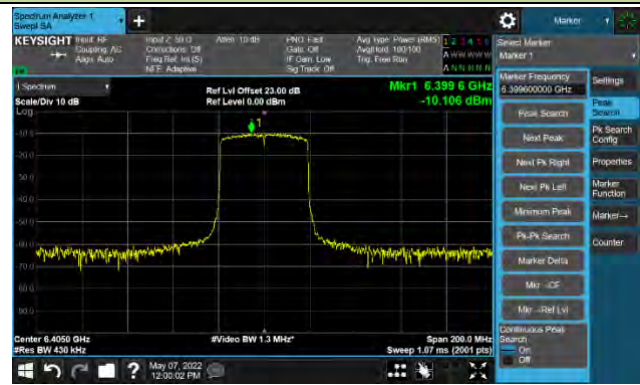


The Mask Data

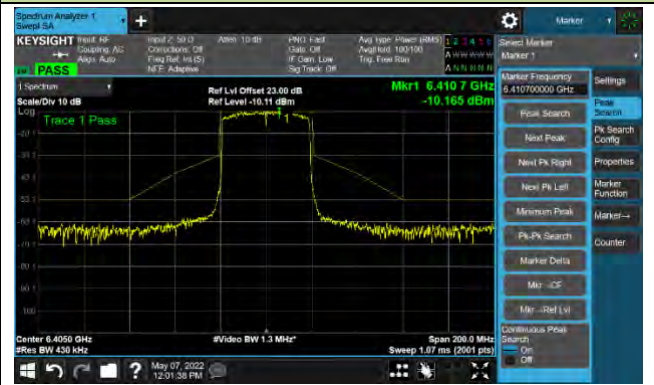


802.11ax-HE40 Ant 1

Channel 99 (6445MHz)

The Reference Level

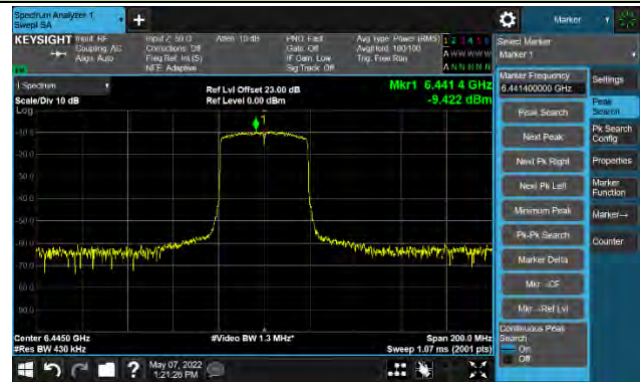

The Mask Data

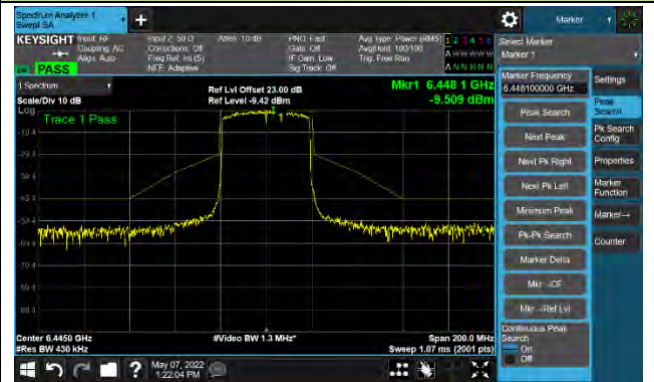


Channel 107 (6485MHz)

The Reference Level




The Mask Data

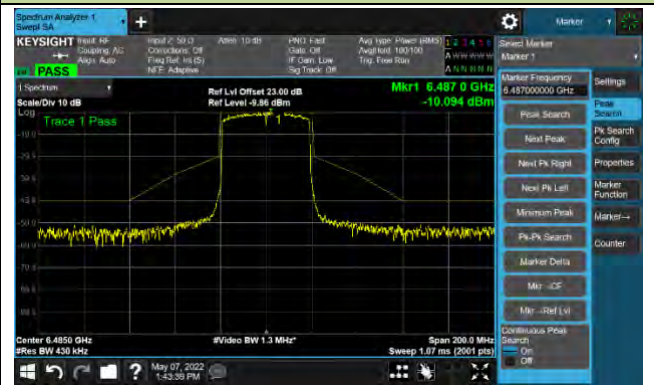

Channel 115 (6525MHz)

The Reference Level

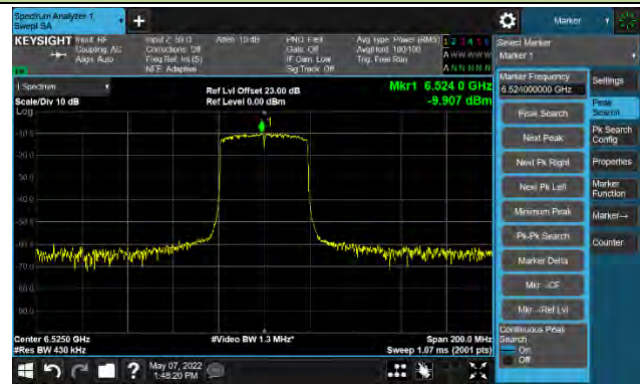

The Mask Data







802.11ax-HE40 Ant 1

Channel 123 (6565MHz)

The Reference Level

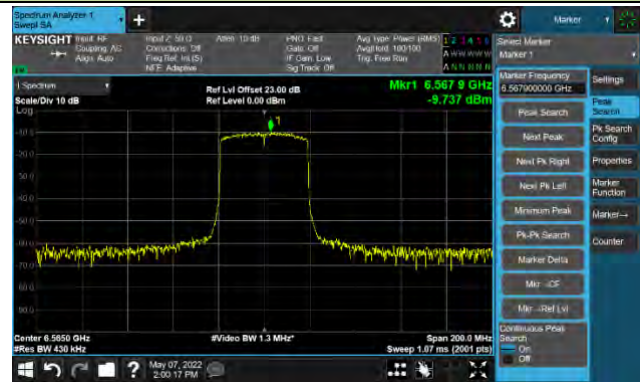


The Mask Data

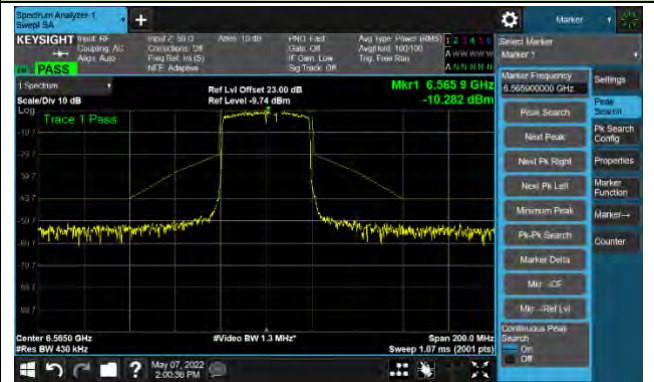


Channel 147 (6685MHz)

The Reference Level

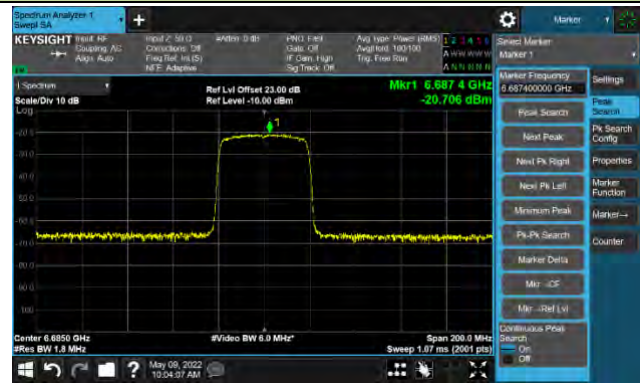


The Mask Data

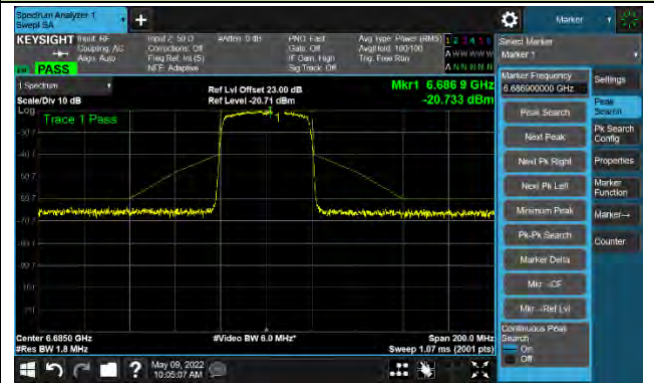


Channel 187 (6885MHz)

The Reference Level

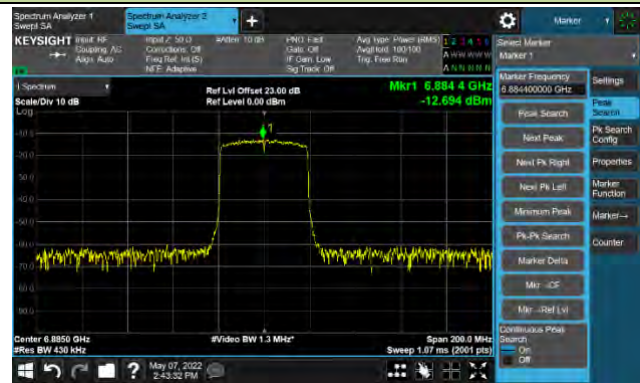


The Mask Data

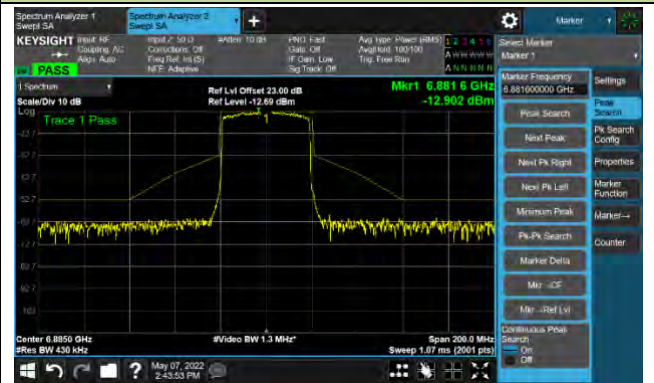


## 802.11ax-HE40 Ant 1

## Channel 195 (6925MHz)

## The Reference Level

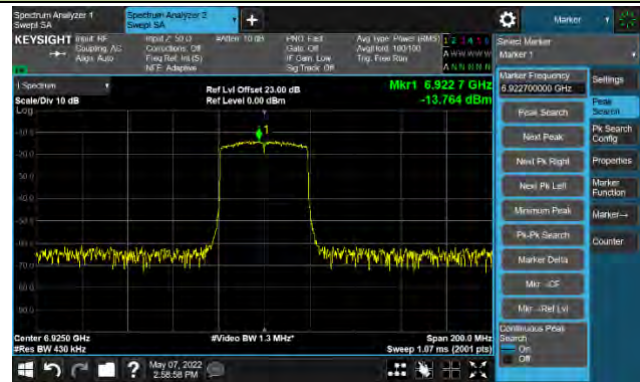


## The Mask Data

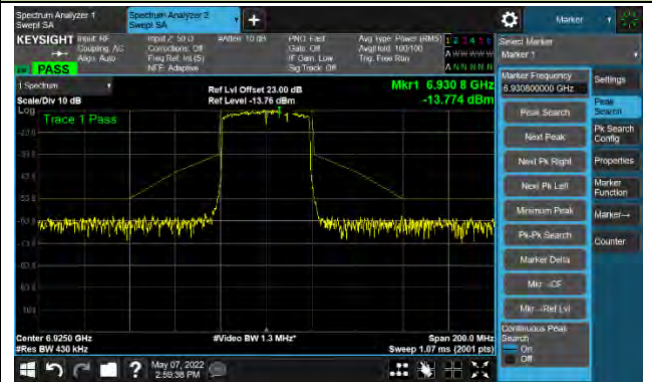


## Channel 211 (7005MHz)

## The Reference Level

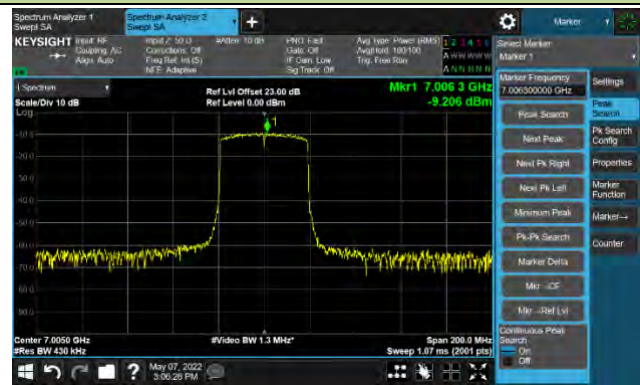


## The Mask Data

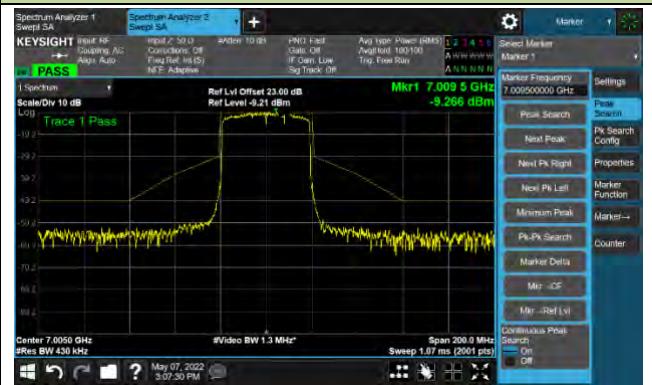

## Channel 227 (7085MHz)

## The Reference Level

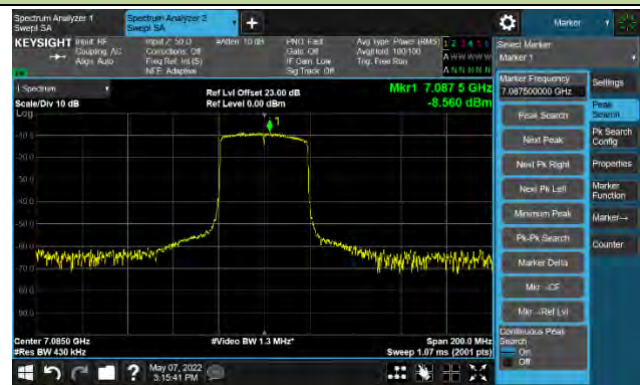

## The Mask Data

