

**TEST REPORT**  
of the accredited test laboratory

TÜV Nr.:INE-AT/FG-18/164

**Applicant:** PS GmbH  
Melisau 1255  
6863 Egg  
Austria

**Tested Product:** Electronic Lock

**FCC-ID:** 2ALMHBT

**IC-ID:** N/A

**Manufacturer:** See Applicant

**Output power / field strength:** 58,4 dBµV/m @ 3m distance  
**power supply:** 3V DC internal battery

**Frequency range:** 13,56 MHz  
**Channel separation:** N/A  
2402-2480 MHz

**Standard:** FCC: 47 CFR Part 15 (October 1, 2017 edition)  
RSS-210 Issue 9, August 2016

Testing Laboratory,  
Inspection Body,  
Certification Body,  
Calibration Laboratory,  
VerifizierungsstelleNotified Body 0408  
IC 2932K-1Non-executive  
Board of Directors:  
KR DI Johann  
MarihartManagement:  
DI Dr. Stefan Haas  
Mag. Christoph  
WenningerRegistered Office:  
Deutschstrasse 10  
1230 Vienna/AustriaBranch Offices:  
www.tuv.at/standorteCompany Register  
Court / - Number:  
Vienna / FN 288476 fBank Details:  
IBAN  
AT13120005294900106  
BIC BKAUATWWIBAN  
AT15310000010409326  
BIC RZBAATWWVAT ATU63240488  
DVR 3002476**TÜV Austria Services GmbH**  
**Test laboratory for EMC**

Supervisor of EMC-laboratory:

  
Ing. Wilhelm Seier

19.11.2018

Copy Nbr.:

checked by:

  
Ing. Michael Emminger

A publication of this test report is only permitted literally.  
Copying or reproduction of partial sections needs a written permission of  
TÜV Austria Services GmbH.

The results of this test report only refer to the provided equipment.

## Contents

|          | Designation                                             | PAGE  |
|----------|---------------------------------------------------------|-------|
| 1.       | Applicant                                               | 3     |
| 2.       | Description of EUT                                      | 4     |
| 3.       | Standards / Final result                                | 5     |
| 4.       | Test results                                            |       |
|          | List of measurements according to 47 CFR 15 and RSS-210 |       |
| 4.1      | Test object data                                        | 6     |
| 4.2      | Field strength of emissions at 13,110 – 14,010 MHz      | 7     |
| 4.3      | Emissions outside 13,110 – 14,010 MHz (15.209)          | 8-10  |
| 4.4      | Frequency tolerance                                     | 11    |
| Appendix | Designation                                             | PAGES |
| 1        | Test equipment used                                     | 4     |
| 2        | Photodocumentation                                      | 10    |

## 1. Applicant

**Company:** PS GmbH  
**Department:** QMB  
**Address:** Austria; 6863 Egg; Melisau 1255  
**Contact person:** Mr. Peter Harrasser

**EUT received on:** 17.09.2018

**Tests were performed on:** 17.09.2018

## 2. Description of EUT

**EUT:** Door Lock "SOLO DUAL"

**Serial Number:** Prototype

**Manufacturer:** PS GmbH  
Austria; 6863 Egg; Melisau 1255

**Description:** PS GmbH provided the following configuration for the measurements:

Prototype

**Operating mode:** The measurements were carried out at the following running states:

Cyclic presentation of card for opening

**Technical data EUT:** Rated voltage: 3VDC  
Rated current: <1A  
Rated frequency: DC

Mains voltage during the tests: 3V DC internal battery

**Climatic conditions in the emc laboratory:** Relative humidity: 52%  
Temperature: 23°C

### 3. Standards / Final result

| Name                                                                                                    | Title                                                   | Deviation | Result |
|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------|--------|
| Title 47 CFR Part 15<br>October 1, 2017 edition                                                         | RADIO FREQUENCY DEVICES                                 | none      | OK     |
| RSS-210<br>Issue 9<br>August 2016                                                                       | Licence-Exempt Radio Apparatus:<br>Category I Equipment | none      | OK     |
| <p>Result: Opinions and interpretation of testing laboratory<br/>OK: EUT passed<br/>NOK: EUT failed</p> |                                                         |           |        |

## 4. Test results

### 4.1 TEST OBJECT DATA

#### General EUT Description

This Electronic Lock uses RFID at 13,56 kHz to read keycards or other forms of RFID-Tags. A secondary identification mode is using Bluetooth technology, which is provided by a FCC Certified Module with the FCC-ID: QOQBLE113.

2.1033 (c) Technical description

2.1033 (4) Type of emission: continuous transmission

2.1033 (5) Frequency range: only one operating frequency 13,56 MHz.


2.1033 (6) Power range and Controls: Fixed output power resulting in 58,4 dBµV/m field strength in 3m distance.

2.1033 (7) Maximum output power rating: 58,4 dBµV/m @ 3m distance.

2.1033 (8) DC Voltage and Current: 3 V DC powered  
maximum current consumption: 50 mA

#### 4.2 Field strength of emissions at 13,110 – 14,010 MHz

#### § 15.225 (a) (b) (c) B.6

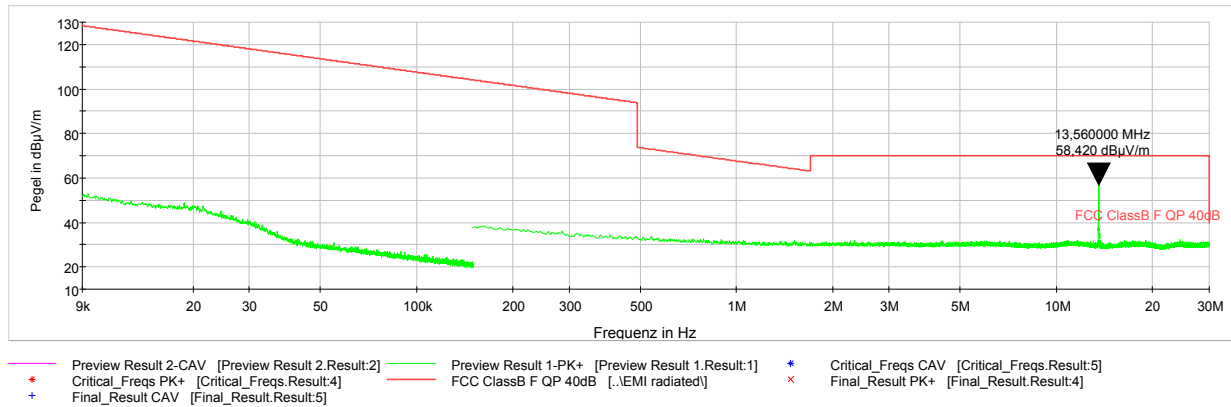

**Field strength at 13,56 MHz: 58,4 dBµV/m = 832 µV/m at 3 m distance. Converted with 40dB per decade for the 30m Limit this would be a Level of 18,4 dBµV/m or 8,32 µV/m.**

#### LIMIT SUBCLAUSE 15.225(a) (b) (c) (B.6)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Test Equipment used: EMV-100; EMV-101; EMV-103; EMV-105; NT-122; NT-151; EMV-200

#### 4.3 Emissions outside 13,110 – 14,010 MHz

#### § 15.225 (d) B.6

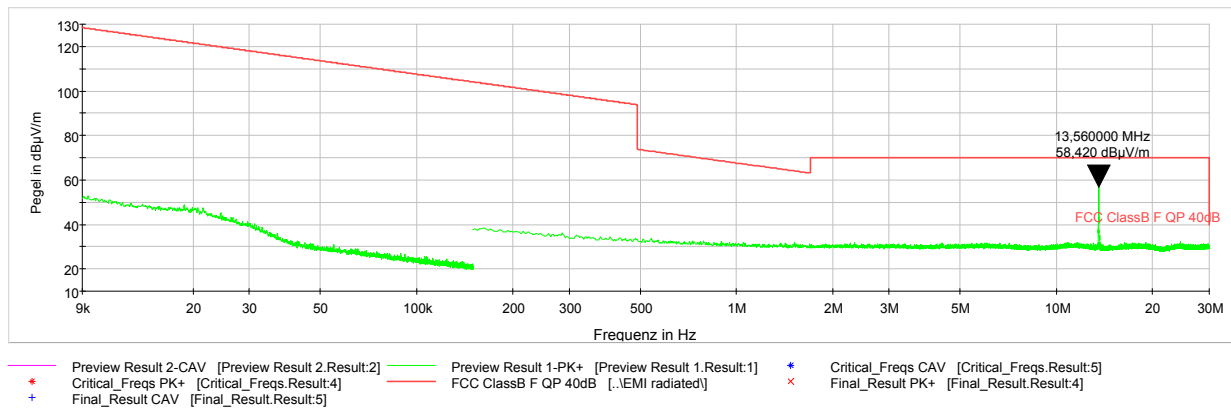

#### LIMIT

#### SUBCLAUSE 15.225(d) (15.209) (B.6 / RSS-Gen)


(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490     | 2400/F(kHz)                       | 300                           |
| 0.490–1.705     | 24000/F(kHz)                      | 30                            |
| 1.705–30.0      | 30                                | 30                            |
| 30–88           | 100**                             | 3                             |
| 88–216          | 150**                             | 3                             |
| 216–960         | 200**                             | 3                             |
| Above 960       | 500                               | 3                             |

Test Equipment used: EMV-100; EMV-101; EMV-103; EMV-105; NT-122; NT-151; EMV-200

## Emissions outside 13,110 – 14,010 MHz

## § 15.225 (d) B.6

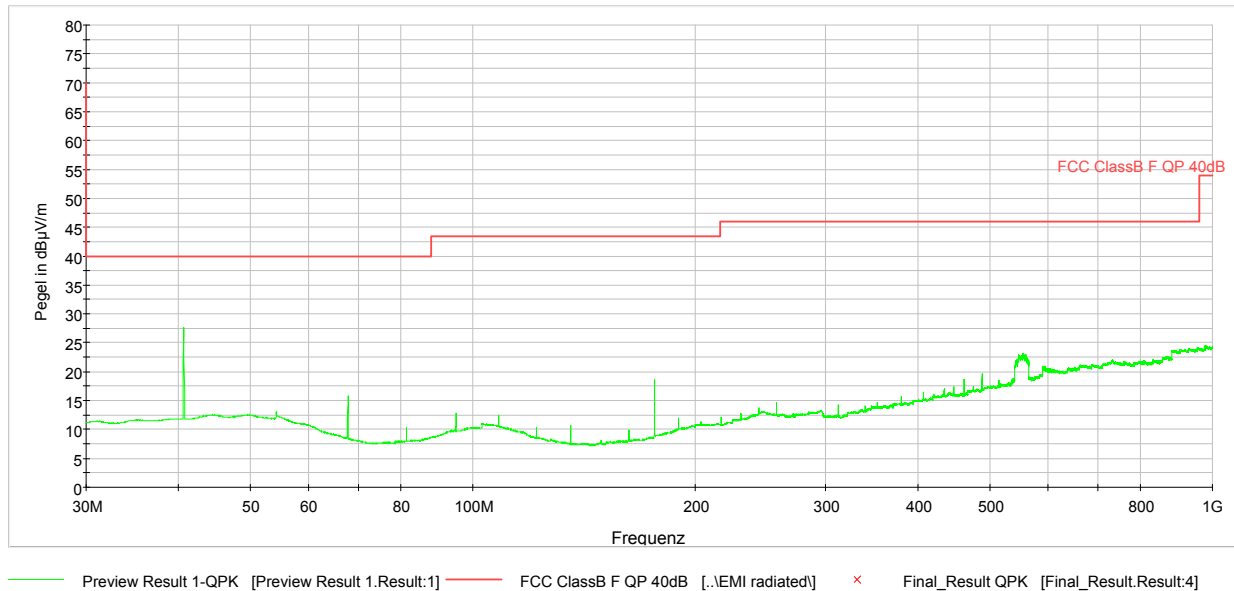

**Worst case Quasipeak Level at 40,68 MHz: 27,8 dBµV/m @ 3m.**

### LIMIT SUBCLAUSE 15.225(d) (15.209) (B.6 / RSS-Gen)


(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490     | 2400/F(kHz)                       | 300                           |
| 0.490–1.705     | 24000/F(kHz)                      | 30                            |
| 1.705–30.0      | 30                                | 30                            |
| 30–88           | 100**                             | 3                             |
| 88–216          | 150**                             | 3                             |
| 216–960         | 200**                             | 3                             |
| Above 960       | 500                               | 3                             |

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-112; EMV-200

## Emissions outside 13,110 – 14,010 MHz

## § 15.225 (d) B.6

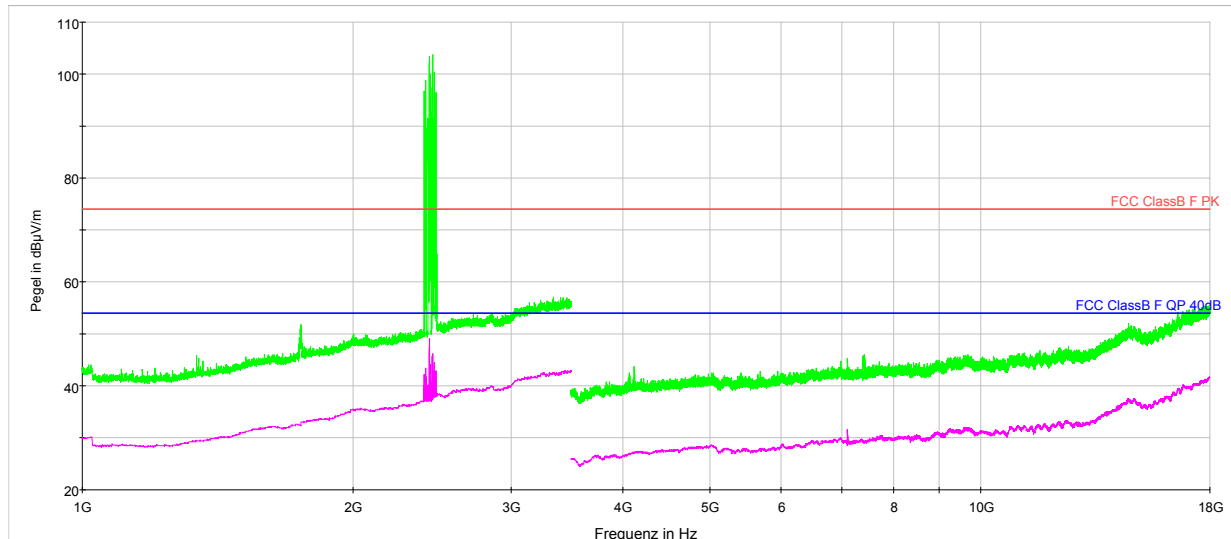

Preview Result 2-AVG [Preview Result 2.Result:2]  
 Preview Result 1-PK+ [Preview Result 1.Result:1]  
 PK+\_CLRWR:Abnahmemessungen\PS-Locks\Dual\_FCC\_F2\_mit sperren\Preview Result 1 [Preview Result 1.Result:1]  
 AVG\_CLRWR:Abnahmemessungen\PS-Locks\Dual\_FCC\_F2\_mit sperren\Preview Result 1 [Preview Result 1.Result:2]  
 FCC ClassB F PK [..EMI radiated]  
 FCC ClassB F QP 40dB [..EMI radiated]  
 Final\_Result PK+ [Final\_Result.Result:4]  
 Final\_Result AVG [Final\_Result.Result:5]

## LIMIT

## SUBCLAUSE 15.225(d) (15.209) (B.6 / RSS-Gen)

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490     | 2400/F(kHz)                       | 300                           |
| 0.490–1.705     | 24000/F(kHz)                      | 30                            |
| 1.705–30.0      | 30                                | 30                            |
| 30–88           | 100**                             | 3                             |
| 88–216          | 150**                             | 3                             |
| 216–960         | 200**                             | 3                             |
| Above 960       | 500                               | 3                             |

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-112; EMV-200

#### 4.4 Frequency tolerance

#### § 15.225 (e) B.6

Frequency error vs. Supply voltage

| DC-Voltage | Frequency Error<br>Hz | Frequency Error<br>% |
|------------|-----------------------|----------------------|
| 2,55 V     | -15                   | -0,00011062          |
| 3 V        | -15                   | -0,00011062          |
| 3,45 V     | -15                   | -0,00011062          |

Frequency error vs. Temperature

| Temperature<br>°C | Frequency Error<br>Hz | Frequency Error<br>% |
|-------------------|-----------------------|----------------------|
| -20               | 346                   | 0,00255162           |
| +20               | -15                   | -0,00011062          |
| +50               | -121                  | -0,00089233          |

#### LIMIT SUBCLAUSE 15.225(e) (B.6)

(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Equipment used: EMV-100; EMV-101; EMV-103; NT-122; NT-151; EMV-205

# Appendix 1

## Test equipment used

|                          |                                                     |                    |                          |                                                        |           |
|--------------------------|-----------------------------------------------------|--------------------|--------------------------|--------------------------------------------------------|-----------|
| <input type="checkbox"/> | Anechoic Chamber with 3m measurement distance       | NT-100             | <input type="checkbox"/> | Spectrum analyzer – FSP7<br>9 kHz – 7 GHz              | NT-200    |
| <input type="checkbox"/> | Stripline according to ISO 11452-5                  | NT-108             | <input type="checkbox"/> | ESCI - Test receiver<br>9 kHz – 7 GHz                  | NT-203/1  |
| <input type="checkbox"/> | MA4000 - Antenna mast<br>1 - 4 m height             | NT-110/1           | <input type="checkbox"/> | ESI26 – Test receiver<br>20 Hz – 26,5 GHz              | NT-207    |
| <input type="checkbox"/> | DS - Turntable<br>0 - 400 ° Azimuth                 | NT-111/1           | <input type="checkbox"/> | Digital Radio Tester<br>CTS55                          | NT-208    |
| <input type="checkbox"/> | CO3000 Controller<br>Mast+Turntable                 | NT-112/1           | <input type="checkbox"/> | Noise-gen., ITU-R 559-2<br>20 Hz – 20 kHz              | NT-209    |
| <input type="checkbox"/> | HUF-Z3 - Log. Per. Antenna<br>200 - 1000 MHz        | NT-121             | <input type="checkbox"/> | CMTA - Radiocommunication<br>analyzer ; 0,1 - 1000 MHz | NT-210    |
| <input type="checkbox"/> | FMZB1513 - Loop Antenna<br>9 kHz - 30 MHz           | NT-122/1           | <input type="checkbox"/> | 3271 - Spectrum analyzer<br>100 Hz - 26,5 GHz          | NT-211    |
| <input type="checkbox"/> | HFH-Z6 - Rod Antenna<br>9 kHz - 30 MHz              | NT-123             | <input type="checkbox"/> | Digital Radio Tester<br>Aeroflex 3920                  | NT-212/1  |
| <input type="checkbox"/> | 3121C - Dipole Antenna<br>28 - 1000 MHz             | NT-124             | <input type="checkbox"/> | Mixer M28HW<br>26,5 GHz - 40 GHz                       | NT-214    |
| <input type="checkbox"/> | 3115 - Horn Antenna<br>1 - 18 GHz (immunity)        | NT-125             | <input type="checkbox"/> | RubiSource T&M<br>Timing reference                     | NT-216    |
| <input type="checkbox"/> | 3116 - Horn Antenna<br>18 - 40 GHz                  | NT-126             | <input type="checkbox"/> | Radiocommunication analyzer<br>SWR 1180 MD             | NT-217    |
| <input type="checkbox"/> | SAS-200/543 - Bicon. Antenna<br>20 MHz - 300 MHz    | NT-127             | <input type="checkbox"/> | Mixer M19HWD<br>40 GHz – 60 GHz                        | NT-218    |
| <input type="checkbox"/> | AT-1080 - Log. Per. Antenna<br>80 - 1000 MHz        | NT-128             | <input type="checkbox"/> | Mixer M12HWD<br>60 GHz – 90 GHz                        | NT-219    |
| <input type="checkbox"/> | HK-116 - bicon. Antenna<br>20 MHz - 300 MHz         | NT-129             | <input type="checkbox"/> | DSO9104<br>Digital scope                               | NT-220/1  |
| <input type="checkbox"/> | HK-116 - bicon. Antenna<br>20 MHz - 300 MHz         | NT-130             | <input type="checkbox"/> | TPS 2014<br>Digital scope                              | NT-222    |
| <input type="checkbox"/> | 3146 - Log. Per. Antenna<br>200 – 1000 MHz          | NT-131             | <input type="checkbox"/> | Artificial Ear<br>according to IEC 60318               | NT-224    |
| <input type="checkbox"/> | VULB 9163 Trilog Antenna<br>30 – 3000 MHz           | NT-131/1           | <input type="checkbox"/> | 1 kHz Sound calibrator                                 | NT-225    |
| <input type="checkbox"/> | Loop Antenna<br>H-Field                             | NT-132             | <input type="checkbox"/> | B10 - Harmonics and<br>flicker analyzer                | NT-232    |
| <input type="checkbox"/> | Horn Antenna<br>500 MHz - 2900 MHz                  | NT-133             | <input type="checkbox"/> | SRM-3006<br>Spectrum analyzer                          | NT-233/1a |
| <input type="checkbox"/> | Horn Antenna<br>500 MHz - 6000 MHz                  | NT-133/1           | <input type="checkbox"/> | E-field probe SRM<br>75 MHz – 3 GHz                    | NT-234    |
| <input type="checkbox"/> | Log. per. Antenna<br>800 MHz - 2500 MHz             | NT-134             | <input type="checkbox"/> | Field Meter NBM-500<br>incl. E- and H-Field probes     | NT-240a-e |
| <input type="checkbox"/> | Log. per. Antenna<br>800 MHz - 2500 MHz             | NT-135             | <input type="checkbox"/> | Hall-Teslameter<br>ETM-1                               | NT-241    |
| <input type="checkbox"/> | BiConiLog Antenna<br>26 MHz – 2000 MHz              | NT-137             | <input type="checkbox"/> | EFA-3<br>H-field- / E-field probe                      | NT-243    |
| <input type="checkbox"/> | Conical Dipol Antenna<br>PCD8250                    | NT-138             | <input type="checkbox"/> | EHP-50F<br>H-field- / E-field probe                    | NT-243/1  |
| <input type="checkbox"/> | HF 906 - Horn Antenna<br>1 - 18 GHz (emission)      | NT-139             | <input type="checkbox"/> | Field Meter EMR-200<br>100 kHz – 3 GHz                 | NT-244    |
| <input type="checkbox"/> | HZ-1<br>Antenna tripod                              | NT-150             | <input type="checkbox"/> | E-field probe<br>100 kHz – 3 GHz                       | NT-245    |
| <input type="checkbox"/> | BN 1500<br>Antenna tripod                           | NT-151             | <input type="checkbox"/> | H-field probe<br>300 kHz – 30 MHz                      | NT-246    |
| <input type="checkbox"/> | Ant. tripod for EN61000-4-3<br>Model TP1000A        | NT-156             |                          |                                                        |           |
| <input type="checkbox"/> | Power quality analyzer<br>Fluke 1760 (complete set) | NT-160 -<br>NT-173 |                          |                                                        |           |

**Division:**  
Industry & Energy

Department: FG

Test report number:  
INE-AT/FG-18/164

Page: 1 of 4

Date: 19.11.2018

Checked by: \_\_\_\_\_

# Appendix 1 (continued)

## Test equipment used

|                          |                                                       |             |                          |                                                    |          |
|--------------------------|-------------------------------------------------------|-------------|--------------------------|----------------------------------------------------|----------|
| <input type="checkbox"/> | E-field probe<br>3 MHz – 18 GHz                       | NT-247      | <input type="checkbox"/> | 500W1000M7 - RF-Amplifier<br>80 - 1000 MHz / 500 W | NT-332   |
| <input type="checkbox"/> | H-field probe<br>27 MHz – 1 GHz                       | NT-248      | <input type="checkbox"/> | AS0102-65R - RF-Amplifier<br>1 GHz - 2 GHz         | NT-333   |
| <input type="checkbox"/> | ELT-400<br>1 Hz – 400 kHz                             | NT-249      | <input type="checkbox"/> | APA01 – RF-Amplifier<br>0,5 GHz – 2,5 GHz          | NT-334   |
| <input type="checkbox"/> | MDS 21 - Absorbing clamp<br>30 - 1000 MHz             | NT-250      | <input type="checkbox"/> | Preamplifier<br>1 GHz - 4 GHz                      | NT-335   |
| <input type="checkbox"/> | FCC-203I<br>EM Injection clamp                        | NT-251      | <input type="checkbox"/> | Preamplifier for GPS<br>MKU 152 A                  | NT-336   |
| <input type="checkbox"/> | FCC-203I-DCN<br>Ferrite decoupling network            | NT-252      | <input type="checkbox"/> | Preamplifier<br>100 MHz – 23 GHz                   | NT-337   |
| <input type="checkbox"/> | PR50<br>Current Probe                                 | NT-253      | <input type="checkbox"/> | DC Block 10 MHz – 18 GHz<br>Model 8048             | NT-338   |
| <input type="checkbox"/> | i310s<br>Current Probe                                | NT-254/1    | <input type="checkbox"/> | 2-97201<br>Electronic load                         | NT-341   |
| <input type="checkbox"/> | Fluke 87 V<br>True RMS Multimeter                     | NT-260      | <input type="checkbox"/> | TSX3510P - Power supply<br>0-30 V / 0 - 10 A       | NT-344   |
| <input type="checkbox"/> | Model 2000<br>Digital Multimeter                      | NT-261      | <input type="checkbox"/> | TSX3510P - Power supply<br>0-30 V / 0 - 10 A       | NT-345   |
| <input type="checkbox"/> | Fluke 87 V<br>Digital Multimeter                      | NT-262/1    | <input type="checkbox"/> | VDS 200<br>Mobil-impuls-generator                  | NT-350   |
| <input type="checkbox"/> | ESH2-Z5-U1 Artificial mains<br>network 4x25A          | NT-300      | <input type="checkbox"/> | LD 200<br>Mobil-impuls-generator                   | NT-351   |
| <input type="checkbox"/> | ESH3-Z5-U1 Artificial mains<br>network 2x10A          | NT-301      | <input type="checkbox"/> | MPG 200<br>Mobil-Impuls-Generators                 | NT-352   |
| <input type="checkbox"/> | ESH3-Z6-U1 Artificial mains<br>network 1x100A         | NT-302      | <input type="checkbox"/> | EFT 200<br>Mobil-impuls-generator                  | NT-353   |
| <input type="checkbox"/> | ESH3-Z6-U1 Artificial mains<br>network 1x100A         | NT-302a     | <input type="checkbox"/> | AN 200 S1<br>Artificial Network                    | NT-354   |
| <input type="checkbox"/> | PHE 4500/B<br>Power amplifier                         | NT-304      | <input type="checkbox"/> | FP-EFT 32M<br>3 ph. Coupling filter (Burst)        | NT-400/1 |
| <input type="checkbox"/> | EZ10<br>T-Artificial Network                          | NT-305      | <input type="checkbox"/> | PHE 4500 - Mains impedance<br>network              | NT-401   |
| <input type="checkbox"/> | SMG - Signal generator<br>0,1 - 1000 MHz              | NT-310      | <input type="checkbox"/> | IP 6.2 Coupling filter for<br>data lines (Surge)   | NT-403   |
| <input type="checkbox"/> | SMA100A - Signal generator<br>9 kHz - 6 GHz           | NT-310/1    | <input type="checkbox"/> | TK 9421 High Power Volt. Probe<br>150 kHz - 30 MHz | NT-409   |
| <input type="checkbox"/> | RefRad<br>Reference generator                         | NT-312      | <input type="checkbox"/> | ESH2-Z3 - Probe<br>9 kHz - 30 MHz                  | NT-410   |
| <input type="checkbox"/> | SMP 02 Signal generator<br>10 MHz - 20 GHz            | NT-313      | <input type="checkbox"/> | IP 4 - Capacitive clamp<br>(Burst)                 | NT-411   |
| <input type="checkbox"/> | 40 MHz Arbitrary Generator<br>TGA1241                 | NT-315      | <input type="checkbox"/> | Highpass-Filter<br>100 MHz – 3 GHz                 | NT-412   |
| <input type="checkbox"/> | Artificial mains network<br>NSLK 8127-PLC             | NT-316      | <input type="checkbox"/> | Highpass-Filter<br>600 MHz – 4 GHz                 | NT-413   |
| <input type="checkbox"/> | ESD 30 System<br>up to 25 kV                          | NT-321      | <input type="checkbox"/> | Highpass-Filter<br>1250 MHz – 4 GHz                | NT-414   |
| <input type="checkbox"/> | PSURGE 4.1<br>Surge generator                         | NT-324      | <input type="checkbox"/> | Highpass-Filter<br>1800 MHz – 16 GHz               | NT-415   |
| <input type="checkbox"/> | IMU4000<br>Immunity test system                       | NT-325/1    |                          |                                                    |          |
| <input type="checkbox"/> | VCS 500-M6<br>Surge-Generator                         | NT-326      |                          |                                                    |          |
| <input type="checkbox"/> | Oscillatory Wave Simulator incl.<br>Coupling networks | NT-328a+b+c |                          |                                                    |          |
| <input type="checkbox"/> | BTA-250 - RF-Amplifier<br>9 kHz - 220 MHz / 250 W     | NT-330      |                          |                                                    |          |
| <input type="checkbox"/> | T82-50 RF-Amplifier<br>2 GHz – 8 GHz                  | NT-331      |                          |                                                    |          |

**Division:**  
Industry & Energy

Department: FG

Test report number:  
INE-AT/FG-18/164

Page: 2 of 4

Date: 19.11.2018

Checked by: \_\_\_\_\_

# Appendix 1 (continued)

## Test equipment used

|                          |                                                |        |                          |                                                       |                    |
|--------------------------|------------------------------------------------|--------|--------------------------|-------------------------------------------------------|--------------------|
| <input type="checkbox"/> | Highpass-Filter<br>3500 MHz – 18 GHz           | NT-416 | <input type="checkbox"/> | FCC-801-AF10<br>Coupling decoupling network           | NT-461             |
| <input type="checkbox"/> | RF-Attenuator 10 dB<br>DC – 18 GHz / 50 W      | NT-417 | <input type="checkbox"/> | FCC-801-S25<br>Coupling decoupling network            | NT-462             |
| <input type="checkbox"/> | RF-Attenuator 6 dB<br>DC – 18 GHz / 50 W       | NT-418 | <input type="checkbox"/> | FCC-801-T4<br>Coupling decoupling network             | NT-463             |
| <input type="checkbox"/> | RF-Attenuator 3 dB<br>DC – 18 GHz / 50 W       | NT-419 | <input type="checkbox"/> | FCC-801-C1<br>Coupling decoupling network             | NT-464             |
| <input type="checkbox"/> | RF-Attenuator 20 dB<br>DC - 1000 MHz / 25 W    | NT-421 | <input type="checkbox"/> | SW 9605 - Current probe<br>150 kHz – 30 MHz           | NT-465/1           |
| <input type="checkbox"/> | RF-Attenuator 30 dB<br>DC - 1000 MHz / 1 W     | NT-423 | <input type="checkbox"/> | 95242-1 – Current probe<br>1 MHz – 400 MHz            | NT-468             |
| <input type="checkbox"/> | RF-Attenuator<br>30 dB                         | NT-424 | <input type="checkbox"/> | 94106-1L-1 – Current probe<br>100 kHz – 450 MHz       | NT-471             |
| <input type="checkbox"/> | RF-Attenuator 6 dB<br>DC - 1000 MHz / 1 W      | NT-425 | <input type="checkbox"/> | GA 1240 Power amplifier<br>according to EN 61000-4-16 | NT-480             |
| <input type="checkbox"/> | RF-Attenuator 6 dB<br>DC - 1000 MHz / 1 W      | NT-426 | <input type="checkbox"/> | Coupling networks<br>according to EN 61000-4-16       | NT-481 -<br>NT-483 |
| <input type="checkbox"/> | RF-Attenuator<br>6 dB                          | NT-428 | <input type="checkbox"/> | Van der Hoofden Test Head                             | NT-484             |
| <input type="checkbox"/> | RF-Attenuator<br>0 dB - 81 dB                  | NT-429 | <input type="checkbox"/> | EMC Video/Audiosystem                                 | NT-511/1           |
| <input type="checkbox"/> | WRU 27 - Band blocking<br>27 MHz               | NT-430 | <input type="checkbox"/> | ES-K1 Version 1.71 SP2<br>Test software               | NT-520             |
| <input type="checkbox"/> | WHJ450C9 AA - High pass<br>450 MHz             | NT-431 | <input type="checkbox"/> | EMC32 Version 10.40.00<br>Test software               | NT-520/1           |
| <input type="checkbox"/> | WHJ250C9 AA - High pass<br>250 MHz             | NT-432 | <input type="checkbox"/> | SRM-TS Version 1.3<br>software for SRM-3000           | NT-522             |
| <input type="checkbox"/> | RF-Load<br>150 W                               | NT-433 | <input type="checkbox"/> | SRM-TS Version 1.3.1<br>software for SRM-3006         | NT-522/1           |
| <input type="checkbox"/> | Impedance transducer<br>1:4 ; 1:9 ; 1:16       | NT-435 | <input type="checkbox"/> | Spitzenberger und Spies<br>Test software V4.1         | NT-525             |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz<br>6 dB              | NT-436 | <input type="checkbox"/> | Noise power test apparatus<br>according to EN 55014   | NT-530             |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz<br>6 dB              | NT-437 | <input type="checkbox"/> | Vertical coupling plane<br>(ESD)                      | NT-531             |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz<br>10 dB             | NT-438 | <input type="checkbox"/> | Test cable #4<br>for EN 61000-4-6                     | NT-553             |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz<br>20 dB             | NT-439 | <input type="checkbox"/> | Test cable #3<br>for conducted emission               | NT-554             |
| <input type="checkbox"/> | I+P 7780 Directional coupler<br>100 - 2000 MHz | NT-440 | <input type="checkbox"/> | Test cable #5+#6<br>ESD-cable (2x470k)                | NT-555 +<br>NT-556 |
| <input type="checkbox"/> | ESH3-Z2 - Pulse limiter<br>9 kHz - 30 MHz      | NT-441 | <input type="checkbox"/> | Test cable #8<br>Sucoflex 104EA                       | NT-559             |
| <input type="checkbox"/> | Power Divider<br>6 dB/1 W/50 Ohm               | NT-443 | <input type="checkbox"/> | Test cable #9<br>(for outdoor measurements)           | NT-580             |
| <input type="checkbox"/> | Directional coupler<br>0,1 MHz – 70 MHz        | NT-444 | <input type="checkbox"/> | Test cable #10<br>(for outdoor measurements)          | NT-581             |
| <input type="checkbox"/> | Directional coupler<br>0,1 MHz – 70 MHz        | NT-445 | <input type="checkbox"/> | Test cable #13<br>Sucoflex 104PE                      | NT-584             |
| <input type="checkbox"/> | Tube imitations<br>according to EN 55015       | NT-450 | <input type="checkbox"/> | Test cable #21<br>for SRM-3000                        | NT-592             |
| <input type="checkbox"/> | FCC-801-M3-16A<br>Coupling decoupling network  | NT-458 | <input type="checkbox"/> | Shield chamber                                        | NT-600             |
| <input type="checkbox"/> | FCC-801-M2-50A<br>Coupling decoupling network  | NT-459 | <input type="checkbox"/> | Climatic chamber                                      | M-1200             |
| <input type="checkbox"/> | FCC-801-M5-25<br>Coupling decoupling network   | NT-460 |                          |                                                       |                    |

**Division:**  
Industry & Energy

Department: FG

Test report number:  
INE-AT/FG-18/164

Page: 3 of 4

Date: 19.11.2018

Checked by: \_\_\_\_\_

# Appendix 1 (continued)

## Test equipment used

|                          |                                                     |             |
|--------------------------|-----------------------------------------------------|-------------|
| <input type="checkbox"/> | Anechoic Chamber<br>3 m / 5 m measuring distance    | EMV-100     |
| <input type="checkbox"/> | Turntabel<br>6 m diameter                           | EMV-101     |
| <input type="checkbox"/> | Antenna mast<br>1 – 4 m                             | EMV-102     |
| <input type="checkbox"/> | Mast and Turntable controller<br>FC-06              | EMV-103     |
| <input type="checkbox"/> | EMC Video/Audiosystem                               | EMV-104     |
| <input type="checkbox"/> | EMC Software<br>EMC32 Version 10.40.00              | EMV-105     |
| <input type="checkbox"/> | Hornantenna 1 – 18 GHz<br>HF 907                    | EMV-110     |
| <input type="checkbox"/> | Antennapre.amp. 1 – 18 GHz<br>ERZ-LNA0200-1800-30-2 | EMV-111     |
| <input type="checkbox"/> | Trilog Antenna 30-3000 MHz<br>VULB9163              | EMV-112     |
| <input type="checkbox"/> | Monopol 9 kHz – 30 MHz<br>VAMP 9243                 | EMV-113     |
| <input type="checkbox"/> | Antennapre.amp 18 – 40 GHz<br>BBV 9721              | EMV-114     |
| <input type="checkbox"/> | Hornantenna 200 – 2000 MHz<br>AH-220                | EMV-115     |
| <input type="checkbox"/> | DC Artificial Network<br>PVDC 8300                  | EMV-150     |
| <input type="checkbox"/> | AC Artificial Network<br>NNLK 8121 RC               | EMV-151     |
| <input type="checkbox"/> | EMI Receiver<br>ESR26                               | EMV-200     |
| <input type="checkbox"/> | Signalgenerator 9 kHz – 40 GHz<br>N5173B            | EMV-201     |
| <input type="checkbox"/> | GPS Frequency normal<br>B-88                        | EMV-202     |
| <input type="checkbox"/> | DC Power supply<br>N5745A                           | EMV-203     |
| <input type="checkbox"/> | Spektrum Analyzator<br>FSV40                        | EMV-205     |
| <input type="checkbox"/> | Thd Multimeter<br>Model 2015                        | EMV-206     |
| <input type="checkbox"/> | Poweramplifier<br>PAS15000                          | EMV-207/abc |
| <input type="checkbox"/> | Inrush Current Source                               | EMV-208/abc |
| <input type="checkbox"/> | Arb.-generator<br>Sycore                            | EMV-209     |
| <input type="checkbox"/> | Harmonics/Flicker analyzer<br>ARS 16/3              | EMV-210     |
| <input type="checkbox"/> | HF- Amplifier 9 kHz-250 MHz<br>BBA150               | EMV-300     |
| <input type="checkbox"/> | HF- Amplifier 80 -1000 MHz<br>BBA150                | EMV-301     |
| <input type="checkbox"/> | HF- Amplifier 0,8 - 6 GHz<br>BBA150                 | EMV-302     |
| <input type="checkbox"/> | High Power Ant. 20-200 MHz<br>VHBD 9134             | EMV-303     |
| <input type="checkbox"/> | Log.per Antenna 80-2700 MHz<br>STLP 9128 E special  | EMV-304     |

|                          |                                                   |             |
|--------------------------|---------------------------------------------------|-------------|
| <input type="checkbox"/> | Log.per Antenna 0,7 – 9 GHz<br>STLP9149           | EMV-305     |
| <input type="checkbox"/> | HF- Amplifier 9 kHz-250 MHz<br>BBA150 (low noise) | EMV-306     |
| <input type="checkbox"/> | Load Dump Generator<br>LD 200N                    | EMV-350     |
| <input type="checkbox"/> | Ultra Compact Symulator<br>UCS 200N100            | EMV-351     |
| <input type="checkbox"/> | Automotive Power fail module<br>PFM 200N100.1     | EMV-352     |
| <input type="checkbox"/> | Voltage Drop Symulator<br>VDS 200Q100             | EMV-353     |
| <input type="checkbox"/> | Arb. Generator<br>AutoWave                        | EMV-354     |
| <input type="checkbox"/> | Ultra Compact Symulator<br>UCS 500N7              | EMV-355     |
| <input type="checkbox"/> | Coupling decoupling network<br>CNI 503B7 / 32 A   | EMV-356     |
| <input type="checkbox"/> | Coupling decoupling network<br>CNI 503B7 / 63 A   | EMV-357     |
| <input type="checkbox"/> | Telecom Surge Generator<br>TSurge 7               | EMV-358     |
| <input type="checkbox"/> | Coupling decoupling network<br>CNI 508N2          | EMV-359     |
| <input type="checkbox"/> | Coupling decoupling network<br>CNV 504N2.2        | EMV-360     |
| <input type="checkbox"/> | Immunity generator<br>NSG4060/NSG4060-1           | EMV-361     |
| <input type="checkbox"/> | Coupling network<br>CDND M316-2                   | EMV-362     |
| <input type="checkbox"/> | Coupling network<br>CT419-5                       | EMV-363     |
| <input type="checkbox"/> | ESD Generator<br>NSG 437                          | EMV-364     |
| <input type="checkbox"/> | Pulse Limiter<br>VTSD 9561-F BNC                  | EMV-405     |
| <input type="checkbox"/> | Transient emission<br>BSM200N40+BS200N100         | EMV-450+451 |
| <input type="checkbox"/> | Cap. Coupling Clamp<br>HFK                        | EMV-455     |
| <input type="checkbox"/> | Mag. Field System<br>MS100N+MC26100+MC2630        | EMV-456-458 |
| <input type="checkbox"/> | Coupling network<br>CDN M2-100A                   | EMV-459     |
| <input type="checkbox"/> | Coupling network<br>CDN M3-32A                    | EMV-460     |
| <input type="checkbox"/> | Coupling network<br>CDN M5-100A                   | EMV-461     |
| <input type="checkbox"/> | Current Clamp<br>CIP 9136A                        | EMV-462     |
| <input type="checkbox"/> | DC Artificial Network<br>HV-AN 150                | EMV-464+465 |
| <input type="checkbox"/> | Coupling Clamp<br>EM 101                          | EMV-466     |
| <input type="checkbox"/> | Decoupling Clamp<br>FTC 101                       | EMV-467     |
| <input type="checkbox"/> | Power attenuator<br>10 dB / 250 Watt              | EMV-469/2   |

**Division:**  
Industry & Energy

Department: FG

Test report number:  
INE-AT/FG-18/164

Page: 4 of 4

Date: 19.11.2018

Checked by: \_\_\_\_\_

## Appendix 2 Photodocumentation

Description: Outside view #1

**Division:**  
Industry & Energy

Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 1 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_



## Appendix 2 Photodocumentation

Description: Outside view #2

**Division:**  
Industry & Energy

Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 2 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_



## Appendix 2 Photodocumentation

Description: Case opened view #1

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 3 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

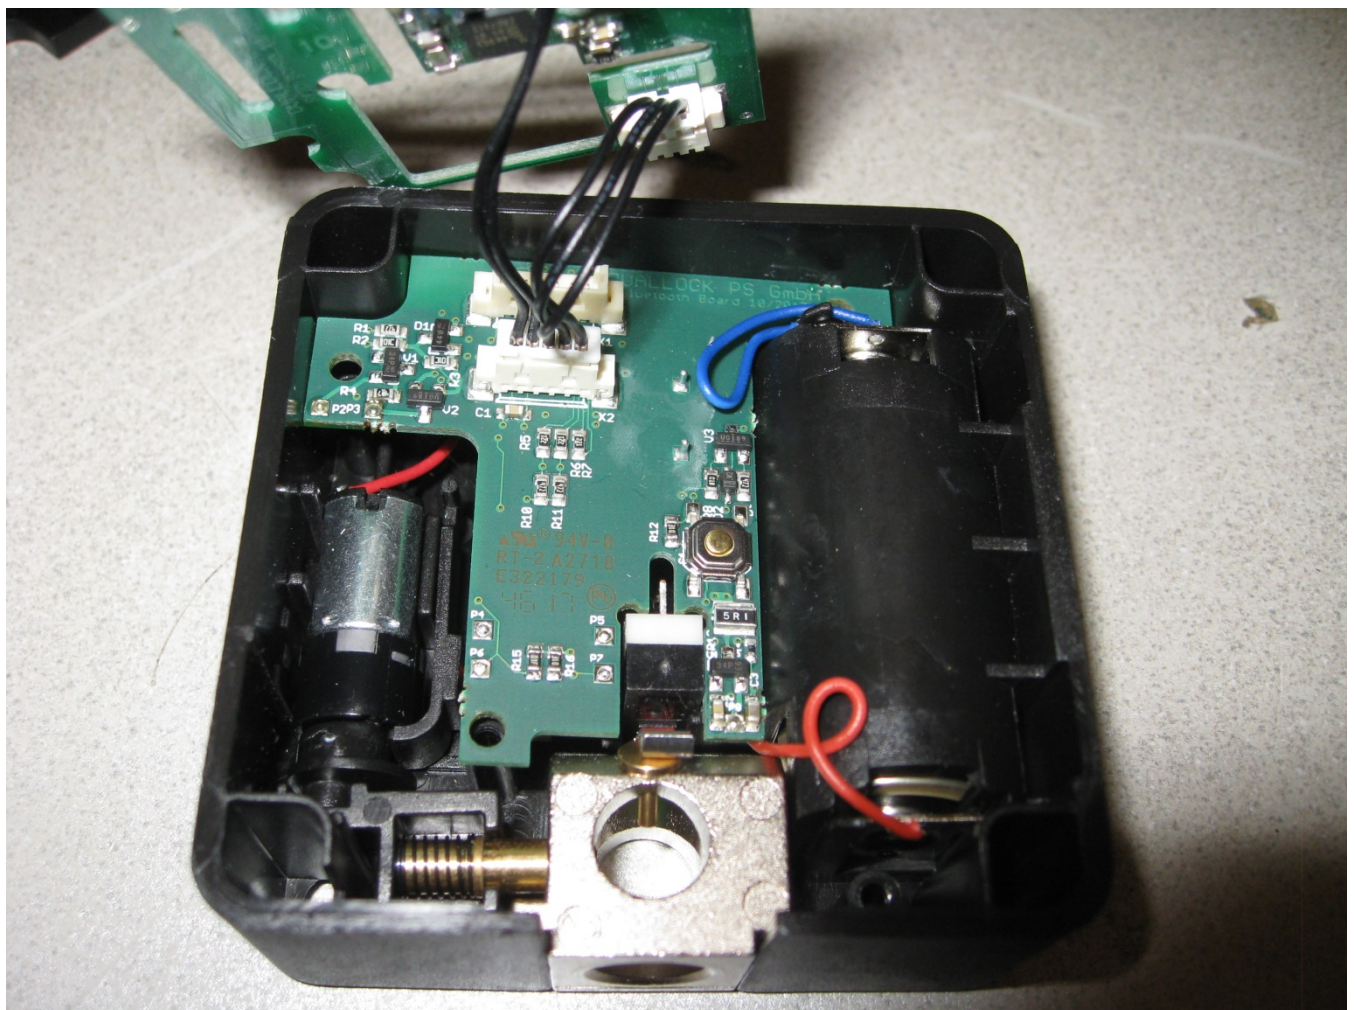

## Appendix 2 Photodocumentation

Description: Case opened view #2

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 4 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

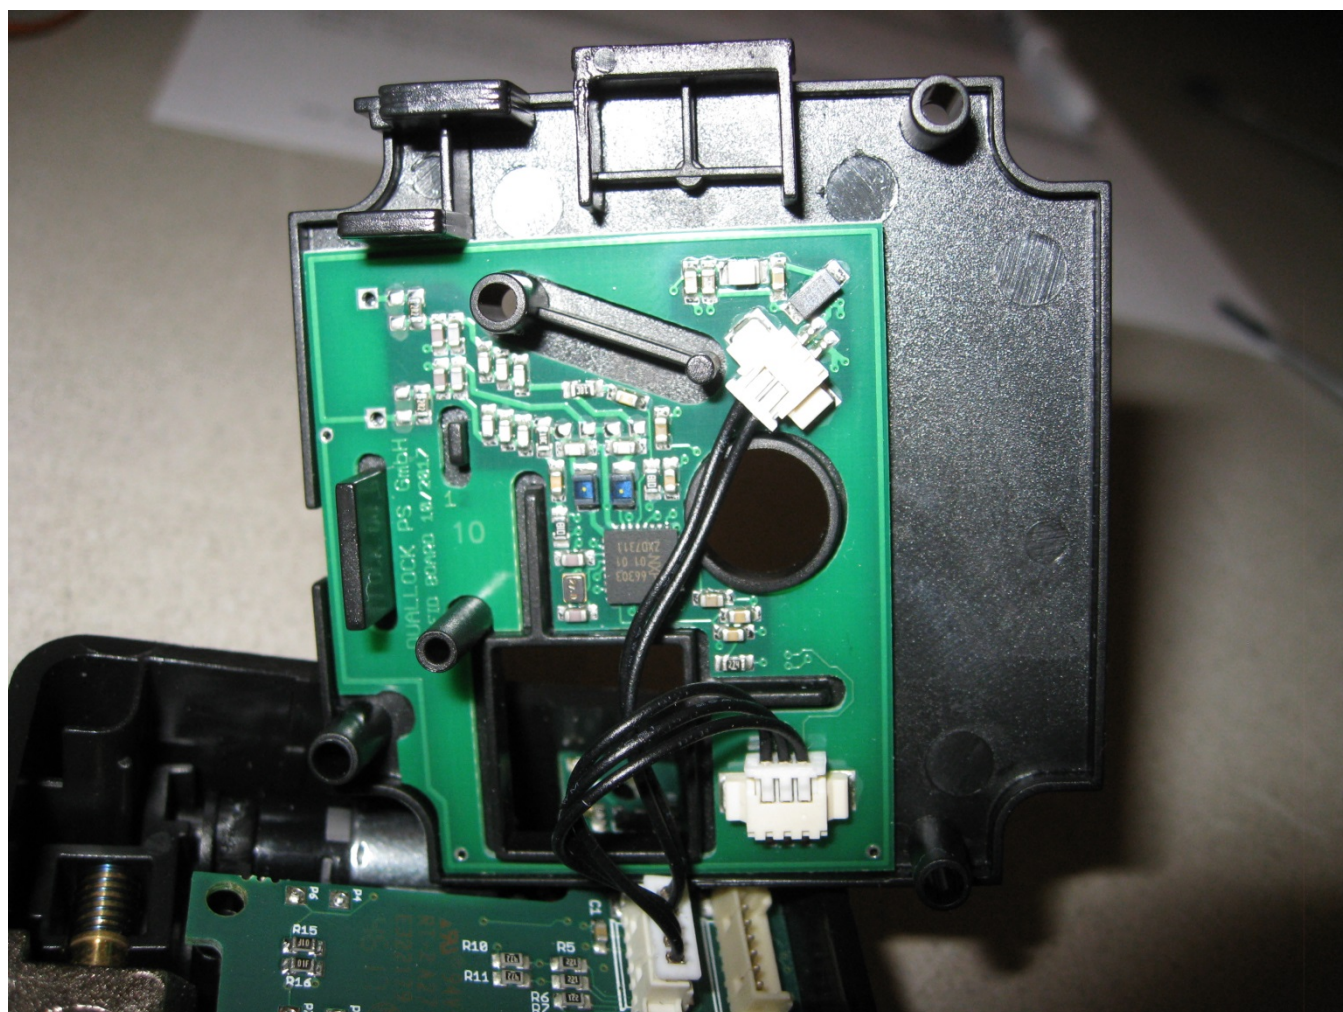

## Appendix 2 Photodocumentation

Description: RFID Board view #1

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 5 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

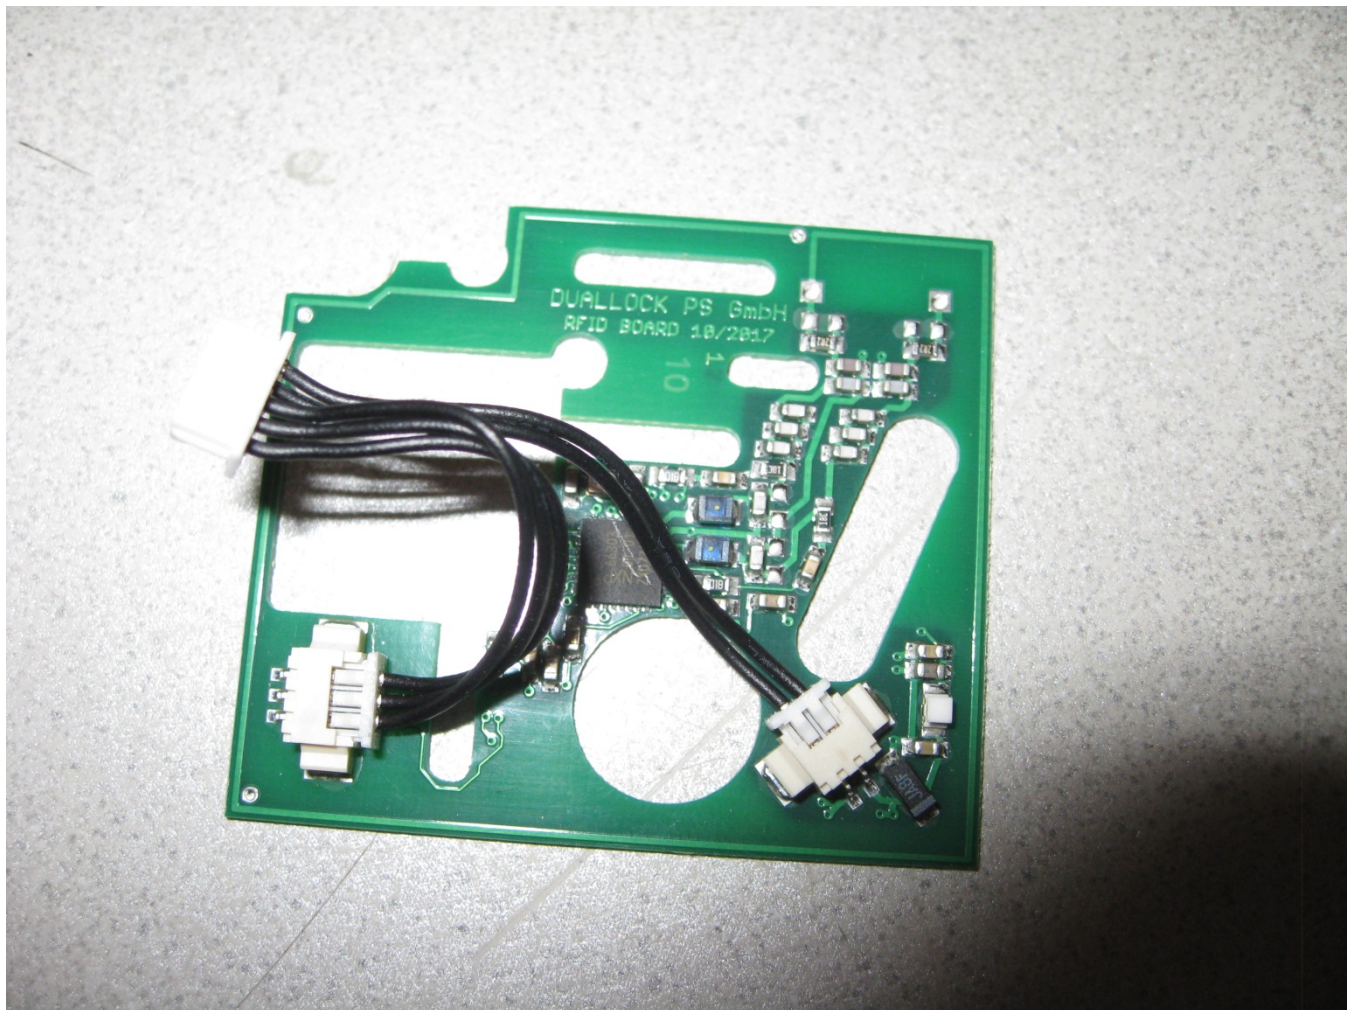

## Appendix 2 Photodocumentation

Description: RFID Board view #2

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 6 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

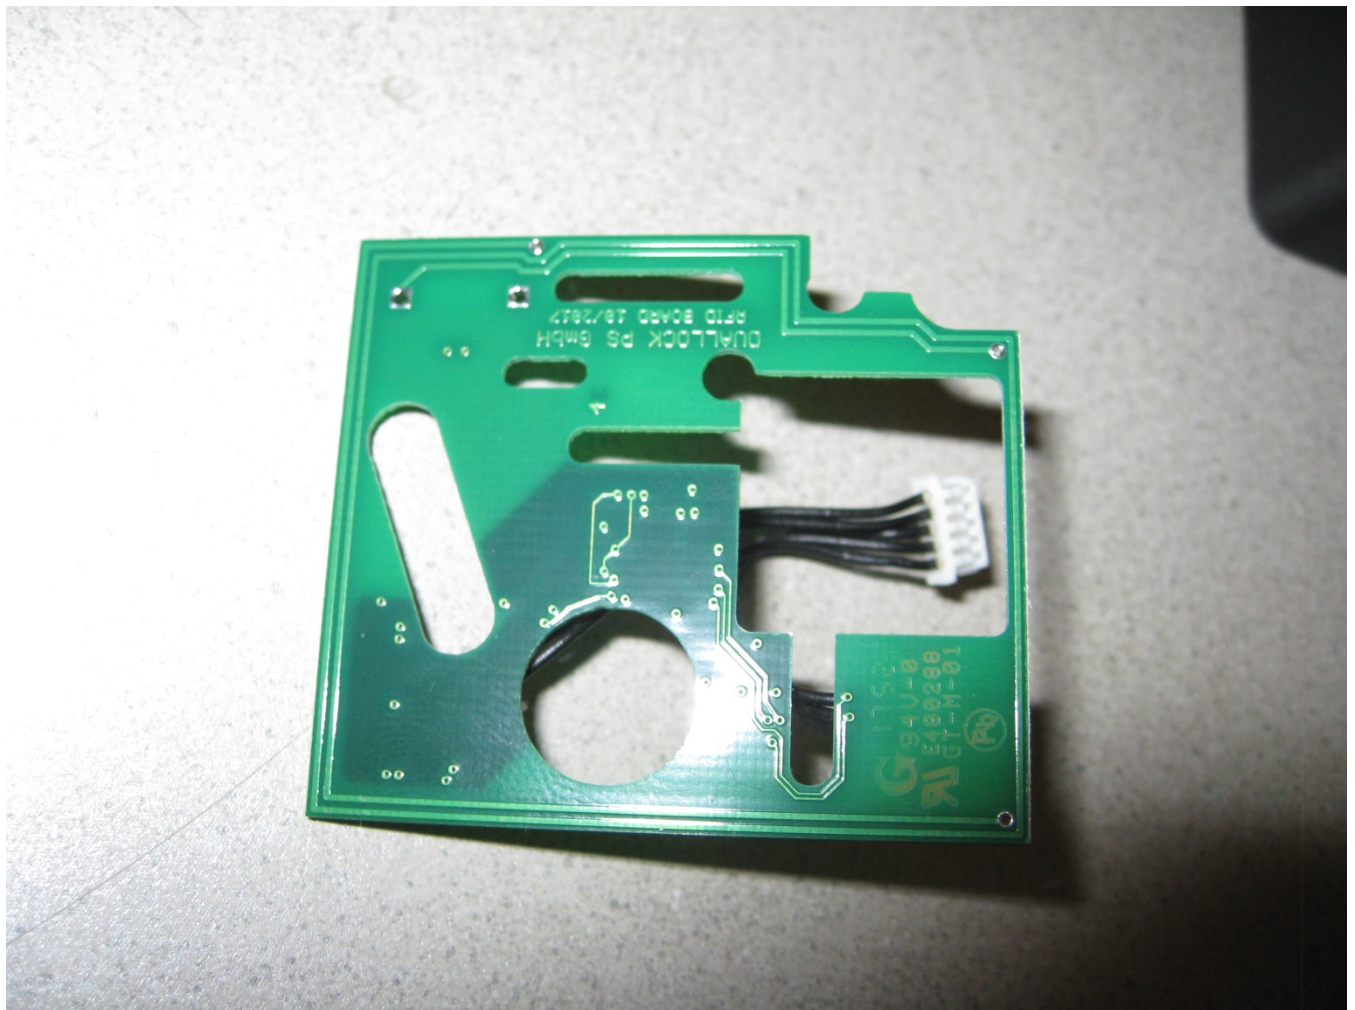

## Appendix 2 Photodocumentation

Description: Motherboard view #1

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 7 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

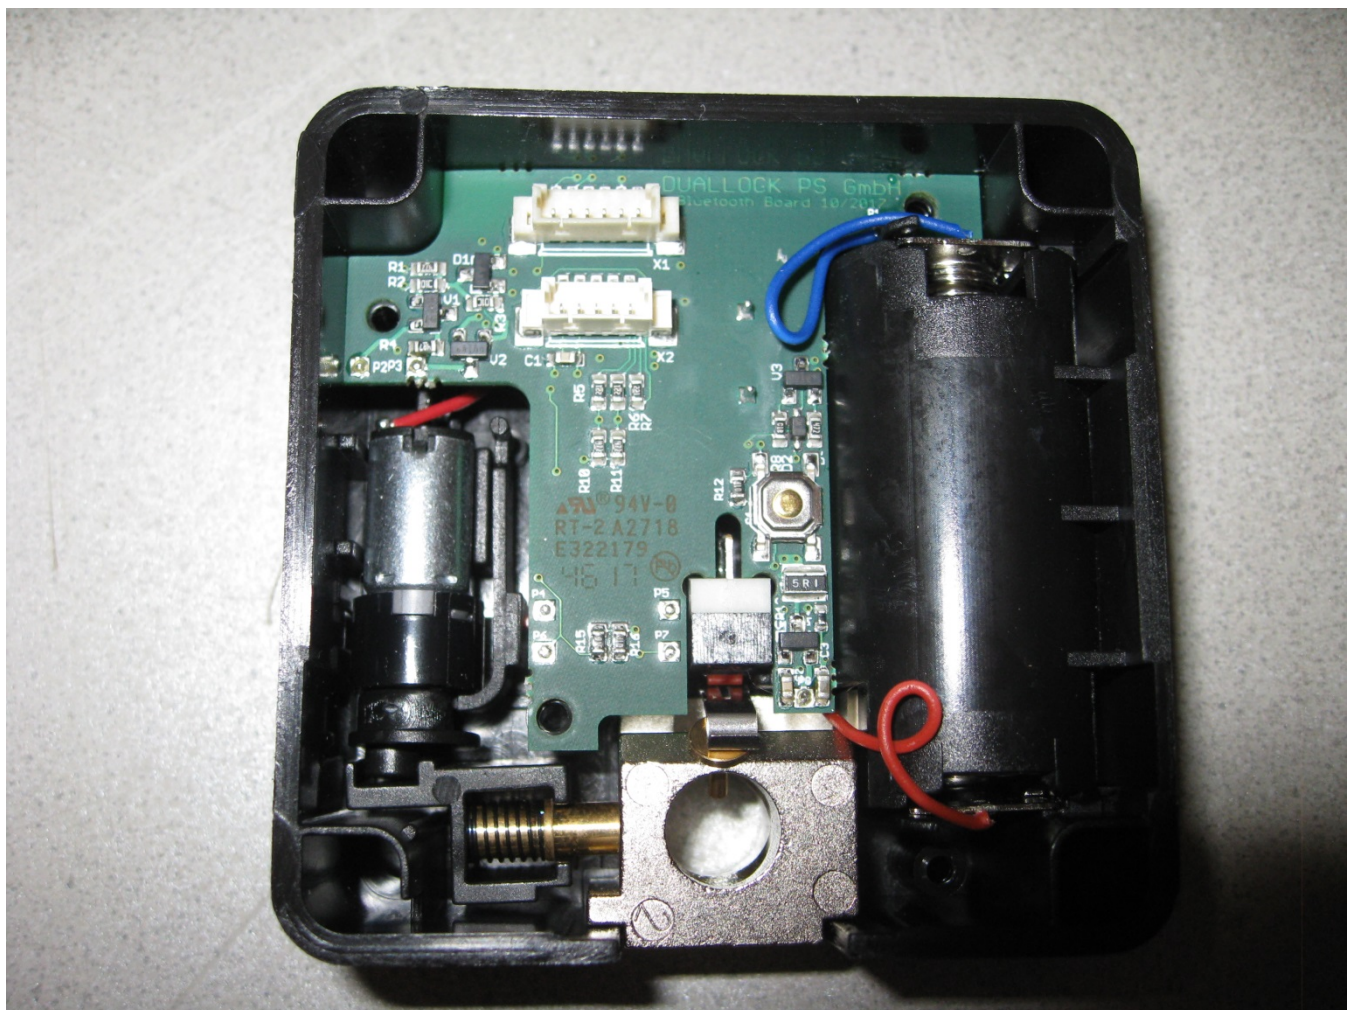

## Appendix 2 Photodocumentation

Description: Motherboard view #2 incl. BLE module

**Division:**  
Industry & Energy


Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 8 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

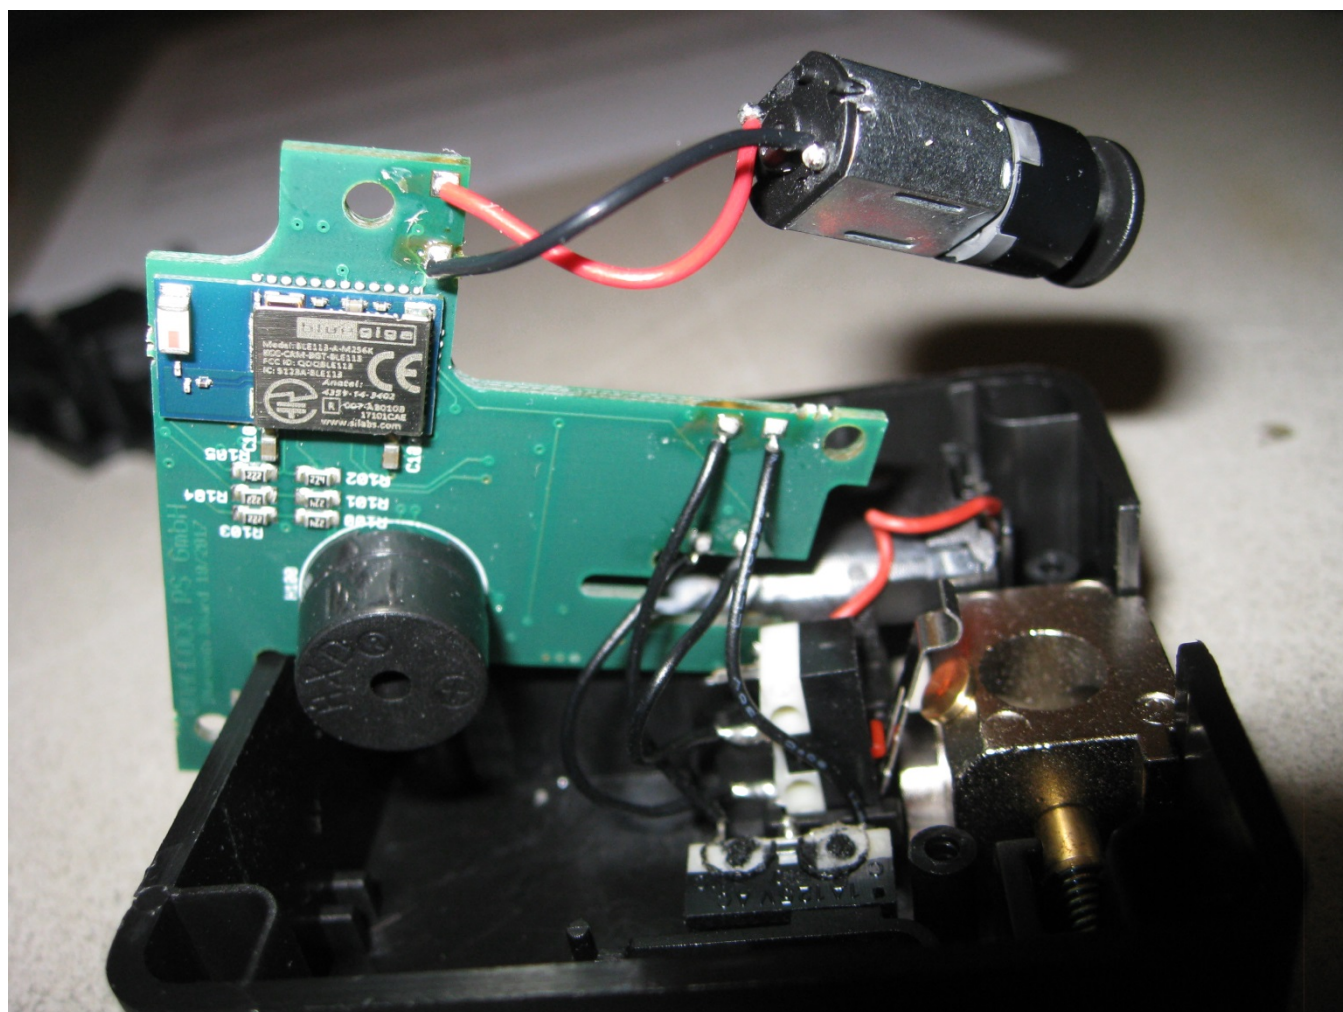

## Appendix 2 Photodocumentation

Description: Test setup below 30 MHz

**Division:**  
Industry & Energy

Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 9 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_



## Appendix 2 Photodocumentation

Description: Test setup above 30 MHz

**Division:**  
Industry & Energy

Department: FG

Test report reference:  
INE-AT/FG-18/164

Page: 10 of 10

Date: 19.11.2018

checked by: \_\_\_\_\_

