

TEST REPORT

Report No.:	BCTC2302772830E
Applicant:	TRANSTYLE TECHNOLOGY CO., LIMITED
Product Name:	Truly Wireless Earphones
Model/Type reference:	TW91AL5
Tested Date:	2023-02-21 to 2023-02-27
Issued Date:	2023-02-27
She	enzhen Bergeresting Co., Ltd. Approved Bage: 1 of 80 Edition: A,5



FCC ID:2ALN9-TW91AL5

Product Name:	Truly Wireless Earphones
Trademark:	N/A
Model/Type Reference:	TW91AL5 MZX5001,MZX5001-BLK, MZX5001-CGRY, MZX5001-ICY, MZX5001-PP, MZX5001-MT, MZX5001-RYB, MZX5001-EPNK, MZX5001-FGRN, MZX5001-BLK-STK-6, MZX5001-CGRY-STK-6, MZX5001-ICY-STK-6, MZX5001-PP-STK-6, MZX5001-MT-STK-6, MZX5001-RYB-STK-6, MZX5001-EPNK-STK-6, MZX5001-FGRN-STK-6
Prepared For:	TRANSTYLE TECHNOLOGY CO., LIMITED
Address:	Room 404, Gainian Kongjian Factory, Building B, No.32 Huimin 1st Road, Guihua community,Guanlan Street, Longhua District, Shenzhen, China
Manufacturer:	TRANSTYLE TECHNOLOGY CO., LIMITED
Address:	Room 404, Gainian Kongjian Factory, Building B, No.32 Huimin 1st Road, Guihua community,Guanlan Street, Longhua District, Shenzhen, China
Prepared By:	Shenzhen BCTC Testing Co., Ltd.
Address:	1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date:	2023-02-21
Sample tested Date:	2023-02-21 to 2023-02-27
Issue Date:	2023-02-27
Report No.:	BCTC2302772830E
Test Standards:	FCC Part15.247 ANSI C63.10-2013
Test Results:	PASS
Remark:	This is Bluetooth Classic radio test report.

Tested by:

kelsey Ton

Kelsey Tan/ Project Handler

Approved by:

Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Page: 2 of 80



Table Of Content

Test	Report Declaration Pa	age
1.	Version	5
2.	Test Summary	6
3.	Measurement Uncertainty	7
4.	Product Information And Test Setup	
4.1	Product Information	8
4.2	Test Setup Configuration	
4.3	Support Equipment	
4.4	Channel List	
4.5	Test Mode	
4.6	Table Of Parameters Of Text Software Setting	
5.	Test Facility And Test Instrument Used	
5.1	Test Facility	
5.2	Test Instrument Used	
6.	Conducted Emissions	
6.1	Block Diagram Of Test Setup	
6.2	Limit	
6.3	Test procedure	
6.4	EUT operating Conditions	
6.5	Test Result	
7.	Radiated emissions	
7.1	Block Diagram Of Test Setup	
7.2	Limit	
7.3	Test procedure	
7.4	EUT operating Conditions	
7.5	Test Result	20
8.	Radiated Band Emission Measurement And Restricted Bands Of Operation	
8.1	Block Diagram Of Test Setup	
8.2	Limit	2 . 21
8.3	Test procedure	24 25
8.4	EUT operating Conditions	
8.5	Test Result	20
9.	Spurious RF Conducted Emissions	
9.1	Block Diagram Of Test Setup	
9.2	Limit	27 27
9.3		21 27
9.3 9.4	Test Procedure	21 28
9. 4 10.	20 dB Bandwidth	20 /0
10.1	Test procedure Test Result 20 dB Bandwidth Block Diagram Of Test Setup	
10.1	Limit	
10.2	Test procedure	
10.3		
10.4	Maximum Peak Output Power	49 55
	Plack Diagram Of Tast Satur	
11.1	Block Diagram Of Test Setup Limit	
11.2		
11.3		
11.4	Test Result	



Page: 3 of 80

Edition: A,5

,TC 3C

PR

》测



61
61
61
61
61
67
67
67
67
67
70
70
70
70
70
76
76
76
77
78

(Note: N/A Means Not Applicable)

No.: BCTC/RF-EMC-007

Page: 4 of 80

Edition: A,5

检



1. Version

Report No.	Issue Date	Description	Approved
BCTC2302772830E	2023-02-27	Original	Valid



Page: 5 of 80



2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted emission AC power port	§15.207	PASS
2	Conducted peak output power for FHSS	§15.247(b)(1)	PASS
3	20dB Occupied bandwidth	§15.247(a)(1)	PASS
4	Hopping channel separation	§15.247(a)(1)	PASS
5	Number of hopping frequencies	§15.247(a)(1)(iii)	PASS
6	Dwell Time	§15.247(a)(1)(iii)	PASS
7	Spurious RF conducted emissions	§15.247(d)	PASS
8	Band edge	§15.247(d)	PASS
9	Spurious radiated emissions for transmitter	§15.247(d) & §15.209 & §15.205	PASS
10	Antenna Requirement	15.203	PASS



3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59° C





4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	TW91AL5 MZX5001,MZX5001-BLK, MZX5001-CGRY, MZX5001-ICY, MZX5001-PP, MZX5001-MT, MZX5001-RYB, MZX5001-EPNK, MZX5001-FGRN, MZX5001-BLK-STK-6, MZX5001-CGRY-STK-6, MZX5001-ICY-STK-6, MZX5001-PP-STK-6, MZX5001-MT-STK-6, MZX5001-RYB-STK-6, MZX5001-EPNK-STK-6, MZX5001-FGRN-STK-6
Model differences:	All the model are the same circuit and RF module, except model names.
Bluetooth version:	5.3
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	Bluetooth: 2402-2480MHz
Type of Modulation:	Bluetooth: GFSK, π/ 4 DQPSK, 8DPSK
Number Of Channel	79CH
Antenna installation:	FPC antenna
Antenna Gain:	1.2 dBi
Ratings:	USB:DC 5V Battery:DC 3.7V
Remark:	The antenna gain of the product is provided by the customer, and the test data is affected by the customer information

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:

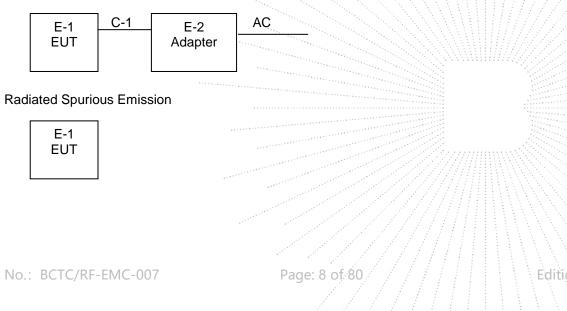



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Truly Wireless Earphones	N/A	TW91AL5	Ref. the Section 4.1	EUT
E-2	ADAPTER	UGREEN	CD122	N/A	Auxiliary

ltem	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.3M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

СН	Frequency (MHz)	СН	Frequency (MHz)	СН	Frequency (MHz)	СН	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	. 26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	1



PR



4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Test mode	Low channel	Middle channel	High channel		
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz		
2	Transmitting(π/ 4 DQPSK)	2402MHz	2441MHz	2480MHz		
3	Transmitting(8DPSK)	2402MHz	2441MHz	2480MHz		
4	Charging(Conducted emission)					
5	Trans	smitting (Radiate	d emission)			

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) Fully-charged battery is used during the test

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	SecureCRT			
Frequency	2402 MHz	2441 MHz	2480 MHz	
Parameters	DEF the	DEF	DEF	

TE,



5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards. FCC Test Firm Registration Number: 712850 IC Registered No.: 23583

5.2 Test Instrument Used

Conducted Emissions Test								
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.			
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023			
LISN	R&S	ENV216	101375	May 24, 2022	May 23, 2023			
Software	Frad	EZ-EMC	EMC-CON 3A1	/	/			
Attenuator	/	10dB DC-6GHz	1650	May 24, 2022	May 23, 2023			

RF Conducted Test								
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.			
Power Metter	Keysight	E4419		May 24, 2022	May 23, 2023			
Power Sensor (AV)	Keysight	E9300A		May 24, 2022	May 23, 2023			
Signal Analyzer20kH z-26.5GHz	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023			
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023			
Radio frequency control box	MAIWEI	MW100-RFC B						
Software	MAIWEI	MTS 8310	······································					




Radiated Emissions Test (966 Chamber01)						
Equipment	Equipment Manufacturer		Serial#	Last Cal.	Next Cal.	
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023	
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023	
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023	
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023	
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023	
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 26, 2022	May 25, 2023	
Amplifier	SKET	LAPA_01G18 G-45dB	١	May 24, 2022	May 23, 2023	
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 06, 2022	Jun. 05, 2023	
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 26, 2022	May 25, 2023	
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 06, 2022	Jun. 05, 2023	
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023	
Software	Frad	EZ-EMC	FA-03A2 RE	\	Λ_{j}	

2 CO.,LTA



6. Conducted Emissions

6.1 Block Diagram Of Test Setup

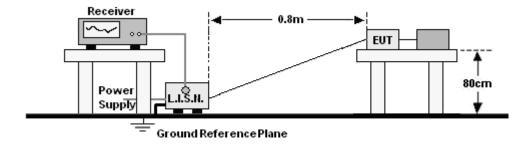

6.2 Limit

	Limit (dBuV)		
Frequency (MHz)	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	
0.50 -5.0	56.00	46.00	
5.0 -30.0	60.00	50.00	

Notes:

1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters		Setting	
Attenuation		10 dB	
Start Frequency		0.15 MHz	
Stop Frequency		30 MHz	
IF Bandwidth		9 kHz	

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).

b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.

c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



6.5 Test Result

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

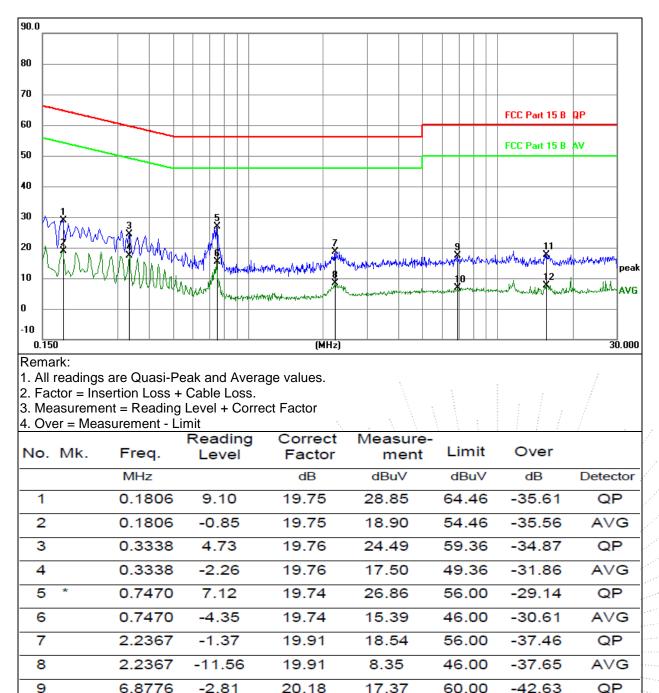

No.: BCTC/RF-EMC-007

6.8776

15.6349

15.6349

-13.40

-2.56

-12.68

10

11

12

Page: 14 of 80

6.78

17.75

7.63

50.00

60.00

50.00

-43.22

-42.25

-42.37

20.18

20.31

20.31

Edition: A.5

AVG


QP

AVG

E Al



Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Ν
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

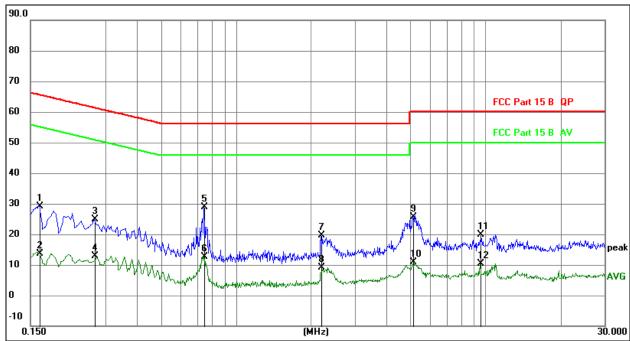

Remark:

All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.
 Measurement = Reading Level + Correct Factor

						1 I I I I I I I I I I I I I I I I I I I	1
Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz		dB	dBuV	dBuV	dB	Detector
	0.1635	9.52	19.71	29.23	65.28	-36.05	QP
	0.1635	-6.14	19.71	13.57	55.28	-41.71	AVG
	0.2714	5.05	19.78	24.83	61.07	-36.24	QP
	0.2714	-6.90	19.78	12.88	51.07	-38.19	AVG
*	0.7440	9.06	19.74	28.80	56.00	-27.20	QP
	0.7440	-7.04	19.74	12.70	46.00	-33.30	AVG
	2.1975	-0.35	19.90	19.55	56.00	-36.45	QP
	2.1975	-10.89	19.90	9.01	46.00	-36.99	AVG
	5.1180	5.44	20.13	25.57	60.00	-34.43	QP
	5.1180	-9.17	20.13	10.96	50.00	-39.04	AVG
	9.5505	-0.45	20.27	19.82	60.00	-40.18	QP
	9.5505	-9.94	20.27	10.33	50.00	-39.67	AVG
	Mk.	Mk. Freq. MHz 0.1635 0.1635 0.2714 * 0.7440 2.1975 2.1975 5.1180 5.1180 9.5505	Mk. Freq. Level MHz 0.1635 9.52 0.1635 -6.14 0.2714 5.05 0.2714 5.05 0.2714 -6.90 * 0.7440 9.06 0.7440 -7.04 2.1975 -0.35 2.1975 -0.35 5.1180 5.44 5.1180 -9.17 9.5505 -0.45 -0.45 -0.45	Mk.Freq.Reading LevelCorrect FactorMHzdB0.16359.5219.710.1635-6.1419.710.27145.0519.780.2714-6.9019.78*0.74409.0619.740.7440-7.0419.742.1975-0.3519.902.1975-10.8919.905.11805.4420.139.5505-0.4520.27	Mk.Freq.Reading LevelCorrect FactorMeasure- mentMHzdBdBuV0.16359.5219.7129.230.1635-6.1419.7113.570.27145.0519.7824.830.2714-6.9019.7812.88*0.74409.0619.7428.800.7440-7.0419.7412.702.1975-0.3519.9019.552.1975-10.8919.909.015.11805.4420.1325.575.1180-9.1720.1310.969.5505-0.4520.2719.82	Mk.Freq.Reading LevelCorrect FactorMeasure- mentLimitMHzdBdBuVdBuV0.16359.5219.7129.2365.280.1635-6.1419.7113.5755.280.27145.0519.7824.8361.070.2714-6.9019.7812.8851.07*0.74409.0619.7428.8056.000.7440-7.0419.7412.7046.002.1975-0.3519.9019.5556.002.1975-10.8919.909.0146.005.11805.4420.1325.5760.005.1180-9.1720.1310.9650.009.5505-0.4520.2719.8260.00	Mk.Freq.Reading LevelCorrect FactorMeasure- mentLimitOverMHzdBdBuVdBuVdB0.16359.5219.7129.2365.28-36.050.1635-6.1419.7113.5755.28-41.710.27145.0519.7824.8361.07-36.240.2714-6.9019.7812.8851.07-38.19*0.74409.0619.7428.8056.00-27.200.7440-7.0419.7412.7046.00-33.302.1975-0.3519.9019.5556.00-36.452.1975-10.8919.909.0146.00-36.995.11805.4420.1325.5760.00-34.435.1180-9.1720.1310.9650.00-39.049.5505-0.4520.2719.8260.00-40.18

Page: 15 of 80

Edition:

JC 3C


PR




7. Radiated emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

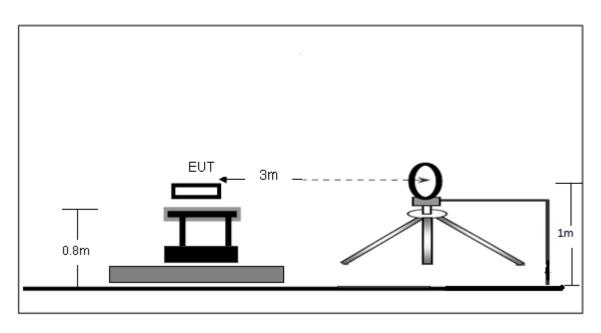

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

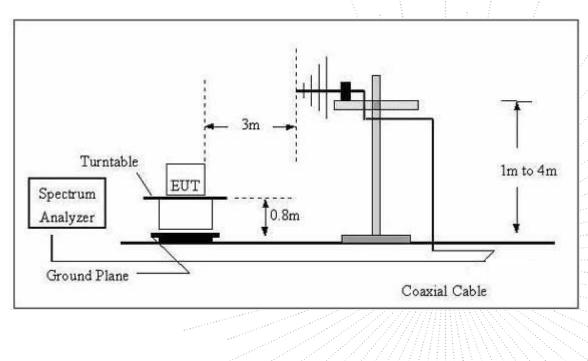


TE. TC OVE





(C) Radiated Emission Test-Up Frequency Above 1GHz

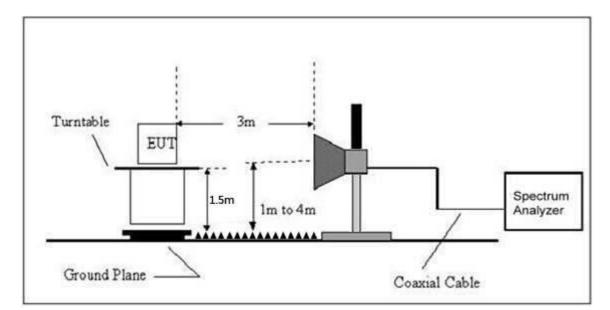

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Field Strength	Distance	Field Strength Limit at 3m Distance		
uV/m	(m) uV/m		dBuV/m	
2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80	
24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40	
30	30	100 * 30	20log ⁽³⁰⁾ + 40	
100	3	100	20log ⁽¹⁰⁰⁾	
150	3	150	20log ⁽¹⁵⁰⁾	
200	3	200	20log ⁽²⁰⁰⁾	
500	3	500	20log ⁽⁵⁰⁰⁾	
	uV/m 2400/F(kHz) 24000/F(kHz) 30 100 150 200	uV/m (m) 2400/F(kHz) 300 24000/F(kHz) 30 30 30 100 3 150 3 200 3	uV/m(m)uV/m2400/F(kHz)30010000 * 2400/F(kHz)24000/F(kHz)30100 * 24000/F(kHz)3030100 * 30100310015031502003200	

Limits Of Radiated Emission Measurement (Above 1000MHz)

	Limit (dBuV/m) (at 3M)
Frequency (MHz)	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

FD



Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

No.: BCTC/RF-EMC-007

Page: 19 of 80



7.5 Test Result

Below 30MHz

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.7V
Test Mode:	Mode 5	Test vollage.	DC 3.7 V

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the

permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


No.: BCTC/RF-EMC-007

Page: 20 of 80



Between 30MHz - 1GHz

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 5	Test Voltage :	DC 3.7V

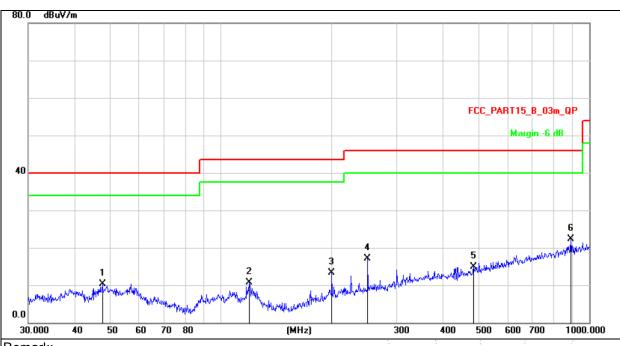

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement = Reading Level + Correct Factor


3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dB/m	dB	Detector
1		47.6586	26.18	-15.85	10.33	40.00	-29.67	QP
2		119.4361	29.77	-19.04	10.73	43.50	-32.77	QP
3		199.9856	30.69	-17.37	13.32	43.50	-30.18	QP
4		250.3012	32.96	-15.82	17.14	46.00	-28.86	QP
5		485.6093	25.61	-10.61	15.00	46.00	-31.00	QP
6	*	890.7278	26.95	-4.69	22.26	46.00	-23.74	QP

Page: 21 of 80



Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 5	Test Voltage :	DC 3.7V

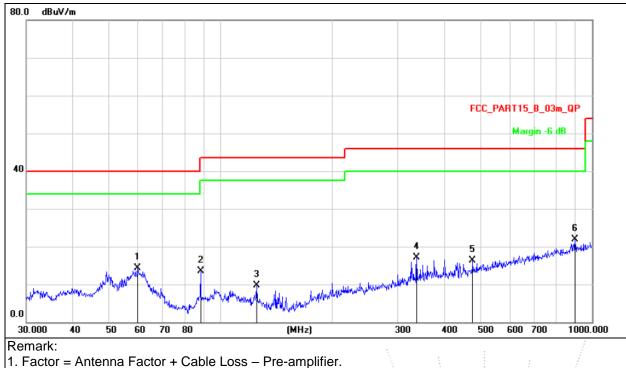

Measurement = Reading Level + Correct Factor
 Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		59.8588	31.36	-17.07	14.29	40.00	-25.71	QP
2		88.3421	33.09	-19.62	13.47	43.50	-30.03	QP
3	1	25.0066	29.11	-19.41	9.70	43.50	-33.80	QP
4	3	37.2155	30.34	-13.25	17.09	46.00	-28.91	QP
5	4	77.1694	27.10	-10.82	16.28	46.00	-29.72	QP
6	* 9	00.1474	26.56	-4.59	21.97	46.00	-24.03	QP

检



Between 1GHz – 25GHz

Polar	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	Туре
			GFSK Low ch	annel			
V	4804.00	53.54	-0.43	53.11	74.00	-20.89	PK
V	4804.00	44.49	-0.43	44.06	54.00	-9.94	AV
V	7206.00	46.32	8.31	54.63	74.00	-19.37	PK
V	7206.00	36.58	8.31	44.89	54.00	-9.11	AV
Н	4804.00	51.31	-0.43	50.88	74.00	-23.12	PK
Н	4804.00	41.31	-0.43	40.88	54.00	-13.12	AV
Н	7206.00	43.39	8.31	51.70	74.00	-22.30	PK
Н	7206.00	35.29	8.31	43.60	54.00	-10.40	AV
		G	FSK Middle c	hannel			
V	4882.00	50.40	-0.38	50.02	74.00	-23.98	PK
V	4882.00	41.60	-0.38	41.22	54.00	-12.78	AV
V	7323.00	42.56	8.83	51.39	74.00	-22.61	PK
V	7323.00	33.92	8.83	42.75	54.00	-11.25	AV
Н	4882.00	48.49	-0.38	48.11	74.00	-25.89	PK
Н	4882.00	37.61	-0.38	37.23	54.00	-16.77	AV
Н	7323.00	40.32	8.83	49.15	74.00	-24.85	PK
Н	7323.00	33.23	8.83	42.06	54.00	-11.94	AV
			GFSK High ch	annel			
V	4960.00	52.73	-0.32	52.41	74.00	-21.59	PK
V	4960.00	42.41	-0.32	42.09	54.00	-11.91	AV
V	7440.00	44.36	9.35	53.71	74.00	-20.29	PK
V	7440.00	34.62	9.35	43.97	54.00	-10.03	AV
Н	4960.00	50.44	-0.32	50.12	74.00	-23.88	PK
Н	4960.00	40.51	-0.32	40.19	54.00	-13.81	AV
Н	7440.00	41.83	9.35	51.18	74.00	-22.82	PK
Н	7440.00	33.17	9.35	42.52	54.00	-11.48	AV

Remark:

1.Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


5.All the Modulation are test, the worst mode is GFSK, the data recording in the report.



8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

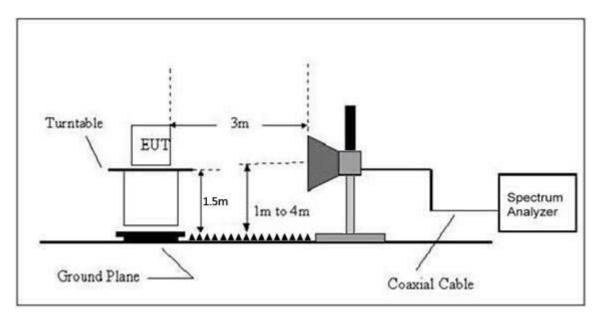

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			



Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (d	BuV/m) (at 3M)
Frequency (MIRZ)	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (Emission In Restricted Band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level	Correct Factor	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
	(1	()	(dBuV/m)	(dB)	РК	РК	AV	
			Low	Channel 2	402MHz			
	Н	2390.00	53.97	-6.70	47.27	74.00	54.00	PASS
	Н	2400.00	58.33	-6.71	51.62	74.00	54.00	PASS
	V	2390.00	54.67	-6.70	47.97	74.00	54.00	PASS
GFSK	V	2400.00	55.31	-6.71	48.60	74.00	54.00	PASS
Gran			High	n Channel 2	480MHz			
	Н	2483.50	52.05	-6.79	45.26	74.00	54.00	PASS
	Н	2500.00	50.17	-6.81	43.36	74.00	54.00	PASS
	V	2483.50	54.79	-6.79	48.00	74.00	54.00	PASS
	V	2500.00	50.99	-6.81	44.18	74.00	54.00	PASS
			Low	Channel 2	402MHz			
	Н	2390.00	53.25	-6.70	46.55	74.00	54.00	PASS
	Н	2400.00	56.92	-6.71	50.21	74.00	54.00	PASS
	V	2390.00	53.58	-6.70	46.88	74.00	54.00	PASS
π/4DQPSK	V	2400.00	55.10	-6.71	48.39	74.00	54.00	PASS
II/4DQP3K			High	h Channel 2	480MHz			
	Н	2483.50	51.78	-6.79	44.99	74.00	54.00	PASS
	Н	2500.00	49.61	-6.81	42.80	74.00	54.00	PASS
	V	2483.50	52.20	-6.79	45.41	74.00	54.00	PASS
	V	2500.00	48.50	-6.81	41.69	74.00	54.00	PASS
			Low	Channel 2	402MHz			
	Н	2390.00	52.76	-6.70	46.06	:74.00	54.00	PASS
	Н	2400.00	57.00	-6.71	50.29	74.00	54.00	PASS
	V	2390.00	52.79	-6.70	46.09	74.00	54.00	PASS
	V	2400.00	54.31	-6.71	47.60	74.00	54.00	PASS
8DPSK			High	Channel 2				
	Н	2483.50	52.99	-6.79	46.20	74.00	54.00	PASS
	Н	2500.00	48.15	-6.81	41.34	74.00	54.00	PASS
	V	2483.50	51.07	-6.79	44.28	74.00	54.00	PASS
	V	2500.00	46.51	-6.81	39.70	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss - Pre-amplifier. Over= Emission Level - Limit

2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

E



9. Spurious RF Conducted Emissions

9.1 Block Diagram Of Test Setup



9.2 Limit

Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.205(c))

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:


RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Page: 27 of 8




9.4 Test Result

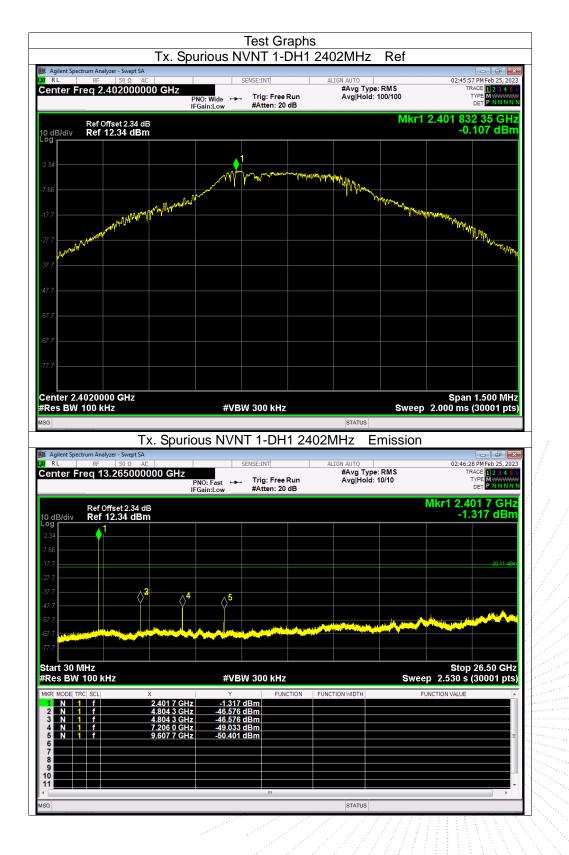





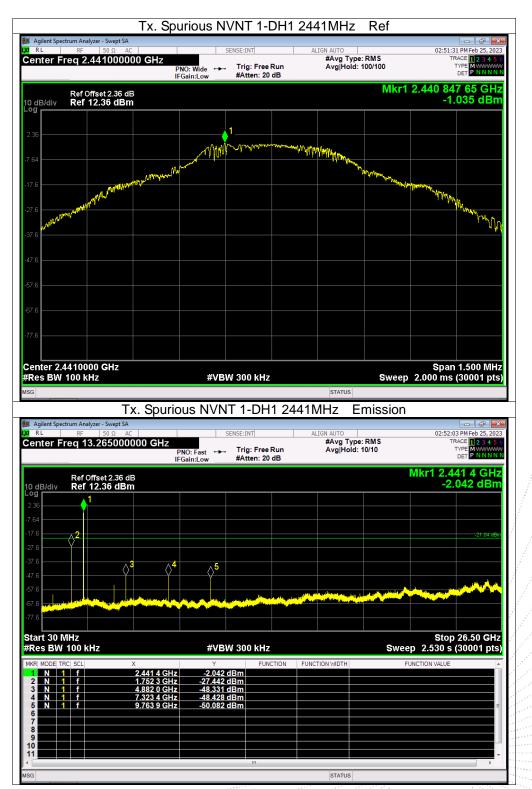

Edition: A.5

No.: BCTC/RF-EMC-007



Agilent Spectrum Analyzer - Swept SA	Tx. Spi	urious N\	/NT 1-DH	1 2480MH	z Ref		
Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AC enter Freq 2.48000000	00 GHz	NO: Wide ↔	Trig: Free Run #Atten: 20 dB	ALIGN AUTO #Avg T Avg Ho	ype: RMS Id: 100/100	02:53:4 TI	5 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M
Ref Offset 2.4 dB					Mkr	1 2.479 83 0.	3 55 GH 360 dBm
.40			Maria Maria	Valles .			
60	<u> </u>	harden	1	and the second second second second	Municipal and		
7.6	and and and a second of the second				A Contraction of the Association	Marth Marthan	
7.6							My www.
7.6							· V
7.6							
7.6							
7.6							
7.6							
enter 2.4800000 GHz						Span	1.500 MH;
G	x. Spuric		/ 300 kHz T 1-DH1 2	status 2480MHz		p 2.000 ms	(30001 pts
Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AC	000 GHz		T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54:1	7 PM Feb 25, 202
a Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AC enter Freq 13.2650000	000 GHz	ous NVN ⁻	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWWWW DET P N N N N 80 2 GHz
a Agilent Spectrum Analyzer - Swept SA RL RF 50Ω AC enter Freq 13.2650000 Ref Offset 2.4 dB dB/div Ref 12.40 dBn 09 1	000 GHz	DUS NVN	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PM Feb 25, 202 AACE 1 2 3 4 5 TYPE M WWWW DET P NNNN
Agilent Spectrum Analyzer - Swept SA RL RF 500 AC enter Freq 13.2650000 Ref Offset 2.4 dB Ref Offset 2.4 dB Ref 12.40 dBn	000 GHz	DUS NVN	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWWWW DET P N N N N 80 2 GHz
G Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AC enter Freq 13.2650000 Ref Offset 2.4 dB 0 dB/div Ref 12.40 dBn 9 1	000 GHz	DUS NVN	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWWWW DET P N N N N 80 2 GHz
S Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AC enter Freq 13.2650000 Ref Offset 2.4 dB P dB/div Ref 12.40 dBn 9 0 dB/div 1 7.6 7.6 2 7.6 2	000 GHz	PNO: Fast	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PMFeb 25, 202 AGE 1 2 3 4 5 TYPE WWWWW BO 2 GH2 097 dBm
G Agilent Spectrum Analyzer - Swept SA RL RF 50 Q AC enter Freq 13.2650000 Ref Offset 2.4 dB 0 dB/div Ref 12.40 dBn 9 1 1 60 7.6 7.6 7.6 7.6 7.6 7.6	000 GHz	DUS NVN	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PMFeb 25, 202 AGE 1 2 3 4 5 TYPE WWWWW BO 2 GH2 097 dBm
Agilent Spectrum Analyzer - Swept SA RL RF SO QA enter Freq 13.2650000 Ref Offset 2.4 dB D dB/div Ref 12.40 dBn 7 1 60 2 7 2 7 2 7 2 7 2 7 2 7 2	000 GHz	PNO: Fast	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54: TI Mkr1 2.4	7 PMFeb 25, 202 AGE 1 2 3 4 5 TYPE WWWWW BO 2 GH2 097 dBm
Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω Accenter Freq 13.2650000 0 Benter Freq 13.2650000 Ref Offset 2.4 dB Ref 0.0000 Ref 0.00000 Ref 0.0000 Ref	000 GHz	PNO: Fast	T 1-DH1 2	2480MHz Align auto #Avg t	Emission	02:54:1 TI Mkr1 2.4 0	2 C C C C C C C C C C C C C C C C C C C
3 T: Agilent Spectrum Analyzer - Swept SA Rt RL<	000 GHz	PNO: Fast	T 1-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	2480MHz	Emission ype: RMS idd: 10/10	02:54:1 TI Mkr1 2.4 0. Stop ep 2.530 s	26.50 GHz
3 T: Agilent Spectrum Analyzer - Swept SA RL RF S0 Q. AC enter Freq 13.2650000 Ref Offset 2.4 dB D 0 dB/div Ref 12.40 dBn D 7.6 2 C 8 MODE TRC SCL C 2 1 1	000 GHz	PNO: Fast Gain:Low	T 1-DH1 2 Trig: Free Run #Atten: 20 dB	2480MHz	Emission ype: RMS idd: 10/10	02:54:1 TI Mkr1 2.4 0.	26.50 GHz
3 T: Agilent Spectrum Analyzer - Swept SA RL<	x	DUS NVN SI PNO: Fast → Gain:Low	T 1-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	2480MHz	Emission ype: RMS idd: 10/10	02:54:1 TI Mkr1 2.4 0. Stop ep 2.530 s	26.50 GHz
Agilent Spectrum Analyzer - Swept SA RL RF 50 Ω AG enter Freq 13.2650000 Ref Offset 2.4 dB P dB/div Ref 12.40 dBn 9 1 40 1 7.6 7 7.6 7 7.7 7 7.6 7 7.7 7 7.6 7 7.6 7 7.6 7 7.6 7 7.6 7 7.6 7 7.6 7 7.6 7 7.6 7 7.7 7 7.6 7 7.6 7 7.7 7 7.6 7 7.7 7 7.7 7 7.7 7 7.7 7 7.7 7 7.8 7 7.9 7 7.9 7 7.9 7 7.9 7 7.0 7	000 GHz	DUS NVN SI PNO: Fast → Gain:Low	T 1-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	2480MHz	Emission ype: RMS idd: 10/10	02:54:1 TI Mkr1 2.4 0. Stop ep 2.530 s	26.50 GHz
agiient Spectrum Analyzer - Swept SA RL RF SO QAC enter Freq 13.2650000 dB/div Ref Offset 2.4 dB rdB/div Ref 12.40 dBn 29 1 76 2 76 3 76 4 76 4 8 MODE HZ 8 MODE HZ 8 MODE HZ 9 1 1 1 4 1	000 GHz	DUS NVN SI PNO: Fast → Gain:Low	T 1-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	2480MHz	Emission ype: RMS idd: 10/10	02:54:1 TI Mkr1 2.4 0. Stop ep 2.530 s	26.50 GHz



enter Freq 2.40200	Р	NO: Wide ↔ Gain:Low	Trig: Free Run #Atten: 20 dB	#Avg Ty Avg Hole	d: 100/100	TRACE 1 2 3 TYPE MWW DET P N N	_
Ref Offset 2.3 dB/div Ref 12.34 d					Mkr1	2.401 832 40 G 0.087 d	
.34		1					
		mm	wy www.ww	mmman hannow			
66 MANNA	VITUMW ^{anan} W ^{WAMANA} U	Mar .			V WWWWWWWWWWWWW	MAN Walk	
						MANN NOW YOU	
7.7						V	۲ħ
7.7							
7.7							
7.7							
7.7							
7.7							
enter 2.4020000 GHz						Span 1.500 I	ИH
Res BW 100 kHz		#VBW	300 kHz	STATUS	Sweep	2.000 ms (30001	pt
	Tx. Spurio	us NVNT	2-DH1 2		Emission		
Agilent Spectrum Analyzer - Swep RL RF 50 Ω	t SA AC		NSE:INT	ALIGN AUTO		02:56:41 PM Feb 25	, 202
enter Freq 13.2650	P	PNO: Fast ↔→ Gain:Low	Trig: Free Run #Atten: 20 dB	#Avg Ty Avg Hol		TRACE 1 2 3 TYPE MWM DET PNN	4 5 NWW
							1-1
Ref Offset 2.3	4 dB					Mkr1 2.401 7 G -5.695 d	B'n
dB/div Ref 12.34 c	4 dB IBm					Mkr1 2.401 7 G -5.695 d	Bn
0 dB/div Ref 12.34 c Pg .34 1 .66	i4 dB IBm					-5.695 d	Bn
0 dB/div Ref 12.34 c 29 .34 .66 7.7	IBm					Mkr1 2.401 7 G -5.695 dl	Bn
Ref Offset 2.3 0 dB/div 234 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	⁴ dB Bm 2 √ ⁸ 2 √ ⁴					-5.695 d	Bn
0 dB/div Ref 12.34 c Pg 34 66 7.7 7.7 7.7 7.7 7.7 7.7	IBm	\$ \$				-5.695 d	Bn
0 dB/div Ref 12.34 c 9 dB/div Ref 12.34 c	IBm	 ↓ 5 ↓ 1 ↓ 1 ↓ 1 ↓ 1 ↓ 1 ↓ 1 ↓ 1 ↓ 1				-5.695 d	Bn
0 dB/div Ref 12.34 c 9 dB/div Ref 12.34 c	IBm					-5.695 d	Bn Hall
0 dB/div Ref 12.34 c 9 dB/div Ref 12.34 c	Bm 2 √ 4 × 5 5 ×	#VBW	/ 300 kHz	FUNCTION WIDTH	Swee	-5.695 dl	Bn Hall
o dB/div Ref 12.34 c 99 1 66 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 7.7 1 8.8 100 kHz Res BW 100 kHz 1 1 2 1 3 1	Bm 2 2 ↓ 2 ↓ 4 2.401 7 GHz 5.196 1 GHz 4.803 4 GHz	#VBW -5.695 dl -44.133 dl -48.020 dl	FUNCTION Bm Bm Bm	FUNCTION WIDTH	Swee	-5.695 dl	Bn Hall
0 dB/div Ref 12.34 c 99 97 97 77 77 77 77 77 77 77	Bm 2 ↓ 2 ↓ 4 ↓ 4 ↓ 4 ↓ 4 ↓ 4 ↓ 4 ↓ 4 ↓ 4 ↓ 5.196 1 GHz	#VBW -5.695 dl	FUNCTION Bm Bm Bm Bm	FUNCTION WIDTH	Swee	-5.695 dl	Bn Hall



Page: 31 of 80 / /

No.: BCTC/RF-EMC-007




Agilent Spectrum Analyzer - Swept S RL RF 50 Ω			NSE:INT	ALIGN AUTO		02:57:	12 DM Cob 25, 200
enter Freq 2.441000	000 GHz		Trig: Free Run	#Avg Typ Avg Hold			43 PM Feb 25, 202 RACE 1 2 3 4 5
		PNO: Wide ↔↔ FGain:Low	#Atten: 20 dB	Arginola			
Ref Offset 2.36 dB/div Ref 12.36 dE	dB βm				Mkr1		31 35 GH .665 dBn
36		1 -					
64		- ANT MAN	While Marcor	MM LAW			
. withw	Why My All Warry A. Comment	W MALLY .		. Ma unh	Maran Markan	Van Willer	
36 64 7.6							hin land
.6							"I'm Mu
WWW .							111
.6 <mark></mark>							
·.6							
(.6							
.6							
.6							
enter 2.4410000 GHz						- Cnor	4 500 8411
		#\/D\//	200 64-		Curoon		
a			^{300 kHz} 2-DH1 2	status 441MHz E	Sweep Emission		1.500 MH (30001 pts
Agilent Spectrum Analyzer - Swept S R L RF 50 Ω	AC 0000 GHz		2-DH1 2		Emission e: RMS	2.000 ms	(30001 pts 14 PMFeb 25, 202 RACE 2 3 4 5
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36	A AC 00000 GHz F IF		2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	A AC 00000 GHz F IF		2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept 3 RL RF 50 2 enter Freq 13.26500 Ref Offset 2.36 dE dB/div Ref 12.36 dE	A AC 00000 GHz F IF		2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36	A AC 00000 GHz F IF		2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω Senter Freq 13.26500 Ref Offset 2.36 dE dB/div Ref 12.36 dE	AC OOUO GHZ	PNO: Fast	2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	
Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dE	A AC 00000 GHz F IF	PNO: Fast	2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dE	AC OOUO GHZ	PNO: Fast	2-DH1 2	441MHz E Align Auto #Avg Typ	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dE dB/div Ref 12.36 dE	AC OOUO GHZ	PNO: Fast	2-DH1 2	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
S Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 9 1 6 4 5 6 4 5 6 4 5 6 4 5 6 4 5 6 4 5 6 4 5 6 4 5 6 6 6 6 7 6 7 6 7 6 7 6 7 6 7 7 7 7 7 7 7 7 7 7 7 7 7	AC OOUO GHZ	PNO: Fast	2-DH1 2	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PMFeb 25,202 RACE 12 3 4 5 DET P NNNN 41 4 GH: 857 dBn -2007 40
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 GB/div Ref 12.36 dE	AC OOUO GHZ	PNO: Fast	Trig: Free Run #Atten: 20 dB	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 9 1 1 1 1 1 1 1 1 1 1 1 1 1	AC OOUO GHZ	PNO: Fast	2-DH1 2	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M DET P.N.N.N. 41 4 GH2
Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 9 9 1 1 1 1 1 1 1 1 1 1 1 1 1	AC 0000 GHz F F dB 3m 3m 2.441 4 GHz 4.882 0 GHz	PNO: Fast +	C2-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn
Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω Enter Freq 13.26500 Ref Offset 2.36 G dB/div Ref 12.36 dE G G g 1 1 6 1 c 2 1 6 2 1 c 2 1 6 2 1 6 c 3 0 1 7 1 <th1< th=""> <th1< th=""> <th1< th=""> <th1< td=""><td>AC 0000 GHz F GB 3m 4 AC 4</td><td>DUS NVNT SEP PNO: Fast CGain:Low 5 5 4 4 8 9 3 4 8 9 3 4 8 9 3 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 5 193 df 193 df 193</td><td>C2-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB</td><td>441MHz E</td><td>Emission e: RMS : 10/10</td><td>2.000 ms</td><td>(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn </td></th1<></th1<></th1<></th1<>	AC 0000 GHz F GB 3m 4 AC 4	DUS NVNT SEP PNO: Fast CGain:Low 5 5 4 4 8 9 3 4 8 9 3 4 8 9 3 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 5 193 df 193	C2-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn
Agilent Spectrum Analyzer - Swept 3 RL RF 50 0 enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 9 9 1 6 6 6 7 7 7 7 8 8 8 9 9 1 1 1 1 1 1 1 1 1 1 1 1 1	AC 0000 GHz F F B dB 3m 2 441 4 GHz 4.882 0 GHz	DUS NVNT SEP PNO: Fast CGain:Low ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	C2-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn
Agilent Spectrum Analyzer - Swept 3 RL RF 50 Ω enter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 9 9 1 1 6 6 6 6 6 6 7 7 7 8 1 1 1 1 1 1 1 1 1 1 1 1 1	AC 0000 GHz F GB 3m 4 AC 4	DUS NVNT SEP PNO: Fast CGain:Low 5 5 4 4 8 9 3 4 8 9 3 4 8 9 3 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 8 193 df 4 5 193 df 193	C2-DH1 2 NSE:INT Trig: Free Run #Atten: 20 dB	441MHz E	Emission e: RMS : 10/10	2.000 ms	(30001 pts 14 PM Feb 25,202 RACE 2 3 4 5 DET P NNNN 41 4 GH; 857 dBn



Page: 32 of 80



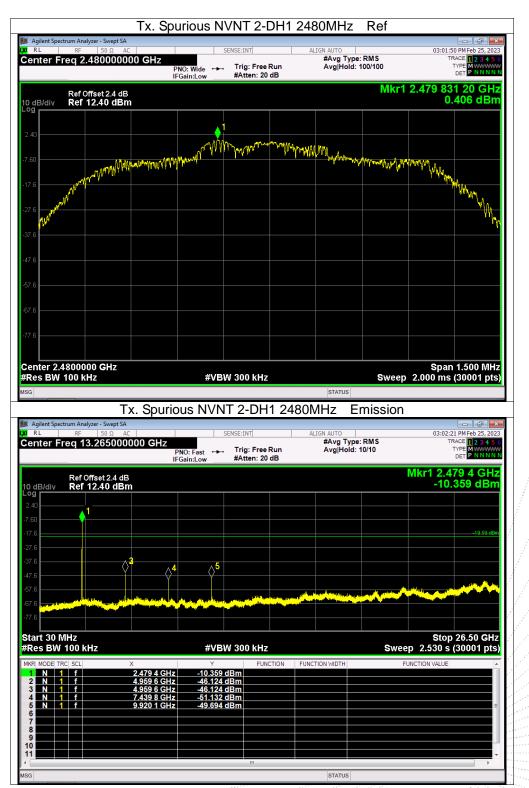















Agilent Spectrum Analyzer - Swept S				2441MHz			
	AC	SEN	ISE:INT	ALIGN AUTO #Avg Typ	e: PMS	03:15:43	ACE 1 2 3 4 5
nter Freq 2.441000	Р		Trig: Free Run #Atten: 20 dB	Avg Hold	1: 100/100	T	
		FGain:Low	#Atten: 20 dB		Mkr1	2.441 17	
Ref Offset 2.36 dB/div Ref 12.36 dB							701 dBr
dB/div Ref 12.36 dB							
6				1			
			month Will marter	m			
4	10 mm a	AM-AMAY IN THE	Marine and the second s	Myral V I Wrom	ver promition and particular	Million .	
martin	a.Manta Manak Ja	1.4.			. L An An-An-All-Marke	۲ Y Y Y Y Y	
	Winneryynwyth						man
6 WWW							"hy
N ^{MM}							. Ange
6							
6							
6							
6							
6							
nter 2.4410000 GHz		/0 (B14)	300 kHz				1.500 MH
es BW 100 kHz							
		# 4 D 4 4	500 KH2	CTATUS	Sweep	2.000 ms	(30001 pt
	T O i			STATUS	•	2.000 ms	(30001 pt
			3-DH1 24		Emission	2.000 1113	
Agilent Spectrum Analyzer - Swept S R L RF 50 Ω	AC	ous NVNT		ALIGN AUTO	Emission	03:16:1*	(30001 pt
Agilent Spectrum Analyzer - Swept S	AC 0000 GHz		3-DH1 24	141MHz I	Emission	03:16:1• TR	4 PM Feb 25, 20; ACE 123 4 5
Agilent Spectrum Analyzer - Swept S R L RF 50 Ω	AC 100000 GHz		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	03:16:14 TR T	4 PM Feb 25, 203 ACE 1 2 3 4 5 YPE M WWWW DET P N N N N
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20; ACE 1 2 3 4 5 YPE P NNNN DET P NNNN 40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20; ACE 1 2 3 4 5 YPE P NNNN DET P NNNN 40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20 ACE 1 2 3 4 5 YPE P NN NN DET P NN NN 40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20 ACE 12 3 4 PME P 25, 20 PME P 25, 20 PME P 25 PME
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC OOOOO GHz GB Sm	DUS NVNT SEN PNO: Fast FGain:Low	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC 0000 GHz F		3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 203 ACE 1 2 3 4 5 YPE M WWWW DET P N N N N
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC OOOOO GHz GB Sm	DUS NVNT SEN PNO: Fast FGain:Low	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20 ACE 12 3 4 PME P 25, 20 PME P 25, 20 PME P 25 PME
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC OOOOO GHz GB Sm	DUS NVNT SEN PNO: Fast FGain:Low	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	4 PM Feb 25, 20 ACE 12 3 4 PME P 25, 20 PME P 25, 20 PME P 25 PME
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE	AC OOOOO GHz GB Sm	DUS NVNT SEN PNO: Fast FGain:Low	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	<u>03:16:1</u> דת ז Mkr1 2.44	40 5 GH
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.265000	AC OOOOO GHz GB Sm	DUS NVNT SEN PNO: Fast FGain:Low	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS I: 10/10	03:16:1 TR 7 Wkr1 2.44 -8.	20170 d0
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 4 4 4 4 4 4 4 4 4 4 4 4 4	AC OOOOO GHz GB Sm	DUS NVNT	3-DH1 24	ALIGN AUTO #Avg Typ	Emission De: RMS 1: 10/10	03:16:1- TR -8.1	PMFeb 25,20 ACE 12 3 4 VPE MANNE DET PNNNN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.265000	AC AC B B B B A A A A A A A A A A A A A	DUS NVNT	3-DH1 24 ISE:INT Trig: Free Run #Atten: 20 dB	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PMFeb 25,20 ACE 12 3 4 VPE MANNE DET PNNNN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω Inter Freq 13.265000 Ref Offset 2.36 dB/div Ref 12.36 dE 4 5 6 6 6 6 6 6 6 6 6 6 6 6 6	AC 00000 GHz FF	DUS NVNT	3-DH1 24	ALIGN AUTO #Avg Typ	Emission Per RMS 1: 10/10	03:16:1- TR -8.1	PMFeb 25,20 ACE 12 3 4 VPE MANNE DET PNNNN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω Inter Freq 13.265000 Ref Offset 2.36 dB/div Ref 12.36 dE Agile Agile Agil	AC A	PNO: Fast FGain:Low SEN PNO: Fast SEN SEN SEN SEN SEN SEN SEN SEN	3-DH1 24	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PMFeb 25,20 ACE 12 3 4 VPE MANNE DET PNNNN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω nter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE 4 4 4 4 4 5 4 5 4 5 4 5 4 5 4 5 5 4 5 5 4 5 5 4 5 5 4 5 5 6 5 6 5 6 6 6 6 6 6 6 6 7 7 7 7 7 7 7 7 7 7 7 7 7	AC A	SEN SEN PNO: Fast Gain:Low ↓	3-DH1 24	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PM Feb 25, 20 ACE 1 2 3 4 5 VPE N WINN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω Inter Freq 13.265000 Ref Offset 2.36 dB/div Ref 12.36 dE	AC A	SEN SEN PNO: Fast Gain:Low ↓	3-DH1 24	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PMFeb 25,20 ACE 12 3 4 VPE MANNE DET PNNNN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω Inter Freq 13.265000 Ref Offset 2.36 dB/div Ref 12.36 dE act 30 MHz es BW 100 kHz R MODE TRC SCL N 1 f N 1 f N 1 f N 1 f	AC A	DUS NVNT SEN PNO: Fast Gain:Low	3-DH1 24	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PM Feb 25, 20 ACE 1 2 3 4 5 VPE N WINN 40 5 GH 078 dBr
Agilent Spectrum Analyzer - Swept S RL RF 50 Ω Inter Freq 13.26500 Ref Offset 2.36 dB/div Ref 12.36 dE a a a a a a a a b b c b c c c c c c c c c c c c c	AC A	DUS NVNT SEN PNO: Fast Gain:Low	3-DH1 24	ALIGN AUTO #Avg Tyr Avg Hold	Emission Per RMS 1: 10/10	03:16:1- TR Wkr1 2.44 -8.	PM Feb 25, 20 ACE 1 2 3 4 5 VPE N WINN 40 5 GH 078 dBr



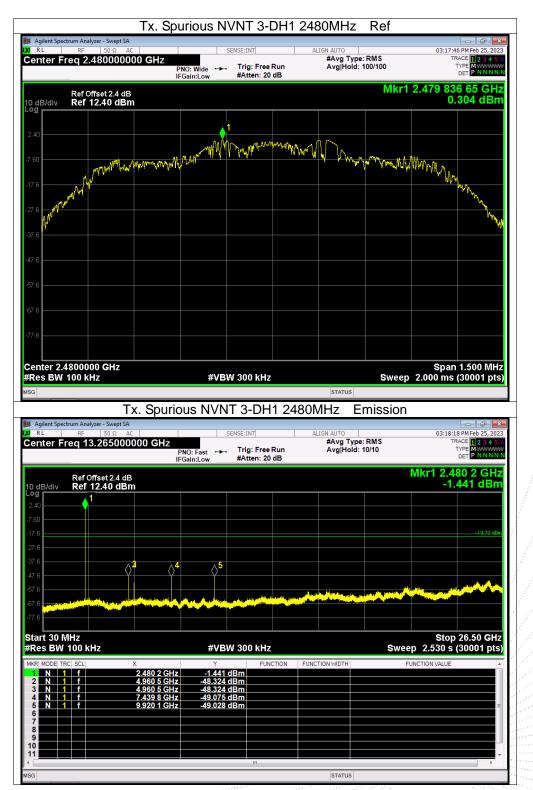




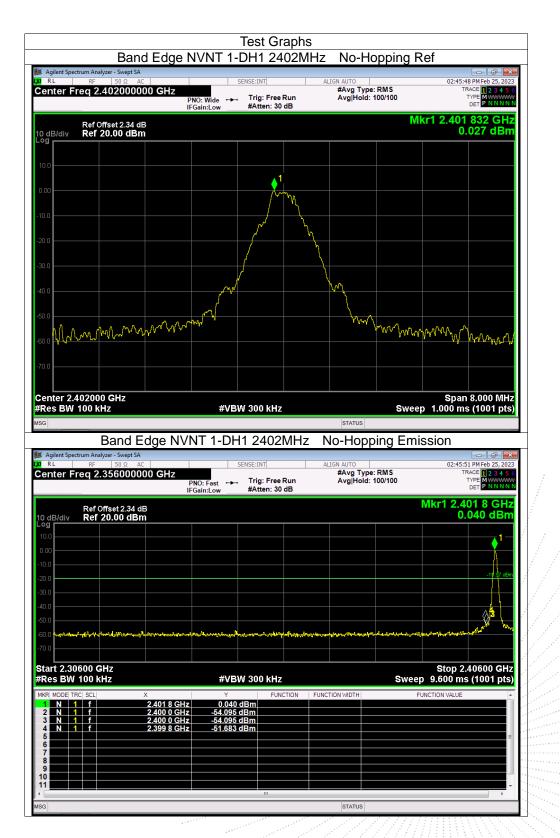






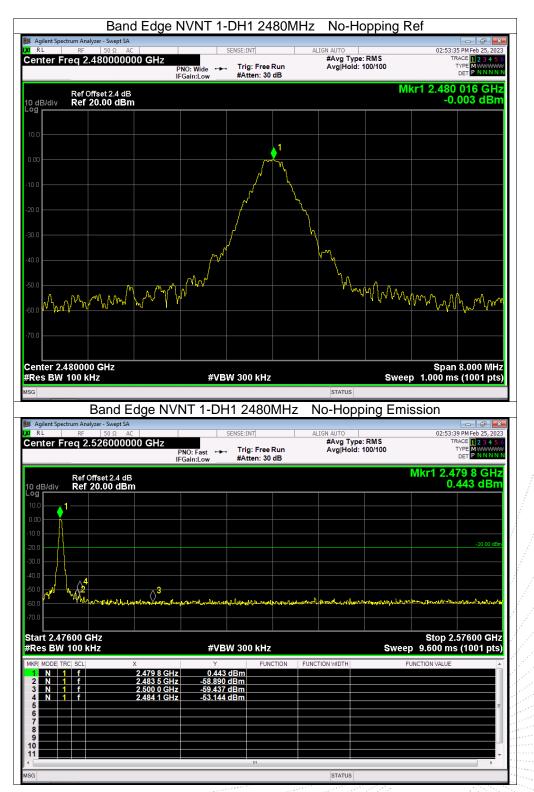






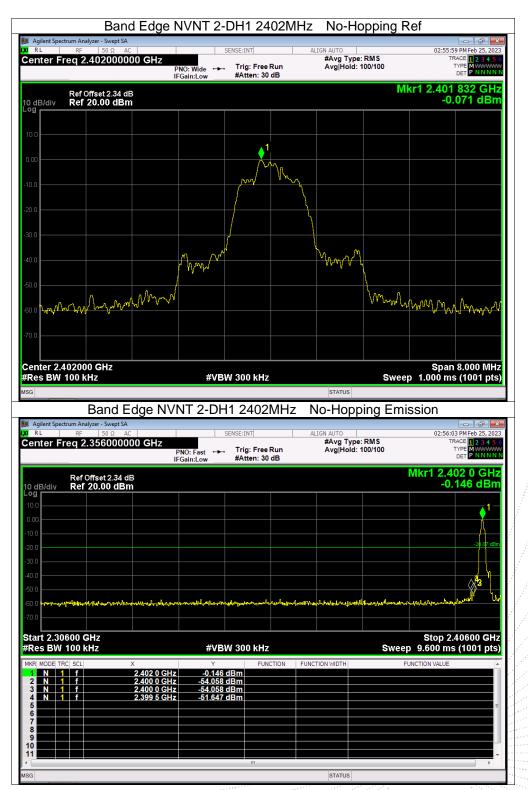







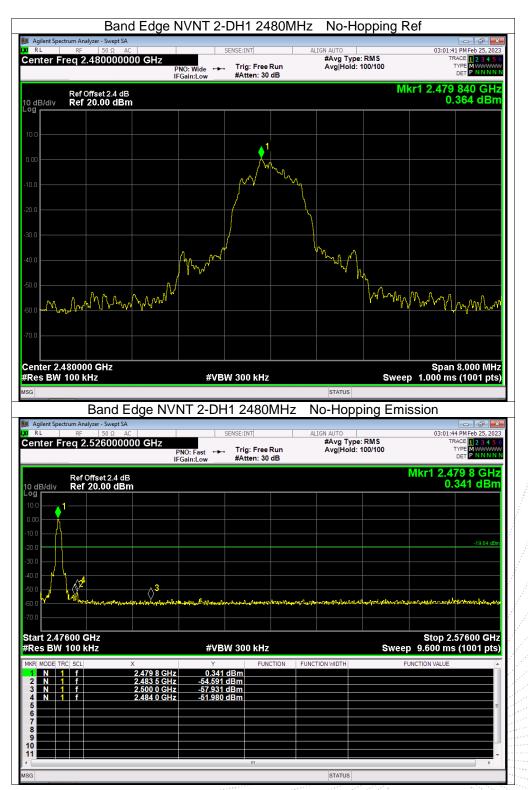







Agilent Spe RL	RF 50	Ω AC 000000 GHz		E:INT	ALIGN AUTO #Avg Typ		TI	.0 PM Feb 25, 202 RACE 1 2 3 4 5
				Trig: Free Run #Atten: 30 dB	Avg Hold	: 100/100		
	Ref Offset 2	2.34 dB				М	kr1 2.402	168 GH
dB/div g	Ref 20.00	dBm					0.	.101 dBn
).0				1				
1.0				~ h	A.			
				/				
1.0								
			D.r		ha ma)		
1.0			m		N N	L L		
		A				m		
	manym	warman				harrow	mullim	www.Ar
	,-							
1.0								
	.402000 GH: 100 kHz	Z	#VBW 3	300 kHz		Swee	span p 1.000 ms	8.000 MH:
	Ban							
Agilent Spe			NT 3-DH1	2402MH	z No-Hop	ping Em	ission	
RL	ectrum Analyzer - Sv RF 50	wept SA Ω AC			ALIGN AUTO		03:04:1	3 PM Feb 25, 202
RL	ectrum Analyzer - Sv RF 50	wept SA Ω AC 000000 GHz	PNO: Fast			e: RMS	03:04:1 TI	3 PM Feb 25, 202
enter F	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWW DET P N N N N 01 8 GH2
enter F	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWW DET P N N N N 01 8 GH2
dB/div	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWW DET P N N N N 01 8 GH2
dB/div g 00	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 1 2 3 4 5 TYPE M WWW DET P N N N N 01 8 GH2
enter F	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	DET
dB/div 99 0.0 0.0	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 12 3 4 5 DEF PNNNN 01 8 GHz 106 dBm
	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 12 3 4 5 DEF PNNNN 01 8 GHz 106 dBm
dB/div g 0.0 0.0 0.0 0.0 0.0 0.0	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 12 3 4 5 DEF PNNNN 01 8 GHz 106 dBm
gd J div 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3 000 3	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4	3 PM Feb 25, 202 RACE 12 3 4 5 DEF PNNNN 01 8 GHz 106 dBm
dB/div g 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	RF 50	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT	ALIGN AUTO #Avg Typ	e: RMS	03:04:1 TI Mkr1 2.4 0.	3 PM Feb 25, 202 Hace 11 2 3 4 5 TYPE M 12 3 4 5 DET P NNNN 01 8 GH2 106 dBm -19 49 dBm
dB/div adB/div adB/div adb/	etrum Analyzer - Sv RF S0 Freq 2.356(Ref 20.00 Ref 20.00	wept SA Ω AC 0000000 GHz 2.34 dB	PNO: Fast	E:INT Trig: Free Run Atten: 30 dB Constant	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 11 2 3 4 5 TPF PNNNN 01 8 GH2 106 dBm -19 9 dBm -19 9 dBm 40600 GH2
dB/div enter F 00 <tr< td=""><td>RF 50 Freq 2.3560 So Ref Offset / Ref 20.00 Ref 20.00 So 100 GHz 100 KHz 10 Flore 1</td><td>xept 5A Q AC D000000 GHz 2.34 dB 0 dBm </td><td>FGain:Low *</td><td>E:INT Trig: Free Run Atten: 30 dB Constant</td><td>ALIGN AUTO #Avg Typ</td><td>e: RMS : 100/100</td><td>03:04:1 TI Mkr1 2.4 0.</td><td>3 PMFeb 25, 202 ACE 11 2 3 4 5 TPF PNNNN 01 8 GH2 106 dBm -19 9 dBm -19 9 dBm 40600 GH2</td></tr<>	RF 50 Freq 2.3560 So Ref Offset / Ref 20.00 Ref 20.00 So 100 GHz 100 KHz 10 Flore 1	xept 5A Q AC D000000 GHz 2.34 dB 0 dBm 	FGain:Low *	E:INT Trig: Free Run Atten: 30 dB Constant	ALIGN AUTO #Avg Typ	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 11 2 3 4 5 TPF PNNNN 01 8 GH2 106 dBm -19 9 dBm -19 9 dBm 40600 GH2
RL Image: constraint of the second seco	RF 50 Freq 2.3560 S Ref Offset / Ref 20.00 Start 20.00 S 06000 GHz S 100 kHz F 1 F 1 F	ی یک 2.34 dB 0 dBm - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ای میشور ای میشور ای میشور ای میشور ای میشور ایم	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SE:INT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 11 2 3 4 5 TPF PNNNN 01 8 GH2 106 dBm -19 9 dBm -19 9 dBm 40600 GH2
dB/div gg	RF 50 Freq 2.3560 Second Sec	xept 5A Q AC 2.34 dB 0 dBm 4.4 love 70	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SE:INT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 11 2 3 4 5 TPF PNNNN 01 8 GH2 106 dBm -19 9 dBm -19 9 dBm 40600 GH2
adB/div	RF 50 Freq 2.3560 S Ref Offset / Ref 20.00 Start 20.00 S 06000 GHz S 100 kHz F 1 F 1 F	ی یک 2.34 dB 0 dBm - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور - بابد ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ای میشور ای میشور ای میشور ای میشور ای میشور ایم	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SE:INT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 12 3 4 5 TPF DET P NNNN 01 8 GH: 106 dBn 106 dBn 40600 GH:
RL enter F 9 0<	RF 50 Freq 2.3560 S Ref Offset / Ref 20.00 Start 20.00 S 06000 GHz S 100 kHz F 1 F 1 F	ی یک 2.34 dB 0 dBm - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور - بابد ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ای میشور ای میشور ای میشور ای میشور ای میشور ایم	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SE:INT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 VACE 12 3 4 5 VPF DET P NNNN 01 8 GH: 106 dBn
RL Image: Constraint of the second seco	RF 50 Freq 2.3560 S Ref Offset / Ref 20.00 Start 20.00 S 06000 GHz S 100 kHz F 1 F 1 F	ی یک 2.34 dB 0 dBm - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور - بابد ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ای میشور ای میشور ای میشور ای میشور ای میشور ایم	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SEINT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 207 VACE 1 2 3 4 5 VPF DET P NNNN 01 8 GH: 106 dBn 106 dBn 106 dBn 40600 GH
RL Bl/div dB/div dB/div d d d d d d d d d d d d d	RF 50 Freq 2.3560 S Ref Offset / Ref 20.00 Model S 06000 GHz Image: S 1 0 Hz Image: S	ی یک 2.34 dB 0 dBm - بابد ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور ایسی میشور - بابد ایسی میشور - بابد ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ایسی میشور ایسی میشور ای میشور ای میشور ای میشور ای میشور ای میشور ای میشور ایم	PNO: Fast → 1 FGain:Low # #VBW 1 #VBW 1 -53.480 dB -53.480 dB -53.480 dB -53.480 dB	SE:INT	ALIGN AUTO #Avg Typ Avg Hold	e: RMS : 100/100	03:04:1 TI Mkr1 2.4 0.	3 PMFeb 25, 202 ACE 12 3 4 5 TPF DET P NNNN 01 8 GH: 106 dBn 106 dBn 40600 GH:





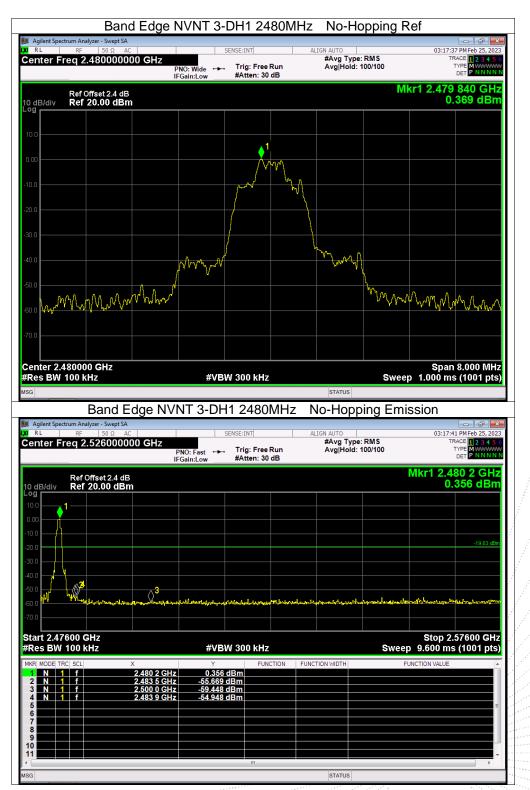



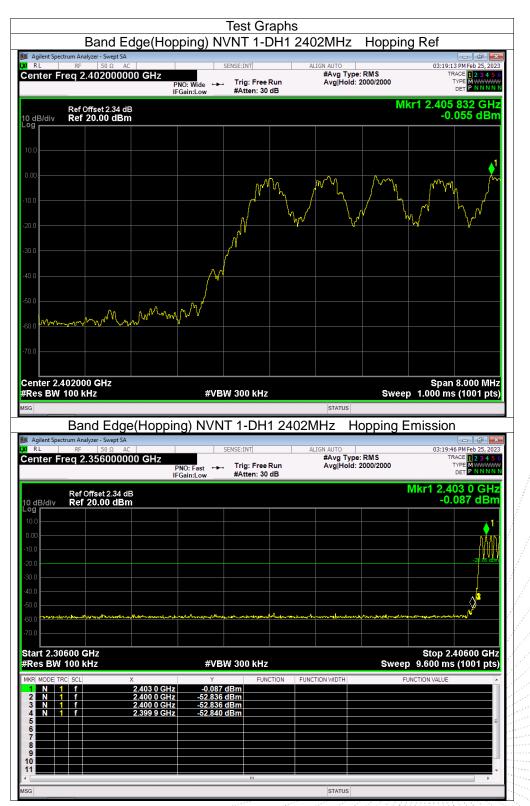























		ping) NVNT	3-DH1 24	02MHz	Hopping R	lef
Agilent Spectrum Analyzer - S RL RF 50	Ω AC	SENSE:IN	r /	LIGN AUTO	544	03:25:34 PM Feb 25, 2023
enter Freq 2.402	PI	10. muc ·	Free Run en: 30 dB	#Avg Type: Avg Hold: 2		TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
Ref Offset :		Gain:Low #Atte	en: 30 dB		Mkr1	2.405 840 GHz
0 dB/div Ref 20.00) dBm					0.034 dBm
10.0						
						_1
0.00			Mr.	m	ΛΛ .	MA A
0.0			- marker	Mur		- I hwad
20.0		/			·	
30.0		/				
10.0						
		MMM				
0.0	n mm					
0.0 mmmmm						
70.0						
enter 2.402000 GH Res BW 100 kHz	Z	#VBW 300	kHz		Sweep 1.	Span 8.000 MHz 000 ms (1001 pts
G	/			STATUS	· _ ·	•
	Edge(Hoppin	ig) NVNT 3-I	DH1 24021	VIHZ HO	opping Emi	ssion
Agilent Spectrum Analyzer - S	wept SA					- ē 🗾
RL RF 50	Ω AC 000000 GHz	SENSE:IN		ALIGN AUTO	RMS	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5
RL RF 50	0 Ω AC 0000000 GHz P	NO:Fast ⊶⊶ Trig:	Free Run en: 30 dB		2000/2000	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
RL RF 50 enter Freq 2.356	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
RL RF 50 enter Freq 2.3560 Ref Offset 0 dB/div Ref 20.00	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
RL RF SC enter Freq 2.3560 Ref Offset 0 dB/div Ref 20.01 99	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
RL RF SC enter Freq 2.3560 Ref Offset Ref Offset 0 dB/div Ref 20.01 Ref 20.01 99 100 0.0	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P NNNN
RL RF SC enter Freq 2.3560 Ref Offset Sef Offset 0 dB/div Ref 20.01 Ref 20.01 0 0 0 0 0 0 0 0 0 0 0 0	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE WWWW DET WNNN 1 2.402 2 GHz 0.091 dBm
RL RF SC enter Freq 2.3560 Ref Offset Ref Offset 0 dB/div Ref 20.01 Ref 20.01 99	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE WWWW DET WNNN 1 2.402 2 GHz 0.091 dBm
RL Rc S0 enter Freq 2.3560 Ref Offset Ref Offset 0 dB/div Ref 20.01 Ref 20.01 0 0	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:	2000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE WWWW DET WNNN 1 2.402 2 GHz 0.091 dBm
RL RF SC enter Freq 2.356 Ref Offset Ref Offset dB/div Ref 20.01 Ref 20.01 0	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run	#Avg Type:		03:26:07 PM Feb 25, 202 TRACE 1 2 3 4 5 TYPE MUSEUM DET P NNNN 1 2.402 2 GHz 0.091 dBm 1 - -1) 97 dBr
RL RF SC enter Freq 2.356 Ref Offset SG dB/div Ref 20.00 Ref 20.00 0	0000000 GHz P IF 2.34 dB	NO: Fast ↔ Trig:	Free Run n: 30 dB	#Avg Type:		03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 DET P NNNN 1 2.402 2 GH2 0.091 dBm 1
RL RF SC enter Freq 2.356 Ref Offset SC 0 dB/div Ref 20.01 SC 0 0	2.34 dB 0 dBm	NO: Fast Trig: Gain:Low #Atte	Free Run n: 30 dB	#Avg Type:		03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE MINNN 1 2.402 2 GH2 0.091 dBm 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
RL RF SC enter Freq 2.3560 Ref Offset 0 dB/div Ref 20.00 0 dB/div Ref 20.00	X 2.402 2 GHz 2.400 0 GHz	N0: Fast → Trig: Gain:Low #Atte	Free Run n: 30 dB	#Avg Type: Avg Hold: 2	000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TVPE MINNN 1 2.402 2 GHz 0.091 dBm 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
RL Rf S0 enter Freq 2.356 Ref Offset S0 0 dB/div Ref 20.01 Ref 20.01 00	2.34 dB 0 dBm	NO: Fast Gain:Low #Atte	Free Run n: 30 dB	#Avg Type: Avg Hold: 2	000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE MINNN 1 2.402 2 GH2 0.091 dBm 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
Ref Offset 0 dB/div Ref Offset 0 dB/div Ref 2.3560 9	X 2.402 2 GHz 2.400 0 GHz	N0: Fast → Trig: Gain:Low #Atte	Free Run n: 30 dB	#Avg Type: Avg Hold: 2	000/2000	03:26:07 PM Feb 25, 2027 TRACE 12 3 4 5 TYPE 12 3 4 5 DET P NNNN 1 2.4002 2 GH2 0.091 dBm 1
RL RF SC enter Freq 2.356 Ref Offset SC 0 B/div Ref 20.01 SC 0 0	X 2.402 2 GHz 2.400 0 GHz	N0: Fast → Trig: Gain:Low / #Atte	Free Run n: 30 dB	#Avg Type: Avg Hold: 2	000/2000	03:26:07 PM Feb 25, 202 TRACE 12 3 4 5 TYPE MINNN 1 2.402 2 GH2 0.091 dBm 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -









10. 20 dB Bandwidth

10.1 Block Diagram Of Test Setup



10.2 Limit

N/A

10.3 Test procedure

- 1. Set RBW = 30kHz.
- 2. Set the video bandwidth (VBW) \ge 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
1-DH1	2402	0.941	Pass
1-DH1	2441	0.961	Pass
1-DH1	2480	0.981	Pass
2-DH1	2402	1.209	Pass
2-DH1	2441	1.199	Pass
2-DH1	2480	1.207	Pass
3-DH1	2402	1.205	Pass
3-DH1	2441	1.203	Pass
3-DH1	2480	1.189	Pass
	1-DH1 1-DH1 2-DH1 2-DH1 2-DH1 3-DH1 3-DH1	Mode (MHz) 1-DH1 2402 1-DH1 2441 1-DH1 2480 2-DH1 2402 2-DH1 2441 2-DH1 2441 3-DH1 2402 3-DH1 2441	Mode (MHz) (MHz) 1-DH1 2402 0.941 1-DH1 2441 0.961 1-DH1 2480 0.981 2-DH1 2402 1.209 2-DH1 2441 1.199 2-DH1 2480 1.207 3-DH1 2441 1.203









JC JC PPR
















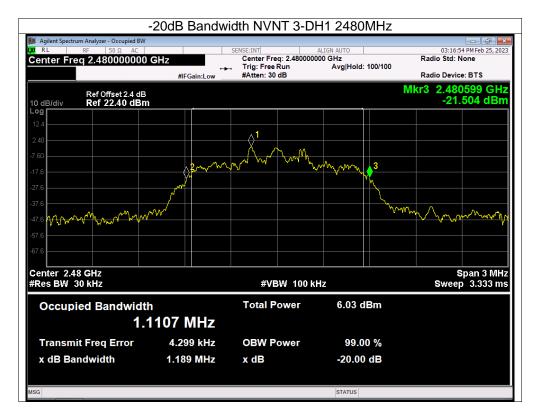

No.: BCTC/RF-EMC-007

Page: 54 of 80



11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C							
Section	Test Item	Limit	Frequency Range (MHz)	Result			
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS			

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.

3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.4 Test Result


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict	
NVNT	1-DH1	2402	0.67	21	Pass	
NVNT	1-DH1	2441	0.01	21	Pass	
NVNT	1-DH1	2480	0.93	21	Pass	
NVNT	2-DH1	2402	0.58	21	Pass	
NVNT	2-DH1	2441	-0.08	21	Pass	
NVNT	2-DH1	2480	0.97	21	Pass	
NVNT	3-DH1	2402	0.67	21	Pass	
NVNT	3-DH1	2441	-0.14	21	Pass	
NVNT	3-DH1	2480	0.91	21	Pass	



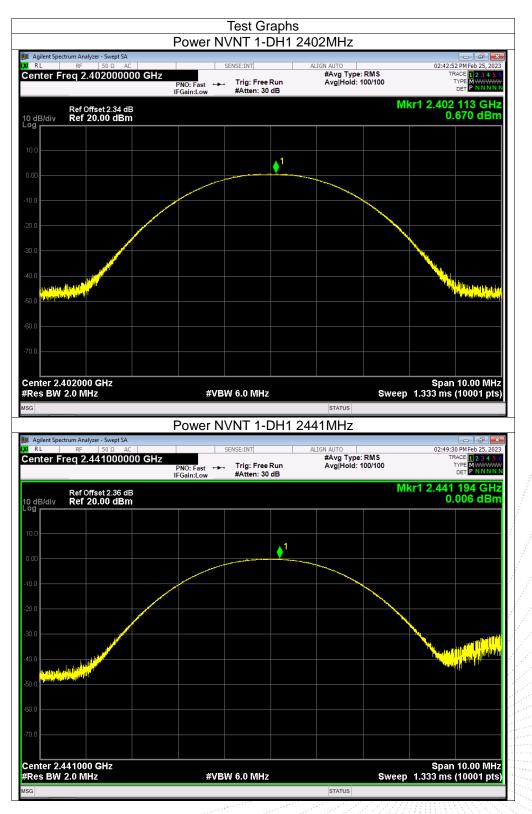






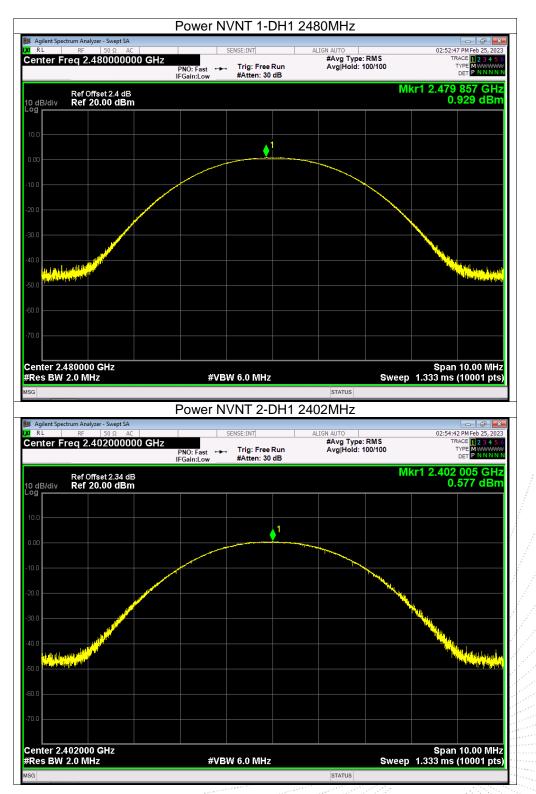




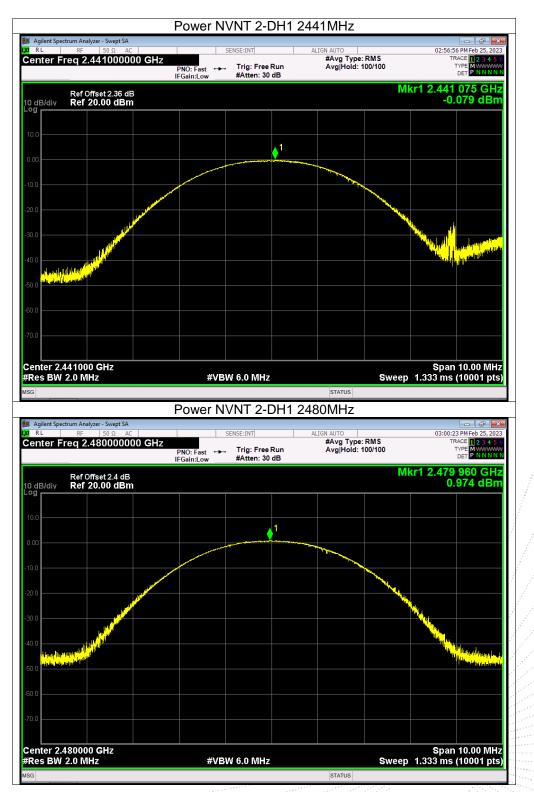


则大



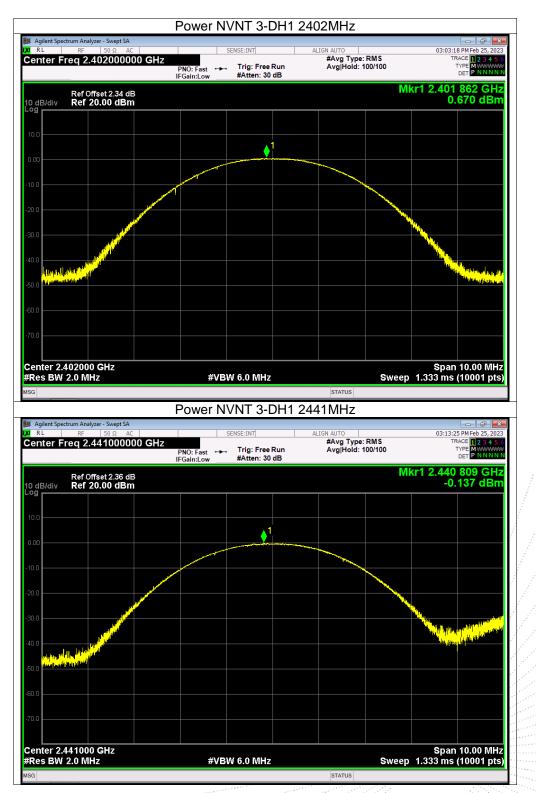





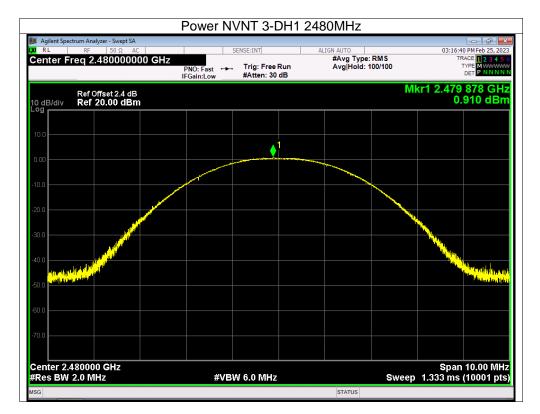

ういと



Page: 60 of 80



12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2401.832	2402.832	1.000	0.941	Pass
NVNT	1-DH1	2440.830	2441.834	1.004	0.961	Pass
NVNT	1-DH1	2478.836	2479.832	0.996	0.981	Pass
NVNT	2-DH1	2401.832	2402.834	1.002	0.806	Pass
NVNT	2-DH1	2440.832	2441.832	1.000	0.799	Pass
NVNT	2-DH1	2478.836	2479.832	0.996	0.805	Pass
NVNT	3-DH1	2401.832	2402.832	1.000	0.803	Pass
NVNT	3-DH1	2440.832	2441.834	1.002	0.802	Pass
NVNT	3-DH1	2478.836	2479.832	0.996	0.793	Pass

12.4 Test Result