

FCC RF TEST REPORT

APPLICANT	:	Xiamen Candour Co.,Ltd
PRODUCT NAME	:	TVBOX
MODEL NAME	:	R92
TRADE NAME	:	SAMMIX
BRAND NAME	:	SAMMIX
FCC ID	:	2ALOI-R92
STANDARD(S)	:	47 CFR Part 15 Subpart C
ISSUE DATE	:	2017-06-02

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

 MORLAB GROUP
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal



DIRECTORY

TEST	REPORT DECLARATION ····································
<u>1.</u> <u>T</u>	ECHNICAL INFORMATION ····································
1.1	APPLICANT INFORMATION ·······5
1.2	EQUIPMENT UNDER TEST (EUT) DESCRIPTION5
1.2.1	IDENTIFICATION OF ALL USED EUTS ·······6
1.3	TEST STANDARDS AND RESULTS ·······6
1.3.1	Test Environment Conditions6
2. 4	7 CFR PART 15C REQUIREMENTS······7
2.1	ANTENNA REQUIREMENT ······7
2.1.1	Applicable Standard ······7
2.1.2	Result: Compliant
2.2	PEAK OUTPUT POWER······7
2.2.1	REQUIREMENT7
2.2.2	Test Description ······7
2.2.3	Test Result8
2.3	BANDWIDTH ······10
2.3.1	REQUIREMENT 10
2.3.2	TEST DESCRIPTION ······ 10
2.3.3	Test Result 10
2.4	CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE
2.4.1	REQUIREMENT 19
2.4.2	TEST DESCRIPTION ······ 19
2.4.3	TEST RESULT
2.5	POWER SPECTRAL DENSITY (PSD)
2.5.1	REQUIREMENT
2.5.2	TEST DESCRIPTION ····································
2.5.3	TEST RESULT
2.6	RESTRICTED FREQUENCY BANDS41
2.6.1	REQUIREMENT 41
2.6.2	TEST DESCRIPTION ······ 41
2.6.3	Test Result 42

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



2.7		·53
2.7.1	Requirement	53
2.7.2		53
2.1.1	Test Result	54
2.8	RADIATED EMISSION ·····	·56
	RADIATED EMISSION ·····	
2.8.1		56
2.8.1 2.8.2	REQUIREMENT	56 57

Change History					
Issue Date Reason for change					
1.0	2017-06-02	First edition			

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



TEST REPORT DECLARATION

Applicant	Xiamen Candour Co.,Ltd
Applicant Address	19/F,C&D International Building.,No.1699 East Huandao Road, Xiamen 361008, China
Manufacturer Address	Xiamen Candour Co.,Ltd
Manufacturer	19/F,C&D International Building.,No.1699 East Huandao Road, Xiamen 361008, China
Product Name	TVBOX
Model Name	R92
Brand Name	SAMMIX
HW Version	MYROPE_S_V2.0
SW Version	V01_160301_CTA
Test Standards	47 CFR Part 15 Subpart C
Test Date	2017-05-10 to 2017-06-01
Test Result	PASS

: _____ lang Tested by Su Hang (Test Engineer) Approved by : Qiu Xianju

Qiu Xiaojun (Supervisor)

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



1. TECHNICAL INFORMATION

Note: Provide by applicant.

Applicant Information 1.1

Company:	Xiamen Candour Co.,Ltd
Address	19/F,C&D International Building.,No.1699 East Huandao Road, Xiamen
Address	361008, China

1.2 Equipment under Test (EUT) Description

Brand Name:	SAMMIX		
Trade Name:	SAMMIX		
Model Name:	R92		
Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz		
	802.11n-40MHz: 2.422GHz - 2.452GHz		
Channel Number:	802.11b/g/n-20MHz: 11		
	802.11n-40MHz: 7		
Modulation Type:	DSSS, OFDM		
Antenna Type:	FPC Antenna		
Antenna Gain:	1.6 dBi		

NOTE:

1. The EUT is a TVBOX, it's operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is F (MHz) =2412+5*(n-1) (1<=n<=11). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is F (MHz) =2412+5*(n-1) (3<=n<=9). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

- 2. The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission. And the duty cycle is 100%.
- 3. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

 FL1-3, Building A, FerYang Science Park, INU.0 LONGONARY NO.2,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	e Version Software Version	
A01	MYROPE_S_V2.0	V01_160301_CTA	

1.3 **Test Standards and Results**

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
	(10-1-15 Edition)	

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N/A	<u>N/A</u>
2	15.247(b)	Peak Output Power	May 11, 2017	PASS
3	15.247(a)	Bandwidth	May 11, 2017	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	May 11, 2017	PASS
5	15.247(d)	Restricted Frequency Bands	May 18, 2017	PASS
6	15.207	Conducted Emission	May 18, 2017	PASS
7	15.209 ,15.247(d)	Radiated Emission	Jun 01, 2017	PASS
8	15.247(e)	Power spectral density (PSD)	May 11, 2017	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v04 (04/05/2017).

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

Applicable Standard 2.1.1

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 **Peak Output Power**

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed1 Watt.

2.2.2 Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

B. Equipments List:

Please reference ANNEX A(1.5).

MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,



2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.2.3.1 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Vordict
		dBm	W	dBm	W	Verdict
1	2412	12.96	0.01977			PASS
6	2437	12.94	0.01968	30	1	PASS
11	2462	12.51	0.01782			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		t	Verdict
		dBm	W	dBm	W		
1	2412	9.16	0.00824			PASS	
6	2437	9.40	0.00871	30	1	PASS	
11	2462	9.08	0.00809			PASS	

2.2.3.2 802.11g Test mode

Channel Frequency (MHz)		Measured C	output Peak Power	Limit		Verdict
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
1	2412	21.55	0.14289			PASS
6	2437	21.82	0.15205	30	1	PASS
11	2462	21.86	0.15346			PASS

Channel	Frequency (MHz)	Measured Output Average Power					Verdict
		dBm	W	dBm	W		
1	2412	9.67	0.00927			PASS	
6	2437	9.59	0.00910	30	1	PASS	
11	2462	9.58	0.00908			PASS	

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



2.2.3.3 802.11n-20MHz Test mode

Channel Frequency (MHz)		Measured C	output Peak Power	Limit		Verdict
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
1	2412	21.96	0.15704			PASS
6	2437	21.76	0.14997	30	1	PASS
11	2462	21.79	0.15101			PASS

Channel	Frequency (MHz)	Measured Output Average Limit				Verdict
		dBm	W	dBm	W	
1	2412	9.51	0.00893			PASS
6	2437	9.93	0.00984	30	1	PASS
11	2462	9.48	0.00887			PASS

2.2.3.4 802.11n-40MHz Test mode

Channel Frequency (MHz)		Measured C	output Peak Power	Limit		Verdict
Channer	Frequency (MIRZ)	dBm	W	dBm	W	veruici
3	2422	20.32	0.10765			PASS
6	2437	19.30	0.08511	30	1	PASS
9	2452	19.15	0.08222			PASS

Channel	Frequency (MHz)	Measured Output Average Power				t	Verdict
		dBm	W	dBm	W		
3	2422	9.00	0.00794			PASS	
6	2437	8.99	0.00793	30	1	PASS	
9	2452	9.16	0.00824			PASS	

 MORLAB GROUP
 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com
 E-mail: service@morlab.cn




2.3 **Bandwidth**

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.3.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.137	≥500	PASS
6	2437	8.562	≥500	PASS
11	2462	8.114	≥500	PASS


B. Test Plots

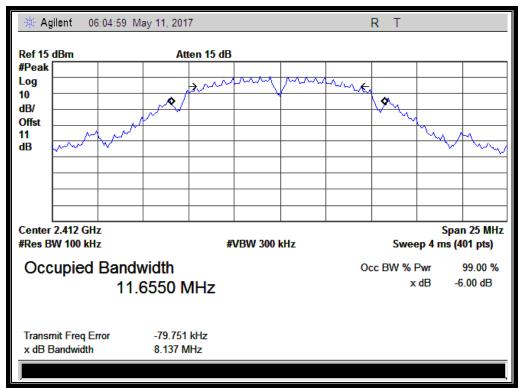


(Channel 1: 2412MHz @ 802.11b)

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com

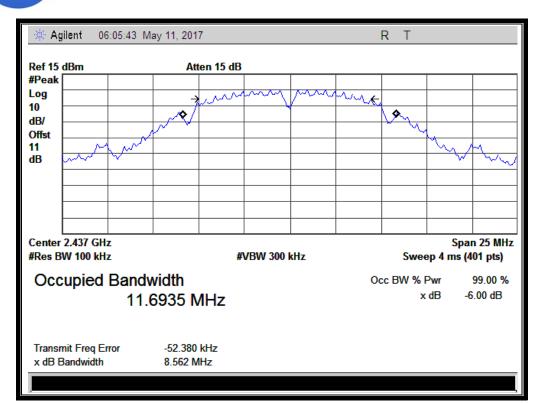



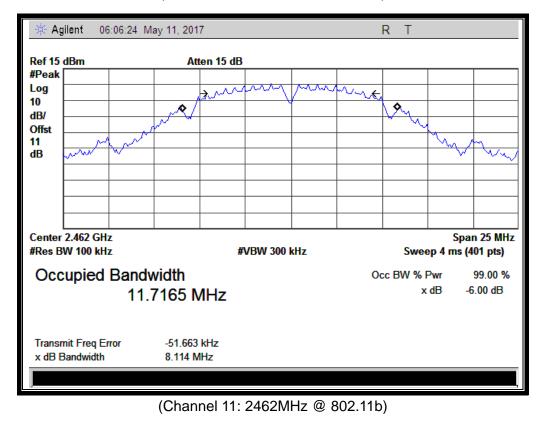

MORLAB GROUP

MORLA

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.3.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.416	≥500	PASS
6	2437	16.377	≥500	PASS
11	2462	16.389	≥500	PASS

B. Test Plots:

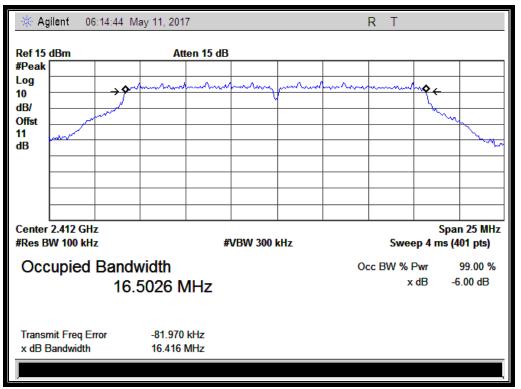

(Channel 1: 2412MHz @ 802.11g)


 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com


Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 13 Of 74



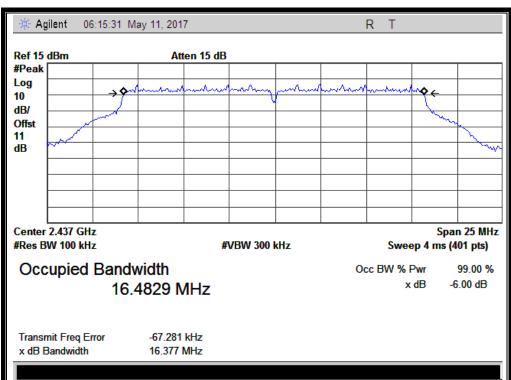



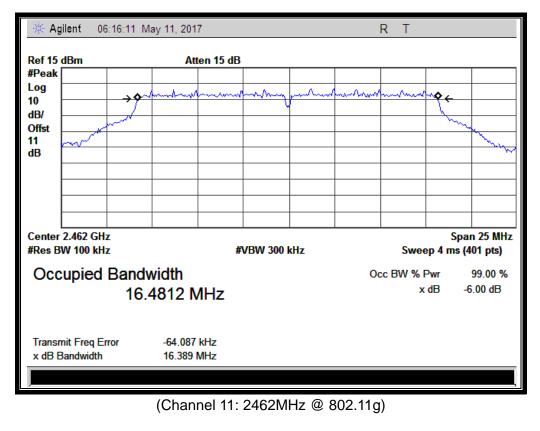

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.3.3.3 802.11n-20 Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.621	≥500	PASS
6	2437	17.640	≥500	PASS
11	2462	17.647	≥500	PASS

B. Test Plots:

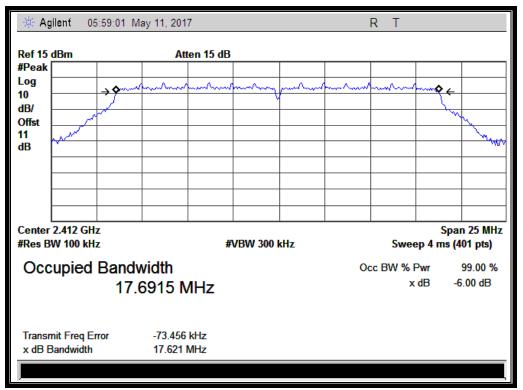


(Channel 1: 2412MHz @ 802.11n-20)


 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



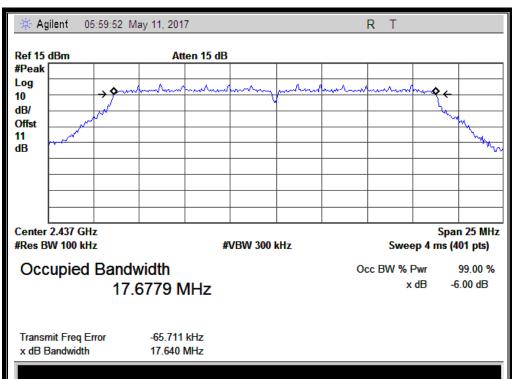



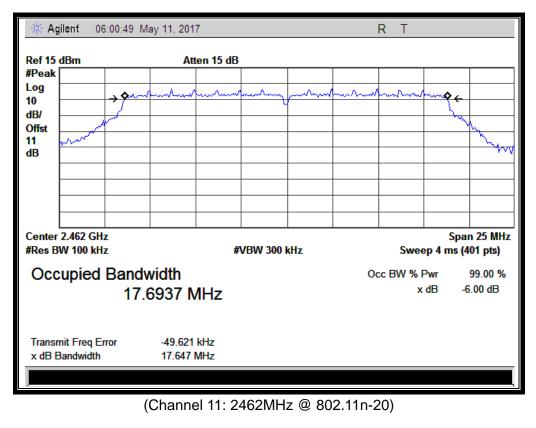

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.3.3.4 802.11n-40 Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	36.474	≥500	PASS
6	2437	36.448	≥500	PASS
9	2452	36.444	≥500	PASS

B. Test Plots:

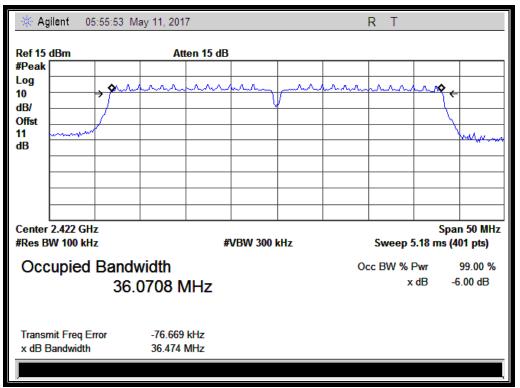

(Channel 3: 2422Mz @ 802.11n-40)


 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com


Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 17 Of 74



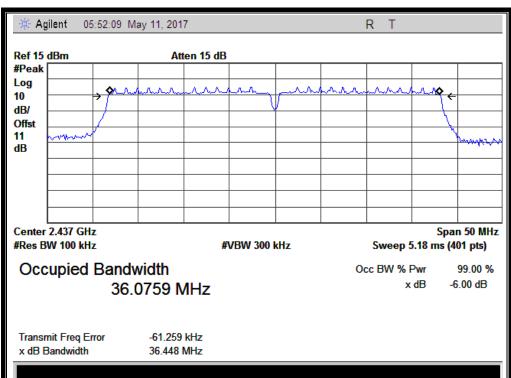



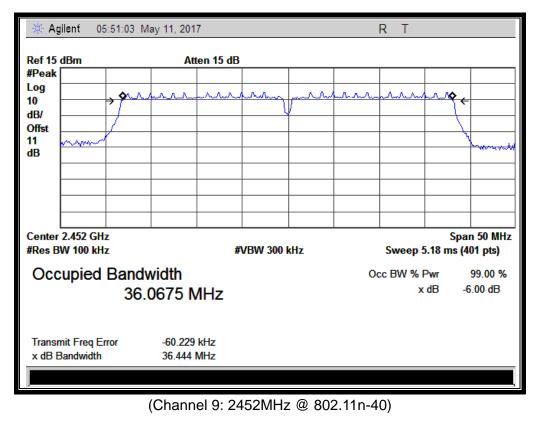

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com






2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.4.3.1 802.11b Test mode

A. Test Verdict:

	Frequency	Measured Max.	Limit	t (dBm)	
Channel	Frequency (MHz)	Out of Band	Carrier	Calculated	Verdict
	(IVITZ)	Emission (dBm)	Level	-20dBc Limit	
1	2412	-40.93	4.74	-15.26	PASS
6	2437	-40.98	4.19	-15.81	PASS
11	2462	-40.81	4.67	-15.33	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

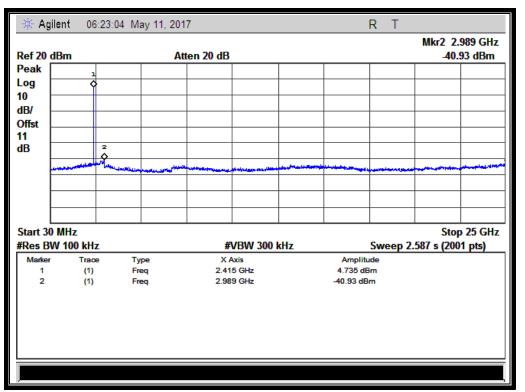


(Channel = 1, 30MHz to 25GHz)


MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com

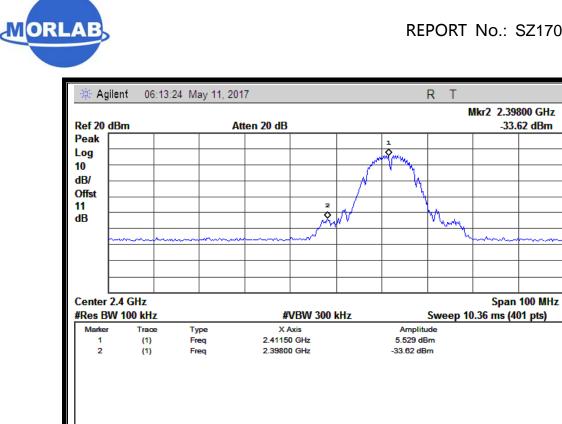



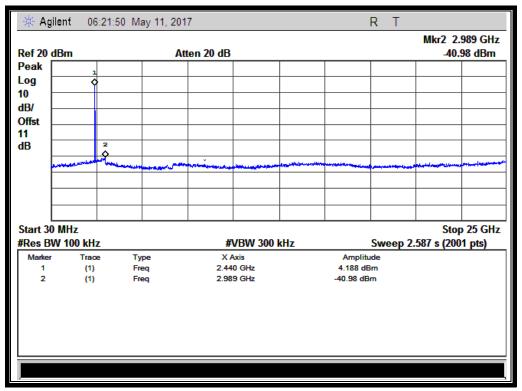





MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



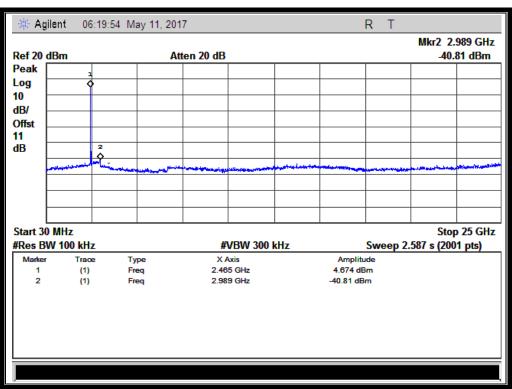



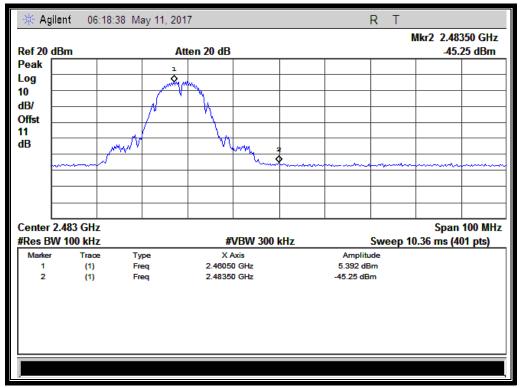

(Band Edge @ Channel = 11)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.4.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
1	2412	-40.23	1.01	-18.99	PASS
6	2437	-39.39	1.56	-18.44	PASS
11	2462	-40.35	0.10	-19.90	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

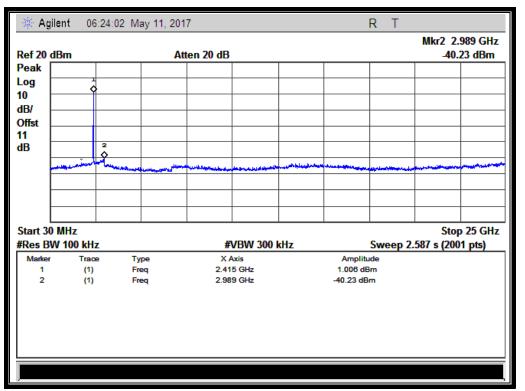


(Channel = 1, 30MHz to 25GHz)


MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



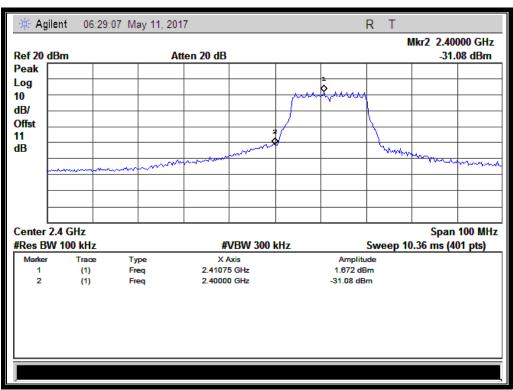



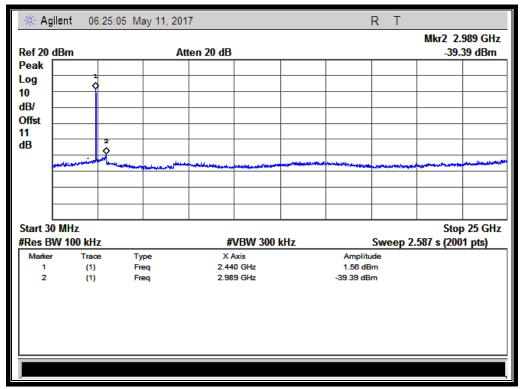





MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



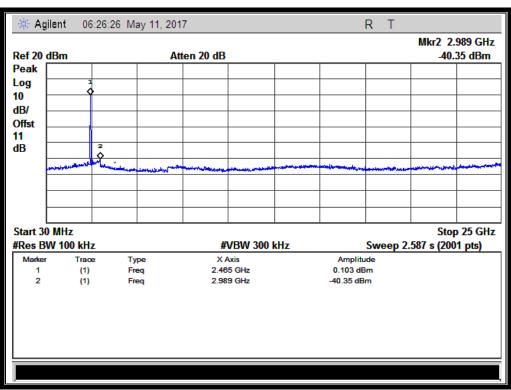



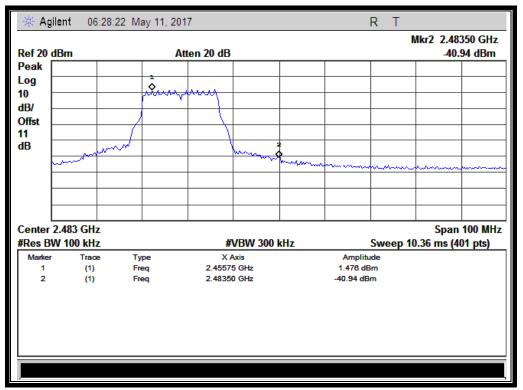

(Band Edge @ Channel = 11)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
1	2412	-40.37	0.43	-19.57	PASS
6	2437	-40.32	0.98	-19.02	PASS
11	2462	-40.44	1.25	-18.75	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

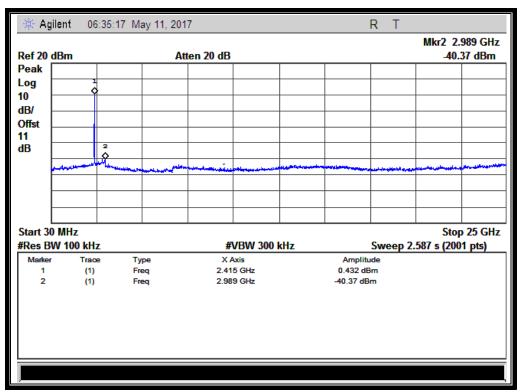


(Channel = 1, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



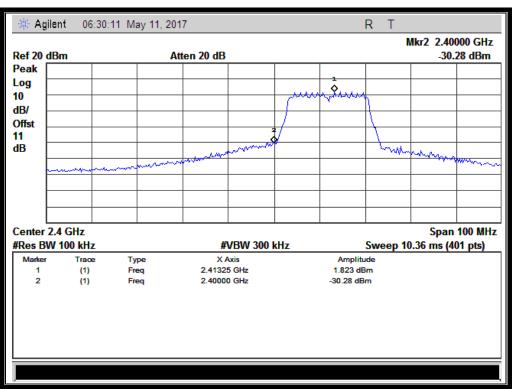



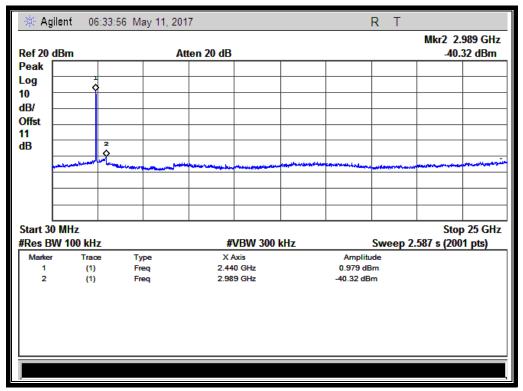





MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



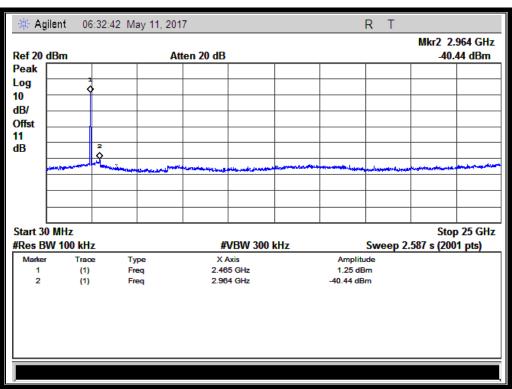



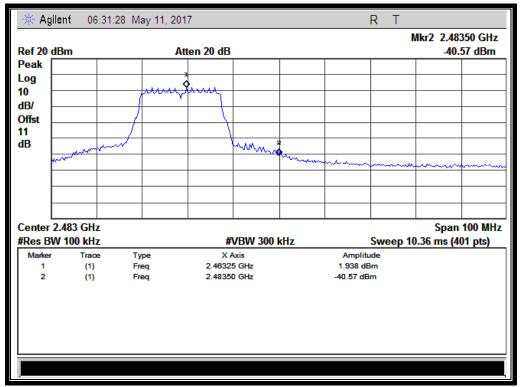

(Band Edge @ Channel = 11)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.4.3.4 802.11n -40MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
3	2422	-40.32	-0.24	-20.24	PASS
6	2437	-40.50	-0.76	-20.76	PASS
9	2452	-40.12	-0.35	-20.35	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

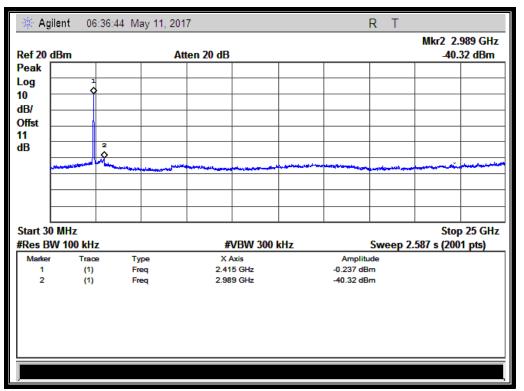


(Channel = 3, 30MHz to 25GHz)


MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.com



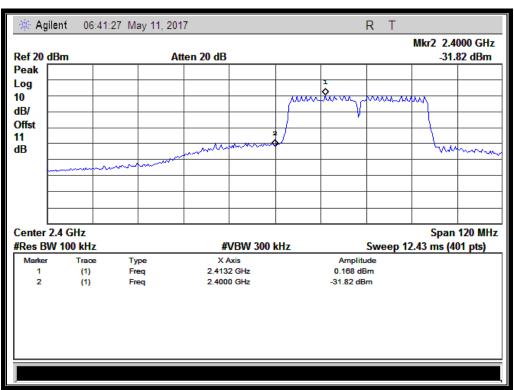



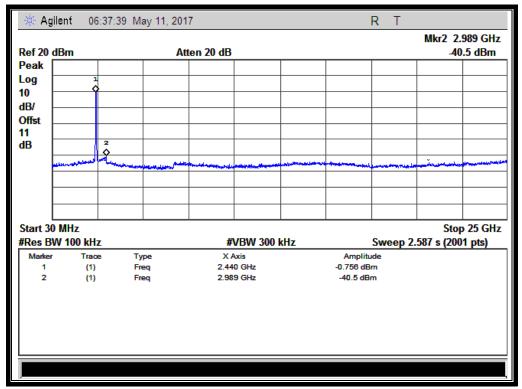





MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



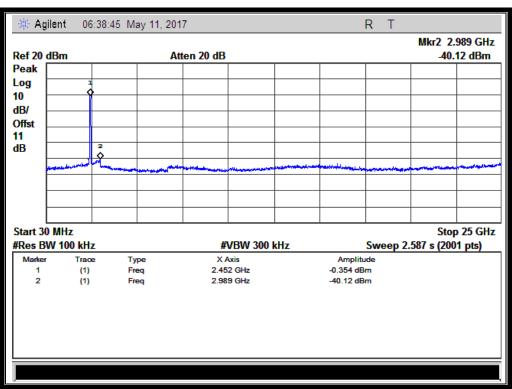



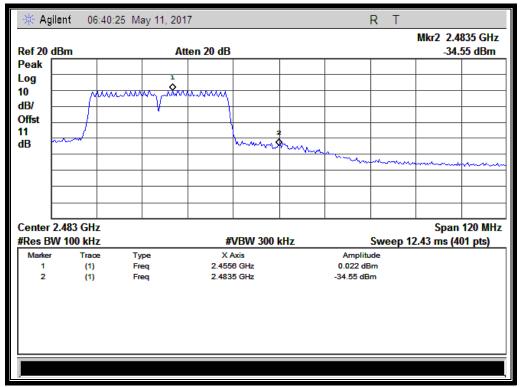

(Band Edge @ Channel = 9)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description


A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 30MHz
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10KHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.

i) Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please reference ANNEX A(1.5).

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.5.3 Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency	Measured PSD	Limit	Verdict	
	(MHz)	(dBm/3kHz)	(dBm/3kHz)	verdict	
1	2412	-8.44	8	PASS	
6	2437	-7.27	8	PASS	
11	2462	-7.85	8	PASS	
Measurement uncertainty: ±1.3dB					


B. Test Plots:

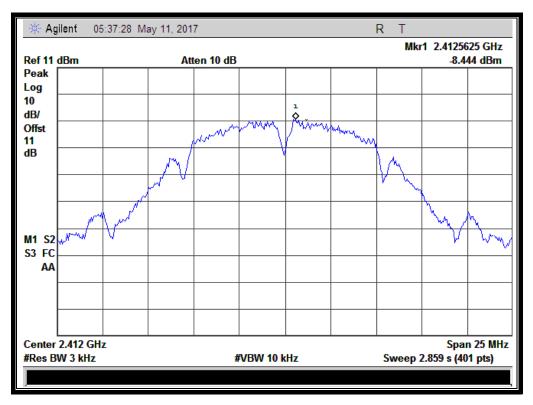


(Channel = 1 @ 802.11b)

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com

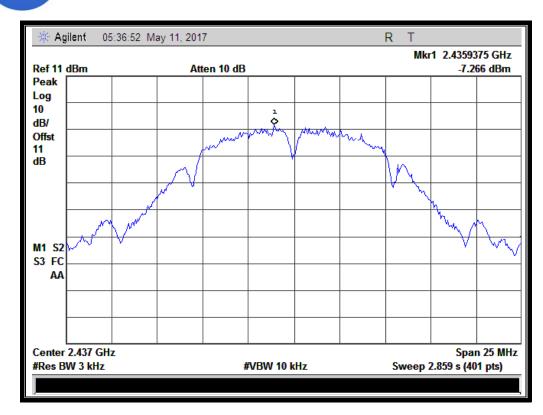

(Channel = 6 @ 802.11b)

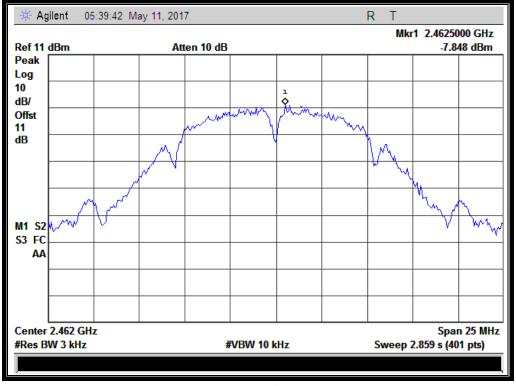

(Channel = 11 @ 802.11b)

MORLAB GROUP

MORLA

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Http://www.morlab.com

Tel: 86-755-36698555




2.5.3.2 802.11g Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
1	2412	-11.00	8	PASS	
6	2437	-12.12	8	PASS	
11	2462	-12.08	8	PASS	
Measurement uncertainty: ±1.3dB					

B. Test Plots:

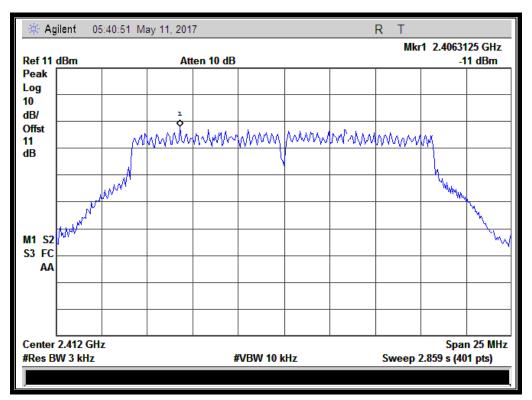


(Channel = 1 @ 802.11g)


 FL1-3, Building A, FeiYang Science Park, No.8 LongCharing ROau,
 Http://www.morlab.com

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



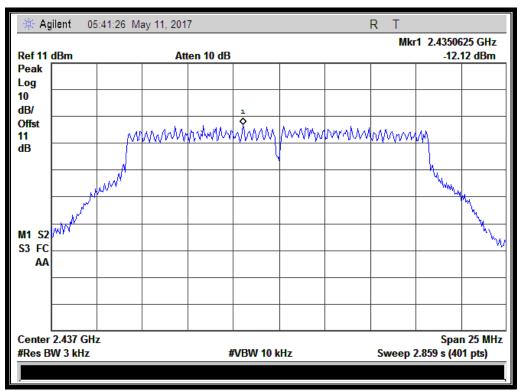

(Channel = 6 @ 802.11g)

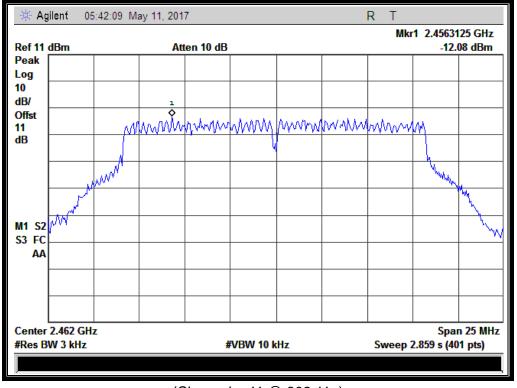

(Channel = 11 @ 802.11g)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Http://www.morlab.com

Tel: 86-755-36698555




2.5.3.3 802.11n-20MHz Test mode

A. Test Verdict:

	Spe	ectral power density (dB	m/3kHz)	
Channel	Frequency	Measured PSD	Limit	Verdict
	(MHz)	(dBm/3kHz)	(dBm/3kHz)	verdict
1	2412	-12.03	8	PASS
6	2437	-11.95	8	PASS
11	2462	-13.13	8	PASS
Measureme	ent uncertainty:	±1.3dB		

B. Test Plots:

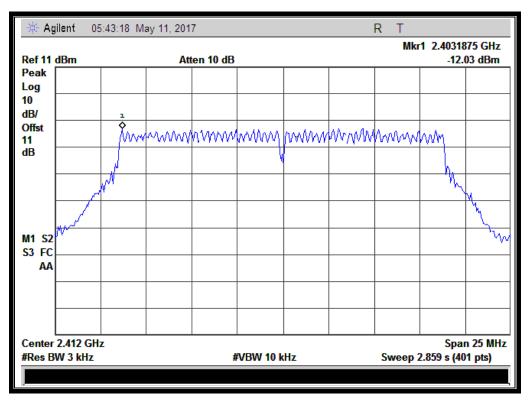


(Channel = 1 @ 802.11n-20MHz)


 FL1-3, Building A, FeiYang Science Park, No.8 LongCharing ROau,
 Http://www.morlab.com

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



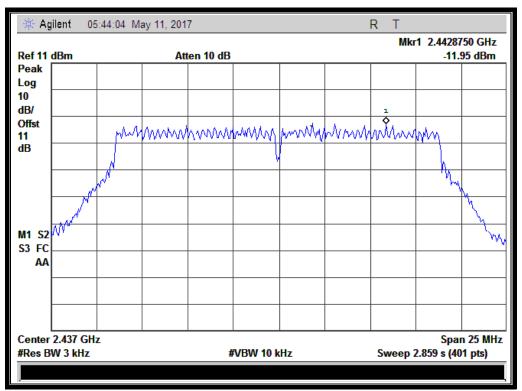

(Channel = 6 @ 802.11n-20MHz)

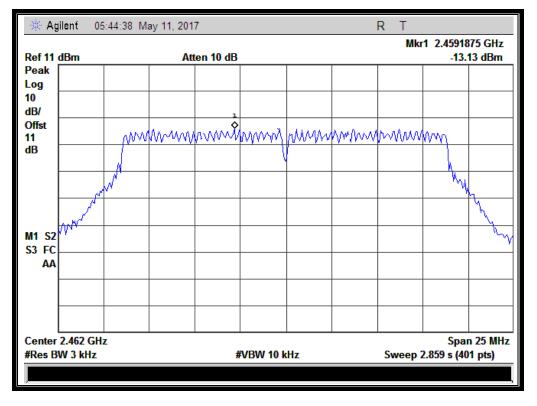

(Channel = 11 @ 802.11n-20MHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.5.3.4 802.11n-40MHz Test mode

A. Test Verdict:

	Spe	ectral power density (dB	m/3kHz)	
Channel	Frequency	Measured PSD	Limit	Verdict
Channel	(MHz)	(dBm/3kHz)	(dBm/3kHz)	verdici
3	2422	-13.35	8	PASS
6	2437	-14.63	8	PASS
9	2452	-13.95	8	PASS
Measureme	ent uncertainty:	±1.3dB		

B. Test Plots:

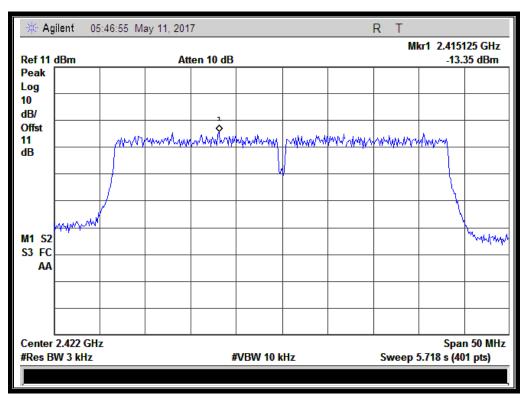


(Channel = 3 @ 802.11n-40MHz)


 FL1-3, Building A, FeiYang Science Park, No.8 LongCharing ROau,
 Http://www.morlab.com

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



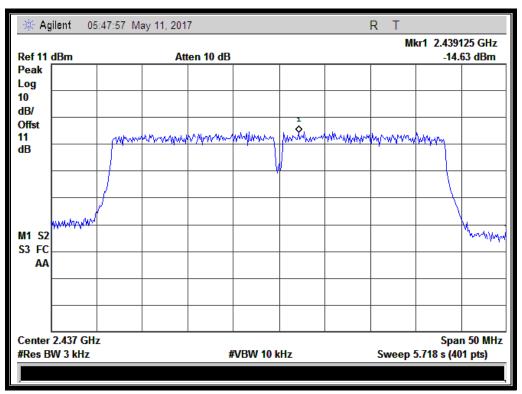

(Channel = 6 @ 802.11n-40MHz)

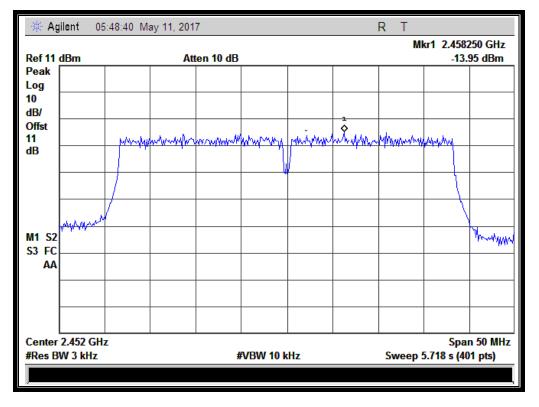

(Channel = 9 @ 802.11n-40MHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

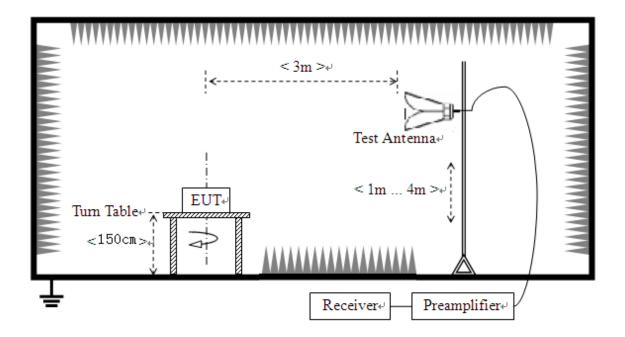

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below: E [dBµV/m] =U_R + A_T + A_{Factor} [dB]; A_T =L_{Cable loss} [dB]-G_{preamp} [dB] A_T: Total correction Factor except Antenna U_R: Receiver Reading Gpreamp: Preamplifier Gain A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
1	2386.35	PK	42.59	-33.63	32.56	41.52	74	Pass
1	2386.35	AV	31.90	-33.63	32.56	30.83	54	Pass
11	2484.31	PK	43.00	-33.18	32.5	42.32	74	Pass
11	2484.31	AV	31.76	-33.18	32.5	31.08	54	Pass

B. Test Plots:

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



RL RF PRESEL 50 Ω DC arker 2 2.3900000000000	PNO: Fast C	SENSE:IN	Avg	ALIGN OFF Type: Voltage Hold:>100/100	TRAC	M May 18, 2017 CE 1 2 3 4 5 6 PE M WWWWW T P P N N N N	Marker
dB/div Ref 100.00 dBµ\	IFGain:Low	Atten: 6 dB		Mkı	2 2.390		Select Marke
9							Norn
	and a second second	wantered Anne - man	6 ¹ ~4~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	1	2		De
							Fixe
art 2.30000 GHz s BW (CISPR) 1 MHz	#VB	W 3.0 MHz		Sweep 1	Stop 2.4′ .000 ms (1200 GHz 1001 pts)	
N 1 f 2.3 N 1 f 2.3	86 35 GHz 90 00 GHz	Y 42.586 dBµV 42.867 dBµV	FUNCTION	FUNCTION WIDTH	FUNCTION	DN VALUE	Propertie
						=	M
							1.

(Plot A1: Channel = 1 PEAK @ 802.11b)



(Plot A2: Channel = 1 AVG @ 802.11b)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Keysight Spectrum Analyzer - Swept SA RE RF PRESEL 50 0 C Marker 2 2.484308000000	GHz PNO: Fast IFGain:Low Atten: 6 dB	Avg Type: Voltage		Marker
10 dB/div Ref 100.00 dBµV		Mkr	2 2.484 308 GHz 42.996 dBµV	2
80.0				Normal
70.0	Marine production and here and a second seco	2- taket man Lange of The orthouse an	an ab arigh-aggilater same	Delta
30.0 20.0 10.0				Fixed⊳
Start 2.46200 GHz Res BW (CISPR) 1 MHz	#VBW 3.0 MHz		Stop 2.50000 GHz 1.000 ms (1001 pts)	Off
2 N 1 f 2.48 3 4 5 5 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Y 4 308 GHz 4 308 GHz 4 308 GHz 4 2.996 dBμV	FUNCTION FUNCTION WD1	H FUNCTION VALUE	Properties▶
6 7 8				More

(Plot B1: Channel = 11 PEAK @ 802.11b)



(Plot B2: Channel = 11 AVG @ 802.11b)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
1	2386.35	PK	42.77	-33.63	32.56	41.70	74	Pass
1	2386.35	AV	31.93	-33.63	32.56	30.86	54	Pass
11	2484.31	PK	42.51	-33.18	32.5	41.83	74	Pass
11	2484.31	AV	31.74	-33.18	32.5	31.06	54	Pass

B. Test Plots:

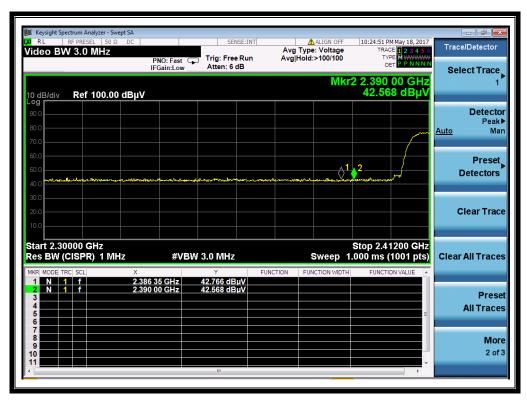

(Plot C1: Channel = 1 PEAK @ 802.11g)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



RL RF PRESEL 50 Ω DC deo BW 10 Hz		SENSE:II	Avg	ALIGN OFF Type: Voltage Hold: 1/100	TRAC	May 18, 2017		BW
	PNO: Fast G	Atten: 6 dB			DE 2 2.390		<u>Auto</u>	Res B 1 Mi Mi
1 dB/div Ref 100.00 dBµ\ 99 0.0					51.90	σάβμν		Video B
0.0							Auto	10 <u>M</u>
D.0								V:3dB RB
D.0					¢ ²		<u>Auto</u>	M
D.O							Spai <u>Auto</u>	
art 2.30000 GHz es BW (CISPR) 1 MHz	#VBV	V 10 Hz		Sweep	Stop 2.41 12.84 s (′	200 GHz 1001 pts)	RBI	W Contro
	86 35 GHz 90 00 GHz	γ 31.927 dBμV 31.905 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTIC	ON VALUE		
4 5 6 7						=		
8								

(Plot C2: Channel = 1 AVG @ 802.11g)

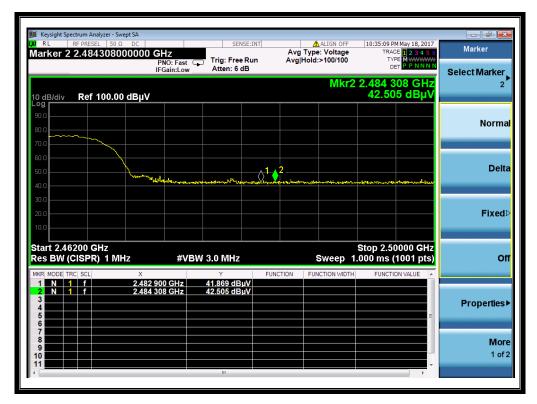

(Plot D1: Channel = 11 PEAK @ 802.11g)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com





1 Keysight Spectrum Analyzer - Swept SA				
Rest RF PRESEL 50 Ω DC Marker 2 2.484308000000	GHZ PNO: Fast Trig: Free Run	ALIGN OFF Avg Type: Voltage Avg Hold: 2/100	10:35:28 PM May 18, 2017 TRACE 1 2 3 4 5 6 TYPE M WWWWW	Marker
10 dB/div Ref 100.00 dBµV	IFGain:Low Atten: 6 dB	-	оет Р Р N N N N 2 2.484 308 GHz 31.743 dBµV	Select Marker
90.0				Normal
70.0 60.0 50.0				Delta
40.0		¢ ²		Fixed⊳
Start 2.46200 GHz Res BW (CISPR) 1 MHz	#VBW 10 Hz	Sweep	Stop 2.50000 GHz 4.357 s (1001 pts)	Off
	Υ F 900 GHz 31.785 dBμV 308 GHz 31.743 dBμV	UNCTION FUNCTION WIDTH	FUNCTION VALUE	Properties▶
5 6 7				More
	m			1 of 2

(Plot D2: Channel = 11 AVG @ 802.11g)

2.6.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Channel Frequency (MHz)	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission E	Limit	Verdict
		PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	⊏ (dBµV/m)	(dBµV/m)	
1	2385.23	PK	42.56	-33.63	32.56	41.49	74	Pass
1	2385.23	AV	31.92	-33.63	32.56	30.85	54	Pass
11	2483.32	PK	42.71	-33.18	32.5	42.03	74	Pass
11	2483.32	AV	31.74	-33.18	32.5	31.06	54	Pass

B. Test Plots:


 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



Keysight Spectrum Analyzer - Swept RL RF PRESEL 50 Ω arker 2 2.390000000 0	DC DOOO GHz PNO: Fast		Avg	ALIGN OFF Type: Voltage Hold:>100/100	TRAC TYP	May 18, 2017 E 1 2 3 4 5 6 E M WWWWW T P P N N N N	Marker
dB/div Ref 100.00 d	IFGain:Low	Atten: 6 dB		Mkı	2 2.390		Select Marke
9							Norn
).0).0).0				1	2		De
0.0							Fixe
art 2.30000 GHz es BW (CISPR) 1 MHz	#VI	BW 3.0 MHz		Sweep 1	Stop 2.41 .000 ms (200 GHz 1001 pts)	
R MODE TRC SCL	× 2.385 23 GHz 2.390 00 GHz	۲ <u>42.564 dBµV</u> 42.518 dBµV	FUNCTION	FUNCTION WIDTH	FUNCTIO	ON VALUE	
						E	Propertie
							Me
							10

(Plot E1: Channel = 1 PEAK @ 802.11n-20)

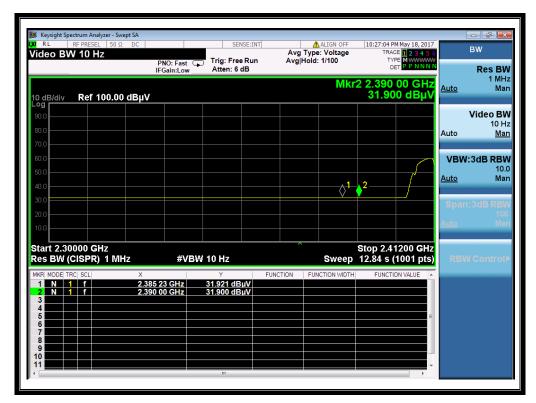

(Plot E2: Channel = 1 AVG @ 802.11n-20)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



RL RF PRESEL 50 Ω DC arker 2 2.484308000000	GHz PNO: Fast	Trig: Free Run Atten: 6 dB	Avg	ALIGN OFF Type: Voltage Hold:>100/100	10:37:42 PM May 18, 201 TRACE 1 2 3 4 5 TYPE MWWWW DET P P N N N	6 Marker ₩
dB/div Ref 100.00 dBµV	IFGain:Low	Atten: 0 dB		Mkr2	2.484 308 GH 43.243 dBµ\	
						Norn
	and the strate of the	Alour margarian	¹ ²	and an one of a respect	water for a constant of a constant of the law of the second of the secon	De
0.0 0.0 0.0						Fixe
art 2.46200 GHz es BW (CISPR) 1 MHz	#VBW	/ 3.0 MHz		· · ·	Stop 2.50000 GH 1.000 ms (1001 pts	
I I I F 2.483 I I I I I I I I I I I I I I I I I I I I I I	318 GHz 308 GHz	Υ 42.710 dBμV 43.243 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	Propertie
2						Mo 1 c

(Plot F1: Channel = 11 PEAK @ 802.11n-20)



(Plot F2: Channel = 11 AVG @ 802.11n-20)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com




2.6.3.4 802.11n-40MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U _R	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E	Limit (dBµV/m)	Verdict
		PK/ AV	(dBuV)	(UD)		∟ (dBµV/m)	(ασμν/π)	
3	2386.02	PK	42.63	-33.63	32.56	41.56	74	Pass
3	2386.02	AV	31.93	-33.63	32.56	30.86	54	Pass
9	2484.31	PK	41.19	-33.18	32.5	40.51	74	Pass
9	2484.31	AV	31.75	-33.18	32.5	31.07	54	Pass

B. Test Plots:

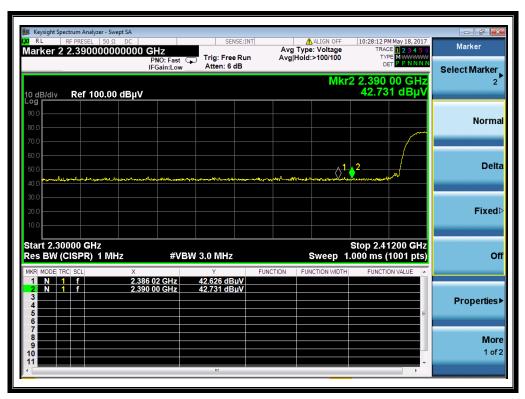

(Plot E1: Channel = 3 PEAK @ 802.11n-40)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



IFGain:Low Atten: 6 dB Mikr2 2.390 00 GHz GHz Auto Mikr2 Mikr2 2.390 00 GHz 31.856 dBµV 31.856 dBµV 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M Mikr2 2.390 00 GHz 1 M 1 M 1 M	IFGain:Low Arten: 6 dB Ref 100.00 GHz Mikr2 2.390 00 GHz Auto Mato 10 Mikr2 2.390 00 GHz 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 100 10 10 10 101 10 10 10 102 10 10 10 103 10 10 10 104 10 10 10 105 100 10 10 </th <th>RL RF PRESEL 50 Ω DC deo BW 10 Hz</th> <th>PNO: Fast</th> <th>SENSE:IN</th> <th>Avg</th> <th>ALIGN OFF Type: Voltage Hold: 1/100</th> <th>TRACI TYP</th> <th>4 May 18, 2017 E 1 2 3 4 5 6 E M V V V V V V V V V V V V V V V V V V</th> <th></th> <th>BW</th>	RL RF PRESEL 50 Ω DC deo BW 10 Hz	PNO: Fast	SENSE:IN	Avg	ALIGN OFF Type: Voltage Hold: 1/100	TRACI TYP	4 May 18, 2017 E 1 2 3 4 5 6 E M V V V V V V V V V V V V V V V V V V		BW
Video E 10 10 10 10 10 10 10 10 10 10	Image: Structure of provide of prov	dB/div Ref 100.00 dBu	IFGain:Low _	Atten: 6 dB		Mkr	2 2.390	00 GHz	<u>Auto</u>	Res E 1 M M
VBW:3dB RE 1 2 2 2 2 2 2 2 2 2 2 2 2 2	Image: Stop 2.41200 GHz es BW (CISPR) 1 MHz Y BW: 3dB RE and the stop 2.41200 GHz es BW (CISPR) 1 MHz Image: Stop 2.41200 GHz es BW (CISPR) 1 MHz Y FUNCTION FUNCTION WIDTH FUNCTION VALUE Image: Reference of the stop 2.41200 GHz es BW (CISPR) 1 MHz Y FUNCTION FUNCTION WIDTH FUNCTION VALUE Image: Reference of the stop 2.41200 GHz es BW (CISPR) 1 MHz Y FUNCTION FUNCTION WIDTH FUNCTION VALUE Image: Reference of the stop 2.41200 GHz es BW (CISPR) 1 MHz Y FUNCTION FUNCTION WIDTH FUNCTION VALUE	99 0.0 0.0							Auto	Video E 10 <u>M</u>
Span:3dB RE 100 1 <	N 1 f 2.386 02 GHz 31.856 dBµV Function Function width Function value Function <	D.0								/:3dB RE 1(M
art 2.30000 GHz Stop 2.41200 GHz	Xart 2.30000 GHz Stop 2.41200 GHz es BW (CISPR) 1 MHz #VBW 10 Hz Sweep 12.84 s (1001 pts) R MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 1 f 2.386 02 GHz 31.926 dBµV 5 <	0.0				\` 	¢2			
	N 1 f 2.386 02 GHz 31.926 dBµV 2 N 1 f 2.390 00 GHz 31.856 dBµV 3	art 2.30000 GHz	#VB	W 10 Hz		Sweep				

(Plot E2: Channel = 3 AVG @ 802.11n-40)

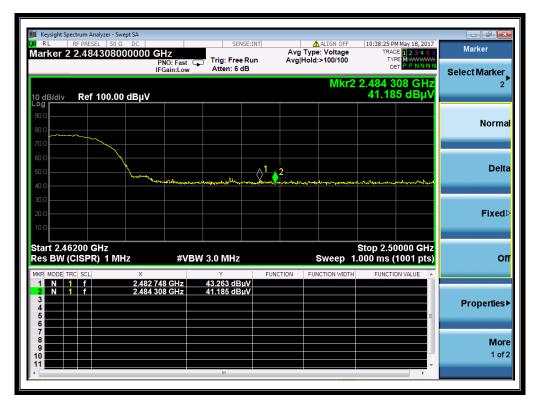

(Plot F1: Channel = 9 PEAK @ 802.11n-40)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com





(Plot F2: Channel = 9 AVG @ 802.11n-40)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



2.7 **Conducted Emission**

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).


Frequency range	Conducted	Limit (dBµV)
(MHz)	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 0.50MHz.

2.7.2 Test Description

A. Test Setup:

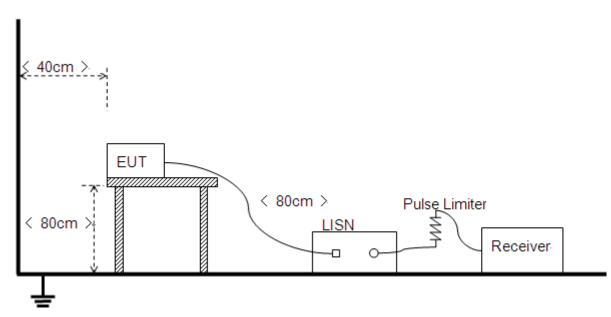

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



B. Equipments List:

Please reference ANNEX A(1.5).

2.1.1 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

Note: The test voltage is AC 120V/60Hz.

B. Test Plots:



(Plot A: L Phase)


NO.	Fre.	Emission Le	evel (dBµV)	Limit (c	lΒμV)	Power-	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average	line		
1	0.15	50.55	36.35	66	56		PASS	
2	0.6	43.54	30.29	56	46		PASS	
3	1.155	33.89	26.29	56	46	Line	PASS	
4	2.175	31.52	26.02	56	46	Line	PASS	
5	2.99	29.42	24.65	56	46		PASS	
6	3.81	27.97	23.82	56	46		PASS	

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



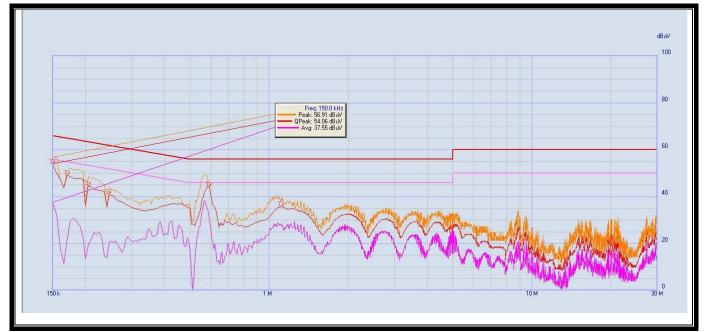

(Plot B: N Phase)

NO.	Fre.	Emission Lev	vel (dBµV)	Limit (c	lBμV)	Power-	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average	line		
1	0.15	54.06	37.55	66	56		PASS	
2	0.17	49.35	22.19	65.43	55.43		PASS	
3	0.205	44.73	19.39	64.43	54.43	Neutral	PASS	
4	0.245	41.16	20.59	63.29	53.29	Neutral	PASS	
5	0.59	44.45	30.87	56	46		PASS	
6	1.11	35.76	28.30	56	46		PASS	

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



2.8 **Radiated Emission**

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)		
0.009 - 0.490	2400/F(kHz)	300		
0.490 - 1.705	24000/F(kHz)	30		
1.705 - 30.0	30	30		
30 - 88	100	3		
88 - 216	150	3		
216 - 960	200	3		
Above 960	500	3		

Note:

- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

 FL1-3, Building A, FerYang Science Park, INO.0 Longonang Notes,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.com




2.8.2 Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

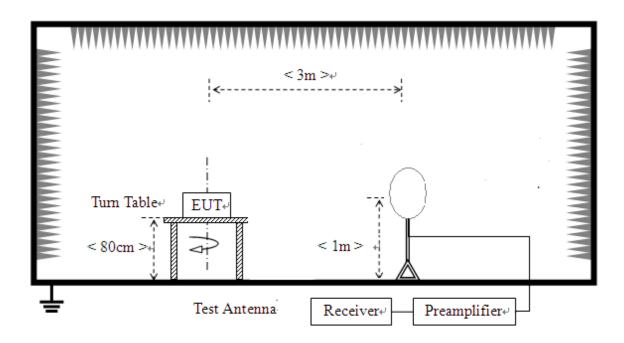


2) For radiated emissions from 30MHz to1GHz

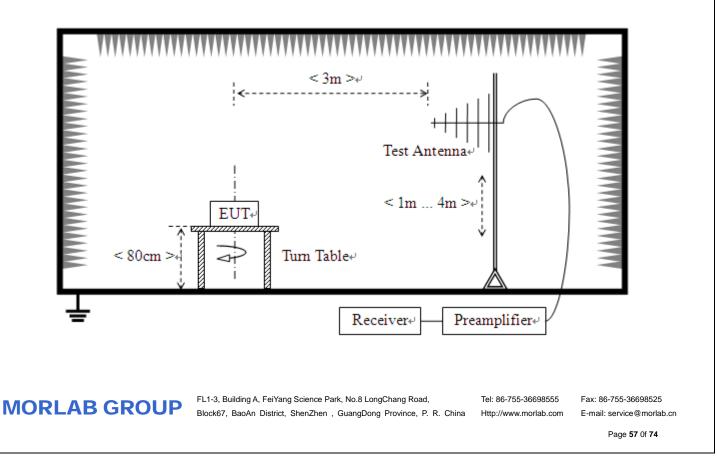



3) For radiated emissions above 1GHz

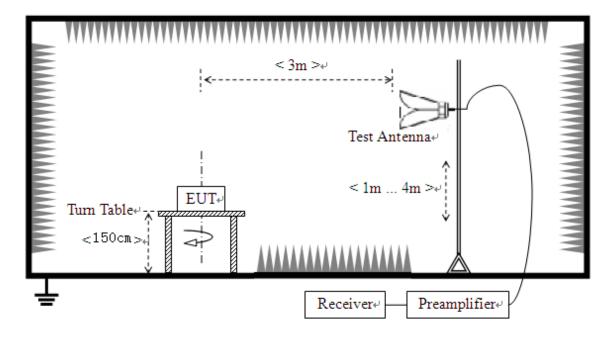

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of

MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,



the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

Gpreamp: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







2.8.3.1 802.11b Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

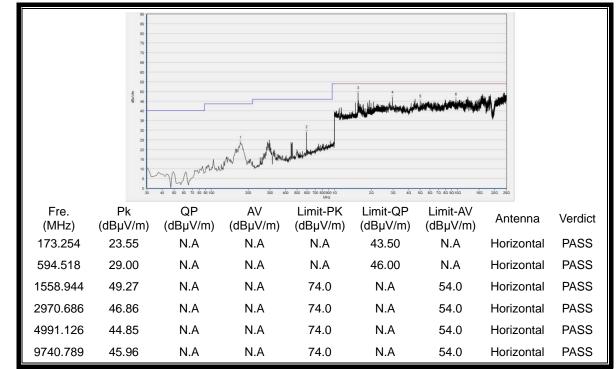

(Antenna Horizontal, 30MHz to 25GHz)

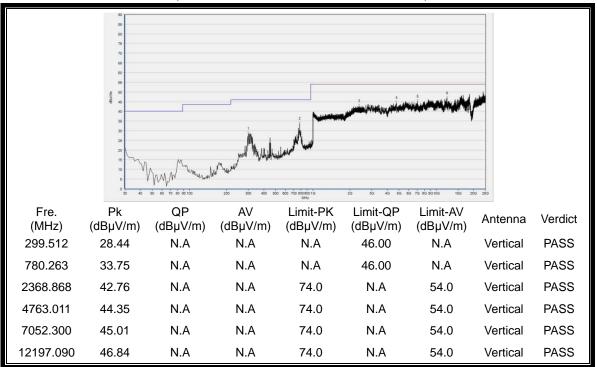


(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plot for Channel = 6

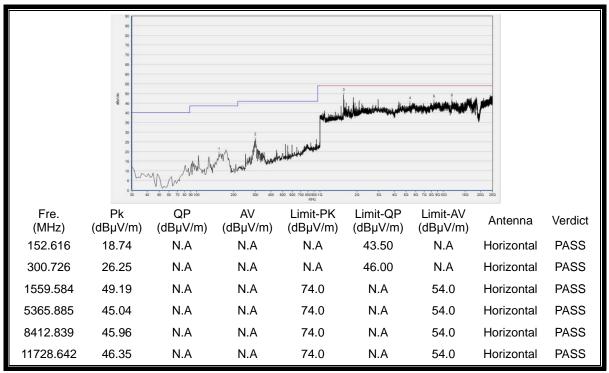

(Antenna Horizontal, 30MHz to 25GHz)

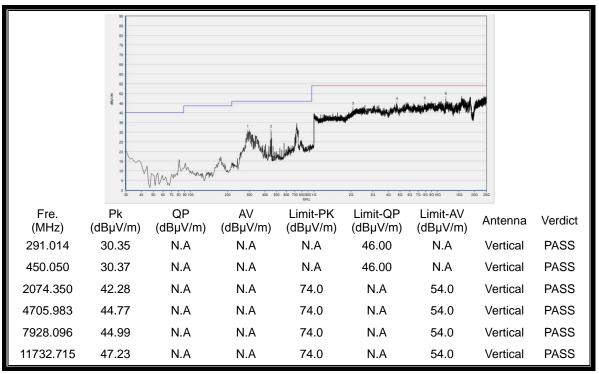


(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plot for Channel = 11

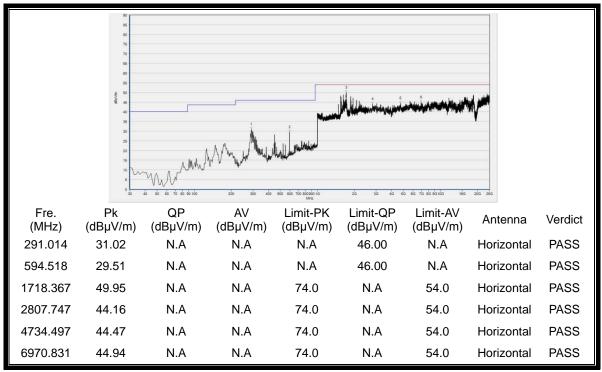

(Antenna Horizontal, 30MHz to 25GHz)

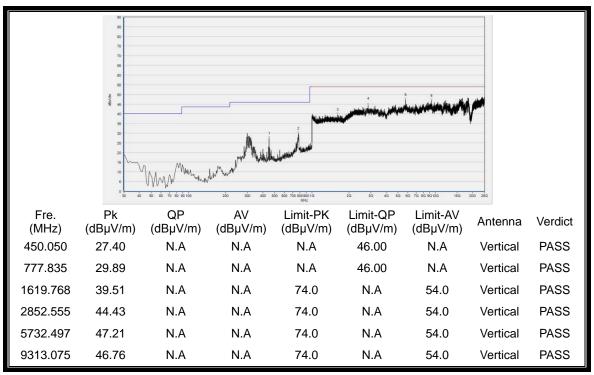

(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com







2.8.3.2 802.11g Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

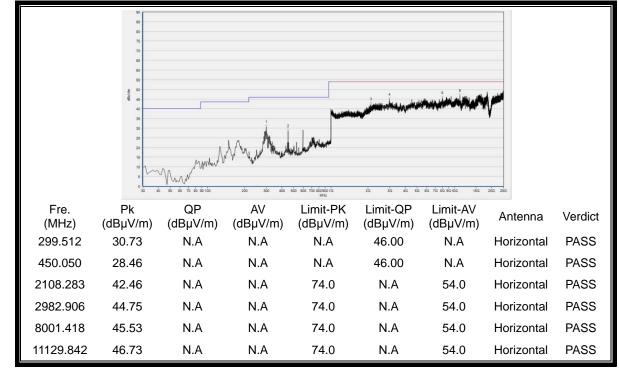


(Antenna Horizontal, 30MHz to 25GHz)

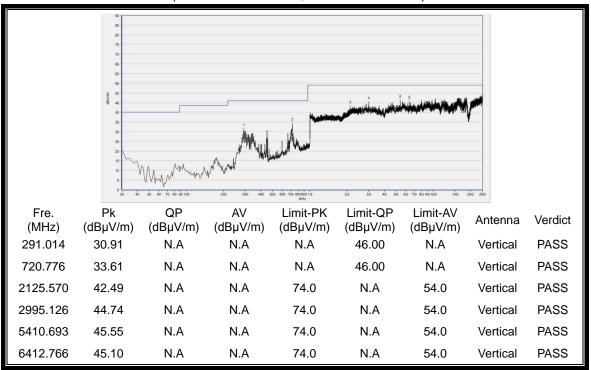

(Antenna Vertical, 30MHz to 25GHz)


MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com






Plot for Channel = 6

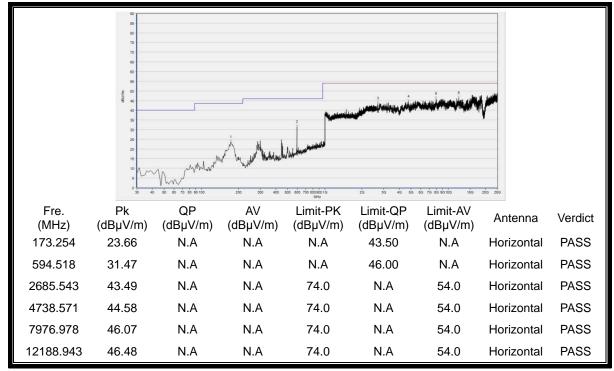


(Antenna Horizontal, 30MHz to 25GHz)

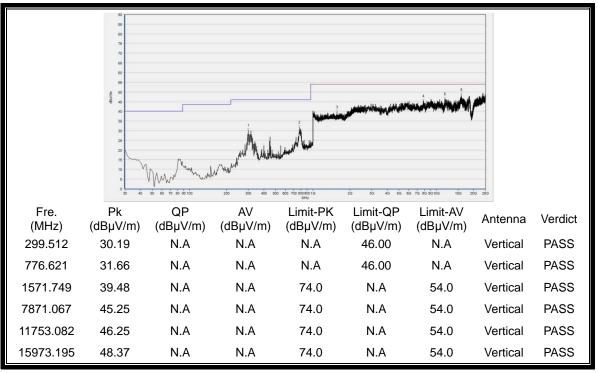

(Antenna Vertical, 30MHz to 25GHz)


MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com






Plot for Channel = 11

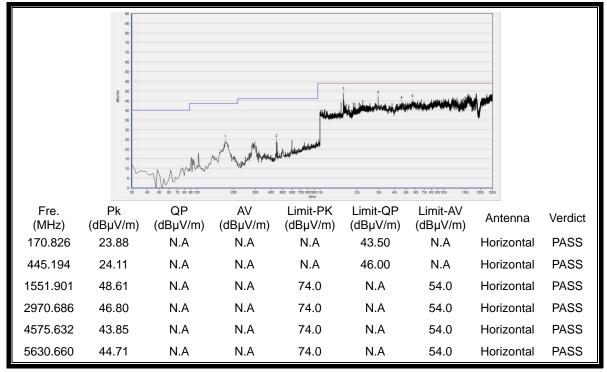

(Antenna Horizontal, 30MHz to 25GHz)

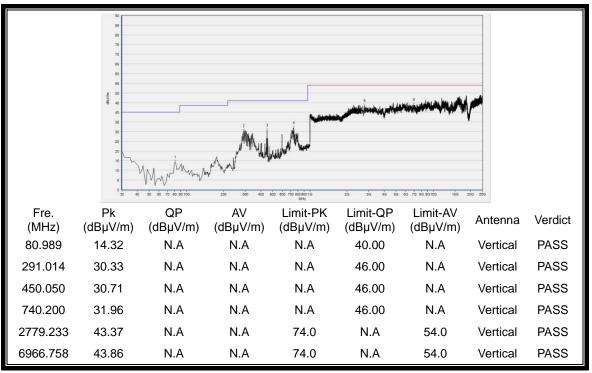

(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.8.3.3 802.11n-20MHz Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

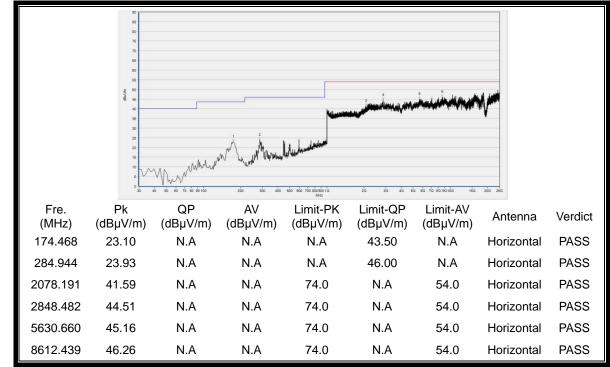


(Antenna Horizontal, 30MHz to 25GHz)

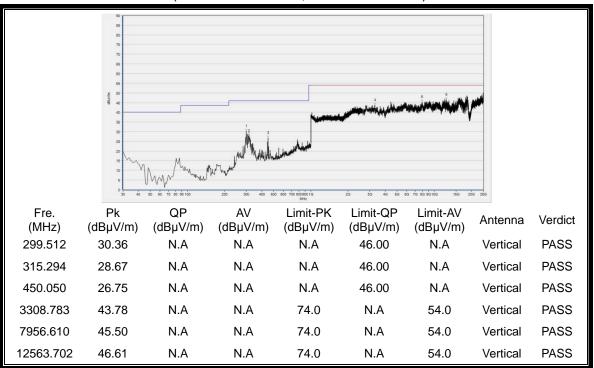

(Antenna Vertical, 30MHz to 25GHz)


MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com






Plot for Channel = 6

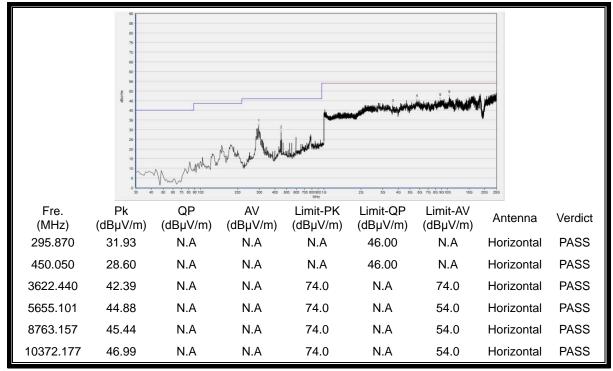

(Antenna Horizontal, 30MHz to 25GHz)

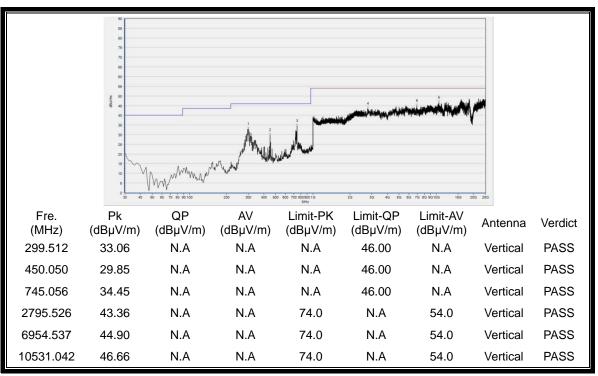


(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plot for Channel = 11

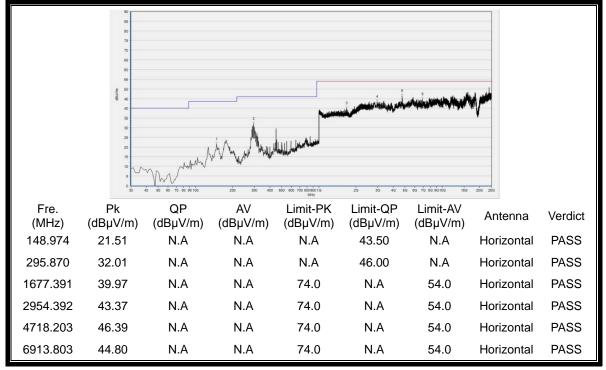

(Antenna Horizontal, 30MHz to 25GHz)

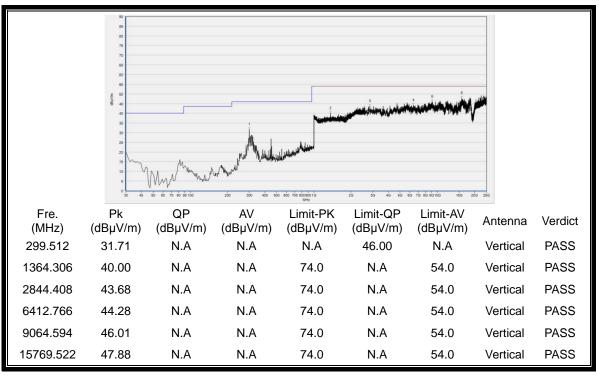

(Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




2.8.3.4 802.11n-40MHz Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 3

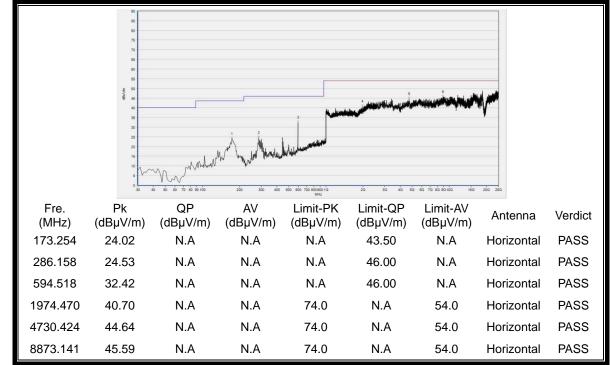

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

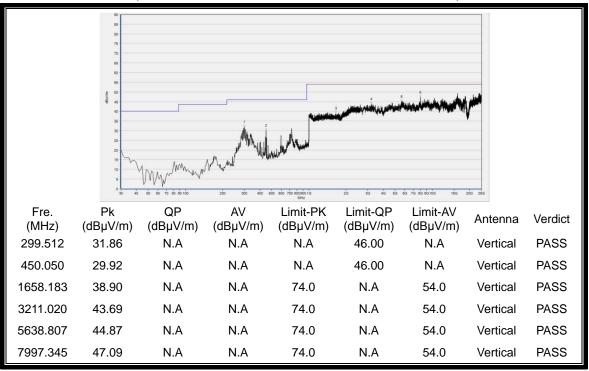


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plots for Channel = 6

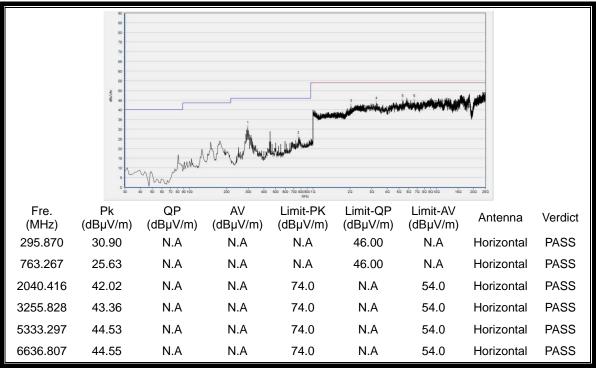

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

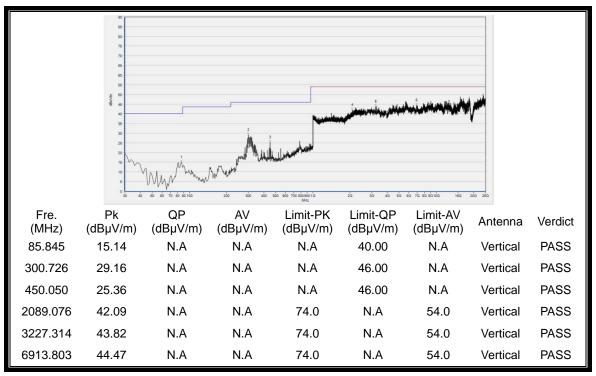


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plots for Channel = 9

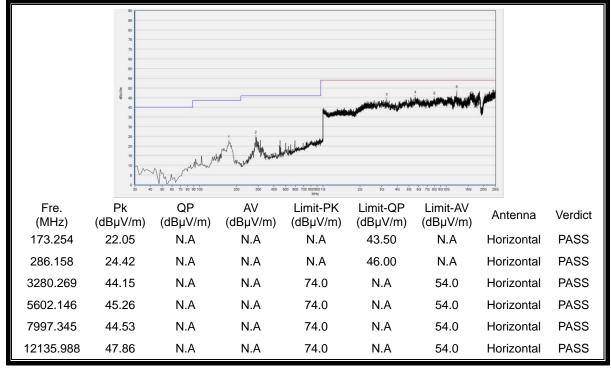

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

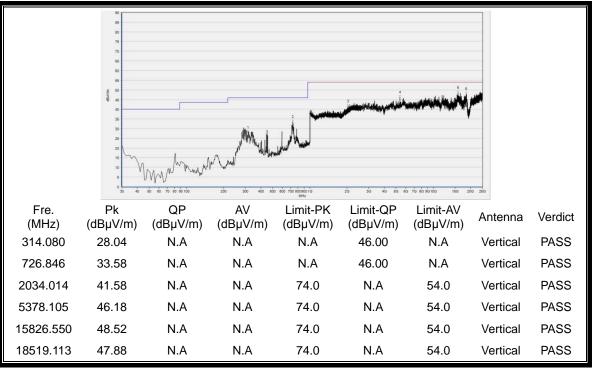

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Shenzhen Morlab Communications Technology Co., Ltd.
Morlab Laboratory
FL.3, Building A, FeiYang Science Park, No.8 LongChang
Road, Block 67, BaoAn District, ShenZhen, GuangDong
Province, P. R. China
Mr. Su Feng
+86 755 36698555
+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang
	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

1.5 Test Equipments Utilized 1.5.1 **Conducted Test Equipments**

Cond	ducted Test Equipme	nt				
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.06.02	2017.06.01
2	Power Splitter	NW521	1506A	Weinschel	2016.06.02	2017.06.01
3	Attenuator 1	(N/A.)	10dB	Resnet	2016.06.02	2017.06.01
4	Attenuator 2	(N/A.)	3dB	Resnet	2016.06.02	2017.06.01
5	EXA Signal Analzyer	MY53470836	N9010A	Agilent	2016.06.02	2017.06.01
6	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
7	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
8	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Cond	ducted Emission Test	Equipments				
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2016.06.02	2017.06.01
2	LISN	812744	NSLK 8127	Schwarzbeck	2016.06.02	2017.06.01
3	Service Supplier	100448	CMU200	R&S	2016.06.02	2017.06.01
4	Pulse Limiter	9391	VTSD	Schwarzbeck	2016.06.02	2017.06.01
	(20dB)		9561-D		2010.00.02	2017.00.01
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A
	(30MHz-26GHz)					

1.5.3 **Auxiliary Test Equipment**

Auxil	iary Test Equipment	t				
No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 73 Of 74



1.5.4 Radiated Test Equipments

Radia	ated Test Equipments	5									
No.	Equipment Name	Serial N	lo.	Туре	e	Manufact	urer	Cal. Dat	е	Cal.Due Date	
1	System Simulator	GB45360	846	8960-E5	515C	Agiler	nt	2016.06.0)2	2017.06.01	
2	Receiver	MY54130	016	N9038	3A	Agiler	nt	2016.06.0)2	2017.06.01	
3	Test Antenna - Bi-Log	N/A		VULB9	163	Schwarzt	beck	2016.07.0	05	2017.07.04	
4	Test Antenna - Horn	9170C-5	31	BBHA9	170	Schwarzt	beck	2016.07.0)5	2017.07.04	
5	Test Antenna - Loop	1519-02	22	FMZB1	519	Schwarzt	beck	2016.07.0)5	2017.07.04	
6	Test Antenna - Horn	71688	}	BBHA 9'	120D	Schwarzt	beck	2016.07.0)5	2017.07.04	
7	Coaxial cable (N male) (9KHz-30MHz)	CB04		EMC)4	Morla	b	N/A		N/A	
8	Coaxial cable (N male) (30MHz-26GHz)	CB02		EMC)2	Morla	b	N/A		N/A	
9	Coaxial cable(N male) (30MHz-26GHz)	CB03		EMC)3	Morla	b	N/A		N/A	
10	1-18GHz pre-Amplifier	MA02	MA02		18	Rohde& Schwarz		2016.07.05		2017.07.04	
11	18-26.5GHz pre-Amplifier	MA03	I	TS-PR	18	Rohde Schwa		2016.07.0	05	2017.07.04	
1	.5.5 Climate Chaml	ber									
Clima	te Chamber										
No.	Equipment Name	uipment Name Serial No.		Туре	Ма	Manufacturer		Cal.Date		Cal.Due Date	
1	Climate Chamber	HL4003T		Yinhe	Yinhe 2017.01.11			2018.01.10			
1	.5.6 Vibration Table										
Vibra	tion Table										
No.	Equipment Name	Serial No.		Туре		Manufacture	er	Cal.Date	C	al.Due Date	
1	Vibration Table	N/A	AC	T2000-S01	5L	CMI-COM		2017.01.11		2018.01.10	
	.5.7 Anechoic Char	nber									
Ane	choic Chamber										
No.	Equipment Name	Serial N	lo.	Туре	-	Manufacture	r (Cal.Date	Ca	I.Due Date	
1	Anechoic Chamber	N/A		9m*6m*6n	n	Changning	2	017.01.11	2	018.01.10	

***** END OF REPORT *****

 MORLAB GROUP
 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com
 E-mail: service@morlab.cn