

TEST REPORT

Report No.: BCTC2407086293-2E

Applicant: Accutime Watch Corp

Product Name: Kids Smart Watch

Test Model: HK4254

Tested Date: 2024-07-22 to 2024-12-26

Issued Date: 2024-12-26

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2ALPLQ110S

Product Name: Kids Smart Watch

Trademark: N/A

Model/Type reference: HK4254
MIN4305

Prepared For: Accutime Watch Corp

Address: 1001 Ave of the Americas New York, United States 10018

Manufacturer: Accutime Watch Corp

Address: 1001 Ave of the Americas New York, United States 10018

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-07-22

Sample tested Date: 2024-07-22 to 2024-12-26

Issue Date: 2024-12-26

Report No.: BCTC2407086293-2E

Test Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part22 Subpart H
FCC CFR Title 47 Part24 Subpart E
FCC CFR Title 47 Part27 Subpart L
ANSI/ TIA/ EIA-603-D-2010
FCC KDB 971168 D01 Power Meas. License Digital Systems v03v01

Test Results: PASS

Remark: This is GSM & WCDMAradio test report.

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	8
5. Test Facility And Test Instrument Used	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF Output Power	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	13
6.3 Test procedure	14
6.4 Test Result	14
7. Peak-to-average Ratio(PAR) of Transmitter	23
7.1 Block Diagram Of Test Setup	23
7.2 Limit	23
7.3 Test procedure	23
7.4 Test Result	23
8. Emission Bandwidth	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	39
9. Out of Band Emissions at Antenna Terminal	55
9.1 Block Diagram Of Test Setup	55
9.2 Limit	55
9.3 Test procedure	55
9.4 Test Result	55
10. Spurious Radiated Emissions	79
10.1 Block Diagram Of Test Setup	79
10.2 Limit	80
10.3 Test procedure	80
10.4 Test Result	81
11. Frequency Stability	84
11.1 Block Diagram Of Test Setup	84
11.2 Limit	84
11.3 Test procedure	84
11.4 Test Result	85
12. EUT Photographs	88
13. EUT Test Setup Photographs	89

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2407086293-2E	2024-12-26	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	RF Exposure	§1.1307, §2.1093	PASS
2	RF Output Power	§22.913 (a), §24.232 (c), §27.50,	PASS
3	Peak-to-average Ratio(PAR) of Transmitter	§24.232(d), §22.913, §27.50,	PASS
4	Emission Bandwidth	§22.917 (b), §24.238(b), §27.53	PASS
5	Spurious Emissions at Antenna Terminal	§22.917 (a), §24.238 (a), §27.53	PASS
6	Spurious Radiation Emissions	§22.917 (a), §24.238 (a), §27.53	PASS
7	Out of Band Emissions	§22.917 (a), §24.238 (a), §27.53	PASS
8	Frequency Stability	§22.355, §24.235, §27.54	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	HK4254 MIN4305
Model differences:	All the model are the same circuit and RF module, except model names and appearance of the color.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	GSM/GPRS/EGPRS 850: TX: 824~849MHz; RX: 869~894MHz; GSM/GPRS/EGPRS 1900: TX:1850~1910MHz; RX:1930~1990MHz; WCDMA Band II: TX: 1852.40~1907.60MHz; Rx: 1932.60~1987.40MHz; WCDMA Band IV: TX: 1712.40~1752.60MHz; RX: 2112.60 – 2452.40MHz WCDMA Band V: TX: 826.40~846.60MHz; RX: 871.40~ 891.60MHz;
GPRS Class:	Class 12
Max RF Output Power:	GSM/GPRS/EGPRS 850: 32.96 dBm, GSM/GPRS/EGPRS 1900: 29.82 dBm WCDMA Band II: 22.79 dBm WCDMA Band IV: 22.87 dBm WCDMA Band V: 22.83 dBm
Type of Modulation:	GSM with GMSK Modulation EGPRS with 8PSK Modulation WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Type of Emission:	GSM/GPRS 850: 249KGXW GSM/GPRS 1900: 252KGXW EGPRS 850:245KG7W EGPRS 1900:250KG7W WCDMA Band II: 4M18F9W WCDMA Band IV: 4M16F9W WCDMA Band V: 4M16F9W
Antenna installation:	Internal antenna GSM850: -6.34 dBi GSM1900: -1.71 dBi WCDMA Band II: -1.71 dBi WCDMA Band IV: -1.53 dBi WCDMA Band V: -6.34 dBi
Antenna Gain:	Remark: ☐ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☒ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Connecting I/O Port(s)	Please refer to the User's Manual
Ratings:	DC 3.8V from battery, DC 5V from USB

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Kids Smart Watch	N/A	HK4254	N/A	EUT

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.5 Test Mode

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EGPRS	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EGPRS	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band II	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
WCDMA Band IV	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1740 MHz	1450
		1752.6 MHz	1513
WCDMA Band V	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.4 MHz	4182
		846.6 MHz	4233
Note 1: the transmitter has been tested on the communications mode of WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

EUT Cable List and Details


Cable Description	Length (M)	Shielded/Unshielded	With Core/ Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/ Without Core
/	/	/	/

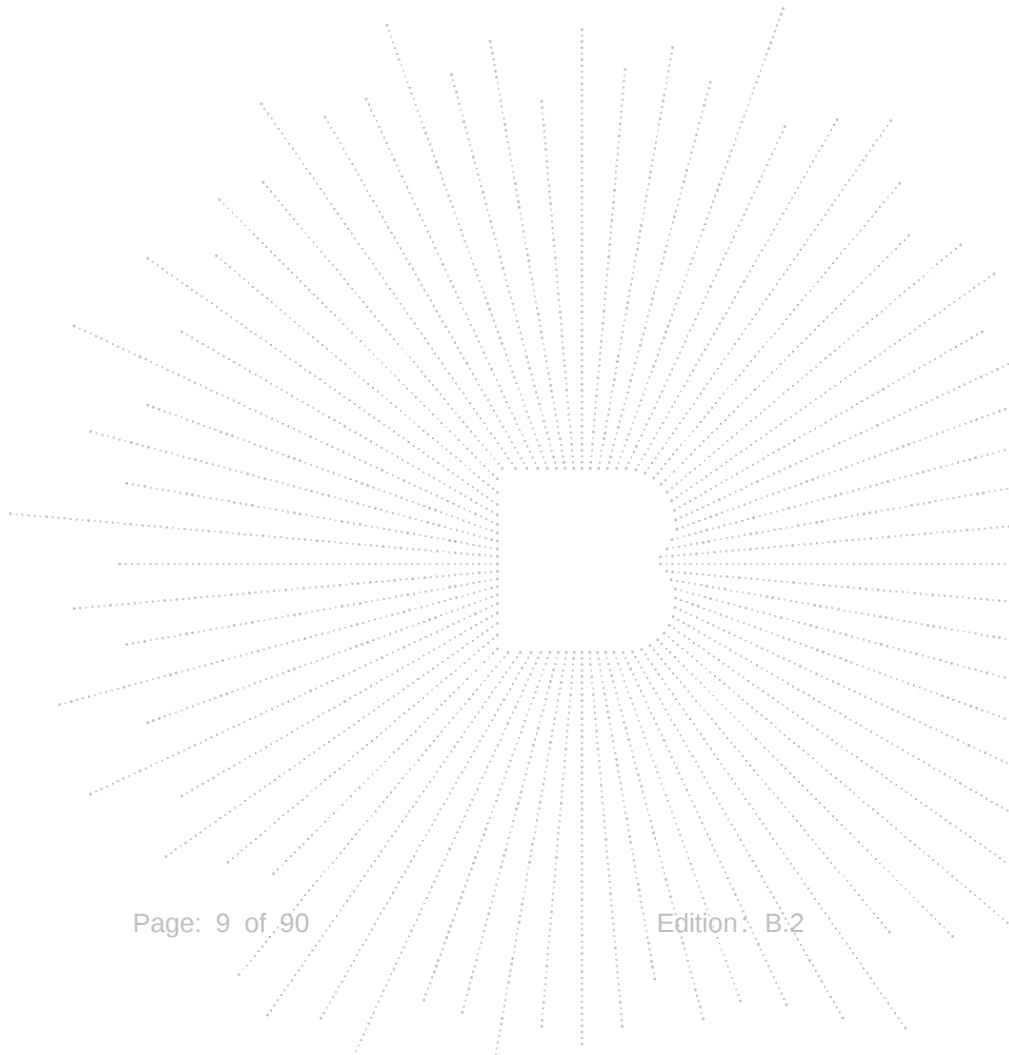

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212


ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFCB	\	\	\
Software	MAIWEI	MTS 8310	\	\	\


Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

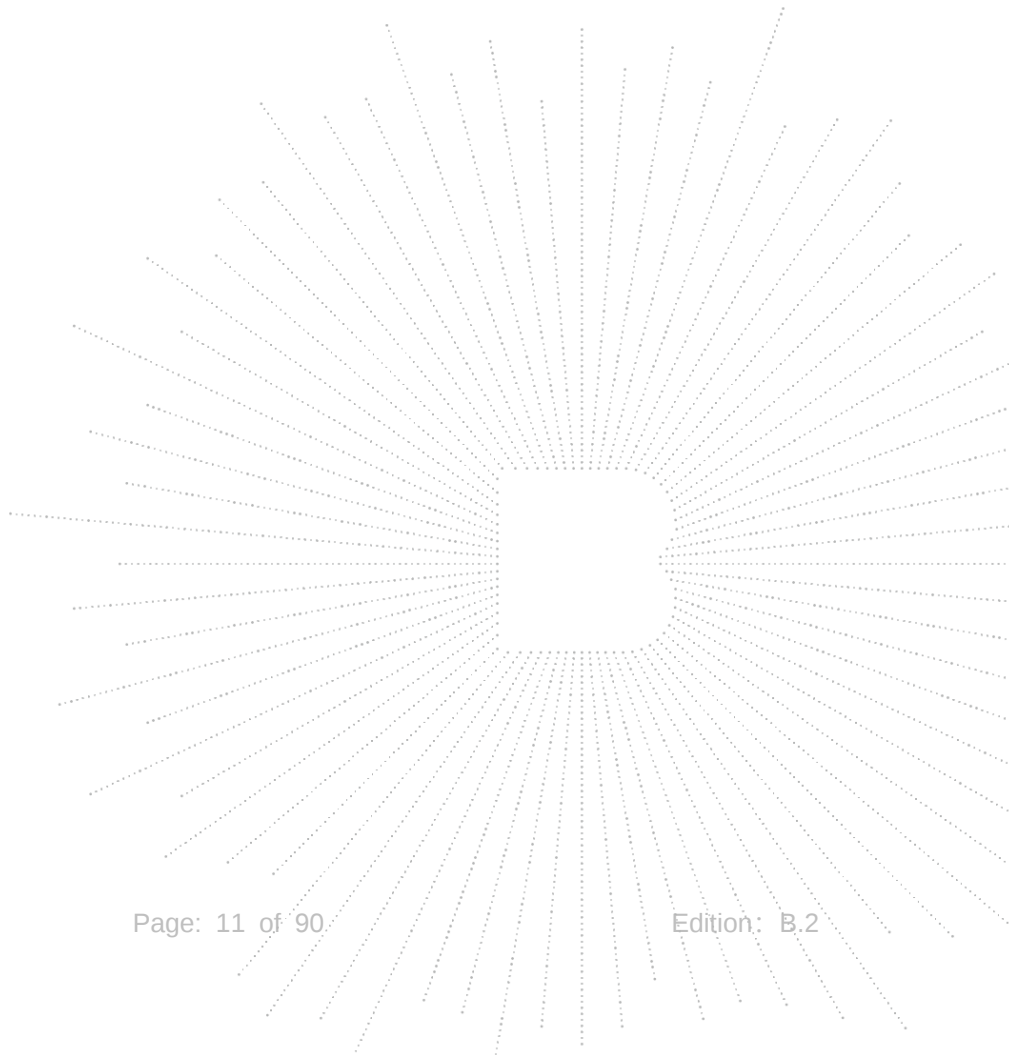

6. RF Output Power


6.1 Block Diagram Of Test Setup

Conducted output power test method:

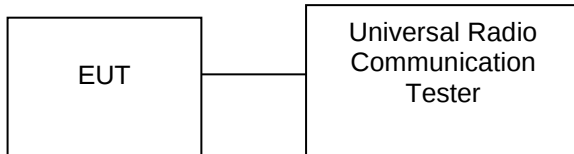


Radiated power test method:


(A) Radiated Emission Test-Up Frequency Below 30MHz

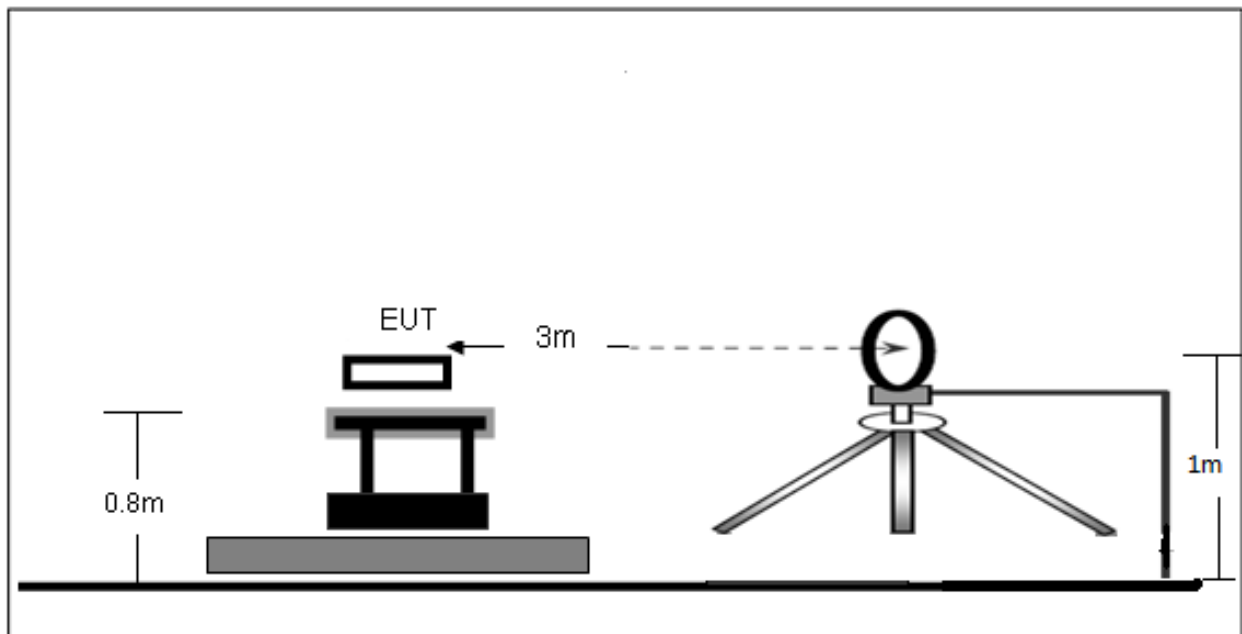

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

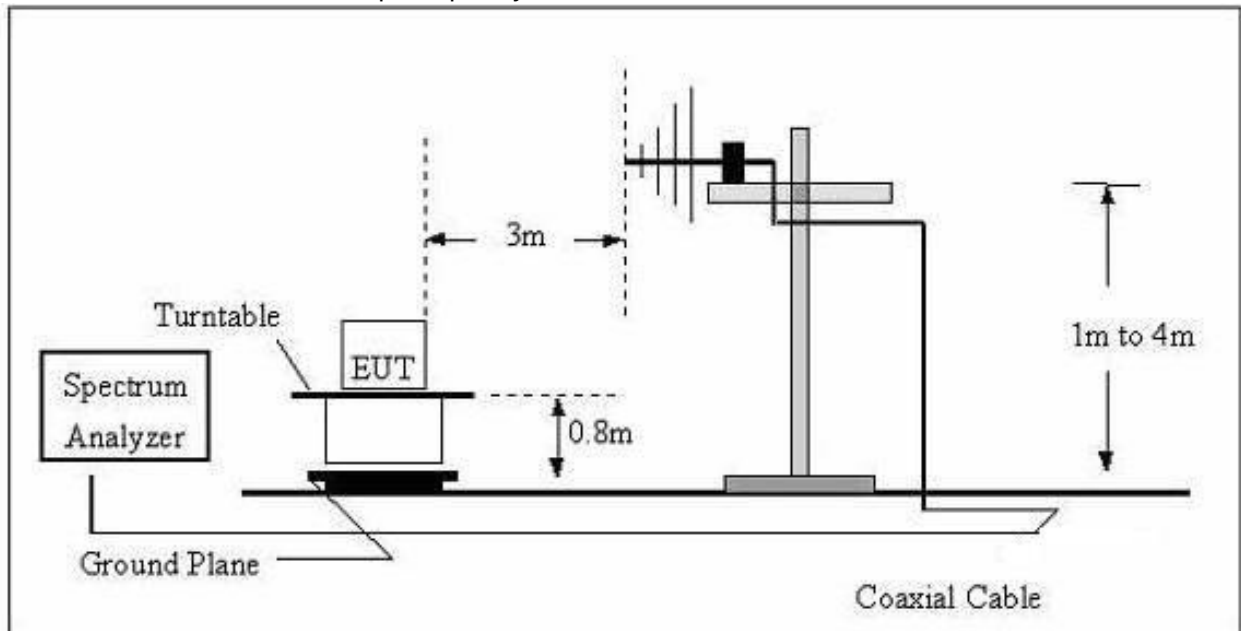

(C) Radiated Emission Test-Up Frequency Above 1GHz

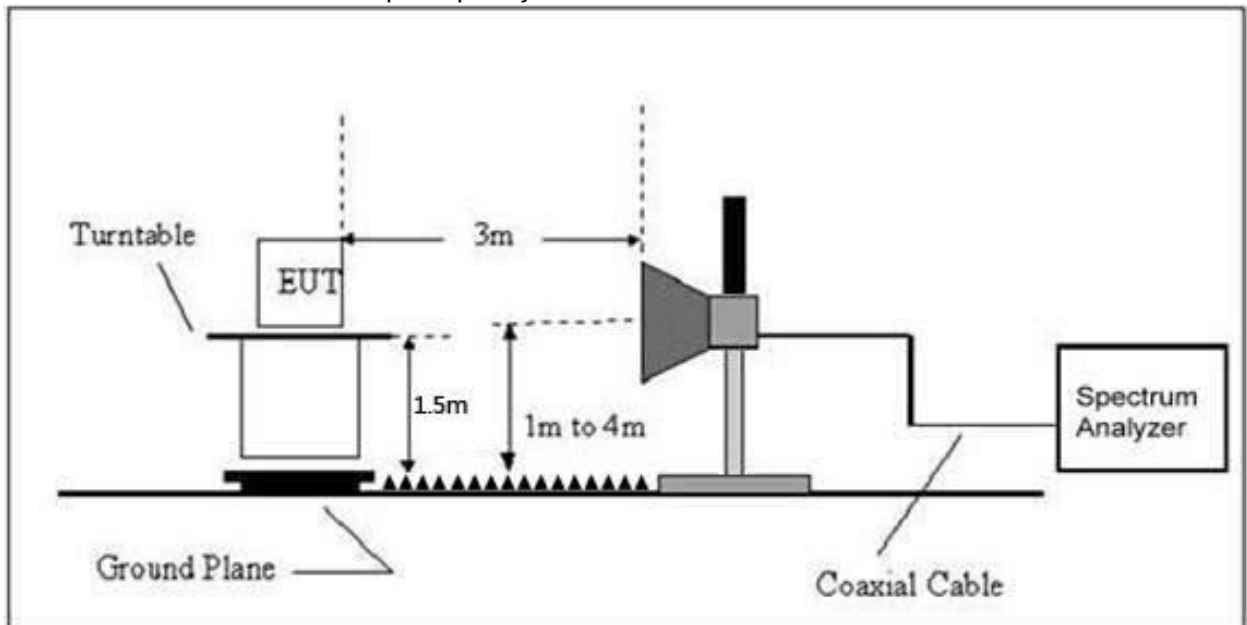

6.2 Limit

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

6.3 Test procedure

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.4 Test Result

ERP For GSM Mode GSM850

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
824.2	H	55.13	-26.29	28.84	38.45	PASS
824.2	V	54.94	-26.29	28.65	38.45	PASS
Middle Channel						
836.6	H	54.84	-26.35	28.49	38.45	PASS
836.6	V	55.51	-26.35	29.16	38.45	PASS
High Channel						
848.8	H	56.33	-26.42	29.91	38.45	PASS
848.8	V	54.76	-26.42	28.34	38.45	PASS

EIRP For GSM Mode PCS1900


Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm) (dBm)	Result
Low Channel						
1850.2	H	55.02	-26.93	28.09	33.00	PASS
1850.2	V	55.34	-26.93	28.41	33.00	PASS
Middle Channel						
1880	H	56.38	-26.86	29.52	33.00	PASS
1880	V	54.83	-26.86	27.97	33.00	PASS
High Channel						
1909.8	H	56.04	-26.80	29.24	33.00	PASS
1909.8	V	55.48	-26.80	28.68	33.00	PASS

ERP For GPRS Mode GSM850

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
824.2	H	53.75	-26.29	27.46	38.45	PASS
824.2	V	52.71	-26.29	26.42	38.45	PASS
Middle Channel						
836.6	H	53.66	-26.35	27.31	38.45	PASS
836.6	V	53.32	-26.35	26.97	38.45	PASS
High Channel						
848.8	H	54.51	-26.42	28.09	38.45	PASS
848.8	V	53.36	-26.42	26.94	38.45	PASS

EIRP For GPRS Mode PCS1900

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1850.2	H	56.28	-26.93	29.35	33.00	PASS
1850.2	V	55.01	-26.93	28.08	33.00	PASS
Middle Channel						
1880	H	56.26	-26.86	29.40	33.00	PASS
1880	V	54.67	-26.86	27.81	33.00	PASS
High Channel						
1909.8	H	55.64	-26.80	28.84	33.00	PASS
1909.8	V	54.98	-26.80	28.18	33.00	PASS

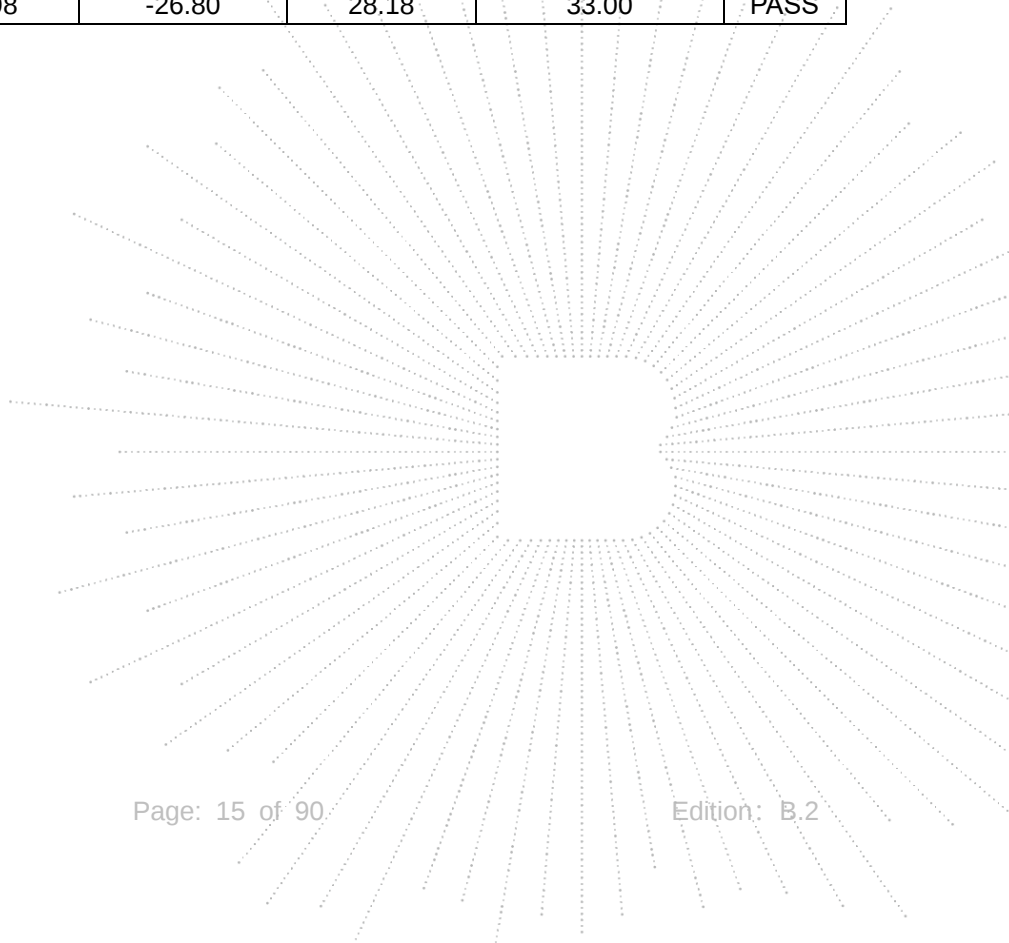

ERP For EGPRS Mode GSM850

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
824.2	H	55.26	-26.29	28.97	38.45	PASS
824.2	V	55.20	-26.29	28.91	38.45	PASS
Middle Channel						
836.6	H	55.17	-26.35	28.82	38.45	PASS
836.6	V	55.11	-26.35	28.76	38.45	PASS
High Channel						
848.8	H	55.05	-26.42	28.63	38.45	PASS
848.8	V	54.92	-26.42	28.50	38.45	PASS

EIRP For EGPRS Mode PCS1900

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1850.2	H	55.99	-26.93	29.06	33.00	PASS
1850.2	V	55.07	-26.93	28.14	33.00	PASS
Middle Channel						
1880	H	55.13	-26.86	28.27	33.00	PASS
1880	V	54.69	-26.86	27.83	33.00	PASS
High Channel						
1909.8	H	54.71	-26.80	27.91	33.00	PASS
1909.8	V	55.23	-26.80	28.43	33.00	PASS

EIRP For WCDMA Mode Band II

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1852.4	H	48.47	-26.92	21.55	33.00	PASS
1852.4	V	49.21	-26.92	22.29	33.00	PASS
Middle Channel						
1880	H	48.84	-26.86	21.98	33.00	PASS
1880	V	48.68	-26.86	21.82	33.00	PASS
High Channel						
1907.6	H	48.75	-26.80	21.95	33.00	PASS
1907.6	V	49.07	-26.80	22.27	33.00	PASS

EIRP For HSDPA Mode Band II

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1852.4	H	49.01	-26.92	22.09	33.00	PASS
1852.4	V	49.18	-26.92	22.26	33.00	PASS
Middle Channel						
1880	H	48.56	-26.86	21.70	33.00	PASS
1880	V	48.39	-26.86	21.53	33.00	PASS
High Channel						
1907.6	H	49.02	-26.80	22.22	33.00	PASS
1907.6	V	49.13	-26.80	22.33	33.00	PASS

EIRP For HSUPA Mode Band II

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 24E Limits (dBm)	Result
Low Channel						
1852.4	H	48.62	-26.92	21.70	33.00	PASS
1852.4	V	48.35	-26.92	21.43	33.00	PASS
Middle Channel						
1880	H	49.14	-26.86	22.28	33.00	PASS
1880	V	49.05	-26.86	22.19	33.00	PASS
High Channel						
1907.6	H	49.06	-26.80	22.26	33.00	PASS
1907.6	V	48.88	-26.80	22.08	33.00	PASS

EIRP For WCDMA Mode Band IV

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel						
1712.4	H	49.63	-27.23	22.40	33.00	PASS
1712.4	V	48.41	-27.23	21.18	33.00	PASS
Middle Channel						
1740	H	50.07	-27.19	22.88	33.00	PASS
1740	V	48.94	-27.19	21.75	33.00	PASS
High Channel						
1752.6	H	48.82	-27.14	21.68	33.00	PASS
1752.6	V	49.22	-27.14	22.08	33.00	PASS

EIRP For HSDPA Mode Band IV

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel						
1712.4	H	47.47	-27.23	20.24	33.00	PASS
1712.4	V	47.73	-27.23	20.50	33.00	PASS
Middle Channel						
1740	H	48.04	-27.19	20.85	33.00	PASS
1740	V	47.81	-27.19	20.62	33.00	PASS
High Channel						
1752.6	H	47.39	-27.14	20.25	33.00	PASS
1752.6	V	47.40	-27.14	20.26	33.00	PASS

EIRP For HSUPA Mode Band IV

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 27L Limits (dBm)	Result
Low Channel						
1712.4	H	49.14	-27.23	21.91	33.00	PASS
1712.4	V	49.09	-27.23	21.86	33.00	PASS
Middle Channel						
1740	H	49.88	-27.19	22.69	33.00	PASS
1740	V	48.30	-27.19	21.11	33.00	PASS
High Channel						
1752.6	H	48.29	-27.14	21.15	33.00	PASS
1752.6	V	48.56	-27.14	21.42	33.00	PASS

ERP For WCDMA Mode Band V

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
826.4	H	46.44	-26.29	20.15	38.45	PASS
826.4	V	45.44	-26.29	19.15	38.45	PASS
Middle Channel						
836.4	H	46.48	-26.35	20.13	38.45	PASS
836.4	V	45.65	-26.35	19.30	38.45	PASS
High Channel						
846.6	H	45.42	-26.42	19.00	38.45	PASS
846.6	V	46.10	-26.42	19.68	38.45	PASS

ERP For HSDPA Mode Band V

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
826.4	H	46.54	-26.29	20.25	38.45	PASS
826.4	V	46.21	-26.29	19.92	38.45	PASS
Middle Channel						
836.4	H	46.35	-26.35	20.00	38.45	PASS
836.4	V	46.25	-26.35	19.90	38.45	PASS
High Channel						
846.6	H	47.27	-26.42	20.85	38.45	PASS
846.6	V	45.90	-26.42	19.48	38.45	PASS

ERP For HSUPA Mode Band V

Frequency (MHz)	Polar (H/V)	Reading Level (dBm)	Correct Factor (dB)	Measurement (dBm)	FCC Part 22H Limits (dBm)	Result
Low Channel						
826.4	H	46.76	-26.29	20.47	38.45	PASS
826.4	V	46.01	-26.29	19.72	38.45	PASS
Middle Channel						
836.4	H	45.98	-26.35	19.63	38.45	PASS
836.4	V	45.94	-26.35	19.59	38.45	PASS
High Channel						
846.6	H	46.31	-26.42	19.89	38.45	PASS
846.6	V	45.71	-26.42	19.29	38.45	PASS

Correction Factor= S.G. Power - Cable loss + Antenna Gain- SPA. Reading

Max. Conducted Output Power

For Cellular Band (GSM850)

Band	GSM850		
Channel	128	190	251
Frequency(MHz)	824.2	836.6	848.8
GSM	32.96	32.65	32.70
GPRS Slot -1	30.77	31.03	31.24
GPRS Slot -2	30.12	30.68	30.7
GPRS Slot -3	29.19	28.9	28.9
GPRS Slot -4	27.23	26.97	26.96
EGPRS Slot -1	26.26	26.76	26.08
EGPRS Slot -2	25.43	25.75	25.23
EGPRS Slot -3	22.22	23.14	22.23
EGPRS Slot -4	20.02	20.96	19.88


For PCS Band (GSM1900)

Band	GSM1900		
Channel	512	661	810
Frequency(MHz)	1850.2	1880	1909.8
GSM	28.63	28.86	29.69
GPRS Slot -1	28.79	28.99	29.82
GPRS Slot -2	26.97	26.88	26.9
GPRS Slot -3	25.36	25.27	25.26
GPRS Slot -4	23.41	23.32	23.31
EGPRS Slot -1	25.98	26.25	25.47
EGPRS Slot -2	24.33	24.34	23.33
EGPRS Slot -3	22.06	21.83	21.13
EGPRS Slot -4	19.91	19.29	18.71

Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency(MHz)	1852.4	1880.0	1907.6
WCDMA RMC 12.2K	22.29	22.20	22.18
HSDPA Subtest-1	22.67	22.79	22.44
HSDPA Subtest-2	22.15	22.36	22.11
HSDPA Subtest-3	21.87	22.20	21.71
HSDPA Subtest-4	21.78	21.99	21.62
HSUPA Subtest-1	22.51	22.56	22.23
HSUPA Subtest-2	22.48	22.76	22.38
HSUPA Subtest-3	21.99	22.31	22.06
HSUPA Subtest-4	22.47	22.78	22.40
HSUPA Subtest-5	22.27	22.54	22.13


Band	WCDMA Band IV		
Channel	1312	1450	1513
Frequency(MHz)	1712.4	1740	1752.6
WCDMA RMC 12.2K	22.27	22.21	22.14
HSDPA Subtest-1	22.81	21.98	22.13
HSDPA Subtest-2	22.32	21.70	21.81
HSDPA Subtest-3	21.79	21.39	21.67
HSDPA Subtest-4	22.10	21.07	21.31
HSUPA Subtest-1	22.87	21.98	22.11
HSUPA Subtest-2	22.84	22.09	22.25
HSUPA Subtest-3	22.41	21.74	21.93
HSUPA Subtest-4	22.66	22.05	22.17
HSUPA Subtest-5	22.59	21.86	21.93

Band	WCDMA Band V		
Channel	4132	4182	4233
Frequency(MHz)	826.4	836.4	846.6
WCDMA RMC 12.2K	22.72	22.56	22.58
HSDPA Subtest-1	22.78	22.59	22.48
HSDPA Subtest-2	22.39	22.33	22.22
HSDPA Subtest-3	22.31	22.06	21.96
HSDPA Subtest-4	22.08	21.94	21.93
HSUPA Subtest-1	22.83	22.55	22.42
HSUPA Subtest-2	22.75	22.62	22.49
HSUPA Subtest-3	22.35	22.25	21.94
HSUPA Subtest-4	22.73	22.57	22.46
HSUPA Subtest-5	22.69	22.35	22.38

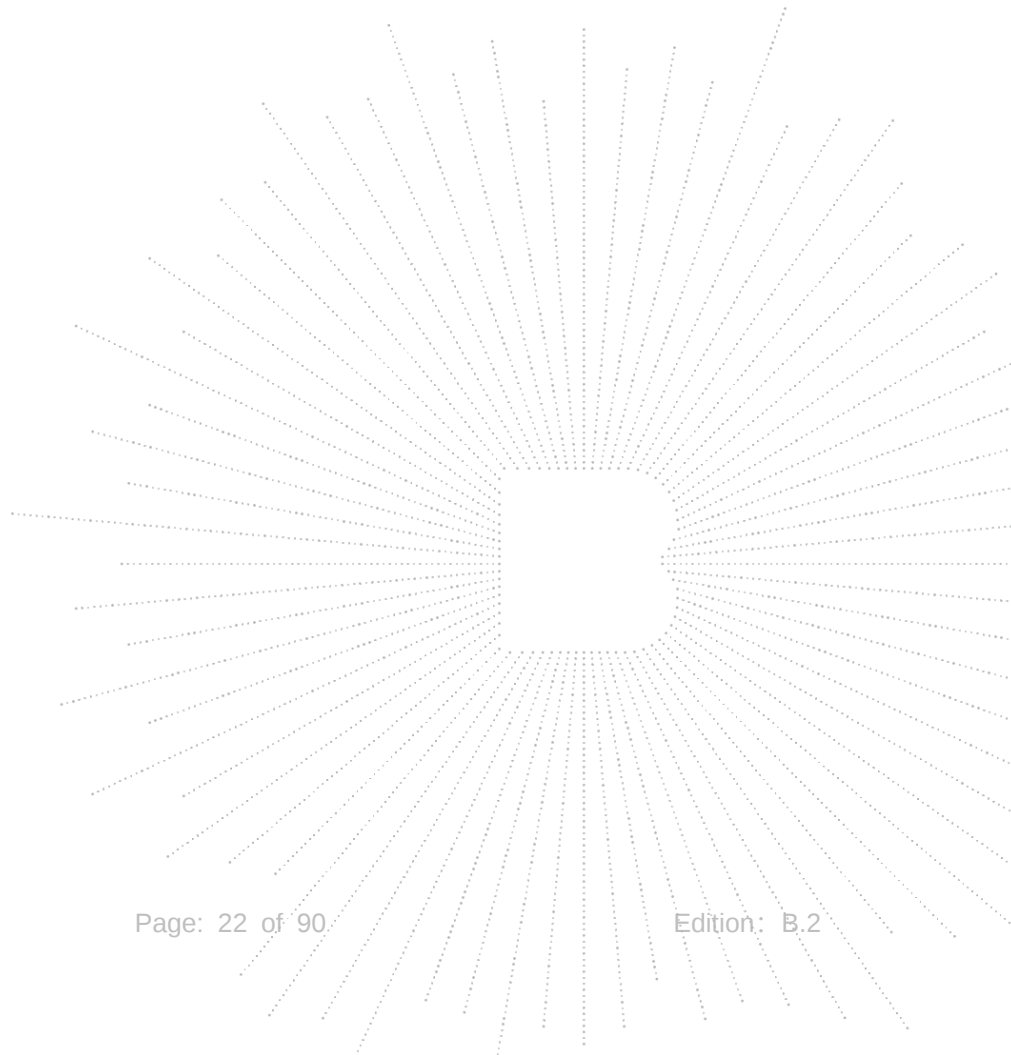

7. Peak-to-average Ratio(PAR) of Transmitter

7.1 Block Diagram Of Test Setup

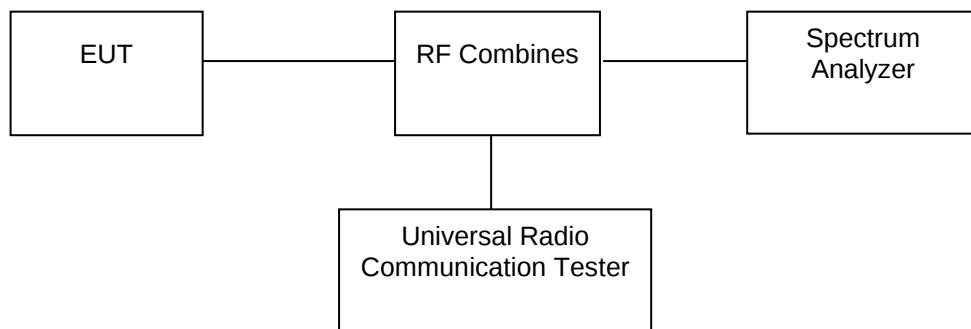

7.2 Limit

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.


7.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.


7.4 Test Result

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM850	128	824.2	2.69	13.00	PASS
GSM850	190	836.6	2.71	13.00	PASS
GSM850	251	848.8	2.67	13.00	PASS
GPRS850	128	824.2	2.62	13.00	PASS
GPRS850	190	836.6	2.67	13.00	PASS
GPRS850	251	848.8	2.62	13.00	PASS
EGPRS850	128	824.2	7.51	13.00	PASS
EGPRS850	190	836.6	10.37	13.00	PASS
EGPRS850	251	848.8	8.03	13.00	PASS


GSM850 Channel=128

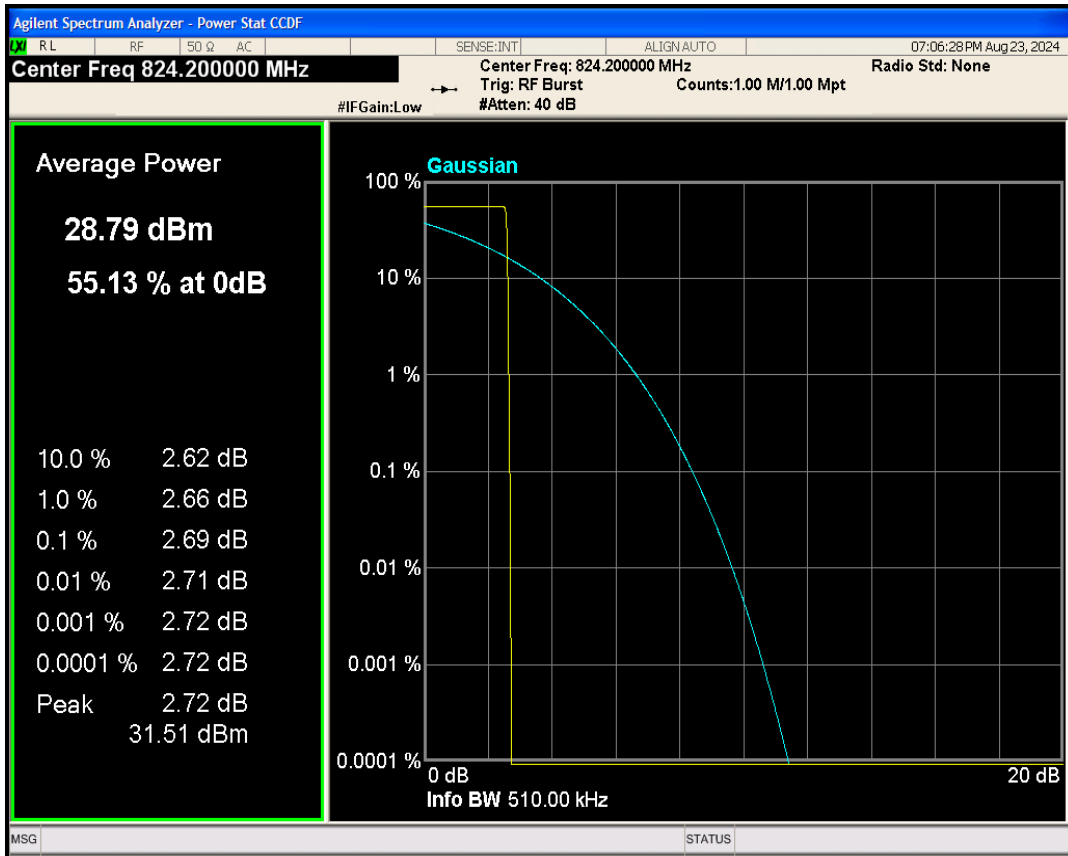


GSM850 Channel=190

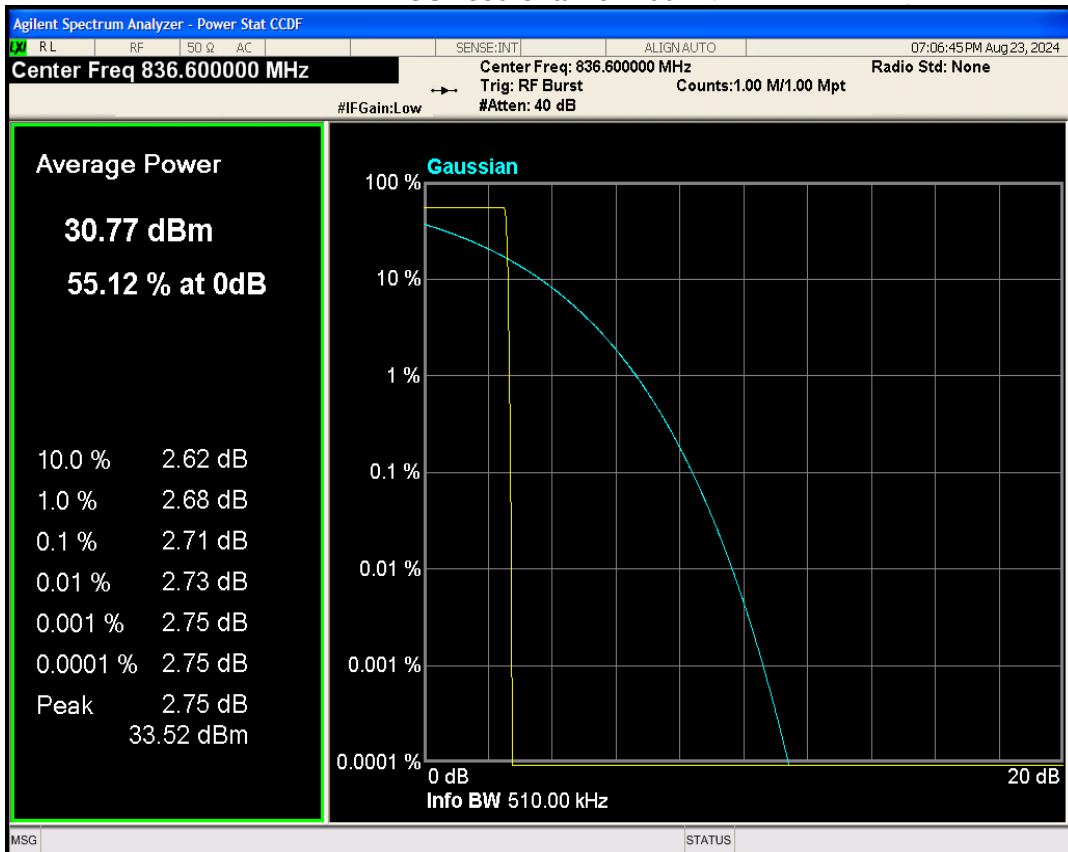


GSM850 Channel=251

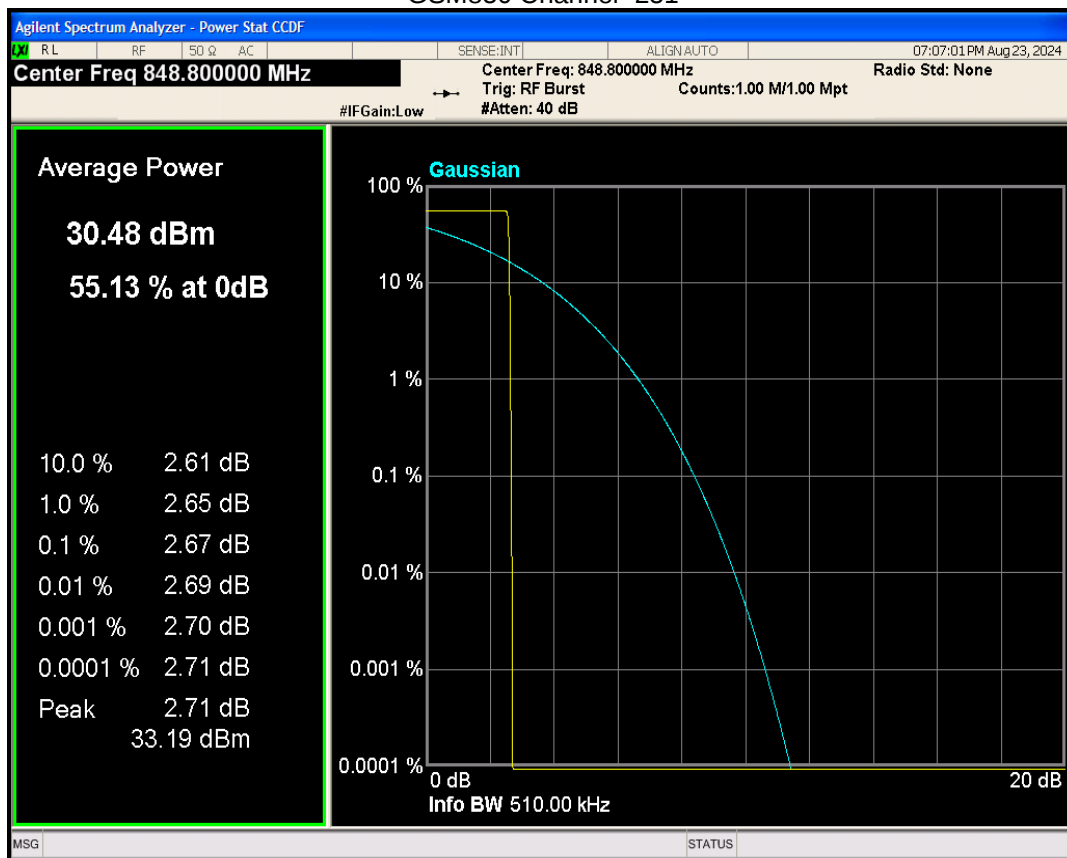


GPRS850 Channel=128

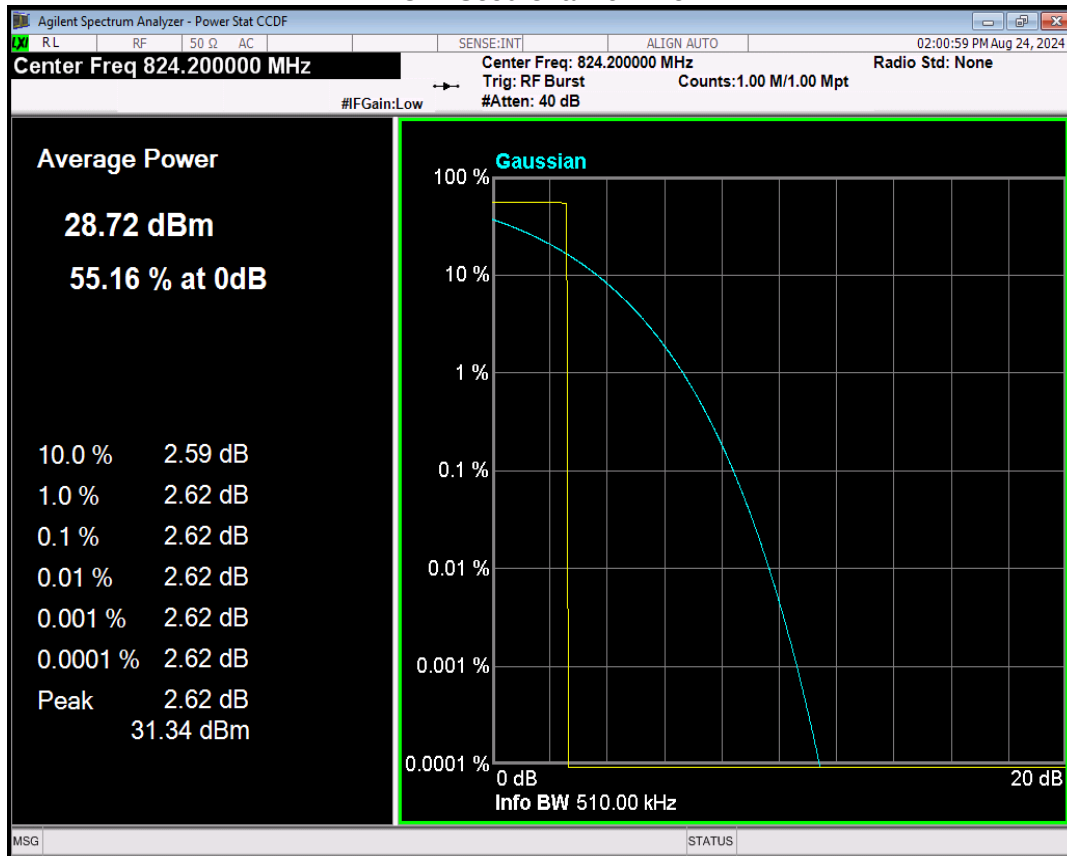


GPRS850 Channel=190

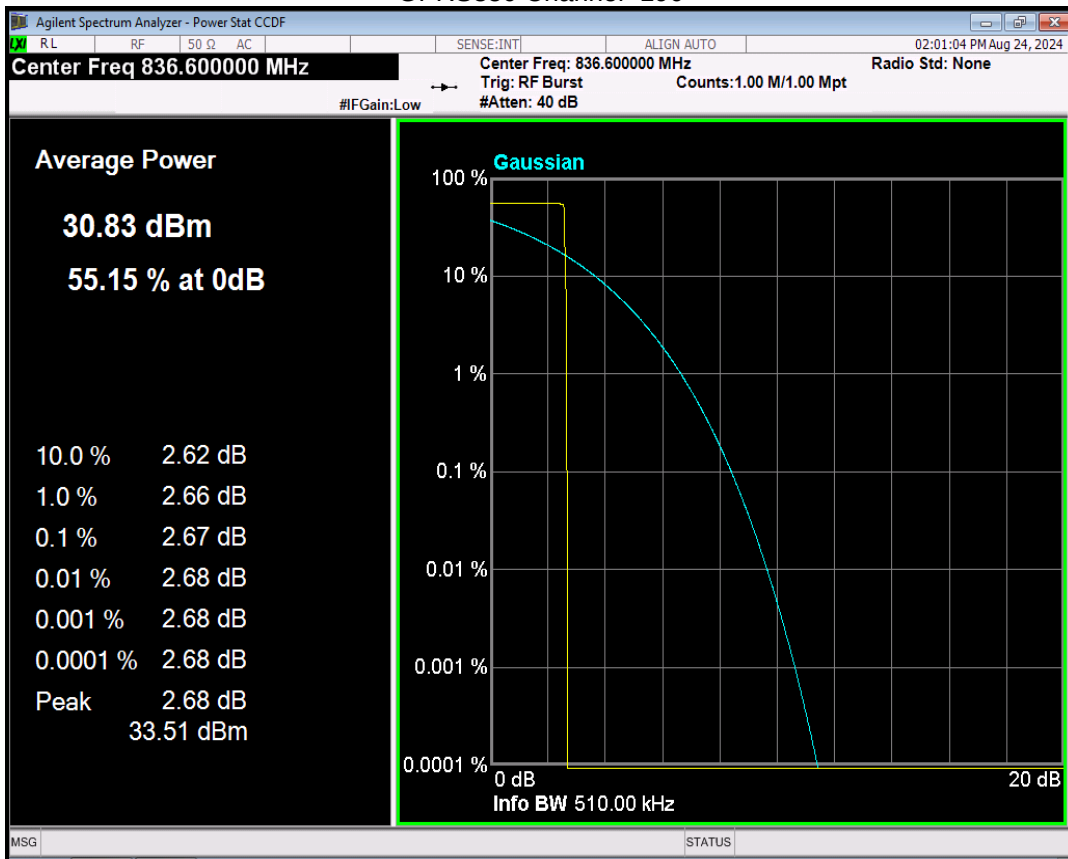


GPRS850 Channel=251

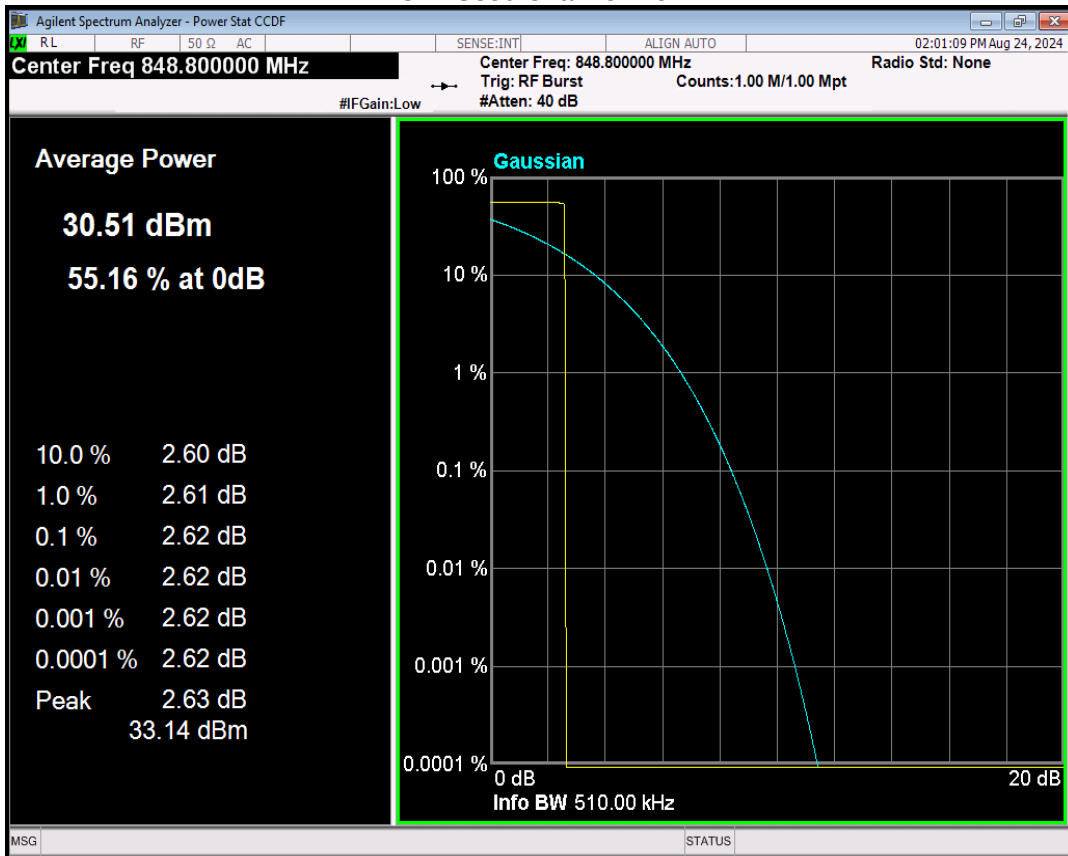


EGPRS850 Channel=128

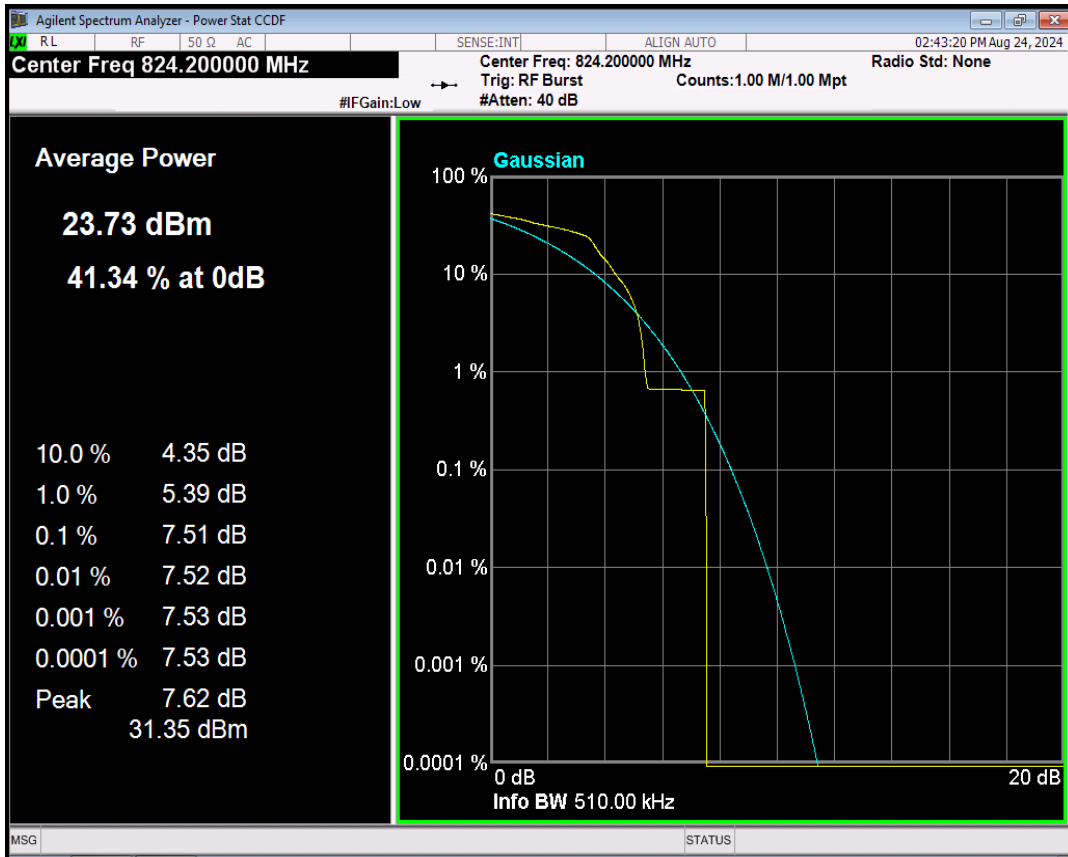

EGPRS850 Channel=190

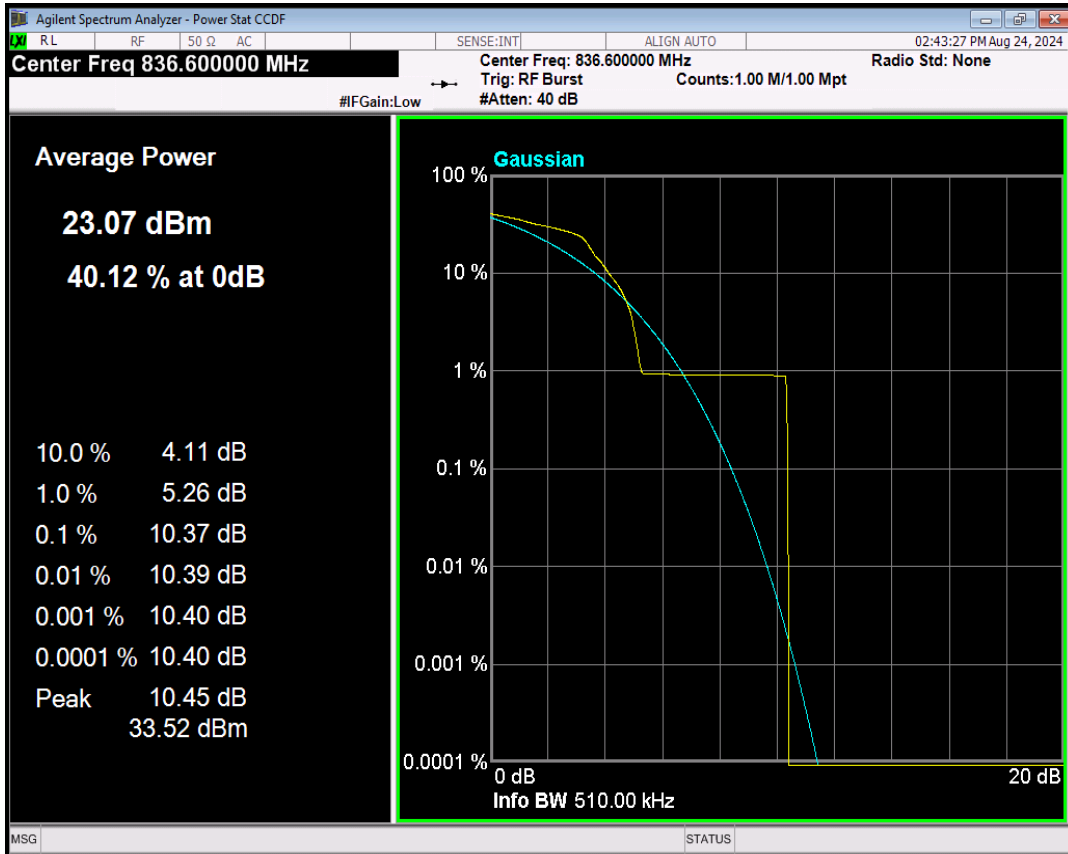


EGPRS850 Channel=251

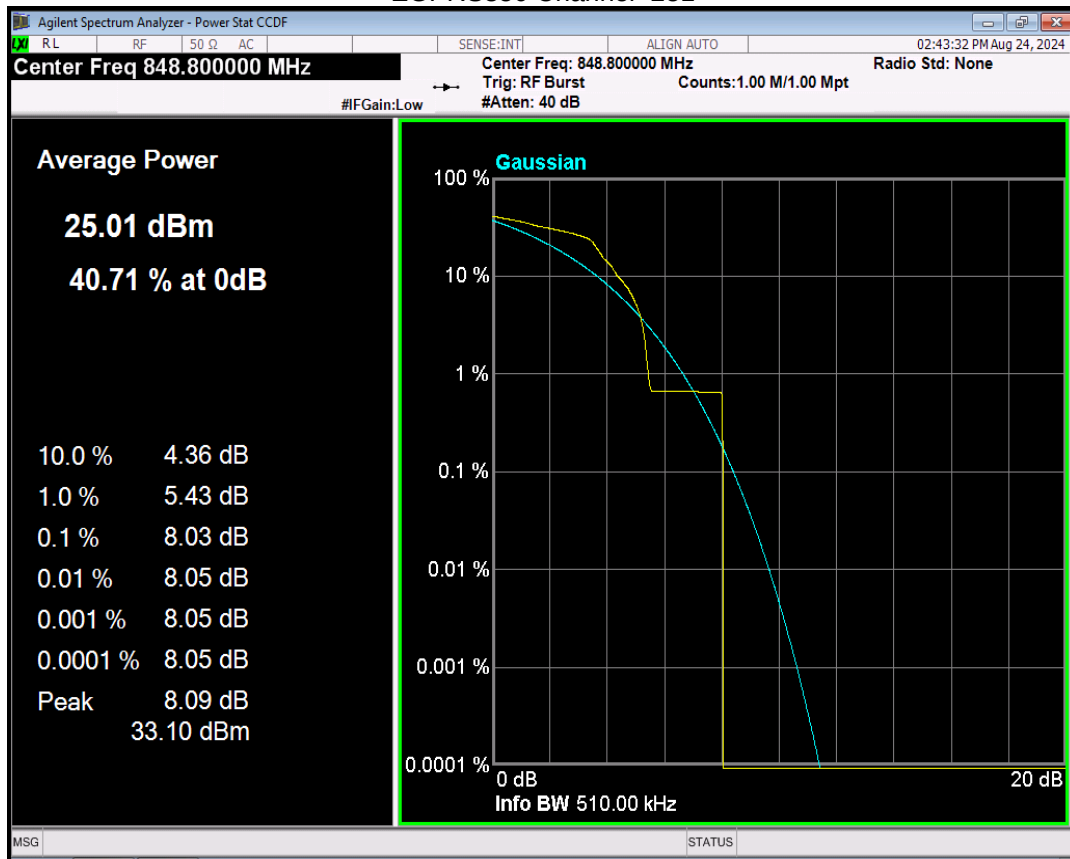


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.66	13.00	PASS
GSM1900	661	1880	2.67	13.00	PASS
GSM1900	810	1909.8	2.67	13.00	PASS
GPRS1900	512	1850.2	2.64	13.00	PASS
GPRS1900	661	1880	2.64	13.00	PASS
GPRS1900	810	1909.8	2.64	13.00	PASS
EGPRS1900	512	1850.2	5.42	13.00	PASS
EGPRS1900	661	1880	5.56	13.00	PASS
EGPRS1900	810	1909.8	5.89	13.00	PASS


GSM1900 Channel=512

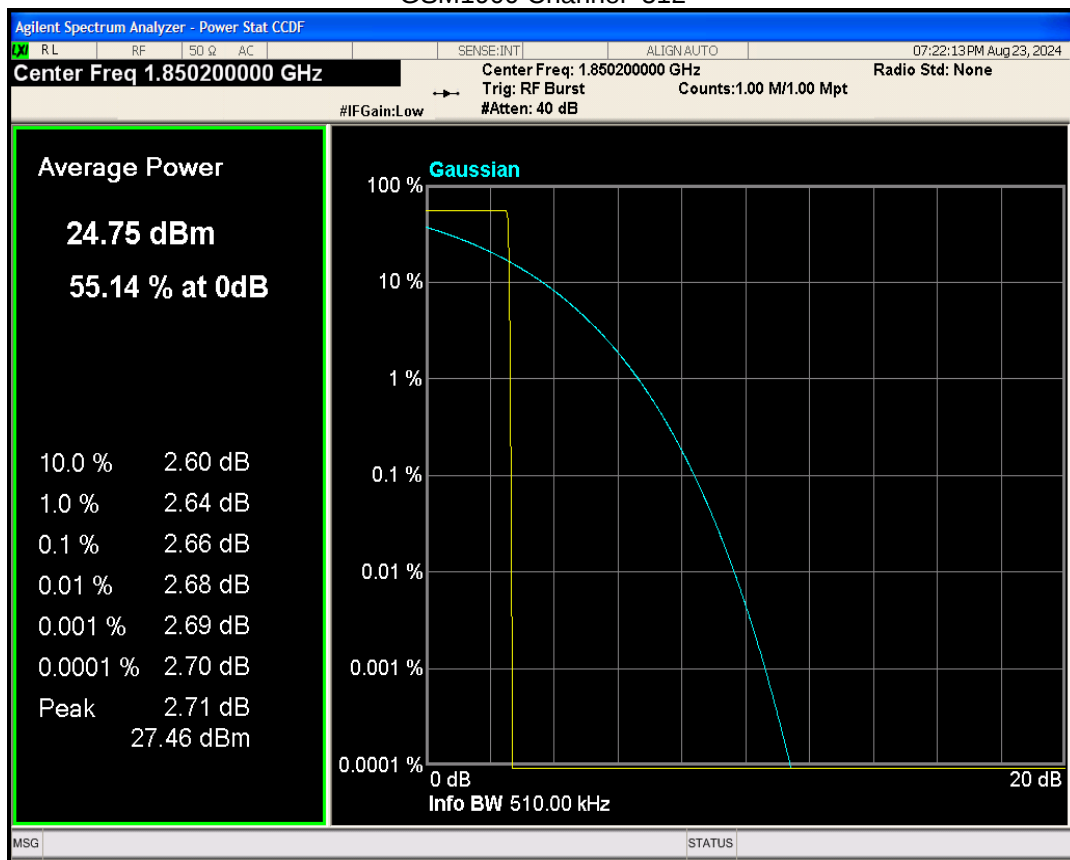


GSM1900 Channel=661

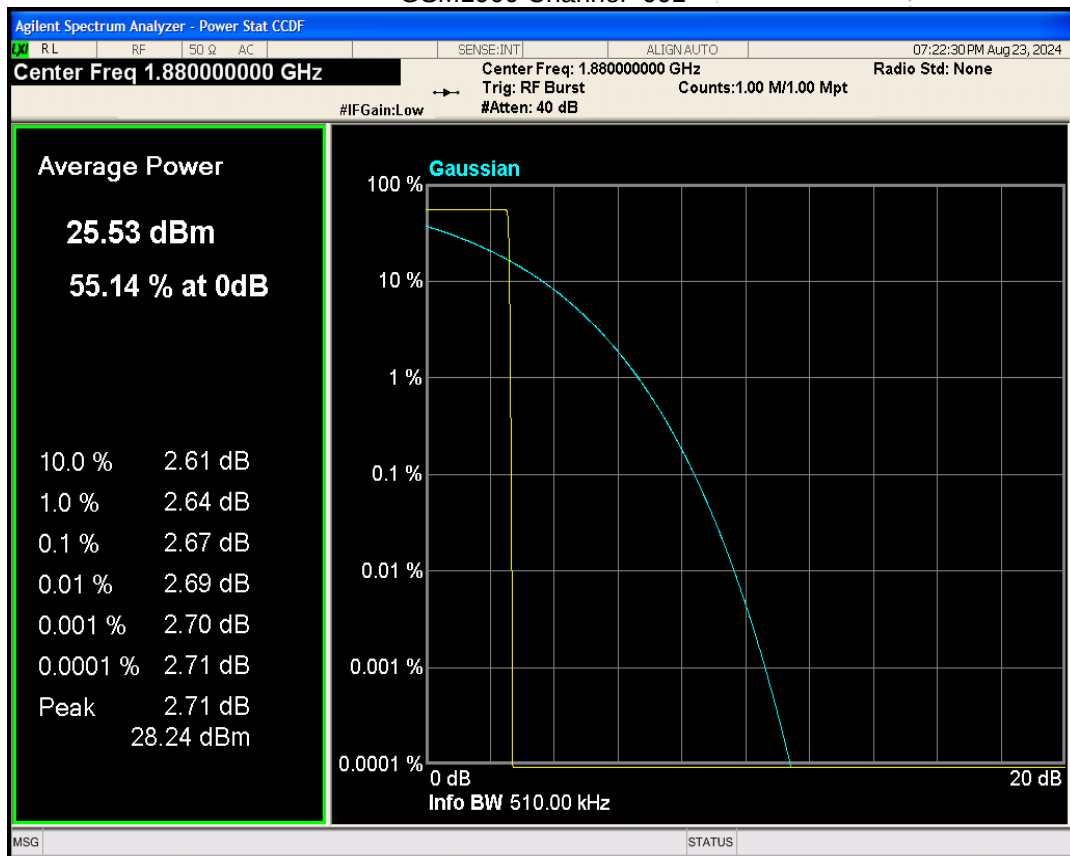


GSM1900 Channel=810

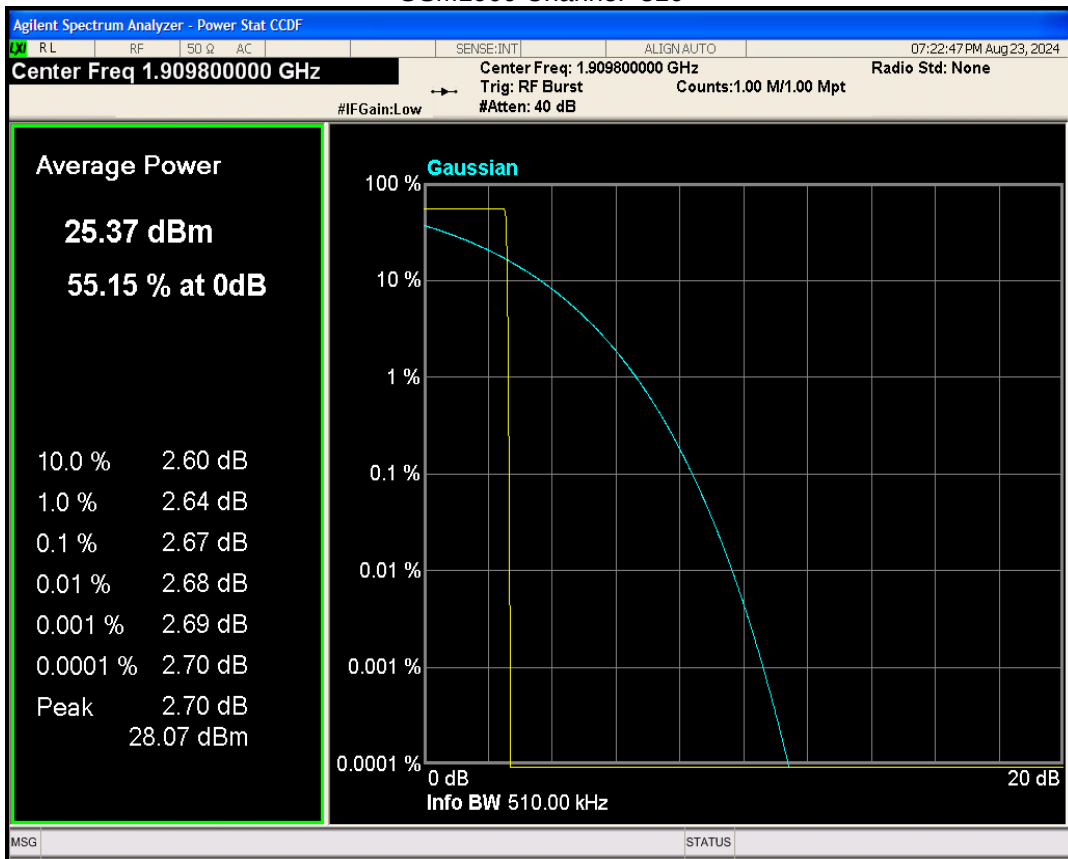


GPRS1900 Channel=512

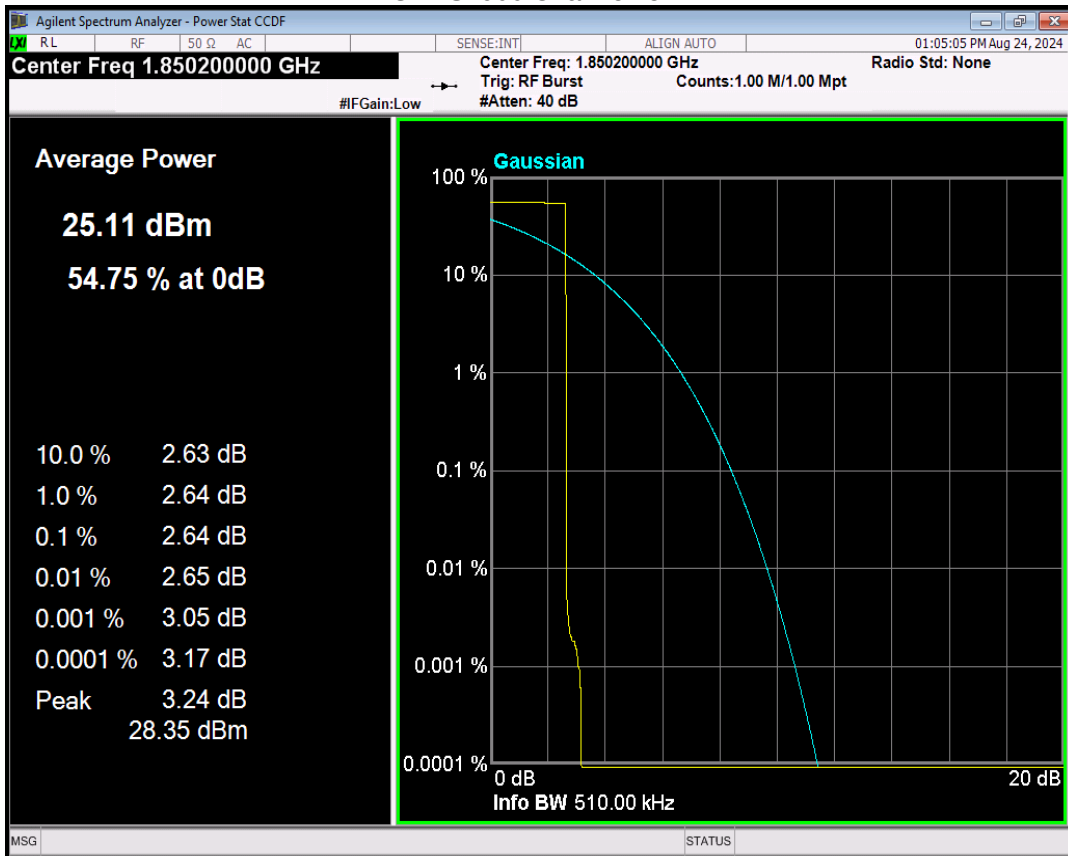


GPRS1900 Channel=661

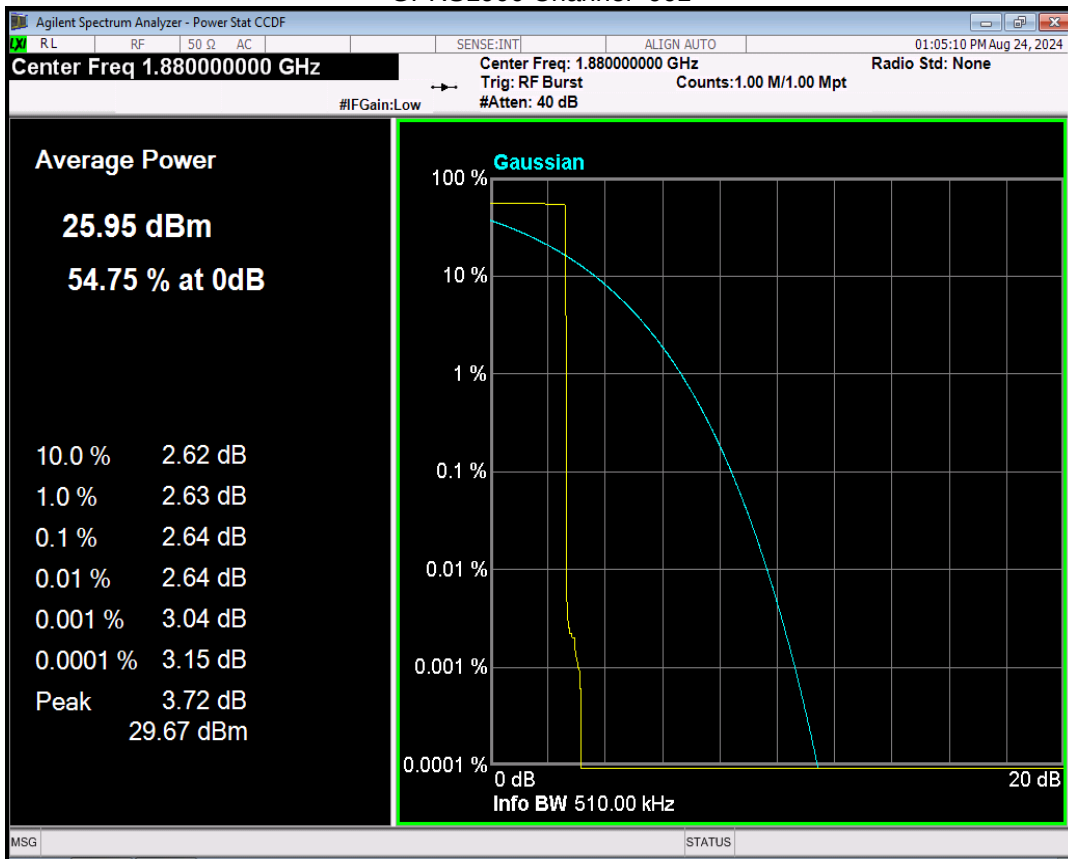


GPRS1900 Channel=810

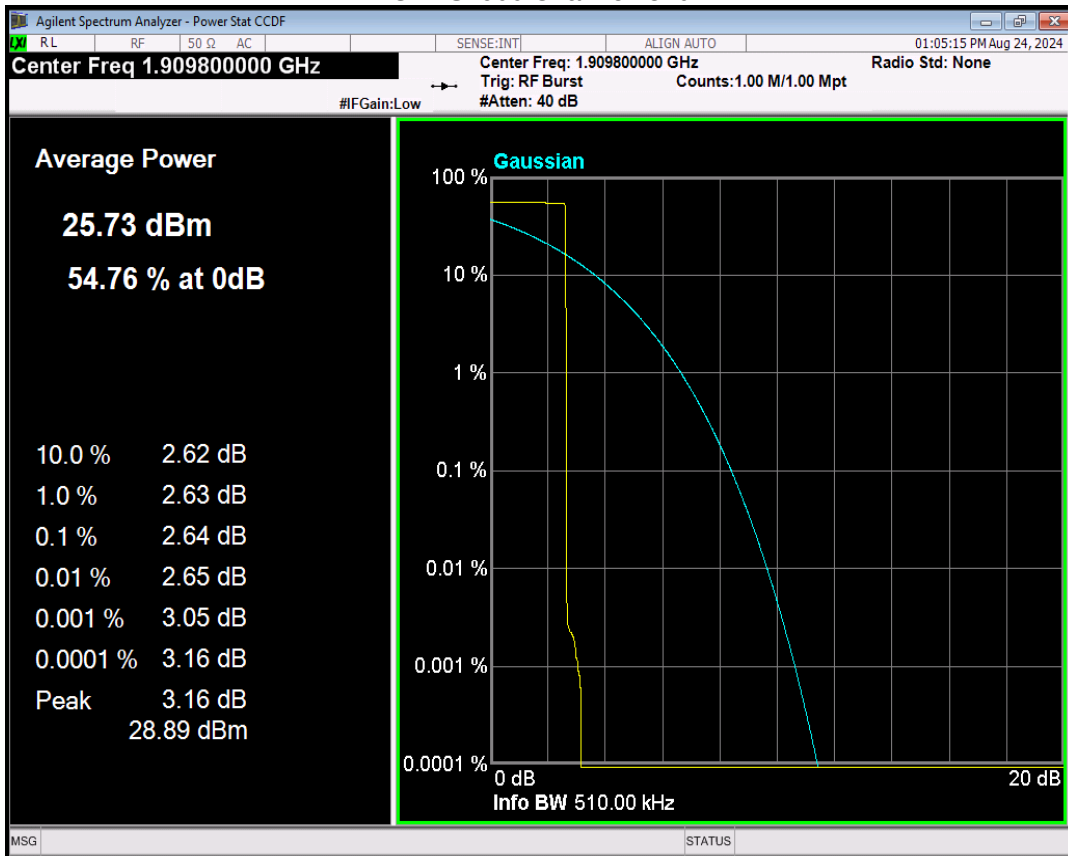


EGPRS1900 Channel=512

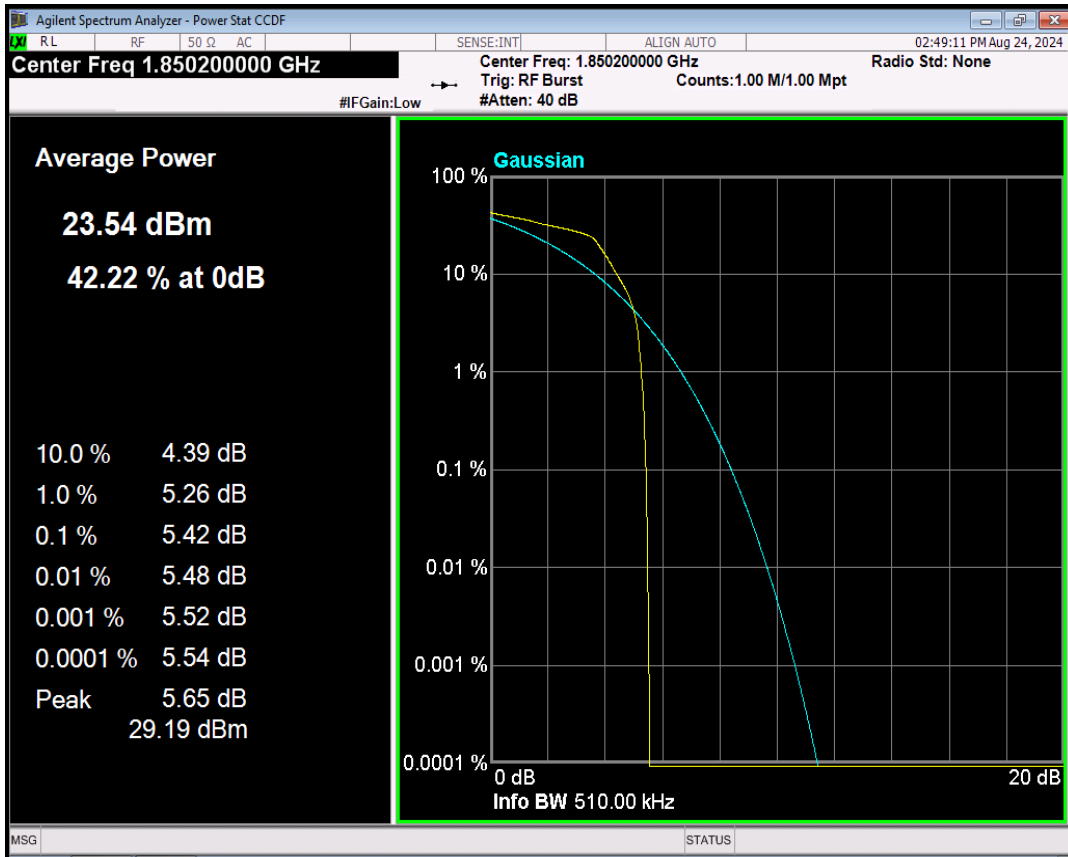

EGPRS1900 Channel=661

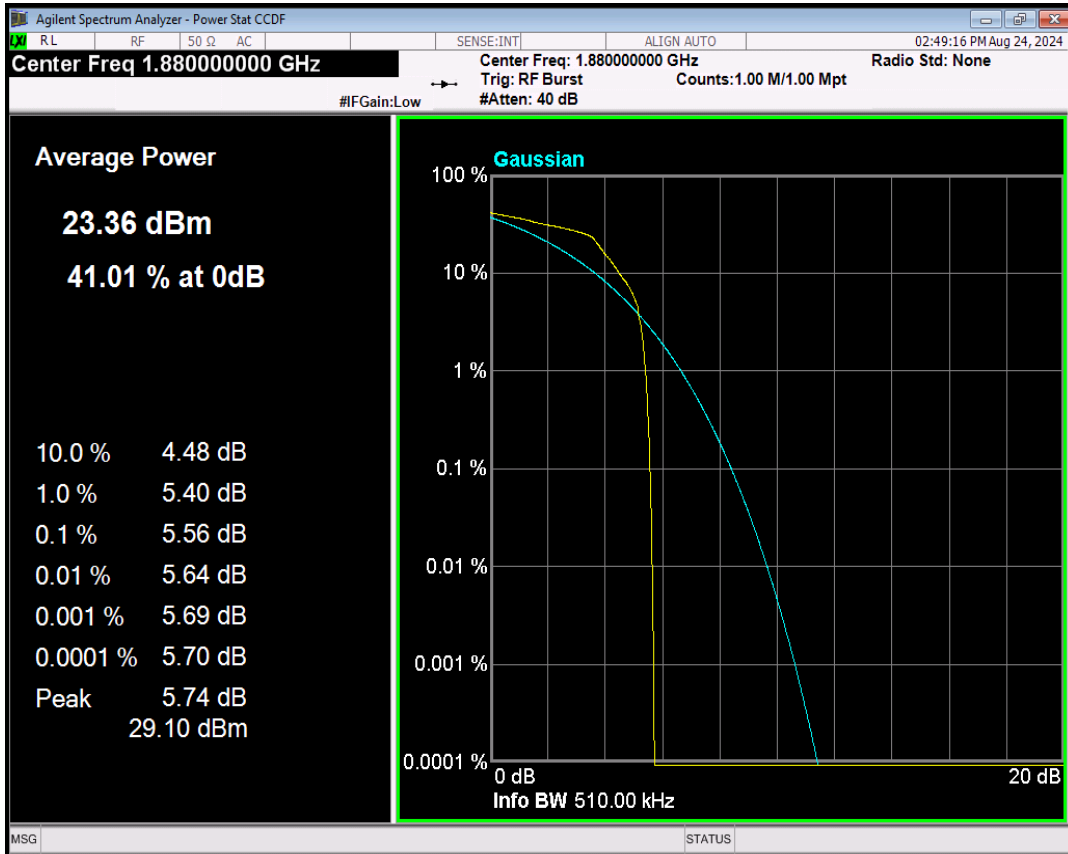


EGPRS1900 Channel=810

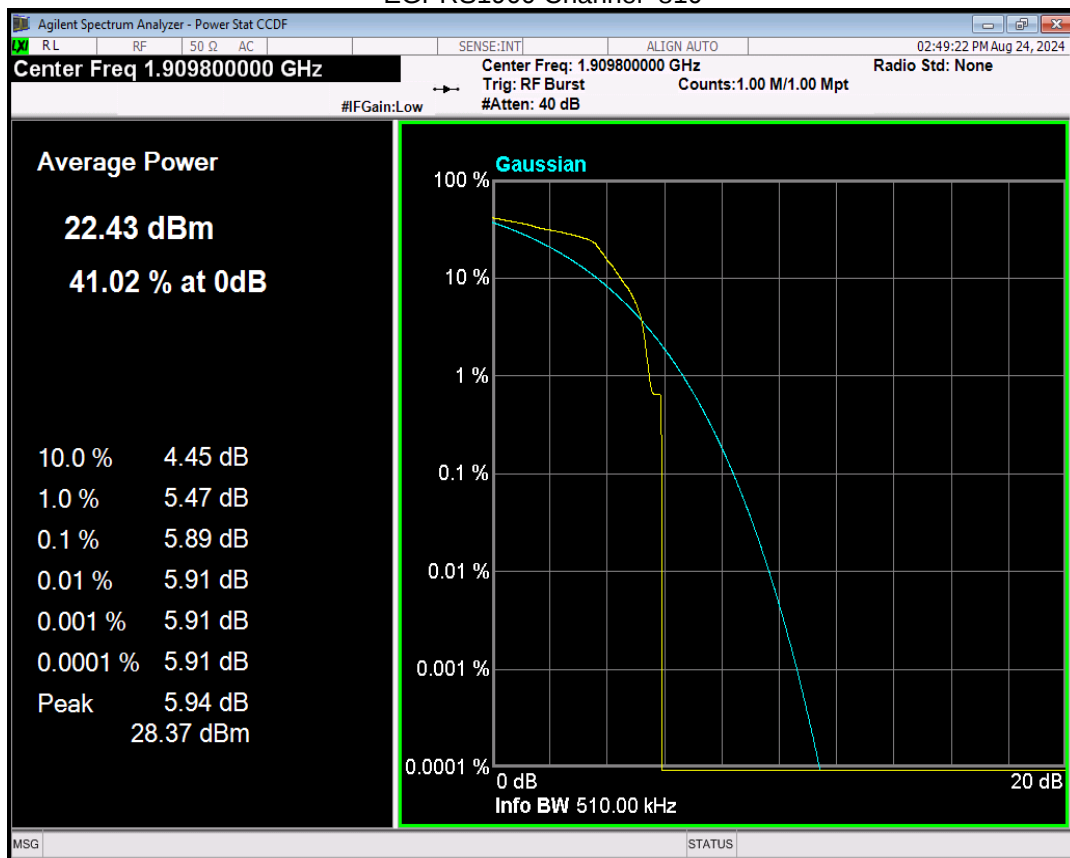


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
WCDMA Band2	9262	1852.4	2.88	13	PASS
WCDMA Band2	9400	1880	2.96	13	PASS
WCDMA Band2	9538	1907.6	2.92	13	PASS
WCDMA Band4	1312	1712.4	3.03	13	PASS
WCDMA Band4	1450	1740	3.11	13	PASS
WCDMA Band4	1513	1752.6	3.09	13	PASS
WCDMA Band5	4132	826.4	3.18	13	PASS
WCDMA Band5	4182	836.4	3.07	13	PASS
WCDMA Band5	4233	846.6	3.15	13	PASS

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.


WCDMA Band2 Channel=9262

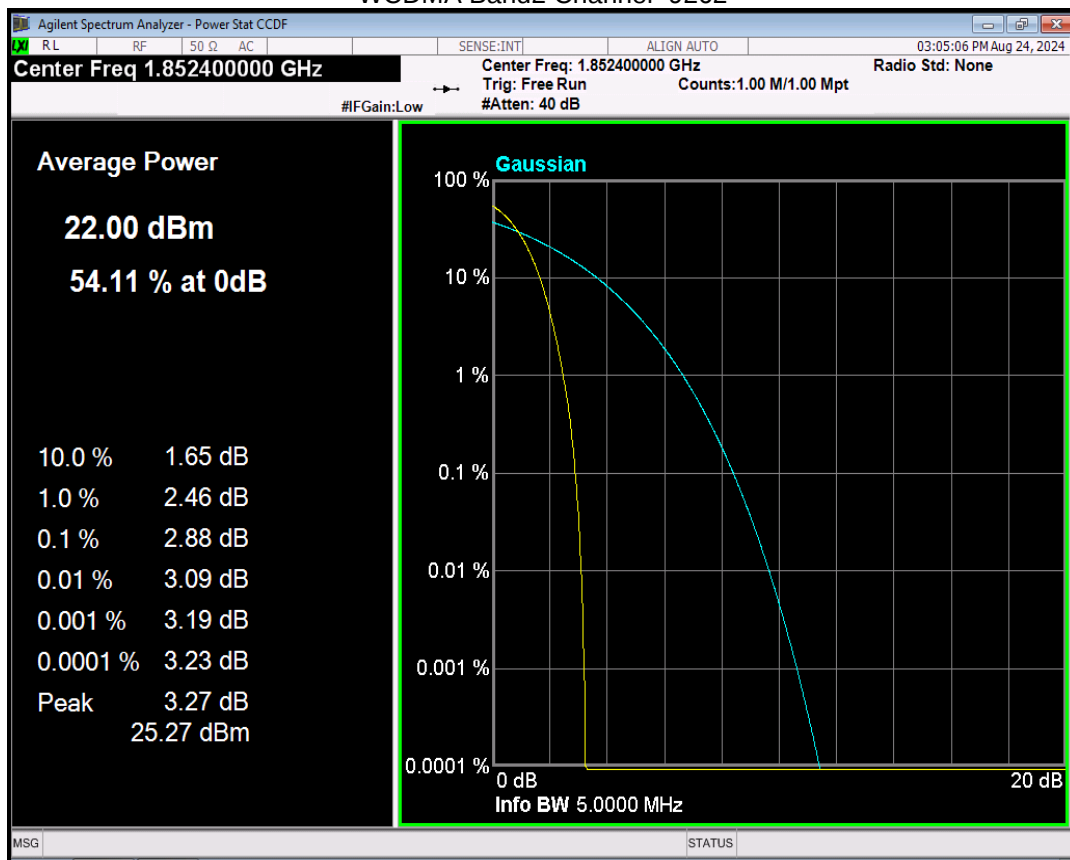


WCDMA Band2 Channel=9400

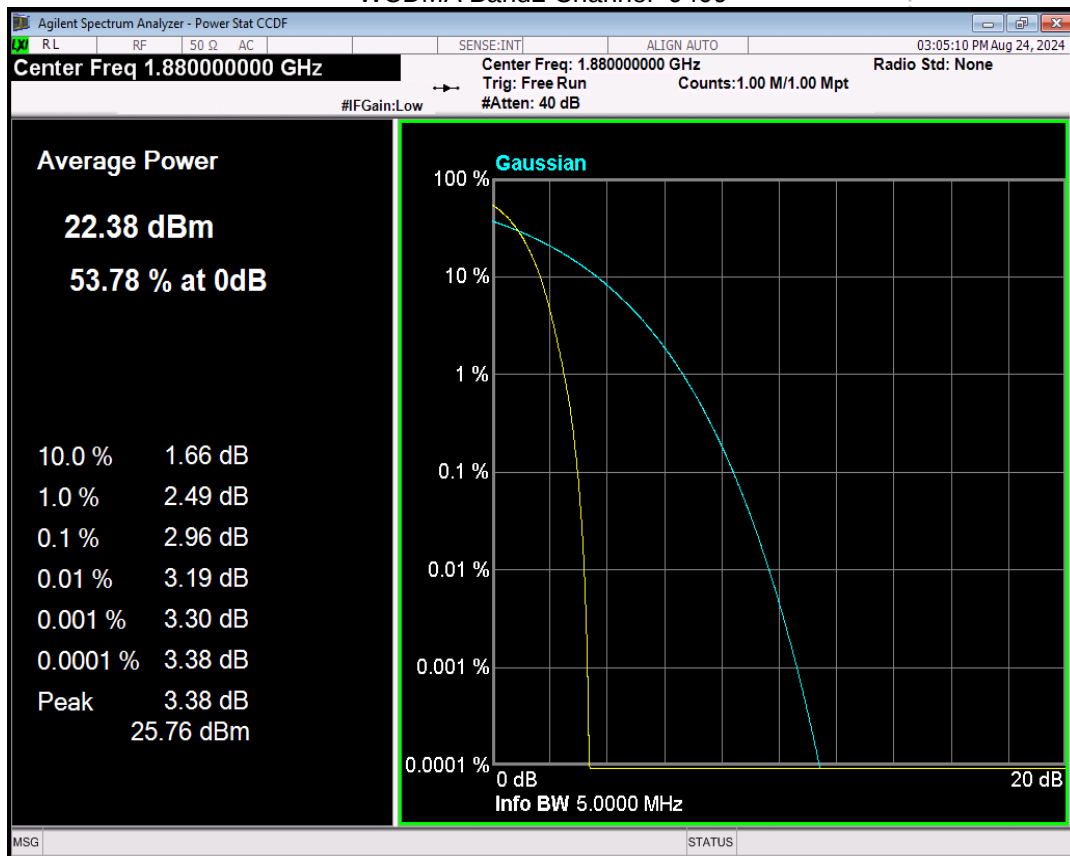


WCDMA Band2 Channel=9538

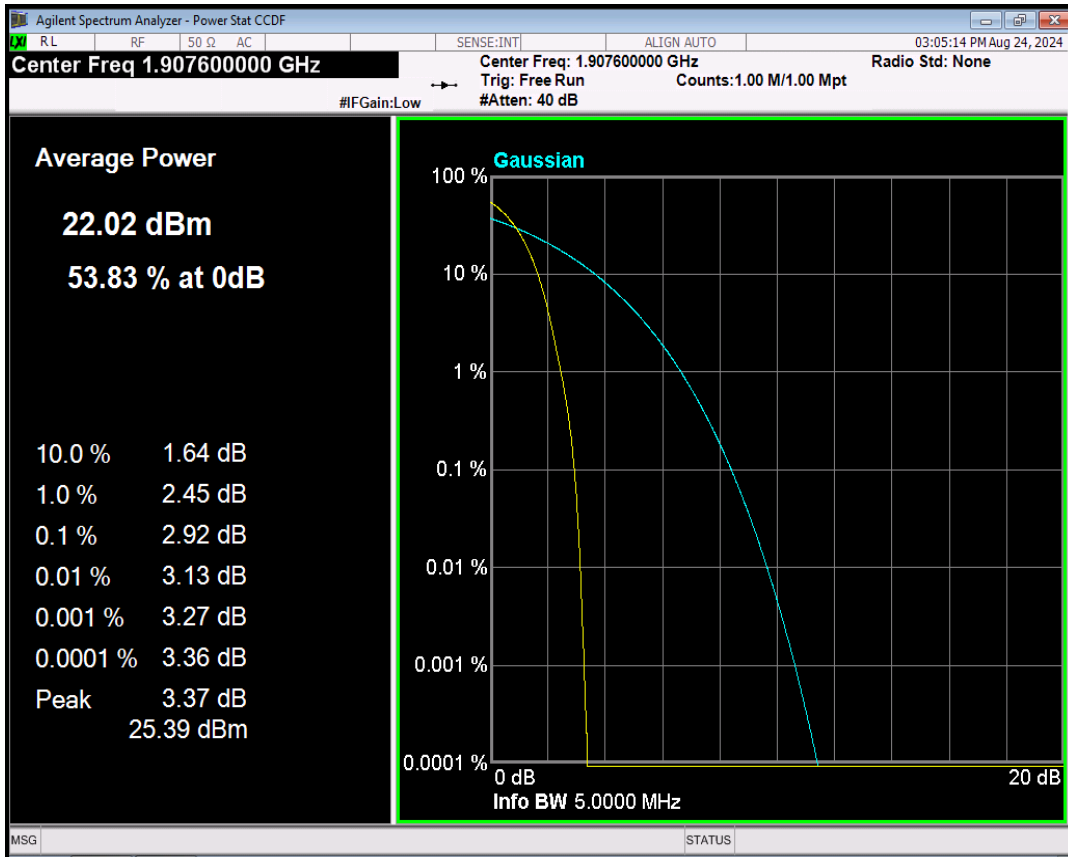


WCDMA Band4 Channel=1312

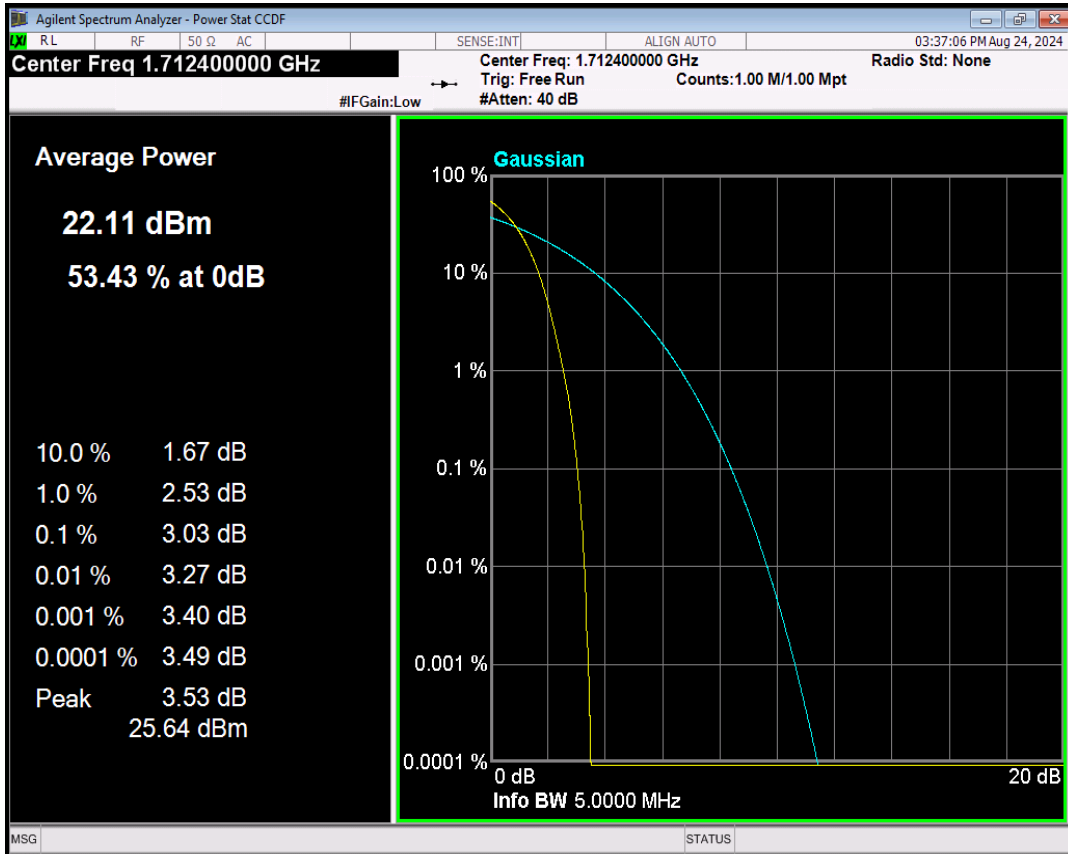


WCDMA Band4 Channel=1450

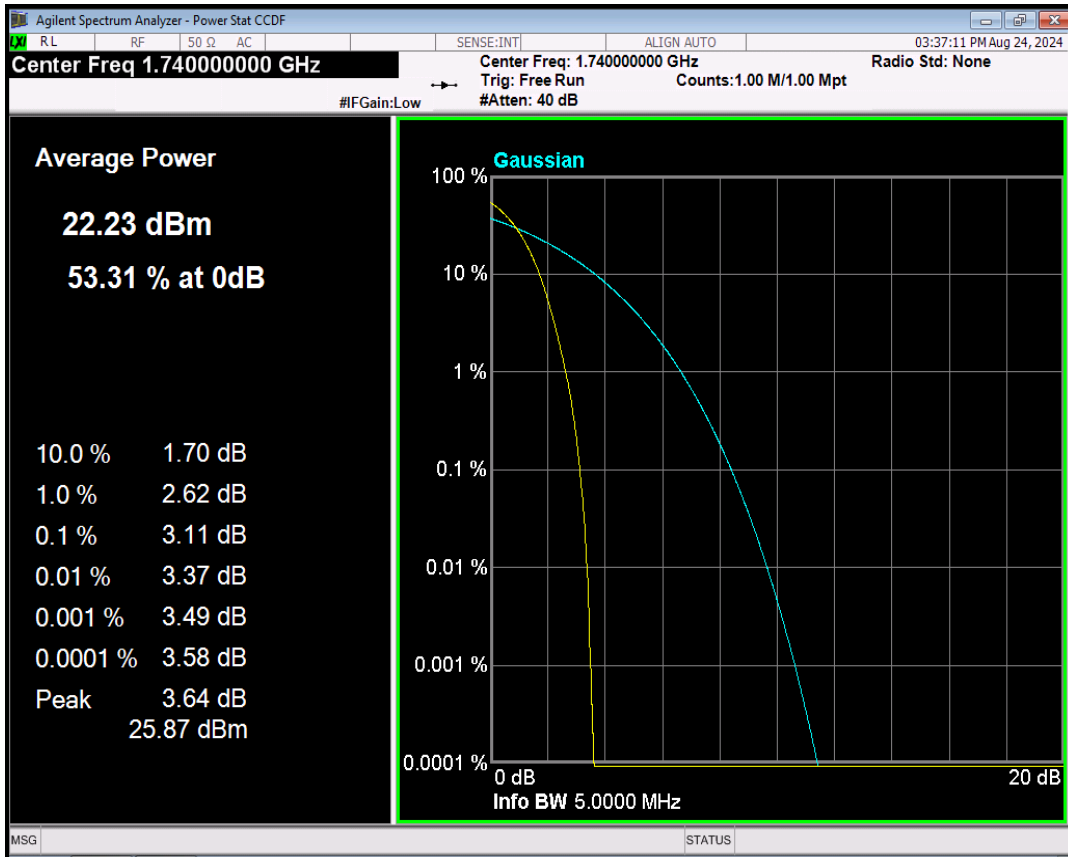


WCDMA Band4 Channel=1513

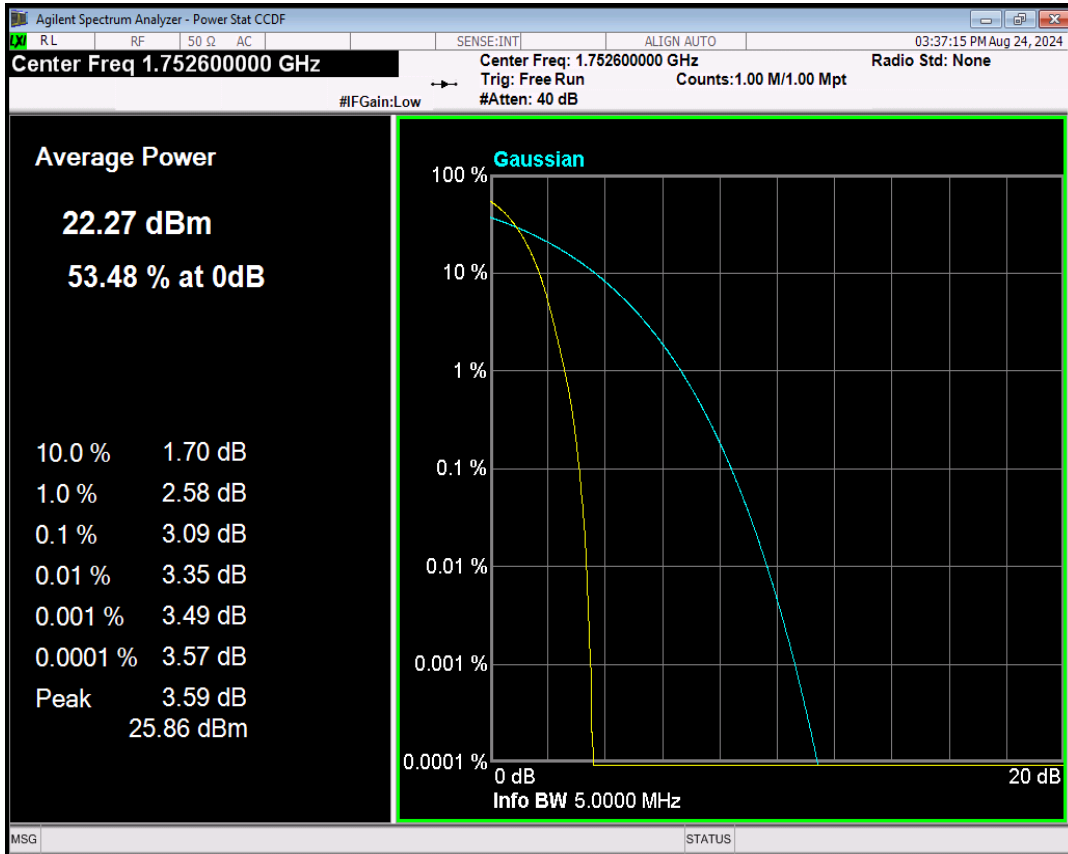



WCDMA Band5 Channel=4132

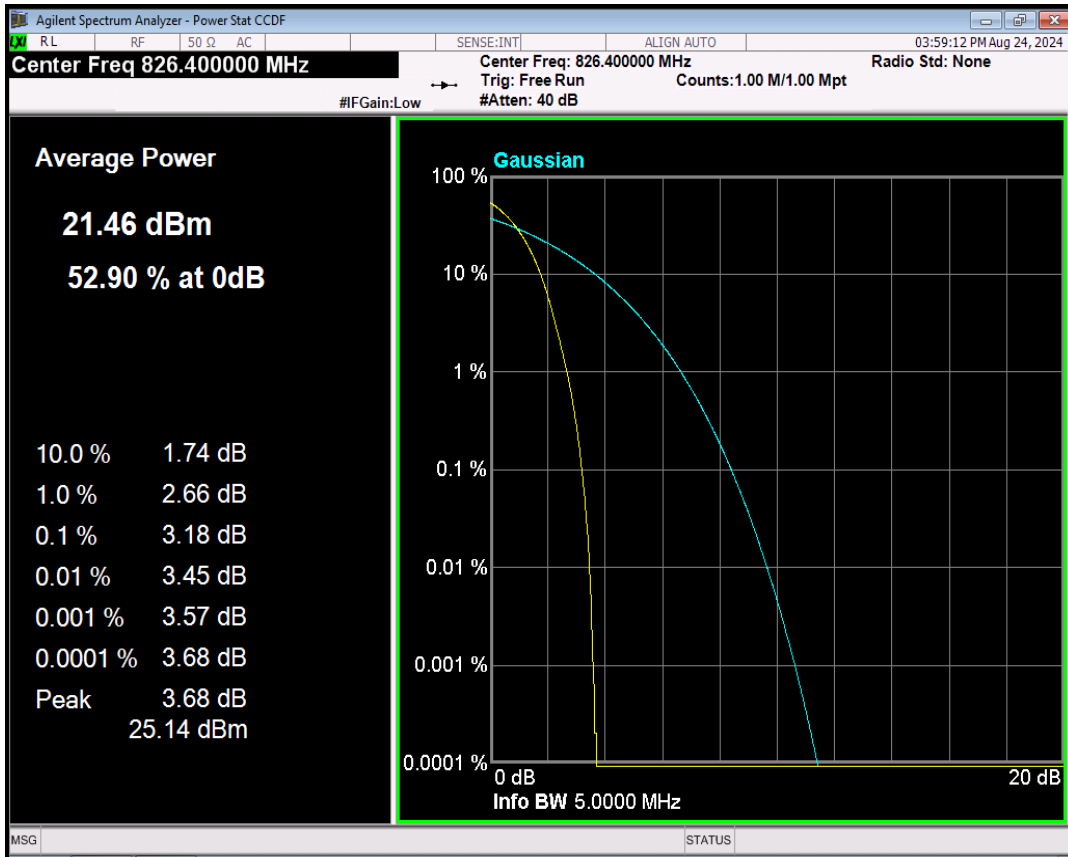

WCDMA Band5 Channel=4182

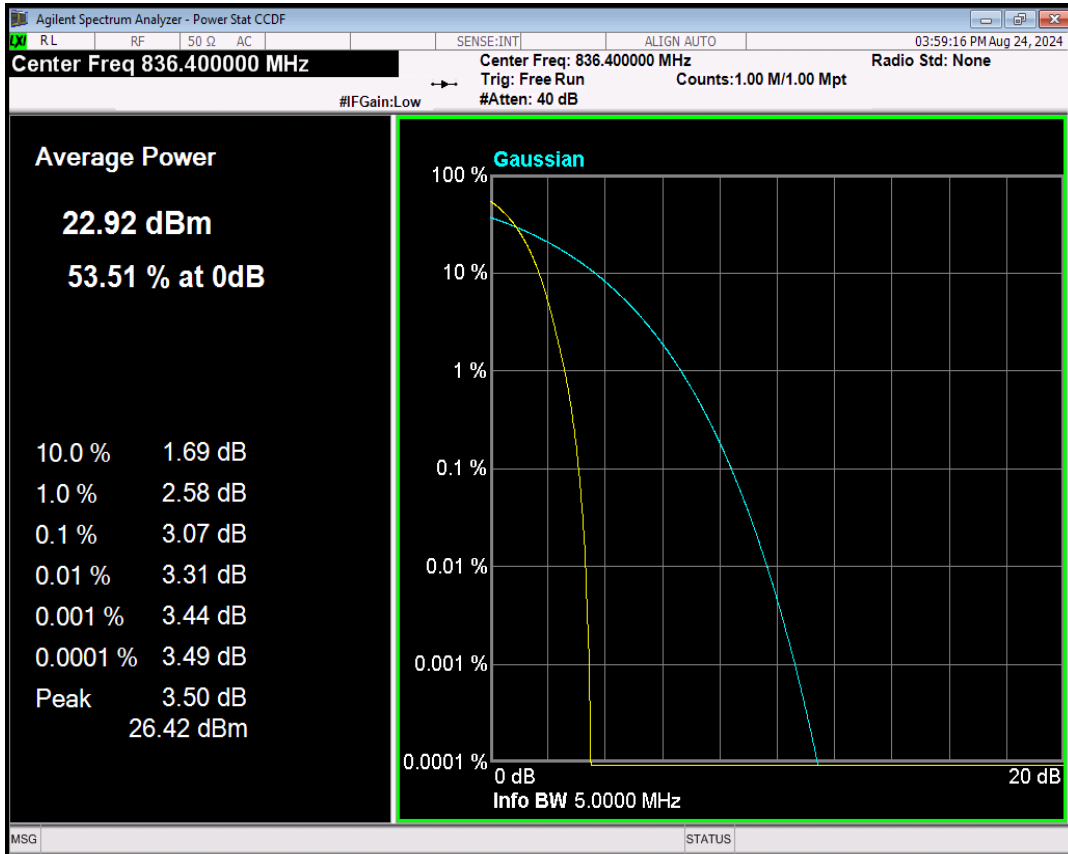


WCDMA Band5 Channel=4233

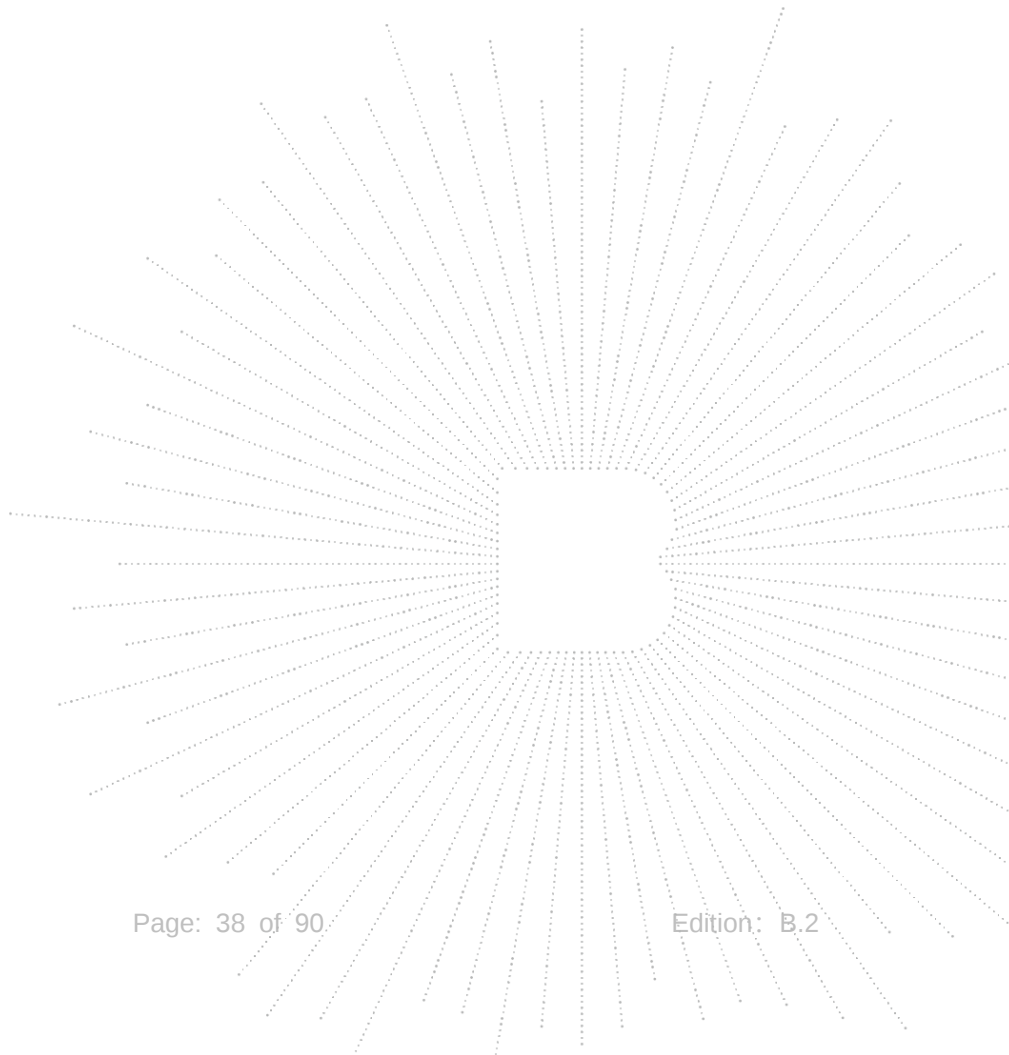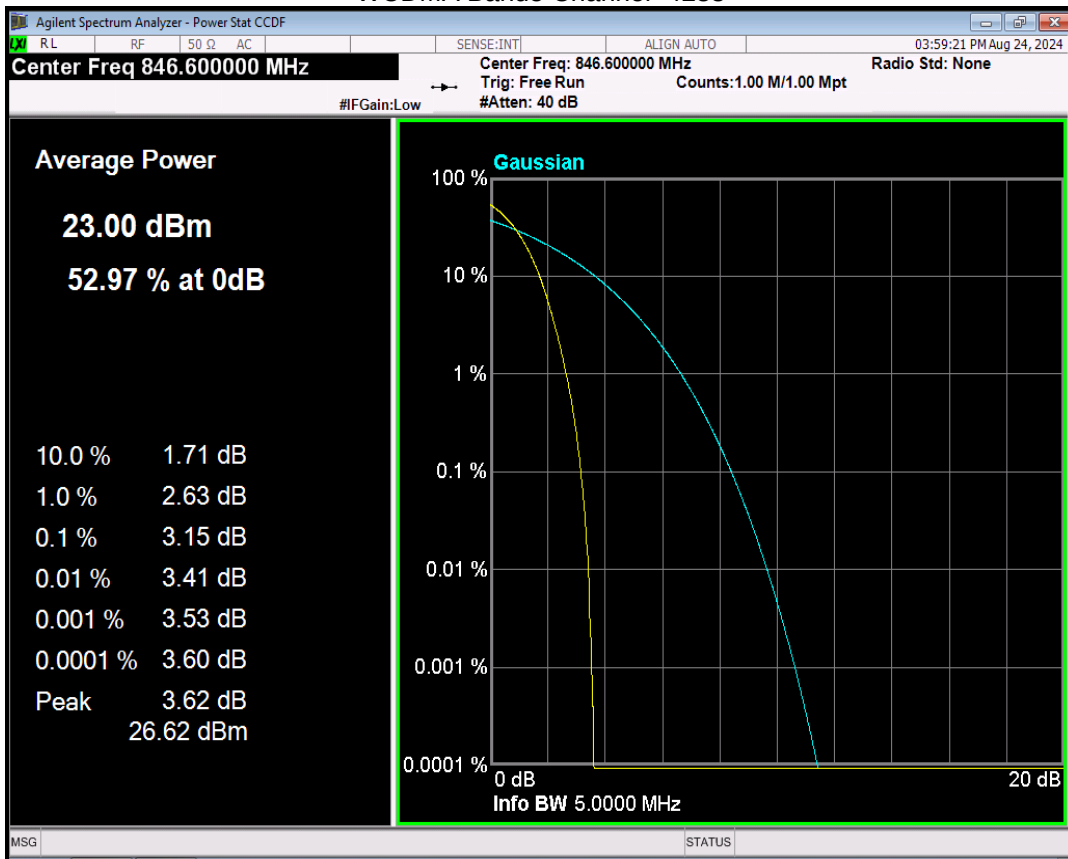

8. Emission Bandwidth

8.1 Block Diagram Of Test Setup

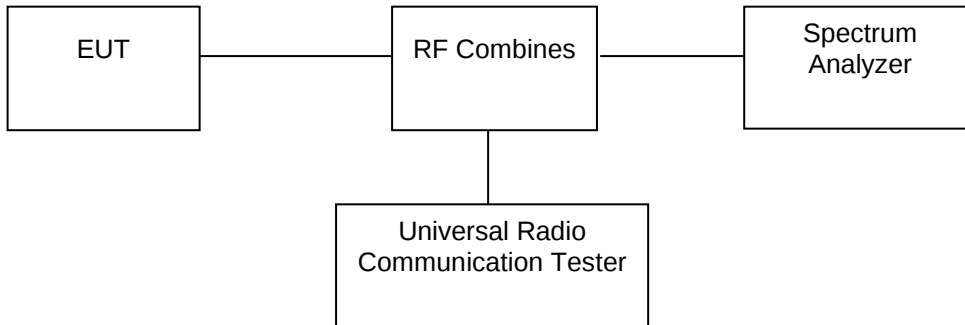

8.2 Limit

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


8.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.


8.4 Test Result

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM850	128	824.2	245.726	312.212	PASS
GSM850	190	836.6	244.541	319.812	PASS
GSM850	251	848.8	243.539	313.250	PASS
GPRS850	128	824.2	247.820	315.976	PASS
GPRS850	190	836.6	248.639	313.874	PASS
GPRS850	251	848.8	249.168	320.403	PASS
EGPRS850	128	824.2	244.881	300.535	PASS
EGPRS850	190	836.6	244.897	290.829	PASS
EGPRS850	251	848.8	241.675	303.123	PASS


GSM850 Channel=128

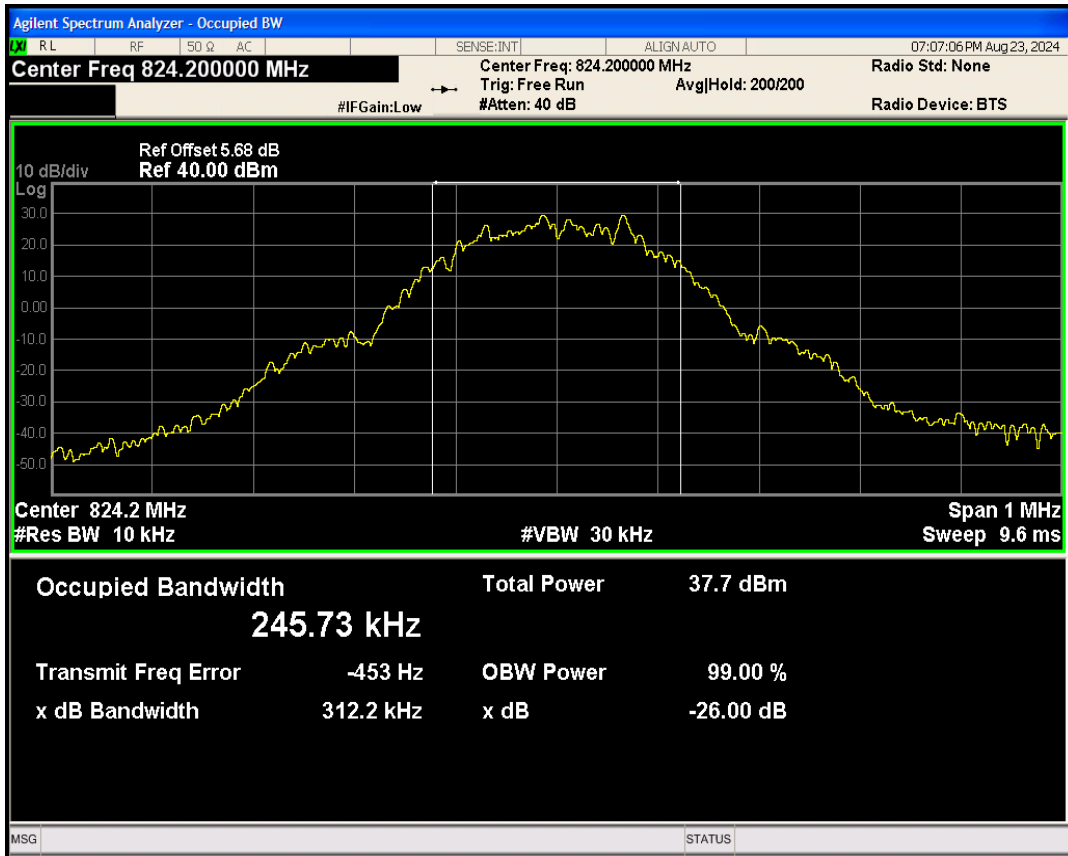


GSM850 Channel=190

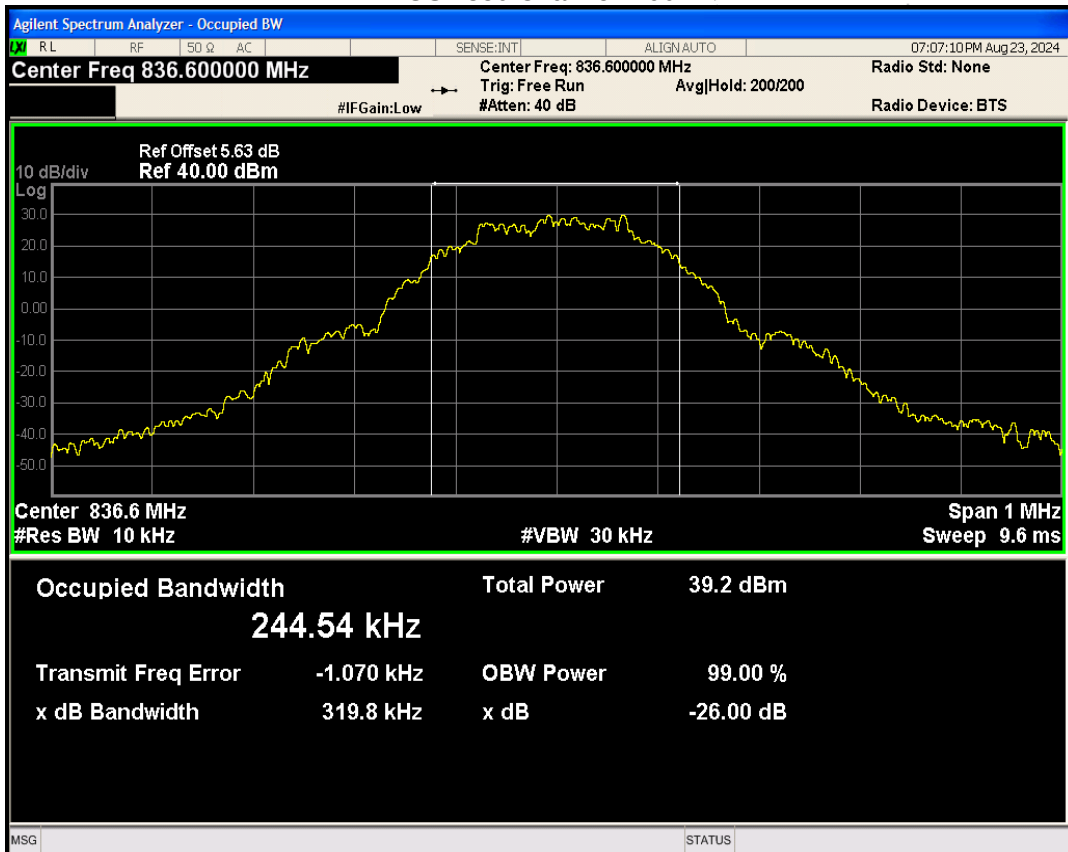


GSM850 Channel=251

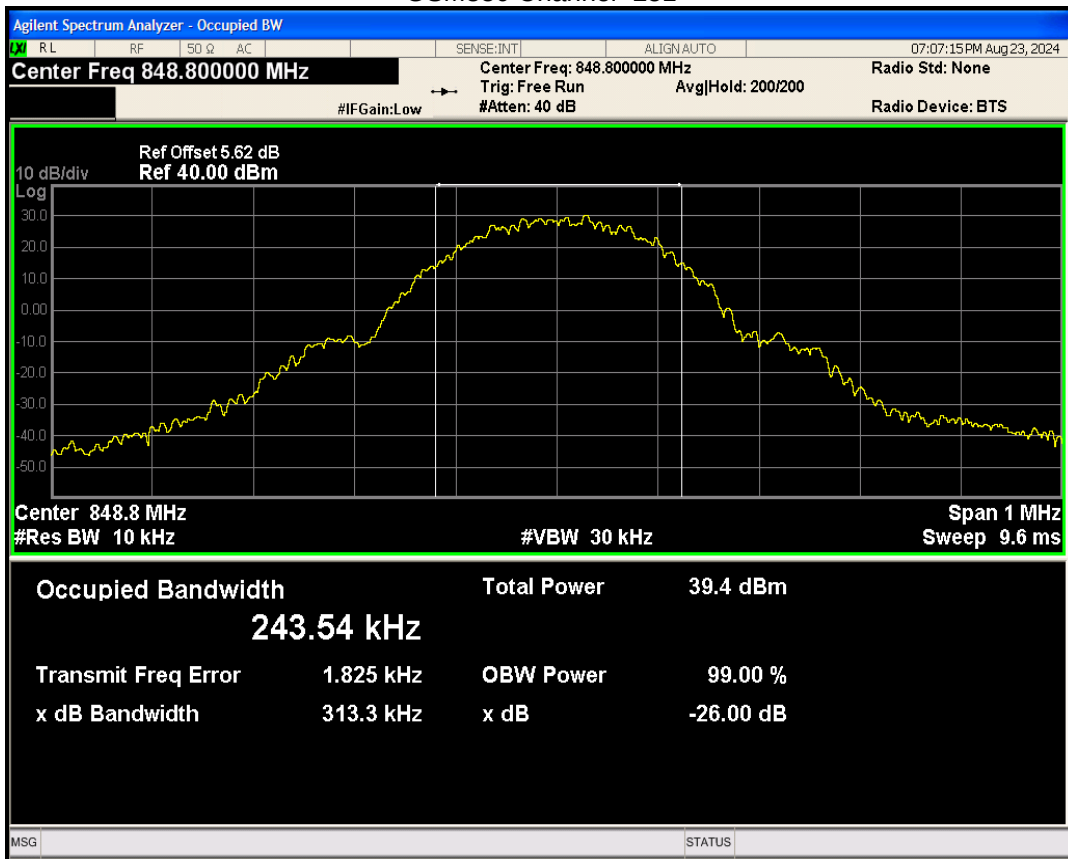


GPRS850 Channel=128

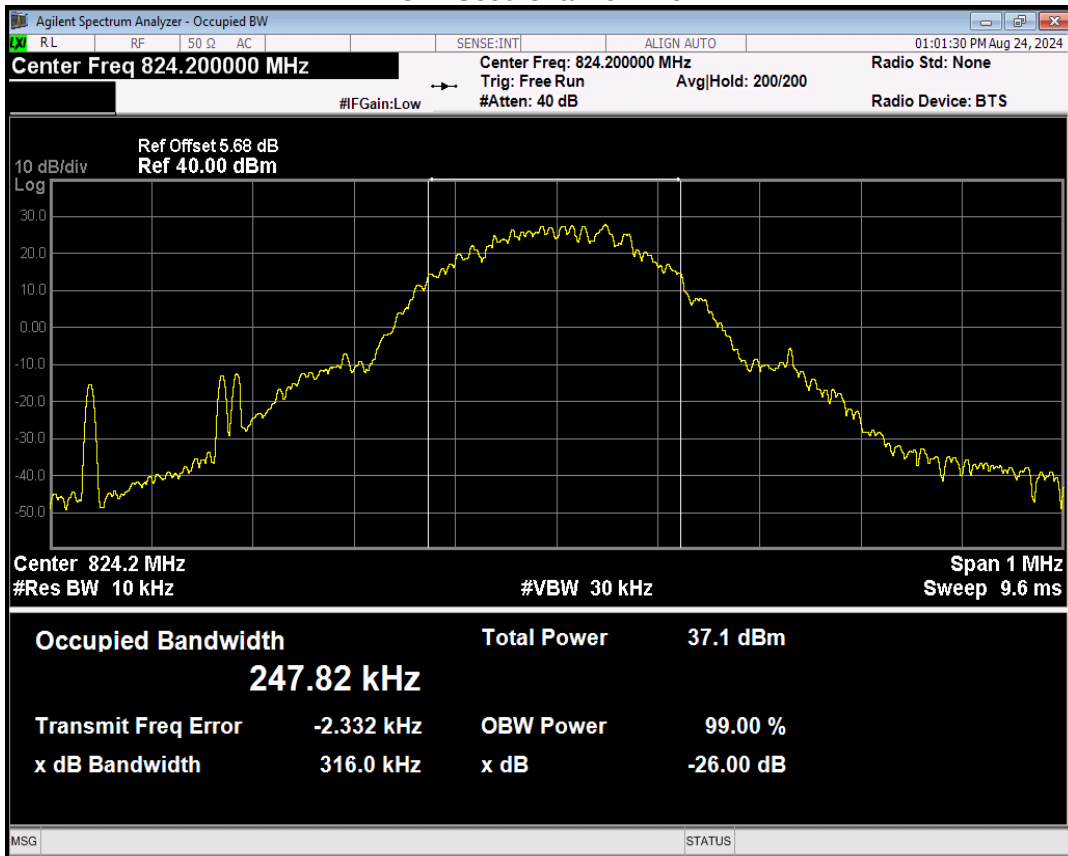


GPRS850 Channel=190

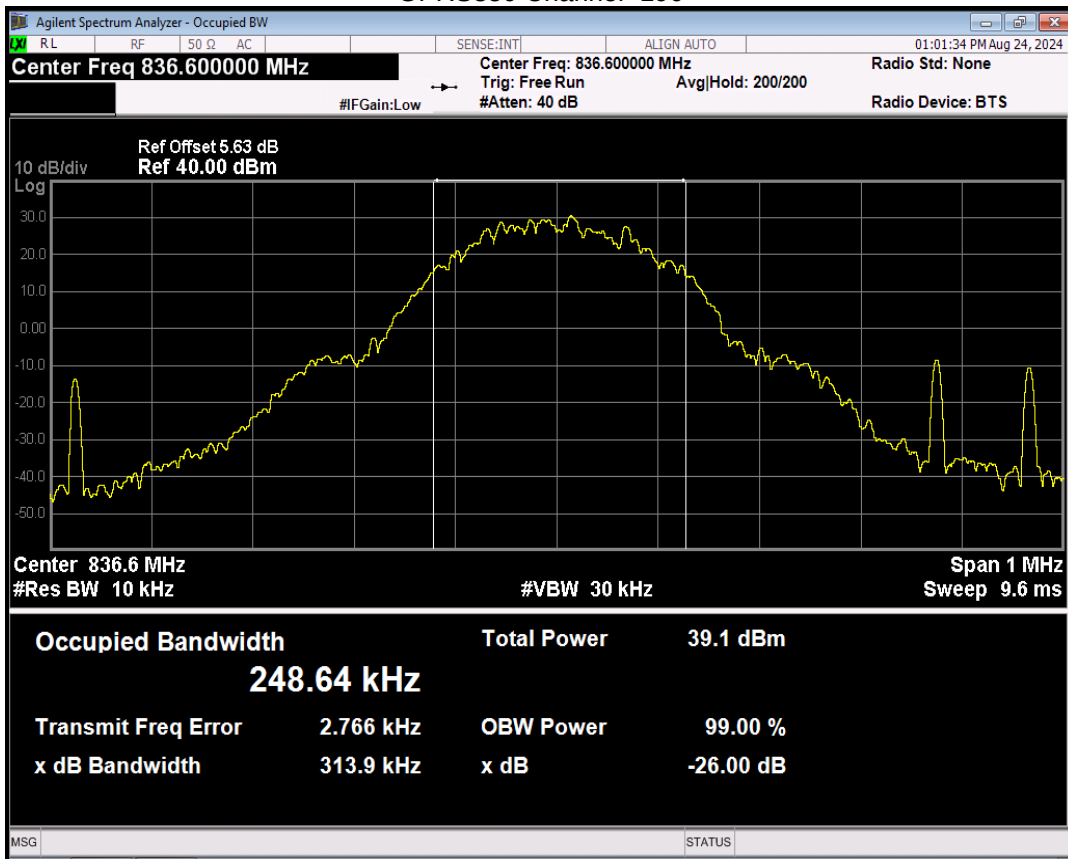


GPRS850 Channel=251

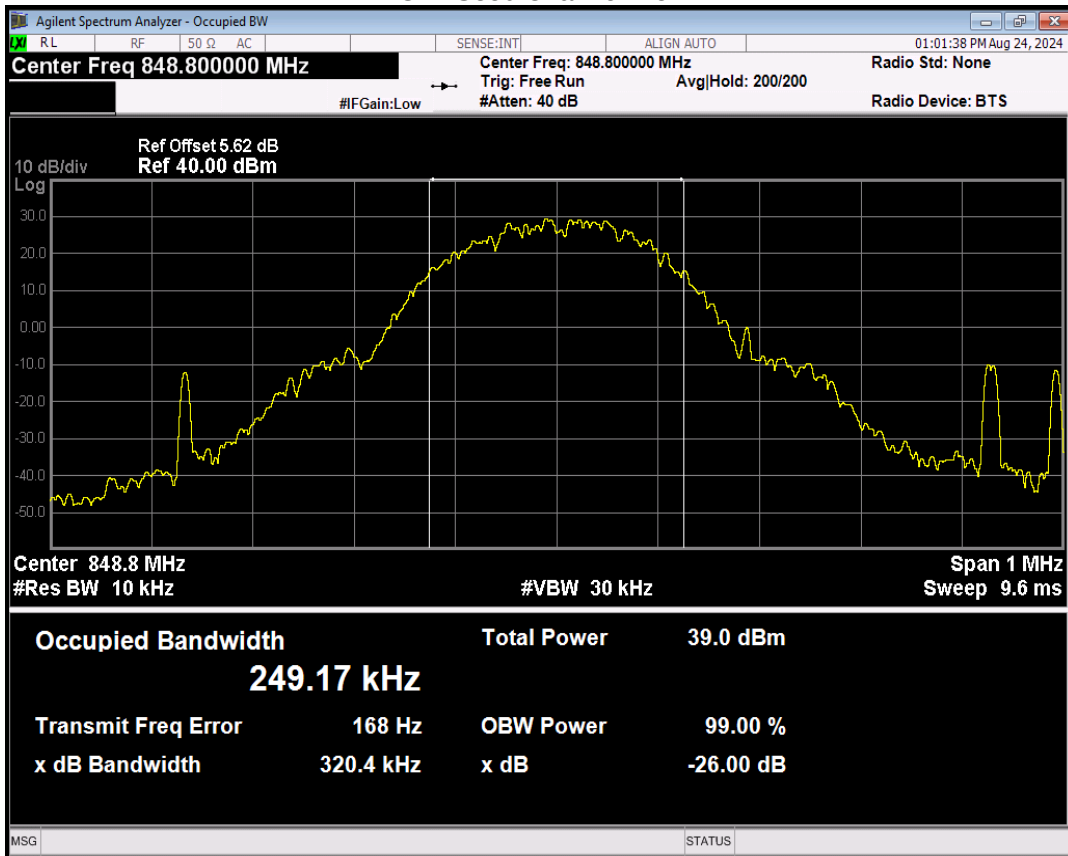


EGPRS850 Channel=128

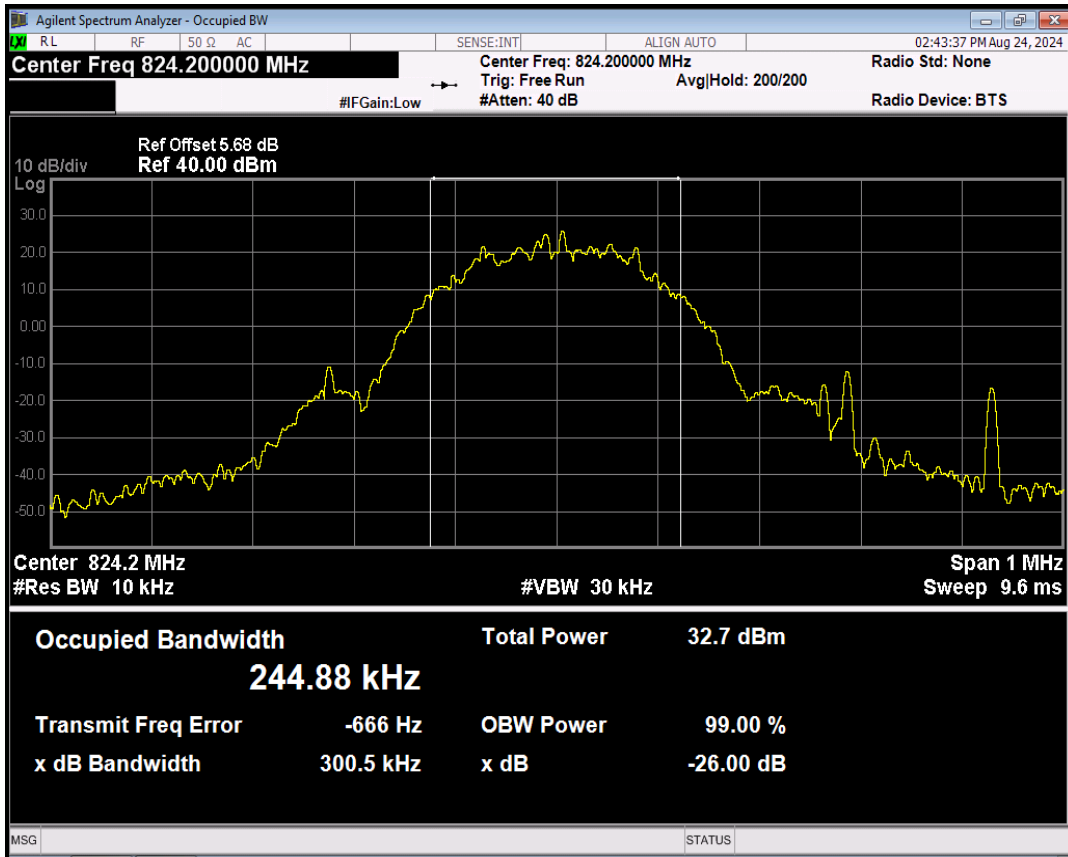

EGPRS850 Channel=190

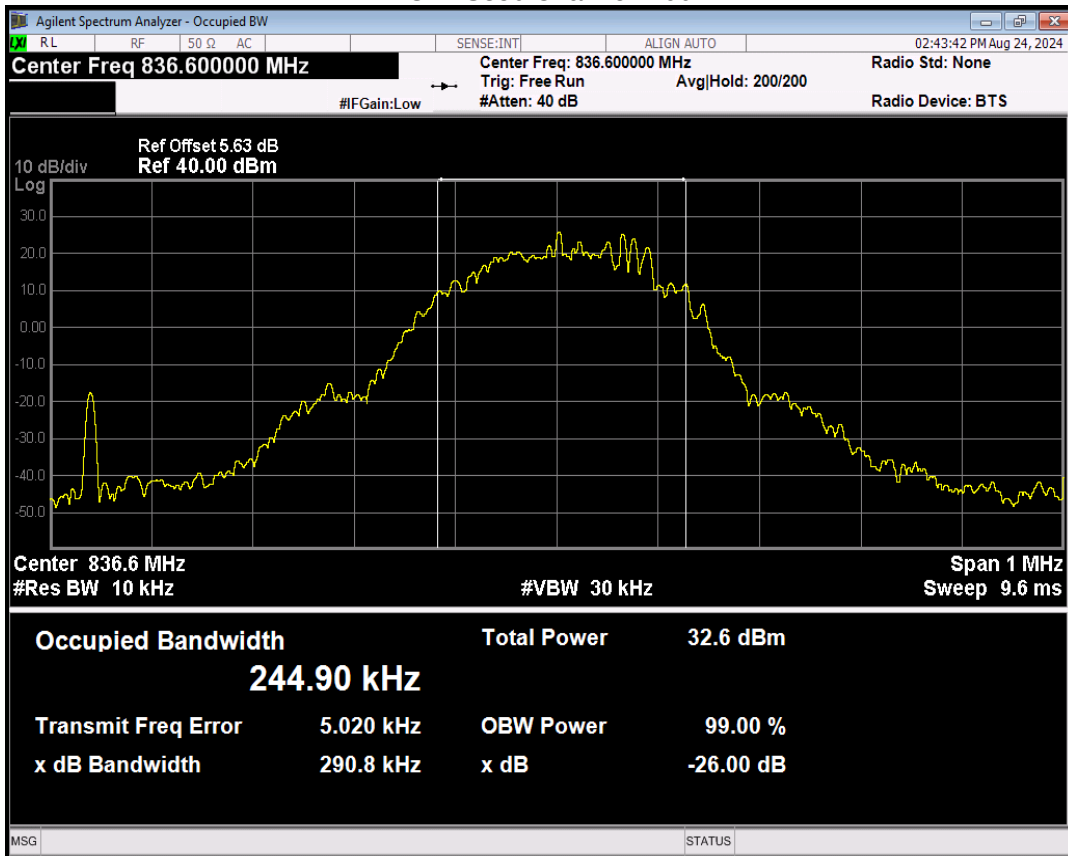


EGPRS850 Channel=251

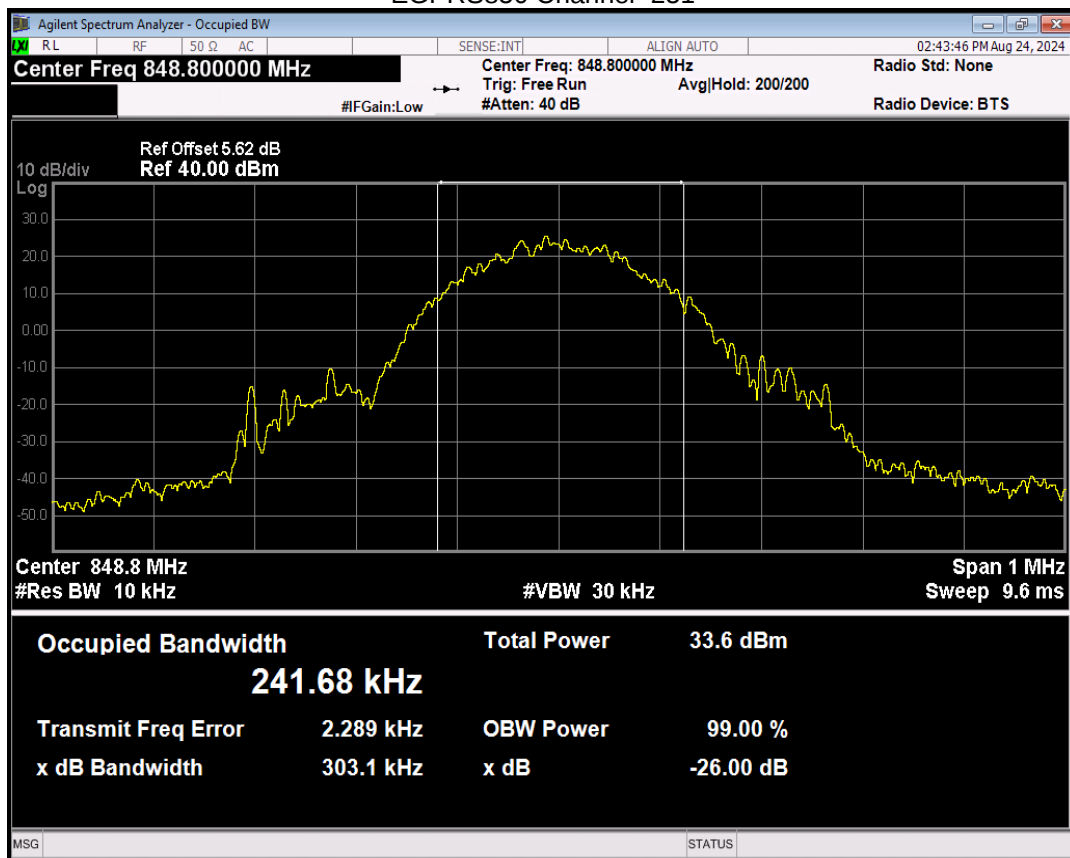


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	244.379	315.957	PASS
GSM1900	661	1880	252.156	314.101	PASS
GSM1900	810	1909.8	244.611	311.551	PASS
GPRS1900	512	1850.2	251.055	316.683	PASS
GPRS1900	661	1880	249.245	308.873	PASS
GPRS1900	810	1909.8	242.741	316.875	PASS
EGPRS1900	512	1850.2	244.918	311.379	PASS
EGPRS1900	661	1880	238.195	307.987	PASS
EGPRS1900	810	1909.8	249.504	302.541	PASS


GSM1900 Channel=512

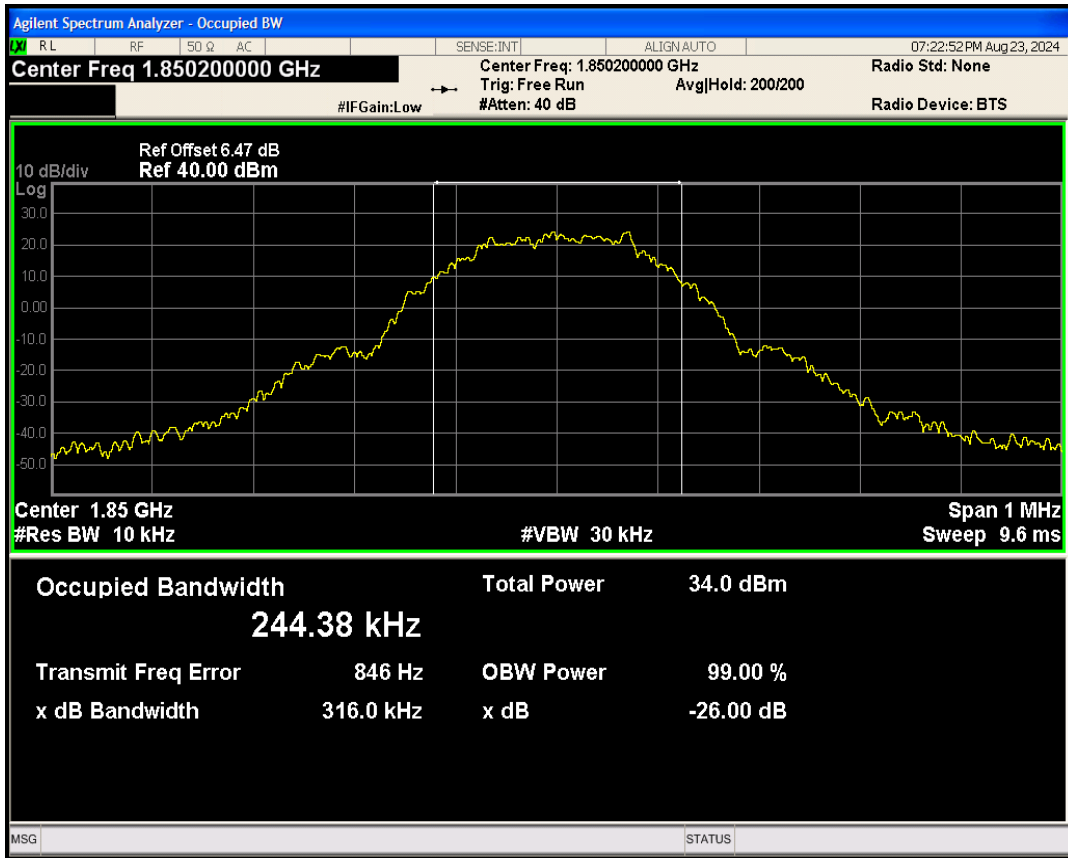


GSM1900 Channel=661

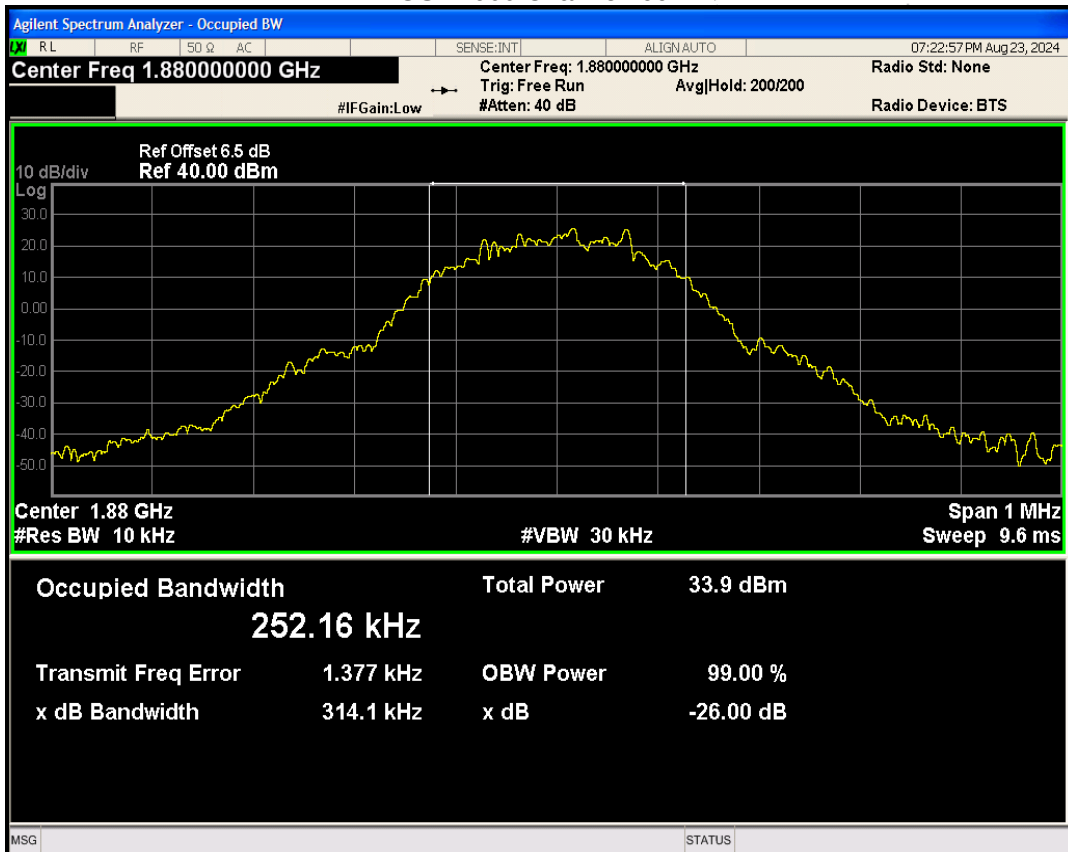


GSM1900 Channel=810

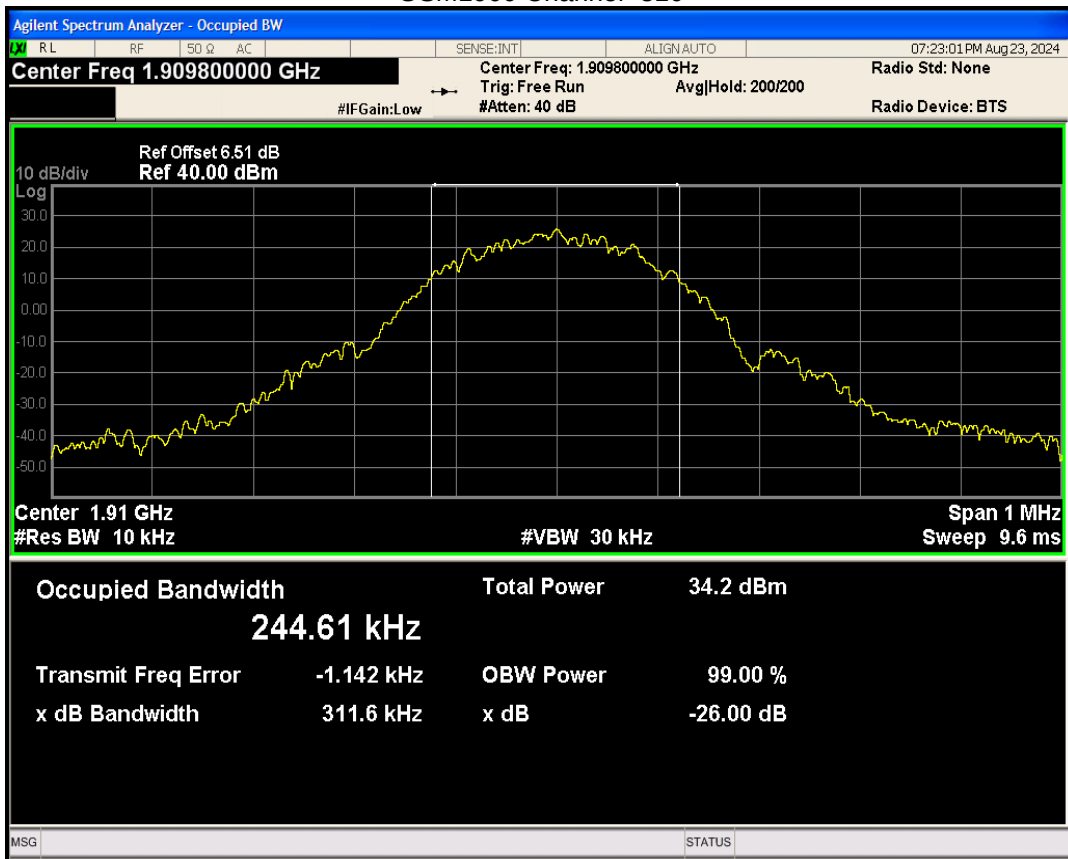


GPRS1900 Channel=512

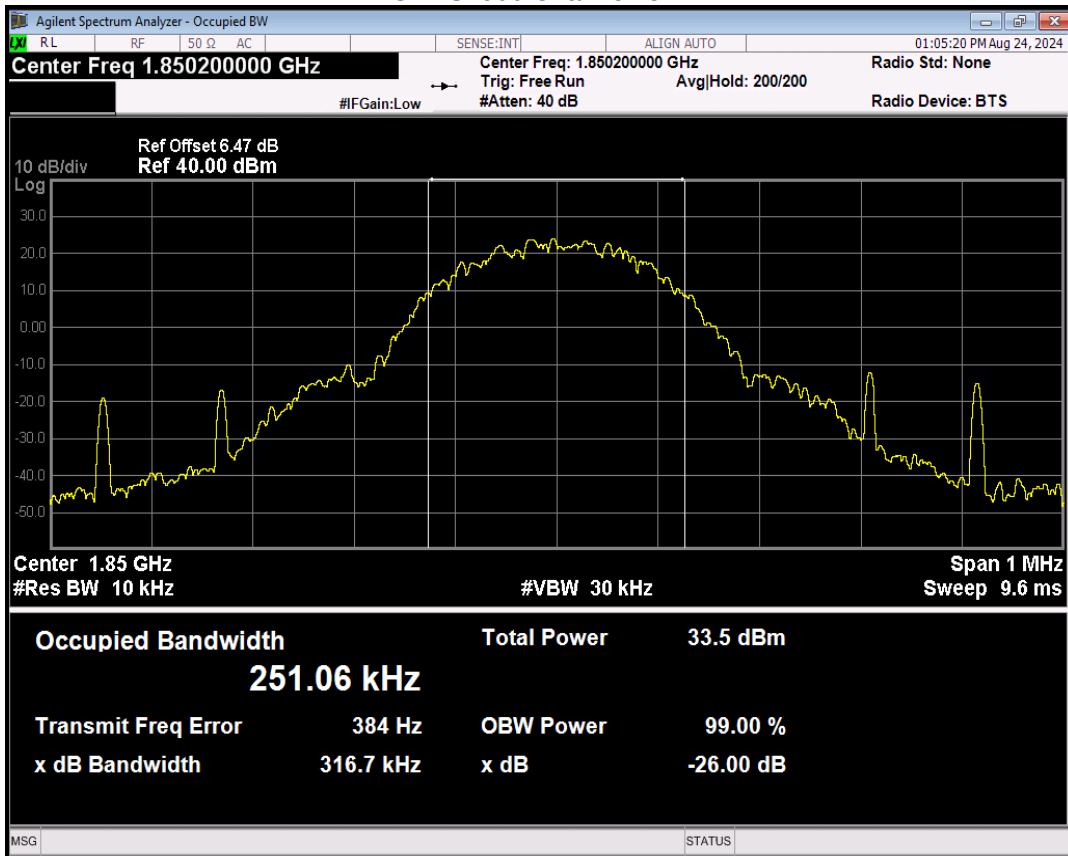


GPRS1900 Channel=661

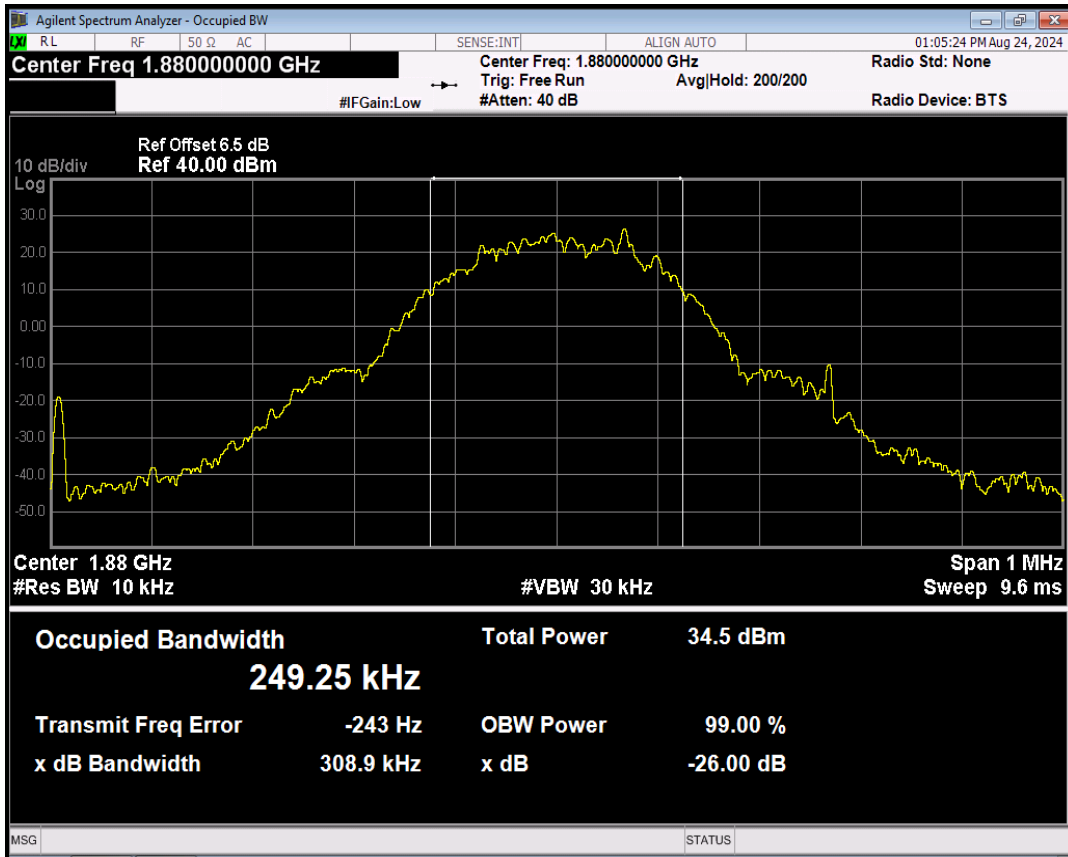


GPRS1900 Channel=810

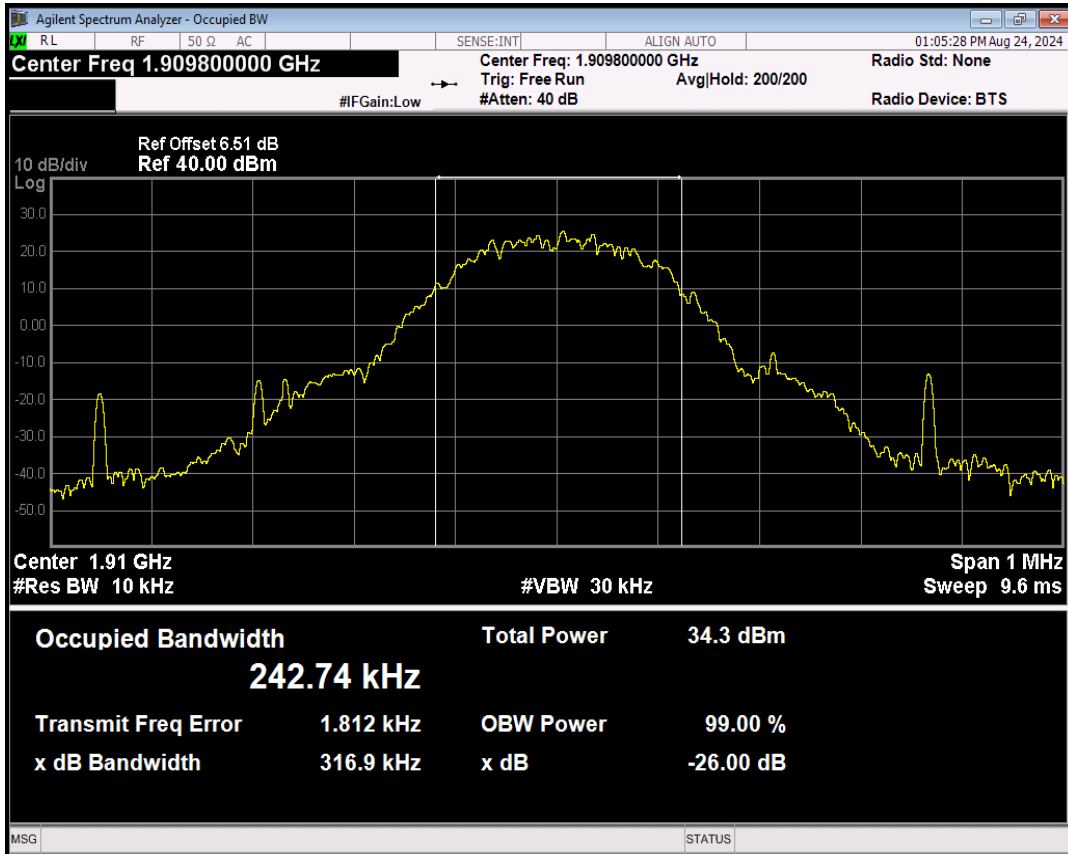


EGPRS1900 Channel=512

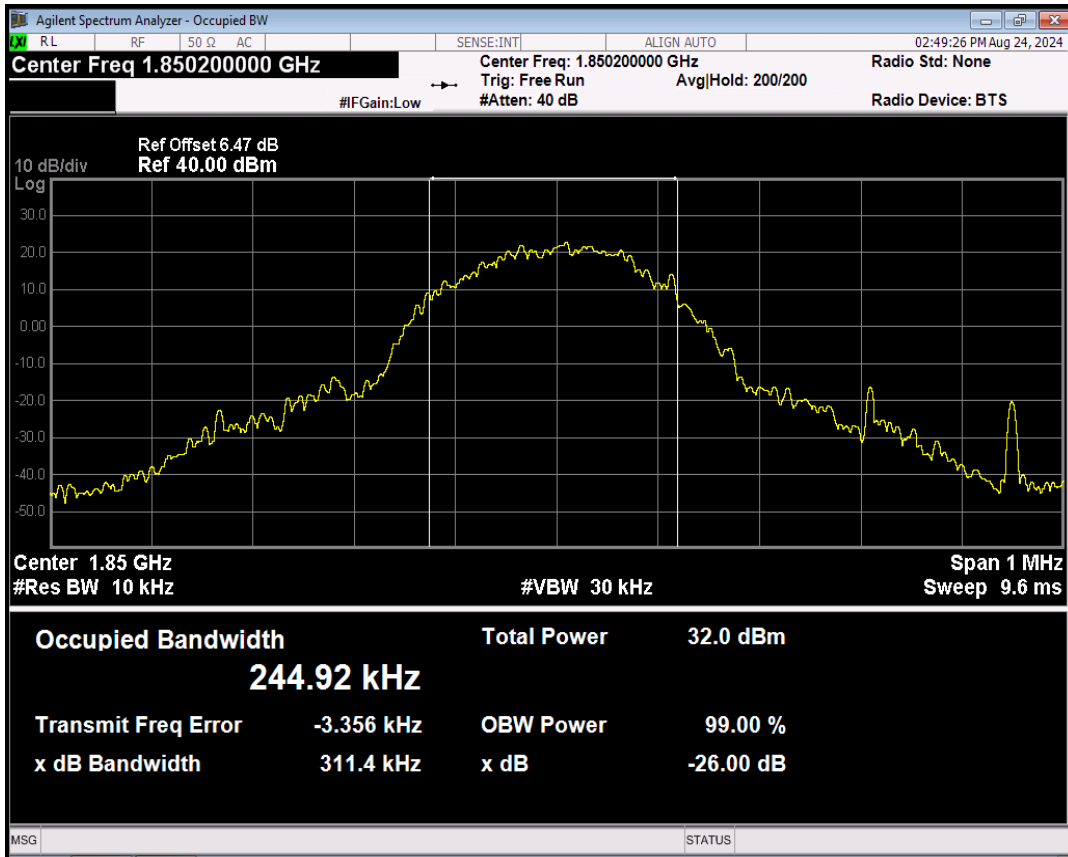

EGPRS1900 Channel=661

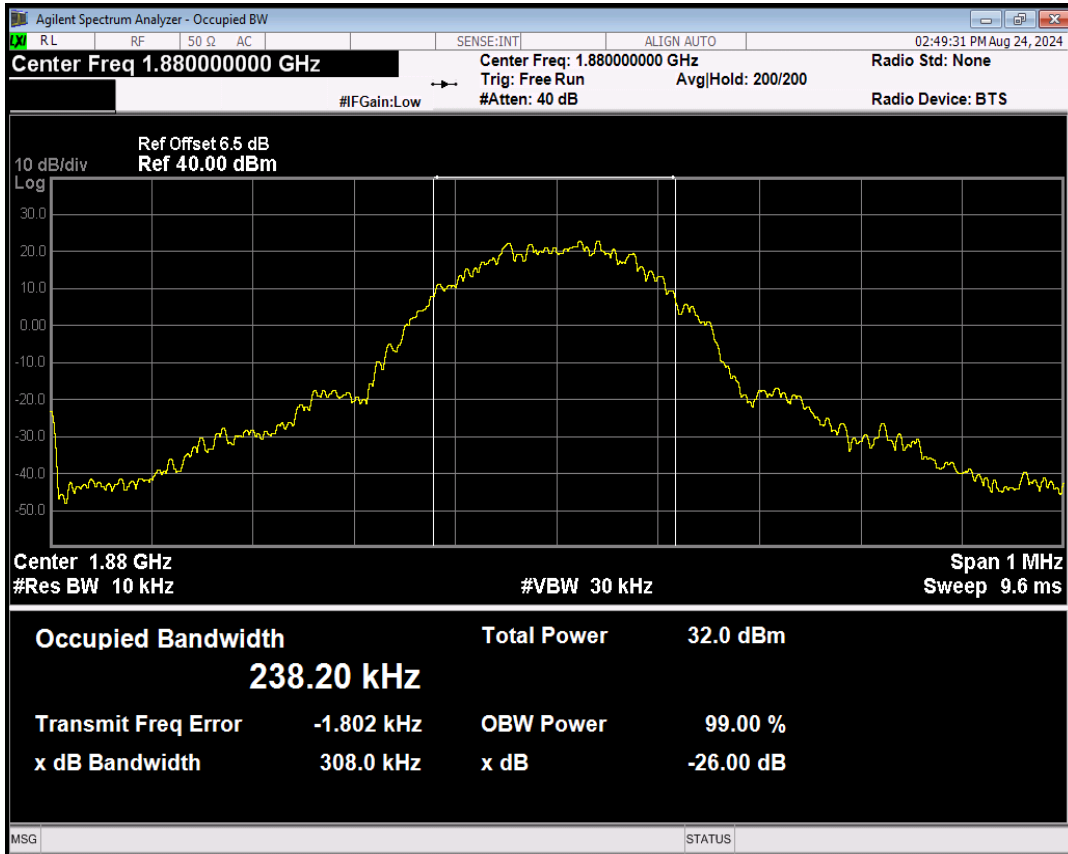


EGPRS1900 Channel=810

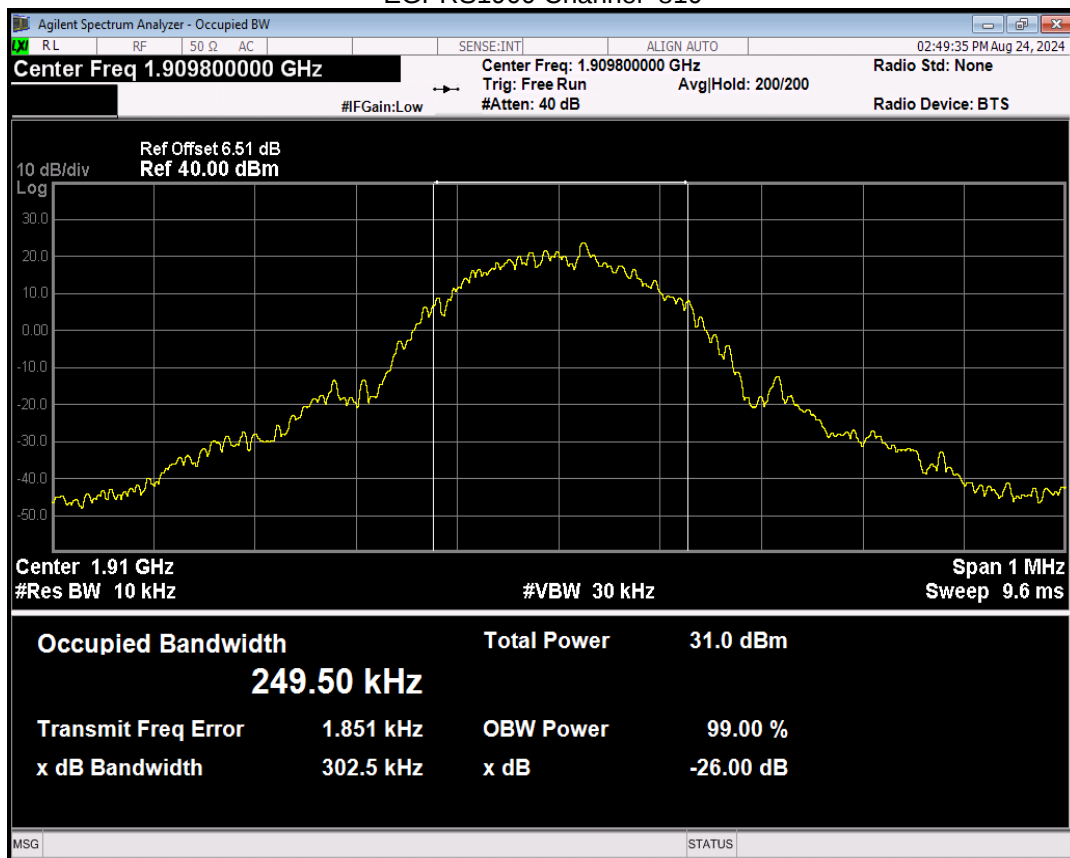


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
WCDMA Band2	9262	1852.4	4146.351	4685.484	PASS
WCDMA Band2	9400	1880	4159.830	4696.606	PASS
WCDMA Band2	9538	1907.6	4184.542	4686.687	PASS
WCDMA Band4	1312	1712.4	4162.225	4664.981	PASS
WCDMA Band4	1450	1740	4145.747	4637.198	PASS
WCDMA Band4	1513	1752.6	4160.283	4667.770	PASS
WCDMA Band5	4132	826.4	4153.340	4661.271	PASS
WCDMA Band5	4182	836.4	4155.086	4670.381	PASS
WCDMA Band5	4233	846.6	4154.281	4679.250	PASS

Note: In WCDMA, RMC, HSDPA and HSUPA all three tests only reflect the worst mode RMC.


WCDMA Band2 Channel=9262

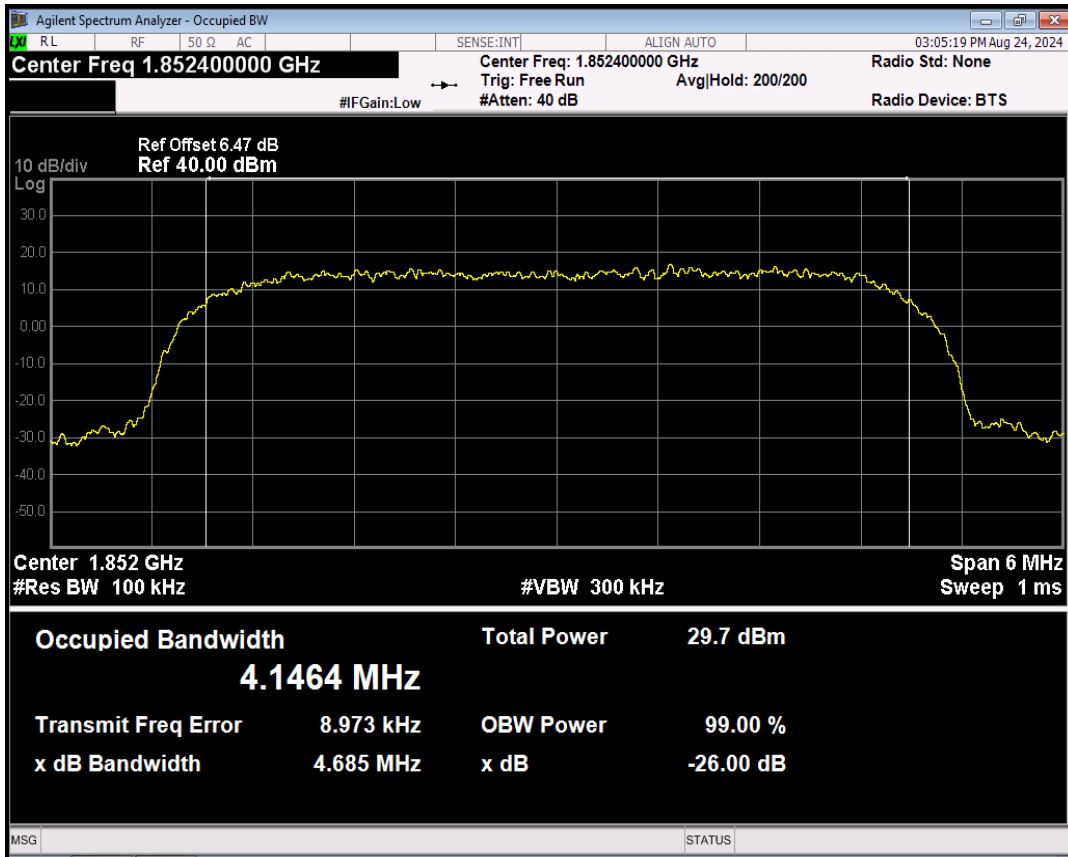


WCDMA Band2 Channel=9400

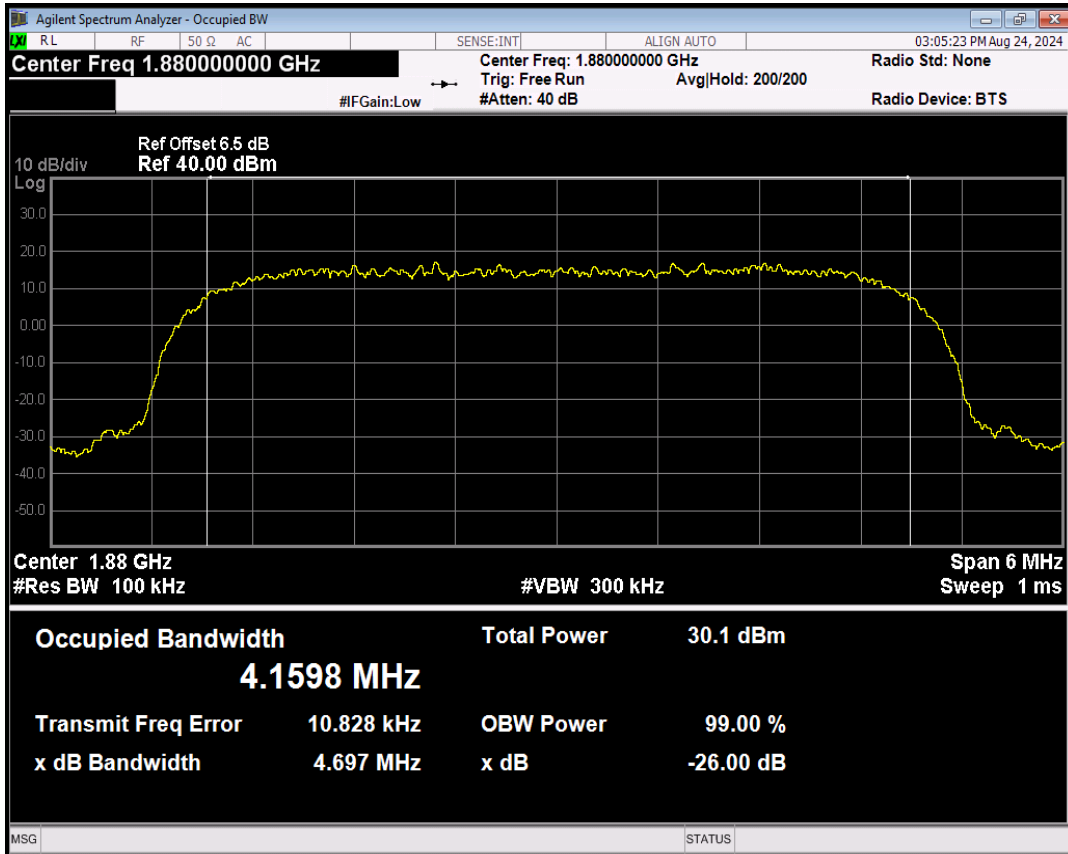


WCDMA Band2 Channel=9538

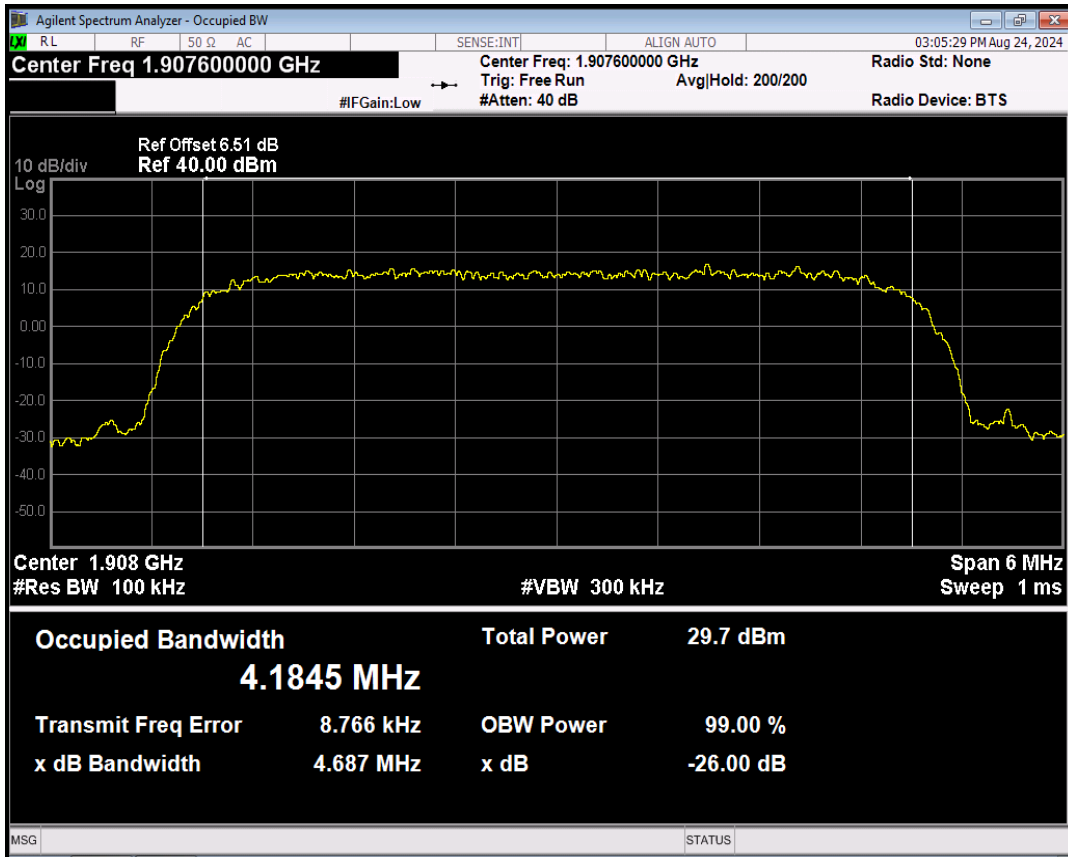


WCDMA Band4 Channel=1312

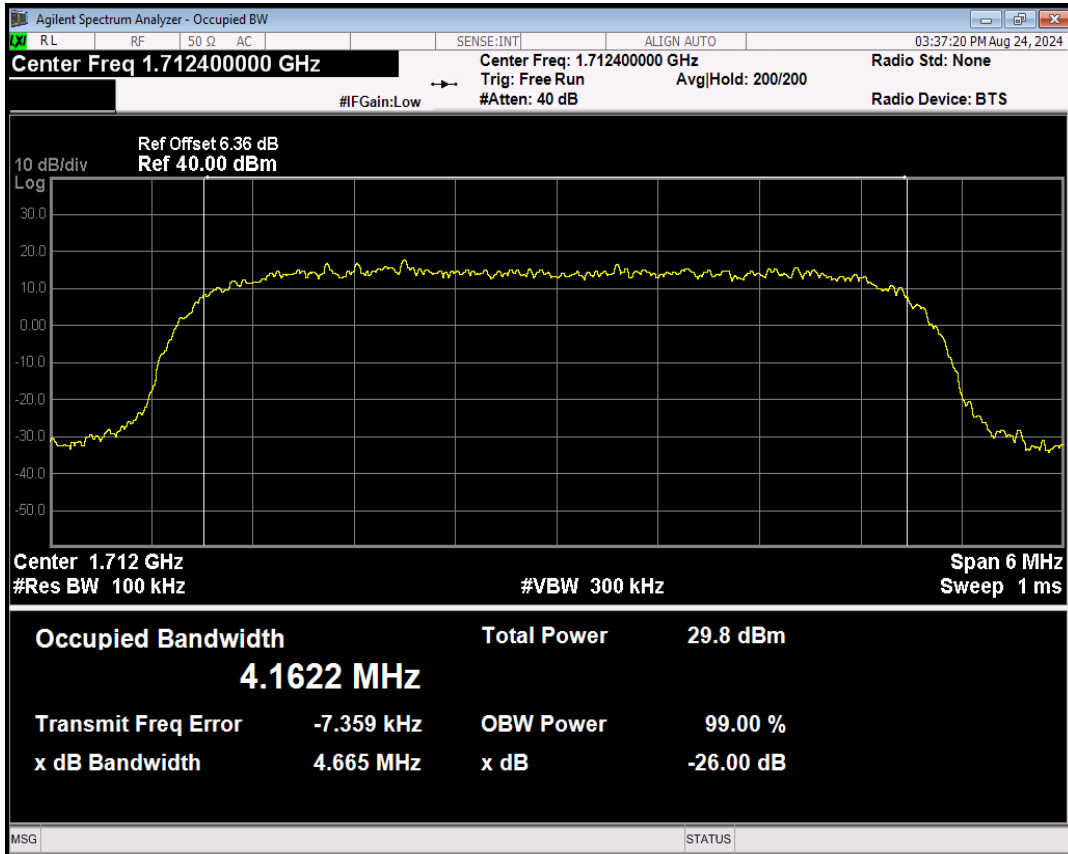


WCDMA Band4 Channel=1450

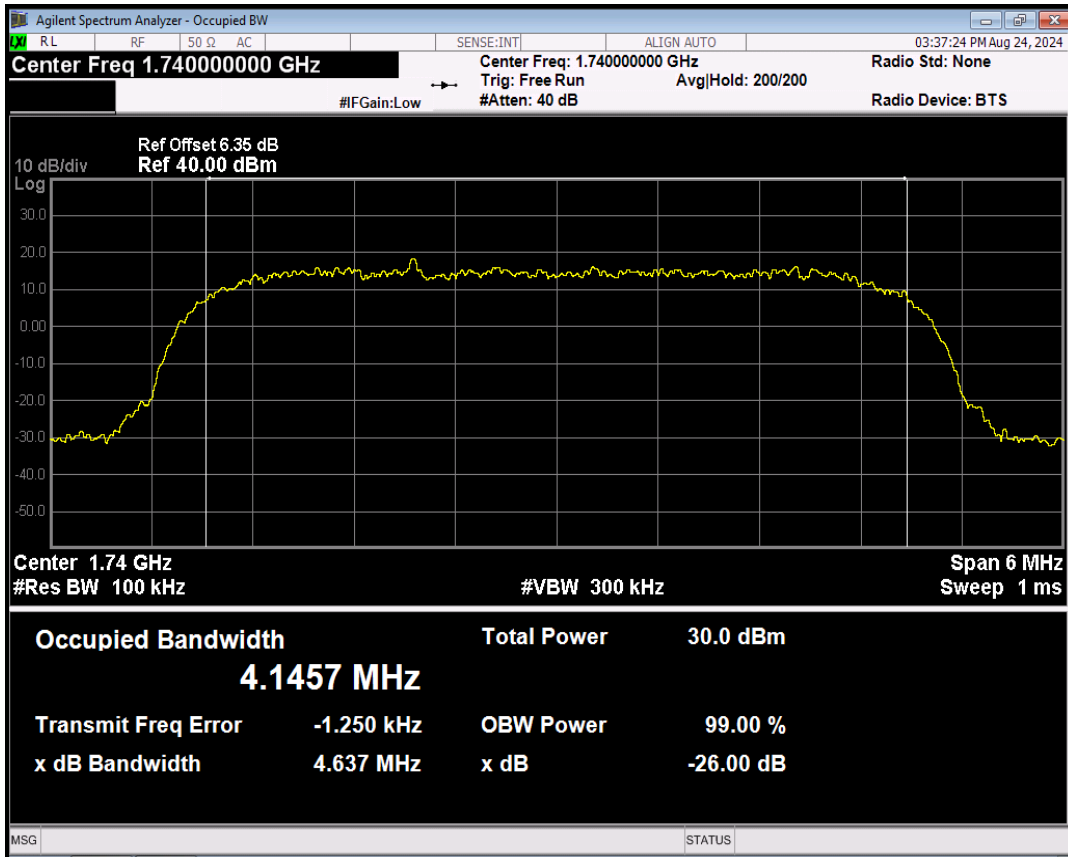


WCDMA Band4 Channel=1513

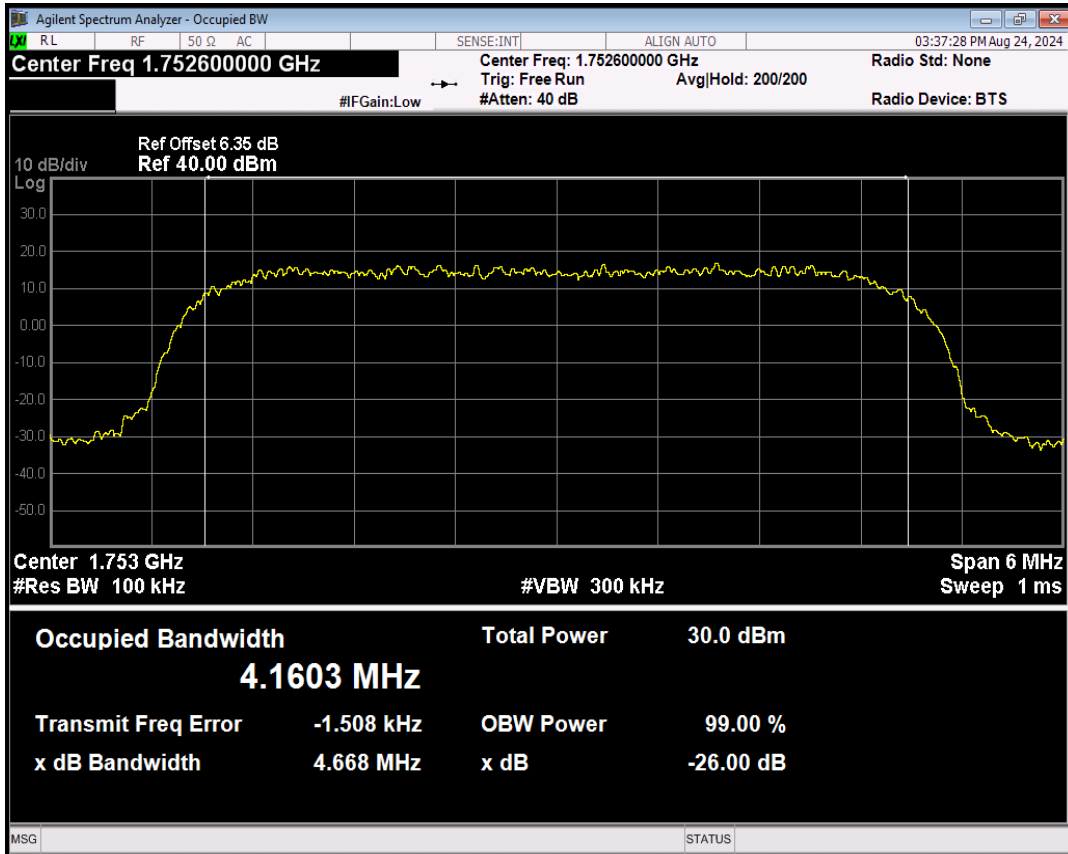



WCDMA Band5 Channel=4132

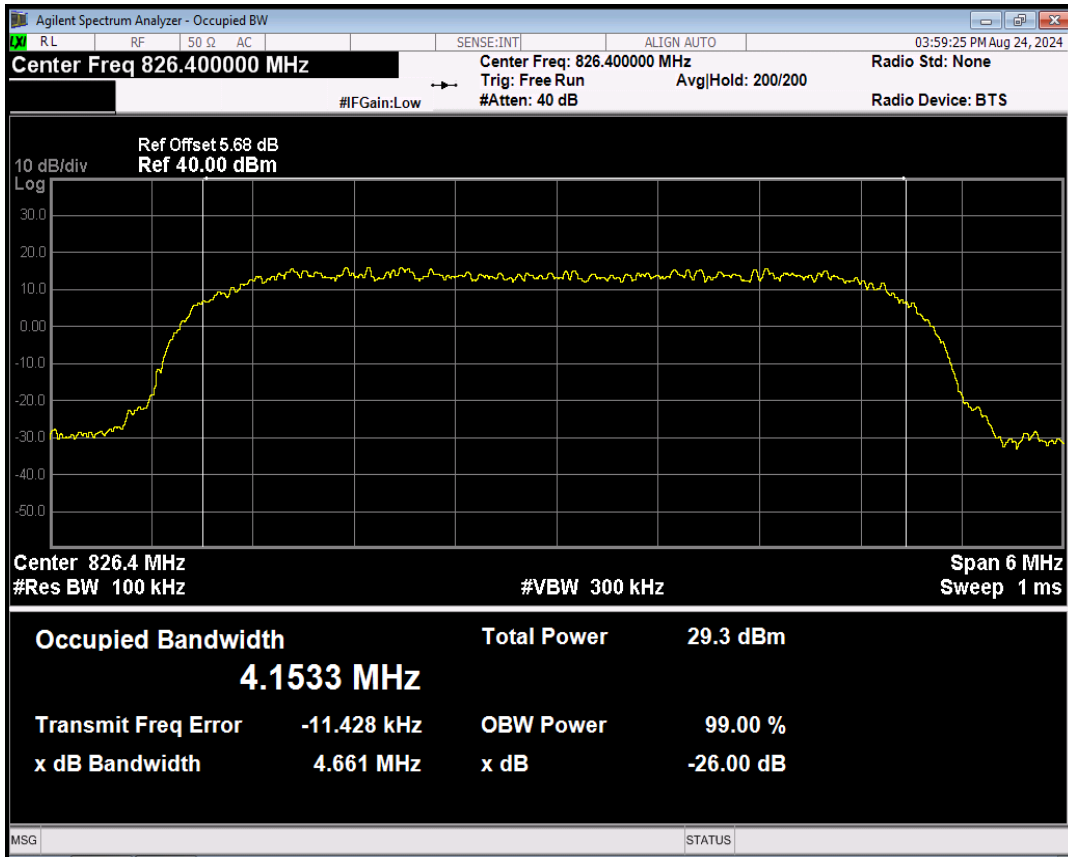

WCDMA Band5 Channel=4182

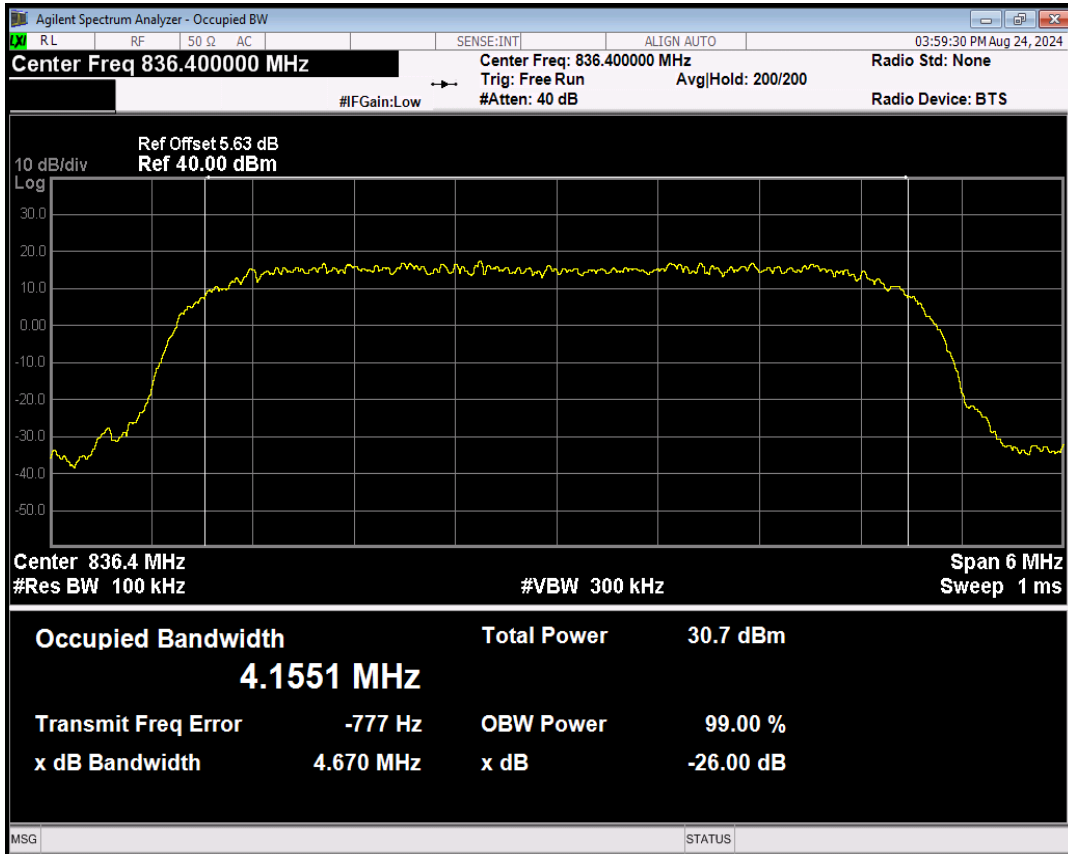


WCDMA Band5 Channel=4233

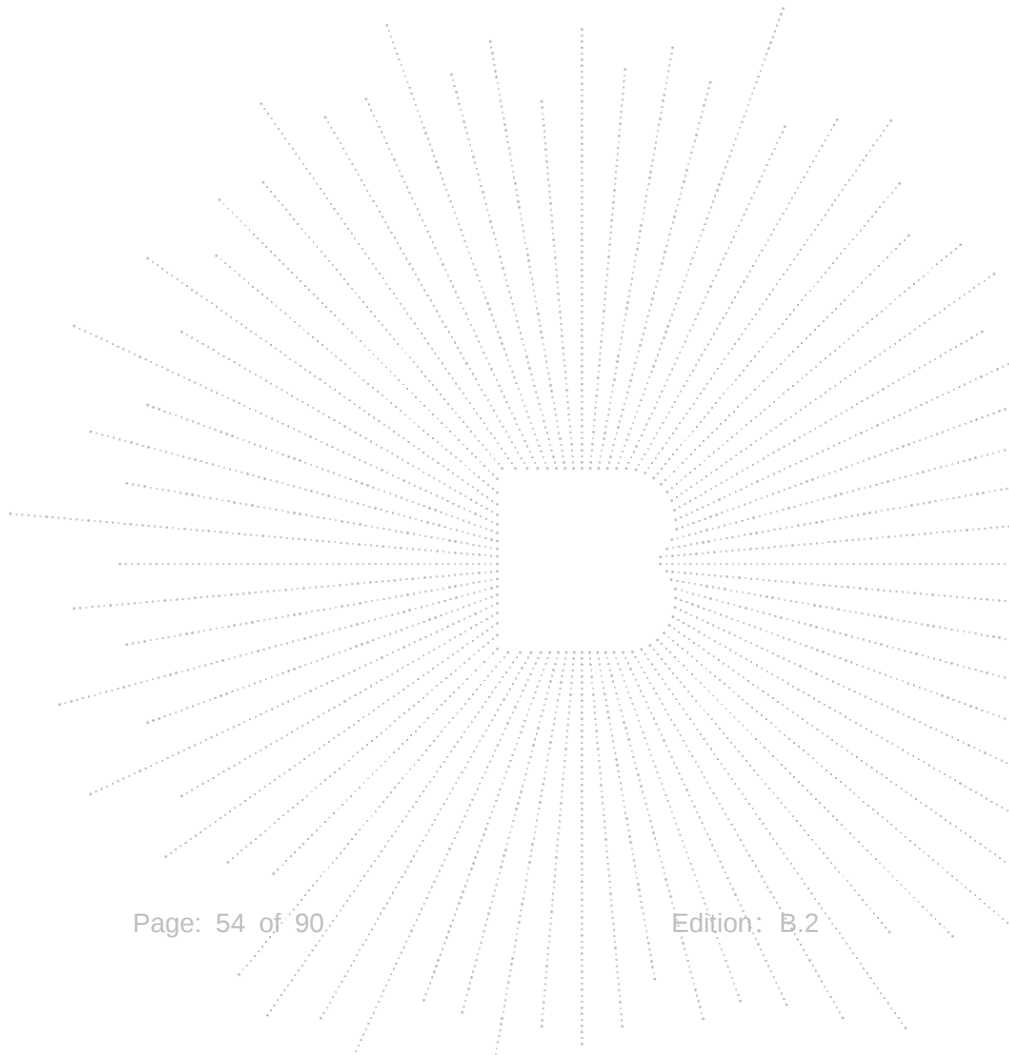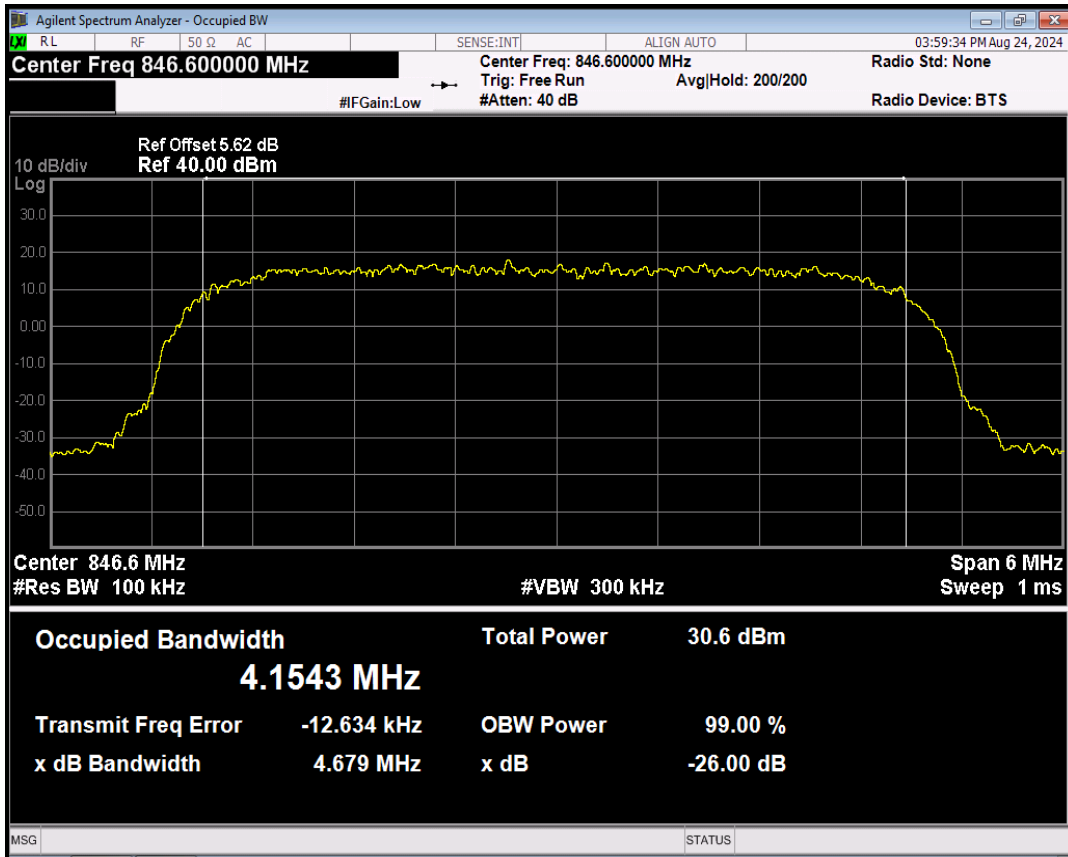

9. Out of Band Emissions at Antenna Terminal

9.1 Block Diagram Of Test Setup

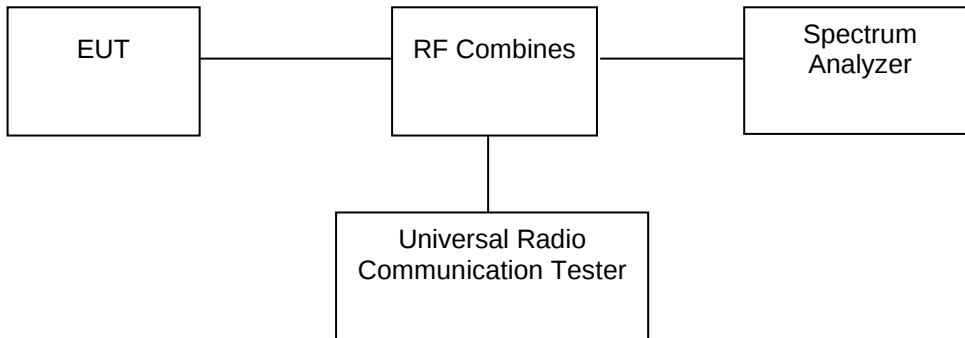

9.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

9.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic. At the edge of the authorized Frequency block/band: RBW set 1%-5%OBW.

9.4 Test Result


GSM1900 Channel=512

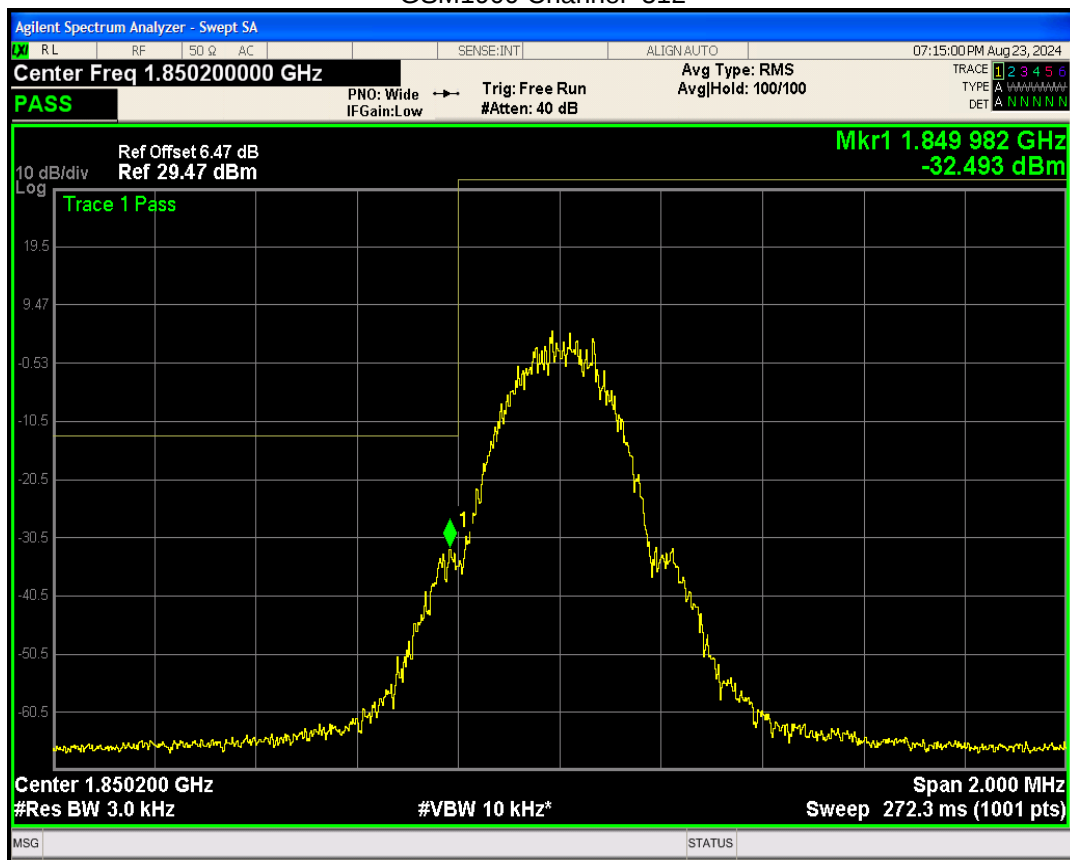


GSM1900 Channel=810

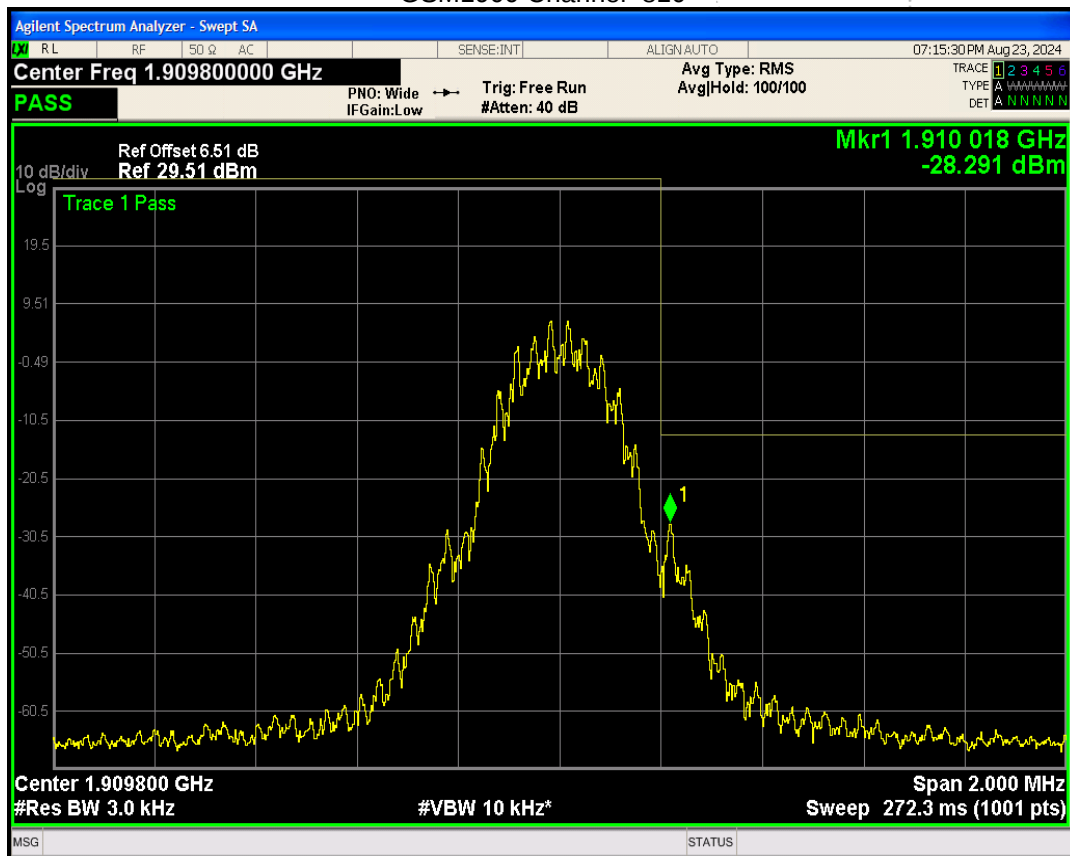


GSM850 Channel=128

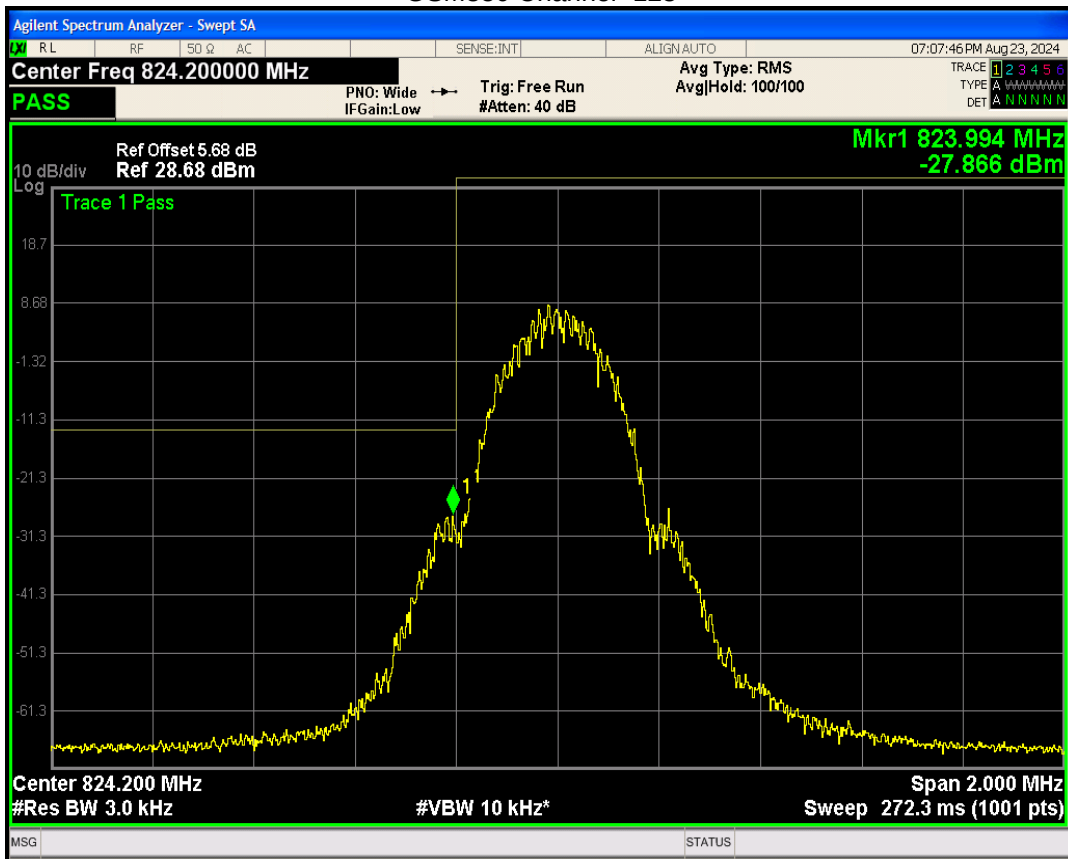


GSM850 Channel=251

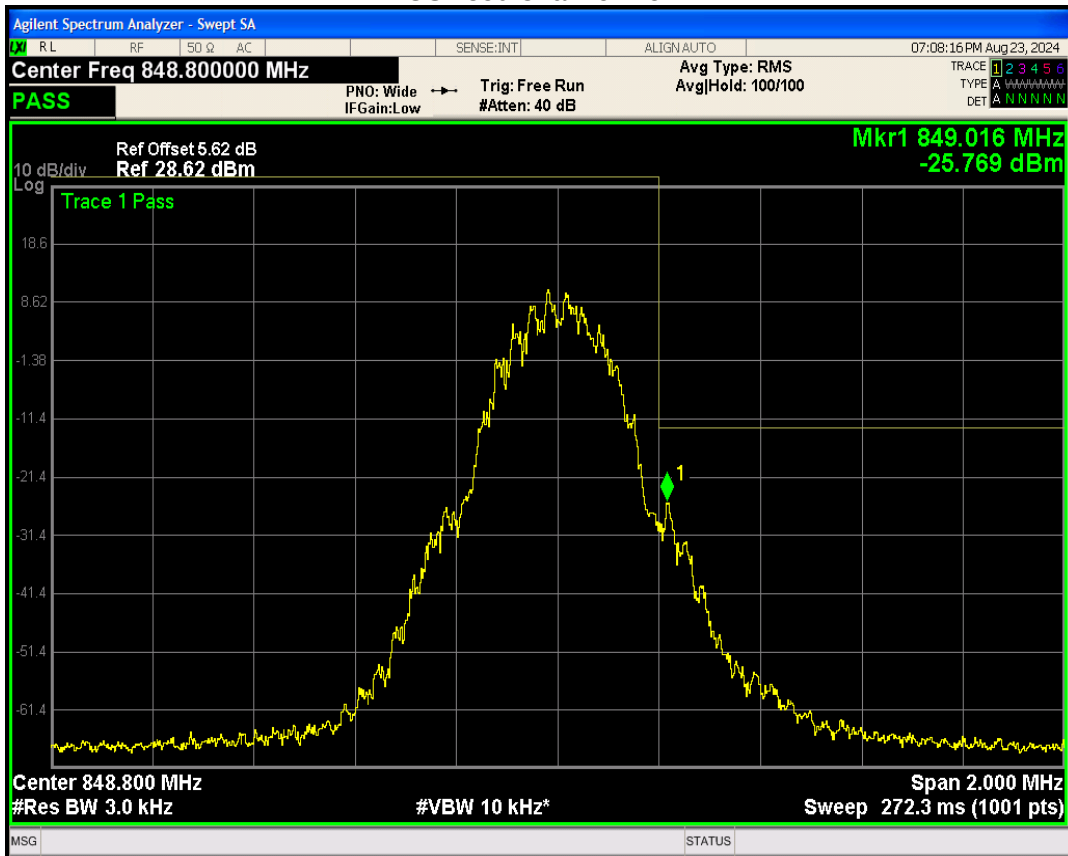


GSM1900 Channel=512

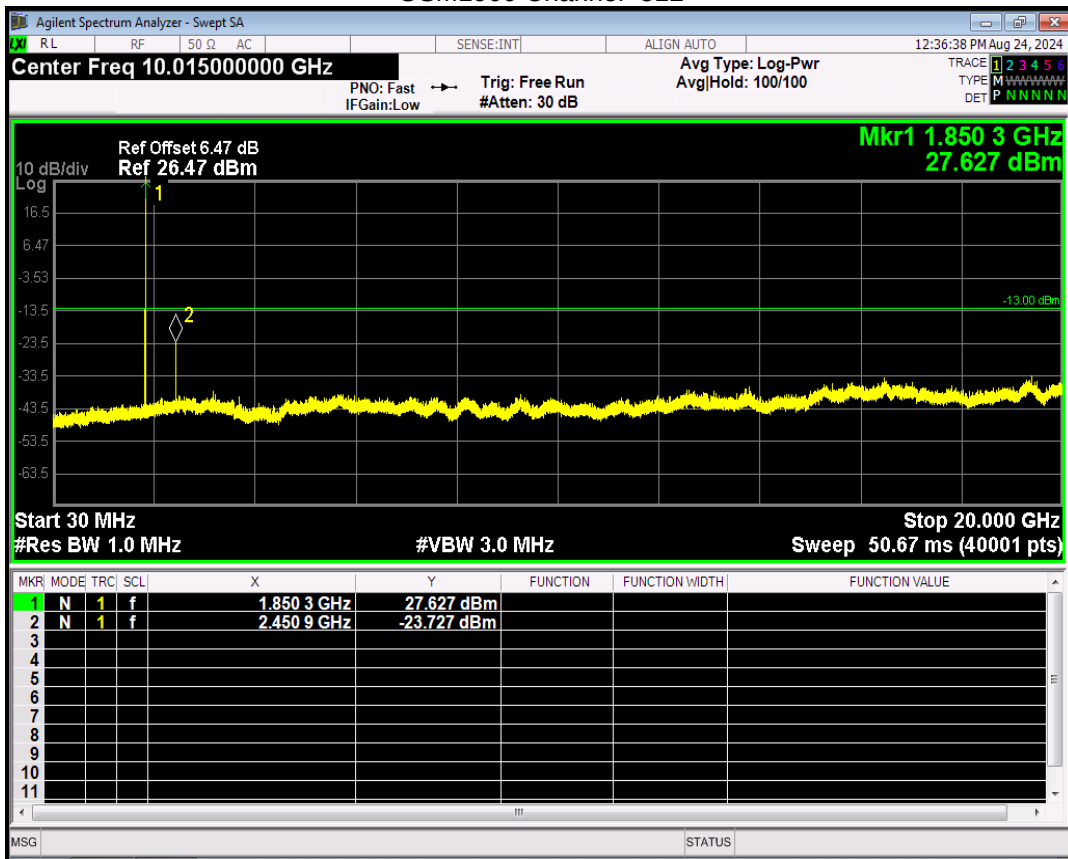


GSM1900 Channel=661

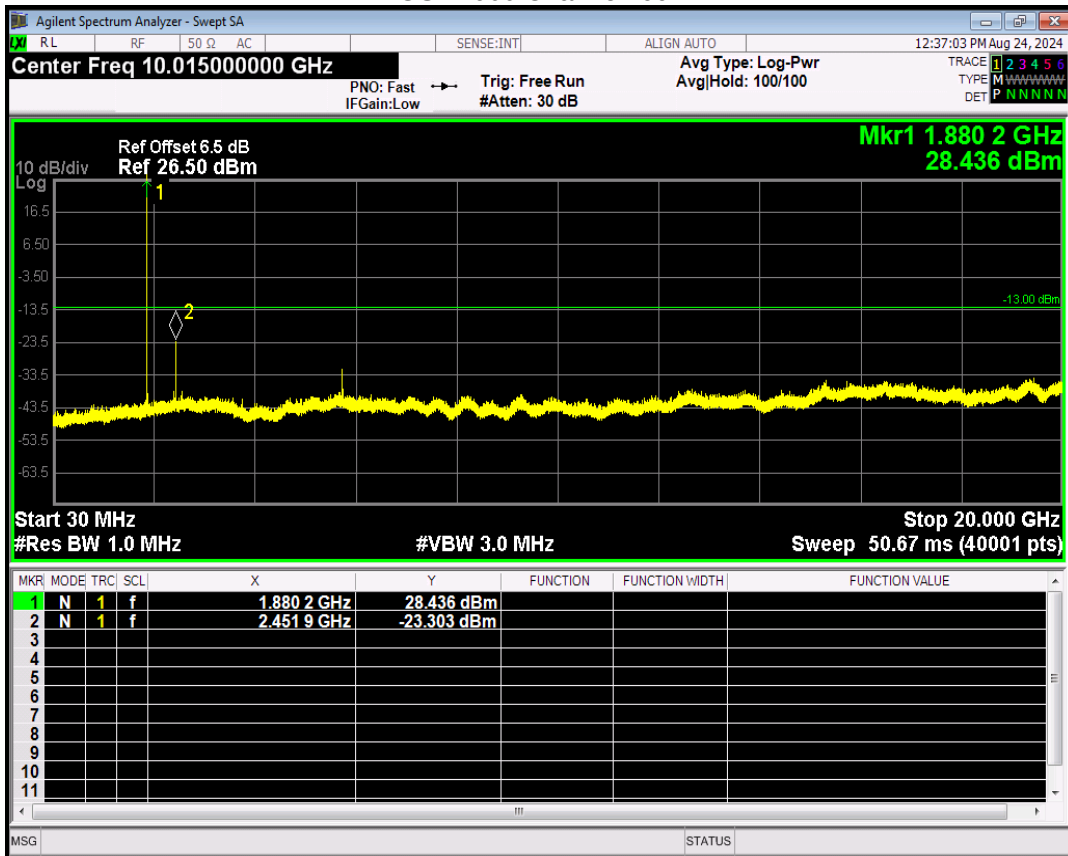


GSM1900 Channel=810

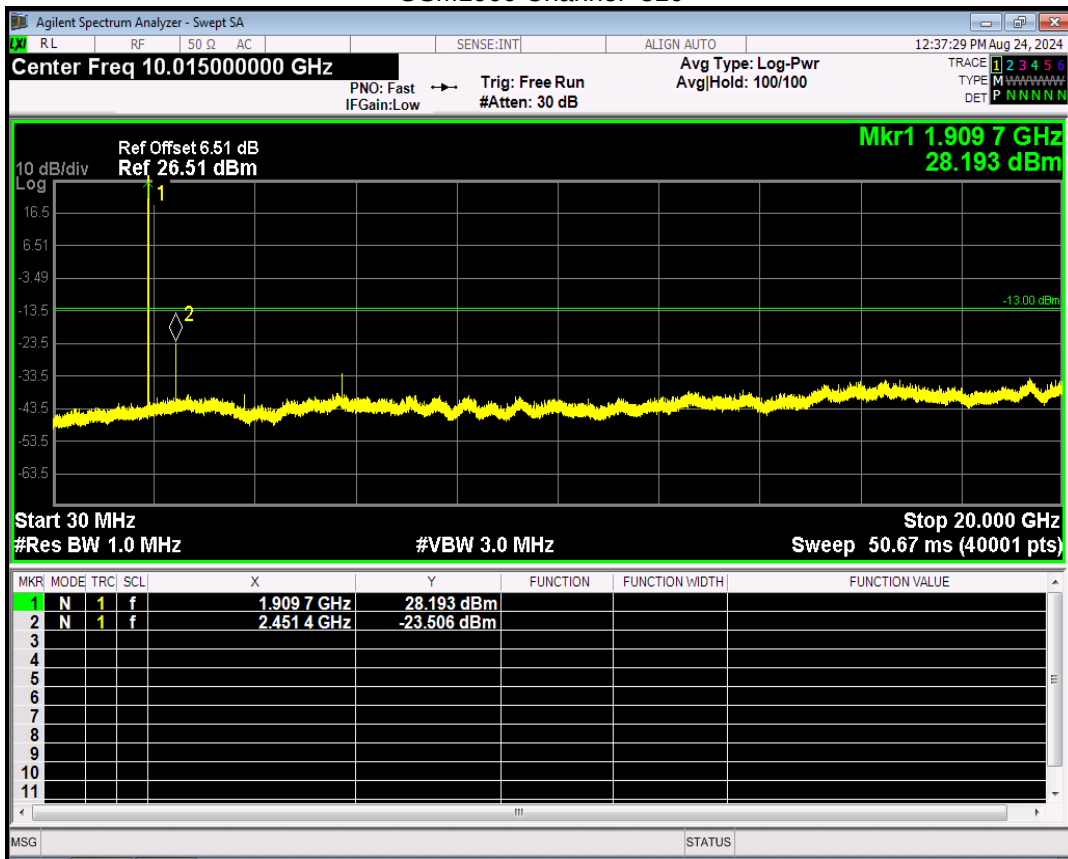


GSM850 Channel=128

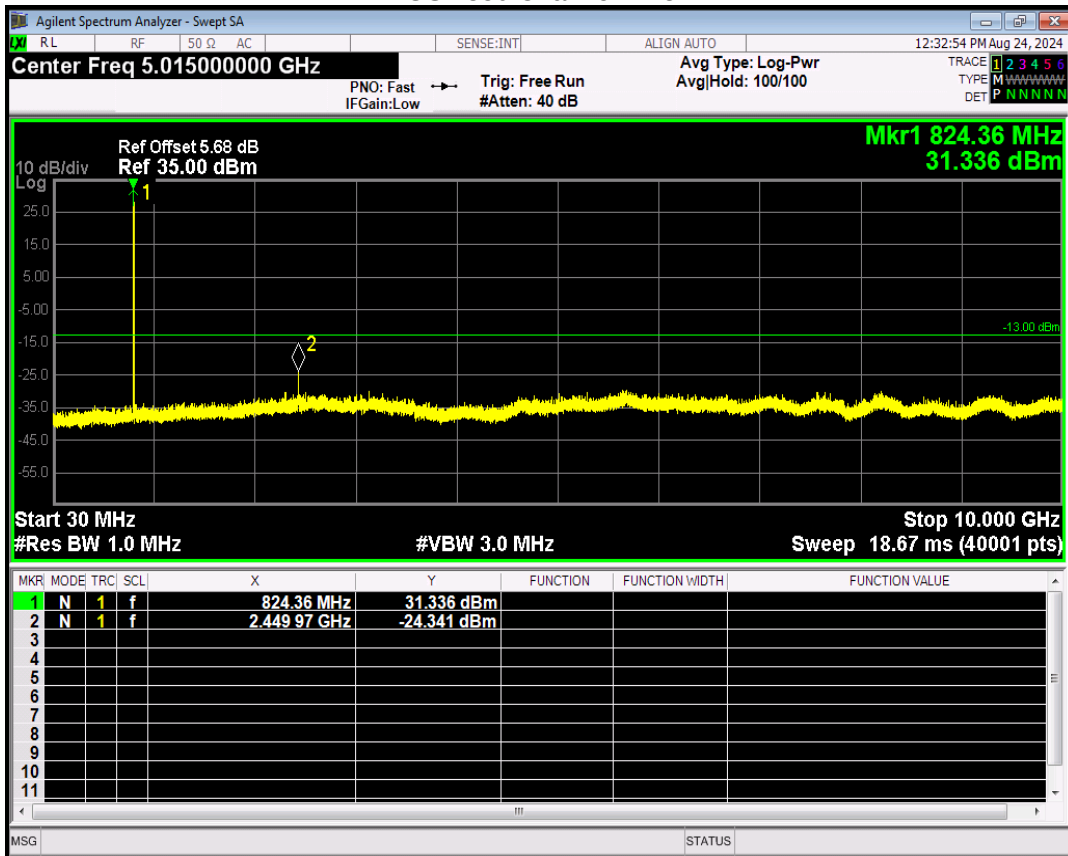


GSM850 Channel=190

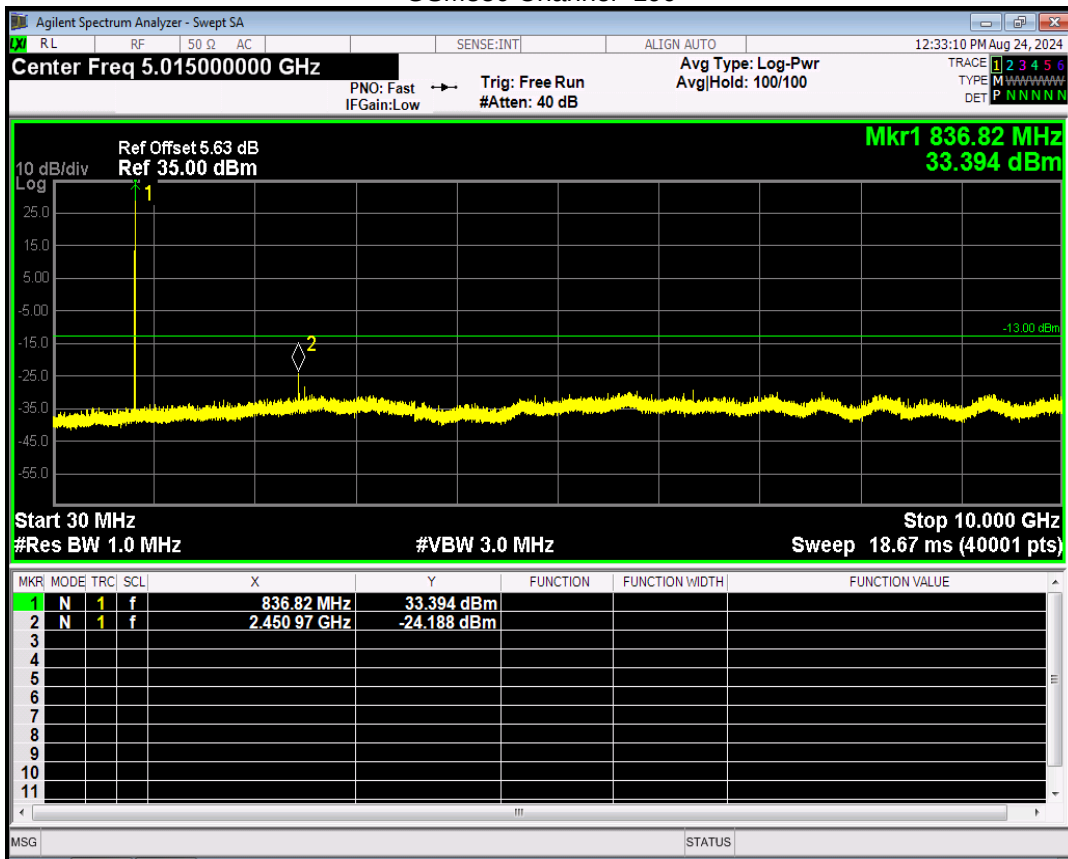


GSM850 Channel=251

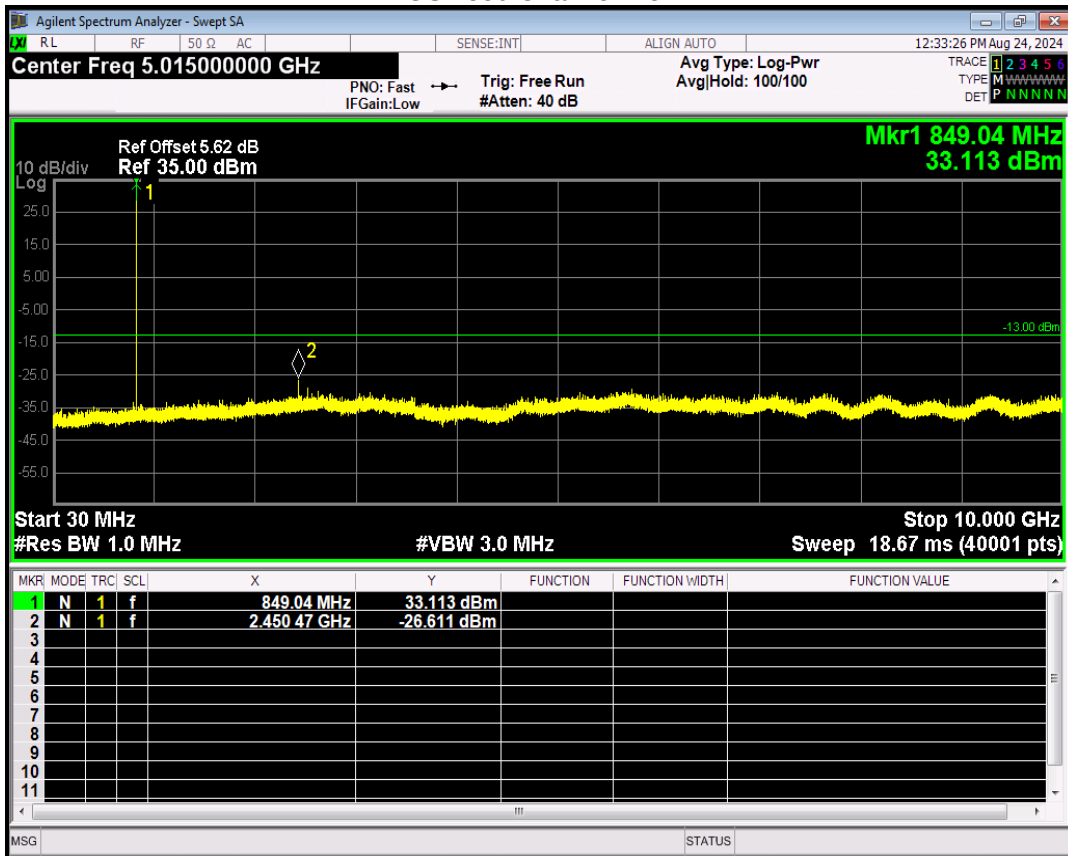


GPRS1900 Channel=512

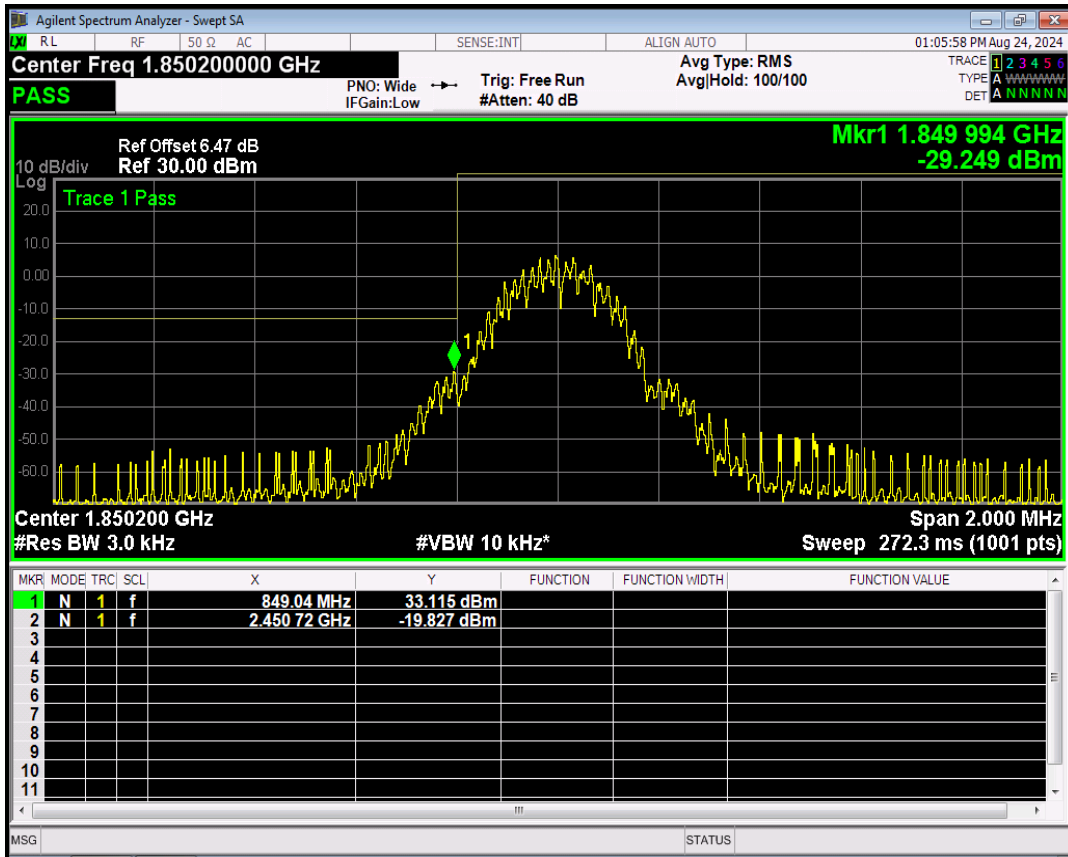


GPRS1900 Channel=810

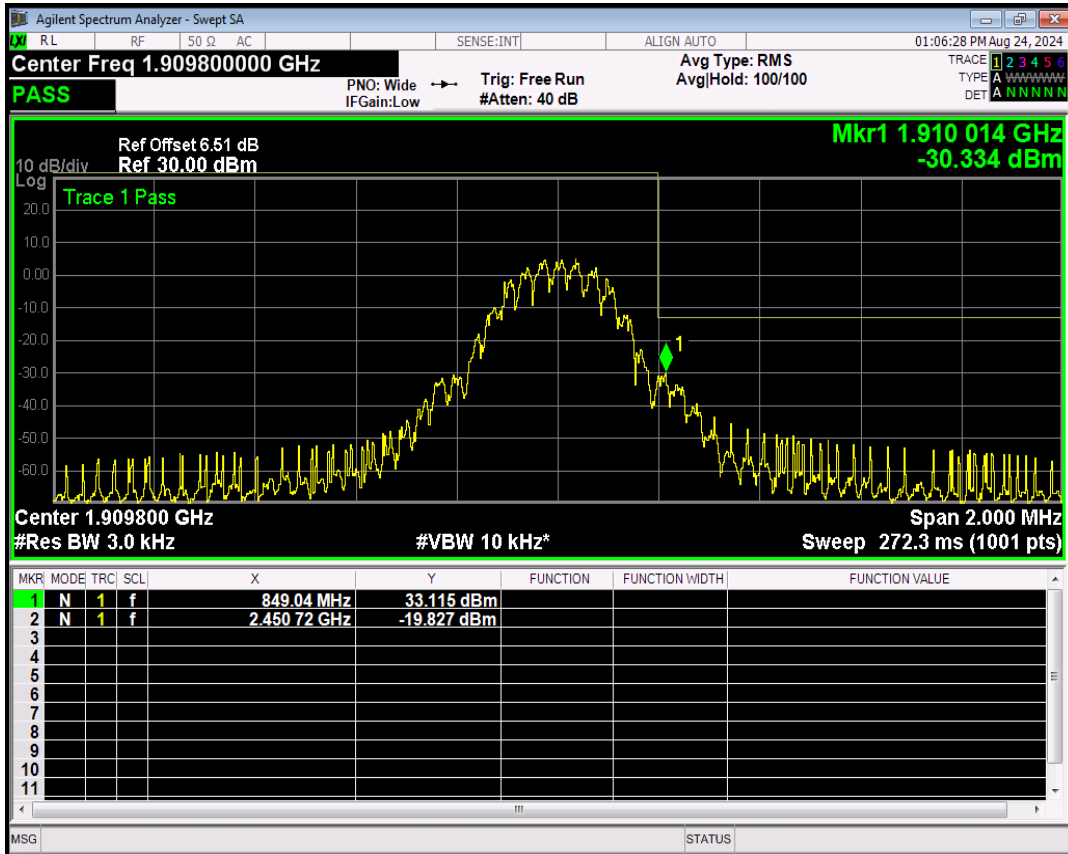


GPRS850 Channel=128

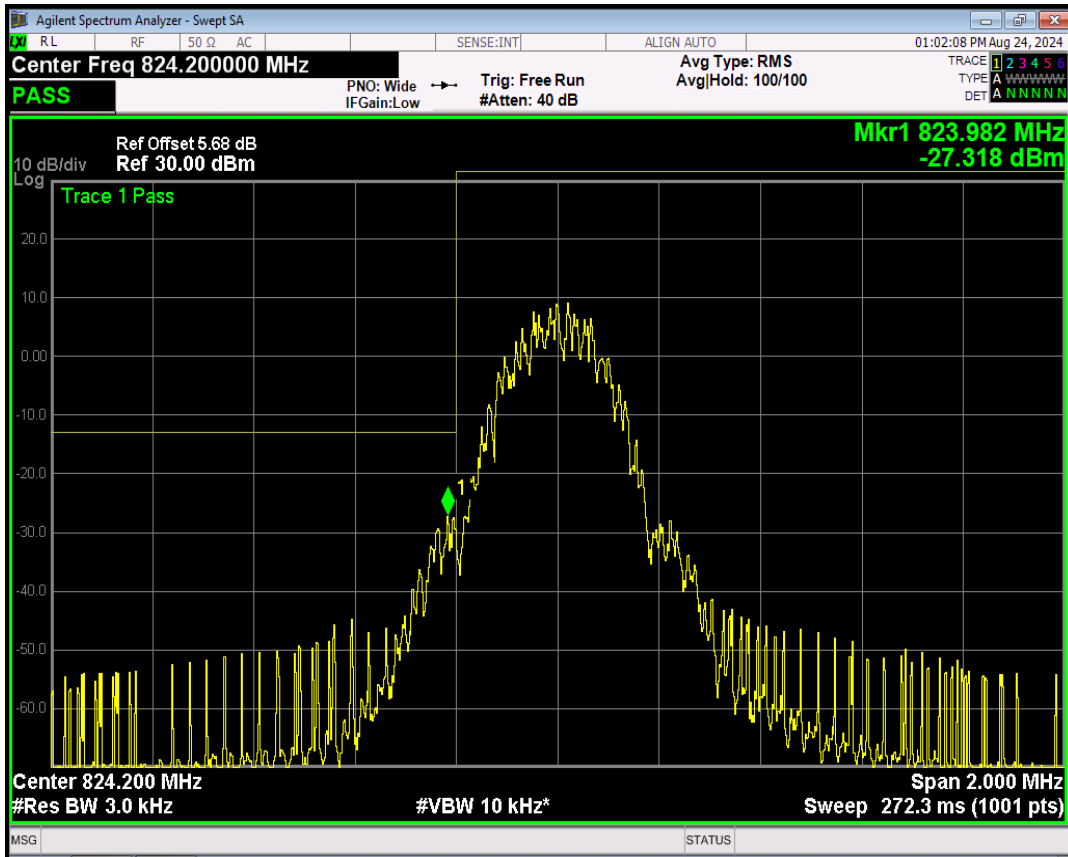


GPRS850 Channel=251

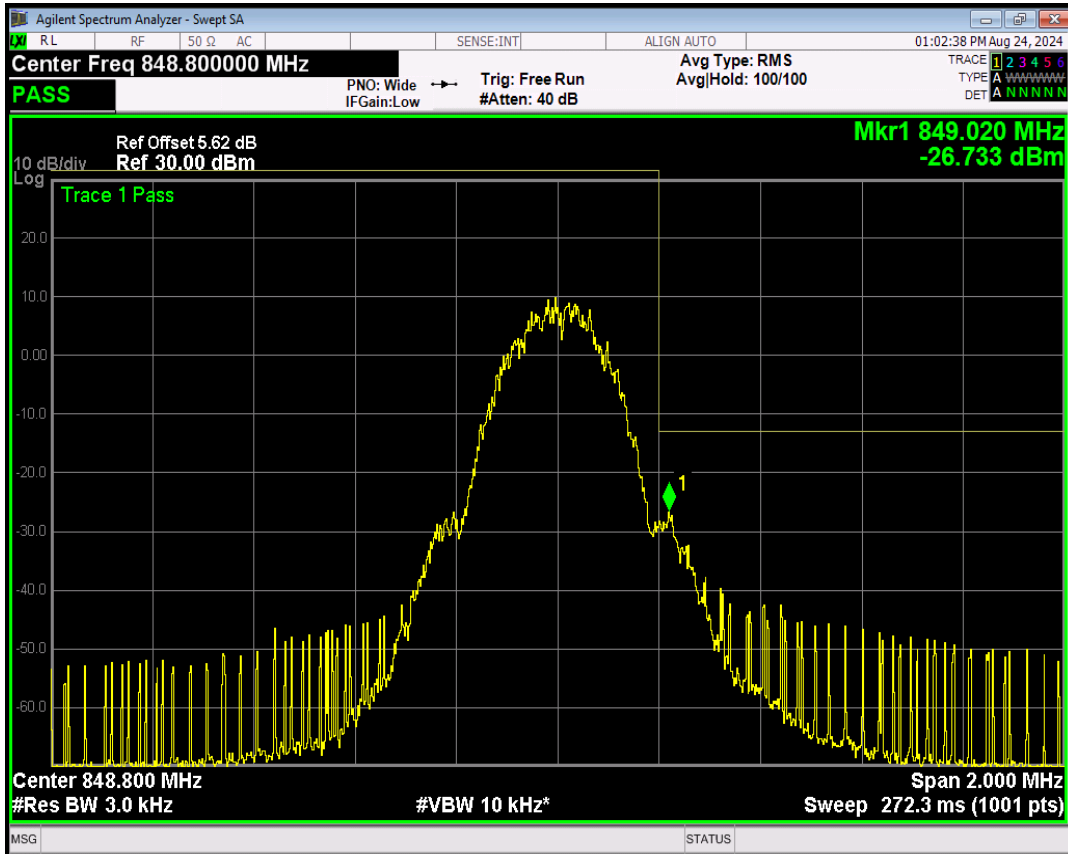


GPRS1900 Channel=512

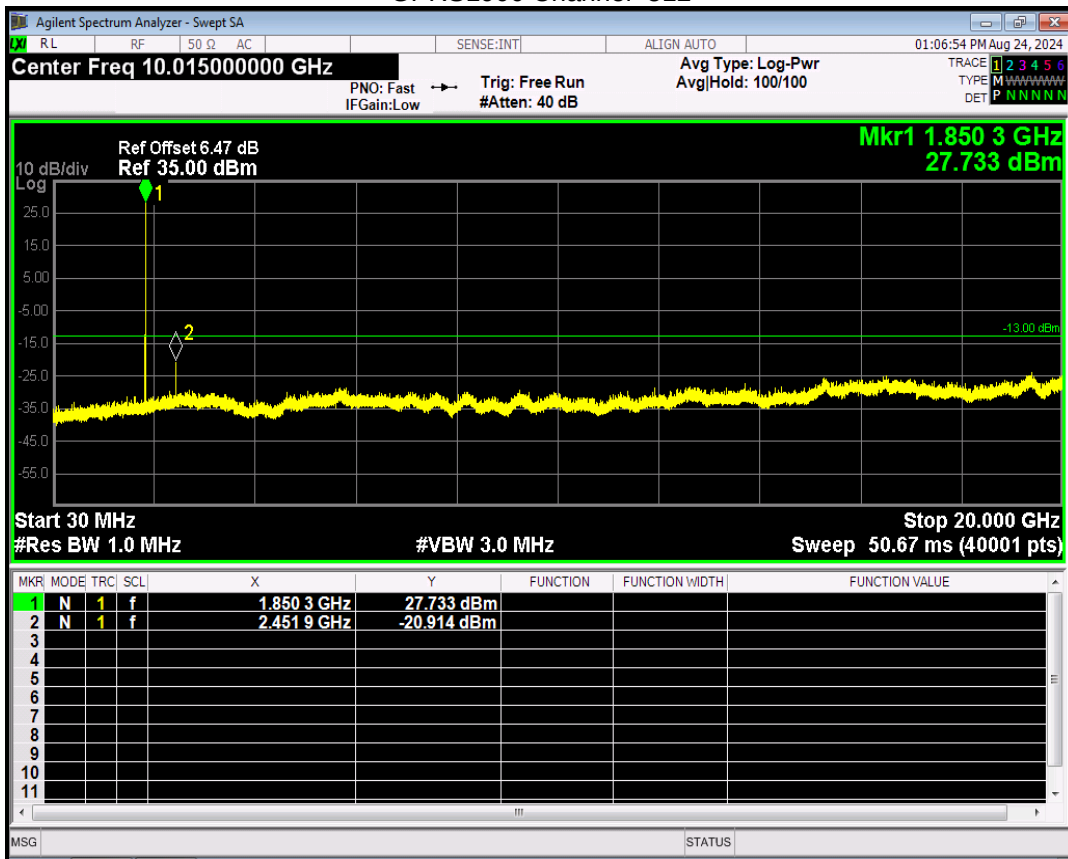


GPRS1900 Channel=661

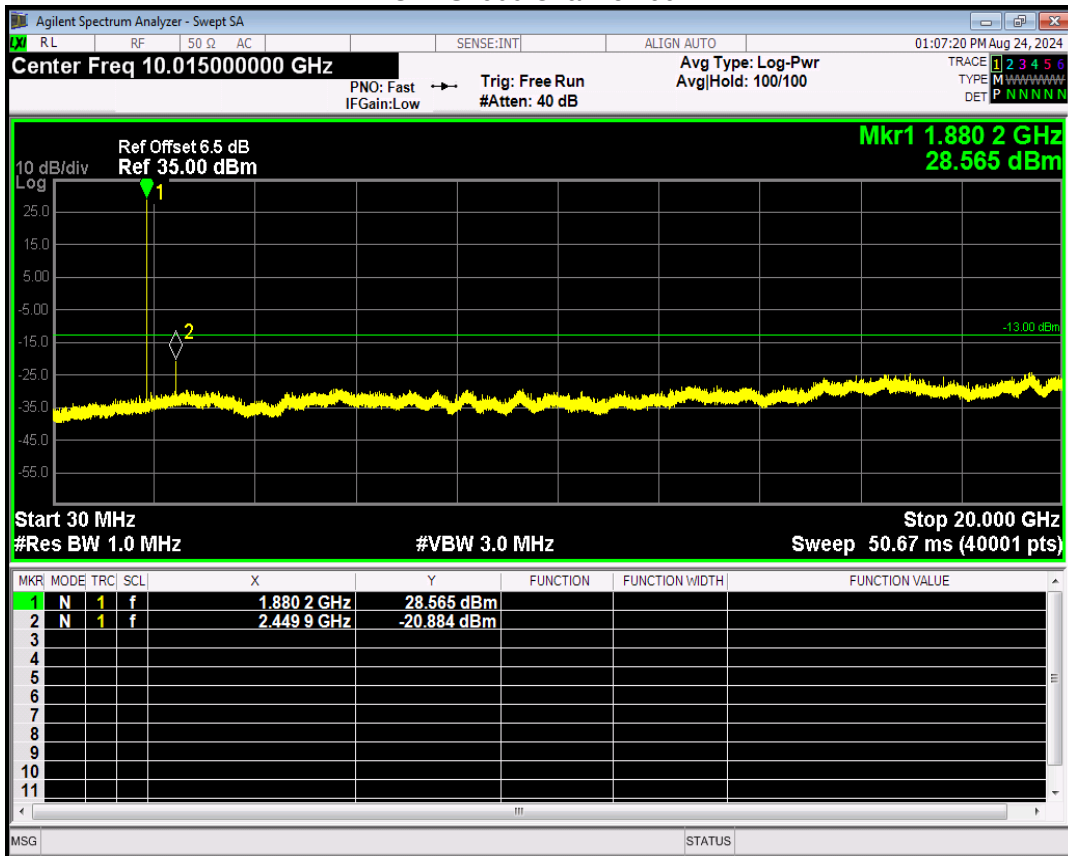


GPRS1900 Channel=810

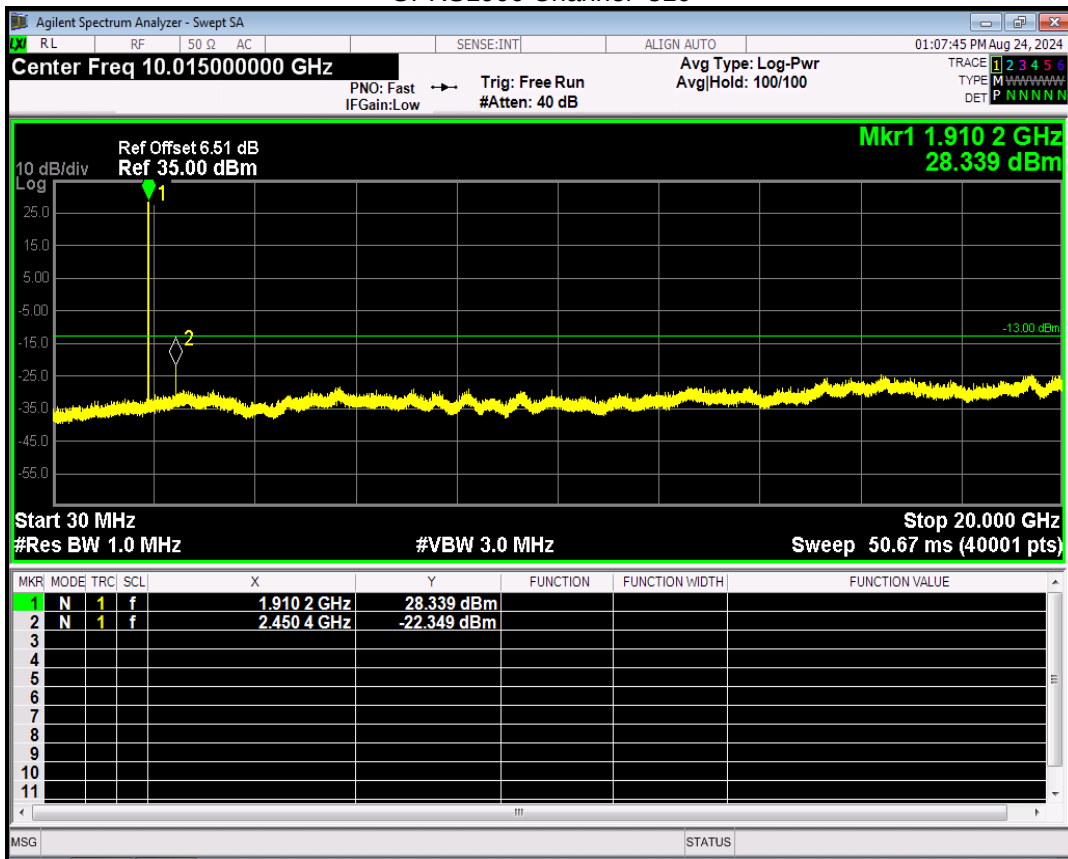


GPRS850 Channel=128

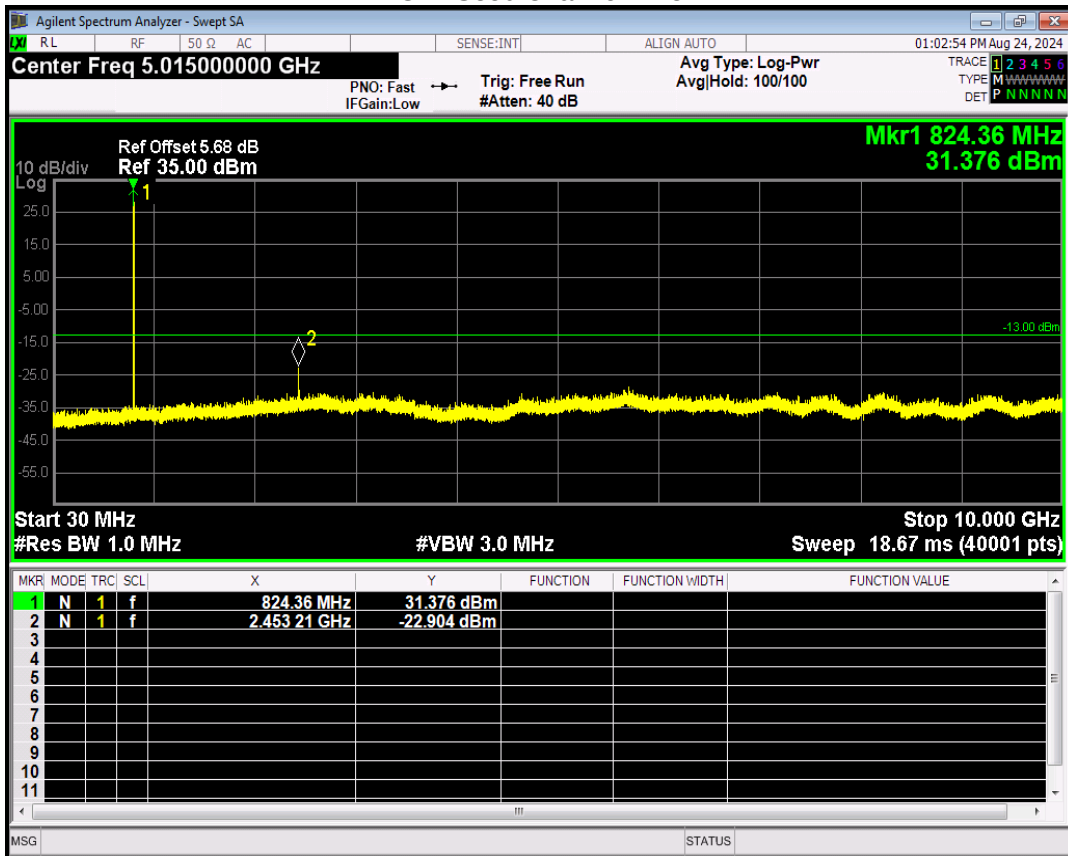


GPRS850 Channel=190

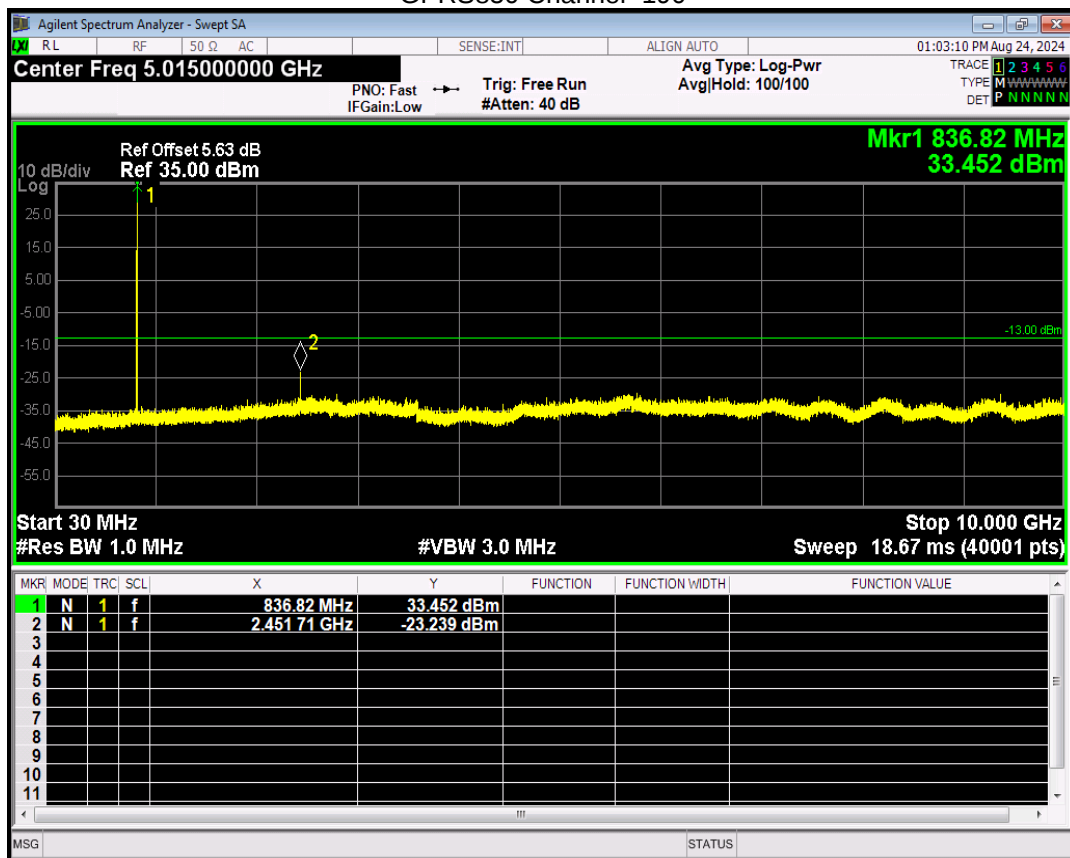


GPRS850 Channel=251

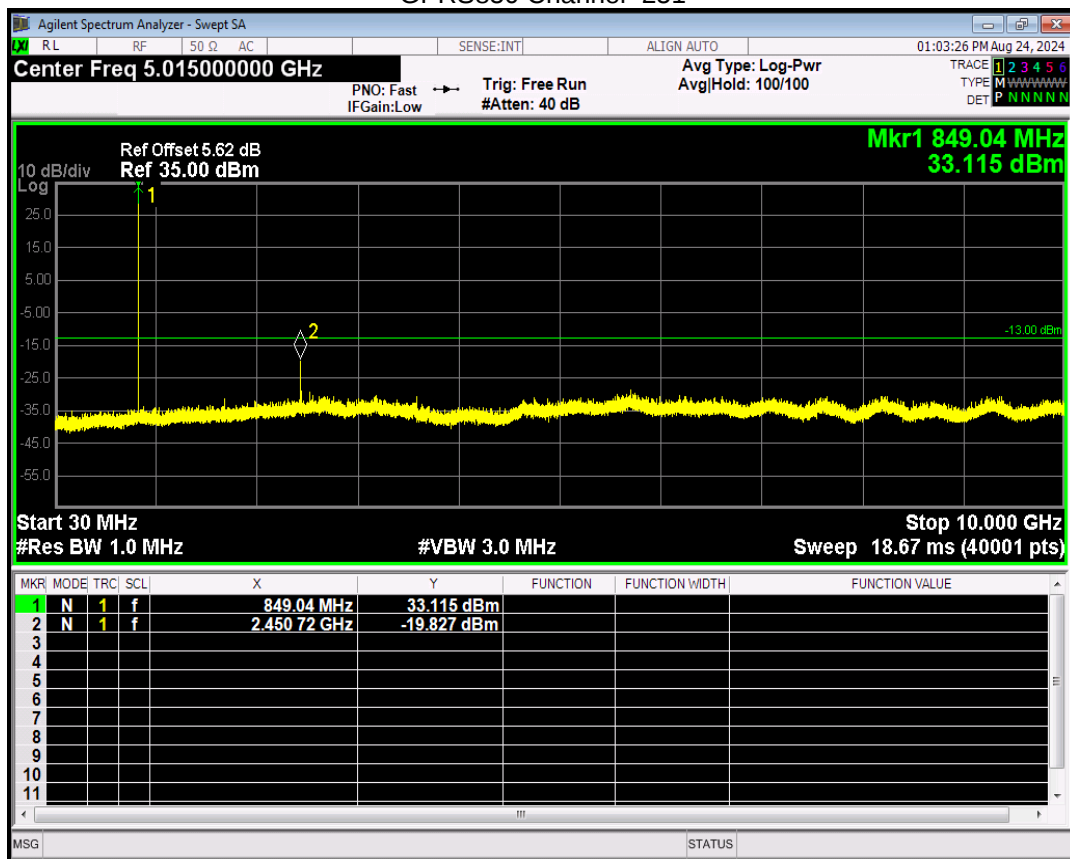


EGPRS1900 Channel=512

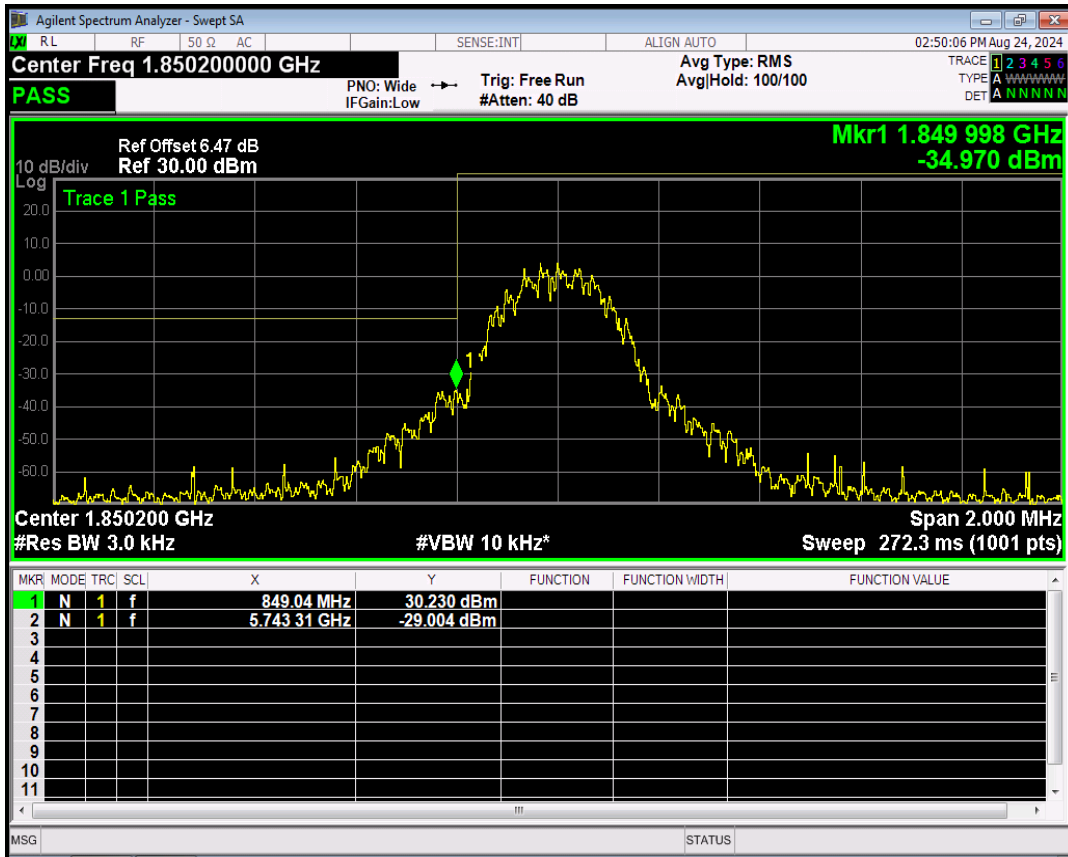

EGPRS1900 Channel=810

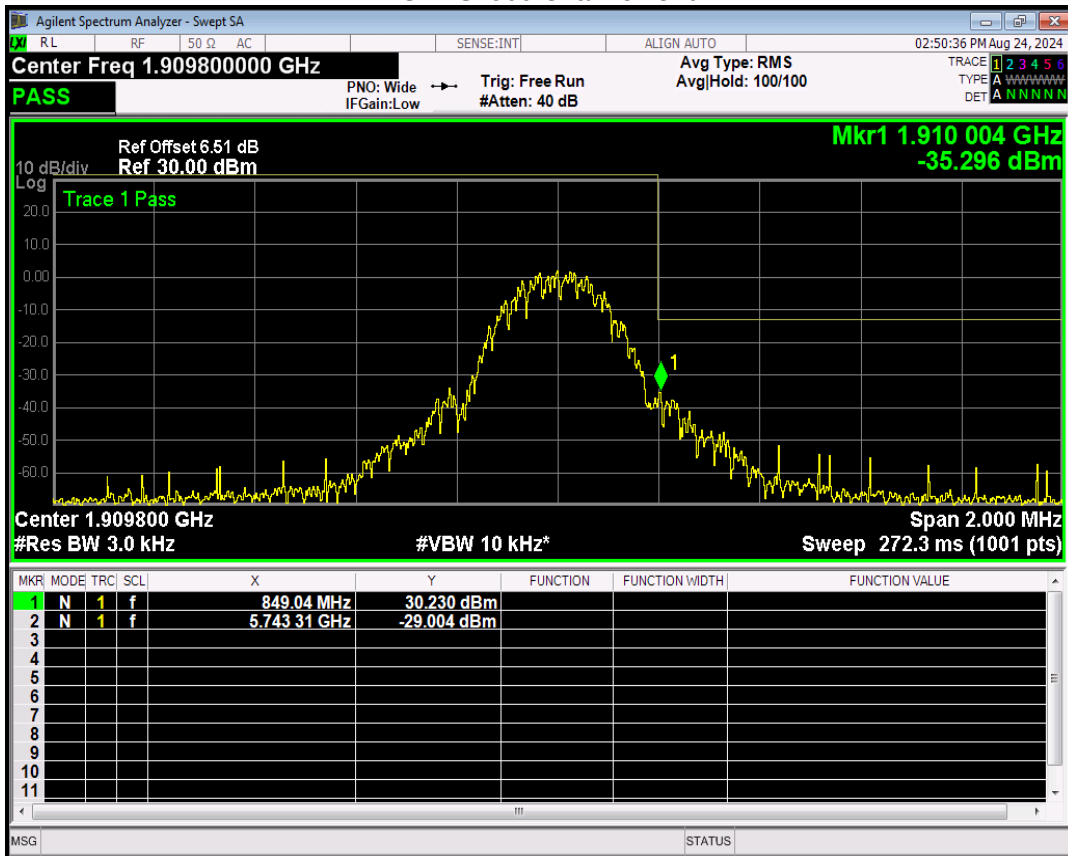


EGPRS850 Channel=128

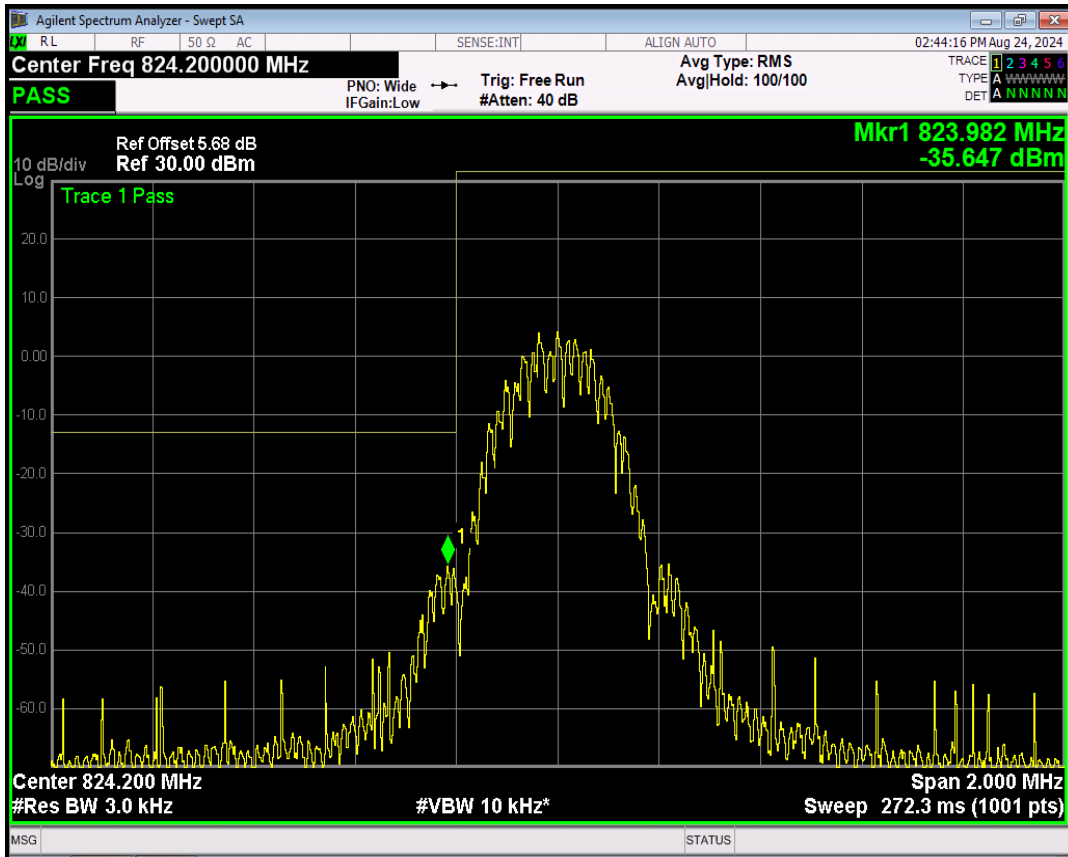


EGPRS850 Channel=251




EGPRS1900 Channel=512

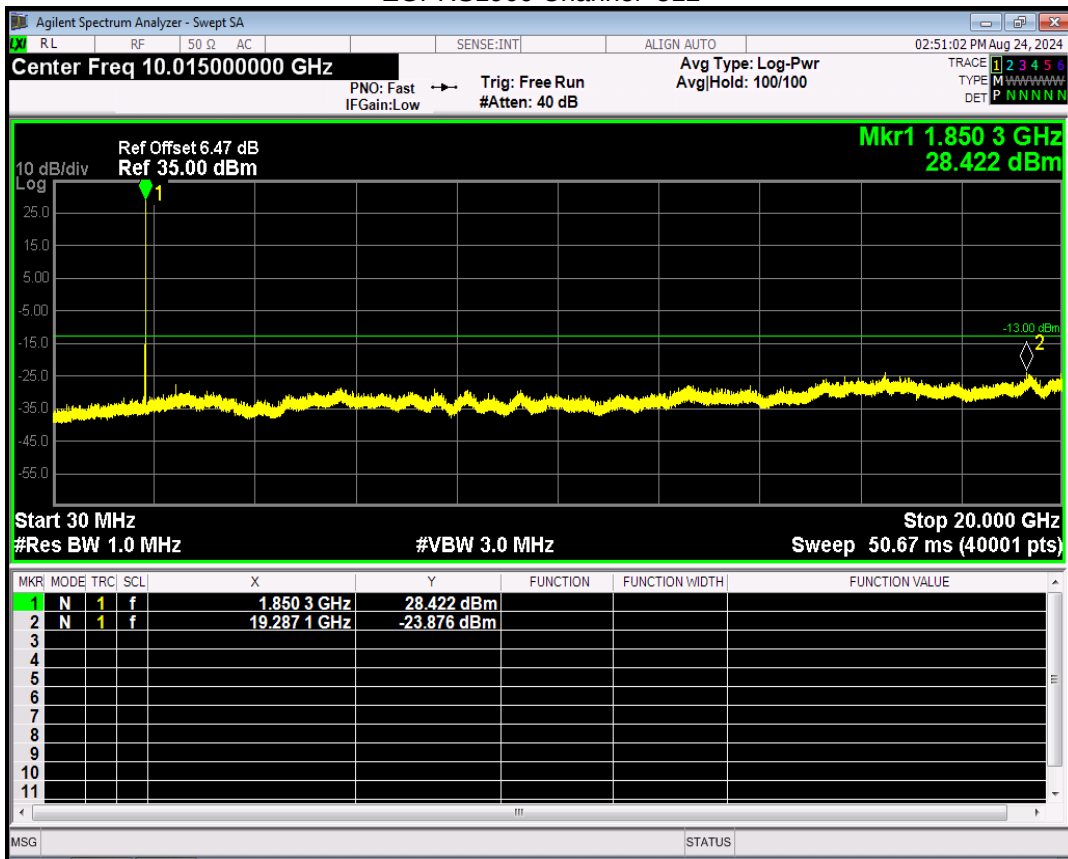


EGPRS1900 Channel=661

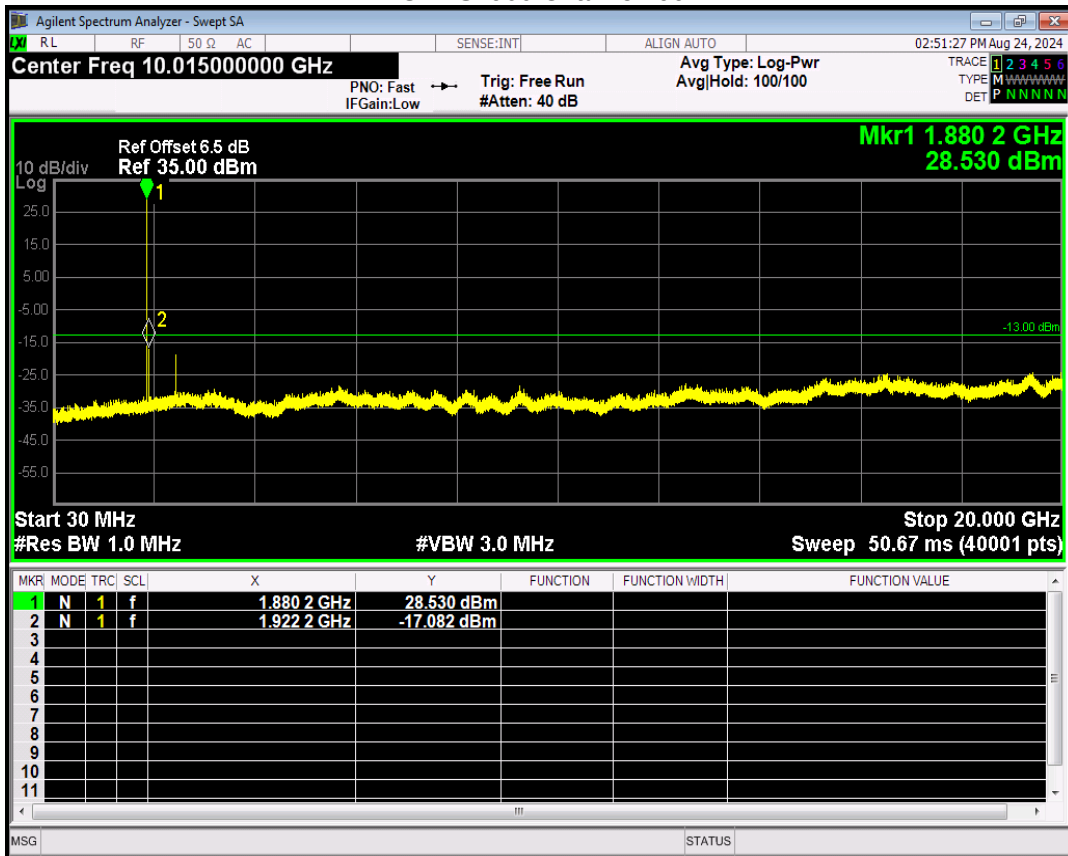


EGPRS1900 Channel=810

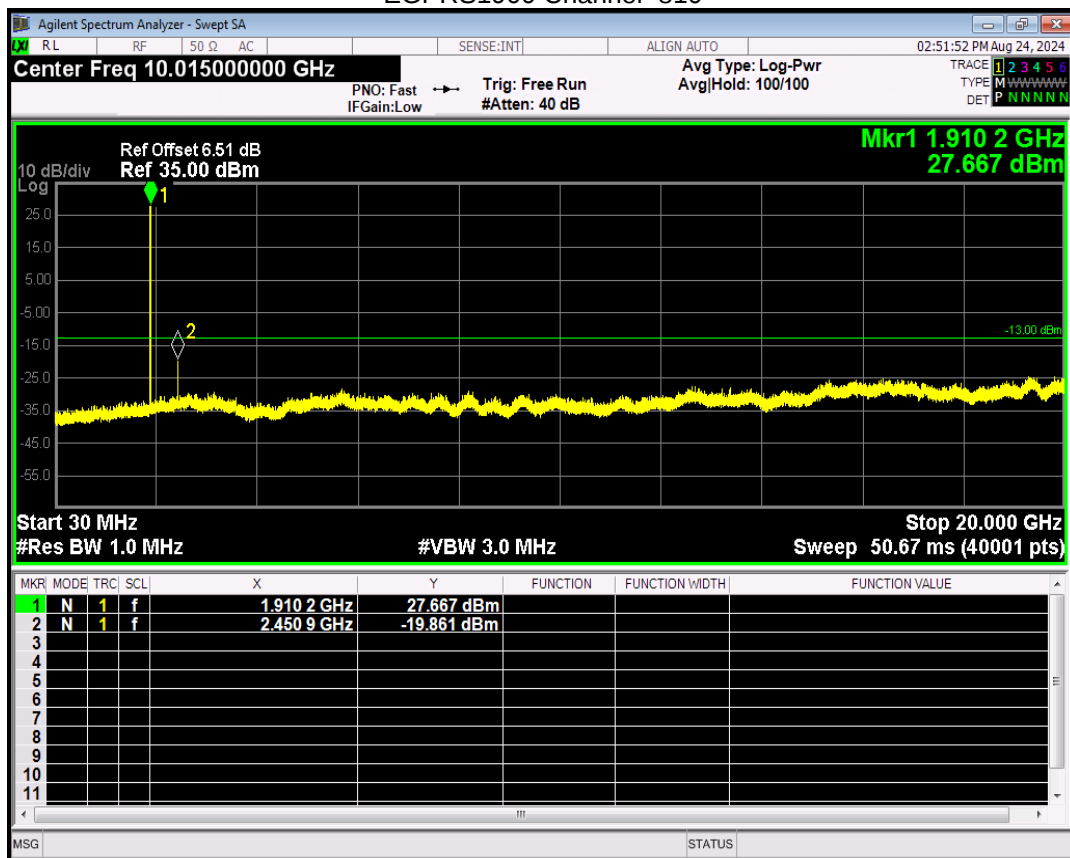


EGPRS850 Channel=128

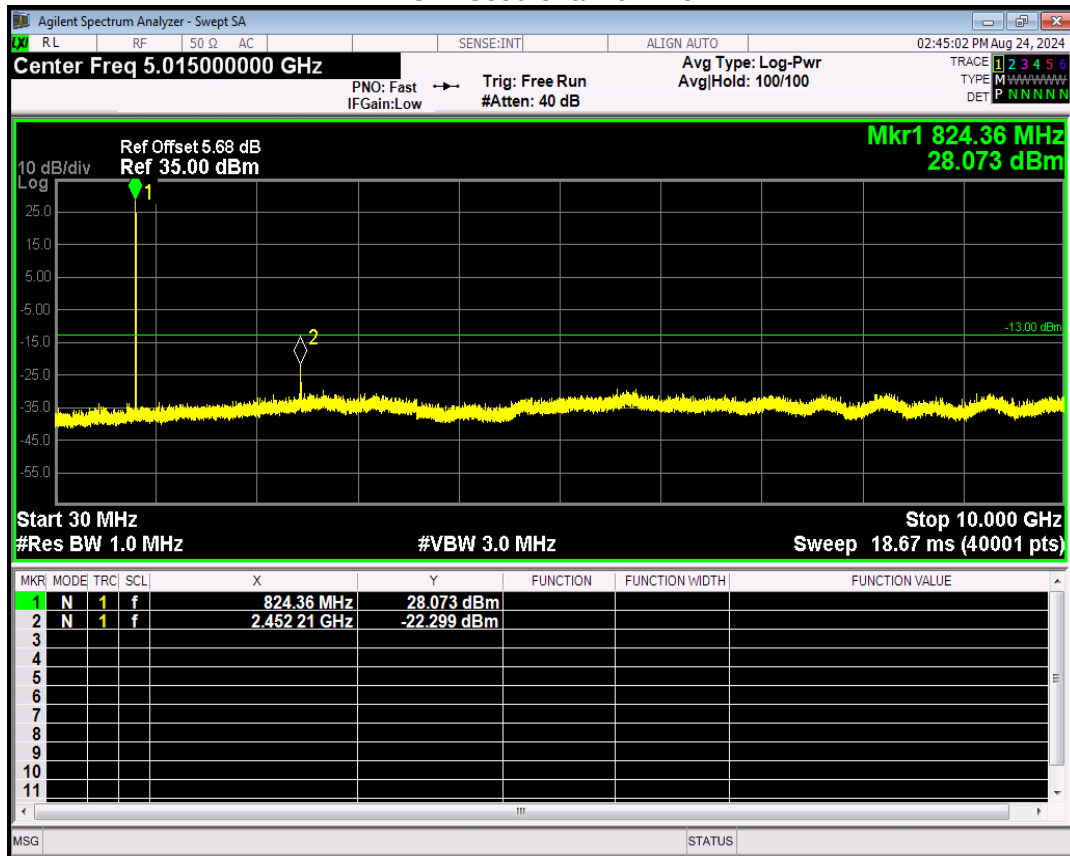


EGPRS850 Channel=190

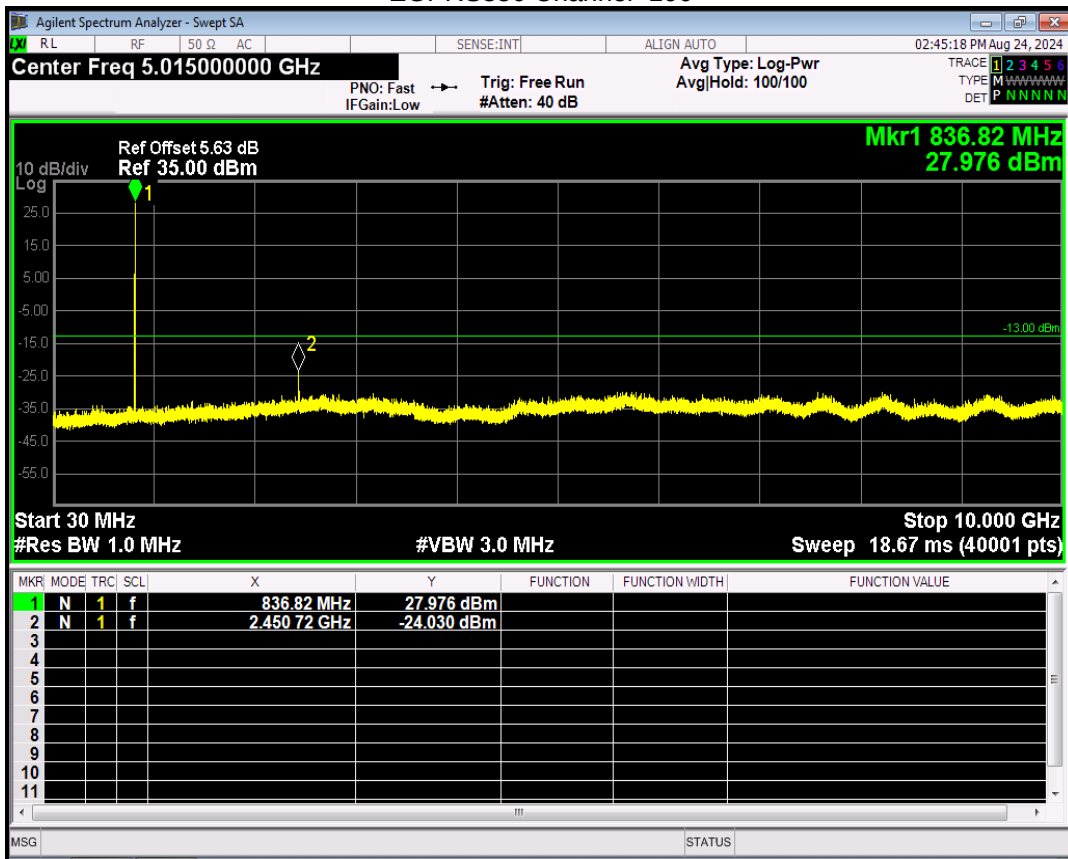

EGPRS850 Channel=251

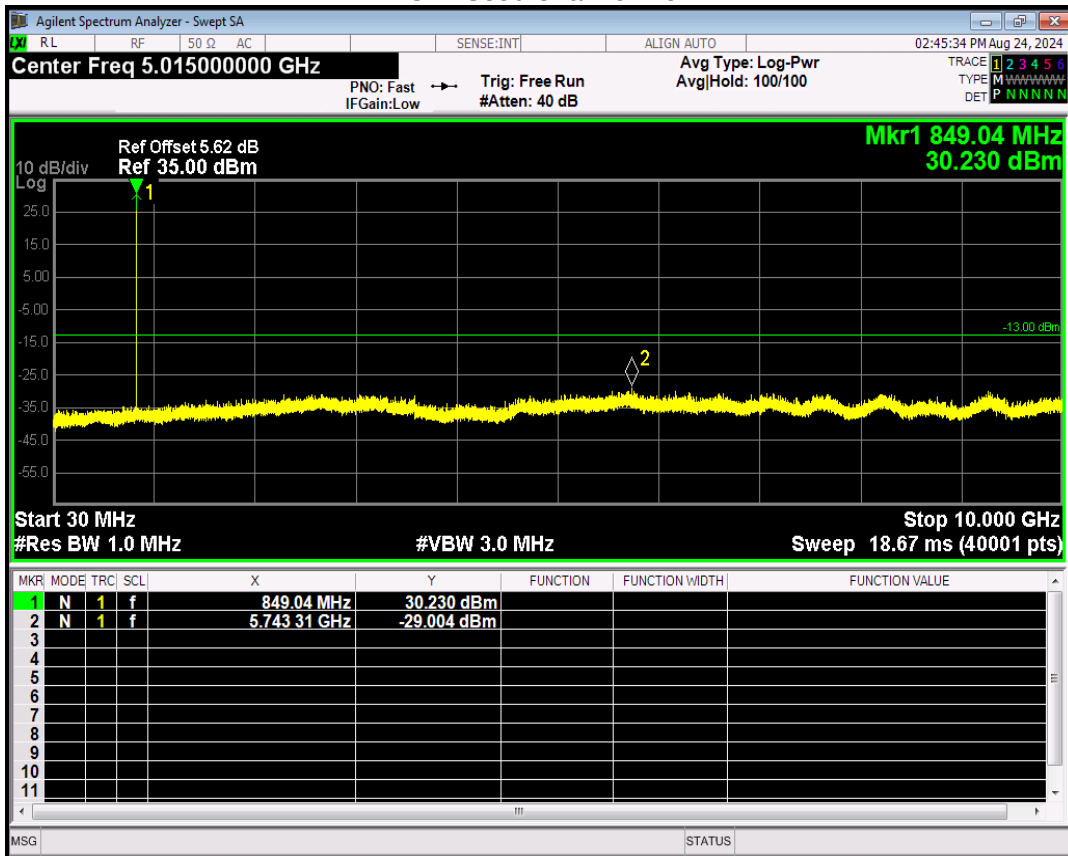


WCDMA Band2 Channel=9262

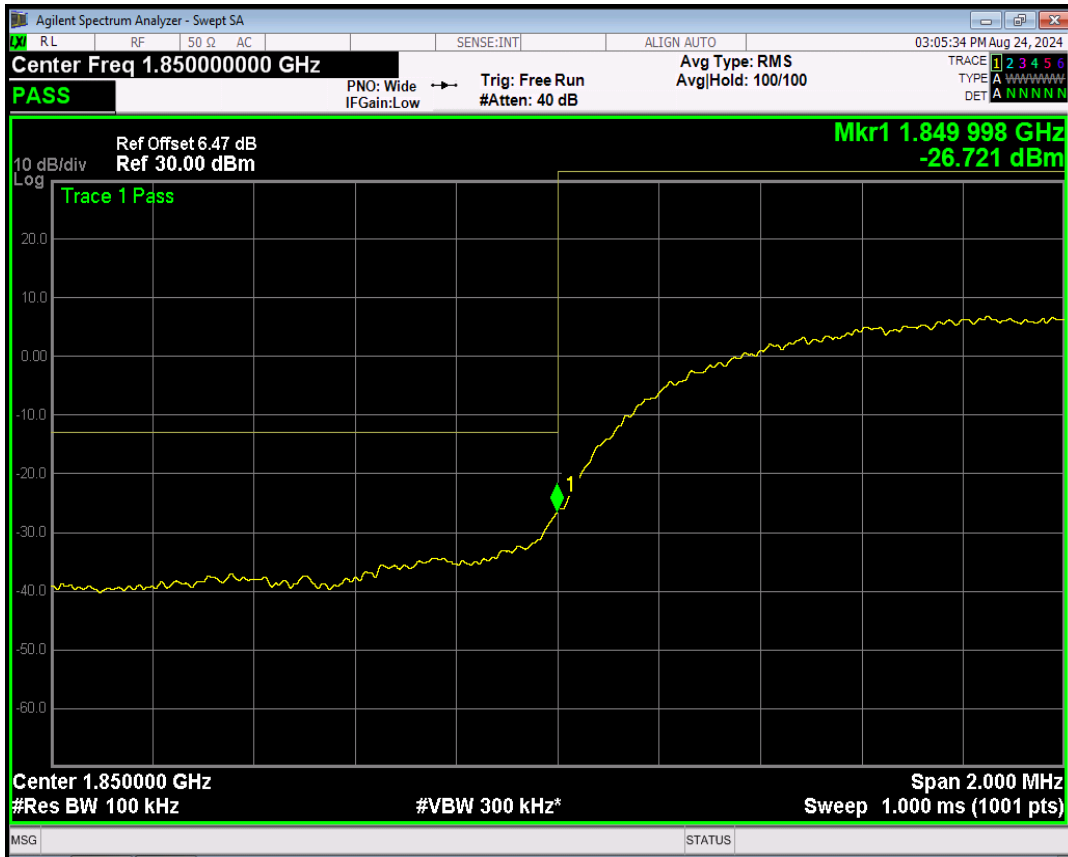


WCDMA Band2 Channel=9538




WCDMA Band2 Channel=9262

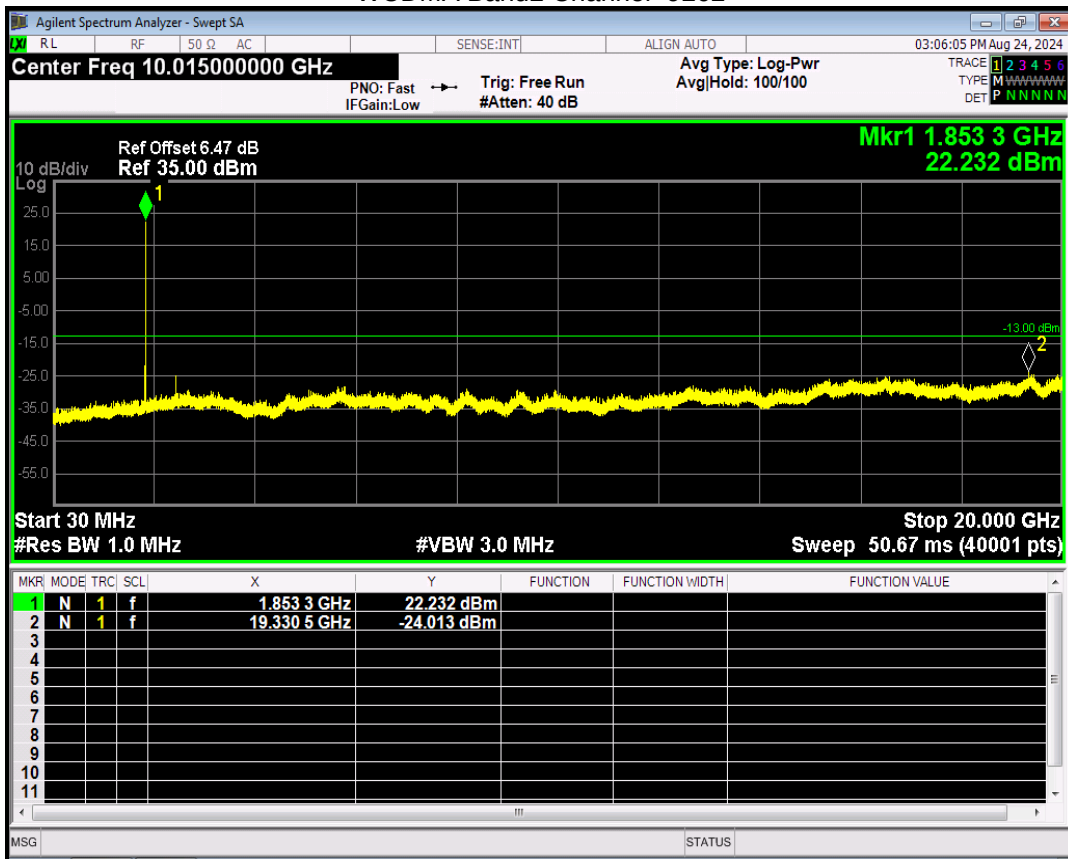


WCDMA Band2 Channel=9400

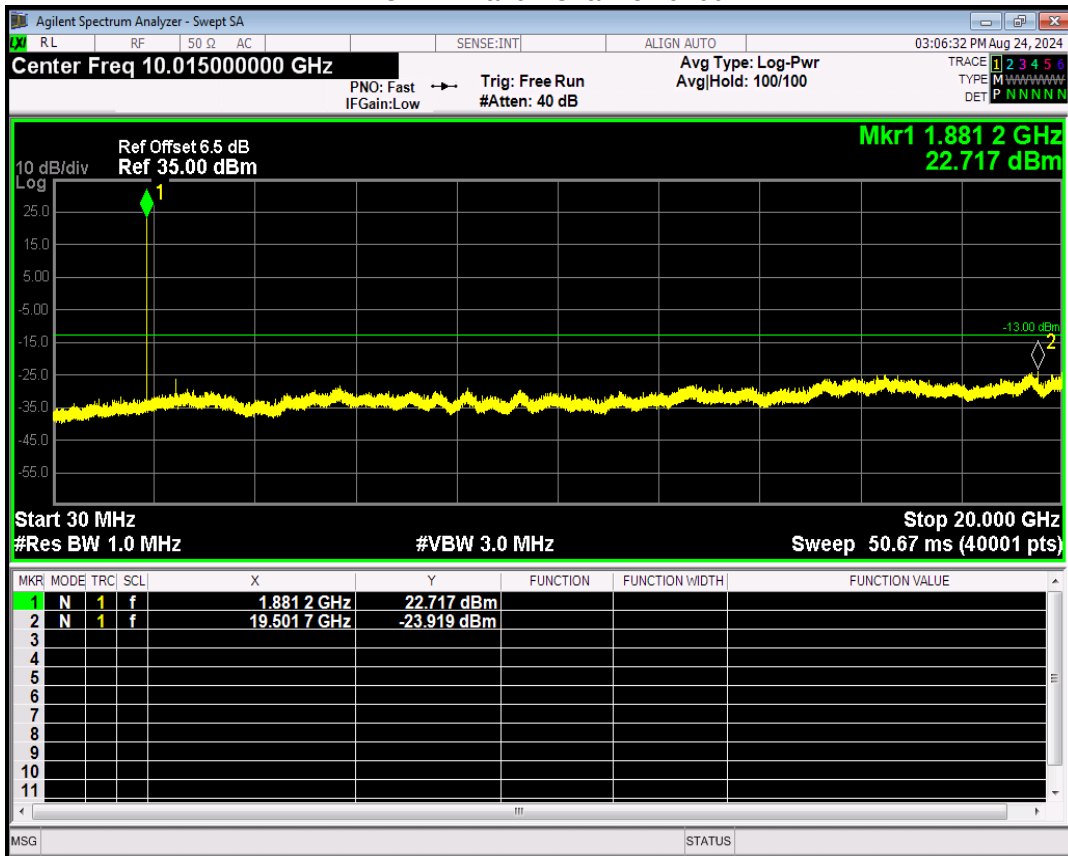


WCDMA Band2 Channel=9538

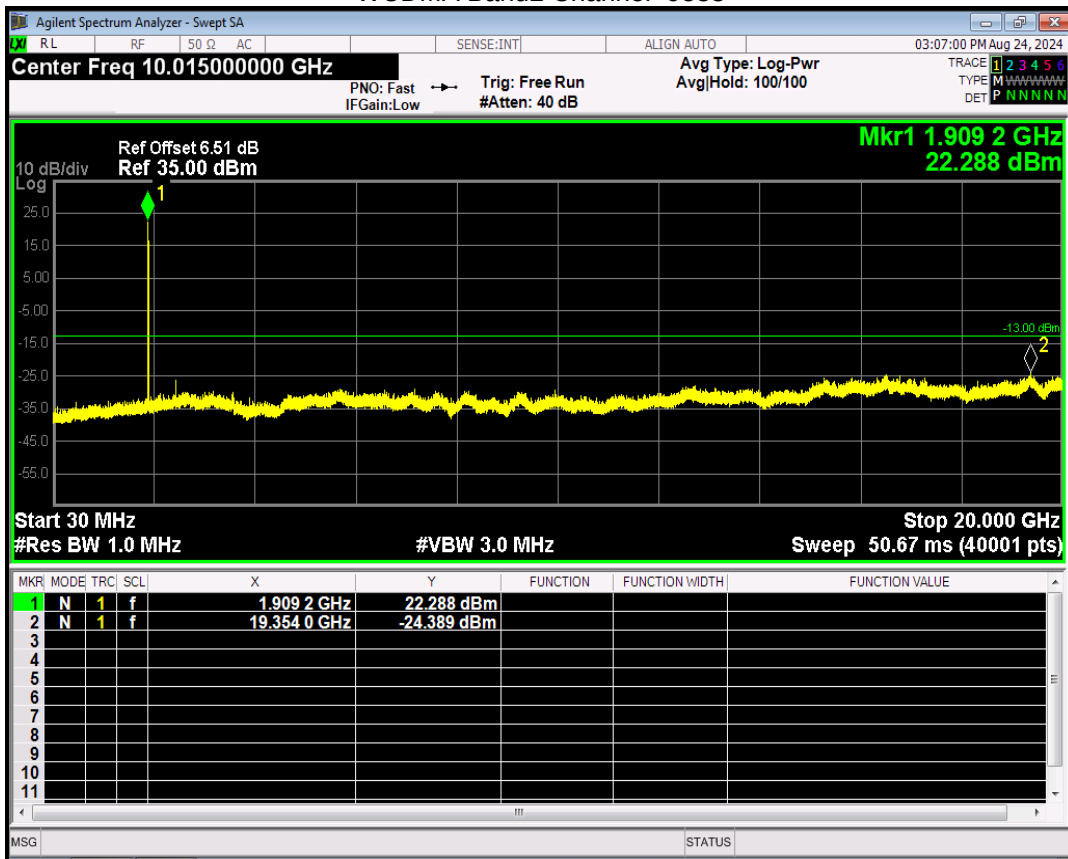


WCDMA Band4 Channel=1312

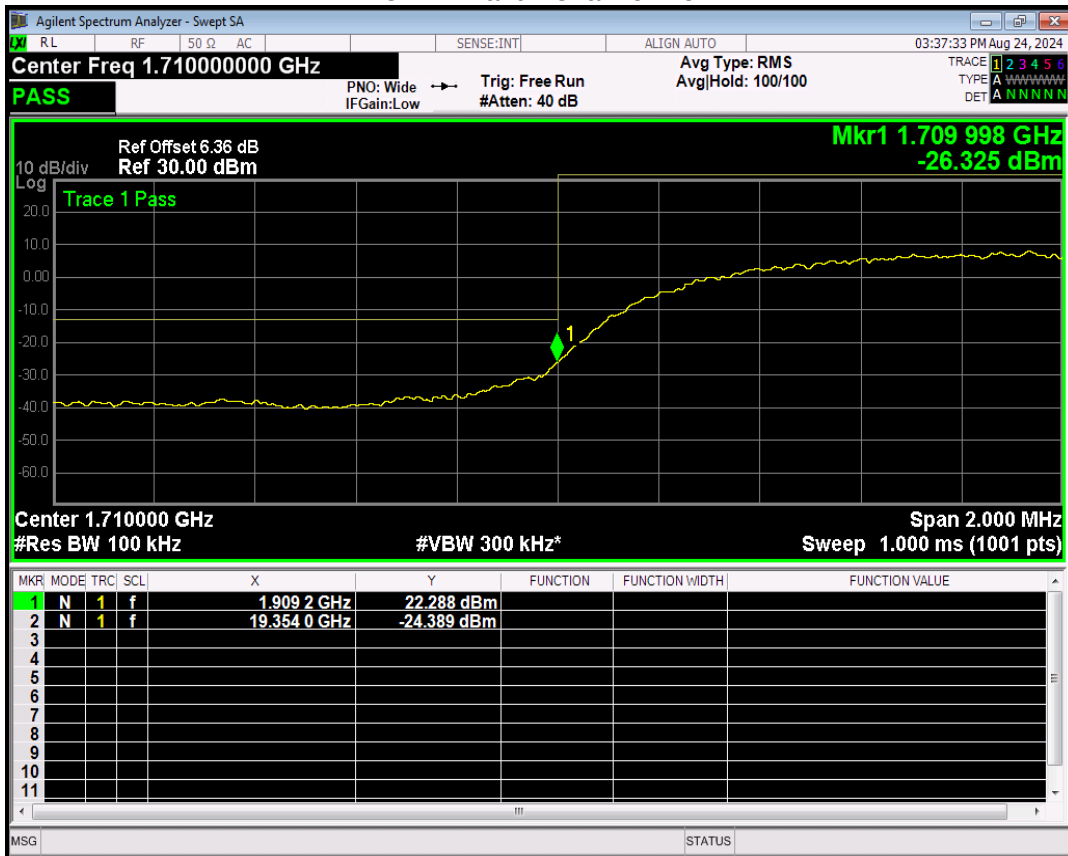


WCDMA Band4 Channel=1513

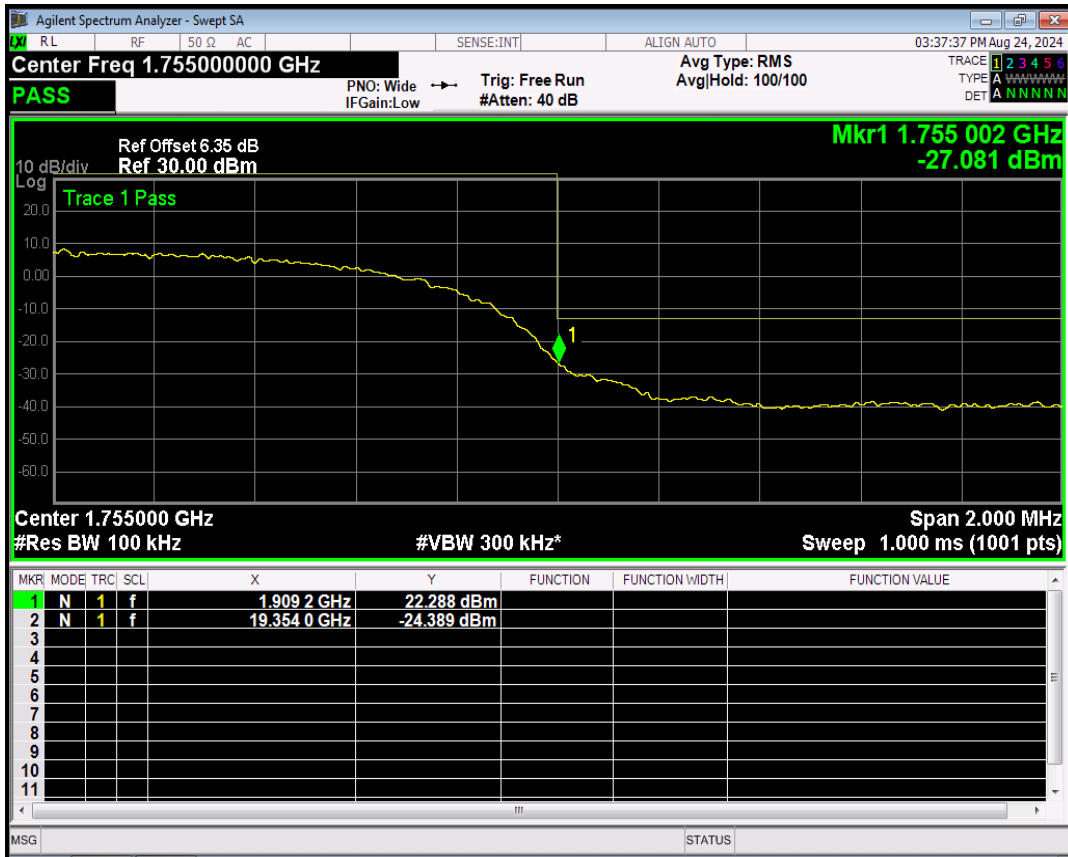

WCDMA Band4 Channel=1312

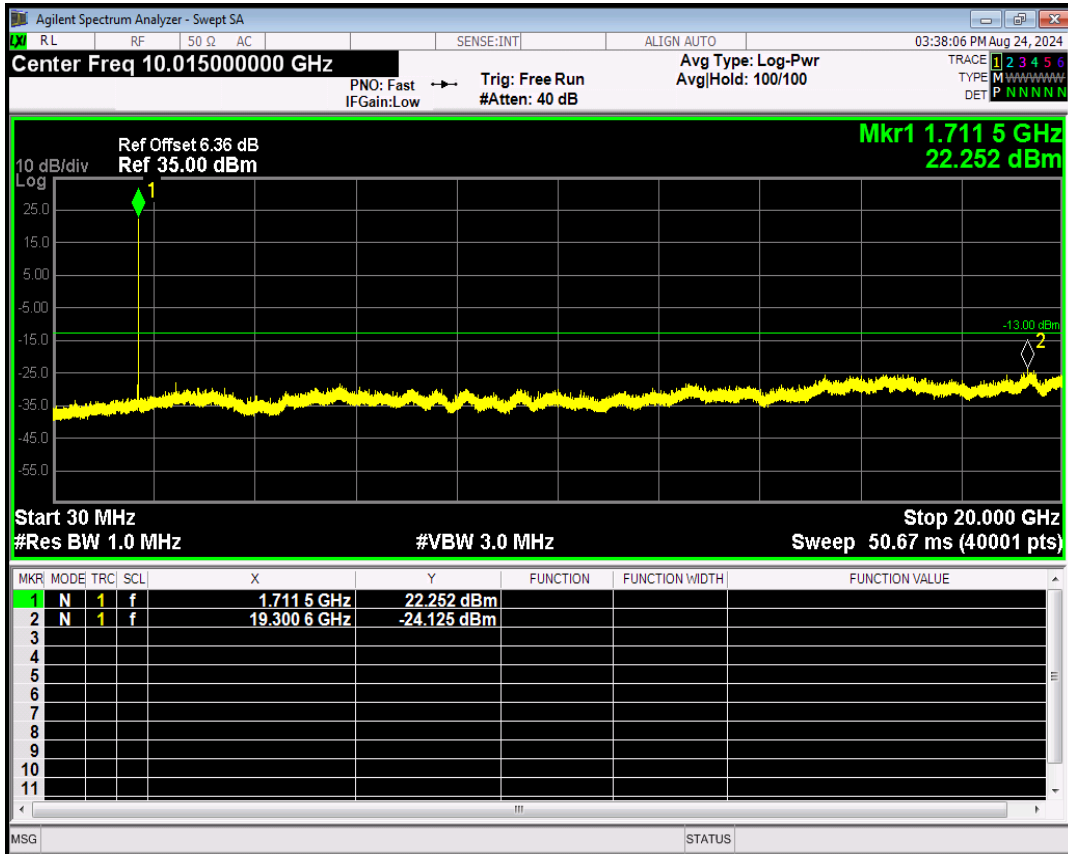

WCDMA Band4 Channel=1450

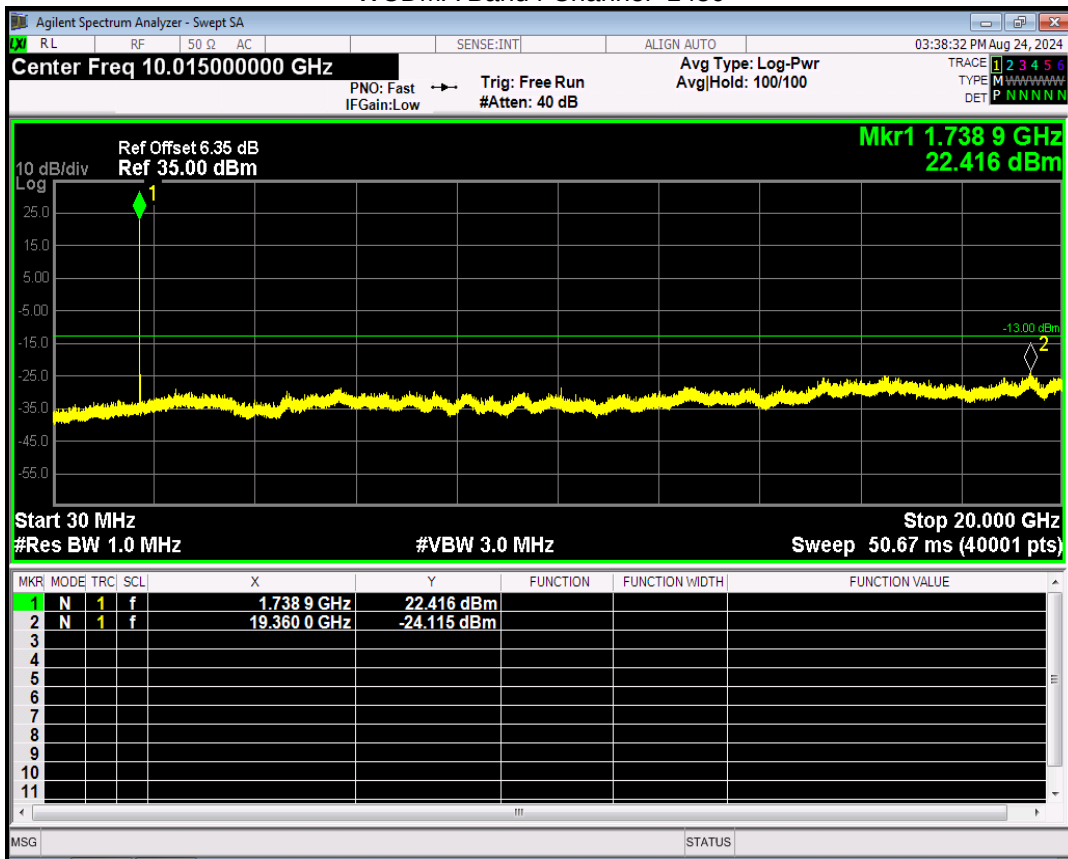

WCDMA Band4 Channel=1513

