



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: SHENZHEN ELECTRON TECHNOLOGY CO.,LTD

Product Name: WIFI Antenna

Product Model: 103

Part Number: LJF02-22121308-R0A

Write By : Huxuwen

Issued Date: 2023-02-17

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2023/02/17	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	8

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4GHz)	≤3.23dBi
Gain(5GHz)	≤3.04dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC(Black),LJWF29A
Cable Type	Φ1.13mm,L65mm,Black
Connector Type	IPX1
Dimension	43.0*11.5mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- 1.Network Analyzers Agilent 8753D/5071C
- 2.HSPA and LTE protocol test set R&S CMW500 -PT
- 3.Communications Test Set Agilent 8960
- 4.3D Chamber Test System

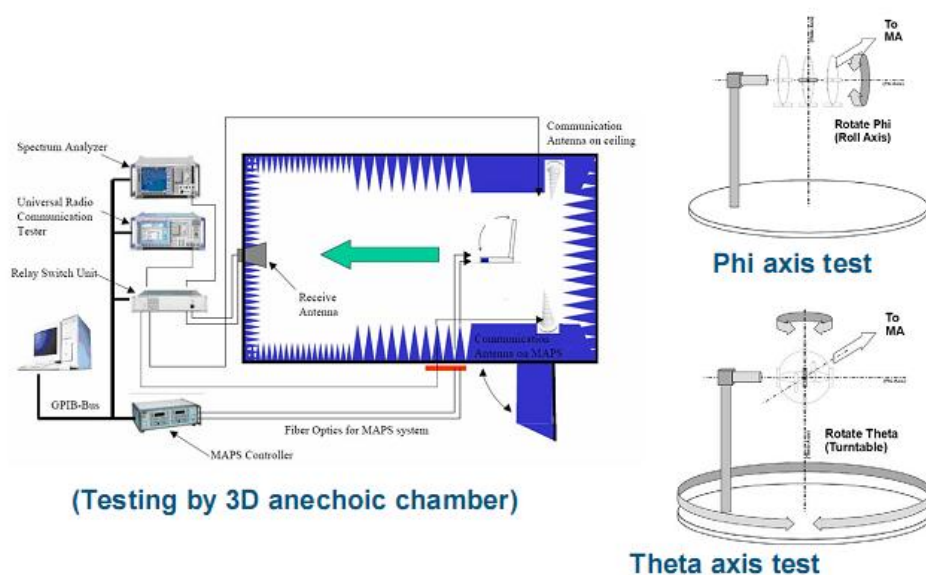


Chart 1 Test topology

5.Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

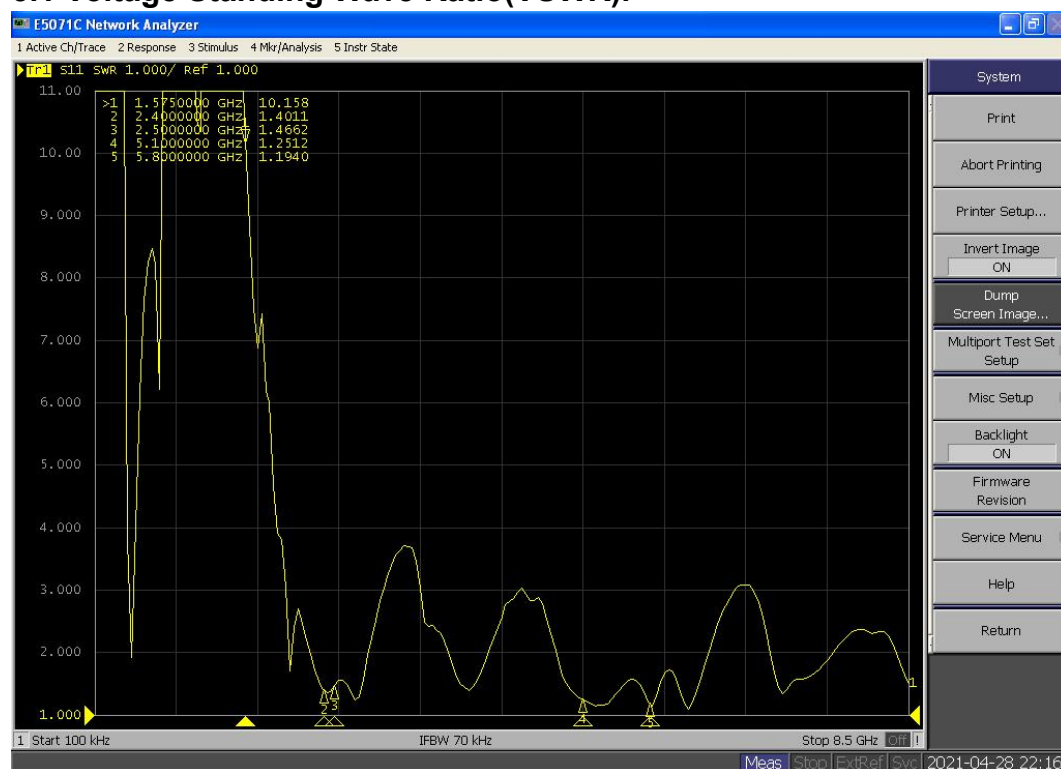


Chart 2 VSWR


5.2 Efficient and gain.

Passive Test	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
2.4GHz	Effi(%)	42.92	48.42	45.89	49.73	45.98	49.52	47.16	50.01	43.90	43.55	41.54
	Gain(dBi)	2.67	2.75	2.75	2.84	3.01	3.01	3.14	3.02	2.72	2.94	3.23


Passive Test WIFI 5G	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
5G	Effi(%)	51.22	53.19	50.84	54.64	52.43	54.77	57.28	52.72	54.71	50.55	55.99	51.51	53.22	57.32	51.92
	Gain(dBi)	3.04	2.96	2.85	2.89	3.00	2.97	2.68	2.36	2.23	2.15	2.35	2.11	1.95	1.84	1.94

5.3 Radiation pattern.


2400.000MHz




2400.000MHz H



2400.000MHz E1





2400.000MHz E2






Shenzhen Lejin radio frequency technology Co., LTD


2450.000MHz




2450.000MHz H





2450.000MHz E1




2450.000MHz E2




2500.000MHz




2500.000MHz H





2500.000MHz E1




2500.000MHz E2




5200.000MHz




5200.000MHz H





5200.000MHz E1




5200.000MHz E2




5550.000MHz




5550.000MHz H





5550.000MHz E1




5550.000MHz E2




6000.000MHz




6000.000MHz H



6000.000MHz E1



6000.000MHz E2






6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type(omit)

8. Product Drawing

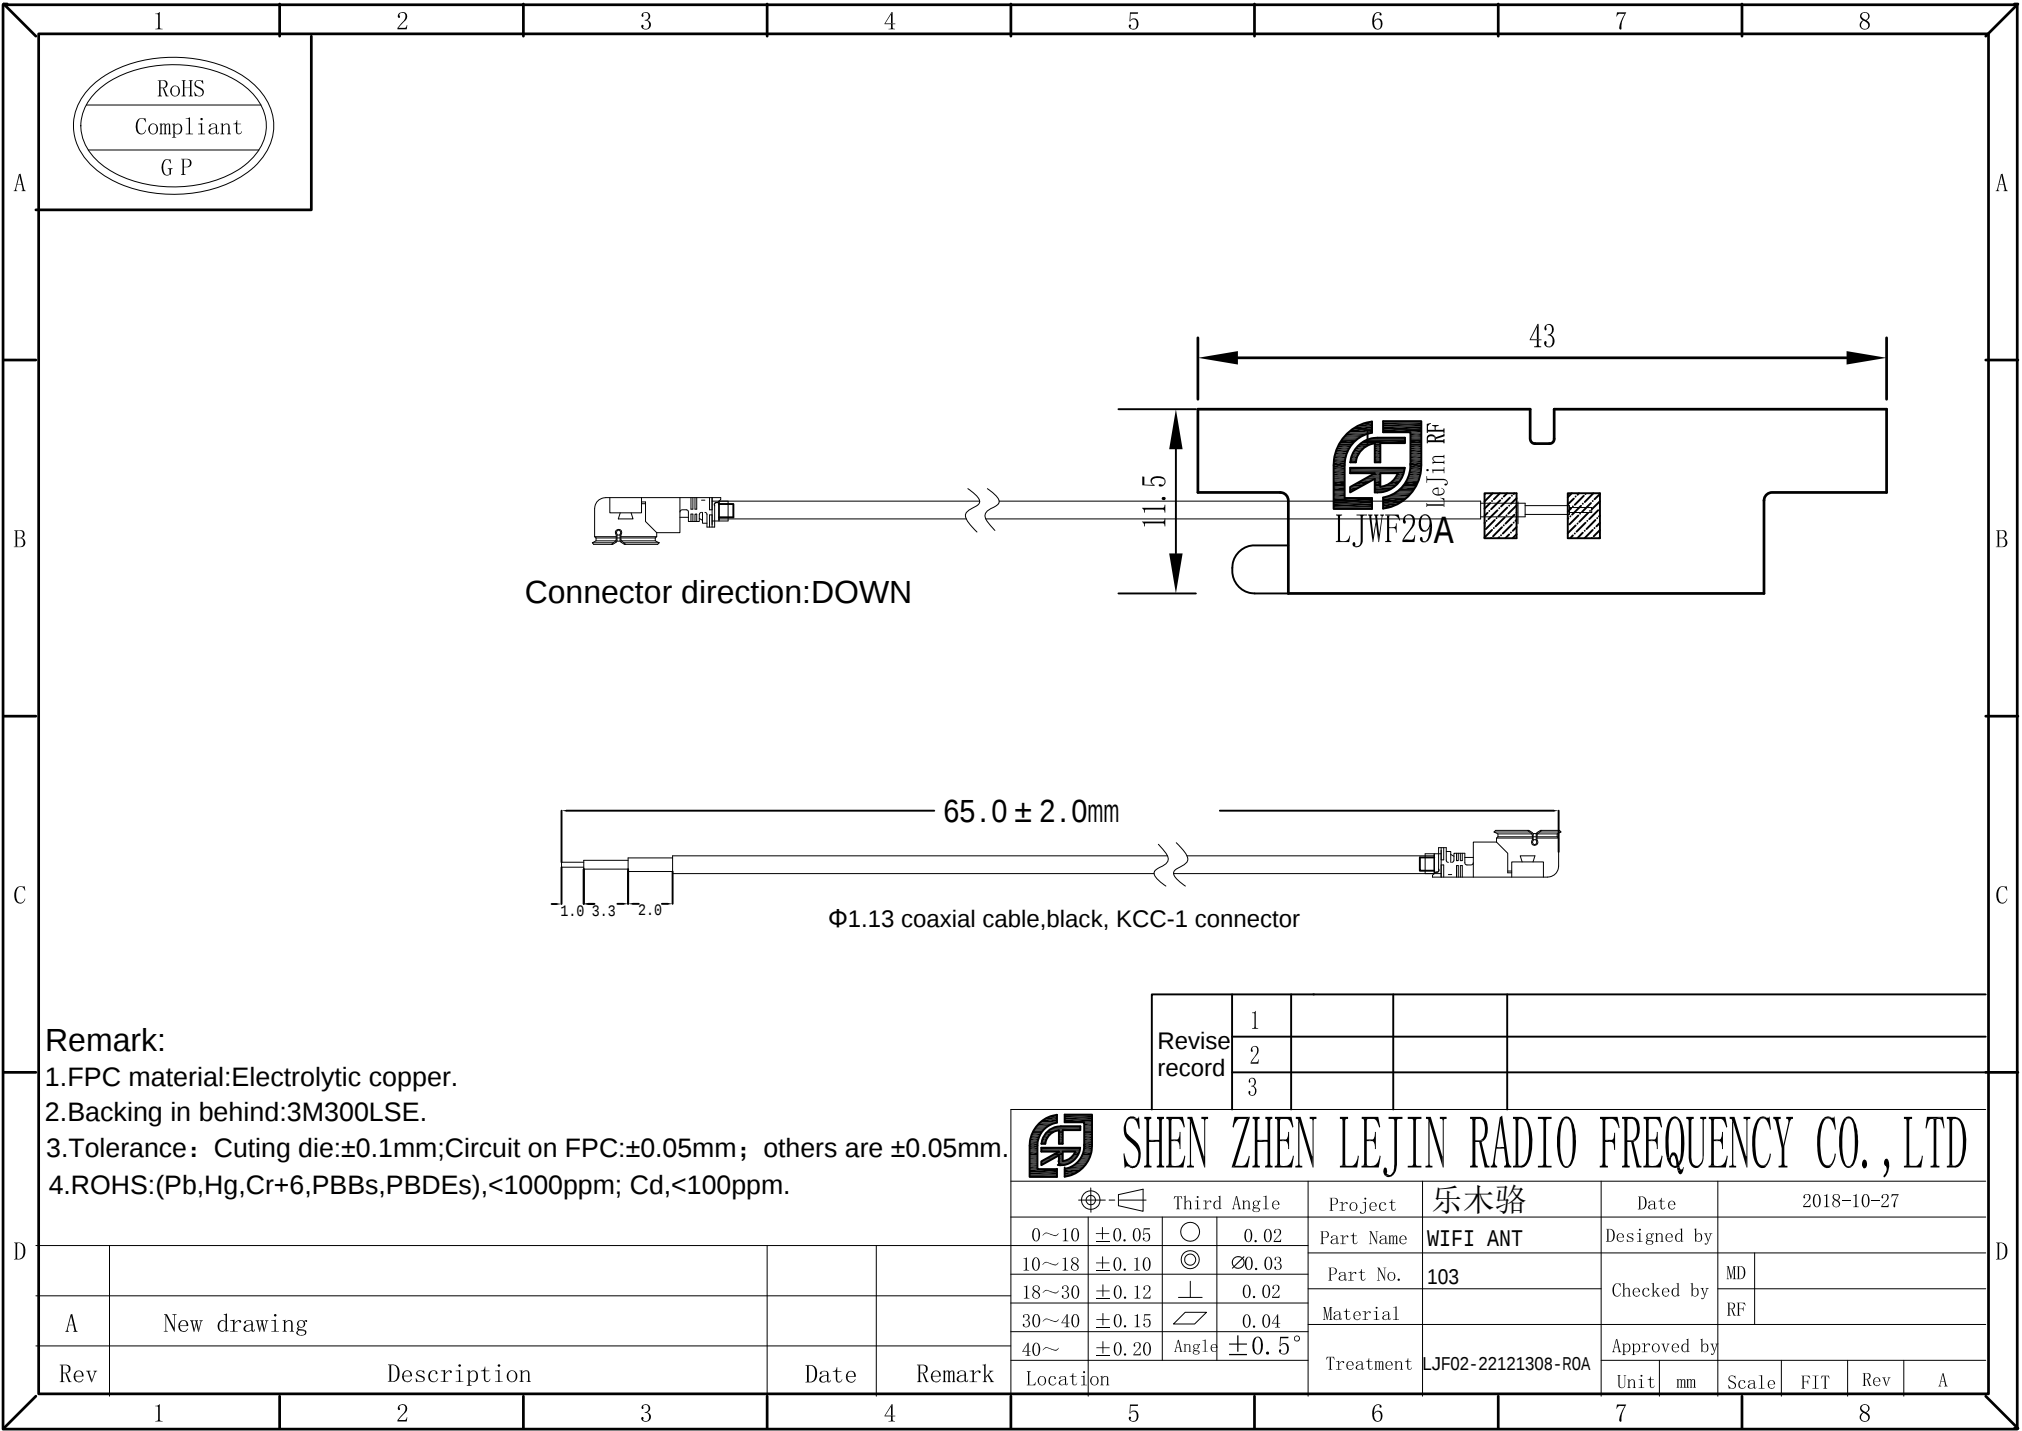

Remark:

- 1.FPC material:Electrolytic copper.
- 2.Backing in behind:3M300LSE.
- 3.Tolerance: Cutting die:±0.1mm;Circuit on FPC:±0.05mm; others are ±0.05mm.
- 4.ROHS:(Pb,Hg,Cr+6,PBBs,PBDEs),<1000ppm; Cd,<100ppm.

Revise record	1			
	2			
	3			

		SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD			
	Third Angle	Project	乐木骆	Date	2018-10-27
0~10	±0.05	○	0.02	Part Name	WIFI ANT
10~18	±0.10	◎	Ø0.03	Part No.	103
18~30	±0.12	⊥	0.02	Material	
30~40	±0.15	∕	0.04		
40~	±0.20	Angle	±0.5°	Treatment	LJF02-22121308-ROA
Location				Approved by	
		Unit	mm	Scale	FIT
		Rev	A		

A		New drawing	
Rev	Description		Date
1	2	3	4