



TEST REPORT

No. I18Z62189-WMD02

for

Vodafone

Smart Phone

Model Name: VFD 630

FCC ID: 2AM86VFD630

with

Hardware Version: V0.2

Software Version: VFD 630-V01/VFD 630-V02

Issued Date: 2019-04-01



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z62189-WMD02	Rev.0	1 st edition	2019-02-21
I18Z62189-WMD02	Rev.1	2 nd edition Added the results of 16 QAM mode in emission limit	2019-03-25
I18Z62189-WMD02	Rev.2	3 rd edition Added the statements in SUMMARY OF TEST RESULTS	2019-04-01



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. NORMAL ACCESSORY SETTING.....	7
3.5. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
7. TESTEQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1 OUTPUT POWER.....	12
A.2 EMISSION LIMIT.....	16
A.3 FREQUENCY STABILITY	23
A.4 OCCUPIED BANDWIDTH	26
A.5 EMISSION BANDWIDTH	35
A.6 BAND EDGE COMPLIANCE.....	43
A.7 CONDUCTED SPURIOUS EMISSION	48
A.8 PEAK-TO-AVERAGE POWER RATIO	53
ANNEX B: ACCREDITATION CERTIFICATE.....	54

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2019-01-20

Testing End Date: 2019-02-19

1.4. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Wiko SAS
Address /Post: 1, rue Capitaine Dessemond 13007 - Marseille - France.
Contact: Laurent Dahan
Email: ldahan@wikomobile.com
Telephone: 33488089515
Fax: 33488089520

2.2. Manufacturer Information

Company Name: Vodafone Procurement Company S.à r.l.,
Address /Post: 15 rue Edward Steichen, L-2540 Luxembourg, Grand-Duché de
Luxembourg
Contact: /
Email: /
Telephone: /
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	VFD 630
FCC ID	2AM86VFD630
Antenna	Embedded
Output power	23.11dBm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT32a	359956100019025/	V0.2	VFD 630-V01/	2019-01-07
	359956100027028		VFD 630-V02	
UT15a	359956100019025/	V0.2	VFD 630-V01/	2019-01-09
	359956100027028		VFD 630-V02	

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE1	
Model	PT30H415870W
Manufacturer	Shenzhen BYD Lithium Battery Company Limited
Capacitance	2920mAh

*AE ID: is used to identify the test sample in the lab internally.



3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Smart Phone with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
TIA-102.CAAA-E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULTS

WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232(c)	P
2	Emission Limit	24.238, 2.1051	P
3	Frequency Stability	24.235, 2.1055	P
4	Occupied Bandwidth	2.1049(h)(i)	P
5	Emission Bandwidth	24.238(b)	P
6	Band Edge Compliance	24.238(b)	P
7	Conducted Spurious Emission	24.238, 2.1057	P
8	Peak-to-Average Power Ratio	24.232(d)	P

WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	§2.1046(a), 22.913(a)	P
2	Emission Limit	22.917, 2.1051	P
3	Frequency Stability	22.235, 2.1055	P
4	Occupied Bandwidth	2.1049(h)(i)	P
5	Emission Bandwidth	22.917(b)	P
6	Band Edge Compliance	22.917(b)	P
7	Conducted Spurious Emission	22.917, 2.1057	P

The VFD 630, manufactured by Vodafone Procurement Company S.à r.l., is a new product for conformance test. The only difference between the two SW is that, VFD 630-V02 supports dual SIM, while VFD 630-V01 supports single SIM. All the test cases in this report have been executed on SW VFD 630-V02.

7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	Universal Radio Communication Tester	CMU200	108646	R&S	2020-01-03	1 year
2	Spectrum Analyzer	FSU26	200030	R&S	2019-06-04	1 year
3	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
4	Universal Radio Communication Tester	CMW500	143008	R&S	2019-12-26	1 Year
5	Spectrum Analyzer	E4440A	MY48250642	Agilent	2019-03-31	1 Year
6	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	3 year
7	EMI Antenna	3117	00119024	ETS-Lindgren	2020-01-21	3 Years
8	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-12	3 year
9	EMI Antenna	167	9117	Schwarzbeck	2019-04-13	3 year
10	Signal Generator	N5183A	MY49060052	Agilent	2019-03-31	1 year
11	Power Amplifier	5S30G4	0341863	AR	/	/

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V (bottom, middle and top of operational frequency range).

WCDMA Band II

Measurement result-QPSK

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	22.75
	9400	1880.0	22.71
	9538	1907.6	22.78

Measurement result-16QAM

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	21.10
	9400	1880.0	21.19
	9538	1907.6	21.29

WCDMA Band V

Measurement result-QPSK

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	22.85
	4183	836.6	22.88
	4233	846.6	22.86

Measurement result-16QAM

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	21.25
	4183	836.6	21.15
	4233	846.6	21.21

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

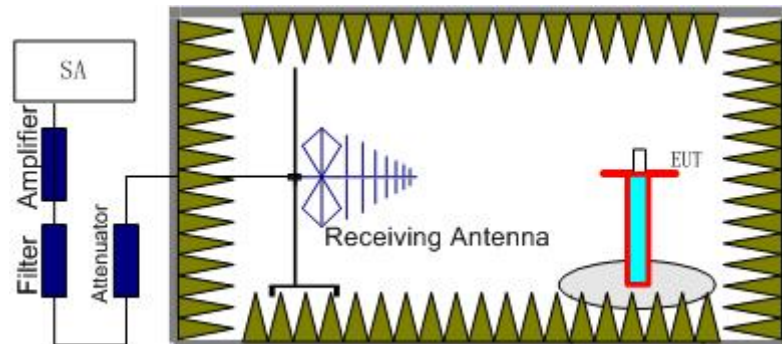

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

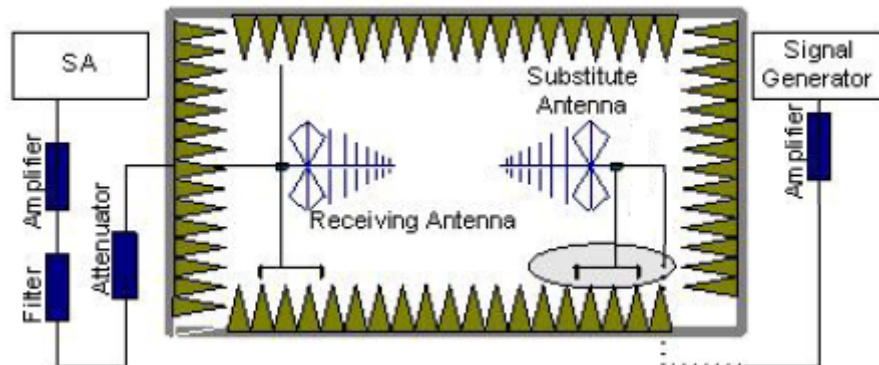

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.
The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.



WCDMA Band II-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

Measurement result-QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.40	-22.76	2.84	43.75	4.87	23.02	33.00	9.98	H
1880.00	-22.97	2.85	43.75	4.82	22.75	33.00	10.25	V
1907.60	-22.55	2.88	43.77	4.77	23.11	33.00	9.89	H

Measurement result-16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.40	-23.90	2.84	43.75	4.87	21.88	33.00	11.12	H
1880.00	-23.99	2.85	43.75	4.82	21.73	33.00	11.27	V
1907.60	-23.51	2.88	43.77	4.77	22.15	33.00	10.85	H

Frequency: 1907.60MHz

Peak EIRP(dBm)=P_{Mea}(-22.55dBm)-P_{cl}(2.88dB)-P_{Ag}(-43.77dB)-G_a (-4.77dB)= 23.11dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

WCDMA Band V-ERP

Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

Measurement result-QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.40	-22.16	2.25	45.76	0.93	2.15	20.13	38.45	18.32	H
836.60	-21.99	2.26	45.66	0.82	2.15	20.08	38.45	18.37	H
846.60	-23.06	2.26	45.56	0.81	2.15	18.90	38.45	19.55	H

Measurement result-16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.40	-23.44	2.25	45.76	0.93	2.15	18.85	38.45	19.60	H
836.60	-23.40	2.26	45.66	0.82	2.15	18.67	38.45	19.78	H
846.60	-24.52	2.26	45.56	0.81	2.15	17.44	38.45	21.01	H

Frequency: 826.40MHz

Peak ERP(dBm)=P_{Mea}(-22.16dBm)-P_{cl}(2.25dB)-P_{Ag}(-45.76dB)-G_a (-0.93dB)-2.15dB= 20.13dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: Expanded measurement uncertainty for this test item is U=2.84, k=2.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603-E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

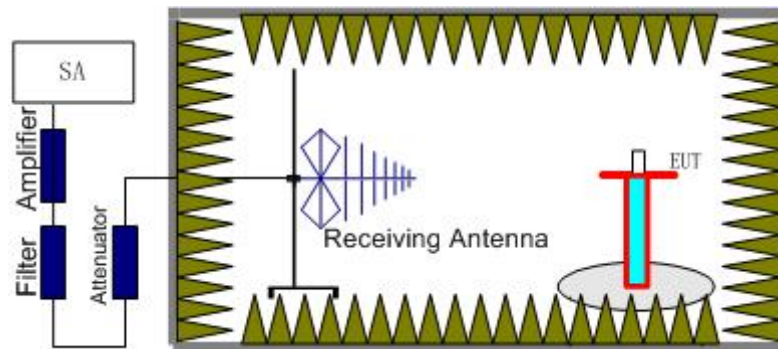

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

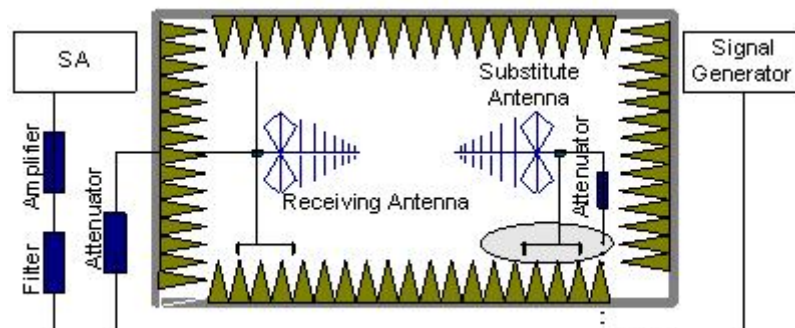

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ dBi}$.

A.2.2 Measurement Limit

Part 24.238 and Part 22.917 and specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0 MHz and 1907.6 MHz) and WCDMA Band V (826.4 MHz, 836.6 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2



WCDMA BAND II Mode Channel 9262/1852.4MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5558.02	-50.91	7.19	10.59	-47.51	-13.00	34.51	H
9255.01	-54.86	9.05	13.25	-50.66	-13.00	37.66	V
11112.01	-52.55	9.78	13.18	-49.15	-13.00	36.15	H
12971.01	-50.31	10.48	13.48	-47.31	-13.00	34.31	H
14804.00	-45.10	11.13	14.16	-42.07	-13.00	29.07	H
16684.00	-43.05	11.77	13.67	-41.15	-13.00	28.15	H

WCDMA BAND II Mode Channel 9400/1880MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7510.01	-55.02	8.35	12.21	-51.16	-13.00	38.16	H
9422.01	-55.54	9.15	13.35	-51.34	-13.00	38.34	V
11259.01	-51.76	9.75	13.15	-48.36	-13.00	35.36	H
13158.01	-48.32	10.68	13.72	-45.28	-13.00	32.28	H
15050.00	-45.79	11.28	13.97	-43.10	-13.00	30.10	V
16941.00	-42.39	12.15	13.78	-40.76	-13.00	27.76	V

WCDMA BAND II Mode Channel 9538/1907.6MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7624.01	-55.16	8.08	12.30	-50.94	-13.00	37.94	H
9548.01	-53.63	9.37	13.35	-49.65	-13.00	36.65	H
11451.01	-52.10	9.94	13.11	-48.93	-13.00	35.93	H
13369.01	-48.67	10.57	14.02	-45.22	-13.00	32.22	H
15270.00	-46.21	11.31	13.84	-43.68	-13.00	30.68	V
17183.00	-42.65	12.40	14.20	-40.85	-13.00	27.85	V



WCDMA BAND II Mode Channel 9262/1852.4MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7410.01	-55.68	8.14	12.09	-51.73	-13.00	38.73	H
9263.01	-54.69	9.07	13.26	-50.50	-13.00	37.50	V
11113.01	-52.59	9.78	13.18	-49.19	-13.00	36.19	H
12986.01	-50.37	10.47	13.49	-47.35	-13.00	34.35	H
14809.00	-45.65	11.13	14.15	-42.63	-13.00	29.63	V
16656.00	-42.65	11.86	13.66	-40.85	-13.00	27.85	H

WCDMA BAND II Mode Channel 9400/1880MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7537.01	-55.16	8.24	12.23	-51.17	-13.00	38.17	V
9393.01	-55.71	9.04	13.34	-51.41	-13.00	38.41	H
11266.01	-52.26	9.79	13.15	-48.90	-13.00	35.90	H
13148.01	-47.76	10.73	13.71	-44.78	-13.00	31.78	V
15025.00	-45.79	11.25	13.98	-43.06	-13.00	30.06	H
16934.00	-43.32	12.12	13.77	-41.67	-13.00	28.67	H

WCDMA BAND II Mode Channel 9538/1907.6MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7652.01	-55.31	8.21	12.32	-51.20	-13.00	38.20	H
9573.01	-54.31	9.28	13.33	-50.26	-13.00	37.26	V
11438.01	-51.62	9.97	13.11	-48.48	-13.00	35.48	V
13390.01	-48.93	10.57	14.05	-45.45	-13.00	32.45	V
15284.00	-45.83	11.30	13.83	-43.30	-13.00	30.30	V
17196.00	-43.65	12.36	14.23	-41.78	-13.00	28.78	H



WCDMA BAND V Mode Channel 4132/826.4MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1651.01	-58.64	3.57	5.23	2.15	-59.13	-13.00	46.13	H
2459.00	-52.82	4.58	5.98	2.15	-53.57	-13.00	40.57	H
3298.02	-55.39	5.29	7.72	2.15	-55.11	-13.00	42.11	V
4120.02	-56.11	6.04	9.02	2.15	-55.28	-13.00	42.28	H
4953.01	-55.61	6.68	9.85	2.15	-54.59	-13.00	41.59	H
5772.01	-54.05	7.23	10.55	2.15	-52.88	-13.00	39.88	H

WCDMA BAND V Mode Channel 4183/836.6MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1671.01	-56.58	3.58	5.19	2.15	-57.12	-13.00	44.12	H
2513.00	-51.97	4.64	6.12	2.15	-52.64	-13.00	39.64	H
3353.02	-53.69	5.32	7.85	2.15	-53.31	-13.00	40.31	H
4165.02	-54.77	6.13	9.07	2.15	-53.98	-13.00	40.98	V
5023.01	-56.00	6.56	9.93	2.15	-54.78	-13.00	41.78	V
5838.01	-54.19	7.20	10.53	2.15	-53.01	-13.00	40.01	H

WCDMA BAND V Mode Channel 4233/846.6MHz-QPSK

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1692.01	-58.73	3.59	5.15	2.15	-59.32	-13.00	46.32	H
2543.00	-50.75	4.66	6.18	2.15	-51.38	-13.00	38.38	V
3392.02	-55.57	5.35	7.94	2.15	-55.13	-13.00	42.13	V
4239.02	-55.87	6.25	9.14	2.15	-55.13	-13.00	42.13	H
5093.01	-55.66	6.75	10.03	2.15	-54.53	-13.00	41.53	H
5953.01	-53.64	7.47	10.51	2.15	-52.75	-13.00	39.75	H



WCDMA BAND V Mode Channel 4132/826.4MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1652.01	-58.74	3.57	5.23	2.15	-59.23	-13.00	46.23	H
2476.00	-51.26	4.60	6.03	2.15	-51.98	-13.00	38.98	V
3316.02	-55.85	5.29	7.76	2.15	-55.53	-13.00	42.53	H
4113.02	-55.87	6.04	9.01	2.15	-55.05	-13.00	42.05	H
4954.01	-55.73	6.68	9.85	2.15	-54.71	-13.00	41.71	H
5754.01	-54.47	7.26	10.55	2.15	-53.33	-13.00	40.33	H

WCDMA BAND V Mode Channel 4183/836.6MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1675.01	-57.81	3.58	5.18	2.15	-58.36	-13.00	45.36	H
2510.00	-51.13	4.63	6.12	2.15	-51.79	-13.00	38.79	V
3330.02	-54.84	5.30	7.79	2.15	-54.50	-13.00	41.50	H
4193.02	-55.93	6.19	9.09	2.15	-55.18	-13.00	42.18	V
5022.01	-55.71	6.57	9.93	2.15	-54.50	-13.00	41.50	V
5838.01	-53.70	7.20	10.53	2.15	-52.52	-13.00	39.52	H

WCDMA BAND V Mode Channel 4233/846.6MHz-16QAM

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1695.01	-58.33	3.60	5.15	2.15	-58.93	-13.00	45.93	H
2543.00	-47.11	4.66	6.18	2.15	-47.74	-13.00	34.74	V
3386.02	-55.84	5.35	7.93	2.15	-55.41	-13.00	42.41	H
4243.02	-42.30	6.25	9.14	2.15	-41.56	-13.00	28.56	H
5099.01	-55.71	6.77	10.04	2.15	-54.59	-13.00	41.59	V
5941.01	-53.60	7.47	10.51	2.15	-52.71	-13.00	39.71	H

Note: Expanded measurement uncertainty for this test item is U=5.16, k=2.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies.



A.3.3 Measurement results

WCDMA Band II

Frequency Error vs Voltage-QPSK

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-17.99	0.0096
3.85	-17.24	0.0092
4.4	-14.80	0.0079

Frequency Error vs Temperature-QPSK

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-19.38	0.0103
0	-22.46	0.0119
10	-19.50	0.0104
20	-11.73	0.0062
30	-17.24	0.0092
40	-17.65	0.0094
50	-11.55	0.0061

Frequency Error vs Voltage-16QAM

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-19.01	0.0101
3.85	-16.40	0.0087
4.4	-20.04	0.0107

Frequency Error vs Temperature-16QAM

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-11.12	0.0059
0	-16.84	0.0090
10	-13.09	0.0070
20	-14.83	0.0079
30	-12.33	0.0066
40	-13.69	0.0073
50	-19.31	0.0103



WCDMA Band V

Frequency Error vs Voltage-QPSK

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-18.77	0.0224
3.85	-17.20	0.0206
4.4	-10.04	0.0120

Frequency Error vs Temperature-QPSK

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-13.99	0.0167
0	-13.66	0.0163
10	-12.33	0.0147
20	-13.76	0.0164
30	-14.95	0.0179
40	-17.15	0.0205
50	-18.30	0.0219

Frequency Error vs Voltage-16QAM

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-12.28	0.0147
3.85	-17.78	0.0213
4.4	-14.59	0.0174

Frequency Error vs Temperature-16QAM

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-11.66	0.0139
0	-11.19	0.0134
10	-13.37	0.0160
20	-10.89	0.0130
30	-12.54	0.0150
40	-9.98	0.0119
50	4.27	0.0051



A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.




WCDMA Band II (99% BW)-QPSK

Frequency(MHz)	Occupied Bandwidth (99% BW)(KHz)
1852.4	4182.69
1880.0	4182.69
1907.6	4182.69


WCDMA Band II

Channel 9262-Occupied Bandwidth (99% BW)

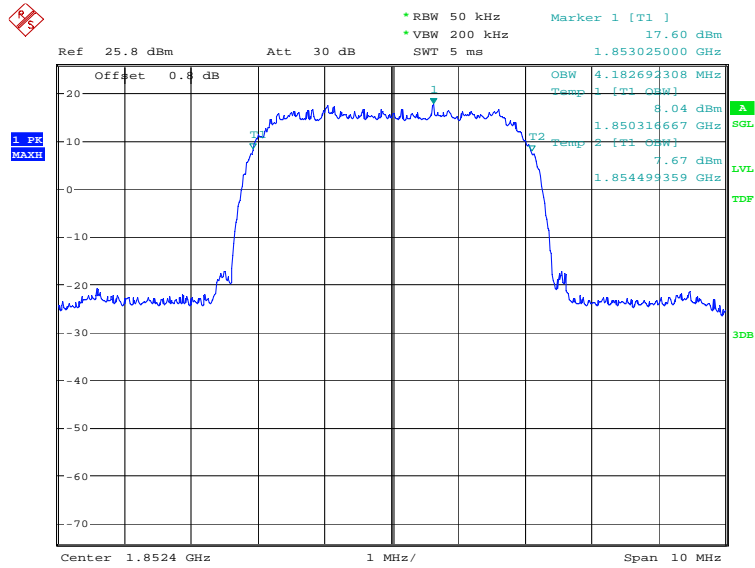


Date: 22.JAN.2019 09:45:22

Channel 9400-Occupied Bandwidth (99% BW)

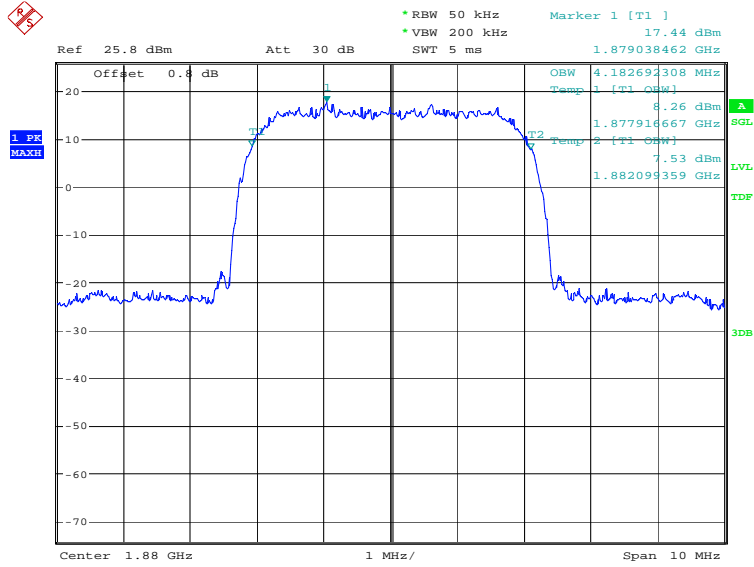

Date: 22.JAN.2019 09:46:34

Channel 9538-Occupied Bandwidth (99% BW)

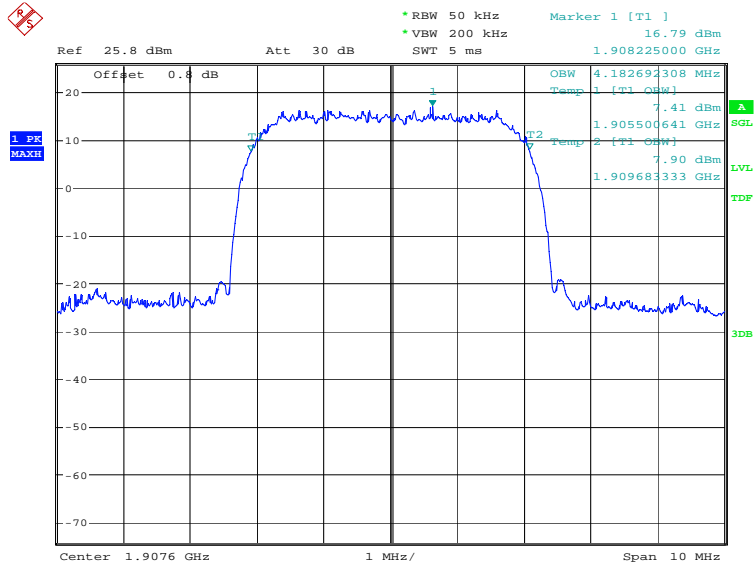

Date: 22.JAN.2019 09:47:45




WCDMA Band II (99% BW)-16QAM

Frequency(MHz)	Occupied Bandwidth (99% BW)(KHz)
1852.4	4182.69
1880.0	4182.69
1907.6	4182.69


WCDMA Band II

Channel 9262-Occupied Bandwidth (99% BW)

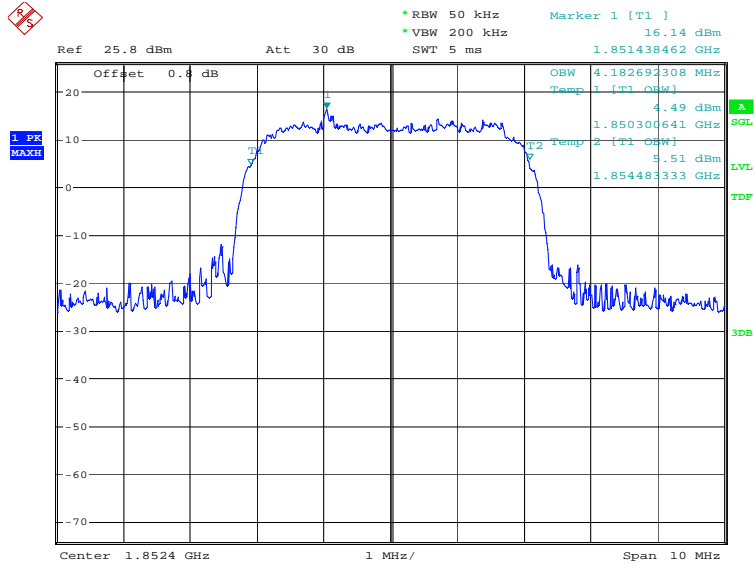


Date: 19.FEB.2019 16:11:23

Channel 9400-Occupied Bandwidth (99% BW)

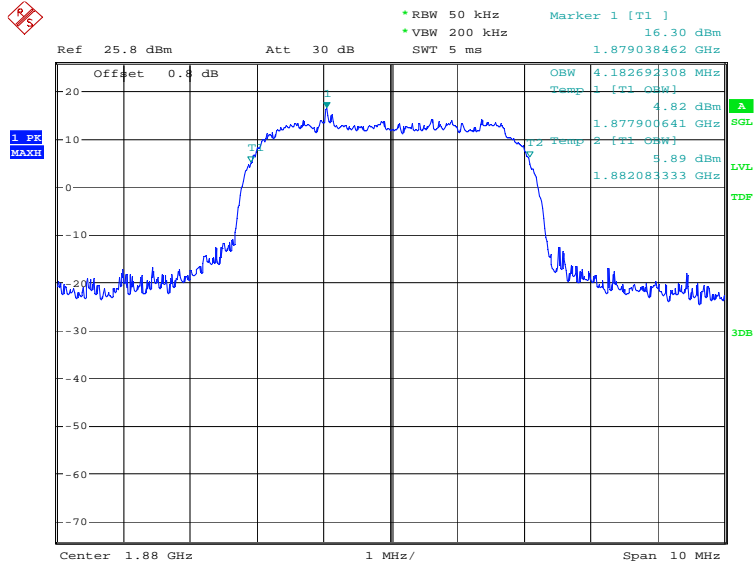

Date: 19.FEB.2019 16:12:35

Channel 9538-Occupied Bandwidth (99% BW)

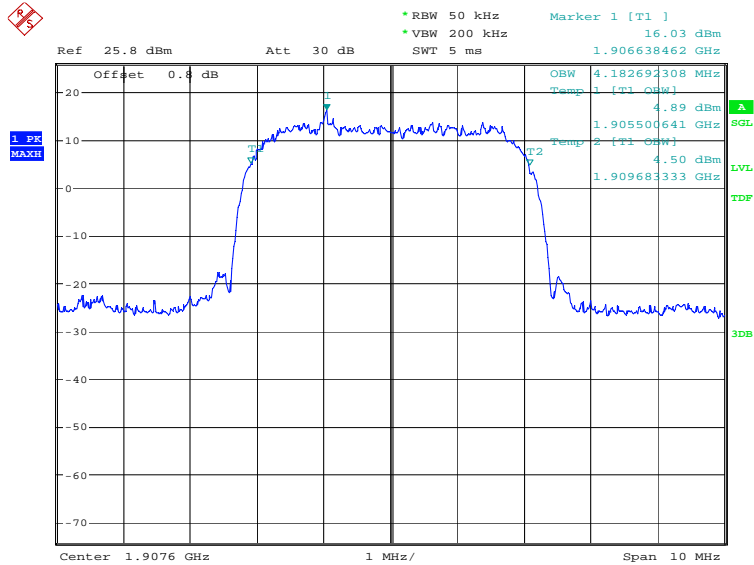


Date: 19.FEB.2019 16:13:46

WCDMA Band V(99% BW)-QPSK

Frequency(MHz)	Occupied Bandwidth (99% BW)(KHz)
826.4	4166.67
836.6	4182.69
846.6	4166.67


WCDMA Band V

Channel 4132-Occupied Bandwidth (99% BW)

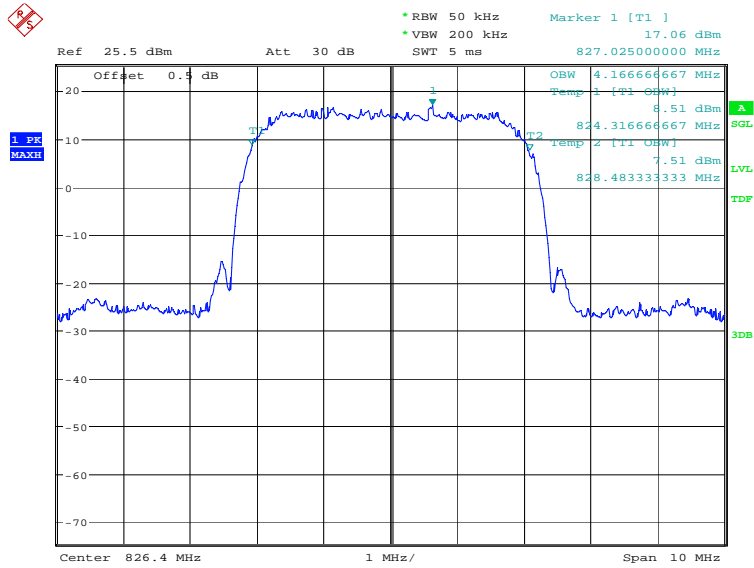


Date: 22.JAN.2019 09:49:36

Channel 4183-Occupied Bandwidth (99% BW)

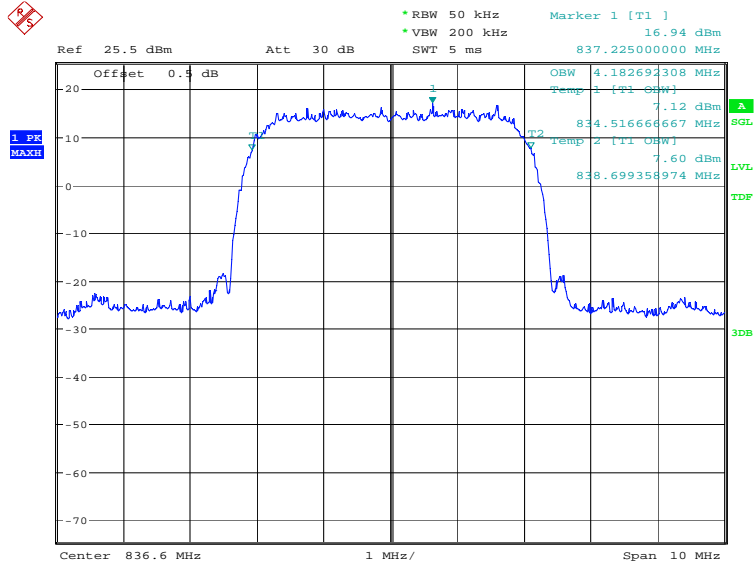

Date: 22.JAN.2019 09:50:47

Channel 4233-Occupied Bandwidth (99% BW)

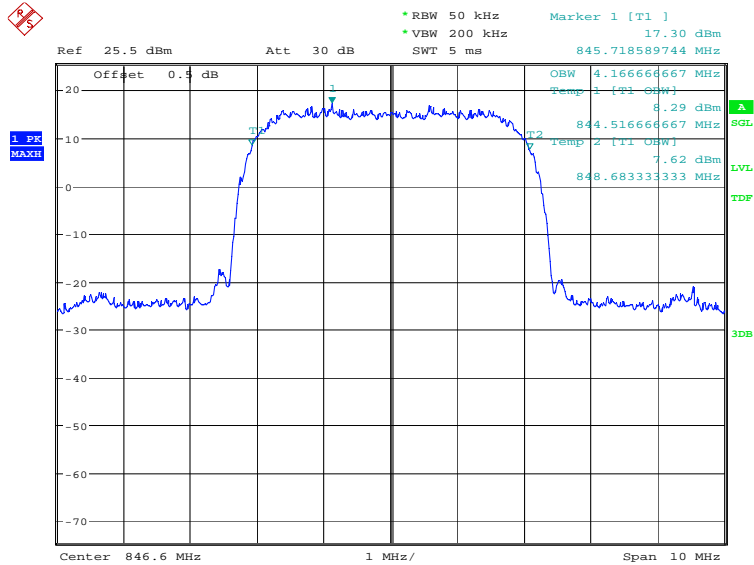

Date: 22.JAN.2019 09:51:59




WCDMA Band V(99% BW)-16QAM

Frequency(MHz)	Occupied Bandwidth (99% BW)(KHz)
826.4	4182.69
836.6	4166.67
846.6	4182.69


WCDMA Band V

Channel 4132-Occupied Bandwidth (99% BW)

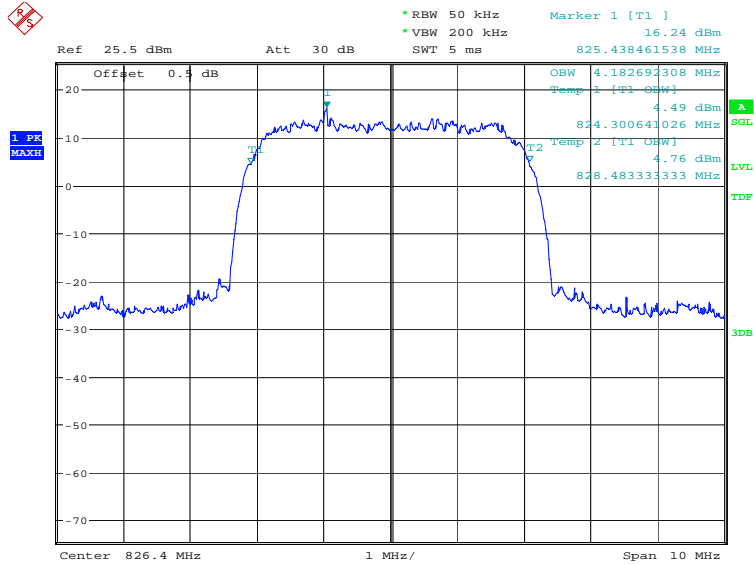


Date: 19.FEB.2019 16:15:52

Channel 4183-Occupied Bandwidth (99% BW)

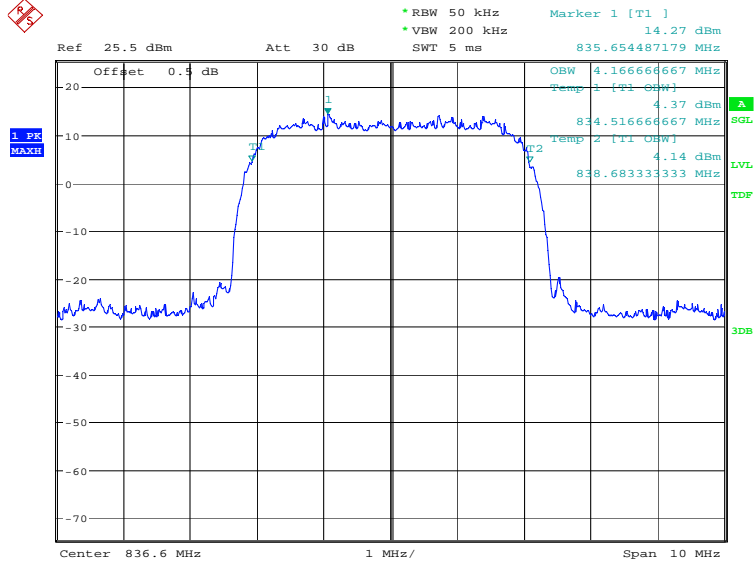

Date: 19.FEB.2019 16:17:04

Channel 4233-Occupied Bandwidth (99% BW)

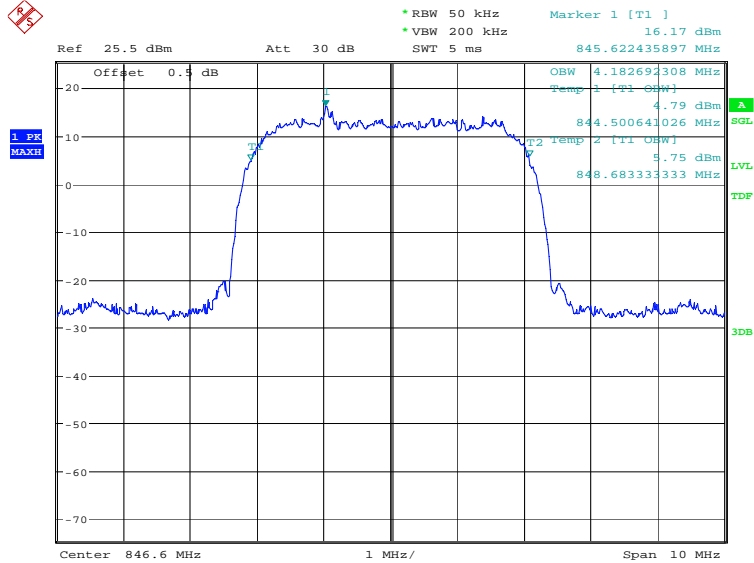

Date: 19.FEB.2019 16:18:15

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 22.917(b), 24.238(a)

A.5.1 Emission Bandwidth Results


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

WCDMA Band II-QPSK

Frequency(MHz)	Emission Bandwidth (KHz)
1852.4	4711.54
1880.0	4711.54
1907.6	4711.54


WCDMA Band II

Channel 9262-Emission Bandwidth

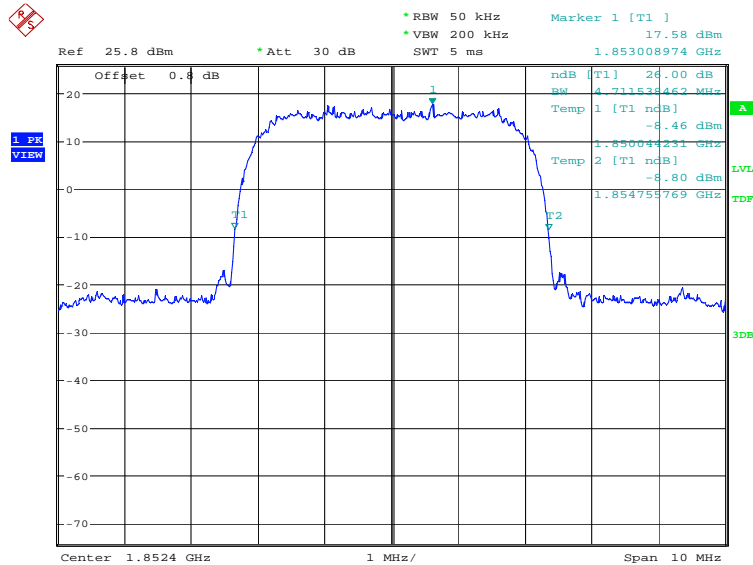


Date: 22.JAN.2019 09:54:01

Channel 9400-Emission Bandwidth

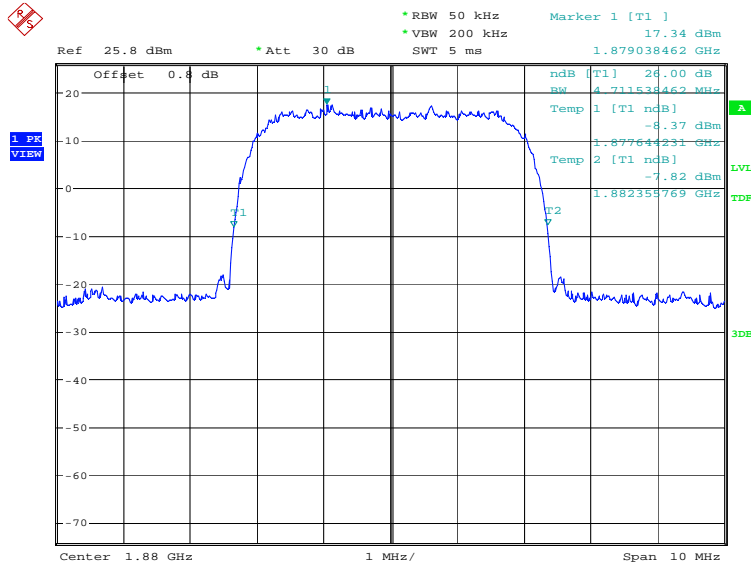

Date: 22.JAN.2019 09:55:13

Channel 9538-Emission Bandwidth

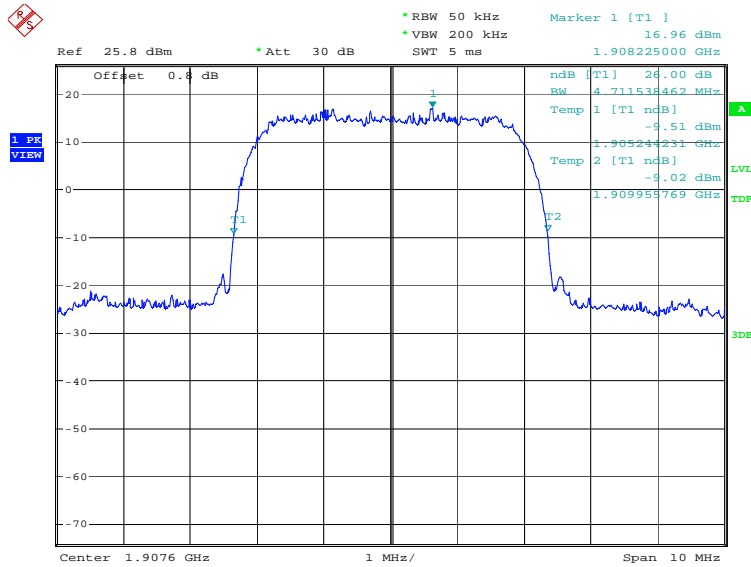


Date: 22.JAN.2019 09:56:25

WCDMA Band II -16QAM

Frequency(MHz)	Emission Bandwidth (KHz)
1852.4	4679.49
1880.0	4679.49
1907.6	4679.49

WCDMA Band II


Channel 9262-Emission Bandwidth

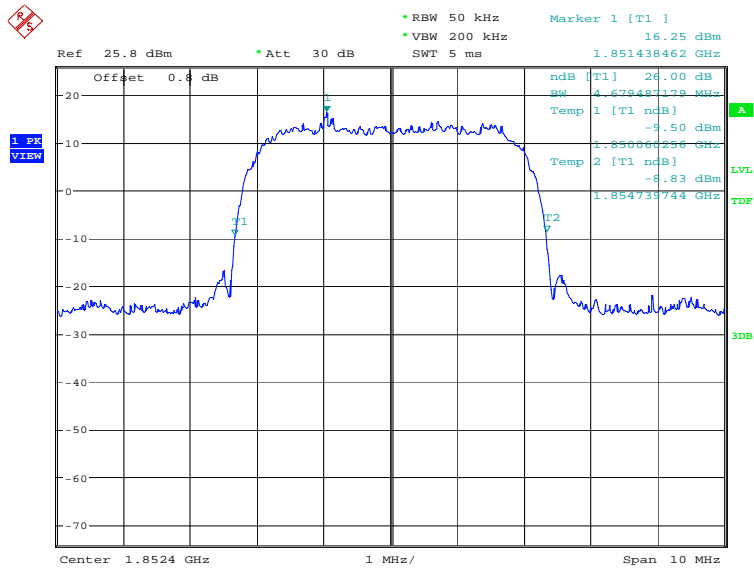

Date: 19.FEB.2019 16:20:28




Channel 9400-Emission Bandwidth

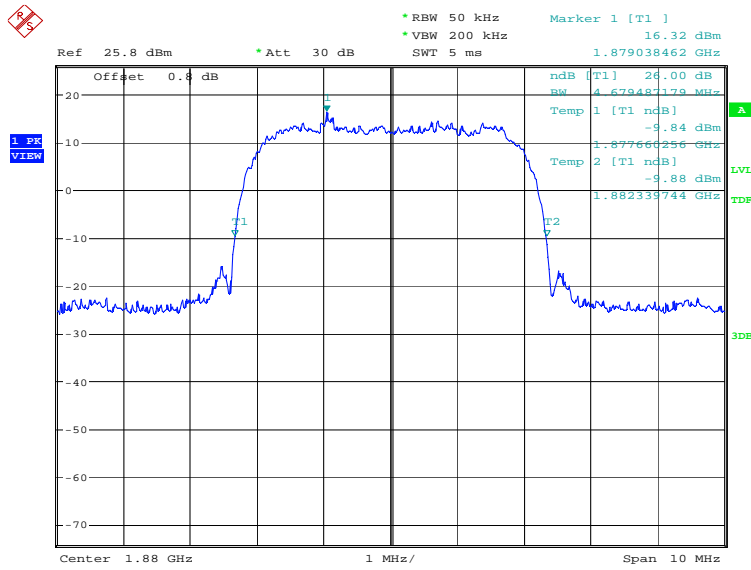

Date: 19.FEB.2019 16:21:40

Channel 9538-Emission Bandwidth

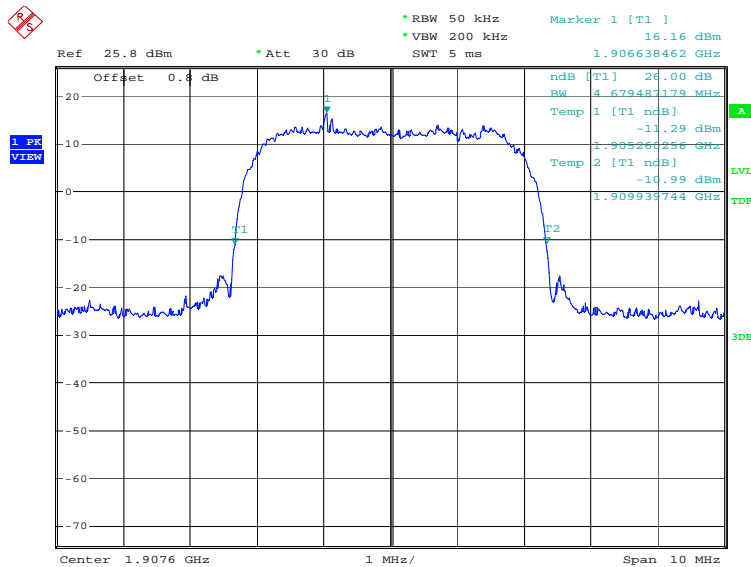


Date: 19.FEB.2019 16:22:51

WCDMA Band V-QPSK

Frequency(MHz)	Emission Bandwidth (KHz)
826.40	4679.49
836.60	4711.54
846.60	4711.54


WCDMA Band V

Channel 4132-Emission Bandwidth

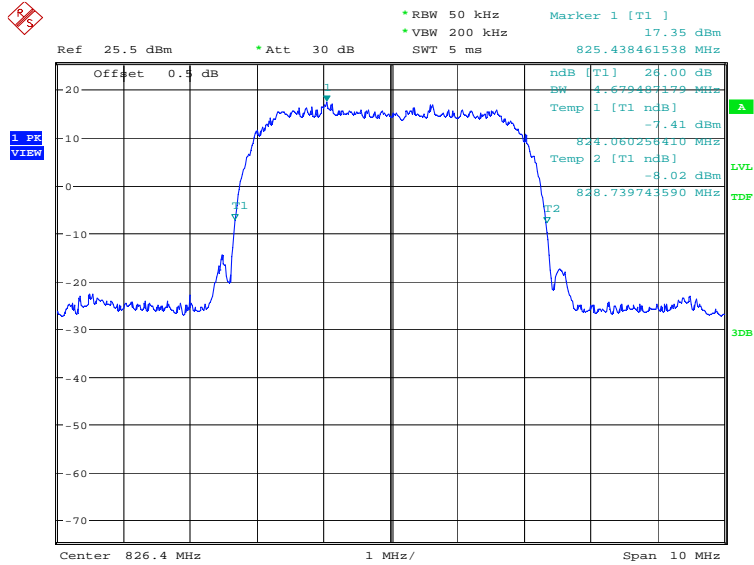


Date: 22.JAN.2019 09:58:15

Channel 4183-Emission Bandwidth

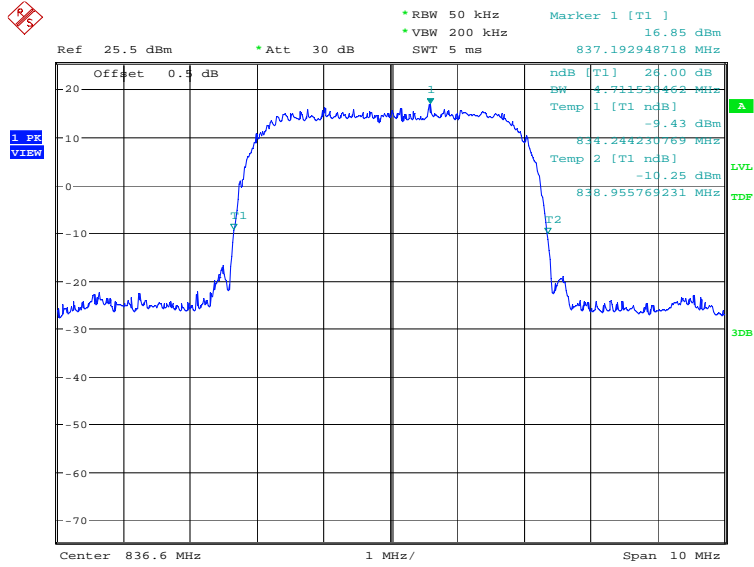

Date: 22.JAN.2019 09:59:27

Channel 4233-Emission Bandwidth

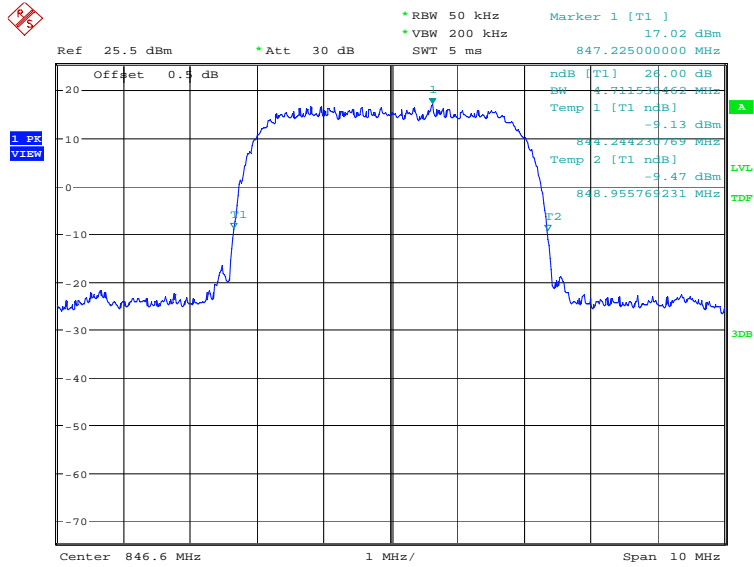

Date: 22.JAN.2019 10:00:39




WCDMA Band V-16QAM

Frequency(MHz)	Emission Bandwidth (KHz)
826.40	4679.49
836.60	4679.49
846.60	4695.51


WCDMA Band V

Channel 4132-Emission Bandwidth

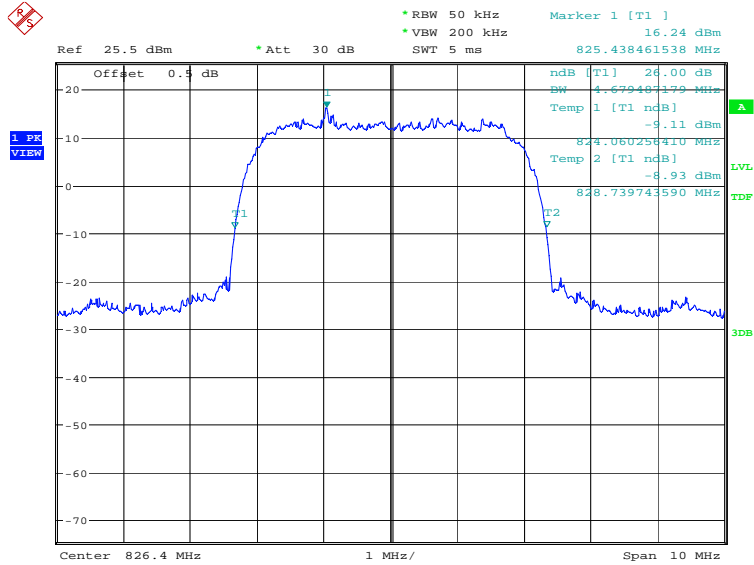


Date: 19.FEB.2019 16:24:57

Channel 4183-Emission Bandwidth

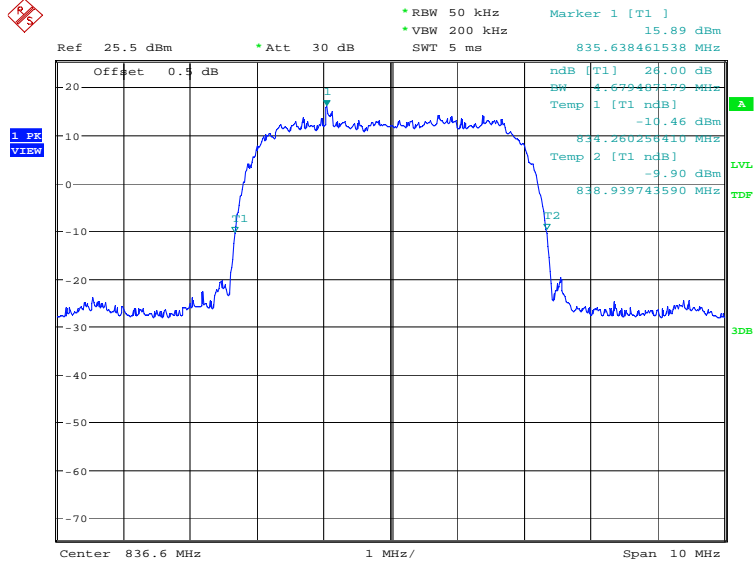

Date: 19.FEB.2019 16:26:09

Channel 4233-Emission Bandwidth

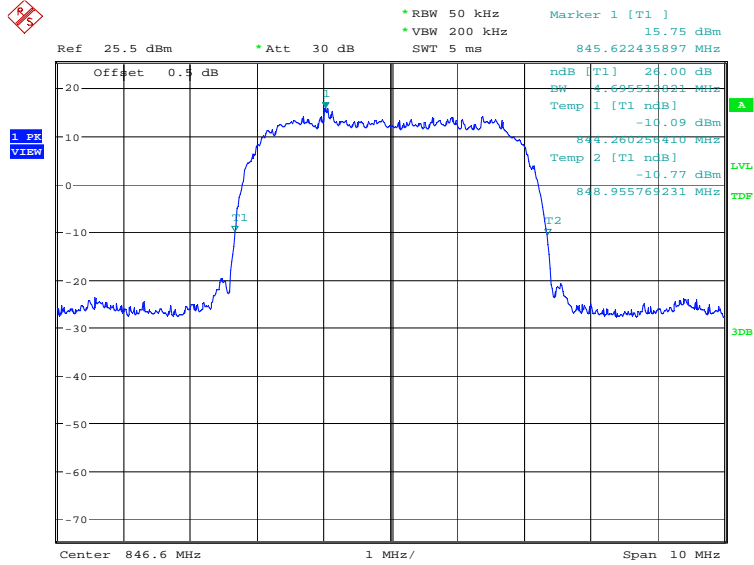

Date: 19.FEB.2019 16:27:21



A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b), 24.238(a).


A.6.1 Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

A.6.2 Measurement result


WCDMA Band II-QPSK

LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

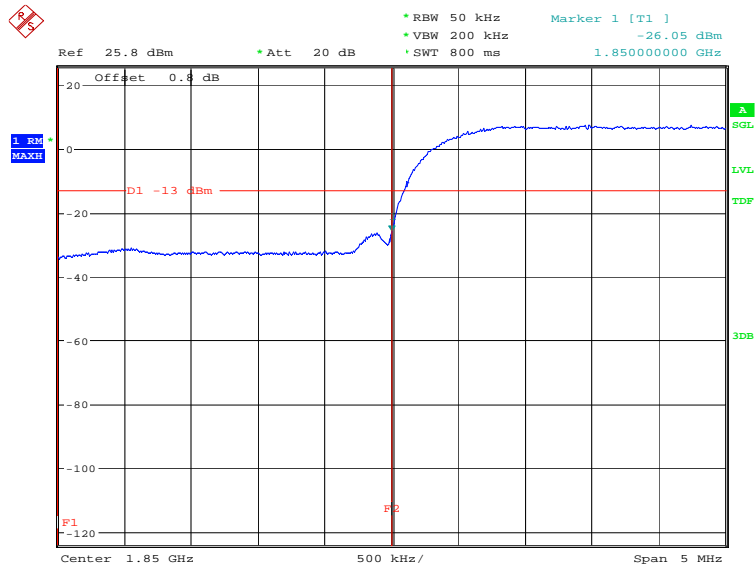


Date: 22.JAN.2019 10:01:49

HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

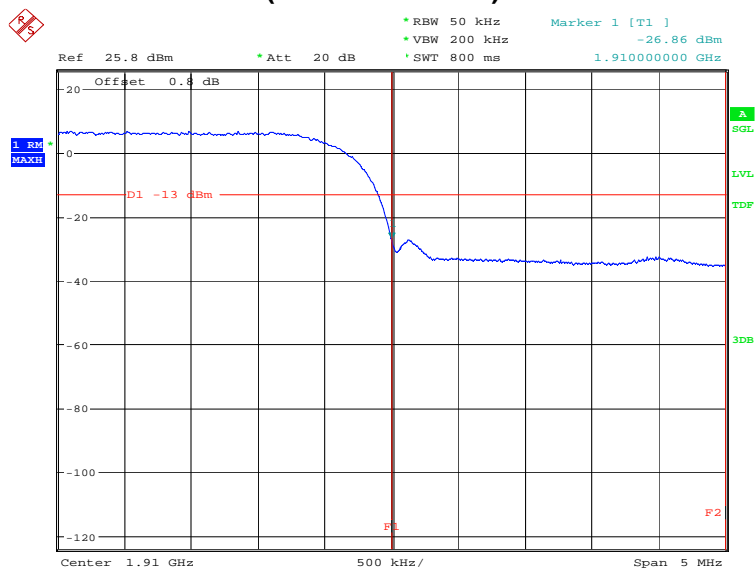


Date: 22.JAN.2019 10:02:09

WCDMA Band II -16QAM
LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

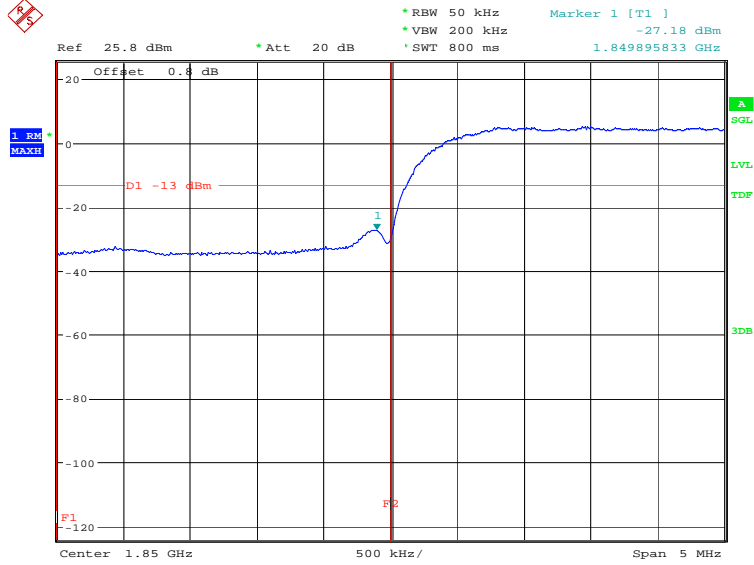


Date: 19.FEB.2019 16:28:41

HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

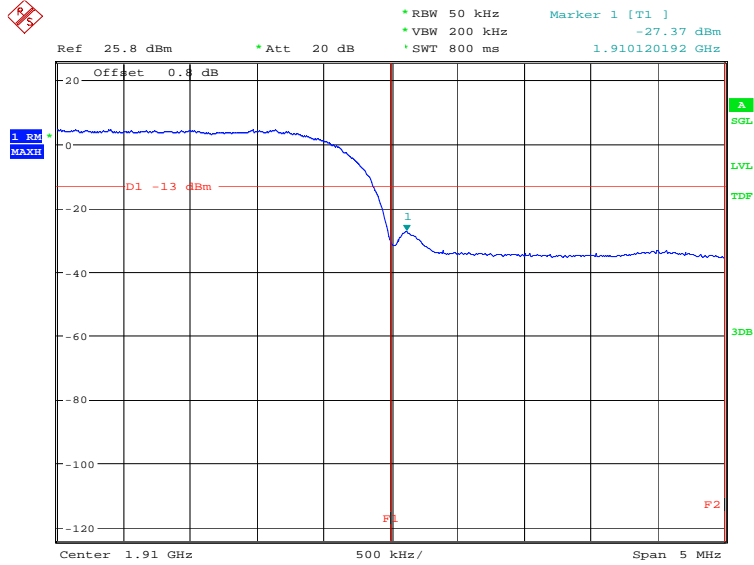


Date: 19.FEB.2019 16:29:01

WCDMA Band V-QPSK
LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

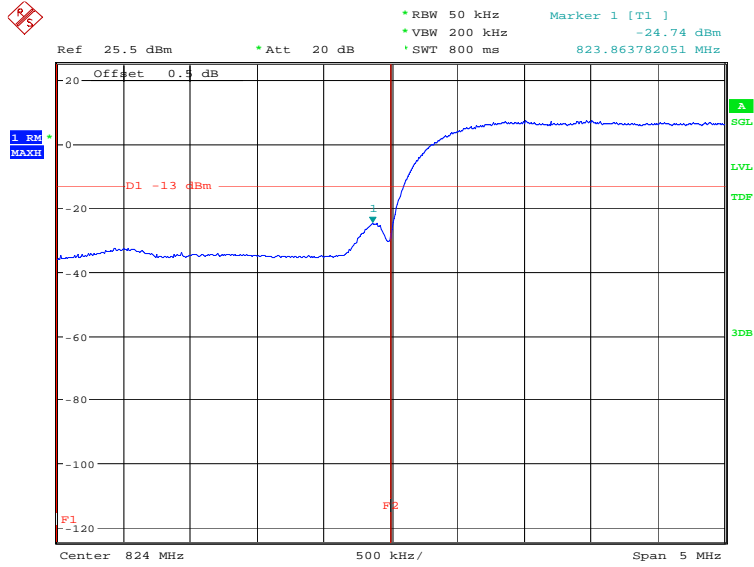

Date: 22.JAN.2019 10:03:07


HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

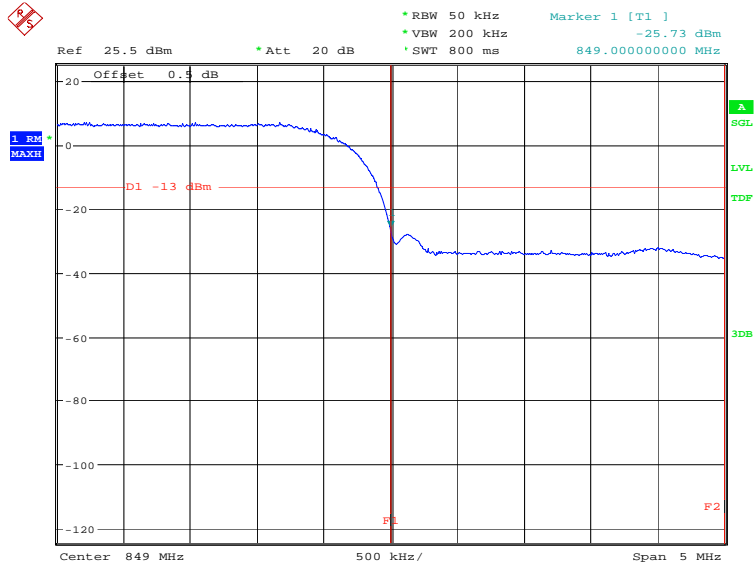

Date: 22.JAN.2019 10:03:27




WCDMA Band V -16QAM LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

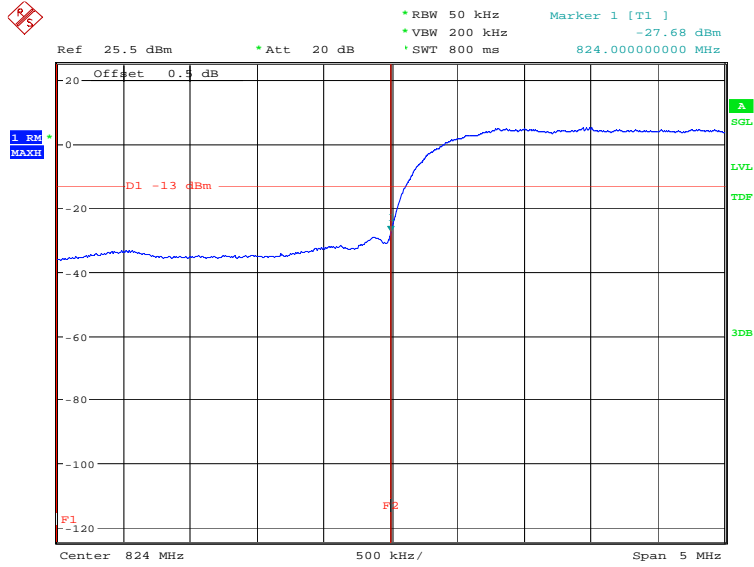

Date: 19.FEB.2019 16:30:15

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

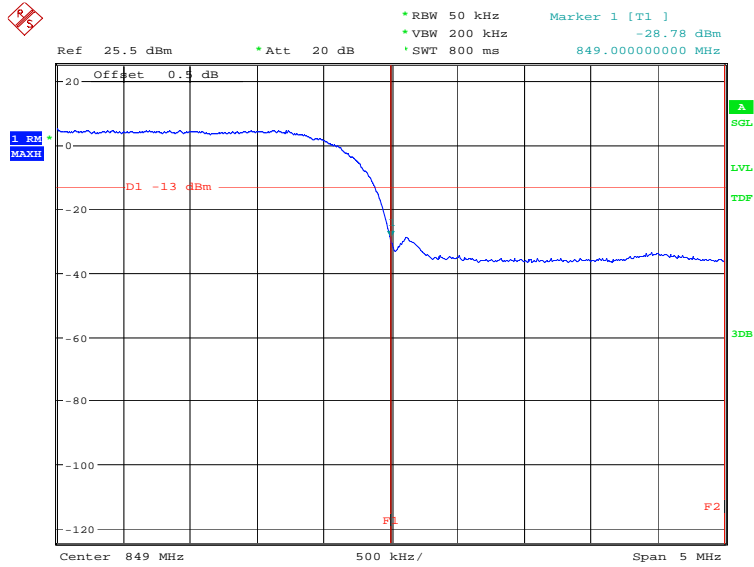

Date: 19.FEB.2019 16:30:34



A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 22.917, 24.238.

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. According to KDB 971168 6.0, the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz)

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 7.2 Measurement Limit

Part 24.238, Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.3 Measurement result

WCDMA Band II

Channel 9262: 30MHz – 19.1GHz


Spurious emission limit –13dBm.

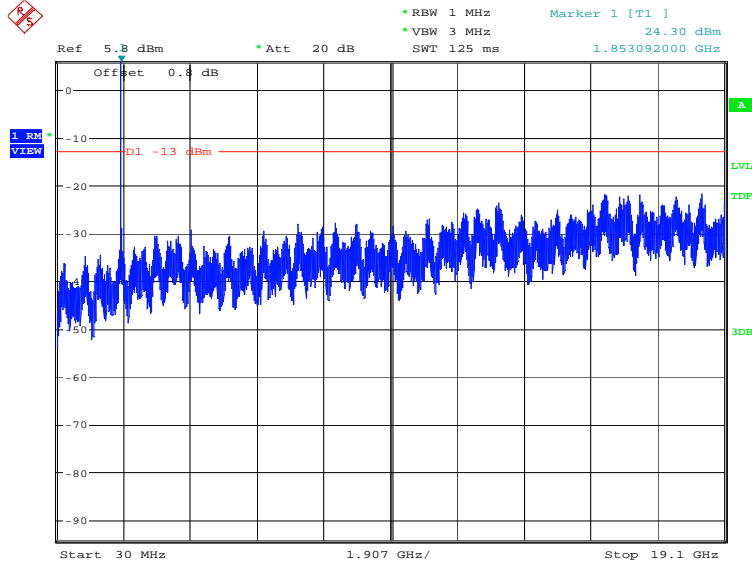

Date: 22.JAN.2019 10:04:33

Channel 9400: 30MHz – 19.1GHz


Spurious emission limit –13dBm.

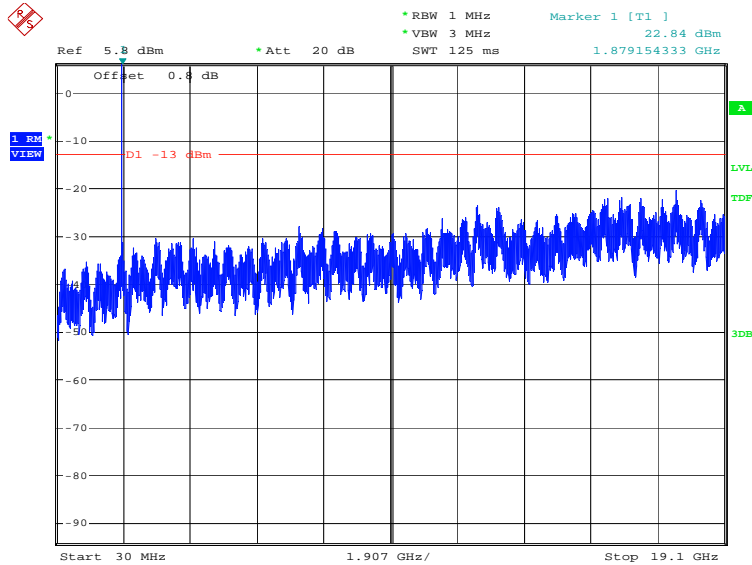

Date: 22.JAN.2019 10:04:48



Channel 9538: 30MHz –19.1GHz
Spurious emission limit –13dBm.

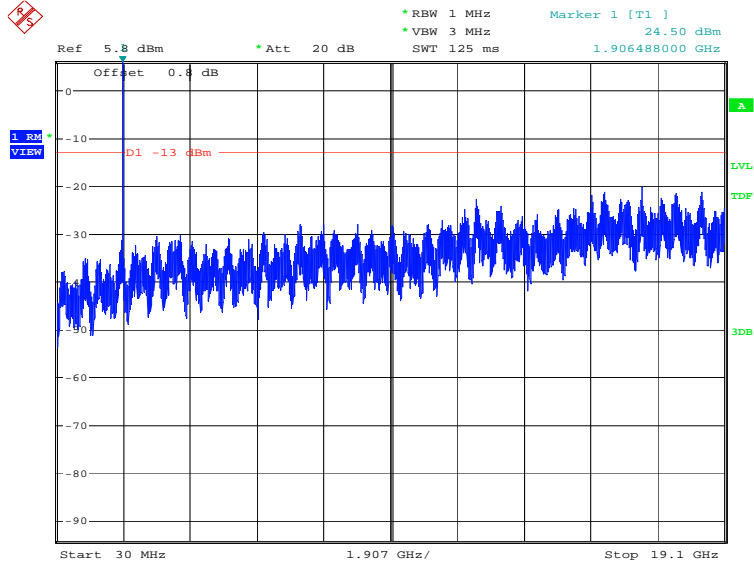


Date: 22.JAN.2019 10:05:04

WCDMA Band V

Channel 4132: 30MHz –8.49GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

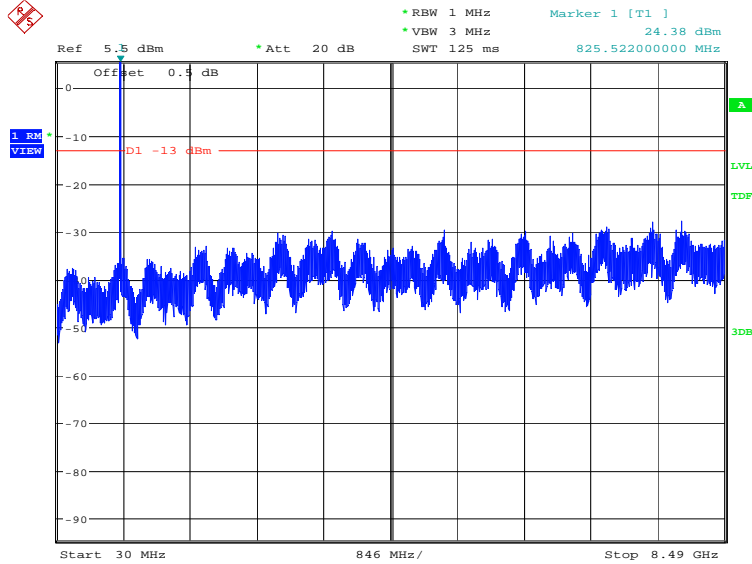

Channel 4 Date: 22.JAN.2019 10:05:59

Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

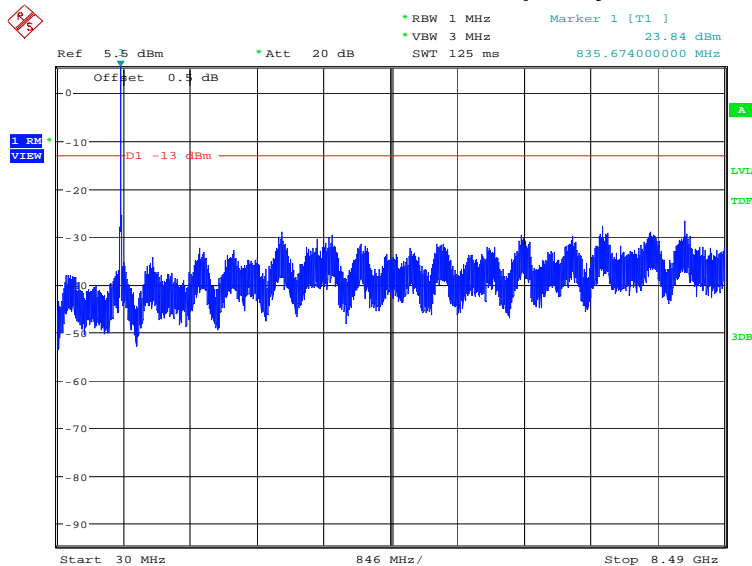


Date: 22.JAN.2019 10:06:15

Channel 4233: 30MHz –8.49GHz

Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

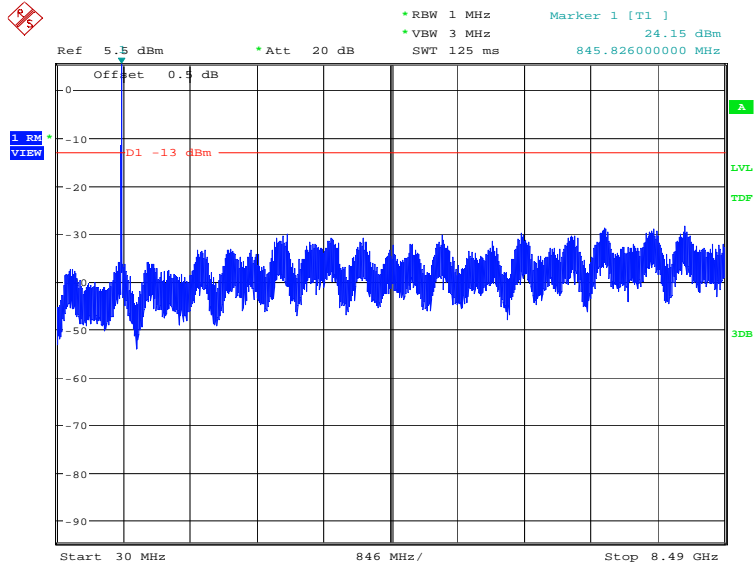

Date: 22.JAN.2019 10:06:31

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232 (d)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

WCDMA Band II-QPSK

Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	PAPR(dB)
	9400	1880.0	3.75

WCDMA Band II-16QAM

Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	PAPR(dB)
	9400	1880.0	5.10

ANNEX B: Accreditation Certificate

**United States Department of Commerce
National Institute of Standards and Technology**



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2018-09-28 through 2019-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT